

FCC PART 15.247



TEST REPORT

For

SHENZHEN J&S TECHNOLOGY & DEVELOPMENT CO., LTD

Unit 806, Tower A, Skyworth bldg., Gaoxin South 1st Ave., Shenzhen, Guangdong, China

FCC ID: ADNJSC-FA001

| | |
|--|---|
| Report Type: Original Report | Product Type: Smart Gamepad |
| Test Engineer: Henry Ding |  |
| Report Number: RSZ130225004-00 | |
| Report Date: 2013-03-27 | |
| Reviewed By: Alvin Huang RF Leader |  |
| Prepared By: | Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn |

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.

TABLE OF CONTENTS

| | |
|--|-----------|
| GENERAL INFORMATION..... | 4 |
| PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)..... | 4 |
| OBJECTIVE | 4 |
| RELATED SUBMITTAL(S)/GRANT(S)..... | 4 |
| TEST METHODOLOGY | 4 |
| TEST FACILITY | 5 |
| SYSTEM TEST CONFIGURATION..... | 6 |
| DESCRIPTION OF TEST CONFIGURATION | 6 |
| EUT EXERCISE SOFTWARE | 6 |
| EQUIPMENT MODIFICATIONS | 6 |
| SUPPORT EQUIPMENT LIST AND DETAILS | 6 |
| BLOCK DIAGRAM OF TEST SETUP | 6 |
| SUMMARY OF TEST RESULTS | 7 |
| FCC §15.247 (i) & §2.1093 – RF EXPOSURE | 8 |
| APPLICABLE STANDARD | 8 |
| RF EXPOSURE EVALUATION | 8 |
| FCC §15.203 – ANTENNA REQUIREMENT | 9 |
| APPLICABLE STANDARD | 9 |
| ANTENNA CONNECTOR CONSTRUCTION | 9 |
| FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS | 10 |
| APPLICABLE STANDARD | 10 |
| MEASUREMENT UNCERTAINTY | 10 |
| EUT SETUP | 10 |
| EMI TEST RECEIVER SETUP..... | 11 |
| TEST PROCEDURE | 11 |
| TEST EQUIPMENT LIST AND DETAILS..... | 11 |
| TEST RESULTS SUMMARY | 11 |
| TEST DATA | 11 |
| FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS..... | 14 |
| APPLICABLE STANDARD | 14 |
| MEASUREMENT UNCERTAINTY | 14 |
| EUT SETUP | 14 |
| EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP | 15 |
| TEST PROCEDURE | 15 |
| TEST EQUIPMENT LIST AND DETAILS..... | 15 |
| CORRECTED AMPLITUDE & MARGIN CALCULATION | 16 |
| TEST RESULTS SUMMARY | 16 |
| TEST DATA | 16 |
| FCC §15.247(a) (1)-CHANNEL SEPARATION | 19 |
| APPLICABLE STANDARD | 19 |
| TEST PROCEDURE | 19 |
| TEST EQUIPMENT LIST AND DETAILS..... | 19 |
| TEST DATA | 19 |
| FCC §15.247(a) (1) – 20 dB BANDWIDTH..... | 22 |

APPLICABLE STANDARD22
TEST PROCEDURE22
TEST EQUIPMENT LIST AND DETAILS.....22
TEST DATA22

FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL25
APPLICABLE STANDARD25
TEST PROCEDURE25
TEST EQUIPMENT LIST AND DETAILS.....25
TEST DATA25

FCC §15.247(a) (1) (iii) -TIME OF OCCUPANCY (DWELL TIME).....27
APPLICABLE STANDARD27
TEST PROCEDURE27
TEST EQUIPMENT LIST AND DETAILS.....27
TEST DATA27

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT30
APPLICABLE STANDARD30
TEST PROCEDURE30
TEST EQUIPMENT LIST AND DETAILS.....30
TEST DATA30

FCC §15.247(d) - BAND EDGES33
APPLICABLE STANDARD33
TEST PROCEDURE33
TEST EQUIPMENT LIST AND DETAILS.....33
TEST DATA34

PRODUCT SIMILARITY DECLARATION LETTER.....36

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The SHENZHEN J&S TECHNOLOGY & DEVELOPMENT CO., LTD's product, model number: JSC-FA001 (FCC ID: ADNJSC-FA001) (the "EUT") in this report was a *Smart Gamepad*, which was measured approximately: 12.9 cm (L) x 7.0 cm (W) x 2.3 cm (H), rated with input voltage: 3.7V Li-ion battery.

Note: The series product, model JSC-FA001, JSC-FA003, JSC-FA005, JSC-FA007, JSC-FA009, JSC-FA0011 and JSC-FA0013 are electrically identical, they have the same PCB layout and schematic, model JSC-FA001 was selected for fully testing; the detailed information can be referred to the attached declaration letter which was stated and guaranteed by the applicant.

** All measurement and test data in this report was gathered from production sample serial number: 1302050 (Assigned by BACL, Shenzhen). The EUT supplied by the applicant was received on 2013-02-25.*

Objective

This report is prepared on behalf of SHENZHEN J&S TECHNOLOGY & DEVELOPMENT CO., LTD in accordance with Part 2-Subpart J, Part 15-Subparts A, B and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

No related submittal(s)

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on December 06, 2010. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2003.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in a test mode which was selected by manufacturer.

EUT Exercise Software

No exercise software was used.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details

| Manufacturer | Description | Model | Serial Number |
|--------------|-------------|-------------|---------------|
| TianYU | Adapter | S0500060-3C | / |

Block Diagram of Test Setup



SUMMARY OF TEST RESULTS

| FCC Rules | Description of Test | Result |
|---------------------------------|--------------------------------|---------------|
| §15.247 (i), §2.1093 | RF Exposure | Compliance |
| §15.203 | Antenna Requirement | Compliance |
| §15.207 (a) | Conducted Emissions | Compliance |
| §15.205, §15.209, §15.247(d) | Radiated Emissions | Compliance |
| §15.247 (a)(1) | 20 dB Bandwidth | Compliance |
| §15.247(a)(1) | Channel Separation | Compliance |
| §15.247(a)(1)(iii) | Time of Occupancy (Dwell Time) | Compliance |
| §15.247(a)(1)(iii) | Quantity of hopping channel | Compliance |
| §15.247(b)(1) | Peak Output Power Measurement | Compliance |
| §15.247(d) | Band Edges | Compliance |

FCC §15.247 (i) & §2.1093 – RF EXPOSURE

Applicable Standard

According to FCC §2.1093 and §1.1307(b) (1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB 447498 D01 Mobile Portable RF Exposure v05 Appendix A, SAR can be exempted if the output power is less than the SAR exclusion threshold:

For $f = 2450$ MHz the output power is less than 10 mW at distance of 5 mm.

RF Exposure Evaluation

Maximum peak output power at antenna input terminal:

2481 MHz: -5.31 dBm = 0.294 mW

SAR exclusion threshold 10 mW $>$ 0.294 mW

So the SAR evaluation is not necessary.

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

This product has one PCB antenna with gain -2.5 dBi, fulfill the requirement of this section, and please refer to the internal photos.

Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard


FCC §15.207

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, and LISN.

Based on CISPR-16-4-2, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement at Bay Area Compliance Laboratory Corp. (Shenzhen) is 2.4 dB (k=2, 95% level of confidence), and the uncertainty will not be taken into consideration for the test data recorded in the report.

EUT Setup

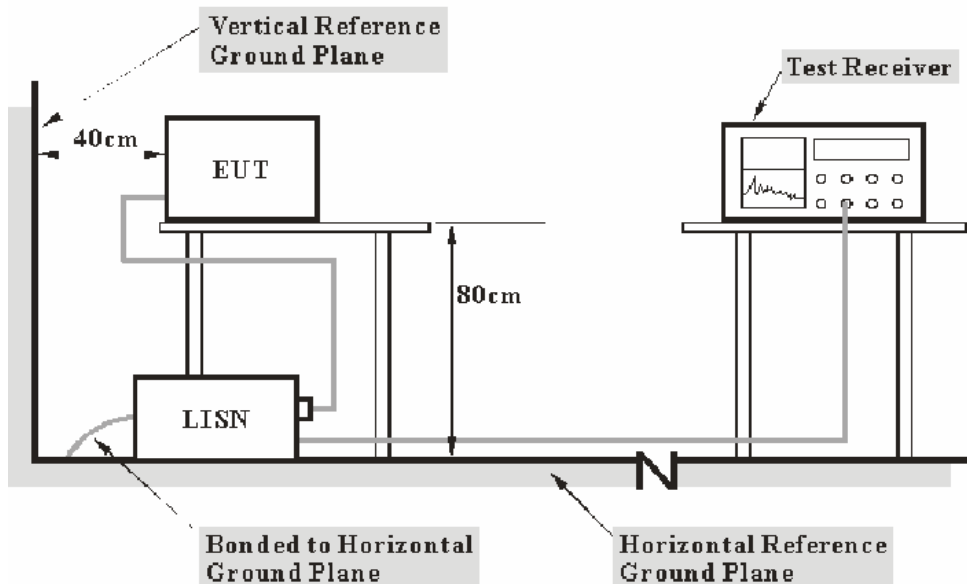

- Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The related limit was specified in FCC Part 15.207.

The adapter was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

| Frequency Range | IF B/W |
|------------------|--------|
| 150 kHz – 30 MHz | 9 kHz |

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Test Equipment List and Details

| Manufacturer | Description | Model | Serial Number | Calibration Date | Calibration Due Date |
|-----------------|-------------------|---------|---------------|------------------|----------------------|
| Rohde & Schwarz | EMI Test Receiver | ESCS30 | 100176 | 2012-11-24 | 2013-11-23 |
| Rohde & Schwarz | L.I.S.N. | ESH2-Z5 | 892107/021 | 2012-08-22 | 2013-08-21 |
| Rohde & Schwarz | Transient Limiter | ESH3Z2 | DE25985 | 2012-08-09 | 2013-08-09 |
| BACL | CE Test software | BACL-CE | V1.0 | - | - |

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, with the worst margin reading of:

23.45 dB at 0.465 MHz in the **Neutral** conducted mode

Test Data


Environmental Conditions

| | |
|--------------------|-----------|
| Temperature: | 25 °C |
| Relative Humidity: | 48 % |
| ATM Pressure: | 100.0 kPa |

The testing was performed by Henry Ding on 2013-03-26.


EUT operation mode: Charging & Transmitting

AC 120 V, 60 Hz, Line:

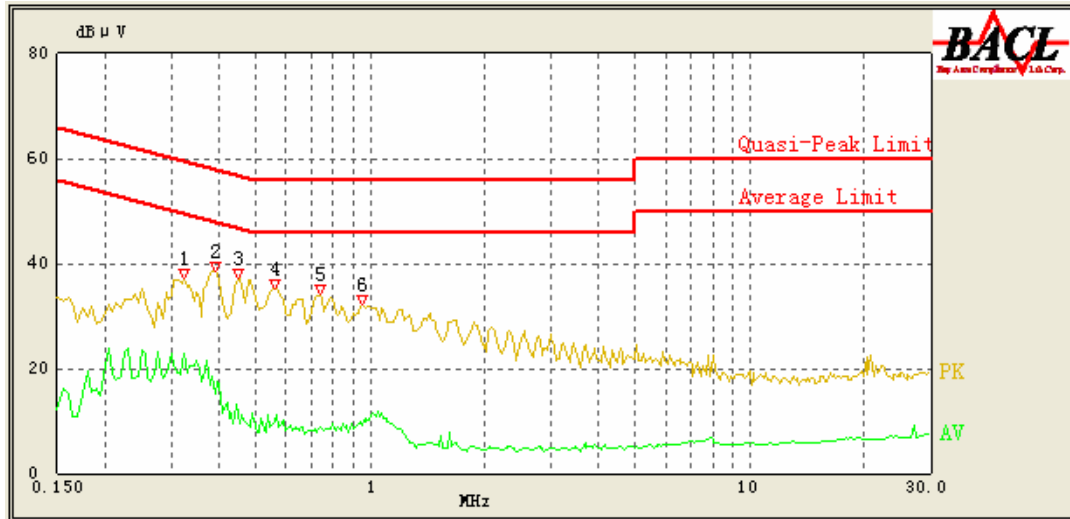

| Frequency (MHz) | Corrected Amplitude (dBμV) | Correction Factor (dB) | Limit (dBμV) | Margin (dB) | Detector (PK/QP/Ave.) |
|-----------------|----------------------------|------------------------|--------------|-------------|-----------------------|
| 0.325 | 22.83 | 10.20 | 51.00 | 28.17 | Ave. |
| 0.450 | 28.83 | 10.20 | 57.43 | 28.60 | QP |
| 0.390 | 29.59 | 10.20 | 59.14 | 29.55 | QP |
| 0.560 | 26.34 | 10.20 | 56.00 | 29.66 | QP |
| 0.325 | 31.23 | 10.20 | 61.00 | 29.77 | QP |
| 0.740 | 25.42 | 10.20 | 56.00 | 30.58 | QP |
| 0.955 | 22.76 | 10.20 | 56.00 | 33.24 | QP |
| 0.390 | 15.12 | 10.20 | 49.14 | 34.02 | Ave. |
| 0.445 | 13.28 | 10.20 | 47.57 | 34.29 | Ave. |
| 0.560 | 9.67 | 10.20 | 46.00 | 36.33 | Ave. |
| 0.950 | 9.16 | 10.20 | 46.00 | 36.84 | Ave. |
| 0.740 | 8.68 | 10.20 | 46.00 | 37.32 | Ave. |

AC 120V, 60 Hz, Neutral:

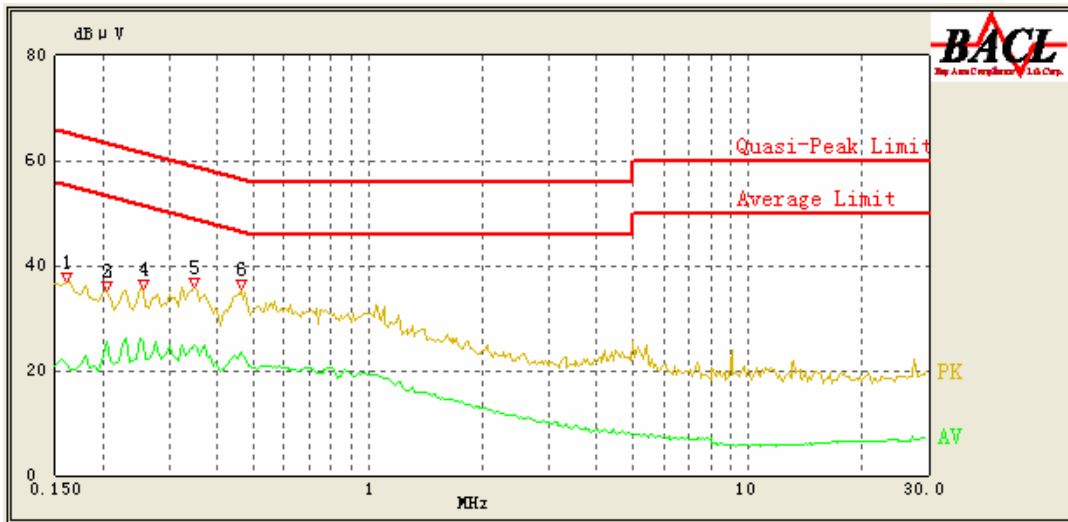

| Frequency (MHz) | Corrected Amplitude (dBμV) | Correction Factor (dB) | Limit (dBμV) | Margin (dB) | Detector (PK/QP/Ave.) |
|-----------------|----------------------------|------------------------|--------------|-------------|-----------------------|
| 0.465 | 23.55 | 10.16 | 47.00 | 23.45 | Ave. |
| 0.465 | 32.81 | 10.16 | 57.00 | 24.19 | QP |
| 0.350 | 24.75 | 10.10 | 50.29 | 25.54 | Ave. |
| 0.255 | 25.52 | 10.10 | 53.00 | 27.48 | Ave. |
| 0.205 | 25.64 | 10.10 | 54.43 | 28.79 | Ave. |
| 0.205 | 25.64 | 10.10 | 54.43 | 28.79 | Ave. |
| 0.350 | 28.81 | 10.10 | 60.29 | 31.48 | QP |
| 0.255 | 29.02 | 10.10 | 63.00 | 33.98 | QP |
| 0.160 | 21.30 | 10.10 | 55.71 | 34.41 | Ave. |
| 0.205 | 29.17 | 10.10 | 64.43 | 35.26 | QP |
| 0.205 | 29.03 | 10.10 | 64.43 | 35.40 | QP |
| 0.160 | 27.91 | 10.10 | 65.71 | 37.80 | QP |

Note:

- 1) Corrected Amplitude = Reading + Correction Factor
- 2) Correction Factor = LISN/ISN VDF (Voltage Division Factor) + Cable Loss + Pulse Limiter Attenuation
The corrected factor has been input into the transducer of the test software.
- 3) Margin = Limit - Corrected Amplitude

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard


FCC §15.247 (d); §15.209; §15.205;

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on CISPR 16-4-2, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of radiation emissions measurement at Bay Area Compliance Laboratories Corp. (Shenzhen) is 4.0 dB (k=2, 95% level of confidence), and the uncertainty will not be taken into consideration for the test data recorded in the report.

EUT Setup

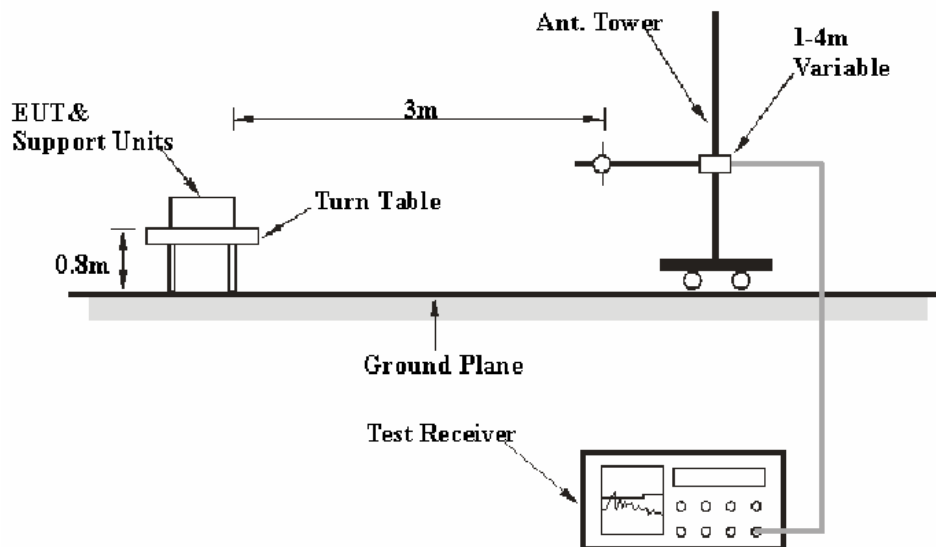

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.4-2003. The specification used was the FCC 15.209 and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The adapter was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

| Frequency Range | RBW | Video B/W | IF B/W | Detector |
|------------------|---------|-----------|--------|----------|
| 30MHz – 1000 MHz | 100 kHz | 300 kHz | 120kHz | QP |
| Above 1 GHz | 1MHz | 3 MHz | / | PK |
| | 1MHz | 10 Hz | / | Ave. |

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz to 1 GHz and peak and Average detection modes for frequencies above 1 GHz.

Test Equipment List and Details

| Manufacturer | Description | Model | Serial Number | Calibration Date | Calibration Due Date |
|---------------------------|-------------------|----------|---------------|------------------|----------------------|
| HP | Amplifier | 8447E | 1937A01046 | 2012-11-24 | 2013-11-23 |
| Rohde & Schwarz | EMI Test Receiver | ESCI | 101122 | 2012-08-08 | 2013-08-07 |
| Sunol Sciences | Broadband Antenna | JB1 | A040904-2 | 2011-11-28 | 2014-11-27 |
| SUPER ULTRA | Amplifier | ZVA-213+ | N/A | 2012-11-24 | 2013-11-23 |
| Sunol Sciences | Horn Antenna | DRH-118 | A052304 | 2011-12-01 | 2014-11-30 |
| Rohde & Schwarz | Signal Analyzer | FSIQ26 | 8386001028 | 2012-11-24 | 2013-11-23 |
| the electro-Mechanics Co. | Horn Antenna | 3116 | 9510-2270 | 2010-10-14 | 2013-10-13 |

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247, with the worst margin reading of:

7.62 dB at 7323.0 MHz in the Vertical polarization

Test Data

Environmental Conditions

| | |
|---------------------------|----------|
| Temperature: | 25 °C |
| Relative Humidity: | 56 % |
| ATM Pressure: | 100.0kPa |

The testing was performed by Henry Ding on 2013-03-18.

EUT operation mode: Transmitting

30 MHz-25 GHz:

| Frequency (MHz) | Receiver | | Turntable Degree | Rx Antenna | | Corrected Factor (dB) | Corrected Amplitude (dBµV/m) | FCC Part 15.247/205/209 | |
|-----------------------------|----------------|-----------------------|------------------|------------|-------------|-----------------------|------------------------------|-------------------------|-------------|
| | Reading (dBµV) | Detector (PK/QP/Ave.) | | Height (m) | Polar (H/V) | | | Limit (dBµV/m) | Margin (dB) |
| Low Channel (2402.0 MHz) | | | | | | | | | |
| 2402.0 | 75.97 | PK | 35 | 1.2 | H | 6.13 | 82.10 | / | / |
| 2402.0 | 60.64 | Ave. | 35 | 1.2 | H | 6.13 | 66.77 | / | / |
| 2402.0 | 75.34 | PK | 112 | 1.1 | V | 6.13 | 81.47 | / | / |
| 2402.0 | 58.02 | Ave. | 112 | 1.1 | V | 6.13 | 64.15 | / | / |
| 7206.0 | 49.01 | PK | 77 | 1.0 | V | 17.06 | 66.07 | 74 | 7.93 |
| 4804.0 | 49.98 | PK | 92 | 1.1 | V | 12.40 | 62.38 | 74 | 11.62 |
| 7206.0 | 22.47 | Ave. | 77 | 1.0 | V | 17.06 | 39.53 | 54 | 14.47 |
| 9608.0 | 18.47 | Ave. | 38 | 1.1 | V | 19.28 | 37.75 | 54 | 16.25 |
| 4804.0 | 24.08 | Ave. | 92 | 1.1 | V | 12.40 | 36.48 | 54 | 17.52 |
| 9608.0 | 35.14 | PK | 38 | 1.1 | V | 19.28 | 54.42 | 74 | 19.58 |
| 2389.7 | 22.10 | Ave. | 10 | 1.0 | V | 6.13 | 28.23 | 54 | 25.77 |
| 2389.7 | 41.92 | PK | 10 | 1.0 | V | 6.13 | 48.05 | 74 | 25.95 |
| 2338.4 | 22.50 | Ave. | 24 | 1.3 | V | 5.48 | 27.98 | 54 | 26.02 |
| 2497.6 | 19.34 | Ave. | 73 | 1.5 | V | 7.21 | 26.55 | 54 | 27.45 |
| 2338.4 | 37.44 | PK | 24 | 1.3 | V | 5.48 | 42.92 | 74 | 31.08 |
| 2497.6 | 33.21 | PK | 73 | 1.5 | V | 7.21 | 40.42 | 74 | 33.58 |
| Middle Channel (2441.0 MHz) | | | | | | | | | |
| 2441.0 | 73.76 | PK | 57 | 1.2 | H | 7.21 | 80.97 | / | / |
| 2441.0 | 58.48 | Ave. | 57 | 1.2 | H | 7.21 | 65.69 | / | / |
| 2441.0 | 74.70 | PK | 102 | 1.1 | V | 7.21 | 81.91 | / | / |
| 2441.0 | 59.27 | Ave. | 102 | 1.1 | V | 7.21 | 66.48 | / | / |
| 7323.0 | 49.89 | PK | 68 | 1.2 | V | 16.49 | 66.38 | 74 | 7.62 |
| 4882.0 | 50.25 | PK | 107 | 1.3 | V | 12.46 | 62.71 | 74 | 11.29 |
| 7323.0 | 22.15 | Ave. | 68 | 1.2 | V | 16.49 | 38.64 | 54 | 15.36 |
| 9764.0 | 17.72 | Ave. | 77 | 1.1 | V | 19.40 | 37.12 | 54 | 16.88 |
| 4882.0 | 24.12 | Ave. | 107 | 1.3 | V | 12.46 | 36.58 | 54 | 17.42 |
| 9764.0 | 35.08 | PK | 77 | 1.1 | V | 19.40 | 54.48 | 74 | 19.52 |
| 2385.4 | 21.02 | Ave. | 83 | 1.0 | V | 6.13 | 27.15 | 54 | 26.85 |
| 2354.5 | 21.32 | Ave. | 33 | 1.1 | V | 5.48 | 26.80 | 54 | 27.20 |
| 2499.3 | 19.11 | Ave. | 54 | 1.1 | H | 7.59 | 26.70 | 54 | 27.30 |
| 2354.5 | 35.33 | PK | 33 | 1.1 | V | 5.48 | 40.81 | 74 | 33.19 |
| 2385.4 | 34.58 | PK | 83 | 1.0 | V | 6.13 | 40.71 | 74 | 33.29 |
| 2499.3 | 33.10 | PK | 54 | 1.1 | H | 7.59 | 40.69 | 74 | 33.31 |

| Frequency (MHz) | Receiver | | Turntable Degree | Rx Antenna | | Corrected Factor (dB) | Corrected Amplitude (dBµV/m) | FCC Part 15.247/205/209 | |
|---------------------------|----------------|-----------------------|------------------|------------|-------------|-----------------------|------------------------------|-------------------------|-------------|
| | Reading (dBµV) | Detector (PK/QP/Ave.) | | Height (m) | Polar (H/V) | | | Limit (dBµV/m) | Margin (dB) |
| High Channel (2481.0 MHz) | | | | | | | | | |
| 2481.0 | 72.98 | PK | 35 | 1.2 | H | 7.21 | 80.19 | / | / |
| 2481.0 | 57.61 | Ave. | 35 | 1.2 | H | 7.21 | 64.82 | / | / |
| 2481.0 | 74.70 | PK | 112 | 1.1 | V | 7.21 | 81.91 | / | / |
| 2481.0 | 59.30 | Ave. | 112 | 1.1 | V | 7.21 | 66.51 | / | / |
| 4962.0 | 52.31 | PK | 38 | 1.2 | V | 12.50 | 64.81 | 74 | 9.19 |
| 7443.0 | 48.10 | PK | 67 | 1.3 | V | 15.90 | 64.00 | 74 | 10.00 |
| 7443.0 | 22.05 | Ave. | 67 | 1.3 | V | 15.90 | 37.95 | 54 | 16.05 |
| 9924.0 | 17.70 | Ave. | 93 | 1.2 | V | 19.38 | 37.08 | 54 | 16.92 |
| 4962.0 | 24.36 | Ave. | 38 | 1.2 | V | 12.50 | 36.86 | 54 | 17.14 |
| 9924.0 | 33.57 | PK | 93 | 1.2 | V | 19.38 | 52.95 | 74 | 21.05 |
| 2483.7 | 44.04 | PK | 102 | 1.1 | V | 7.21 | 51.25 | 74 | 22.75 |
| 2383.2 | 20.73 | Ave. | 38 | 1.2 | V | 6.13 | 26.86 | 54 | 27.14 |
| 2326.2 | 21.21 | Ave. | 74 | 1.3 | H | 5.48 | 26.69 | 54 | 27.31 |
| 2483.7 | 19.35 | Ave. | 102 | 1.1 | V | 7.21 | 26.56 | 54 | 27.44 |
| 2383.2 | 34.83 | PK | 38 | 1.2 | V | 6.13 | 40.96 | 74 | 33.04 |
| 2326.2 | 35.14 | PK | 74 | 1.3 | H | 5.48 | 40.62 | 74 | 33.38 |

Note:

1. Corrected Factor=Antenna factor (RX) +cable loss – amplifier factor
2. Corrected Amplitude = Corrected Factor + Receiver Reading
3. Margin = Limit- Corrected Amplitude

FCC §15.247(a) (1)-CHANNEL SEPARATION

Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Set the EUT in operating mode, RBW was set at 30 kHz, VBW \geq 3RBW maxhold the channel.
2. Set the adjacent channel of the EUT maxhold another trace
3. Measure the channel separation.

Test Equipment List and Details

| Manufacturer | Description | Model | Serial Number | Calibration Date | Calibration Due Date |
|-----------------|-----------------|--------|---------------|------------------|----------------------|
| Rohde & Schwarz | Signal Analyzer | FSIQ26 | 8386001028 | 2012-11-24 | 2013-11-23 |

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

| | |
|--------------------|-----------|
| Temperature: | 25 °C |
| Relative Humidity: | 56 % |
| ATM Pressure: | 100.0 kPa |

* The testing was performed by Henry Ding on 2013-03-18.

Test Result: Compliance.

Please refer to following tables and plots


EUT operation mode: Transmitting

| Channel | Channel Frequency (MHz) | Channel Separation (MHz) | >Limit (MHz) | Result |
|----------|-------------------------|--------------------------|--------------|--------|
| Low | 2402 | 1.004 | 0.795 | Pass |
| Adjacent | 2403 | | | |
| Middle | 2441 | 1.004 | 0.795 | |
| Adjacent | 2442 | | | |
| High | 2481 | 1.004 | 0.795 | |
| Adjacent | 2480 | | | |


Note: limit =2/3 of 20 dB bandwidth

Please refer to the following plots.


Low Channel

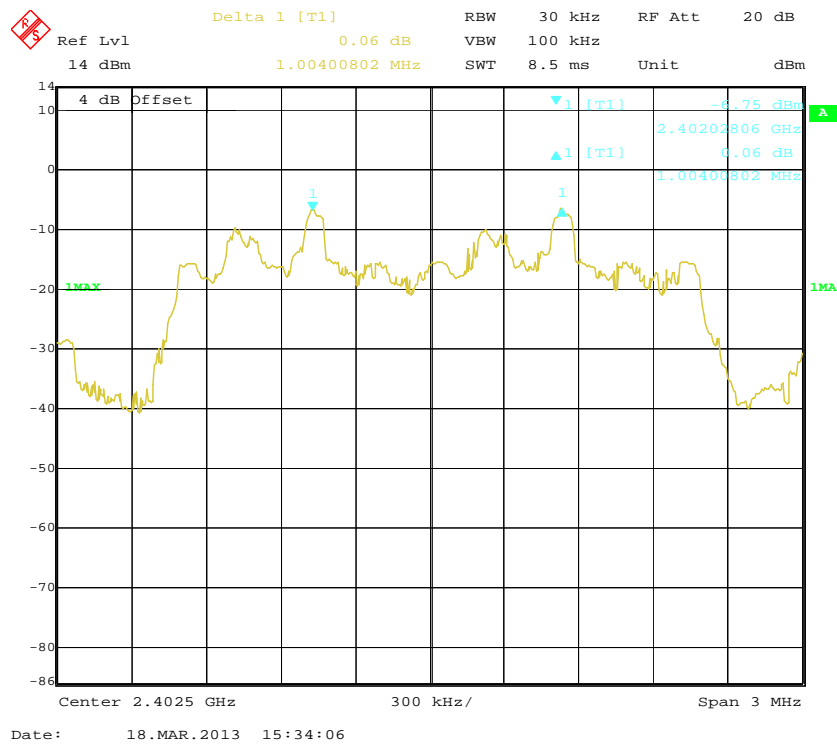

Middle Channel

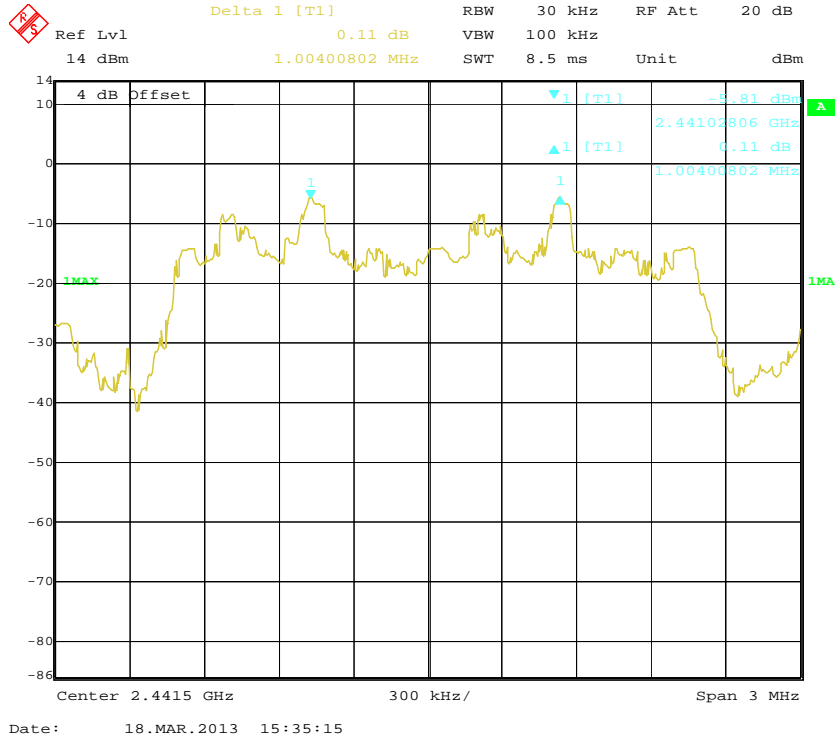

High Channel

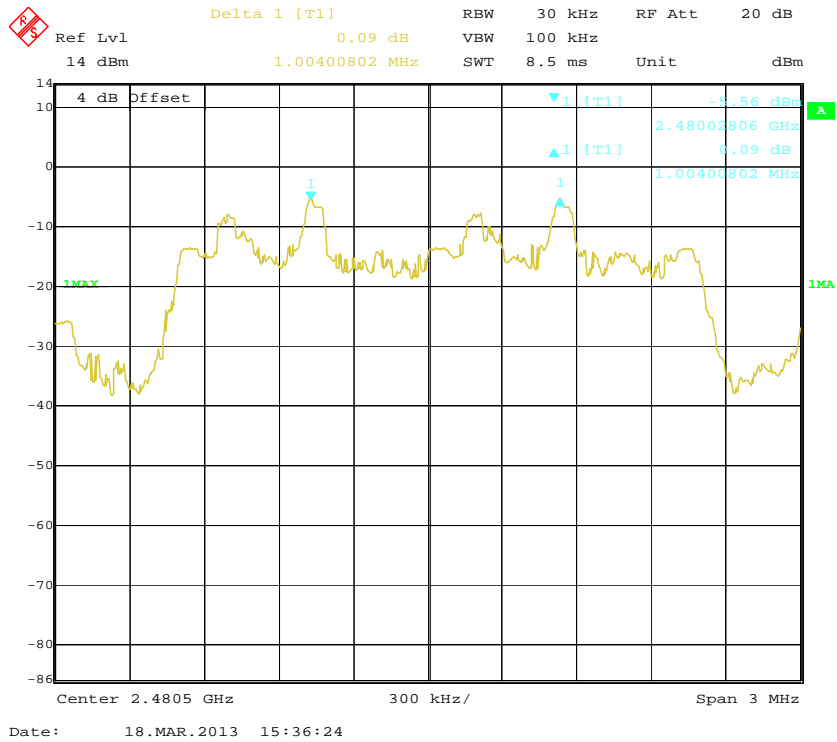

FCC §15.247(a) (1) – 20 dB BANDWIDTH

Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mW.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT on the test table without connection to measurement instrument. Turn on the EUT. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Equipment List and Details

| Manufacturer | Description | Model | Serial Number | Calibration Date | Calibration Due Date |
|-----------------|-----------------|--------|---------------|------------------|----------------------|
| Rohde & Schwarz | Signal Analyzer | FSIQ26 | 8386001028 | 2012-11-24 | 2013-11-23 |

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

| | |
|--------------------|-----------|
| Temperature: | 25 °C |
| Relative Humidity: | 56 % |
| ATM Pressure: | 100.0 kPa |

* The testing was performed by Henry Ding on 2013-03-18.

Test Result: Compliance.


Please refer to following tables and plots

EUT operation mode: Transmitting


| Channel | Frequency (MHz) | 20 dB Bandwidth (MHz) |
|---------|-----------------|-----------------------|
| Low | 2402 | 1.192 |
| Middle | 2441 | 1.192 |
| High | 2481 | 1.192 |

Please refer to the following plots.


Low Channel

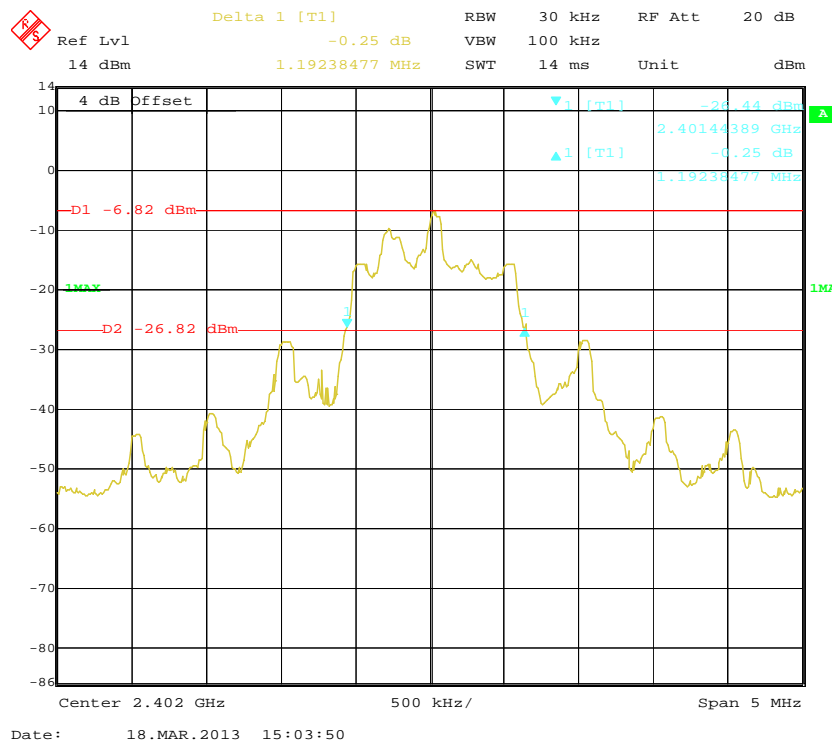

Middle Channel

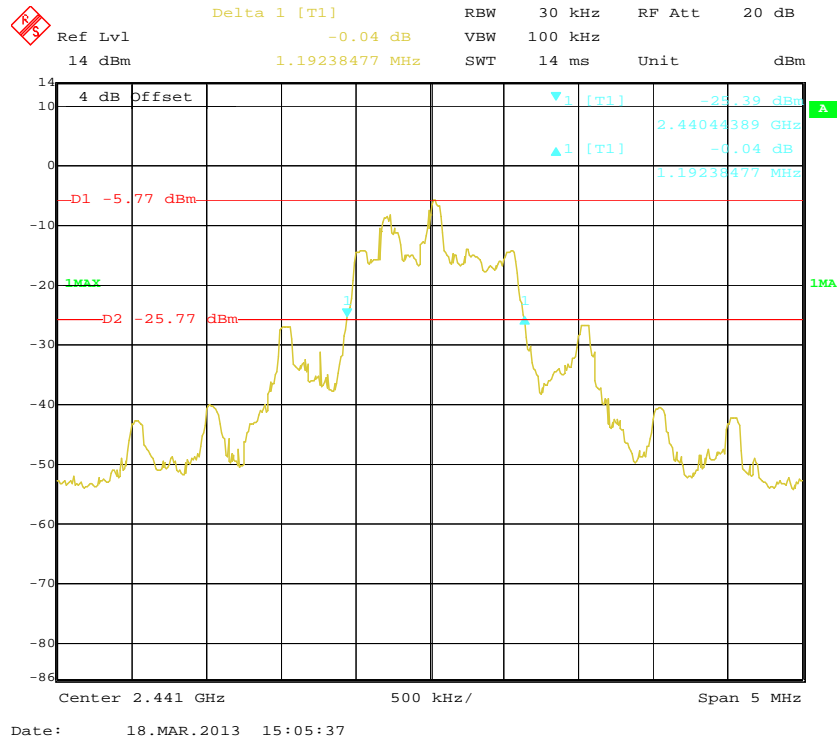

High Channel

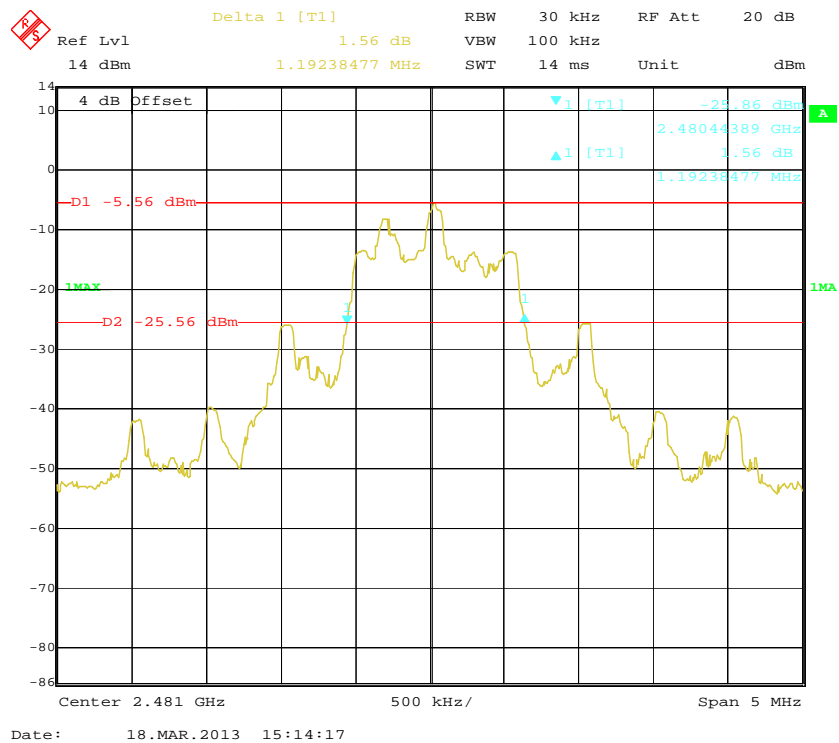

FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL

Applicable Standard

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the max-hold function record the quantity of the channel.

Test Equipment List and Details

| Manufacturer | Description | Model | Serial Number | Calibration Date | Calibration Due Date |
|---------------------|--------------------|--------------|----------------------|-------------------------|-----------------------------|
| Rohde & Schwarz | Signal Analyzer | FSIQ26 | 8386001028 | 2012-11-24 | 2013-11-23 |

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

| | |
|---------------------------|-----------|
| Temperature: | 25°C |
| Relative Humidity: | 56 % |
| ATM Pressure: | 100.0 kPa |

The testing was performed by Henry Ding on 2013-03-18.


Test Result: Compliance.

Please refer to following tables and plots

EUT operation mode: Transmitting

| Frequency Range (MHz) | Number of Hopping Channel | Limit |
|-----------------------|---------------------------|-------|
| 2400-2483.50 | 80 | ≥ 15 |

Number of Hopping Channels

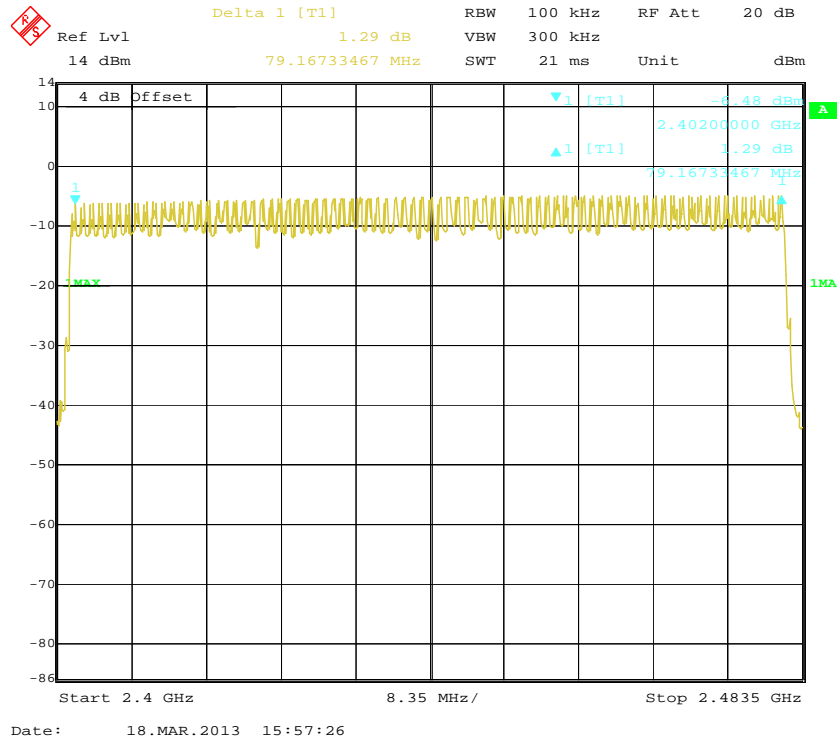

FCC §15.247(a) (1) (iii) -TIME OF OCCUPANCY (DWELL TIME)

Applicable Standard

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

The EUT was worked in channel hopping; spectrum span was set as 0. Sweep was set as 0.4 X channel no. (s), the quantity of pulse was get from single sweep. In addition, the time of single pulses was tested.

Dwell Time= Pulse time (ms) * hope rate/2/ number of hopping channels * hopping No.*0.4 s

Test Equipment List and Details

| Manufacturer | Description | Model | Serial Number | Calibration Date | Calibration Due Date |
|-----------------|-----------------|--------|---------------|------------------|----------------------|
| Rohde & Schwarz | Signal Analyzer | FSIQ26 | 8386001028 | 2012-11-24 | 2013-11-23 |

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

| | |
|--------------------|----------|
| Temperature: | 25 °C |
| Relative Humidity: | 56 % |
| ATM Pressure: | 100.0kPa |

The testing was performed by Henry Ding on 2013-03-18.

Test Result: Compliance.

Please refer to following tables and plots


EUT operation mode: Transmitting

| Channel | Pulse Width (ms) | Dwell Time (S) | Limit (S) | Result |
|---------|------------------|----------------|-----------|--------|
| Low | 0.417 | 0.0104 | 0.4 | Pass |
| Middle | 0.417 | 0.0104 | 0.4 | Pass |
| High | 0.417 | 0.0104 | 0.4 | Pass |


*Note: Dwell time = Pulse time (ms) × (125/2/80) × 80 * 0.4 S*

Please refer to the following plots.


Low Channel

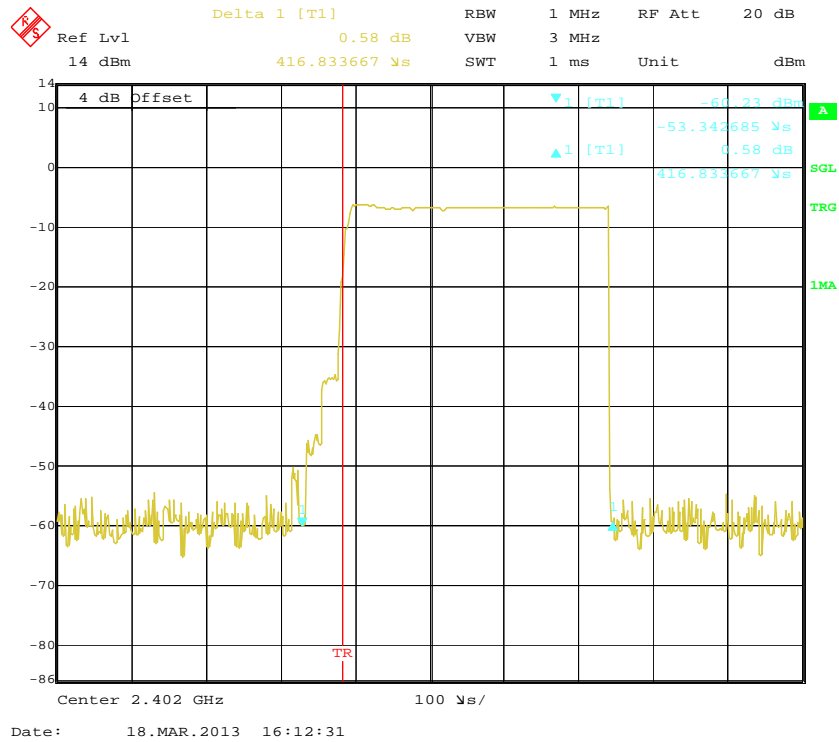

Middle Channel

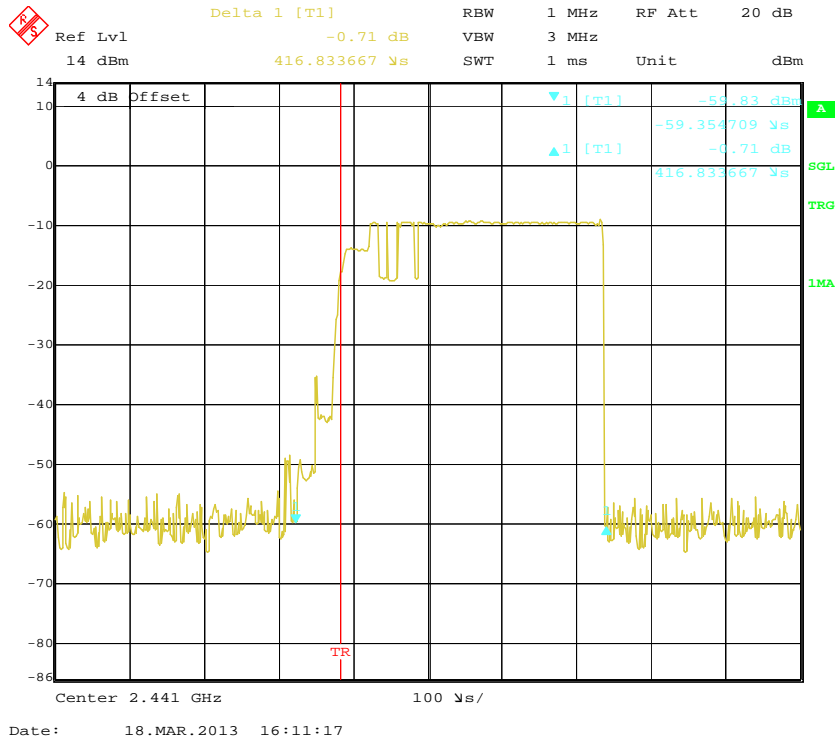

High Channel

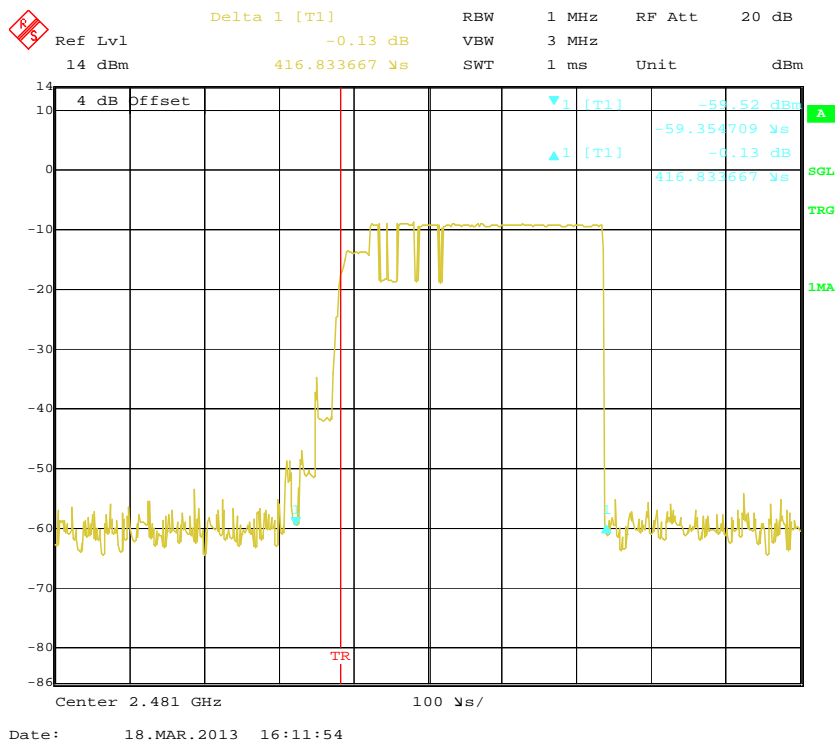


FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to an EMI Test Receiver.
3. Add a correction factor to the display.



Test Equipment List and Details

| Manufacturer | Description | Model | Serial Number | Calibration Date | Calibration Due Date |
|-----------------|-----------------|--------|---------------|------------------|----------------------|
| Rohde & Schwarz | Signal Analyzer | FSIQ26 | 8386001028 | 2012-11-24 | 2013-11-23 |

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

| | |
|---------------------------|----------|
| Temperature: | 25 °C |
| Relative Humidity: | 56 % |
| ATM Pressure: | 100.0kPa |

* The testing was performed by Henry Ding on 2013-03-18.


Test Result: Compliance.

EUT operation mode: Transmitting


| Channel | Channel frequency (MHz) | Peak output power (dBm) | Power output (mW) | Limit (mW) |
|---------|-------------------------|-------------------------|-------------------|------------|
| Low | 2402 | -6.54 | 0.222 | 1000 |
| Middle | 2441 | -5.48 | 0.283 | 1000 |
| High | 2481 | -5.31 | 0.294 | 1000 |

Note: The data above was tested in conducted mode.


Low Channel

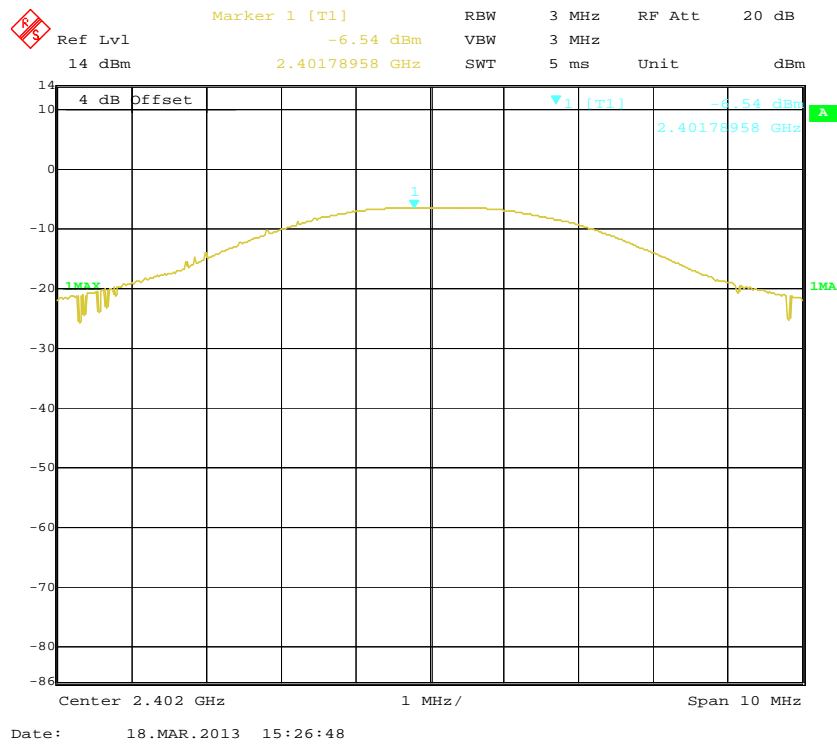

Middle Channel

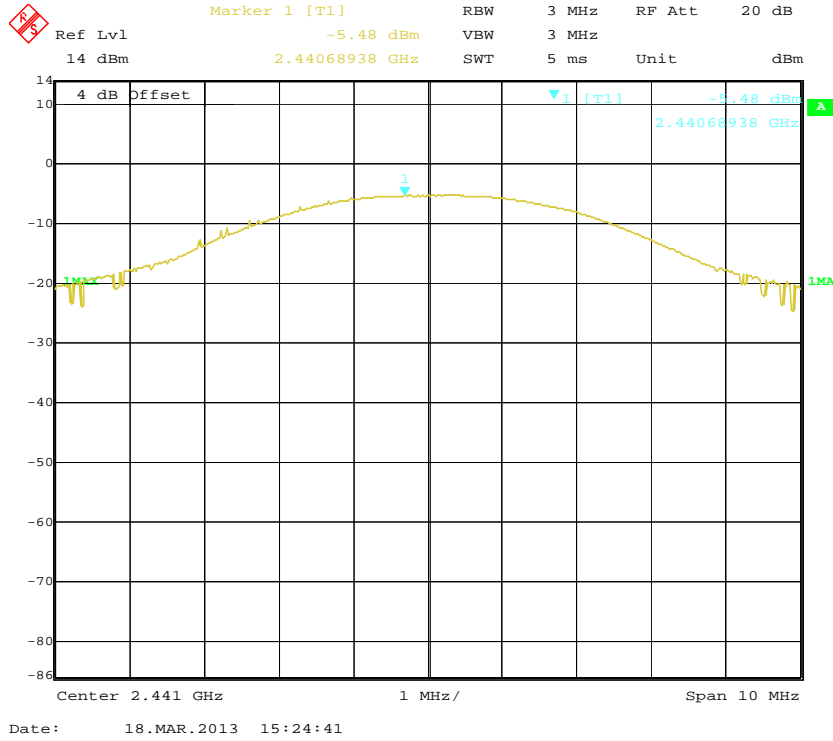

High Channel

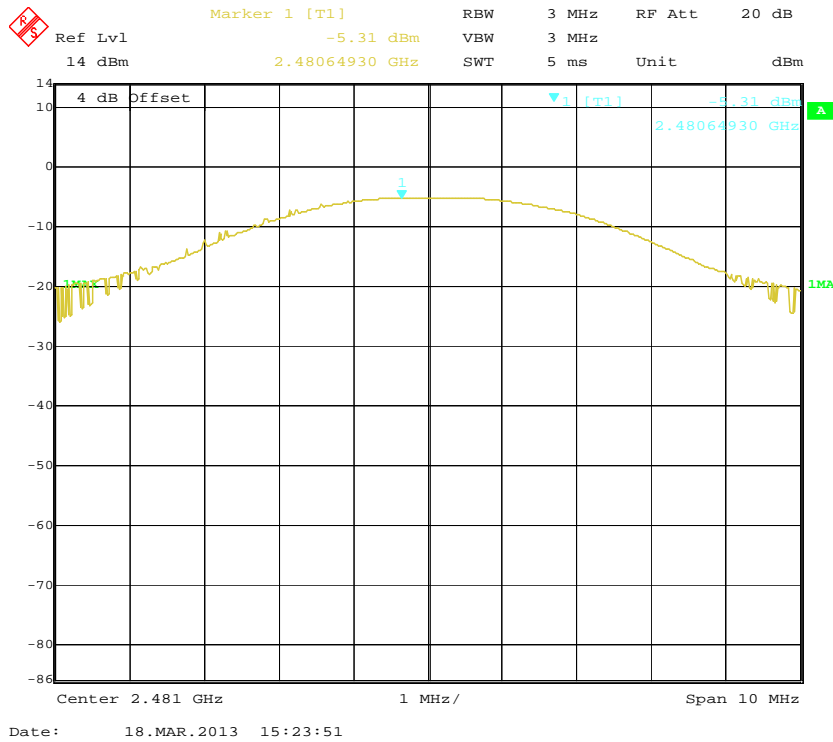

FCC §15.247(d) - BAND EDGES

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Put it on the Rotated table and turn on the EUT and make it operate in Operating mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
4. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

| Manufacturer | Description | Model | Serial Number | Calibration Date | Calibration Due Date |
|-----------------|-----------------|--------|---------------|------------------|----------------------|
| Rohde & Schwarz | Signal Analyzer | FSIQ26 | 8386001028 | 2012-11-24 | 2013-11-23 |

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

| | |
|---------------------------|----------|
| Temperature: | 25 °C |
| Relative Humidity: | 56 % |
| ATM Pressure: | 100.0kPa |

*The testing was performed by Henry Ding on 2013-03-18.


Test Result: Compliance.

EUT operation mode: Transmitting


Please refer to follow table and plots:

| Frequency Band | Delta Peak to band emission (dBc) | ≥Limit (dBc) | Result |
|----------------|-----------------------------------|--------------|--------|
| Left-band | 36.82 | 20 | Pass |
| Right-band | 38.53 | 20 | Pass |

Band Edge: Left Side

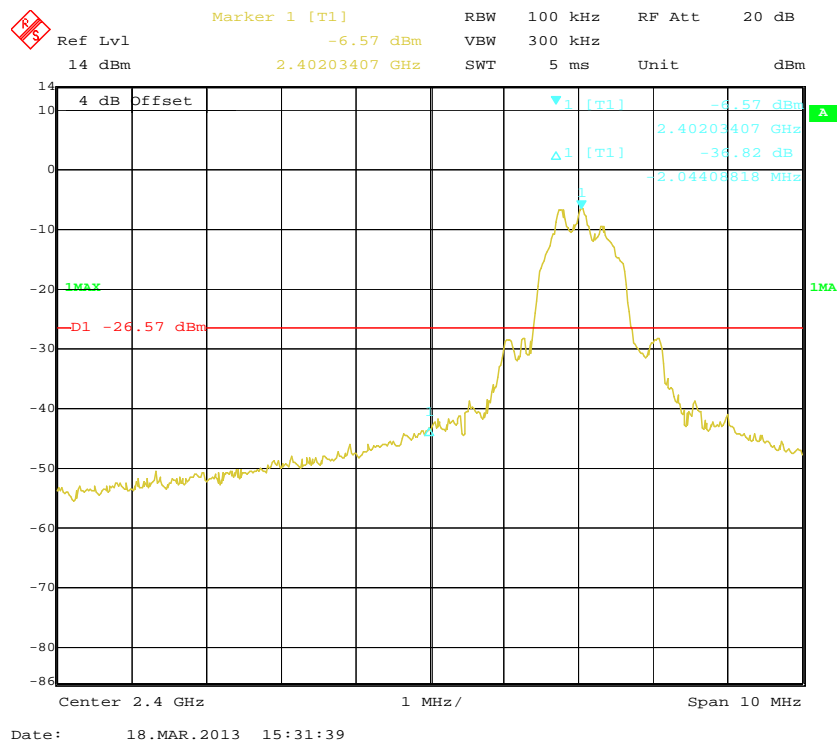

Band Edge: Right Side

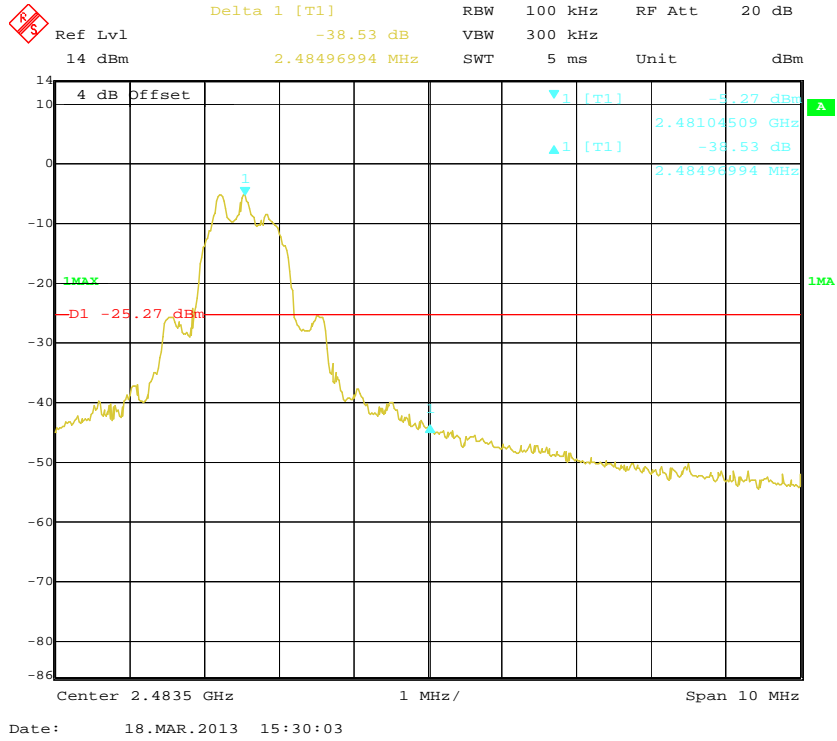

PRODUCT SIMILARITY DECLARATION LETTER



Joyful Lifestyle with Smart Solutions

SHENZHEN J&S TECHNOLOGY & DEVELOPMENT CO., LTD

Unit 806, Tower A, Skyworth bldg., Gaoxin South 1st Ave., Shenzhen, Guangdong 518057, China

Tel: +86 755 23997177-306 Fax: +86 755 23997176

2013-3-12

Product Similarity Declaration

To Whom It May Concern,

We, SHENZHEN J&S TECHNOLOGY & DEVELOPMENT CO., LTD hereby declare that our Smart Gamepad, Model Number: JSC-FA003, JSC-FA005, JSC-FA007, JSC-FA009, JSC-FA0011, JSC-FA0013 are electrically identical with JSC-FA001 that was certified by BACL. They are only different in model names due to marketing purpose.

Please contact me if you have any question.

Signature:

Haiyang Chen
Project Manage

***** END OF REPORT *****