

Test Report No.50060009 001

Appendix D: Radiated and Mains Spurious Emission Data

(File: 50060009AppendixD)



Contents

Spurious Emissions, Band Edges, 2.35-2.5G	2
Spurious Emissions, TX Mode, 1-18G.....	6
Spurious Emissions, TX Mode, 18-26G.....	12
Spurious Emissions, TX Mode, 30M-1G	18
Spurious Emissions, RX Mode, 1-18G	20
Spurious Emissions, RX Mode, 18-26G	22
Spurious Emissions, RX Mode, 30M-1G	24
Spurious Emissions, Mains, 150kHz - 30MHz	26

Spurious Emissions, Band Edges, 2.35-2.5G



Radiated Bandedge (GFSK)

Low Channel (Hor)

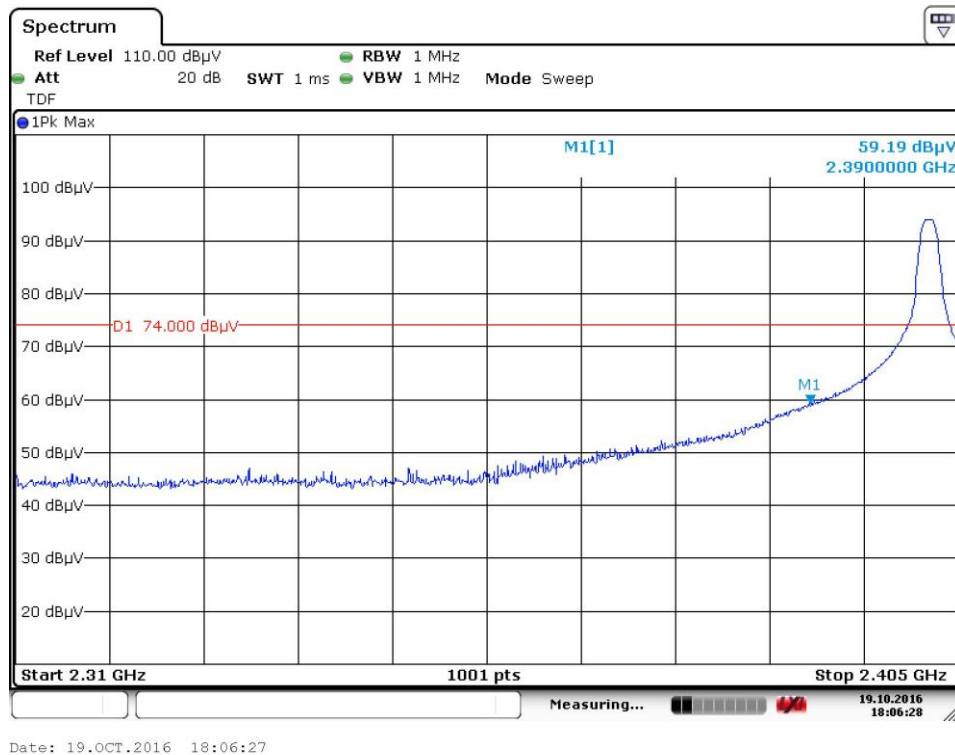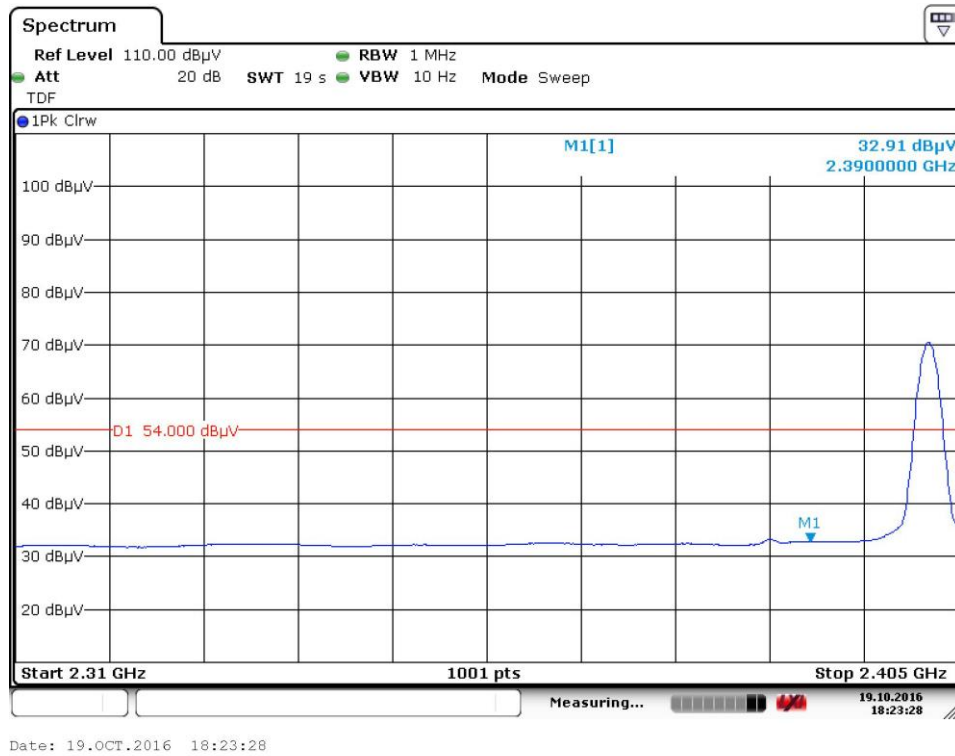

Spurious Emissions, Band Edge, 2.35-2.5G



Low Channel (Ver)

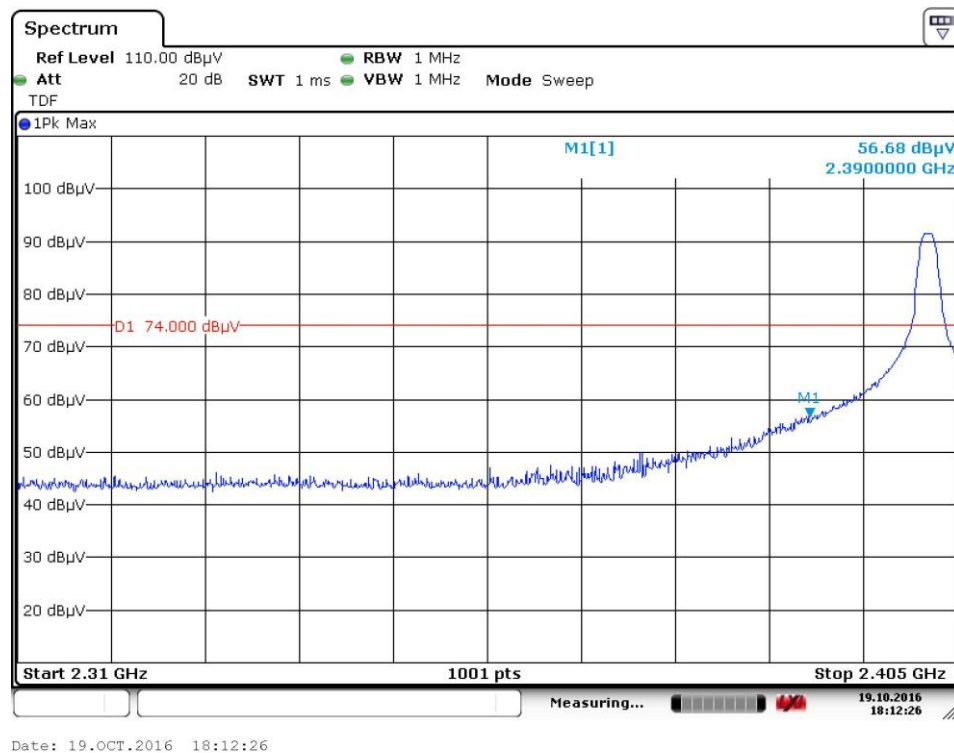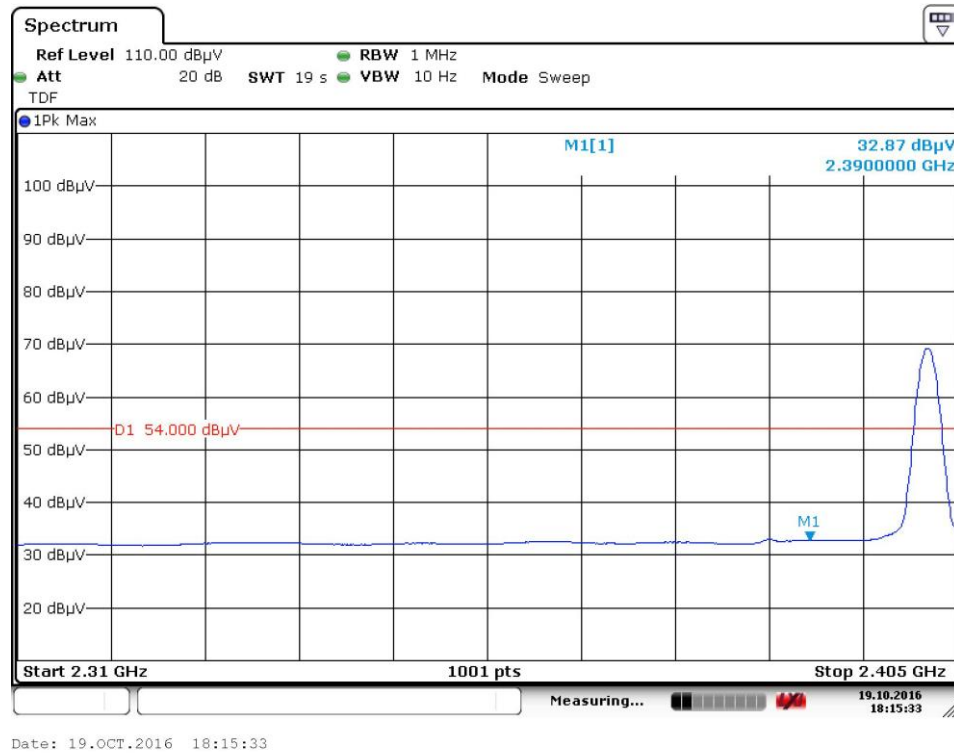

Spurious Emissions, Band Edge, 2.35-2.5G



Radiated Bandedge (GFSK)

High Channel (Hor)

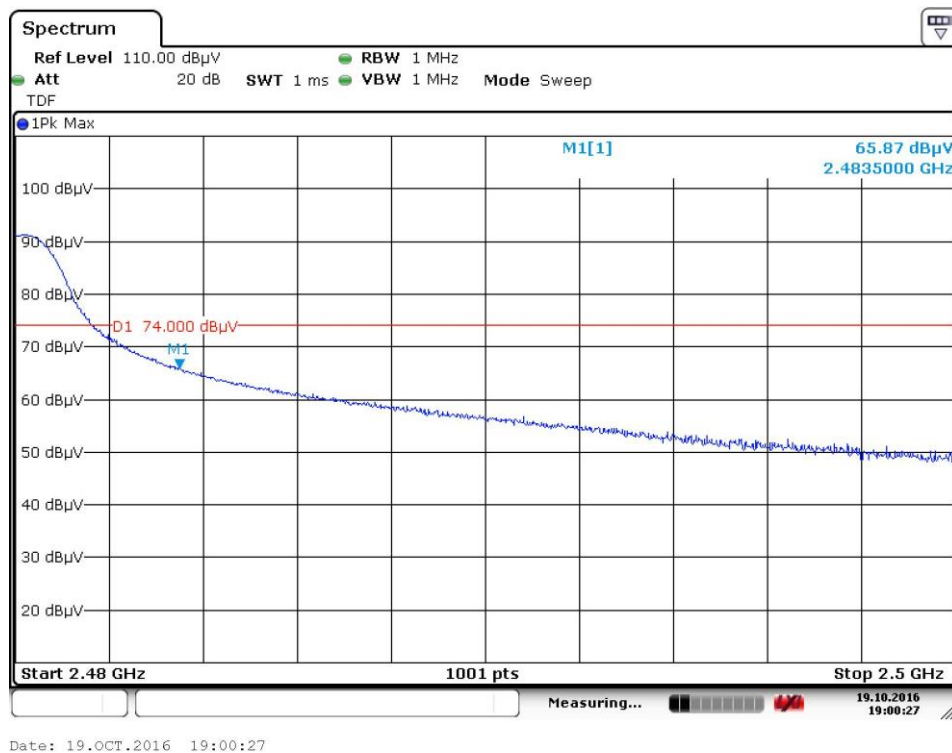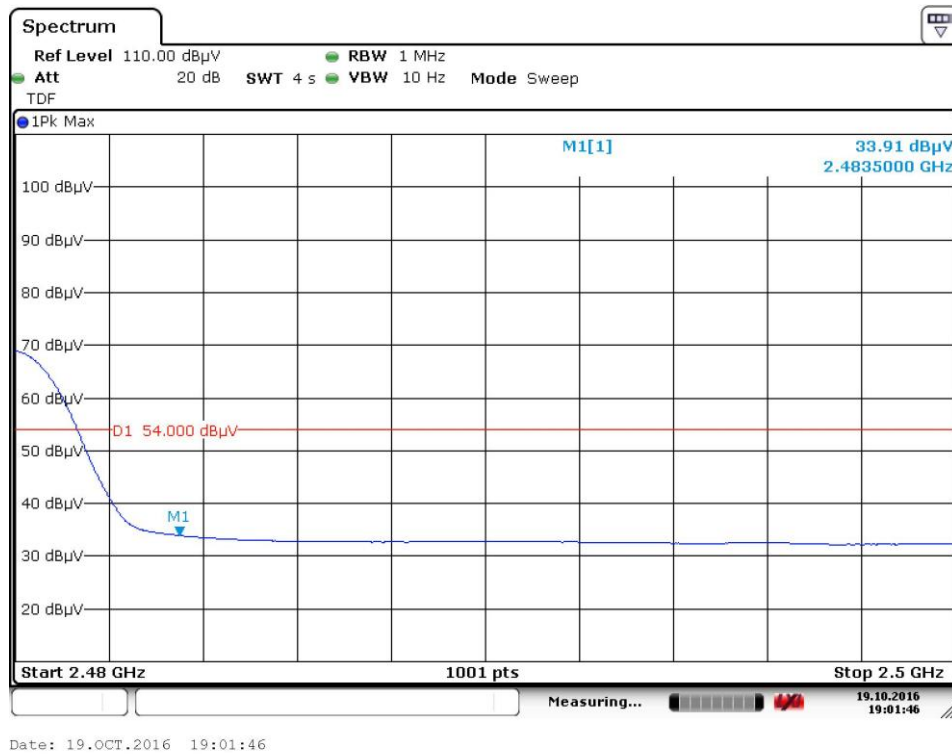

Spurious Emissions, Band Edge, 2.35-2.5G

High Channel (Ver)

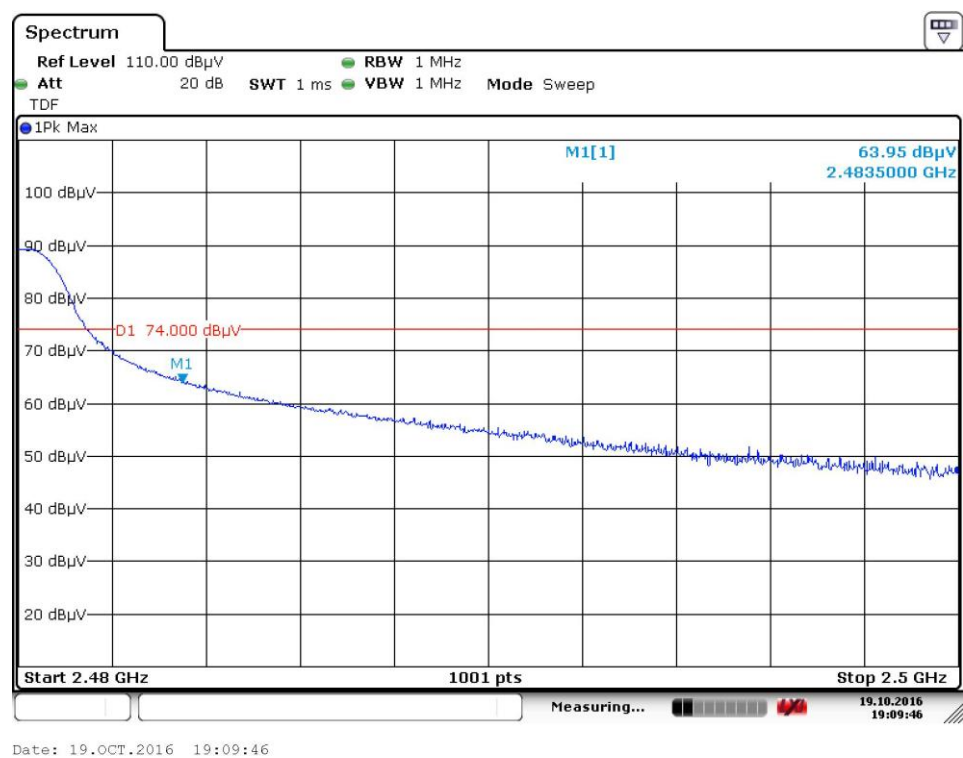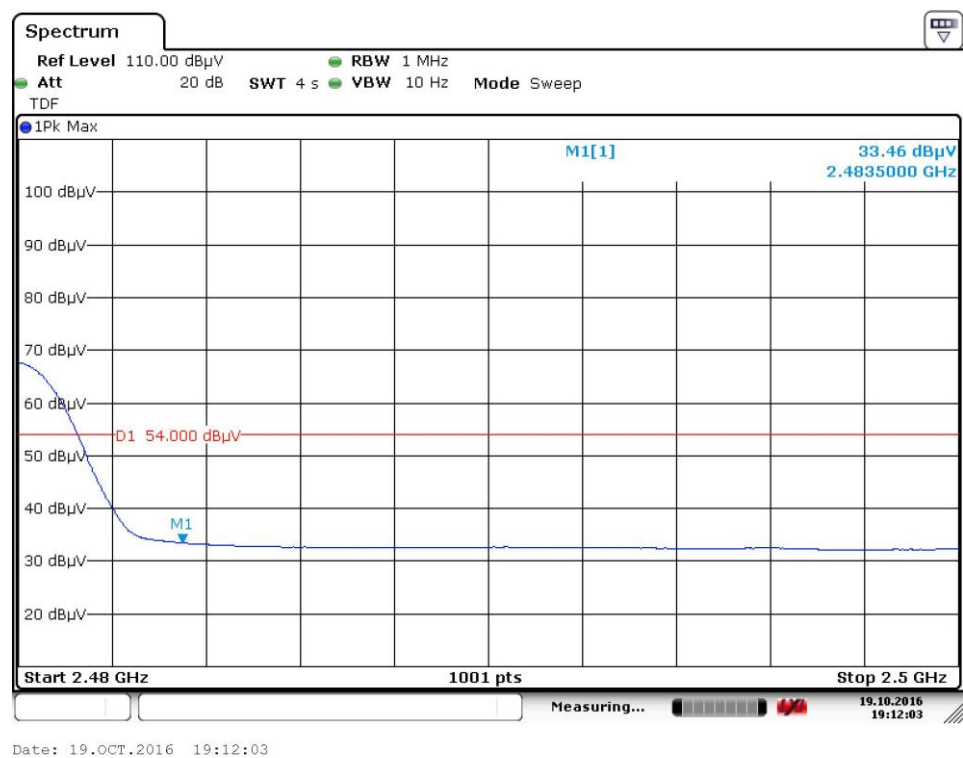

Spurious Emissions, Band Edge, 2.35-2.5G


Spurious Emissions, TX Mode, 1-18G



TUV Taiwan


11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel: +886-2172-7000 fax: +886-2528-0018

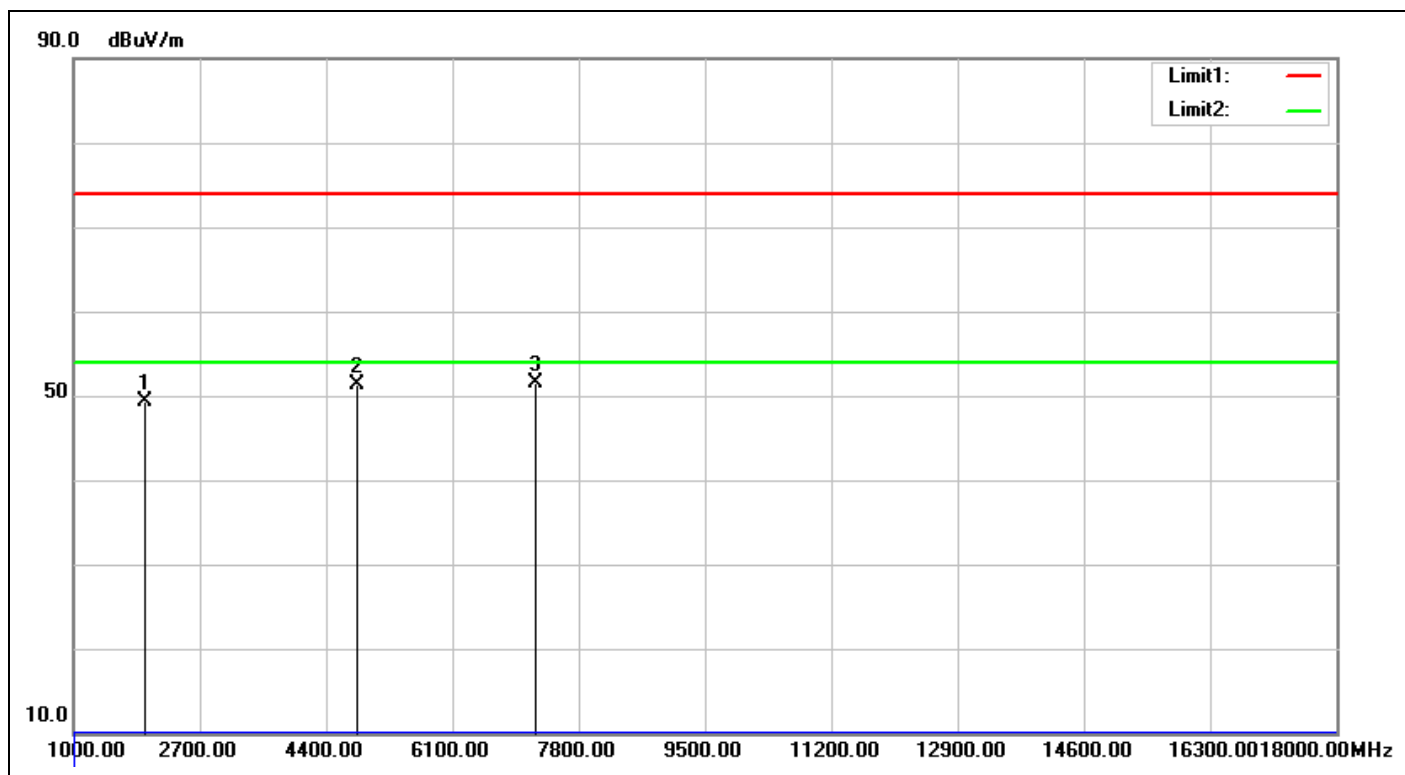


Service No.:	114056713	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2016/10/19 18:26:59
Applicant:	Bionime	Test Rating:	DC 5V
Product:	BLE module / 藍牙模組	Temp.(°C)/Hum.(%):	22.4(°C)/66%
Model No.:	BM300	Test Engineer:	Kai Wang
Test Mode:	2402-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	1952.000	-7.45	56.72	49.27	74.00	-24.73	peak	128	0	
2	4804.000	-2.64	54.02	51.38	74.00	-22.62	peak	100	62	
3	7206.000	5.57	45.89	51.46	74.00	-22.54	peak	100	307	

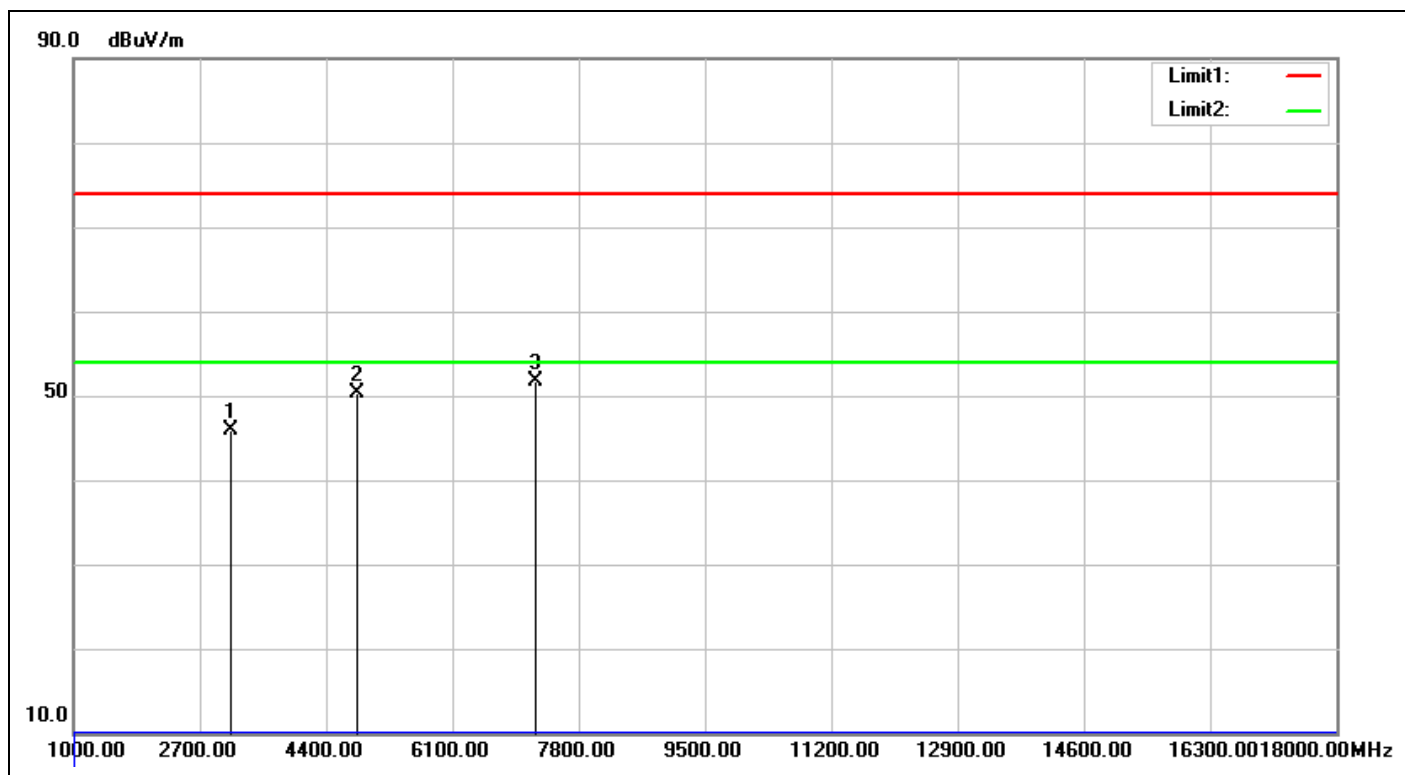


Service No.:	114056713	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2016/10/19 18:29:17
Applicant:	Bionime	Test Rating:	DC 5V
Product:	BLE module / 藍牙模組	Temp.(°C)/Hum.(%)	22.4(°C)/66%
Model No.:	BM300	Test Engineer:	Kai Wang
Test Mode:	2402-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	3125.000	-6.36	52.21	45.85	74.00	-28.15	peak	200	127	
2	4804.000	-2.64	52.95	50.31	74.00	-23.69	peak	200	315	
3	7206.000	5.57	46.14	51.71	74.00	-22.29	peak	199	0	

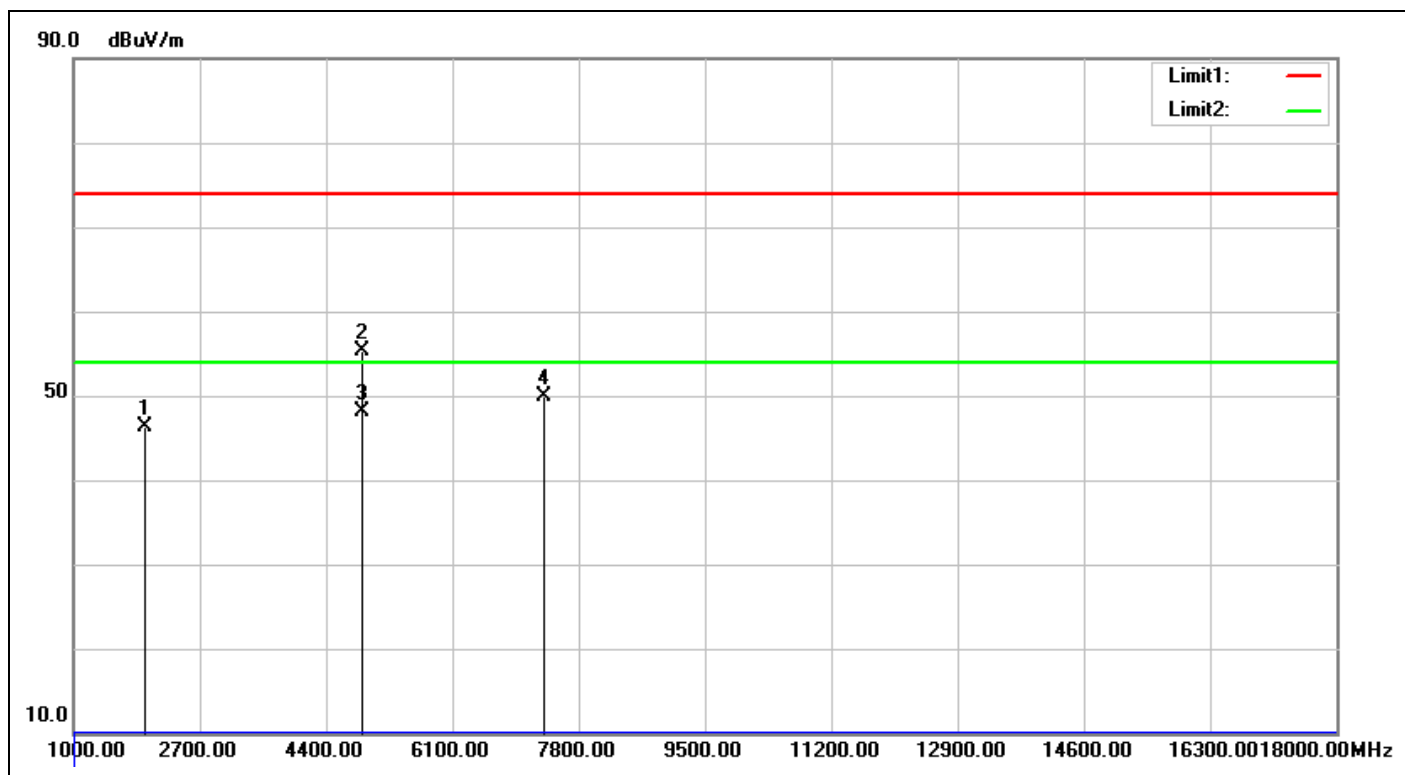


Service No.:	114056713	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2016/10/19 18:33:48
Applicant:	Bionime	Test Rating:	DC 5V
Product:	BLE module / 藍牙模組	Temp.(°C)/Hum.(%)	22.4(°C)/66%
Model No.:	BM300	Test Engineer:	Kai Wang
Test Mode:	2440-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	1969.000	-7.35	53.62	46.27	74.00	-27.73	peak	100	315	
2	4882.000	-2.47	57.73	55.26	74.00	-18.74	peak	200	331	
3	4882.000	-2.47	50.59	48.12	54.00	-5.88	AVG	200	331	
4	7323.000	5.91	44.07	49.98	74.00	-24.02	peak	200	70	

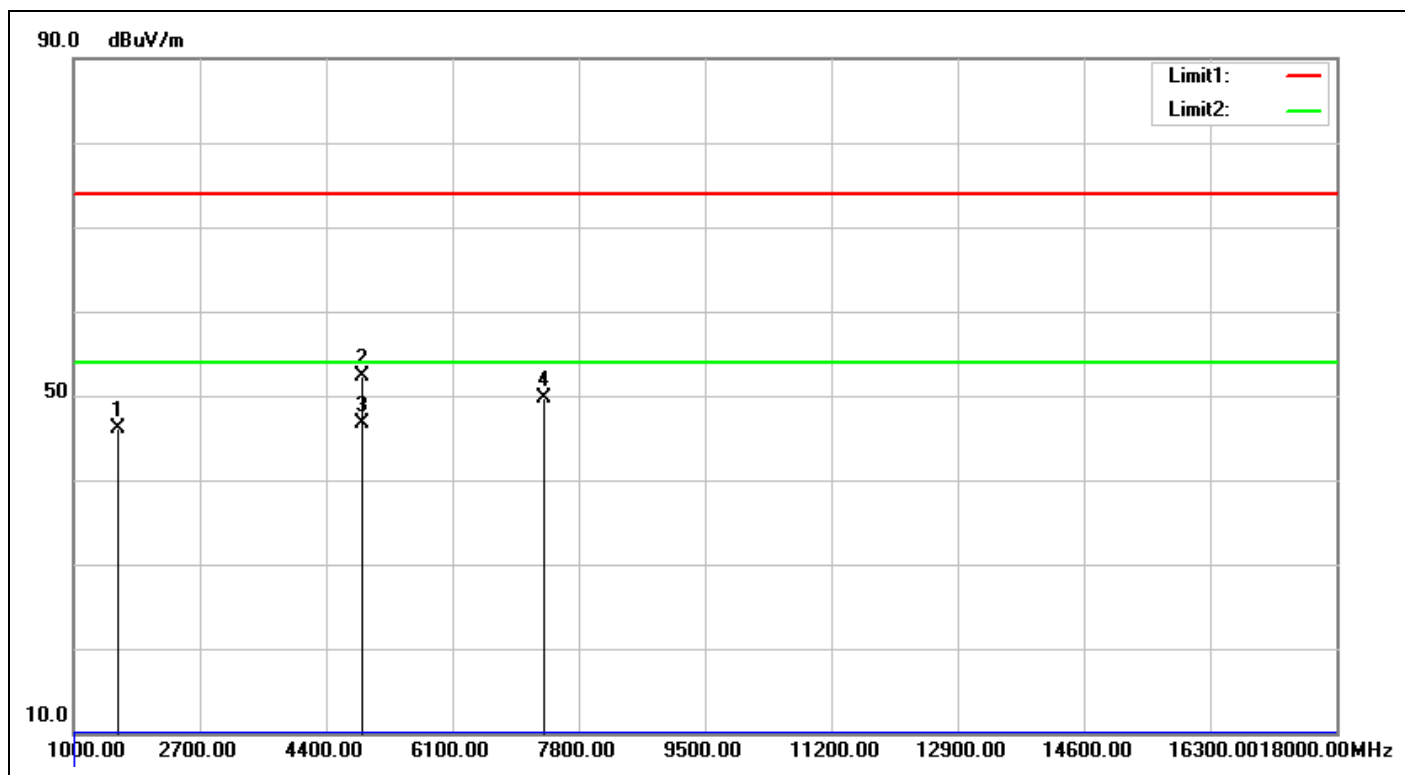


Service No.:	114056713	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2016/10/19 18:38:35
Applicant:	Bionime	Test Rating:	DC 5V
Product:	BLE module / 藍牙模組	Temp.(°C)/Hum.(%)	22.4(°C)/66%
Model No.:	BM300	Test Engineer:	Kai Wang
Test Mode:	2440-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	1595.000	-9.71	55.89	46.18	74.00	-27.82	peak	100	209	
2	4882.000	-2.47	54.82	52.35	74.00	-21.65	peak	200	318	
3	4882.000	-2.47	49.22	46.75	54.00	-7.25	AVG	200	318	
4	7323.000	5.91	43.72	49.63	74.00	-24.37	peak	100	348	

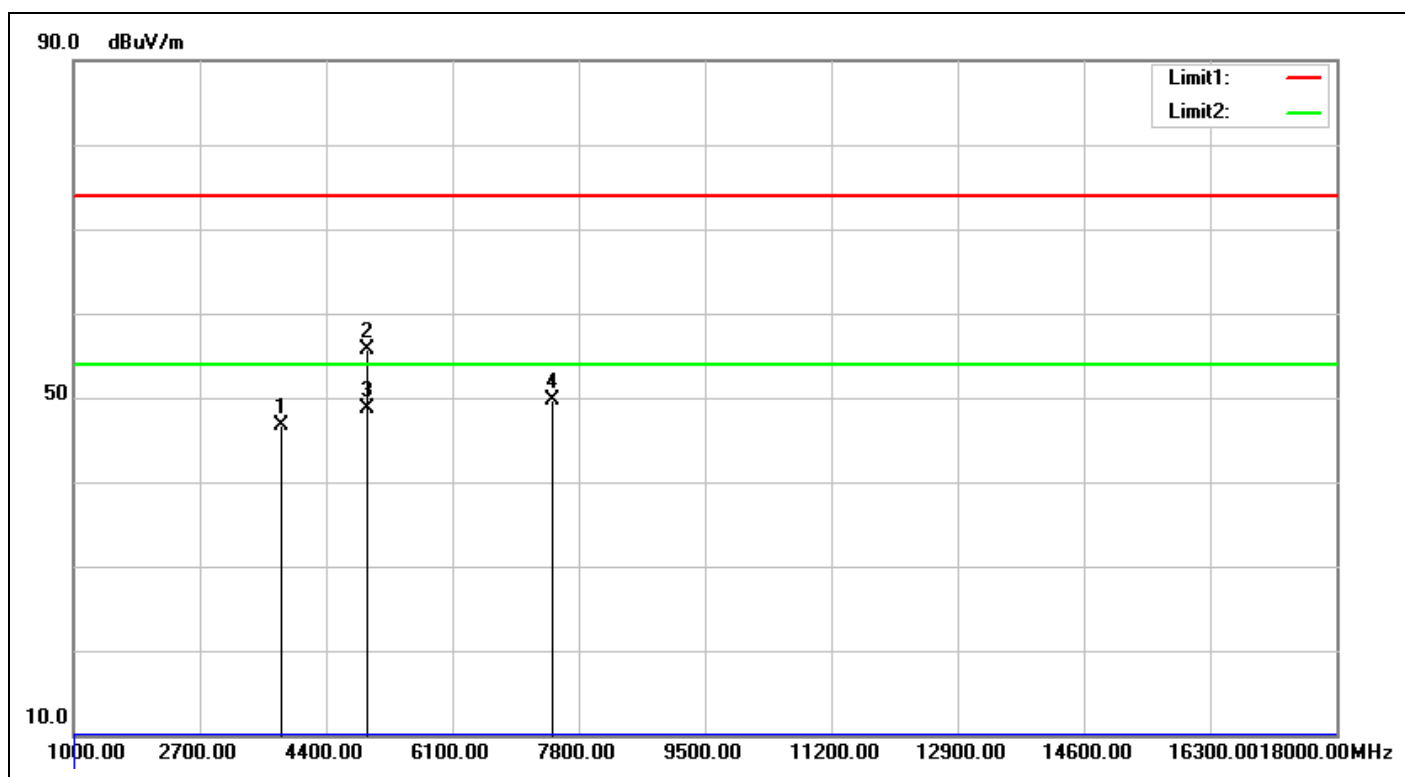

Service No.:	114056713	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2016/10/19 18:46:56
Applicant:	Bionime	Test Rating:	DC 5V
Product:	BLE module / 藍牙模組	Temp.(°C)/Hum.(%)	22.4(°C)/66%
Model No.:	BM300	Test Engineer:	Kai Wang
Test Mode:	2480-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	3788.000	-5.60	52.24	46.64	74.00	-27.36	peak	100	360	
2	4960.000	-2.30	58.04	55.74	74.00	-18.26	peak	118	0	
3	4960.000	-2.30	50.99	48.69	54.00	-5.31	AVG	118	0	
4	7440.000	6.24	43.56	49.80	74.00	-24.20	peak	100	332	

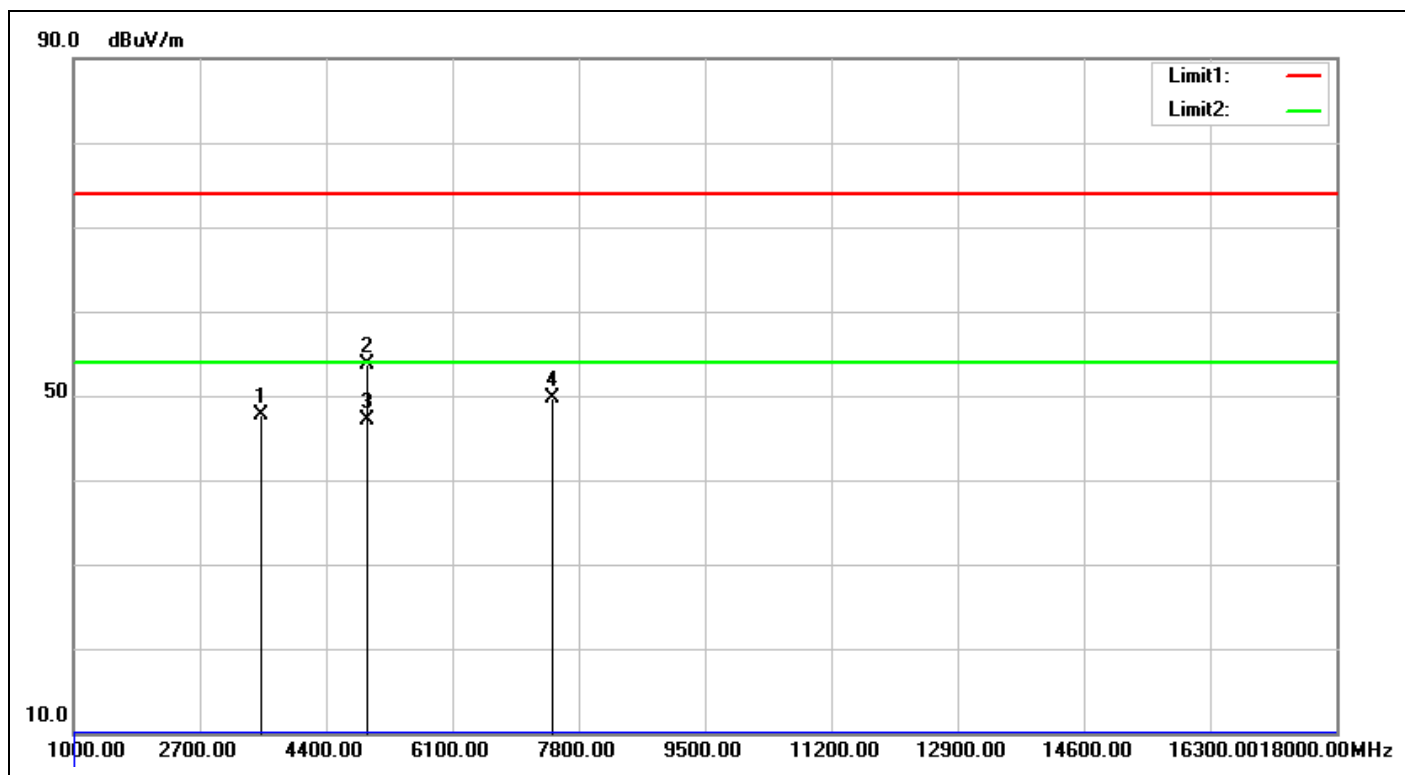

Service No.:	114056713	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2016/10/19 18:49:14
Applicant:	Bionime	Test Rating:	DC 5V
Product:	BLE module / 藍牙模組	Temp.(°C)/Hum.(%)	22.4(°C)/66%
Model No.:	BM300	Test Engineer:	Kai Wang
Test Mode:	2480-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	3533.000	-5.83	53.47	47.64	74.00	-26.36	peak	200	15	
2	4960.000	-2.30	56.07	53.77	74.00	-20.23	peak	200	312	
3	4960.000	-2.30	49.40	47.10	54.00	-6.90	AVG	200	312	
4	7440.000	6.24	43.55	49.79	74.00	-24.21	peak	100	195	


Spurious Emissions, TX Mode, 18-26G



TUV Taiwan


11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel: +886-2172-7000 fax: +886-2528-0018

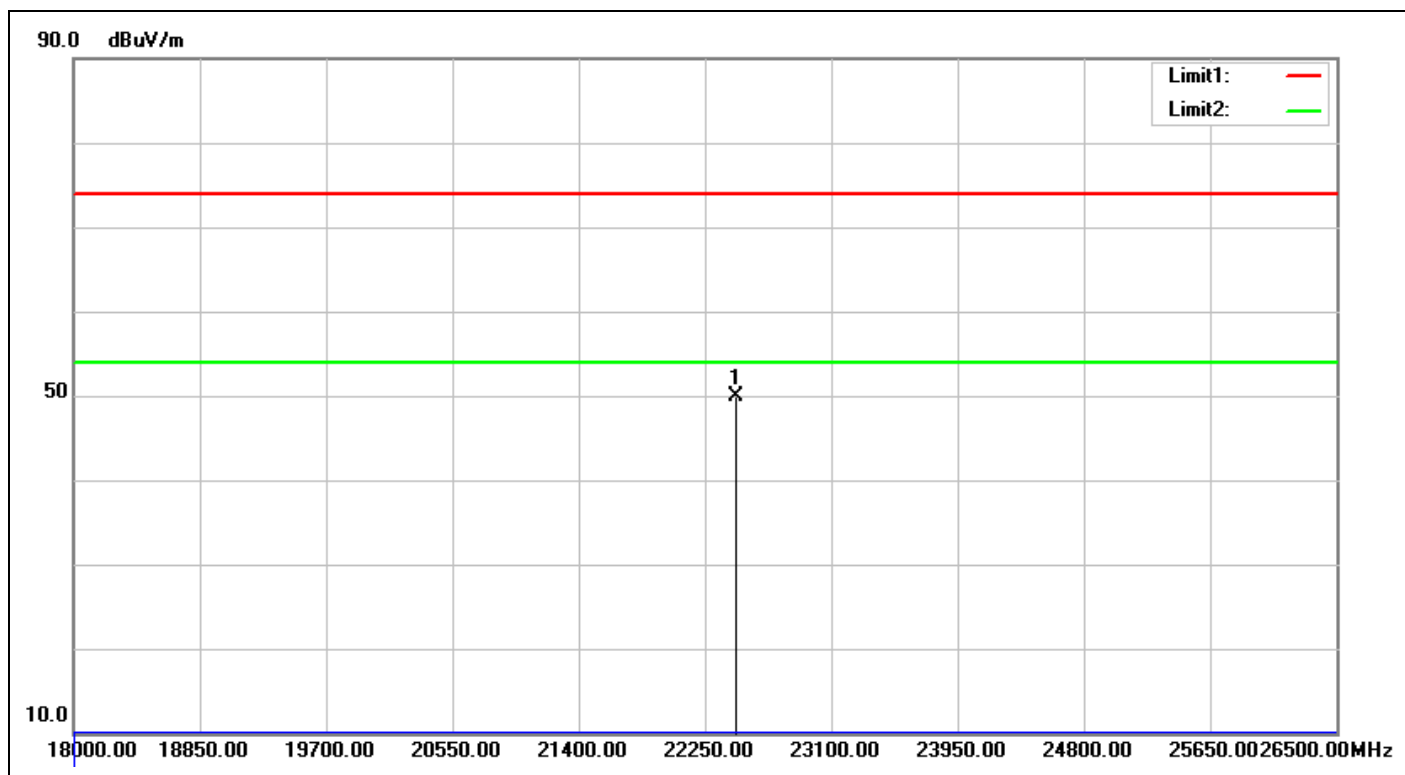


Service No.:	114056713	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2016/10/20 08:23:07
Applicant:	Bionime	Test Rating:	DC 5V
Product:	BLE module / 藍牙模組	Temp.(°C)/Hum.(%):	23.8(°C)/58%
Model No.:	BM300	Test Engineer:	Kai Wang
Test Mode:	2402-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	22462.500	29.83	20.10	49.93	74.00	-24.07	peak	100	135	

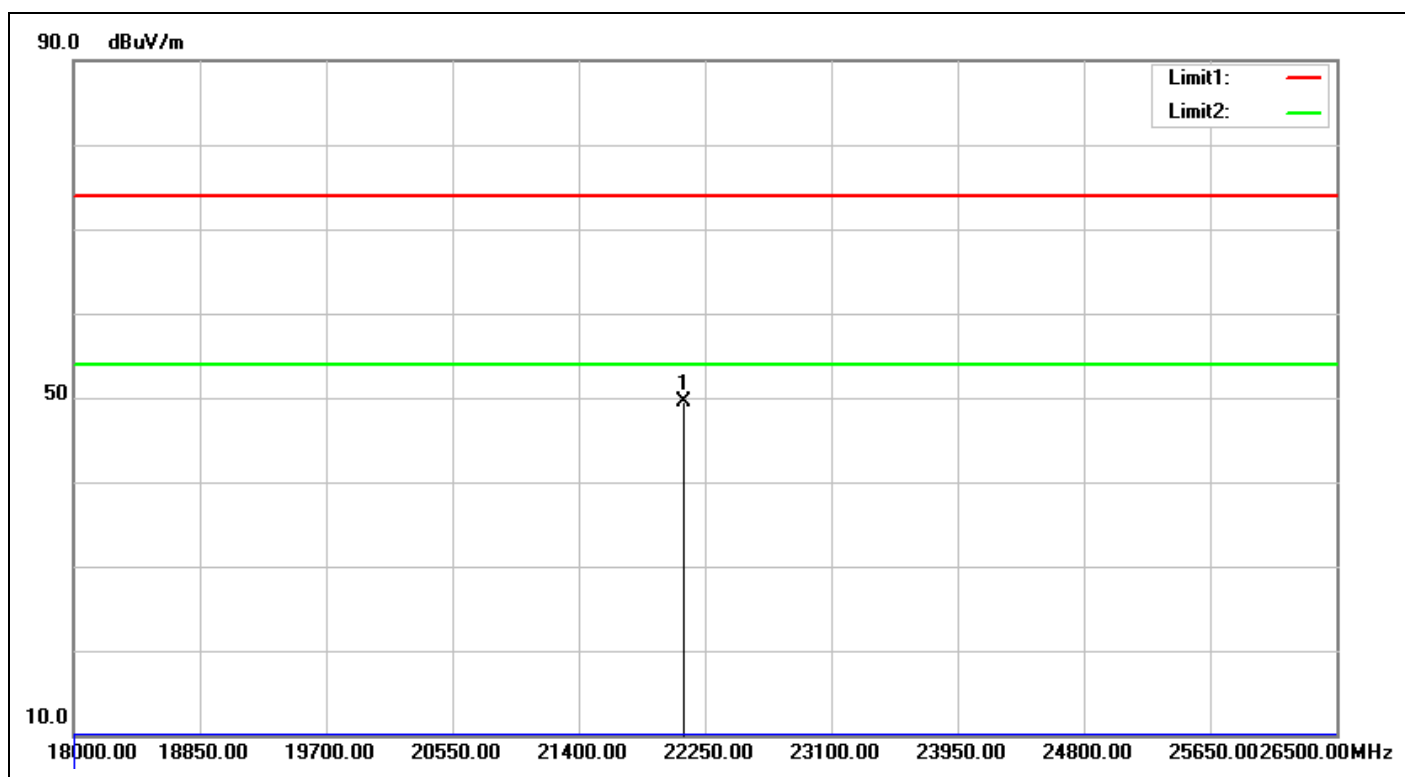


Service No.:	114056713	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2016/10/20 08:24:09
Applicant:	Bionime	Test Rating:	DC 5V
Product:	BLE module / 藍牙模組	Temp.(°C)/Hum.(%):	23.8(°C)/58%
Model No.:	BM300	Test Engineer:	Kai Wang
Test Mode:	2402-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	22105.500	29.74	19.70	49.44	74.00	-24.56	peak	100	138	

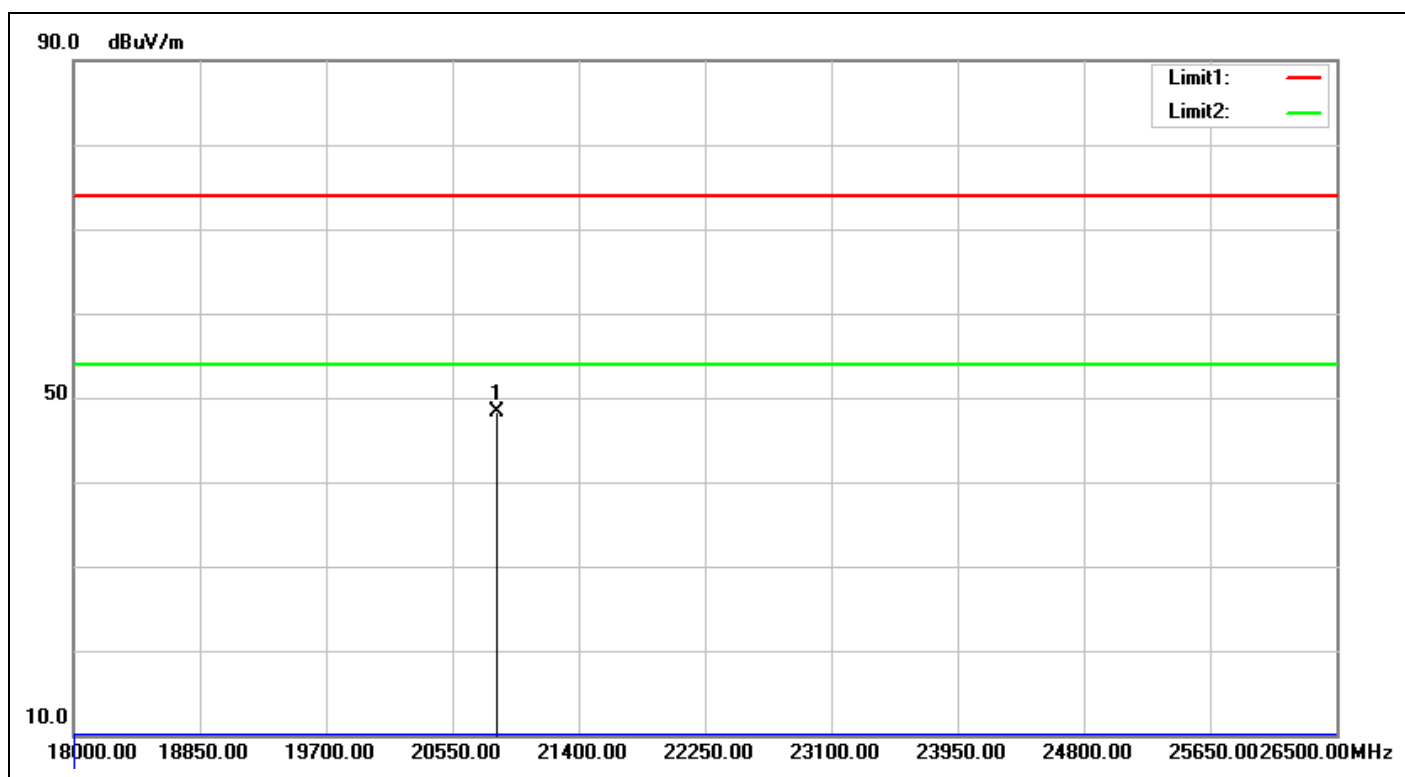


Service No.:	114056713	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2016/10/20 08:25:21
Applicant:	Bionime	Test Rating:	DC 5V
Product:	BLE module / 藍牙模組	Temp.(°C)/Hum.(%):	23.8(°C)/58%
Model No.:	BM300	Test Engineer:	Kai Wang
Test Mode:	2440-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	20847.500	29.81	18.46	48.27	74.00	-25.73	peak	100	256	

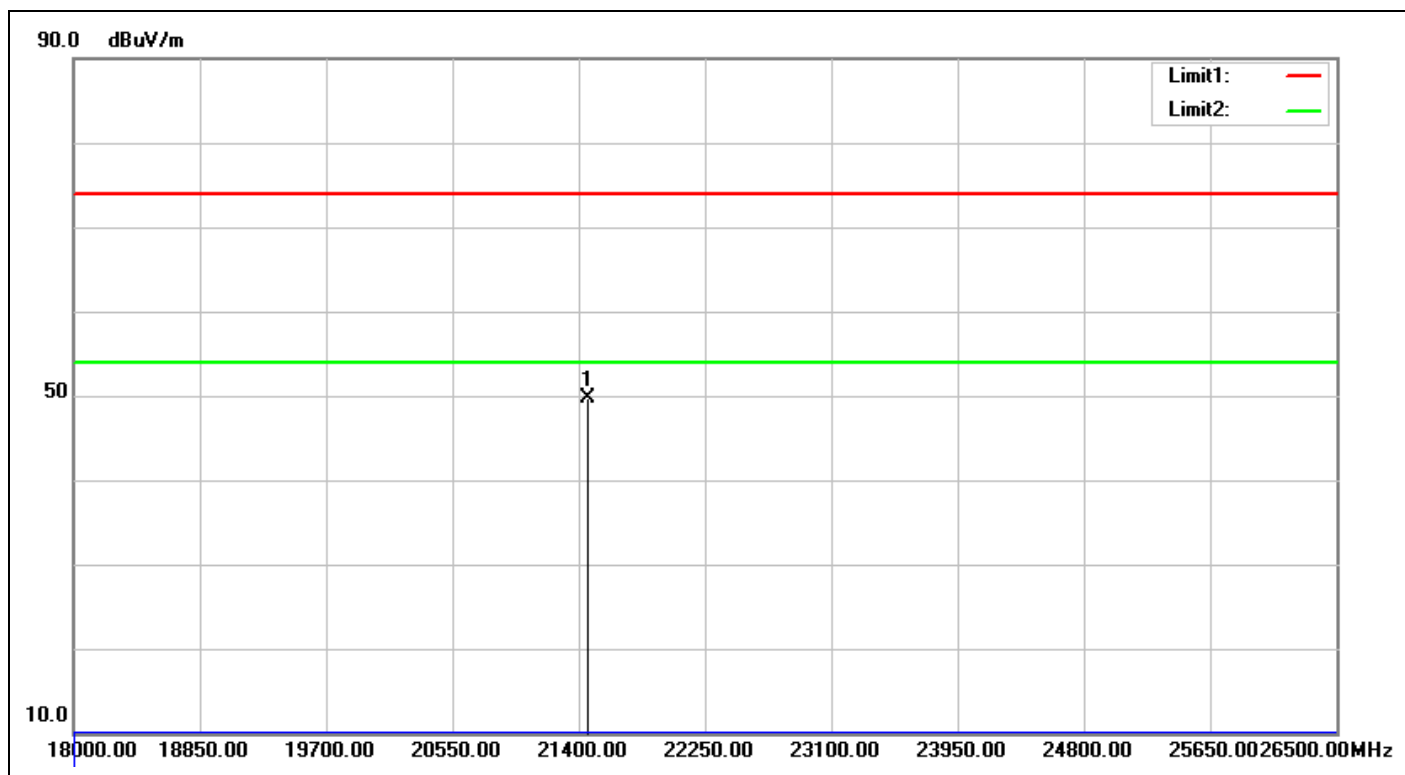


Service No.:	114056713	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2016/10/20 08:26:23
Applicant:	Bionime	Test Rating:	DC 5V
Product:	BLE module / 藍牙模組	Temp.(°C)/Hum.(%):	23.8(°C)/58%
Model No.:	BM300	Test Engineer:	Kai Wang
Test Mode:	2440-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	21459.500	29.74	19.93	49.67	74.00	-24.33	peak	100	305	

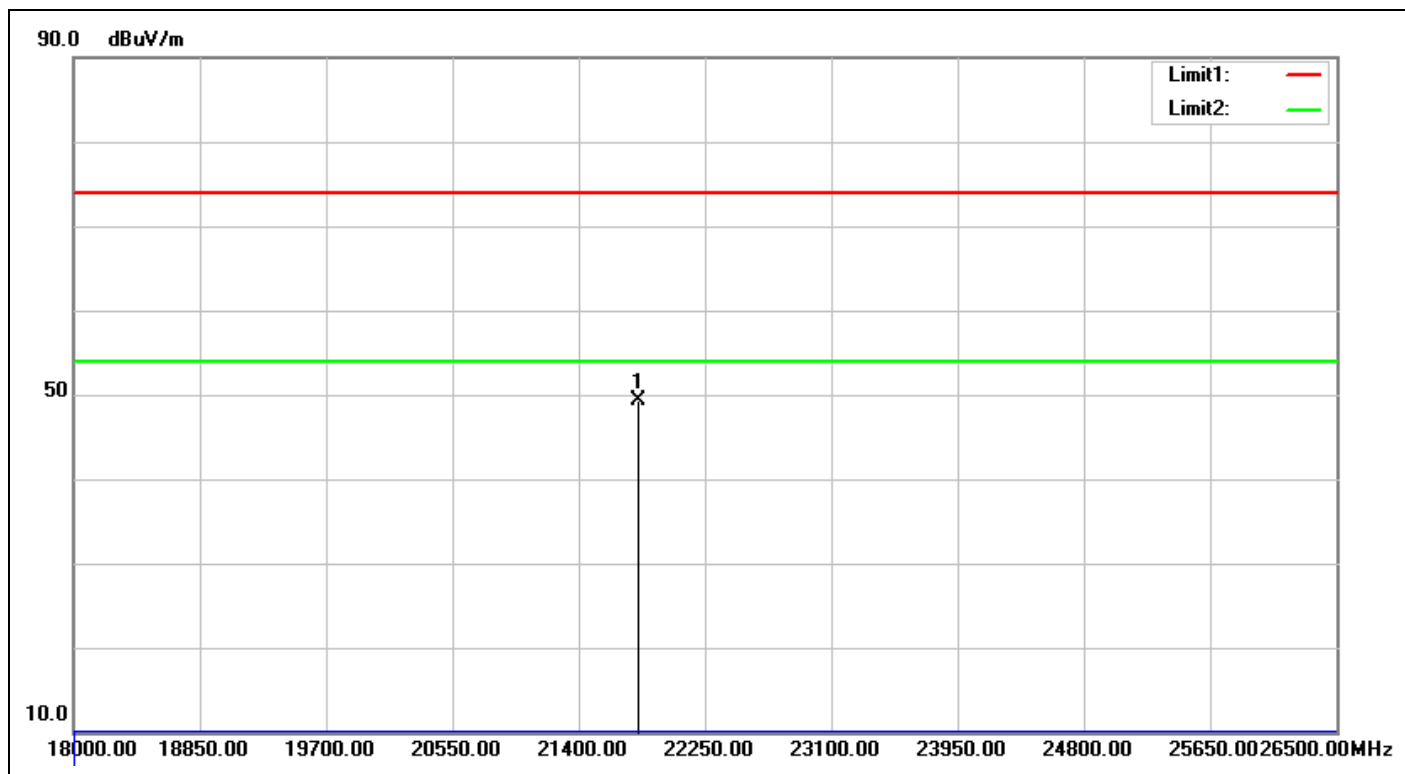

Service No.:	114056713	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2016/10/20 08:27:55
Applicant:	Bionime	Test Rating:	DC 5V
Product:	BLE module / 藍牙模組	Temp.(°C)/Hum.(%):	23.8(°C)/58%
Model No.:	BM300	Test Engineer:	Kai Wang
Test Mode:	2480-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	21799.500	29.72	19.55	49.27	74.00	-24.73	peak	100	266	

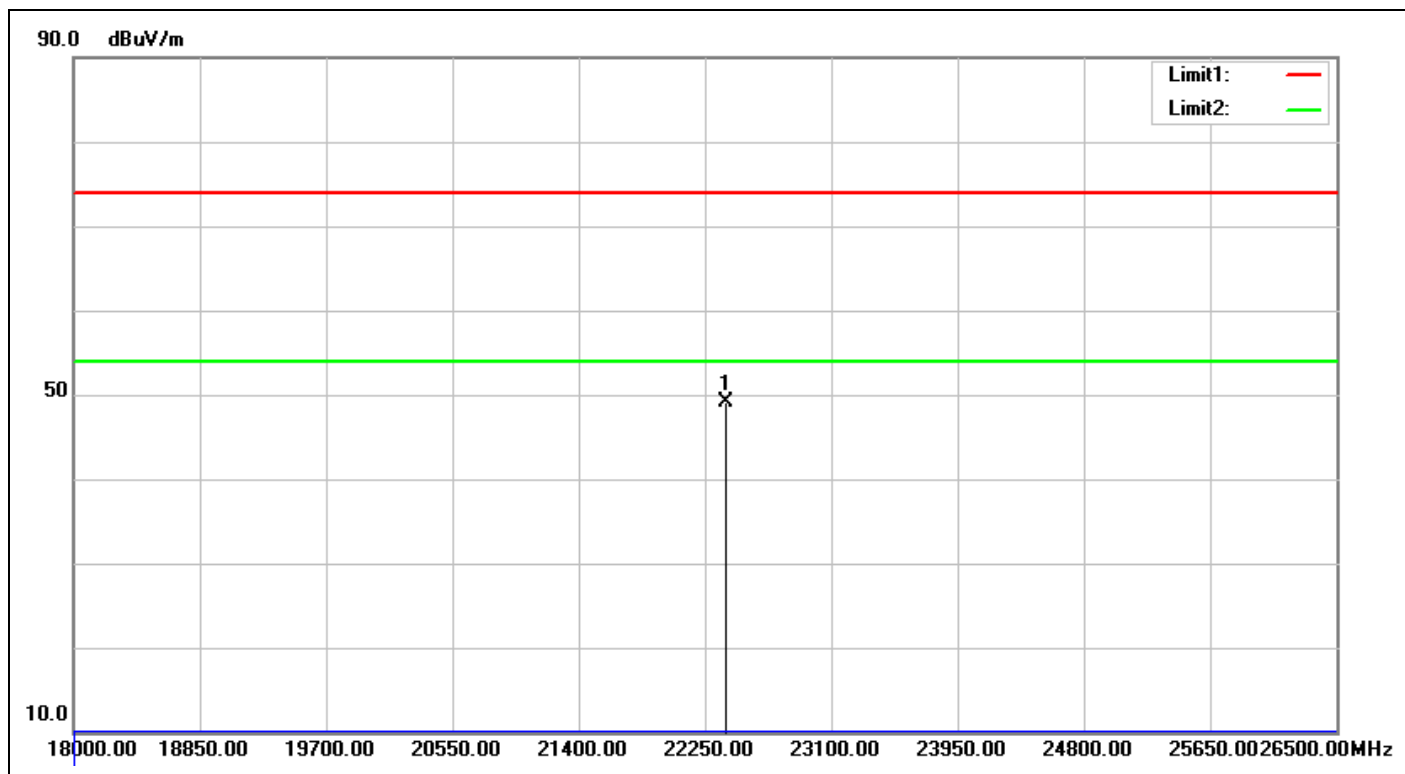

Service No.:	114056713	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2016/10/20 08:28:57
Applicant:	Bionime	Test Rating:	DC 5V
Product:	BLE module / 藍牙模組	Temp.(°C)/Hum.(%):	23.8(°C)/58%
Model No.:	BM300	Test Engineer:	Kai Wang
Test Mode:	2480-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	22394.500	29.81	19.26	49.07	74.00	-24.93	peak	100	306	


Spurious Emissions, TX Mode, 30M-1G



TUV Taiwan


11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel: +886-2172-7000 fax: +886-2528-0018

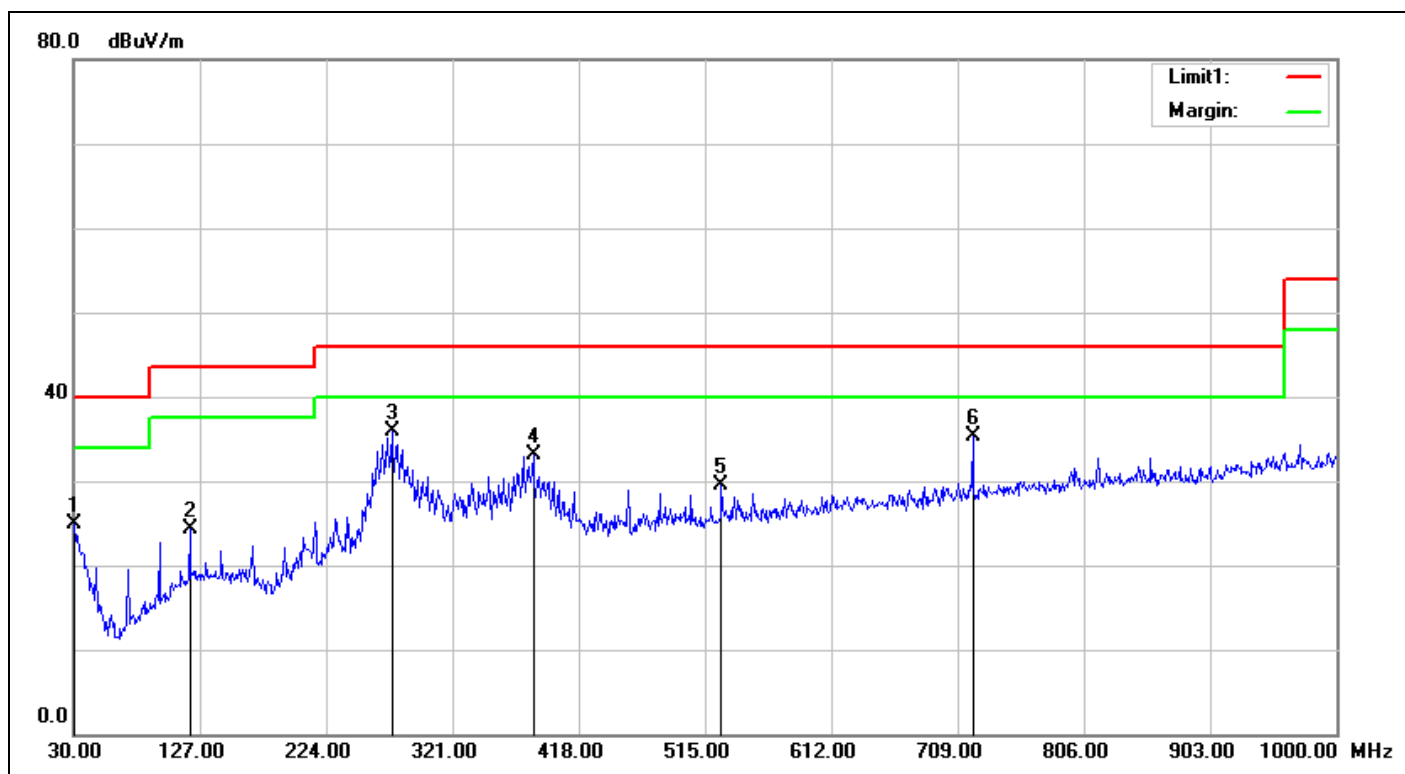

Service No.:	114056713	Test Distance:	3m
Test Standard:	NCC Class B 3M Radiation	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2016/10/20 09:28:10
Applicant:	Bionime	Test Rating:	DC 5V
Product:	BLE module / 藍牙模組	Temp.(°C)/Hum.(%)	22.4(°C)/66%
Model No.:	BM300	Test Engineer:	Kai Wang
Test Mode:	2440-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	30.9700	-0.62	25.47	24.85	40.00	-15.15	QP	100	71	
2	119.2400	-7.40	31.61	24.21	43.50	-19.29	QP	300	239	
3	274.4400	-5.22	41.20	35.98	46.00	-10.02	QP	100	266	
4	383.0800	-2.92	35.95	33.03	46.00	-12.97	QP	100	317	
5	527.6100	-1.04	30.60	29.56	46.00	-16.44	QP	200	276	
6	720.6400	1.60	33.66	35.26	46.00	-10.74	QP	100	293	

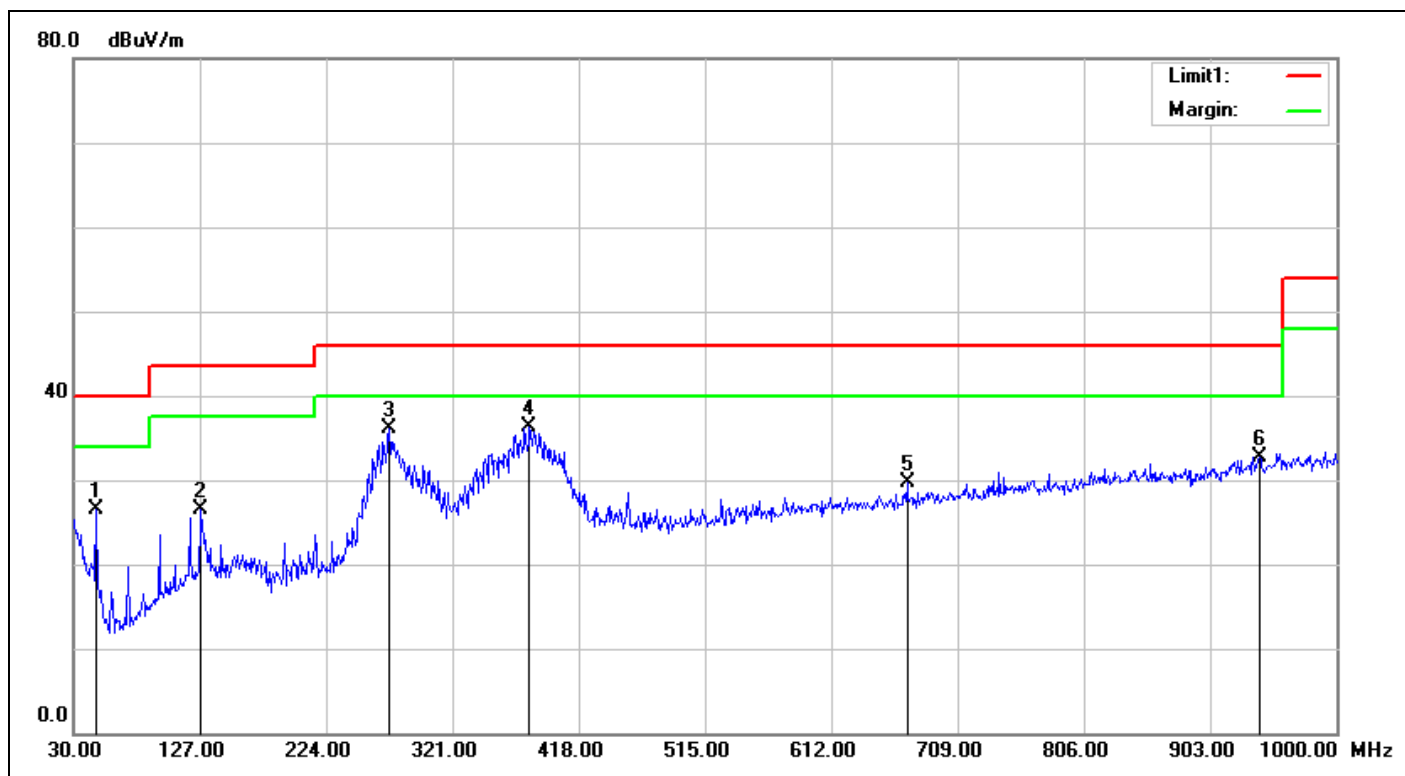

Service No.:	114056713	Test Distance:	3m
Test Standard:	NCC Class B 3M Radiation	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2016/10/20 09:30:29
Applicant:	Bionime	Test Rating:	DC 5V
Product:	BLE module / 藍牙模組	Temp.(°C)/Hum.(%):	22.4(°C)/66%
Model No.:	BM300	Test Engineer:	Kai Wang
Test Mode:	2440-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	47.4600	-9.93	36.43	26.50	40.00	-13.50	QP	100	255	
2	127.9700	-7.04	33.61	26.57	43.50	-16.93	QP	100	271	
3	272.5000	-5.26	41.43	36.17	46.00	-9.83	QP	100	204	
4	380.1700	-2.97	39.35	36.38	46.00	-9.62	QP	100	188	
5	670.2000	0.76	28.94	29.70	46.00	-16.30	QP	200	231	
6	940.8300	5.16	27.52	32.68	46.00	-13.32	QP	100	54	


Spurious Emissions, RX Mode, 1-18G



TUV Taiwan


11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

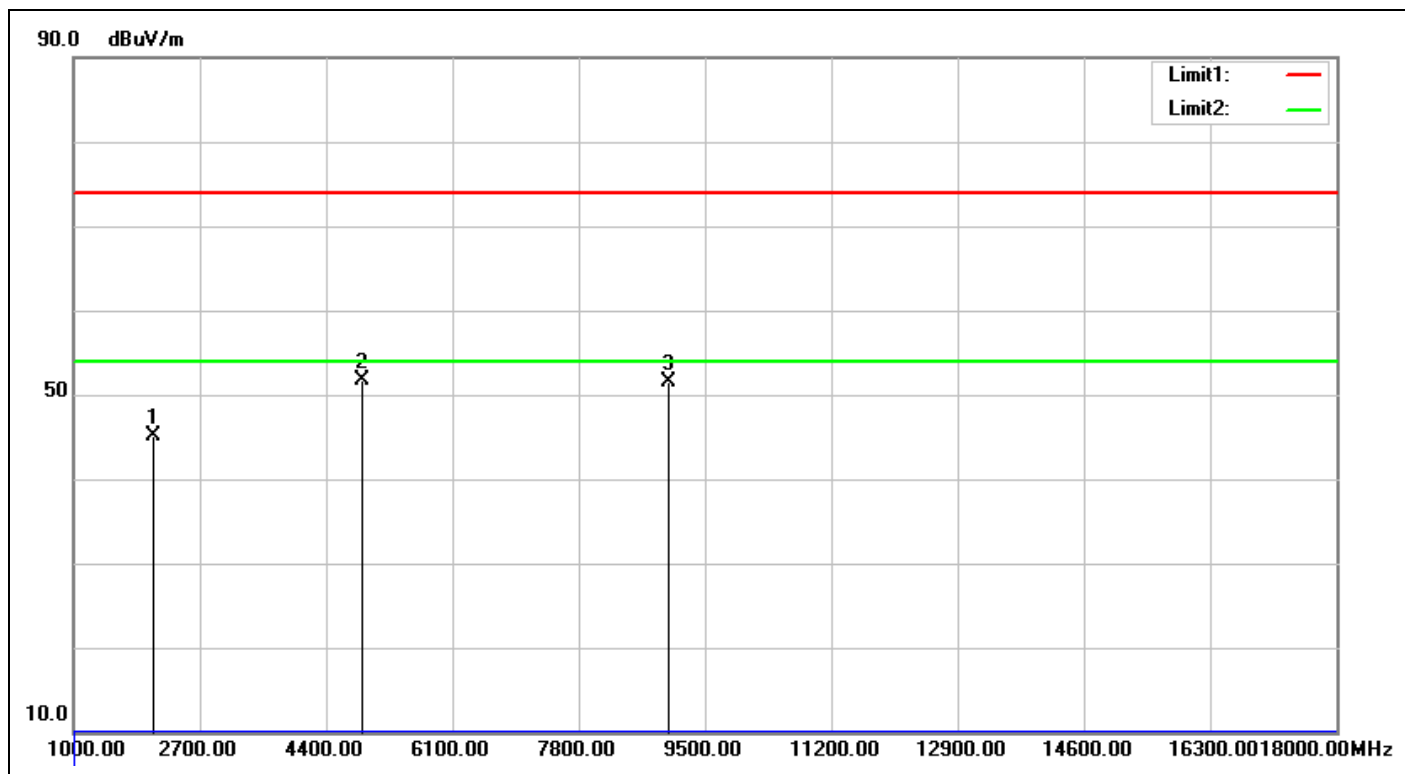

Service No.:	114056713	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2016/10/19 19:17:26
Applicant:	Bionime	Test Rating:	DC 5V
Product:	BLE module / 藍牙模組	Temp.(°C)/Hum.(%):	22.4(°C)/66%
Model No.:	BM300	Test Engineer:	Kai Wang
Test Mode:	2440-RX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	2071.000	-8.08	53.26	45.18	74.00	-28.82	peak	100	259	
2	4876.000	-3.37	55.00	51.63	74.00	-22.37	peak	100	73	
3	9007.000	5.82	45.69	51.51	74.00	-22.49	peak	100	187	

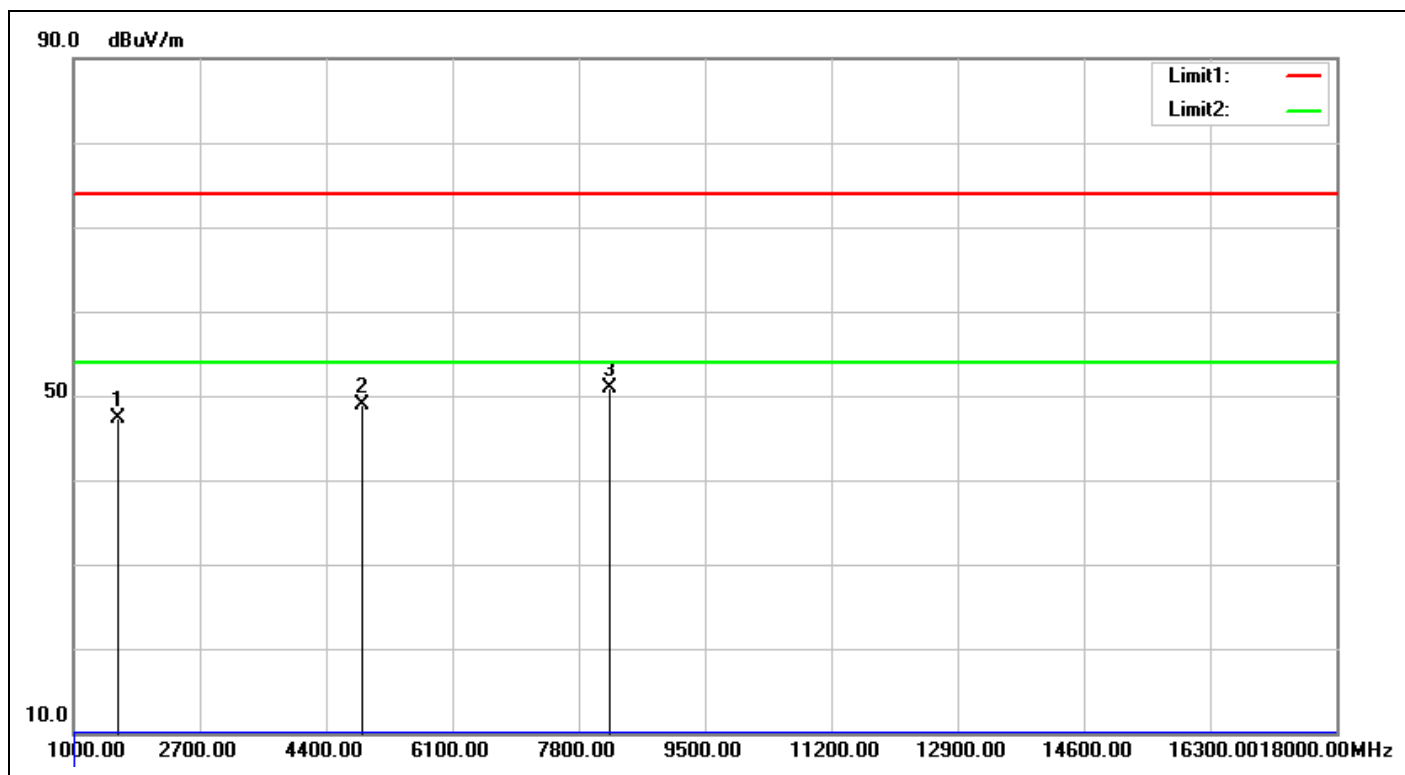

Service No.:	114056713	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2016/10/19 19:18:28
Applicant:	Bionime	Test Rating:	DC 5V
Product:	BLE module	Temp.(°C)/Hum.(%)	22.4(°C)/66%
Model No.:	BM300	Test Engineer:	Kai Wang
Test Mode:	2440-RX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	1595.000	-10.67	57.91	47.24	74.00	-26.76	peak	100	207	
2	4876.000	-3.37	52.26	48.89	74.00	-25.11	peak	100	293	
3	8208.000	5.43	45.38	50.81	74.00	-23.19	peak	100	79	


Spurious Emissions, RX Mode, 18-26G



TUV Taiwan


11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

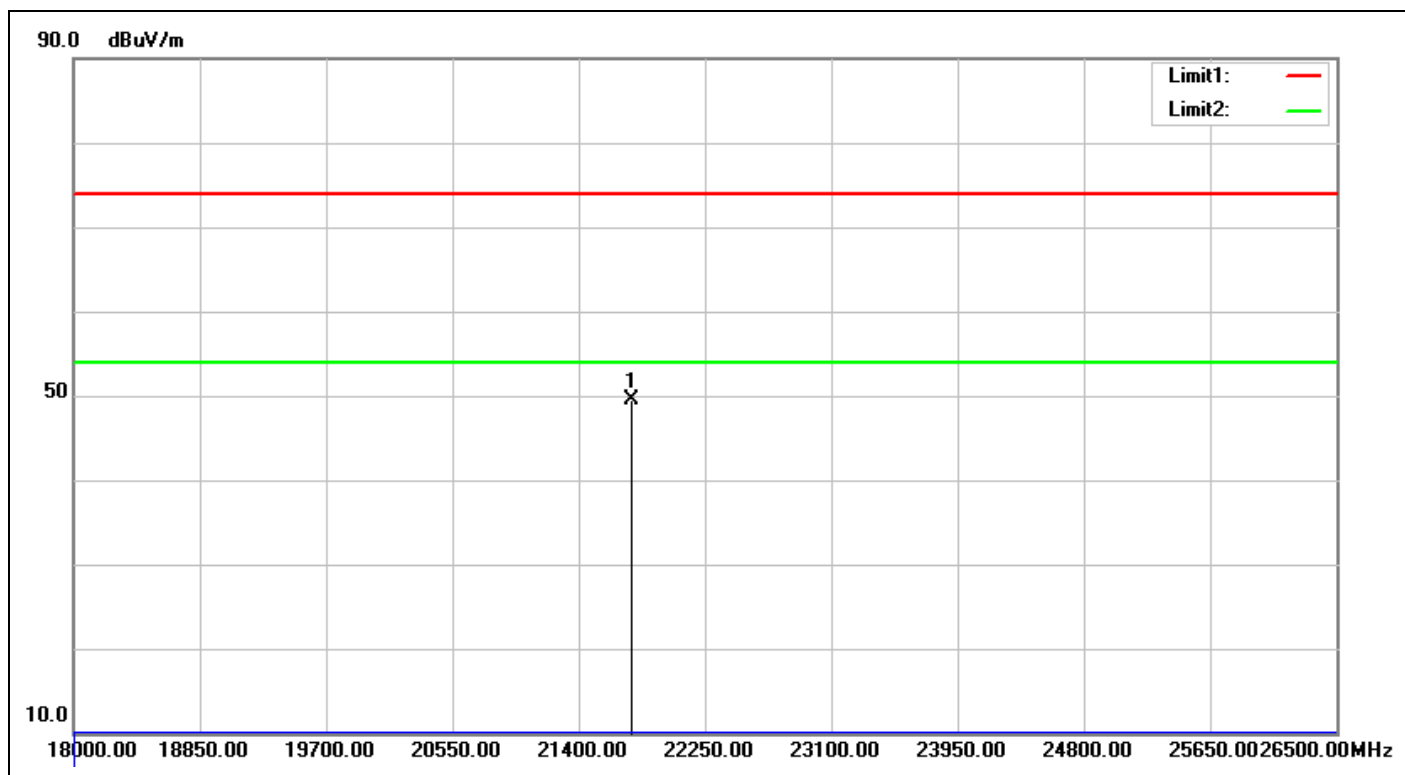

Service No.:	114056713	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2016/10/20 08:19:08
Applicant:	Bionime	Test Rating:	DC 5V
Product:	BLE module	Temp.(°C)/Hum.(%):	23.8(°C)/58%
Model No.:	BM300	Test Engineer:	Kai Wang
Test Mode:	2440-RX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	21757.000	29.72	19.76	49.48	74.00	-24.52	peak	100	1	

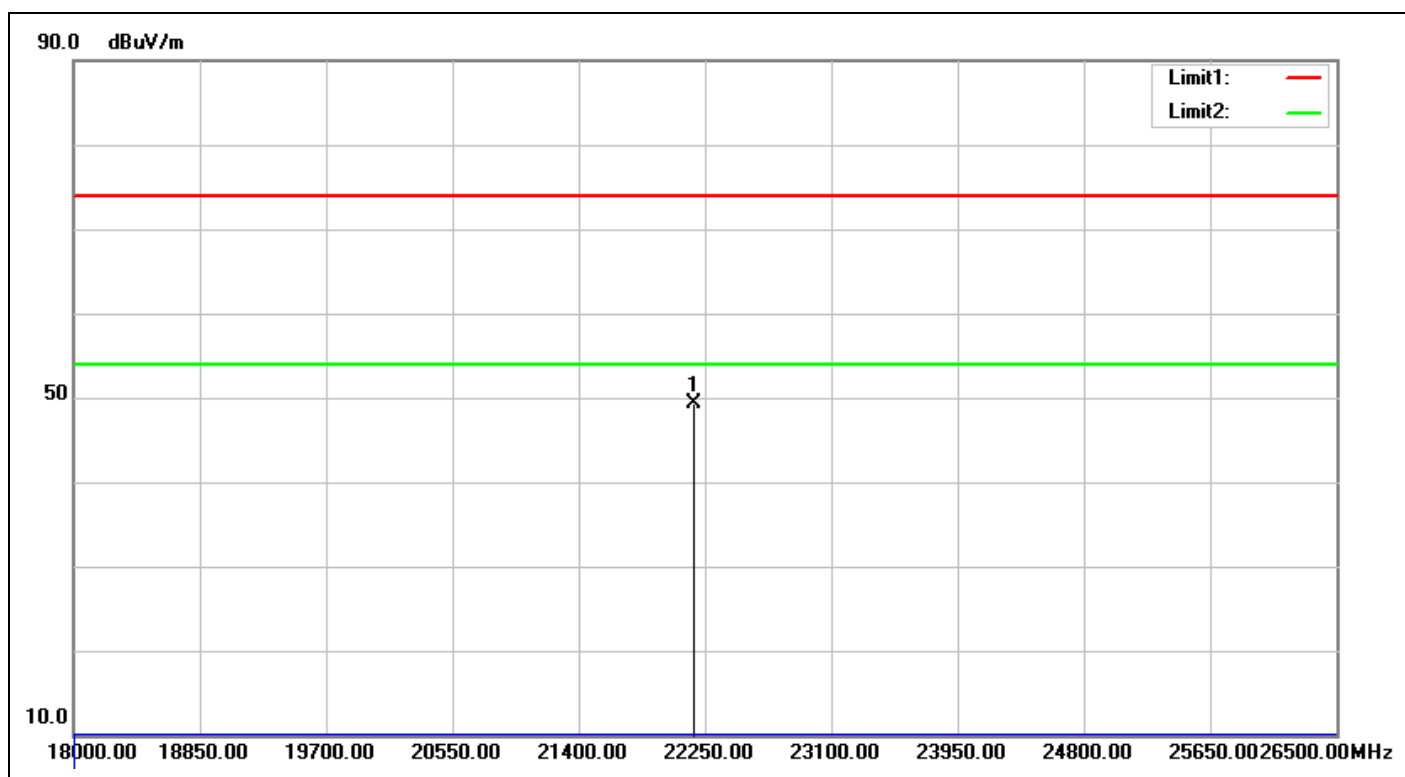

Service No.:	114056713	Test Distance:	3m
Test Standard:	NCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2016/10/20 08:20:10
Applicant:	Bionime	Test Rating:	DC 5V
Product:	BLE module / 藍牙模組	Temp.(°C)/Hum.(%):	23.8(°C)/58%
Model No.:	BM300	Test Engineer:	Kai Wang
Test Mode:	2440-RX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	22173.500	29.76	19.45	49.21	74.00	-24.79	peak	100	110	


Spurious Emissions, RX Mode, 30M-1G



TUV Taiwan

11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105


Tel:+886-2172-7000 fax:+886-2528-0018

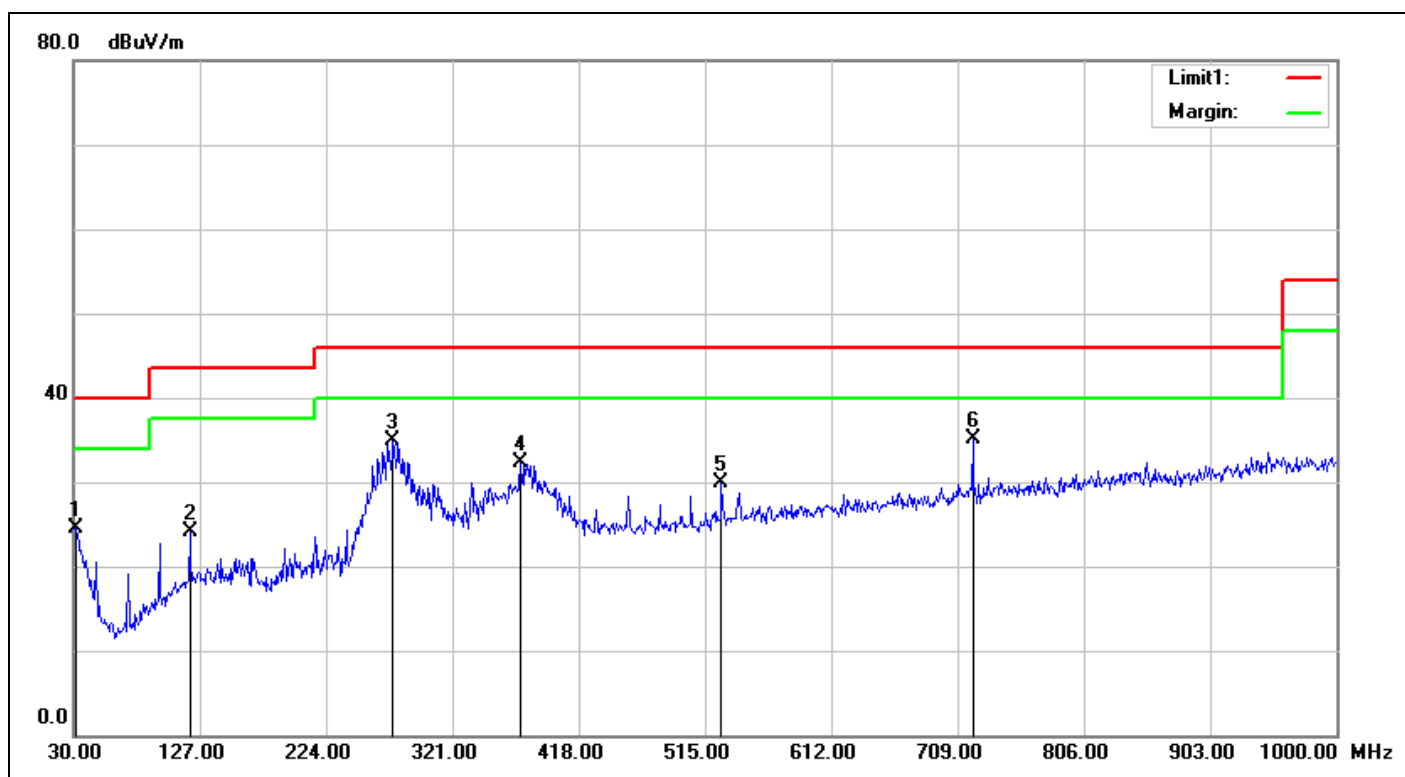

Service No.:	114056713	Test Distance:	3m
Test Standard:	NCC Class B 3M Radiation	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2016/10/20 09:34:48
Applicant:	Bionime	Test Rating:	DC 5V
Product:	BLE module / 藍牙模組	Temp.(°C)/Hum.(%):	22.4(°C)/66%
Model No.:	BM300	Test Engineer:	Kai Wang
Test Mode:	2440-RX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	31.9400	-1.18	25.78	24.60	40.00	-15.40	QP	100	1	
2	119.2400	-7.40	31.49	24.09	43.50	-19.41	QP	200	231	
3	275.4100	-5.19	40.10	34.91	46.00	-11.09	QP	100	272	
4	373.3800	-3.09	35.39	32.30	46.00	-13.70	QP	100	288	
5	527.6100	-1.04	30.86	29.82	46.00	-16.18	QP	200	73	
6	720.6400	1.60	33.53	35.13	46.00	-10.87	QP	100	277	


Spurious Emissions, RX Mode, 30M-1G

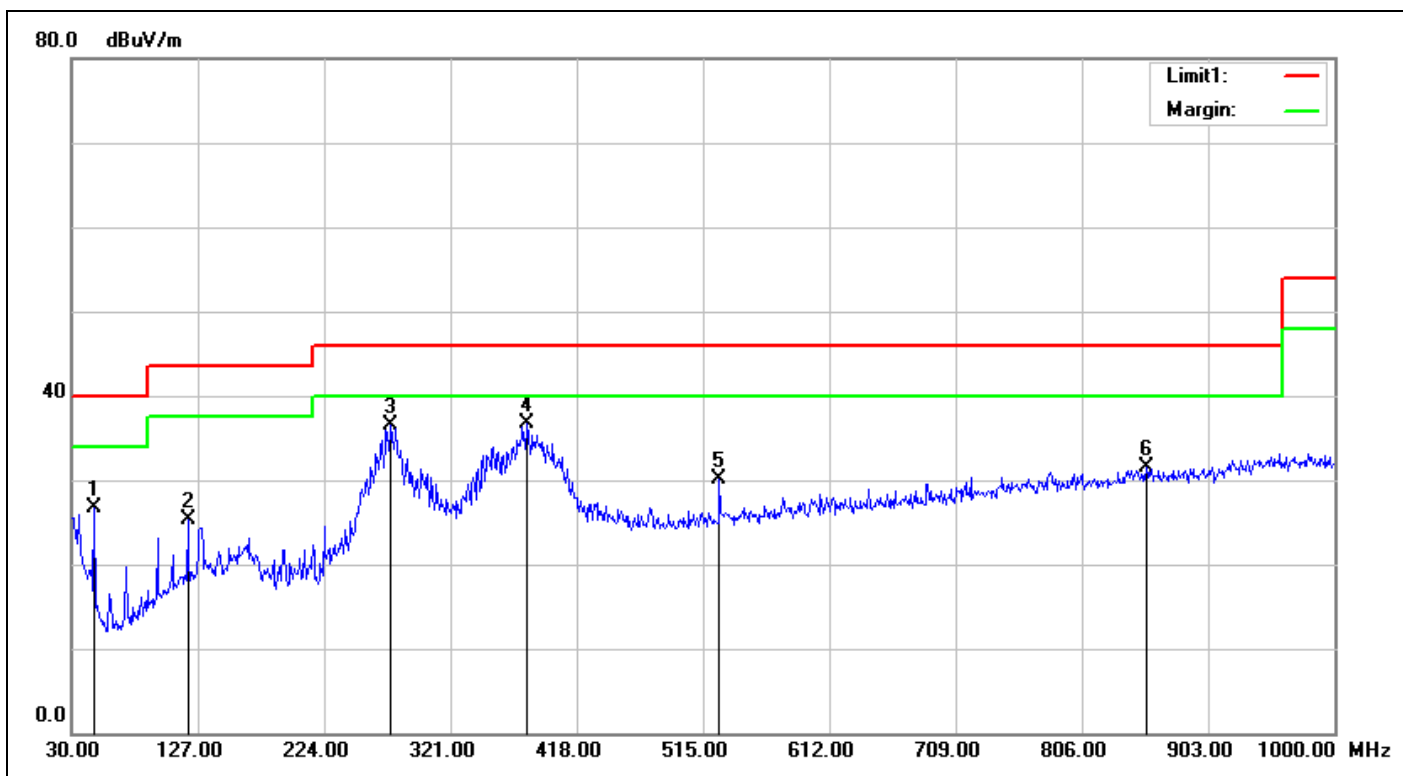

Service No.:	114056713	Test Distance:	3m
Test Standard:	NCC Class B 3M Radiation	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2016/10/20 09:37:07
Applicant:	Bionime	Test Rating:	DC 5V
Product:	BLE module / 藍牙模組	Temp.(°C)/Hum.(%):	22.4(°C)/66%
Model No.:	BM300	Test Engineer:	Kai Wang
Test Mode:	2440-RX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	47.4600	-9.93	36.62	26.69	40.00	-13.31	QP	100	244	
2	119.2400	-7.40	32.72	25.32	43.50	-18.18	QP	100	343	
3	275.4100	-5.19	41.60	36.41	46.00	-9.59	QP	200	191	
4	380.1700	-2.97	39.66	36.69	46.00	-9.31	QP	100	220	
5	527.6100	-1.04	31.20	30.16	46.00	-15.84	QP	100	263	
6	855.4700	3.73	27.73	31.46	46.00	-14.54	QP	200	49	

Mains Spurious Emissions

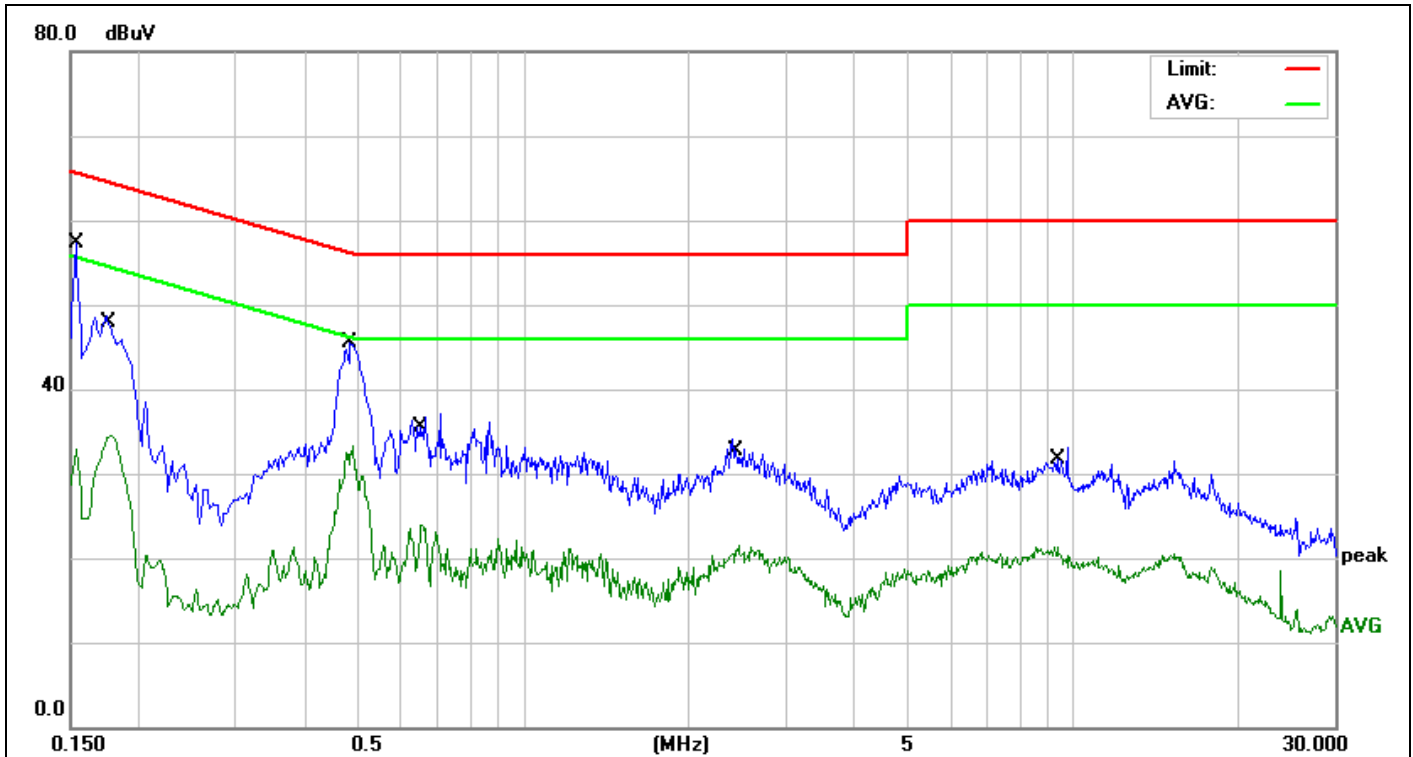

Service No.: 114056713

Test Standard: NCC Class B(QP)

Probe: L1

Test item: Conduction Emission

Test Time: 2016/10/26 09:19:39

Applicant: Bionime

Test Rating: AC 110V/60Hz

Product: BLE module / 藍牙模組

Temp.(°C)/Hum.(%): 27.9(°C)/39%


Model No.: BM300

Test Engineer: Kai Wang

Test Mode: Mains

Remark:

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Remark
1	0.1539	9.78	41.07	50.85	65.78	-14.93	QP	
2	0.1539	9.78	19.26	29.04	55.78	-26.74	AVG	
3	0.1780	9.76	35.23	44.99	64.57	-19.58	QP	
4	0.1780	9.76	21.77	31.53	54.57	-23.04	AVG	
5	0.4900	9.75	33.10	42.85	56.17	-13.32	QP	
6	0.4900	9.75	22.10	31.85	46.17	-14.32	AVG	
7	0.6540	9.75	20.53	30.28	56.00	-25.72	QP	
8	0.6540	9.75	10.85	20.60	46.00	-25.40	AVG	
9	2.4700	9.78	16.37	26.15	56.00	-29.85	QP	
10	2.4700	9.78	8.40	18.18	46.00	-27.82	AVG	
11	9.3580	9.85	15.08	24.93	60.00	-35.07	QP	
12	9.3580	9.85	8.05	17.90	50.00	-32.10	AVG	

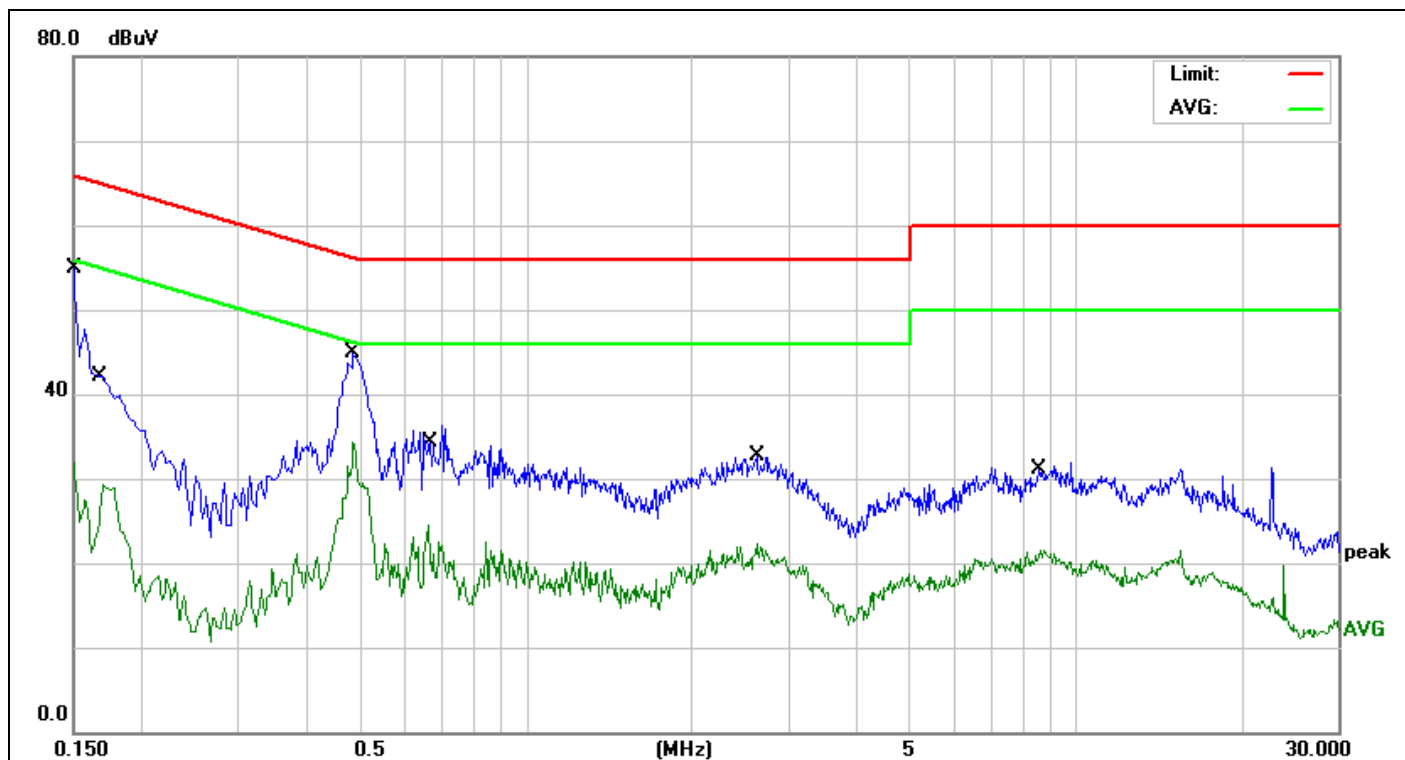

Service No.: 114056713

Test Standard: NCC Class B(QP)

Probe: N

Test item: Conduction Emission

Test Time: 2016/10/26 09:22:12

Applicant: Bionime

Test Rating: AC 110V/60Hz

Product: BLE module / 藍牙模組

Temp.(°C)/Hum.(%): 27.9(°C)/39%

Model No.: BM300

Test Engineer: Kai Wang

Test Mode: Mains

Remark:

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Remark
1	0.1500	9.73	40.94	50.67	66.00	-15.33	QP	
2	0.1500	9.73	20.28	30.01	56.00	-25.99	AVG	
3	0.1700	9.72	30.71	40.43	64.96	-24.53	QP	
4	0.1700	9.72	18.41	28.13	54.96	-26.83	AVG	
5	0.4860	9.68	34.53	44.21	56.24	-12.03	QP	
6	0.4860	9.68	23.00	32.68	46.24	-13.56	AVG	
7	0.6660	9.69	21.07	30.76	56.00	-25.24	QP	
8	0.6660	9.69	11.14	20.83	46.00	-25.17	AVG	
9	2.6340	9.71	17.93	27.64	56.00	-28.36	QP	
10	2.6340	9.71	10.71	20.42	46.00	-25.58	AVG	
11	8.6060	9.80	15.70	25.50	60.00	-34.50	QP	
12	8.6060	9.80	8.35	18.15	50.00	-31.85	AVG	