

TEST REPORT

Report Number: 3128873MPK-001

Project Number: 3128873

July 31, 2007

**Testing performed on the
VHF/UHF Desktop Scanner**

Model Number: 0712

FCC ID: ADV0712

to

FCC Part 15, Subpart B

Class: B

for

GRE America



A2LA Certificate Number: 1755-01

Test Performed by:

Intertek

1365 Adams Court

Menlo Park, CA 94025

Test Authorized by:

GRE America

425 Harbor Blvd. Suit B

Belmont, CA 94002

Prepared by:

David Chernomordik
David Chernomordik

Date: July 31, 2007

Reviewed by:

Ollie Moyrong
Ollie Moyrong

Date: July 31, 2007

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to copy or distribute this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program. This report must not be used to claim product endorsement by A2LA, NIST nor any other agency of the U.S. Government.

VERIFICATION OF COMPLIANCE
Report No. 3128873MPK-001

Verification is hereby issued to the named APPLICANT and is VALID ONLY for the equipment identified hereon for use under the rules and regulations listed below.

Equipment Under Test:	VHF/UHF Desktop Scanner
Trade Name:	GRECOM
Model No.:	0712
Serial No.	000012
Applicant:	GRE America
Contact:	Mr. Teru Takahashi
Address:	425 Harbor Blvd. Suite B Belmont, CA 94002
Country	USA
Tel. number:	650-591-1400
Fax number:	650-591-2001
Applicable Regulation:	FCC Part 15, Subpart B
Equipment Class:	Class B
Date of Test:	July 19-30, 2007

We attest to the accuracy of this report:



David Chernomordik
EMC Technical Manager



Ollie Moyrong
EMC Department Manager

TABLE OF CONTENTS

1.0	General Description	4
1.1	Product Description	4
1.2	Related Submittal(s) Grants	4
1.3	Test Methodology	4
1.4	Test Facility	4
1.5	Summary of Test Results	5
2.0	System Test Configuration.....	6
2.1	Justification.....	6
2.2	EUT Exercising Software	6
2.3	Mode of Operation.....	6
2.4	Support Equipment List and Description.....	7
2.5	Equipment Setup Block Diagram	7
2.6	Equipment Modification	8
3.0	Emission Test Results	9
3.1	Field Strength Calculation	10
3.2	Radiated Emission Data.....	11
3.3	AC Line Conducted Emission Data.....	14
3.4	Antenna Conducted Emission Data	16
4.0	List of Test Equipment	18
	Appendix A – Local Oscillator Frequency calculation.....	19
	Appendix B – ADV0712 Specification.....	20

1.0 General Description

1.1 Product Description

The Equipment under Test (EUT) is 200 Channels VHF/UHF Desktop Scanning Receiver, model 0712.

Please refer to the attached specifications sheets in Appendix A for more details.

A pre-production version of the sample was received on July 10, 2007 in good condition. As declared by the Applicant, it is identical to production units.

1.2 Related Submittal(s) Grants

This is a single application for certification of a scanning receiver.

1.3 Test Methodology

Both conducted (if applicable) and radiated emission measurements were performed according to the procedures in ANSI C63.4 (2003). All radiated measurements were performed in a semi-anechoic chamber. Radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the **“Data Section”** of this Application.

1.4 Test Facility

The test site and conducted measurement facility used to collect the radiated data is Site 1, a 10 meter semi-anechoic chamber. This test facility and site measurement data have been fully placed on file with the FCC and A2LA accredited.

1.5 Summary of Test Results

Model: 0712
FCC ID: ADV0712

TEST	REFERENCE	RESULTS
Radiated Emission	15.109	Complies
AC Line Conducted Emission	15.107	Complies
Antenna Conducted Emission	15.111	Complies
FCC Part 15.121 Requirement	15.121	Complies *

* Refer to file: ADV0712 REPORT FOR FCC RULE PART 15.121

2.0 System Test Configuration

2.1 Justification

The tests were performed according to the test procedure as outlined in CFR47 Part 15.31 and in ANSI C63.4.

For emission testing, the equipment under test (EUT) was configured for testing in a typical fashion (as a customer would normally use it). During testing, all cables were manipulated to produce worst-case emissions.

For the measurements, the EUT is placed on top of a non-conductive table. If the EUT attaches to peripherals, they are connected and operational (as typical as possible).

For radiated emission measurements, the signal is maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization are varied during the search for maximum signal level. The antenna height is varied from 1 to 4 meters. Radiated emissions are taken at three meters unless the signal level is too low for measurement at that distance. If necessary, a pre-amplifier is used and/or the test is conducted at a closer distance. All readings are extrapolated back to the equivalent three-meter reading using inverse scaling with distance if measured at a closer distance.

2.2 EUT Exercising Software

The unit was setup to receive continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing.

2.3 Mode of Operation

The EUT was tested in two modes:


Test Mode 1: The EUT was set to constantly receive at the low, middle and high channels of each band.

Test Mode 2: The EUT was set to constantly scan all bands.

2.4 Support Equipment List and Description

Item #	Description	Model No.	Serial No.
1	External headphones	DS	Not Labeled

2.5 Equipment Setup Block Diagram

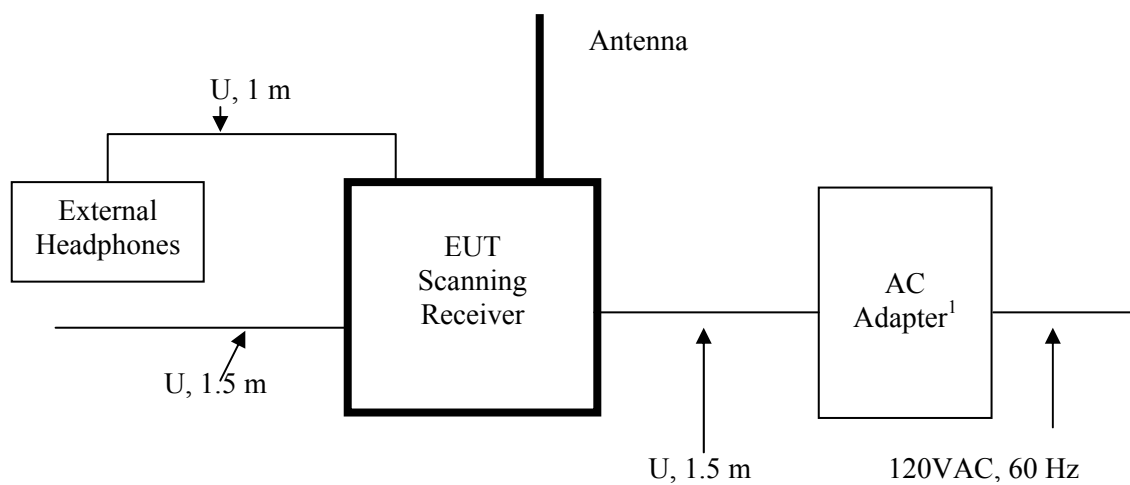

¹ AC adapter: GRE, AC Adapter, Model: RH4-0900400DU

U: Unshielded
m: meter

2.6 Equipment Modification

Any modifications installed previous to testing by GRE will be incorporated in each production model sold/leased in the United States.

Intertek Testing Services installed no modifications.

3.0 Emission Test Results

AC line conducted emission measurements were performed from 0.15 MHz to 30 MHz. Analyzer resolution is 10 kHz or greater.

Radiated emission measurements and antenna conducted emission measurements were performed from 30 MHz to 8000 MHz. Analyzer resolution is 100 kHz or greater for frequencies from 30 MHz to 1000 MHz, 1 MHz - for frequencies above 1000 MHz.

Preliminary tests were performed to determine the worst-case emission with the EUT tuned to the low, middle and high channels of each band. From these preliminary measurements the EUT was tuned to the frequency with the highest emission and the final scan was performed using the automated test software.

The same procedure was used to determine the worst-case emission level with the EUT setup in scanning mode for each band.

The final recorded data reflects the worst-case result.

A sample calculation and data tables of the emissions are included.

All measurements were performed with peak detection unless otherwise specified.

3.1 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF - AG + DF$$

Where FS = Field Strength in dB(μ V/m)

RA = Receiver Amplitude (including preamplifier) in dB(μ V)

CF = Cable Attenuation Factor in dB

AF = Antenna Factor in dB(1/m)

AG = Amplifier Gain in dB

DF = Distance Factor in dB

Assume a receiver reading of 52.0 dB(μ V) is obtained. The antennas factor of 7.4 dB(1/m) and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted, giving field strength of 32 dB(μ V/m). This value in dB(μ V/m) was converted to its corresponding level in μ V/m.

$$RA = 52.0 \text{ dB}(\mu\text{V})$$

$$AF = 7.4 \text{ dB}(1/\text{m})$$

$$CF = 1.6 \text{ dB}$$

$$AG = 29.0 \text{ dB}$$

$$DF = 0 \text{ dB}$$

$$FS = 52 + 7.4 + 1.6 - 29.0 + 0 = 32 \text{ dB}(\mu\text{V}/\text{m})$$

$$\text{Level in } \mu\text{V}/\text{m} = \text{Common Antilogarithm } [(32 \text{ dB}(\mu\text{V}/\text{m})/20] = 39.8 \mu\text{V}/\text{m}$$

3.2 Radiated Emission Data

Tested By:	David Chernomordik & Krishna K Vemuri
Test Date:	July 30, 2007

Temperature (°C)	20 °C
Relative Humidity (%)	50%

The results on the following page(s) were obtained when the device was tested in the condition described in Section 2.

Results:	Complies by 5.5 dB
-----------------	---------------------------

3.2 Test Data (Continued)

Model: 0712

Test Mode: Receiving at particular channel

Test distance: 3 m

FCC Part 15.109 Class B Radiated Emissions Data

Tuned Frequency	L.O. Frequency	Antenna Polarization	FS at 3 m	FS Limit at 3 m	Margin	RA	AG	CF+3 dB ext. att.	AF
MHz	MHz	H/V	dB(μV/m)	dB(μV/m)	dB	dB(μV)	dB	dB	dB(1/m)
29,0	39,7	V	6,3	40,0	-33,7	18,3	31,2	3,4	15,8
41,5	52,2	V	3,6	40,0	-36,4	18,7	31,2	3,4	12,7
54,0	64,7	V	5,7	40,0	-34,3	24,5	31,2	3,5	8,9
108,0	118,7	H	8,0	43,5	-35,5	23,4	31,2	3,7	12,1
122,5	133,2	V	31,5	43,5	-12,0	47,2	31,2	3,7	11,8
137,0	147,7	V	34,5	43,5	-9,0	53,0	31,2	3,8	8,9
137,0	126,3	V	29,7	43,5	-13,8	44,5	31,2	3,7	12,7
155,5	144,8	V	35,8	43,5	-7,7	54,0	31,2	3,8	9,2
174,0	163,3	H	31,4	43,5	-12,1	49,9	31,2	3,8	8,9
380,0	123,1	H	26,7	43,5	-16,8	41,9	31,2	3,7	12,3
446,0	145,1	V	33,7	43,5	-9,8	51,9	31,2	3,8	9,2
512,0	167,1	V	34,4	43,5	-9,1	52,2	31,2	3,8	9,6



- Notes:
1. Negative signs (-) in the Margin column signify levels below the limit.
 2. All readings below 1 GHz are quasi-peak, above 1 GHz – average.
 3. All other readings not reported are at least 20 dB below the limit.
 4. For L.O. frequency calculation, see Appendix A

3.2 Test Data (Continued)

Model: 0712

Test Mode: Scanning all channels

Test distance: 10 m

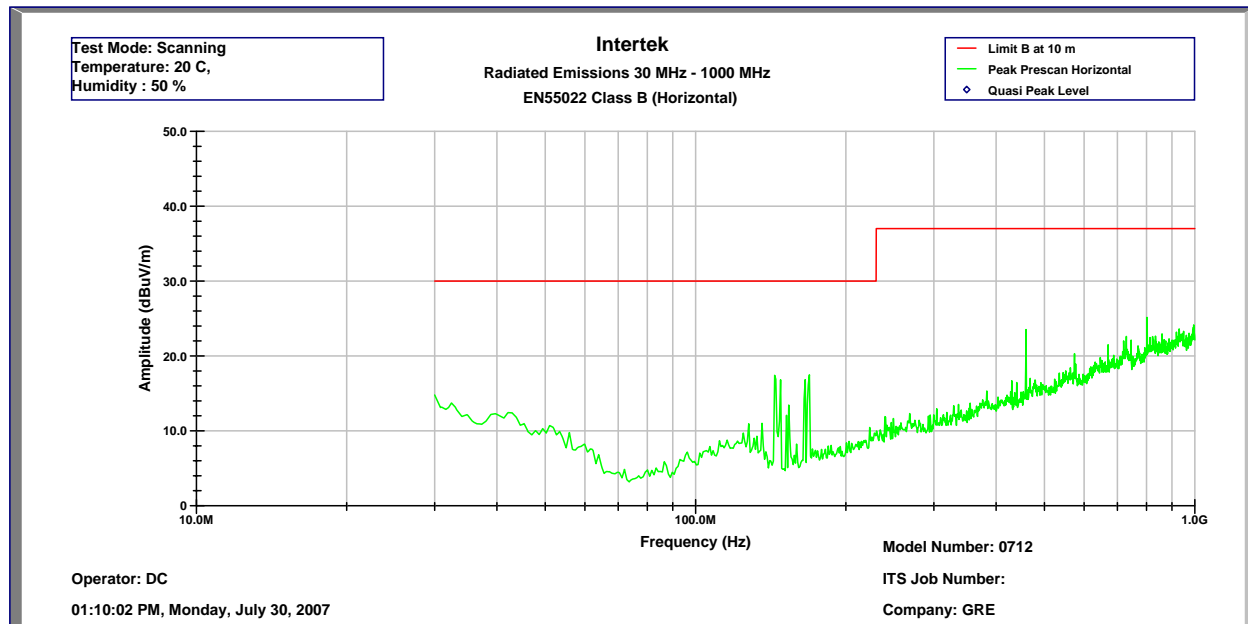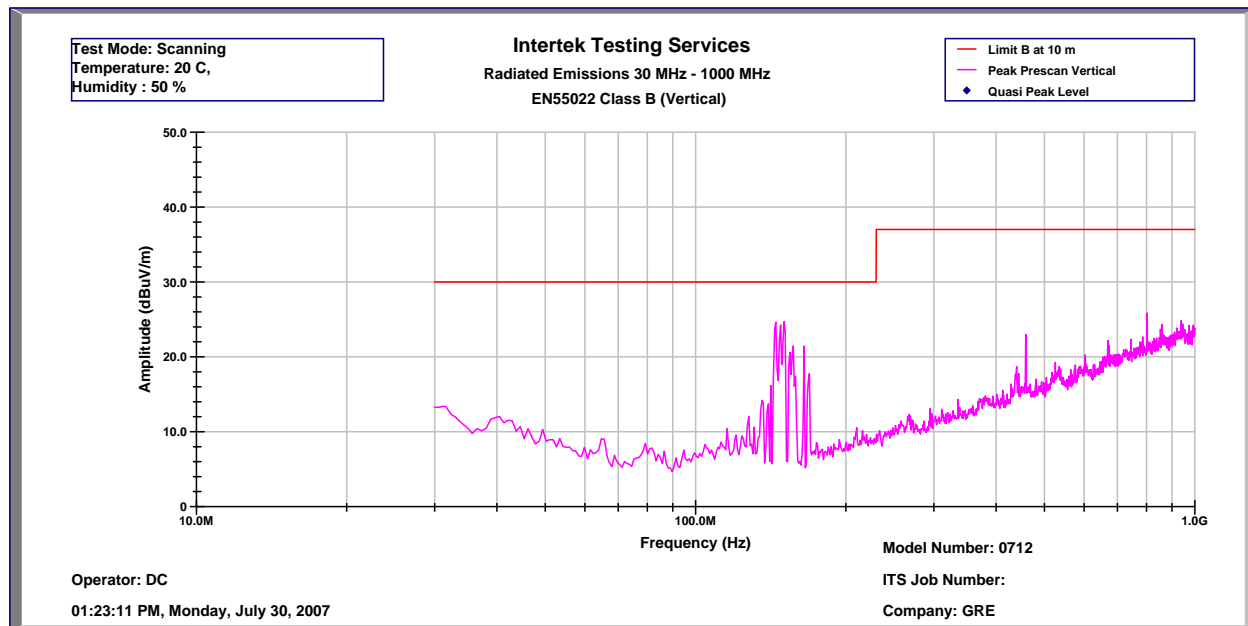

3.3 AC Line Conducted Emission Data



Tested By:	David Chernomordik
Test Date:	July 30, 2007

Temperature	(°C)	20 °C
Relative Humidity	(%)	50%

The results on the following page(s) were obtained when the device was tested in the condition described in Section 2.

Results:	Complies by 10.0 dB
-----------------	----------------------------

3.3 Test Data (Continued)

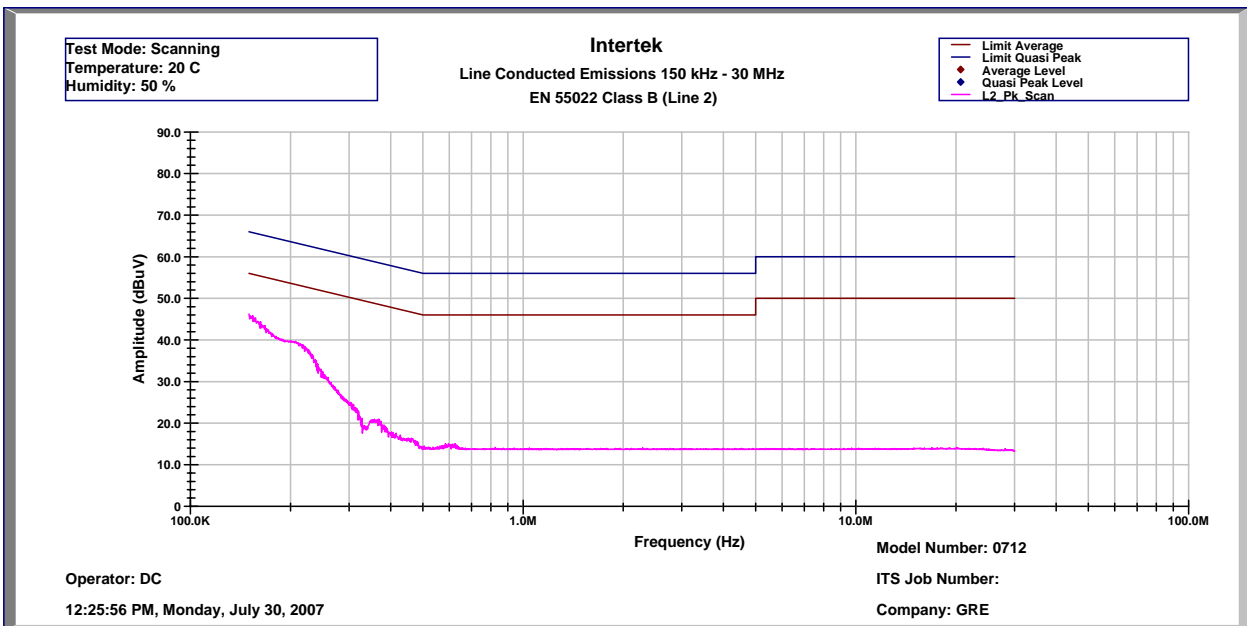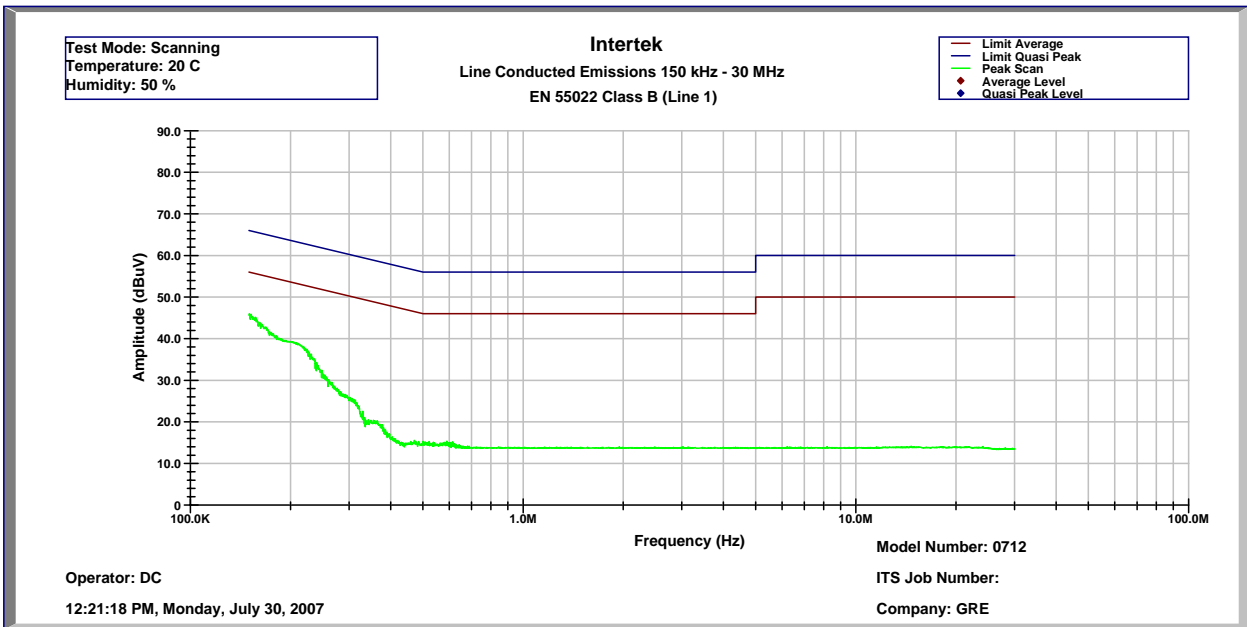



3.4 Antenna Conducted Emission Data

Tested By:	David Chernomordik
Test Date:	July 30, 2007

Temperature	(°C)	20 °C
Relative Humidity	(%)	50%

The results on the following page(s) were obtained when the device was tested in the condition described in Section 2.

Results:	Complies by 9.0 dB
-----------------	---------------------------

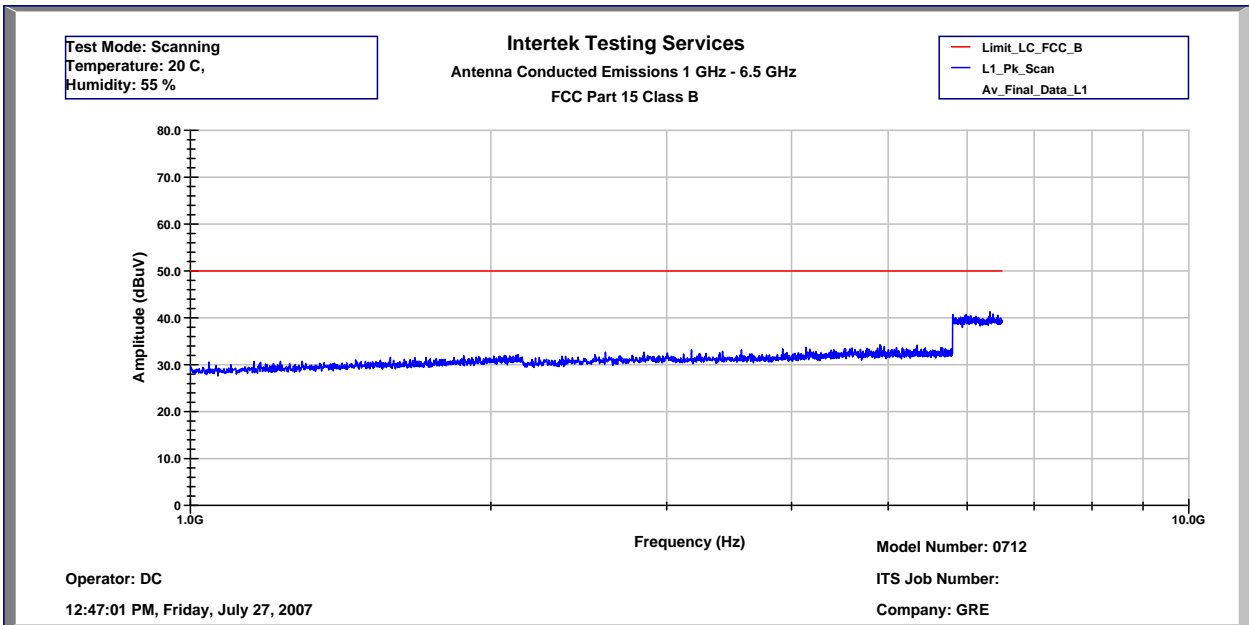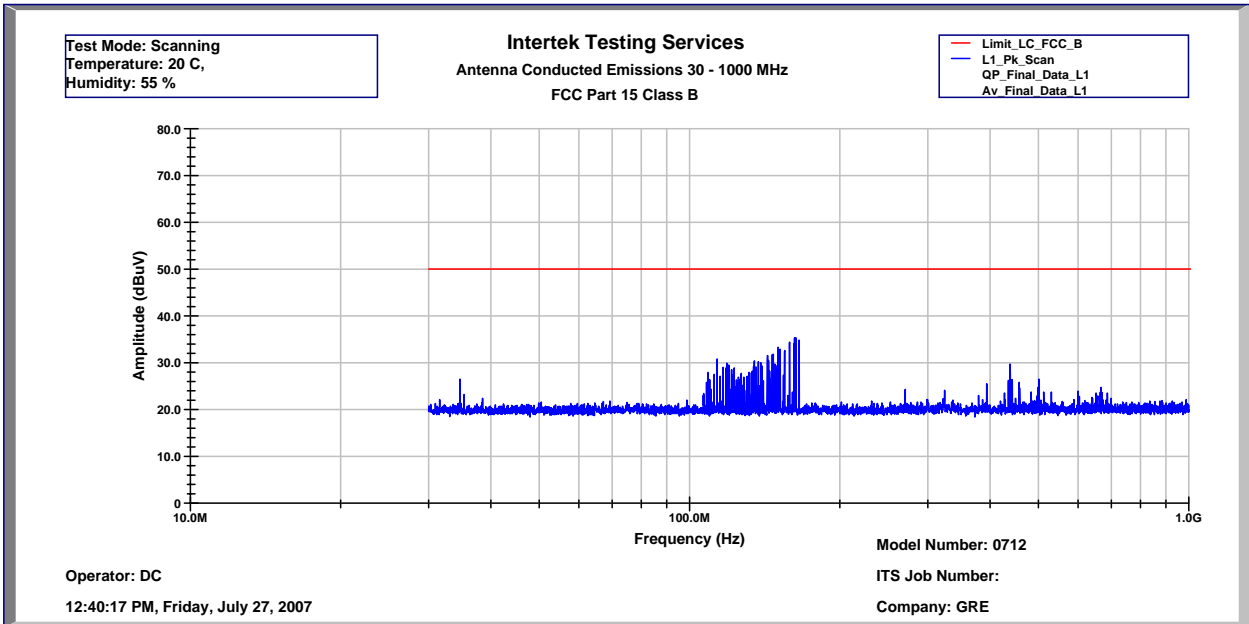

4.0 List of Test Equipment

Measurement equipment used for emission compliance testing utilized the equipment on the following list.

Equipment	Manufacturer	Model/Type	Serial #	Cal Int	Cal Due
Spectrum Analyzer	Rhode-Schwarz	FSP-40	100030	12	9/12/07
RF Filter Section	Hewlett Packard	85460A	3448A00267	12	9/11/07
EMI Receiver	Hewlett Packard	8546A	3710A00373	12	9/11/07
BI-Log Antenna	ARA Inc.	LPB-2513/A	1154	12	8/29/07
LISN	FCC	FCC-LISN-50-50-M-H	2012	12	7/31/07
Pre-Amplifier	Sonoma	11900A	9912A05634	12	8/11/07

Appendix A – Local Oscillator Frequency calculation

GENERAL RESEARCH OF ELECTRONICS, INC.

How to calculate FCC ID: ADV0712 OSC Frequency

1. FCC ID ADV0712 formula for 1st Local OSC are different due to frequency.

-1 Receive Freq. at 29MHz – 54MHz (VHF Low Band)

$$\text{OSC Freq. (MHz)} = \text{Receive Freq. (MHz)} + 10.7 \text{ (MHz)}$$

-2 Receive Freq. at 108MHz – 136.9675MHz (AIR Band)

$$\text{OSC Freq. (MHz)} = \text{Receive Freq. (MHz)} + 10.7 \text{ (MHz)}$$

-3 Receive Freq. at 137MHz – 174MHz (VHF Hi Band)

$$\text{OSC Freq. (MHz)} = \text{Receive Freq. (MHz)} - 10.7 \text{ (MHz)}$$

-4 Receive Freq. at 380MHz – 512MHz (UHF Low Band)

$$\text{OSC Freq. (MHz)} = (\text{Receive Freq. (MHz)} - 10.7 \text{ (MHz)})/3$$

2. Example

-1 Receive Freq. at 29MHz (VHF Low Band)

$$\begin{aligned} \text{OSC Freq. (MHz)} &= 29 \text{ (MHz)} + 10.7 \text{ (MHz)} \\ &= 39.7 \text{ (MHz)} \end{aligned}$$

-2 Receive Freq. at 108MHz (AIR Band)

$$\begin{aligned} \text{OSC Freq. (MHz)} &= 108 \text{ (MHz)} + 10.7 \text{ (MHz)} \\ &= 118.7 \text{ (MHz)} \end{aligned}$$

-3 Receive Freq. at 137MHz (VHF Hi Band)

$$\begin{aligned} \text{OSC Freq. (MHz)} &= 137 \text{ (MHz)} - 10.7 \text{ (MHz)} \\ &= 126.3 \text{ (MHz)} \end{aligned}$$

-4 Receive Freq. at 380MHz (UHF Low Band)

$$\begin{aligned} \text{OSC Freq. (MHz)} &= (380 \text{ (MHz)} - 10.7 \text{ (MHz)})/3 \\ &= 123.1 \text{ (MHz)} \end{aligned}$$

Appendix B – ADV0712 Specification



GENERAL RESEARCH OF ELECTRONICS, INC.

Phone: +813-5439-3611

SHIBA NO.3 AMEREX BLDG.

Fax: +813-5439-3644

No. 12-17 MITA 3-CHOME, MINATO-KU

TOKYO 108-0073, JAPAN

Tokyo: Sep. 26, 2006

Reference No. F06003

SPECIFICATIONS

SUBJECT: VHF/UHF DIRECT ENTRY PROGRAMMABLE AM/FM SCANNER with SKYWARN and
WX SAME
Model 0712

1. GENERAL

- 1.1. Programmable channel : 10 bank 20 channel (200 channel) memory banks
5 pre-programmed band for one touch search
Tune from the channel frequency
7 WX pre-programmed frequencies
WX alert and SAME receiving with 7 FIPS(Federal Information
Processing Standard) area code memories
1 priority channel
153 preprogrammed frequencies
- 1.2. Receiving system : PLL synthesizer dual-conversion superheterodyne
- 1st IF 10.7 MHz : The 1st Local OSC frequency for VHF
Low and Aircraft band employs upper side
of receiving frequency range.
:The 1st Local OSC frequency for VHF
High and UHF Low band employs lower
side of receiving frequency range.
- 2nd IF 455 kHz : The 2nd Local OSC frequency employs
lower side of 1st IF.

1.3. Frequency range	Freq.	Step	Mode
29.0000-54.0000 MHz	5 kHz	FM	
108.0000-136.9875 MHz	12.5 kHz	AM	
137.0000-143.9875 MHz	12.5 kHz	FM	
144.0000-148.0000 MHz	5 kHz	FM	
148.0125-150.7875 MHz	12.5 kHz	FM	
150.8000-161.9950 MHz	5 kHz	FM	
162.0000-174.0000 MHz	12.5 kHz	FM	
380.0000-512.0000 MHz	12.5 kHz	FM	

- Continued -

PRODUCT DEVELOPMENT & MANUFACTURING

- 1.4. One touch search : MAR (Marine band)
FD/PD (Fire and Police department)
AIR (Aircraft band)
HAM (HAM band)
WX (Weather Frequency)
- 1.5. WX 7 frequencies with alert function : 162.400, 162.425, 162.450, 162.475, 162.500, 162.525, 162.550 MHz
- 1.6. Scanning rate : 40 channels/sec.
- 1.7. Search rate : 80 steps/sec.
- 1.8. Display : LCD with back-lighting
- 1.9. Speaker : Built-in ϕ 77 mm 8 Ohms dynamic speaker
- 1.10. Audio output : 0.9 Watt
- 1.11. Operating voltage and power : AC 120 Volts, 60 Hz 15 Watts
consumption use: AC-DC adaptor
- 1.12. Dimension : Approx. 210 (W) x 175 (D) x 60 (H) mm
- 1.13. Weight : Approx. 700 g
- 1.14. Accessory : Telescopic antenna, UL listed AC-DC adaptor and Owner's manual
- 1.15. Memory backup : No battery back-up required, EEPROM used

2. ELECTRICAL

Standard Test Condition

- (1) Power source voltage : AC-DC adaptor (GA-06D-2670) 9 Volts DC, 400 mA
- (2) Antenna impedance : 50 Ohms
- (3) Test temperature : 25 degrees C
- (4) Standard signal level : 100 μ V
- (5) Modulation frequency : 1 kHz
- (6) Reference FM deviation : 3.0 kHz
- (7) Reference AM modulation : 60%
- (8) Reference audio output : 75 mWatts
- (9) Audio output load : 8 Ohm resistive load

		Nominal	Limit
2.1. Frequency range	: VHF Low Aircraft VHF High UHF Low		29-54 MHz 108-136.9875 MHz 137-174 MHz 380-512 MHz
2.2. Sensitivity	: VHF Low	0.5 μ V	1 μ V
(S+N)/N = 20 dB	Aircraft	1 μ V	3 μ V
Dev.: 3 kHz at 1 kHz	VHF High	0.5 μ V	2 μ V
Mod.: 60% at 1 kHz	UHF Low	0.7 μ V	3 μ V
2.3. WX alert tone decode sensitivity	: WX	0.3 μ V	1 μ V
1050 Hz 3 kHz Dev. at 162.400 MHz			
2.4. WX alert tone decode range	:	1050 \pm 30 Hz	\pm 40 Hz
4 kHz Dev. 1 μ V at 162.400 MHz			
2.5. WX SAME	:	0.7 μ V	2 μ V
4 kHz Dev. at 162.4 MHz			
2.6. WX alert tone priority checking time:		3.0 sec.	2-4 sec.
Note: When receiving WX alert in priority operation, the priority sampling time up to 2 sec. is added to this depending on Alert tone transmission timing.			
WX alert time only checking time:		5.0 sec.	4-6sec.
2.7. Image ratio	: VHF Low at 41 MHz Aircraft at 124 MHz VHF High at 154 MHz UHF	40 dB 15 dB 18 dB	30 dB 8 dB 8 dB Not specified
2.8. Squelch sensitivity (Band center)			
Threshold	: AM/FM	0.5 μ V	2 μ V
Tight: (S+N)/N	: AM	20 dB	10 dB
	FM	25 dB	15 dB
2.9. Selectivity	: -6 dB -50 dB	\pm 10 kHz \pm 18 kHz	\pm 14 kHz \pm 25 kHz
2.10. Spurious rejection (Except Primary image)	: VHF Low at 41 MHz VHF High at 154 MHz UHF Low	50 dB 50 dB	30 dB 30 dB Not specified
2.11. IF rejection	: 10.7 MHz at 154 MHz	70 dB	60 dB

		Nominal	Limit
2.11. Acceptable radio frequency displacement at EIA RS-204D	: VHF 154 MHz	± 6 kHz	± 3 kHz
2.12. Signal to noise ratio	: VHF Low at 41 MHz	50 dB	30 dB
RF: 100 μ V	Aircraft at 124 MHz	45 dB	30 dB
Dev.: 3 kHz at 1 kHz	VHF High at 154 MHz	45 dB	30 dB
Mod.: 60% at 1 kHz	UHF at 450 MHz	35 dB	25 dB
2.13. Residual noise	: at 154 MHz	1 mV	3 mV
Vol. min. and Squelched			
2.14. Scanning rate	: 406-505 MHz (in 1MHz: Intervals)	40 ch/sec.	35-45 ch/sec.
2.15. Search rate	: 162.25-167.25 MHz	80 steps/sec.	75-95 steps/sec.
2.16. Scan and Search delay time	:	2 sec.	1-3 sec.
2.17. Priority sampling	:	2 sec.	1.5-2.5 sec
2.18. Audio output (T.H.D. 10 %)	: RF input: 100 μ V at 154 MHz		
8 Ohms R Load, 1 kHz		0.7 Watt	0.4 Watt
2.19. T.H.D. at 0.5 Watt output	: RF input: 100 μ V at 154 MHz	3 %	8 %
2.20. Audio max. power	: RF input: 100 μ V at 154 MHz		
8 Ohm internal speaker		0.9 Watt	0.7 Watt
32 Ohm at earphone mono/stereo (each phone)		17/10 mWatts	25 mWatts
2.21. Audio frequency response at -6 dB	: RF input: 100 μ V at 154 MHz	300 Hz 2.0 kHz	200-400 Hz 1.5-3.0 kHz
2.22. Intermediate frequency	: 1 st 10.7 MHz 2 nd 455 kHz		
2.23. Operating voltage and power consumption	: 120 Volts AC, 60 Hz	4.5 Watts	5.8 Watts
2.24. Birdies and step frequency when search	: Under discussion		
2.25. Filter	: Monolithic crystal filter for 10.7 MHz and ceramic filter for 455 kHz		
2.26. Antenna impedance	: 50 Ohms		

- 2.27. Temperature range : Test to specification between: +18°C – +35°C
Operate (Need not meet spec.): 0°C – +43°C

3. OPERATING CONTROLS AND CONNECTIONS

3.1. Volume control

3.2. Squelch control

3.3. Power switch

3.4. Keyboard (26 keys)

3.5. LCD indicator:

7 digits frequency

3 digits memory channel

FD/PD, AIR, HAM, MAR, WX

10 banks indication

Other indications

SRCH, SCAN, MAN, PGM, DLY, L/O, PRI, ▲, ▼, -b-, -t-, CH, L-r, ALERt,

Error, OFF tonE, on tonE, L-O Fr-Full, -dUPL-, SEndInG, rECd

Lo VHF, Hi VHF, UHF, 10M, 6M, 2M, 70CM, skywarn

3.6. BNC type antenna connector

3.7. 9 Volt DC power jack

3.8. PC Interface and Clone jack(D=3.5mm mono)

3.9. Earphone/pc jack (D = 3.5 mm stereo)

4. KEY FUNCTION

MAR, FD/PD, AIR, HAM, WX

SCAN/MANual

skywarn

PRiority/ALERT

TUNE/CLEAR

▲ and ▼

ProGraM

Lock-Out/Lock-Out ReView

ENTer

Decimal point/DELAY

10 numeric key/bank selector

PauSE

5. FEATURES

- 5.1. 5 pre-programmed bands (MAR, FD/PD, AIR, HAM, WX) for one touch search
- 5.2. 200 channel memories
- 5.3. 200 channels automatic scanning for VHF to UHF band
- 5.4. QUICK PROGRAM when receive signals up to 200 channels
- 5.5. HYPERSCAN, 40 channels/sec. scanning rate and 80 steps/sec. searching rate
- 5.6. "Zeromatic" tuning system
- 5.7. 10 digit channel and frequency display with all function indicators
- 5.8. 200 channels lock-out in scan mode
- 5.9. Built-in priority channel
- 5.10. WX alert and SAME receiving with 10 FIPS(Federal Information Processing Standard) area code memories
- 5.11. Skywarn function
- 5.12. Lock/Out ReView key to confirm lock out frequency sequentially
- 5.13. Change the direction at the searching by ▲(up) or ▼(down)
- 5.14. 2 second scan and search delay
- 5.15. Manual selection for channel
- 5.16. Scan mode [Cleared channels (000.000 freq.) do not scan.]
- 5.17. Tune from the channel frequency
- 5.18. Program mode
- 5.19. Key tone
- 5.20. LCD back-lighting
- 5.21. Duplicate frequency check system
- 5.22. Clone the memory to the other unit
- 5.23. 153 preprogrammed frequencies