

## TEST REPORT

**Report Number: G100036448MPK-001**

**Project Number: G100036448**

**February 26, 2010**

**Testing performed on the  
Scanner**

**Model Number: ADV0712902**

**FCC ID: ADV0712902**

**to**

**FCC Part 15, Subpart B**

**Class: B**

**for  
GRE America**

Test Performed by:

Intertek  
1365 Adams Court  
Menlo Park, CA 94025

Test Authorized by:

GRE America  
425 Harbor Blvd. Suite B  
Belmont, CA 94002

Prepared by:

  
Marcos A. Rodriguez

**Date:** February 26, 2010

Reviewed by:

  
Krishna K Vemuri

**Date:** February 26, 2010

*This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to copy or distribute this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program. This report must not be used to claim product endorsement by A2LA, NIST nor any other agency of the U.S. Government.*

## VERIFICATION OF COMPLIANCE


### Report No. G100036448MPK-001

Verification is hereby issued to the named APPLICANT and is VALID ONLY for the equipment identified hereon for use under the rules and regulations listed below.

<b>Equipment Under Test:</b>	Scanner
<b>Trade Name:</b>	GRE America
<b>Model No.:</b>	ADV0712902
<b>Serial No.</b>	000015
<b>Applicant:</b>	GRE America
<b>Contact:</b>	Mr. Teru Takahashi
<b>Address:</b>	425 Harbor Blvd. Suite B Belmont, CA 94002
<b>Country</b>	USA
<b>Tel. number:</b>	650-591-1400
<b>Fax number:</b>	650-591-2001
<b>Applicable Regulation:</b>	FCC Part 15, Subpart B
<b>Equipment Class:</b>	Class B
<b>Date of Test:</b>	May 4 to June 8, 2009

*We attest to the accuracy of this report:*

  
\_\_\_\_\_  
Marcos A. Rodriguez  
Senior EMC Project Engineer

  
\_\_\_\_\_  
Krishna K Vemuri  
EMC Senior Staff Engineer

## TABLE OF CONTENTS

<b>1.0</b>	<b>General Description .....</b>	<b>4</b>
1.1	Product Description .....	4
1.2	Related Submittal(s) Grants .....	4
1.3	Test Methodology .....	4
1.4	Test Facility .....	4
1.5	Summary of Test Results .....	5
<b>2.0</b>	<b>System Test Configuration.....</b>	<b>6</b>
2.1	Justification.....	6
2.2	EUT Exercising Software .....	6
2.3	Mode of Operation.....	6
2.4	Support Equipment List and Description.....	7
2.5	Equipment Setup Block Diagram .....	7
2.6	Equipment Modification .....	8
<b>3.0</b>	<b>Emission Test Results .....</b>	<b>9</b>
3.1	Field Strength Calculation .....	10
3.2	Radiated Emission Data.....	11
3.3	AC Line Conducted Emission Data.....	15
3.4	Antenna Conducted Emission Data .....	17
<b>4.0</b>	<b>List of Test Equipment .....</b>	<b>20</b>
	<b>Appendix A – Local Oscillator Frequency calculation.....</b>	<b>21</b>
	<b>Appendix B – ADV0712902 Specification.....</b>	<b>22</b>

## 1.0 General Description

### 1.1 Product Description

The Equipment under Test (EUT) is Advanced Digital Scanning Receiver, model ADV0712902. The device tunes in the range of 29 MHz to 512 MHz.

Please refer to the attached specifications sheets in Appendix B for more details.

A pre-production version of the sample was received on May 18, 2008 in good condition. As declared by the Applicant, it is identical to production units.

### 1.2 Related Submittal(s) Grants

This is a single application for certification of a scanning receiver.

### 1.3 Test Methodology

Both conducted (if applicable) and radiated emission measurements were performed according to the procedures in ANSI C63.4 (2003). All radiated measurements were performed in a semi-anechoic chamber. Radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the **“Data Section”** of this Application.

### 1.4 Test Facility

The test site and conducted measurement facility used to collect the radiated data is Site 1, a 10 meter semi-anechoic chamber. This test facility and site measurement data have been fully placed on file with the FCC and A2LA accredited.

## 1.5 Summary of Test Results

**Model: ADV0712902**  
**FCC ID: ADV0712902**

TEST	REFERENCE	RESULTS
Radiated Emission	15.109	Complies
AC Line Conducted Emission	15.107	Complies
Antenna Conducted Emission	15.111	Complies
FCC Part 15.121 Requirement	15.121	Complies *

\* Refer to file: GRE ADV0712902 REPORT FOR FCC RULE PART 15.121

## 2.0 System Test Configuration

### 2.1 Justification

The tests were performed according to the test procedure as outlined in CFR47 Part 15.31 and in ANSI C63.4.

For emission testing, the equipment under test (EUT) was configured for testing in a typical fashion (as a customer would normally use it). During testing, all cables were manipulated to produce worst-case emissions.

For the measurements, the EUT is placed on top of a non-conductive table. If the EUT attaches to peripherals, they are connected and operational (as typical as possible).

For radiated emission measurements, the signal is maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization are varied during the search for maximum signal level. The antenna height is varied from 1 to 4 meters. Radiated emissions are taken at three meters unless the signal level is too low for measurement at that distance. If necessary, a pre-amplifier is used and/or the test is conducted at a closer distance. All readings are extrapolated back to the equivalent three-meter reading using inverse scaling with distance if measured at a closer distance.

### 2.2 EUT Exercising Software

The unit was setup to receive continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing.

### 2.3 Mode of Operation

The EUT was tested in two modes:


Test Mode 1: The EUT was set to constantly receive at the low, middle and high channels of each band.

Test Mode 2: The EUT was set to constantly scan all bands.

## 2.4 Support Equipment List and Description

Item #	Description	Model No.	Serial No.
N/A	Unit is Stand-alone device.		

## 2.5 Equipment Setup Block Diagram

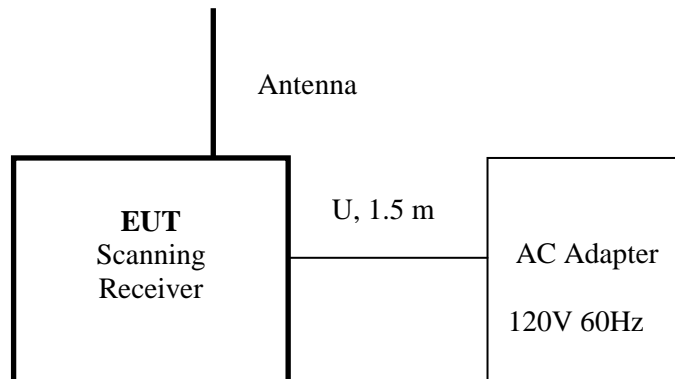

U: Unshielded  
m: meter

## 2.6 Equipment Modification

Any modifications installed previous to testing by GRE will be incorporated in each production model sold/leased in the United States.

Intertek Testing Services installed no modifications.



### **3.0 Emission Test Results**

AC line conducted emission measurements were performed from 0.15 MHz to 30 MHz. Analyzer resolution is 10 kHz or greater.

Radiated emission measurements and antenna conducted emission measurements were performed from 30 MHz to 8000 MHz. Analyzer resolution is 100 kHz or greater for frequencies from 30 MHz to 1000 MHz, 1 MHz - for frequencies above 1000 MHz.

Preliminary tests were performed to determine the worst-case emission with the EUT tuned to the low, middle and high channels of each band. From these preliminary measurements the EUT was tuned to the frequency with the highest emission and the final scan was performed using the automated test software.

The same procedure was used to determine the worst-case emission level with the EUT setup in scanning mode for each band.

The final recorded data reflects the worst-case result.

A sample calculation and data tables of the emissions are included.

All measurements were performed with peak detection unless otherwise specified.

### 3.1 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF - AG + DF$$

Where FS = Field Strength in dB( $\mu$ V/m)

RA = Receiver Amplitude (including preamplifier) in dB( $\mu$ V)

CF = Cable Attenuation Factor in dB

AF = Antenna Factor in dB(1/m)

AG = Amplifier Gain in dB

DF = Distance Factor in dB

Assume a receiver reading of 52.0 dB( $\mu$ V) is obtained. The antennas factor of 7.4 dB(1/m) and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted, giving field strength of 32 dB( $\mu$ V/m). This value in dB( $\mu$ V/m) was converted to its corresponding level in  $\mu$ V/m.

$$RA = 52.0 \text{ dB}(\mu\text{V})$$

$$AF = 7.4 \text{ dB}(1/\text{m})$$

$$CF = 1.6 \text{ dB}$$

$$AG = 29.0 \text{ dB}$$

$$DF = 0 \text{ dB}$$

$$FS = 52 + 7.4 + 1.6 - 29.0 + 0 = 32 \text{ dB}(\mu\text{V}/\text{m})$$

$$\text{Level in } \mu\text{V}/\text{m} = \text{Common Antilogarithm } [(32 \text{ dB}(\mu\text{V}/\text{m})/20] = 39.8 \mu\text{V}/\text{m}$$

### 3.2 Radiated Emission Data

<b>Tested By:</b>	Bruce Gordon & Marcos Rodriguez
<b>Test Date:</b>	May 4, 2009

The results on the following page(s) were obtained when the device was tested in the condition described in Section 2.

<b>Results:</b>	<b>Complies by 14.7dB</b>
-----------------	---------------------------

### 3.2 Test Data (Continued)

#### **FCC Part 15.109 Class B Radiated Emissions Data**

Model: ADV0712902

Test Mode: Receiving at Tuned frequency

Test distance: 3 m

Tuned Frequency	L.O. Frequency	Antenna Polarization	Quasi-PK FS	Limit @3m	RA	AG	CF	AF	Margin
MHz	MHz	H/V	dB(uV/m)	dB(uV/m)	dB(uV)	dB	dB	dB(1/m)	dB
29.0	39.7	V	19.5	40.0	37.2	32.3	0.6	14.0	-20.5
41.5	52.2	V	7.9	40.0	28.1	32.2	0.7	11.3	-32.1
54.0	64.7	V	3.8	40.0	27.0	32.4	0.8	8.3	-36.2
87.3	98.0	V	7.6	43.5	28.6	32.7	1.0	10.6	-35.9
97.6	108.3	V	7.6	43.5	28.4	32.7	1.1	10.9	-35.9
107.9	118.6	V	15.2	43.5	34.1	32.6	1.1	12.6	-28.3
108.0	118.7	V	13.1	43.5	32.0	32.6	1.1	12.6	-30.4
122.4916	133.1916	V	19.7	43.5	39.4	32.8	1.2	11.9	-23.8
136.9916	147.6916	V	21.9	43.5	42.8	32.0	1.3	9.8	-21.6
137.0	126.3	V	19.2	43.5	38.1	32.7	1.2	12.6	-24.3
155.5	144.8	V	18.6	43.5	40.0	32.3	1.2	9.7	-24.9
174.0	163.3	V	28.8	43.5	49.2	31.9	1.3	10.1	-14.7
380.0	123.1	V	12.9	43.5	31.6	32.6	1.1	12.8	-30.6
446.0	145.1	V	12.6	43.5	34.0	32.3	1.2	9.7	-30.9
512.0	167.1	V	28.8	43.5	48.5	31.9	1.3	10.8	-14.7


- Notes:
1. Negative signs (-) in the Margin column signify levels below the limit.
  2. All readings below 1 GHz are quasi-peak, above 1 GHz – average.
  3. All other readings not reported are at least 20 dB below the limit.
  4. For L.O. frequency calculation, see Appendix A

## 3.2 Test Data (Continued)

Model: ADV0712902

Test Mode: Scanning all channels

Test distance: 10 m

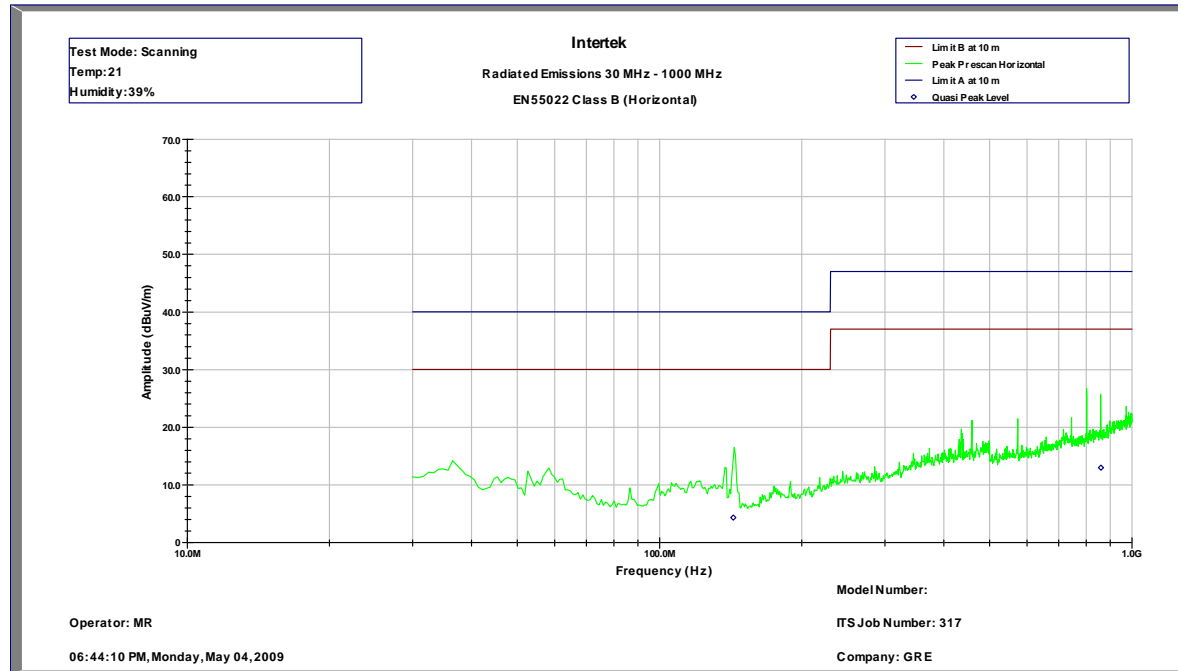

Intertek  
Radiated Emissions 30 MHz - 1000 MHz  
EN55022 Class B (QP-Horizontal)

Operator: MR

Model Number: ADV0712902

ITS Job Number: G100036448

06:44:10 PM, Monday, May 4, 2009

Company: GRE

Frequency	Quasi Pk FS	Limit@10m	Margin	RA	AG	AF	CF
MHz	dB(uV/m)	dB(uV/m)	dB	dB(uV)	dB	dB(1/m)	dB
143.184	4.3	30.0	-25.7	25.6	31.9	9.4	1.2
860.175	13.0	37.0	-24.0	20.0	31.7	21.5	3.1

Test Mode: Scanning

Temp: 21

Humidity: 39%


Frequency range of investigation was 30 MHz – 8 GHz. No emissions were detected above the noise floor above 1 GHz. The noise floor was at least 20 dB below the limit.

### 3.2 Test Data (Continued)

Model: ADV0712902

Test Mode: Scanning all channels

Test distance: 10 m

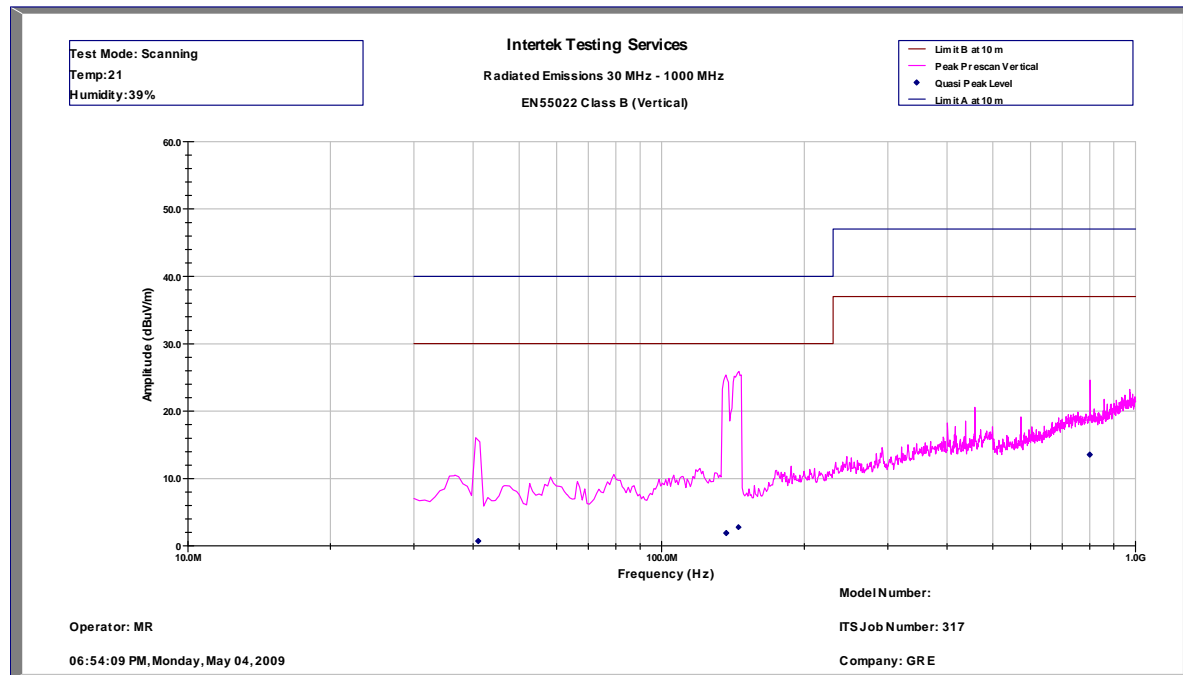

Intertek Testing Services  
Radiated Emissions 30 MHz - 1000 MHz  
EN55022 Class B (QP-Vertical)

Operator: MR

06:54:09 PM, Monday, May 4, 2009

Model Number: ADV0712902

ITS Job Number: G100036448

Company: GRE

Frequency	Quasi Pk FS	Limit@10m	Margin	RA	AG	AF	CF
MHz	dB(uV/m)	dB(uV/m)	dB	dB(uV)	dB	dB(1/m)	dB
41.009	0.7	30.0	-29.3	18.4	32.0	13.7	0.6
136.899	1.9	30.0	-28.1	21.8	32.0	10.9	1.2
145.256	2.8	30.0	-27.2	23.8	31.9	9.7	1.2
800.049	13.6	37.0	-23.4	20.8	32.0	21.8	3.0

Test Mode: Scanning

Temp:21

Humidity:39%

Frequency range of investigation was 30 MHz – 8 GHz. No emissions were detected above the noise floor above 1 GHz. The noise floor was at least 20 dB below the limit.



### 3.3 AC Line Conducted Emission Data

<b>Tested By:</b>	Marcos Rodriguez
<b>Test Date:</b>	May 4, 2009

The results on the following page(s) were obtained when the device was tested in the condition described in Section 2.

<b>Results:</b>	<b>Complies by 32.5 dB</b>
-----------------	----------------------------

### 3.3 Test Data (Continued)

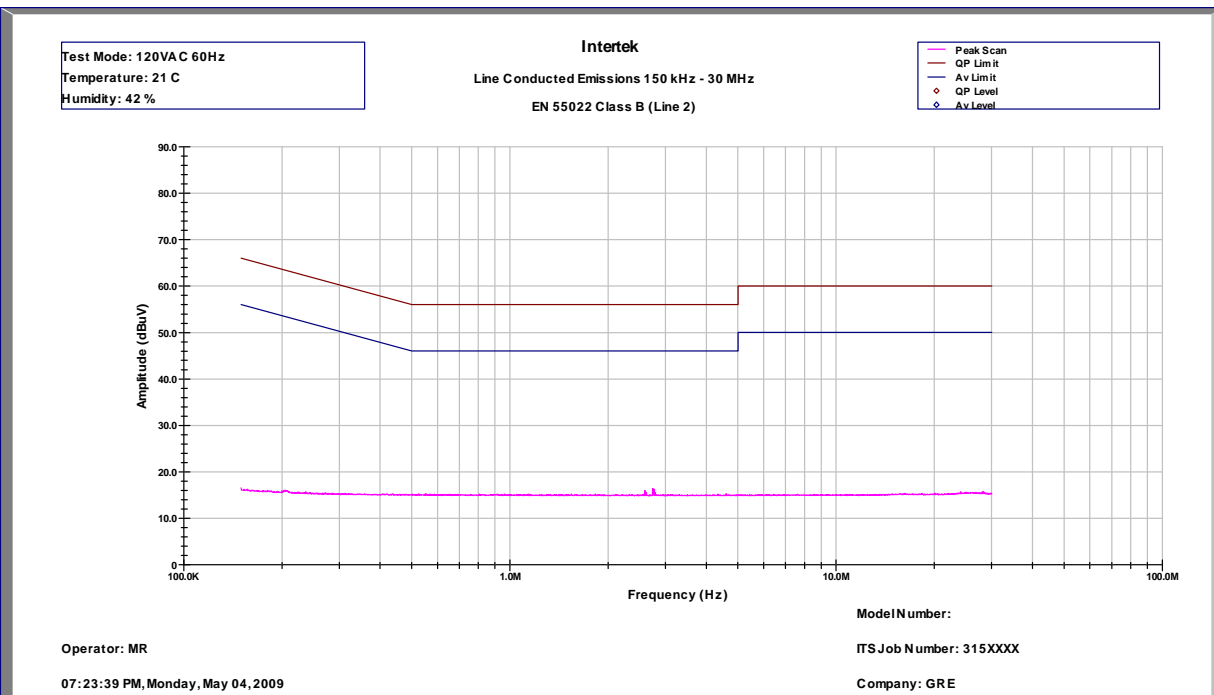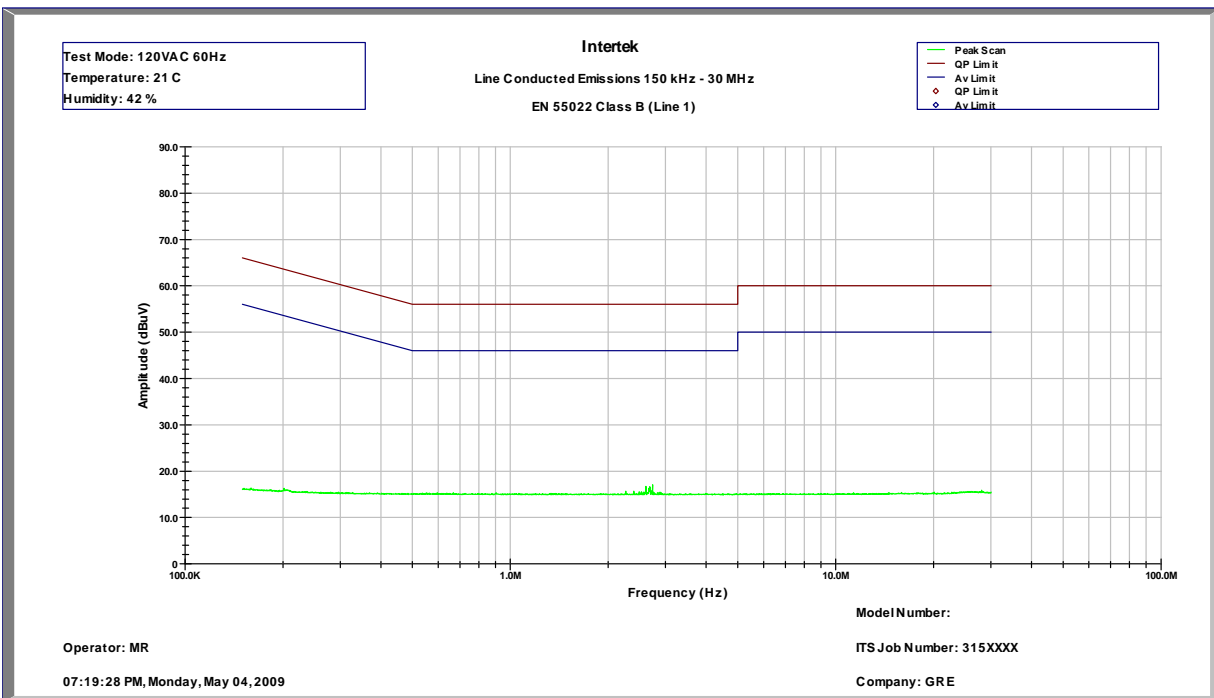




### 3.4 Antenna Conducted Emission Data

<b>Tested By:</b>	Bruce Gordon & Marcos Rodriguez
<b>Test Date:</b>	June 8, 2009

The results on the following page(s) were obtained when the device was tested in the condition described in Section 2.

<b>Results:</b>	<b>Complies</b>
-----------------	-----------------


Note: Tests were performed with the EUT operating in the low, middle and high channels. The worst-case emissions were detected in the low channel and are presented in this report.

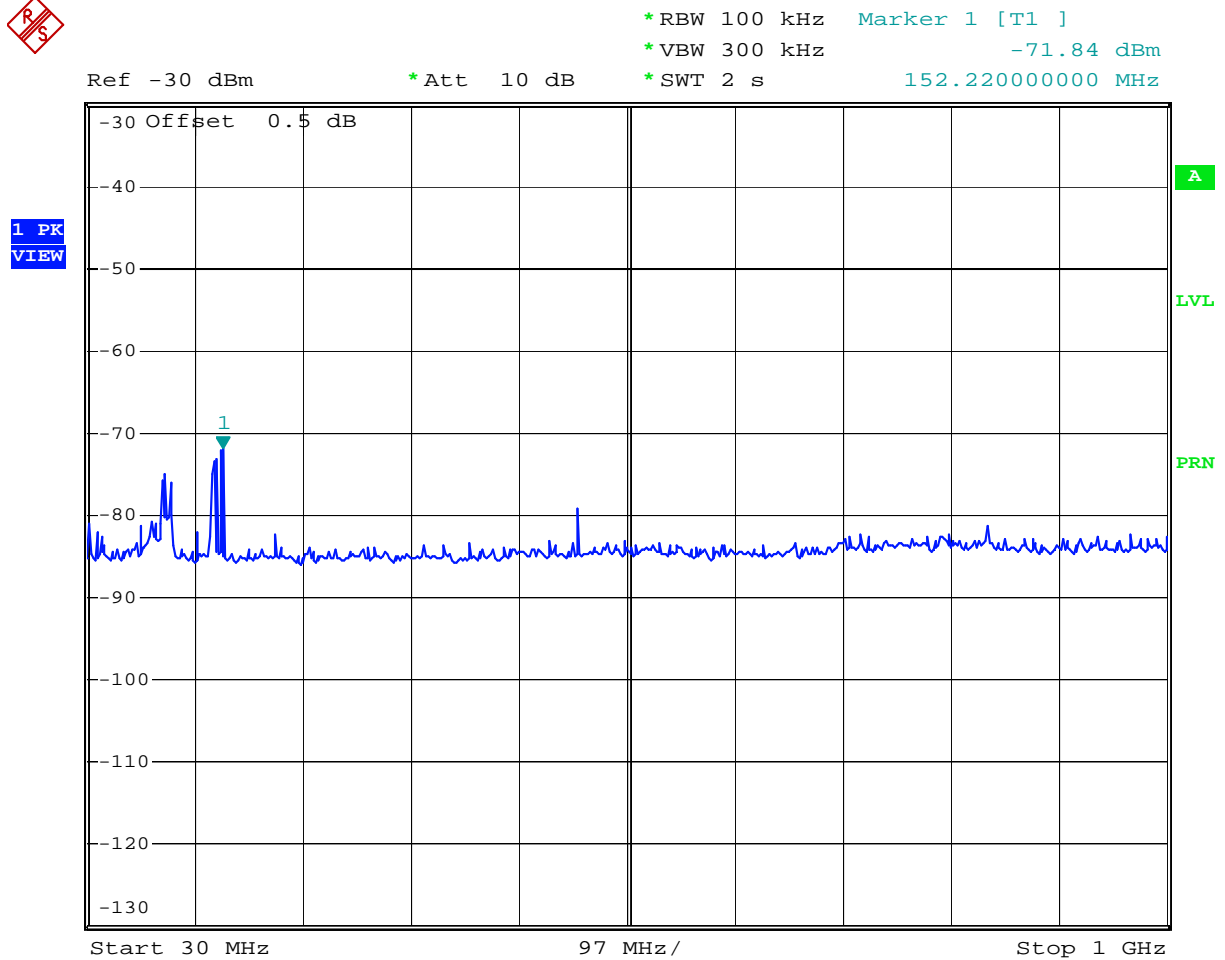

Comment: In-band Unwanted Emissions, Channel Low  
 Date: 8.JUN.2009 17:51:25



Ref -30 dBm      \*Att 10 dB      \*RBW 1 MHz      Marker 1 [T1 ]  
 VBW 3 MHz      -63.71 dBm  
 \*SWT 2 s      3.070000000 GHz

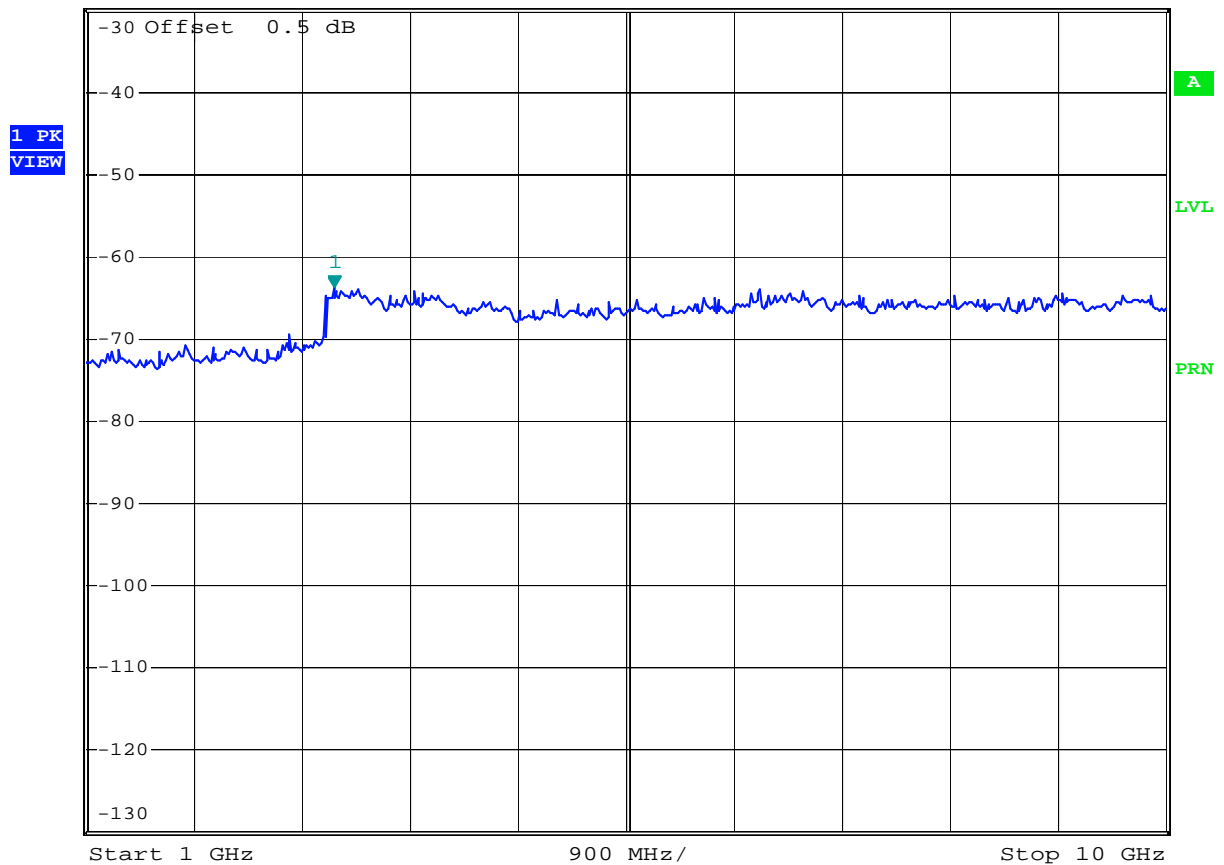

Comment: In-band Unwanted Emissions, Channel Low  
 Date: 8.JUN.2009 17:54:26

#### 4.0 List of Test Equipment

Measurement equipment used for emission compliance testing utilized the equipment on the following list.

Equipment	Manufacturer	Model/Type	Serial #	Cal Int	Cal Due
RF Filter Section	Hewlett Packard	85460A	3448A00267	12	10/01/09
EMI Receiver	Hewlett Packard	8546A	3710A00373	12	10/01/09
BI-Log Antenna	ARA	LPB-2513/A	1154	12	6/11/09
Pre-Amplifier	Sonoma	310N	185634	12	9/26/09
LISN	FCC	FCC-LISN-50-50-M-H	2011	12	9/19/09
Spectrum Analyzer	Rohde/Schwarz	FSP-40	100030	12	10/13/09

## Appendix A – Local Oscillator Frequency calculation

### How to calculate FCC ID: ADV0712902 OSC Frequency

1. FCC ID: ADV0712902 formula for 1st Local OSC are different due to frequency.

- 1 Receive Freq. at 29MHz – 54MHz (VHF Low Band)

$$\text{OSC Freq. (MHz)} = \text{Receive Freq. (MHz)} + 10.7 \text{ (MHz)}$$

- 2 Receive Freq. at 87.3MHz – 107.9MHz (FM Radio Band)

$$\text{OSC Freq. (MHz)} = \text{Receive Freq. (MHz)} + 10.7 \text{ (MHz)}$$

- 3 Receive Freq. at 108MHz – 136.9916MHz (AIR Band)

$$\text{OSC Freq. (MHz)} = \text{Receive Freq. (MHz)} + 10.7 \text{ (MHz)}$$

- 4 Receive Freq. at 137MHz – 174MHz (VHF Hi Band)

$$\text{OSC Freq. (MHz)} = \text{Receive Freq. (MHz)} - 10.7 \text{ (MHz)}$$

- 5 Receive Freq. at 380MHz – 512Hz (UHF Low Band)

$$\text{OSC Freq. (MHz)} = \{\text{Receive Freq. (MHz)} - 10.7 \text{ (MHz)}\} / 3$$



## **Appendix B – ADV0712902 Specification**

See attached document [ADV0712902 Specification](#).