


Model : CPE-400-270
 Serial No. : 1306419001
 Operator : K.Yamamoto
 AC Mains : 120V,60Hz
 Temp ,Humid : 24°C,40%,1007hPa

Standard : FCC Part.15 Class B
 Remark1 :
 Remark2 :
 Remark3 :
 Remark4 :

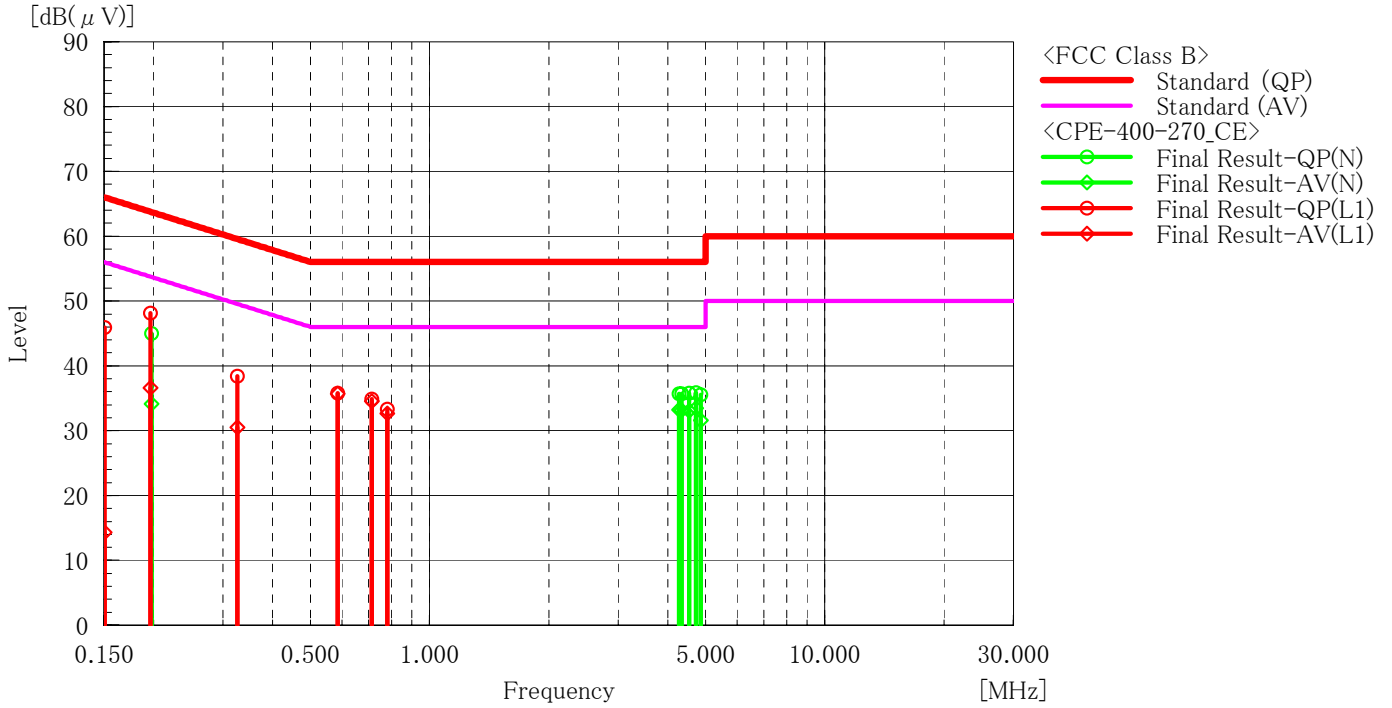

Final Result

--- N Phase ---

No.	Frequency [MHz]	Reading QP [dB(μV)]	Reading AV [dB(μV)]	c. f [dB]	Result QP [dB(μV)]	Result AV [dB(μV)]	Limit QP [dB(μV)]	Limit AV [dB(μV)]	Margin QP [dB]	Margin AV [dB]
1	0.19762	34.9	24.0	10.1	45.0	34.1	63.7	53.7	18.7	19.6
2	4.27699	25.2	22.7	10.5	35.7	33.2	56.0	46.0	20.3	12.8
3	4.33864	25.2	22.6	10.5	35.7	33.1	56.0	46.0	20.3	12.9
4	4.53319	25.3	22.6	10.5	35.8	33.1	56.0	46.0	20.3	13.0
5	4.72854	25.4	23.0	10.5	35.9	33.5	56.0	46.0	20.1	12.5
6	4.85968	25.1	21.1	10.5	35.6	31.6	56.0	46.0	20.4	14.4

--- L1 Phase ---

No.	Frequency [MHz]	Reading QP [dB(μV)]	Reading AV [dB(μV)]	c. f [dB]	Result QP [dB(μV)]	Result AV [dB(μV)]	Limit QP [dB(μV)]	Limit AV [dB(μV)]	Margin QP [dB]	Margin AV [dB]
1	0.15044	35.7	4.1	10.2	45.9	14.3	66.0	56.0	20.1	41.7
2	0.19642	38.1	26.5	10.1	48.2	36.6	63.8	53.8	15.7	17.2
3	0.32575	28.4	20.4	10.1	38.5	30.5	59.6	49.6	21.2	19.1
4	0.58494	25.6	25.5	10.2	35.8	35.7	56.0	46.0	20.2	10.3
5	0.71431	24.7	24.4	10.2	34.9	34.6	56.0	46.0	21.1	11.4
6	0.78164	23.2	22.4	10.2	33.4	32.6	56.0	46.0	22.7	13.4