


Model : CPE-400-2C0
 Serial No. : 1307200041
 Operator : H.Izuka
 AC Mains : 120V,60Hz
 Temp ,Humid : 28°C,38%,1004hPa

Standard : FCC Class B
 Remark1 :
 Remark2 :
 Remark3 :
 Remark4 :

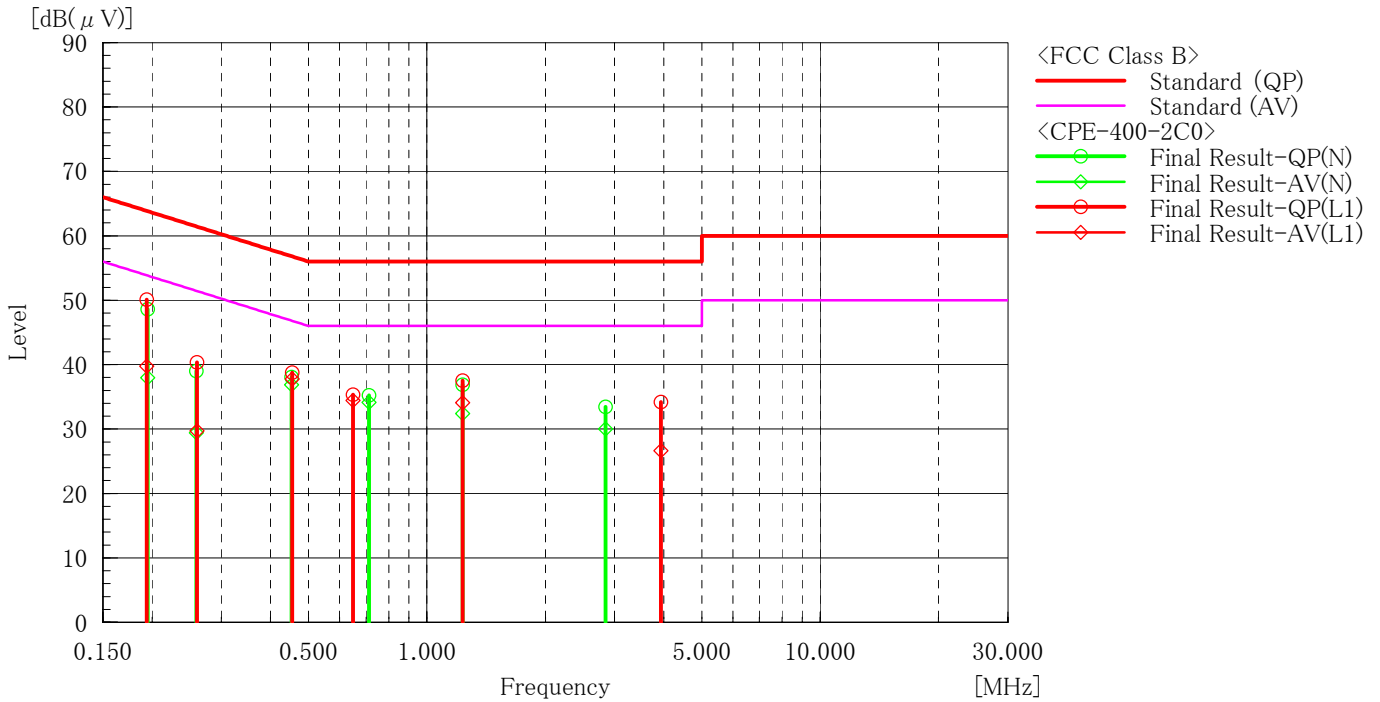

Final Result

--- N Phase ---

No.	Frequency [MHz]	Reading QP [dB(μV)]	Reading AV [dB(μV)]	c. f [dB]	Result QP [dB(μV)]	Result AV [dB(μV)]	Limit QP [dB(μV)]	Limit AV [dB(μV)]	Margin QP [dB]	Margin AV [dB]
1	0.195	38.5	27.9	10.1	48.6	38.0	63.8	53.8	15.2	15.8
2	0.259	28.9	19.3	10.1	39.0	29.4	61.5	51.5	22.5	22.1
3	0.453	27.9	26.7	10.2	38.1	36.9	56.8	46.8	18.7	10.0
4	0.712	25.0	23.9	10.2	35.2	34.1	56.0	46.0	20.8	11.9
5	1.232	26.7	22.2	10.2	36.9	32.4	56.0	46.0	19.1	13.6
6	2.844	23.0	19.6	10.4	33.4	30.0	56.0	46.0	22.6	16.0

--- L1 Phase ---

No.	Frequency [MHz]	Reading QP [dB(μV)]	Reading AV [dB(μV)]	c. f [dB]	Result QP [dB(μV)]	Result AV [dB(μV)]	Limit QP [dB(μV)]	Limit AV [dB(μV)]	Margin QP [dB]	Margin AV [dB]
1	0.194	40.0	29.6	10.1	50.1	39.7	63.9	53.9	13.8	14.2
2	0.260	30.3	19.6	10.1	40.4	29.7	61.4	51.4	21.0	21.7
3	0.454	28.6	27.6	10.2	38.8	37.8	56.8	46.8	18.0	9.0
4	0.649	25.2	24.3	10.2	35.4	34.5	56.0	46.0	20.7	11.6
5	1.232	27.3	23.9	10.2	37.5	34.1	56.0	46.0	18.5	11.9
6	3.936	23.7	16.1	10.5	34.2	26.6	56.0	46.0	21.8	19.4