

Designated by Ministry of International Trade and Industry

Attachment #1C

KANSAI ELECTRONIC INDUSTRY DEVELOPMENT CENTER

HEAD OFFICE
6-8-7, NISHITEMMA
KITA-KU, OSAKA, 530-0047 JAPAN



IKOMA
TESTING LABORATORY
12128, TAKAYAMA-CHO
IKOMA-CITY, NARA, 630-0101 JAPAN

*Corporate Juridical Person***ENGINEERING TEST REPORT****REPORT NO. A-011-99-C****Issued Date : April 22, 1999**

This test report is to certify that the tested device properly complies with the requirements of:

FCC Rules and Regulations Part 18 Subpart C.

One of the tests necessary to show compliance to the requirements was performed and this result met the specifications of requirement. The results of this report should not be construed to imply compliance of equipment other than that which was tested. Unless the laboratory permission, this report should not be copied in part.

1. Applicant

Company Name : SANYO Electric Co., Ltd. Home Appliance Company Laundry and cooking Appliances Division

Mailing Address : 1-1, Seta, 1-chome, Otsu City, Shiga, 520-2134 Japan

2. Identification of Tested Device

FCC ID : AEZM901
Device Name : Microwave Oven
Trade Name : SANYO
Model Number : EM-S8000
Serial Number : prototype No.1
Date of Manufacture : March, 1999

3. Test Items and Procedure

1) Radiated Emission Measurement (30 MHz to 1000 MHz)

Above tests was performed under : FCC/OET MP-5 (1985)

4. Date of Test

Receipt of Test Sample : April 16, 1999
Test Completed on : April 16, 1999

CERTIFIED BY :

Fumitoshi Nagaoka
Associate Director of Ikoma Testing Laboratory

ENGINEERING TEST REPORT

Attachment #1C

TABLE OF CONTENTS

1. GENERAL INFORMATION	
1.1 Product Description	3
1.2 Description for Equipment Authorization	3
1.3 Test Facility	3
2. TESTED SYSTEM	
2.1 Test Mode	4
2.2 Operation of EUT System	4
2.3 Block Diagram of EUT System	4
3. MEASUREMENT OF ELECTRIC FIELD STRENGTH (30 MHz TO 1000 MHz)	
3.1 Reference Rule and Specification	5
3.2 Test Procedure	5
3.3 Test Arrangement	6
3.4 Photographs of EUT System Configuration	7
3.5 Test Results	8
3.6 List of Test Instruments	9

ENGINEERING TEST REPORT

Attachment #1C

1. GENERAL INFORMATION

1.1 Product Description

The SANYO Model No. EM-S8000(referred to as the EUT in this engineering test report) is a Commercial Use Microwave Oven.

1) Special Feature

- Magnetron Frequency : 2450 MHz
- RF Power : 1000 W

2) Rated Power Supply

- AC 120 V, 60 Hz
- Protection Class 1(with ground connector)

3) Contained Oscillator

- 4.0 MHz(CERAMIC RESONATOR)

1.2 Description for Equipment Authorization

1) Rules Part(s) under which equipment operated

FCC Rule Part 18, Subpart C
ISM Equipment

2) Kind of Equipment Authorization

(x) Certification () Verification

3) Procedure of Application

(x) Original Equipment () Modification

1.3 Test Facility

N a m e : KANSAI ELECTRONIC INDUSTRY DEVELOPMENT CENTER(KEC)
IKOMA TESTING LABORATORY
Open Test Site No.2

Address : 12128, Takayama-cho Ikoma-city, Nara, 630-0101 Japan

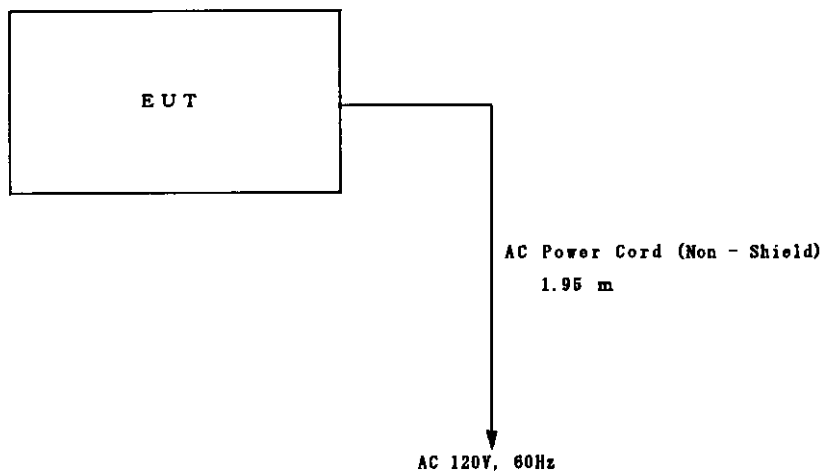
These test facilities have been filed with the FCC under the criteria of
ANSI C63.4-1992

ENGINEERING TEST REPORT**2. TESTED SYSTEM****2.1 Test Mode**

The compliance tests were performed under following operation mode.

Maximum Output Power Operation**2.2 Operaton of EUT System**

- 1) Open the door of EUT.
- 2) Set the load as follows in EUT.
 - Receptacle
1000 cc volume Beaker
 - Load for the test
700 cc water with beaker
- 3) Close the door of EUT.
- 4) Set the output power to maximum.
- 5) Set the cooking time.
- 6) Push the start pad.
Then start the cooking.

2.3 Block Diagram of EUT System

ENGINEERING TEST REPORT**3. MEASUREMENT OF ELECTRIC FIELD STRENGTH (30 MHz TO 1000 MHz)****3.1 Reference Rule and Specification**

FCC Rule Part 18 Subpart C
FCC/OET MP-5(1985)

3.2 Test Procedure

- 1) Configure the EUT.
[See 3.3 Test arrangement and 3.4 Photographs of EUT System Configuration]

[Note]

The power cords for the EUT are connected through the receptacle with the turn floor to the CVCF placed under the ground plane.

- 2) Operate the EUT.
- 3) To determine the emissions of the EUT, preliminary radiated measurement was performed at a closer distance than that specified for final radiated measurement using the broad band antenna and the spectrum analyzer.
- 4) To search the frequency of maximum emission level on the spectrum analyzer, change the EUT System configuration, move the signal cables and the power cords, change the EUT conditions.
- 5) The spectrum was scanned from 30 MHz to 1000 MHz and collect the emissions on the spectrum analyzer.
- 6) The collected emissions for final test were measured at the specified distance using the tuned dipole antenna or broad band antenna and the test receiver *1).

[Note]

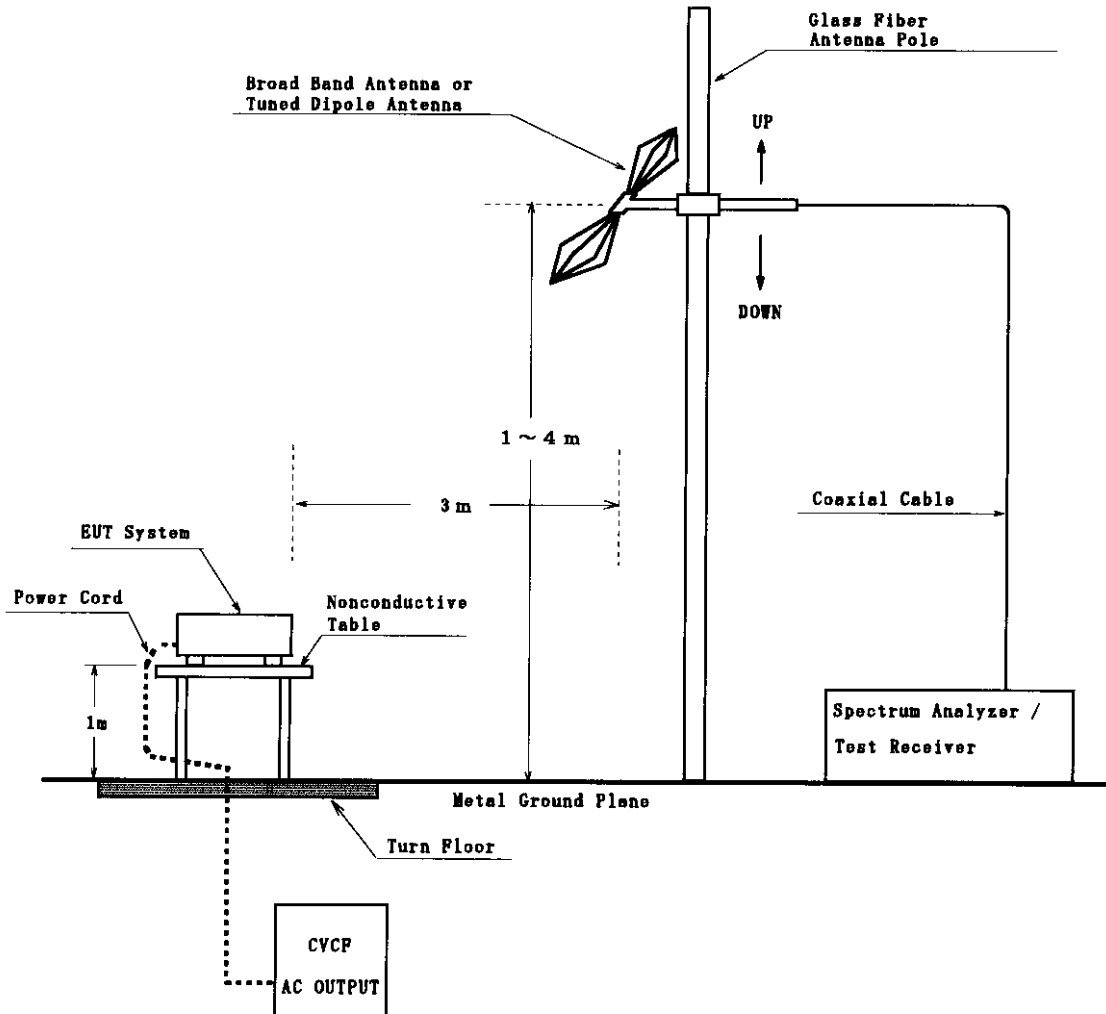
- *1) Test Receiver Operation Mode
Detector Function : Average
IF Band Width : 120 kHz(frequency range in 30 MHz - 1000 MHz)

ENGINEERING TEST REPORT

Attachment #1C

3.3 Test Arrangement

[Open Site]



ENGINEERING TEST REPORT

Attachment #1C

3.5 Test Results

Emission Frequency [MHz]	Antenna Factor [dB]	Meter Reading at 3 m [dB μ V]		Maximum Field Strength at 300 m [μ V/m]	Limits [μ V/m]
		Horiz.	Vert.		
46.12	12.8	<-7.0	<-7.0	<0.1	35.4
115.25	14.1	<-9.0	<-8.0	<0.1	35.4
522.85	23.0	<-8.0	<-9.0	<0.1	35.4
782.10	27.5	<-9.0	<-9.0	<0.1	35.4
888.20	29.0	<-8.0	<-7.0	<0.1	35.4
902.20	29.1	-6.5	<-8.0	0.13	35.4

[Note]

Distance Corr. Factor : -40 dB(from 3 m to 300 m)
 Antenna Factor : Antenna Factor includes the cable loss
 Test Condition : 700 ml water load, at the center of tray.
 Limits : $25\sqrt{P/500} = 25\sqrt{1000/500} = 35.4$ [μ V/m]
 P[W] : RF(Microwave) Power

[Environment]

Temperature : 25 °C Humidity : 51 %

[Sample Calculation]


Frequency 902.20 MHz, Horizontal Polarization
 Field Strength (μ V/m at 300 m)
 $= 10^{(Meter Reading [dB\mu V] + Antenna Factor [dB] + Distance Corr. Factor [dB])/20}$
 $= 10^{(-6.5 + 29.1 - 40)/20}$
 $= 10^{(-17.4/20)}$
 $= 0.13$ [μ V/m]

[Summary of Test Result]

Minimum margin was more than 48.7 dB at 902.20 MHz (Horizontal Polarization).

Tested Date : April 16, 1999

Signature


 Yasunari Kawai

ENGINEERING TEST REPORT

Attachment #1C

3.6 List of Test Instruments

Instrument	Manufacturer	Model No	Specifications	KEC Control No.	if used, checked by "X".	Last Cal.	Next Cal.
Test Receiver	Rohde & Schwarz	ESVP	Frequency Range 20 MHz - 1000 MHz	FS-48-3	<input type="checkbox"/>	1998/5	1999/5
		ESV	Frequency Range 20 MHz - 1000 MHz	FS-55	<input checked="" type="checkbox"/>	1998/4	1999/4
Spectrum Analyzer	Advantest	TR4172	Frequency Range 50 Hz - 1.8 GHz	FS-44-2	<input checked="" type="checkbox"/>	1998/9	1999/9
Pre-Selector	Advantest	TR14037	Frequency Range 10 kHz - 1.0 GHz	FS-44-3	<input checked="" type="checkbox"/>	1998/9	1999/9
Biconical Antenna	Schwarzbeck	BBA9106	Frequency Range 30 MHz - 300 MHz	AN-80	<input checked="" type="checkbox"/>	1999/2	2000/2
Log-Periodic Antenna	Schwarzbeck	UHALP 9107	Frequency Range 300 MHz - 1 GHz	AN-97	<input checked="" type="checkbox"/>	1999/2	2000/2
Tuned Dipole Antenna	Kyoritsu	KBA-511S	Frequency Range 25 MHz - 500 MHz	AN-112	<input type="checkbox"/>	1999/3	2000/3
		KBA-611S	Frequency Range 500 MHz - 1 GHz	AN-7-11	<input type="checkbox"/>	1999/3	2000/3

REPORT OF MEASUREMENTS (MICROWAVE OVEN TEST DATA)

FCC ID : AEZM901 MODEL : EM-S8000 DATE : April 14, 1999
 NOMINAL FREQUENCY : 2,450 MHz TESTED BY : Y. FUKUDA
J. Fukuda

DESCRIPTION : (Unit Dimension : cm)

Cabinet Dimension : 76.0 by 35.7 by 43.2 Door Dimension : 57.7 by 33.3
 Oven Cavity Dimension : 48.9 by 34.5 by 25.5 Door Viewing area : 44.0 by 20.8
 Feed Type and Location : Waveguide, located top side Stirrer: rotating tray/stirrer
 (incl. Rotating tray)
 Door seal Type : Choke Seal Magnetron Type : Sanyo 2M-219H
 Others : N/A

TEST EQUIPMENT USED :

1. Antenna (Horn Antenna)

	<u>Frequency Range</u>	<u>Correction Factor</u>
AILTECH 91888-2	1.0 - 2.0 GHz	21.5 - 22 dB
AILTECH 91889-2	2.0 - 3.6 GHz	20.5 - 21 dB
AILTECH 94613-1	3.6 - 7.6 GHz	37 dB
AILTECH 91891-2	7.3 - 10.0 GHz	39.8 dB

Other Correction Factor

(a) Cable loss

<u>Frequency (MHz)</u>	<u>Cable loss (dB)</u>
2,400	1.1
2,500	1.1
4,900	1.6
7,350	2.2
9,800	2.7

(b) Loss of Band Rejection Filter

<u>Frequency Range (GHz)</u>	<u>Filter loss (dB)</u>
2.0 - 3.6	3.0

2. Field Strength Meter

AILTECH NM-67 (SER 0241-03088)

Last calibrated date : November 20, 1998

Setting : Bandwidth ----- 1 MHz

Function ----- Field Intensity (average value detector)

3. When measuring sidebands close to the fundamental, band reject filter Model 6N45-2450/60 (SER FK837-1) was employed.

REPORT OF MEASUREMENT (MICROWAVE OVEN TEST DATA SHEET B)

FCC ID : AEZM901 MODEL : EM-S8000 DATE : April 14, 1999
 Nominal Frequency : 2,450 MHz TESTED BY : Y.FUKUDA
y. Fukuda

DATA SUMMERY (FCC MEASUREMENT PROCEDURE MP-5)

SAFETY CHECK (at 5 cm) Load : 275 ml/center CALCULATION : $E < 300m > = K * 10^{((A+B+C+D+E)/20)}$

FUNDAMENTAL Load : 1,000 ml/center 0.20 mW/sq.cm
2,450 MHz.

LIMIT = $25 * \sqrt{\text{power}/500}$: 35.4 uV/m

* Note : Location of load for the oven provided with the rotating tray is :
 Contiguous with the shelf circumference.

RADIATION FIELD STRENGTH (uV/m at 300 m)

Load	Location of Load	Emission Frequency (MHz)	Meter Reading (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Filter Loss (dB)	Calcu. Factor (dB)	The Value of K (E<300m>=K*E<3m>)	Max. Field Strength (uV/m at 300m)	Limit (uV/m at 300m)
300	Center	4,897	15.0	37.0	1.6	—	5	0.0100	8.5	35.4
300	* Right/Front Corner	4,895	15.0	37.0	1.6	—	5	0.0100	8.5	35.4
700	Center	4,895	15.0	37.0	1.6	—	5	0.0100	8.5	35.4
700	* Right/Front Corner	4,889	14.0	37.0	1.6	—	5	0.0100	7.6	35.4
300	Center	7,358	23.0	39.8	2.2	—	5	0.0100	31.6	35.4
300	* Right/Front Corner	7,353	23.0	39.8	2.2	—	5	0.0100	31.6	35.4
700	Center	7,350	22.0	39.8	2.2	—	5	0.0100	28.2	35.4
700	* Right/Front Corner	7,343	22.0	39.8	2.2	—	5	0.0100	28.2	35.4
700	Center	9,820	21.0	39.8	2.7	—	5	0.0100	26.6	35.4
700	Center	2,365	32.0	20.8	1.1	3	5	0.0060	7.5	35.4
Emission Sideband 2,400 MHz	Center	2,400	20.0	20.8	1.1	3	5	0.0061	1.9	35.4
Emission Sideband 2,500 MHz	Center	2,500	20.0	20.8	1.1	3	5	0.0064	2.0	35.4

Maximum Frequency Variation 1,000 ml load 2,454 to 2,455 M Hz.
 Total Power Input to Oven 1,680 Watts
 Power Development in dummy load (Thermal Method) 1,000 Watts (IEC705 Test Procedure)
 Supply Voltage AC 120 V 60 Hz
 1830 MHz - 2745 MHz 2.6230 * 10⁽⁻³⁾ * frequency : GHz) -0.0002
 2745 MHz - 3660 MHz 2.1858 * 10⁽⁻³⁾ * frequency : GHz) +0.0010
 3660 MHz - 4575 MHz 1.0929 * 10⁽⁻³⁾ * frequency : GHz) +0.0050
 4575 MHz and above 0.0100

FCC ID : AEZM901

MODEL : EM-S8000

DATE : April 14, 1999

TESTED BY : Y.FUKUDA
Y. Fukuda

Note : In order to convert the measured field strength at 3meters to the field at 300 meters. comply with FCC/OST MP-5 Appendix C "4.6.1 Computations to determine compliance". A calculation factor of 5 dB. this figure is fixed by SANYO. is introduced bfor adjusting a tolerance in measurement.
A calculation factor of 5 dB should be added to "METER READING" as shown in SAMPLE CALCULATION below.

SAMPLE CALUCULATION

(1) 2nd Harmonic with 300 ml/Center load

$$\begin{aligned}\text{Field Strength at 300 m} &= 0.0100 \times 10^{(15.0 + 37 + 1.6 + 5) / 20} \\ &= 8.5 \quad \text{uV/m}\end{aligned}$$

(2) Emission sideband 2.400 M Hz.. 700 ml/Center load

$$\begin{aligned}\text{Field Strength at 300 m} &= 0.0061 \times 10^{(20.0 + 20.8 + 1.1 + 3 + 5) / 20} \\ &= 1.9 \quad \text{uV/m}\end{aligned}$$

REPORT OF MEASUREMENT (MICROWAVE OVEN TEST DATA)
 - Measurement of Frequency VS Line Voltage Stability -

FCC ID : AEZM901 Model : EM-S8000 Date : April 14,1999
 Nominal Frequency : 2,450 MHz Tested by : Y.FUKUDA

Line Voltage Variation [Volt]	Frequency [GHz]	Deviation for ISM Frequency [MHz]	Limit [MHz]
96 (- 20%)	2.454	4	± 50
120 (± 0%)	2.455	5	± 50
150 (+ 25%)	2.454	4	± 50

[Environment]

Temperature : 24.5 °C
 Humidity : 75.0 %

[Sample Calculation]

Frequency : 2.455 GHz

Deviation for ISM Frequencies Calculated as follows,

$$\underline{2.455} - 2.4500 = \underline{0.005} \text{ [GHz]} = \underline{5} \text{ [MHz]}$$

[Summary of Test Results]

Above data shows that the test device ~~do~~ / do not complies with the requirements.