



**Ultratech's
Accreditations:**



3000 Bristol Circle,
Oakville, Ontario,
Canada L6H 6G4

Tel.: (905) 829-1570
Fax.: (905) 829-8050

Website: www.ultratech-labs.com

September 9, 2010

Ultratech Engineering Labs, Inc.
3000 Bristol Circle
Oakville, Ontario
L6H 6G4

Subject: Equipment Authorization under FCC 47 CFR, Parts 2 and 90
(Subpart I) - Non-Broadcast Radio Transceivers Operating in
the Frequency Band 406.1-470 MHz (25 KHz and 12.5 KHz
Channel Spacings).

Applicant: ICOM Incorporated
Product: UHF Mobile Transceiver
Model: IC-F6011
FCC ID: AFJ333501

Dear Sir/Madam,

As appointed agent for **ICOM Incorporated**, we would like to submit the application
to Federal Communications Commission for certification of the above product.
Please review all files uploaded to your electronic filing site.

If you have any queries, please do not hesitate to contact us by our TOLL FREE
number:

OUR TELEPHONE NO.: 1-877-747-6381

Yours truly,

xutianlu

Steven (Xu Tian) Lu
Authorized Agent



**Ultratech's
Accreditations:**



0685

FCC

91038



1309



Approved Test Facility

46390-2049



NVLAP Lab Code 200093-0



SL2-IN-E-1119R



Korea KCC-RRL
CA2049

3000 Bristol Circle,
Oakville, Ontario,
Canada L6H 6G4

Tel.: (905) 829-1570
Fax.: (905) 829-8050

Website: www.ultratech-labs.com

September 9, 2010

Icom America, Inc.
2380 116th Ave. N.E.
Bellevue, Washington
USA, 98004

Attn.: Mr. Masaaki Takahashi

Subject: Certification Testing in accordance with FCC 47 CFR, Parts 2 and 90 (Subpart I) - Non-Broadcast Radio Transceivers Operating in the Frequency Band 406.1-470 MHz (25 KHz and 12.5 KHz Channel Spacings).

Product: UHF Mobile Transceiver
Model: IC-F6011
FCC ID: AFJ333501

Dear Mr. Takahashi,

The product sample has been tested in accordance with **FCC 47 CFR, Parts 2 and 90 (Subpart I) - Non-Broadcast Radio Transceivers Operating in the Frequency Band 406.1-470 MHz (25 KHz and 12.5 KHz Channel Spacings)**, and the results and observation were recorded in the engineering report, Our File No.: ICOM-240F90.


Enclosed you will find copy of the engineering report. If you have any queries, please do not hesitate to contact us.

Yours truly,

Tri Minh Luu, P.Eng
Vice President - Engineering

Encl.

ENGINEERING TEST REPORT



UHF Mobile Transceiver

Model No.: IC-F6011

FCC ID: AFJ333501

Applicant:

ICOM Incorporated
1-1-32, Kamiminami, Hirano-ku
Osaka
Japan, 547-0003

Tested in Accordance With

Federal Communications Commission (FCC)
47 CFR, Parts 2 and 90 (Subpart I)

UltraTech's File No.: ICOM-240F90

This Test report is Issued under the Authority of
Tri M. Luu, Professional Engineer,
Vice President of Engineering
UltraTech Group of Labs

Date: November 9, 2009

Report Prepared by: Steven (Xu Tian) Lu

Issued Date: September 9, 2010

Tested by: Hung Trinh, Technician

Test Dates: August 28 ~ 31, September 1, 2010

- The results in this Test Report apply only to the sample(s) tested, and the sample tested is randomly selected.
- This report must not be used by the client to claim product endorsement by NVLAP or any agency of the US Government.

UltraTech Group of Labs

3000 Bristol Circle, Oakville, Ontario, Canada, L6H 6G4
Tel.: (905) 829-1570 Fax.: (905) 829-8050
Website: www.ultratech-labs.com, Email: vic@ultratech-labs.com, Email: tri@ultratech-labs.com

FCC

91038



1309



46390-2049



NVLAP Lab Code 200093-0



SL2-IN-E-1119R



Korea KCC-RRL
CA2049

TABLE OF CONTENTS

EXHIBIT 1. INTRODUCTION	1
1.1. SCOPE.....	1
1.2. RELATED SUBMITTAL(S)/GRANT(S)	1
1.3. NORMATIVE REFERENCES.....	1
EXHIBIT 2. PERFORMANCE ASSESSMENT.....	2
2.1. CLIENT INFORMATION	2
2.2. EQUIPMENT UNDER TEST (EUT) INFORMATION.....	2
2.3. EUT'S TECHNICAL SPECIFICATIONS	3
2.4. LIST OF EUT'S PORTS.....	4
2.5. GENERAL TEST SETUP	4
EXHIBIT 3. EUT OPERATING CONDITIONS AND CONFIGURATIONS DURING TESTS.....	5
3.1. CLIMATE TEST CONDITIONS	5
3.2. OPERATIONAL TEST CONDITIONS & ARRANGEMENT FOR TEST SIGNALS.....	5
EXHIBIT 4. SUMMARY OF TEST RESULTS	6
4.1. LOCATION OF TESTS	6
4.2. APPLICABILITY & SUMMARY OF EMISSION TEST RESULTS.....	6
4.3. MODIFICATIONS INCORPORATED IN THE EUT FOR COMPLIANCE PURPOSES	6
EXHIBIT 5. TEST DATA.....	7
5.1. RF POWER OUTPUT [§§ 2.1046 & 90.205]	7
5.2. RF EXPOSURE REQUIREMENTS [§§ 1.1310 & 2.1091]	9
5.3. AUDIO FREQUENCY RESPONSE [§§ 2.1047(A) & 90.242(B)(8)]	11
5.4. MODULATION LIMITING [§§ 2.1047 (B) & 90.210]	17
5.5. OCCUPIED BANDWIDTH & EMISSION MASK [§ 2.1049, 90.209 & 90.210]	22
5.6. TRANSMITTER ANTENNA POWER SPURIOUS/HARMONIC CONDUCTED EMISSIONS [§§ 2.1051, 2.1057 & 90.210].....	42
5.7. TRANSMITTER SPURIOUS/HARMONIC RADIATED EMISSIONS [§§ 2.1053, 2.1057 & 90.210]	56
5.8. FREQUENCY STABILITY [§§ 2.1055 & 90.213]	61
5.9. TRANSIENT FREQUENCY BEHAVIOR [§ 90.214]	63
EXHIBIT 6. TEST INSTRUMENTS & MEASUREMENT UNCERTAINTY (K=2, 95% CONFIDENCE LEVEL) 69	
RADIATED EMISSION MEASUREMENT UNCERTAINTY	69
EXHIBIT 7. MEASUREMENT METHODS.....	70
7.1. CONDUCTED POWER MEASUREMENTS.....	70
7.2. RADIATED POWER MEASUREMENTS (ERP & EIRP) USING SUBSTITUTION METHOD	71
7.3. FREQUENCY STABILITY	74
7.4. EMISSION MASK	75
7.5. SPURIOUS EMISSIONS (CONDUCTED)	75
7.6. TRANSIENT FREQUENCY BEHAVIOR	76

EXHIBIT 1. INTRODUCTION

1.1. SCOPE

Reference:	FCC Parts 2 and 90
Title:	Code of Federal Regulations (CFR), Title 47 Telecommunication – Parts 2 & 90
Purpose of Test:	To obtain FCC Certification Authorization for Radio operating in the Frequency Band 406.1-470 MHz (25 KHz and 12.5 KHz Channel Spacing).
Test Procedures:	Both conducted and radiated emissions measurements were conducted in accordance with TIA/EIA Standard TIA/EIA-603 (01-Nov-2002) – Land Mobile FM or PM Communications Equipment Measurement and performance Standards.

1.2. RELATED SUBMITTAL(S)/GRANT(S)

None.

1.3. NORMATIVE REFERENCES

Publication	Year	Title
FCC CFR Parts 0-19, 80-End	2009	Code of Federal Regulations – Telecommunication
ANSI C63.4	2003	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
TIA/EIA 603, Edition C	2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards

EXHIBIT 2. PERFORMANCE ASSESSMENT

2.1. CLIENT INFORMATION

APPLICANT	
Name:	Icom Incorporated
Address:	1-1-32, Kamiminami, Hirano-ku, Osaka Japan, 547-0003
Contact Person:	Mr. Takayuki Watanabe Phone #: +81-66-793-5302 Fax #: +81-66-793-0013 Email Address: export@icom.co.jp

MANUFACTURER	
Name:	Icom Incorporated
Address:	1-1-32, Kamiminami,d Hirano-ku, Osaka Japan, 547-0003
Contact Person:	Mr. Takayuki Watanabe Phone #: +81-66-793-5302 Fax #: +81-66-793-0013 Email Address: export@icom.co.jp

2.2. EQUIPMENT UNDER TEST (EUT) INFORMATION

The following information (with the exception of the Date of Receipt) has been supplied by the applicant.

Brand Name:	ICOM Incorporated
Product Name:	UHF Mobile Transceiver
Model Name or Number:	IC-F6011
Serial Number:	51000005
Type of Equipment:	Licensed Non-Broadcast UHF Transceiver
Power Supply Requirement:	13.6 VDC nominal
Transmitting/Receiving Antenna Type:	Non-integral
Primary User Functions of EUT:	UHF Mobile Transceiver

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: ICOM-240F90

September 9, 2010

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

2.3. EUT'S TECHNICAL SPECIFICATIONS

TRANSMITTER	
Equipment Type:	Mobile
Intended Operating Environment:	Commercial, Industrial or Business
Power Supply Requirement:	13.6 VDC nominal
RF Output Power Rating:	45 Watts (High) / 4.5 Watt (Low)
Operating Frequency Range:	400-470 MHz
RF Output Impedance:	50 Ohms
Channel Spacing:	25 KHz, 12.5 KHz
Occupied Bandwidth (99%):	10.46 kHz (for 25 KHz Channel Spacing) & 5.5 kHz (for 12.5 KHz Channel Spacing)
Emission Designation*:	16K0F3E, 11K0F3E
Antenna Connector Type:	UHF

* For an average case of commercial telephony, the Necessary Bandwidth is calculated as follows:

For FM Voice Modulation:

Channel Spacing = 25 KHz, D = 5 KHz max, K = 1, M = 3 KHz

$B_n = 2M + 2DK = 2(3) + 2(5)(1) = \underline{16 \text{ KHz}}$

Emission designation: 16K0F3E

Channel Spacing = 12.5 KHz, D = 2.5 KHz max, K = 1, M = 3 KHz

$B_n = 2M + 2DK = 2(3) + 2(2.5)(1) = \underline{11 \text{ KHz}}$

Emission designation: 11K0F3E

2.4. LIST OF EUT'S PORTS

Port Number	EUT's Port Description	Number of Identical Ports	Connector Type
1	Antenna Connector	1	UHF type
2	Speaker-Microphone Jack	1	Phone / Mic Jack

2.5. General Test Setup

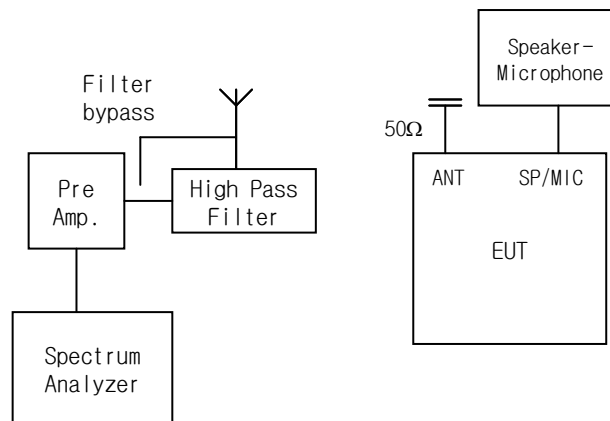


EXHIBIT 3. EUT OPERATING CONDITIONS AND CONFIGURATIONS DURING TESTS

3.1. CLIMATE TEST CONDITIONS

The climate conditions of the test environment are as follows:

Temperature:	21°C
Humidity:	51%
Pressure:	102 kPa
Power Input Source:	13.6 VDC Nominal

3.2. OPERATIONAL TEST CONDITIONS & ARRANGEMENT FOR TEST SIGNALS

Operating Modes:	The transmitter was operated in a continuous transmission mode with the carrier modulated as specified in the Test Data.
Special Test Software:	N/A
Special Hardware Used:	N/A
Transmitter Test Antenna:	The EUT is tested with the antenna port terminated to a 50 Ohms RF Load.

Transmitter Test Signals	
Frequency Band(s):	406.1-470 MHz
Test Frequencies: (Near lowest, near middle & near highest frequencies in the frequency range of operation.)	406.20 MHz, 450.10 MHz, 469.90 MHz
Transmitter Wanted Output Test Signals: Transmitter Power (measured maximum output power): Normal Test Modulation: Modulating signal source:	 45 Watts High and 4.5 Watt Low FM Voice External

EXHIBIT 4. SUMMARY OF TEST RESULTS

4.1. LOCATION OF TESTS

All of the measurements described in this report were performed at UltraTech Group of Labs located in the city of Oakville, Province of Ontario, Canada.

Radiated Emissions were performed at the Ultratech's 3-10 TDK Semi-Anechoic Chamber situated in the Town of Oakville, province of Ontario. This test site been calibrated in accordance with ANSI C63.4, and found to be in compliance with the requirements of Sec. 2.948 of the FCC Rules. The descriptions and site measurement data of the Oakville 3-10 TDK Semi-Anechoic Chamber has been filed with FCC office (FCC File No.: 91038) and Industry Canada office (Industry Canada File No.: 2049A-3). Expiry Date: 2011-05-01.

4.2. APPLICABILITY & SUMMARY OF EMISSION TEST RESULTS

FCC Section(s)	Test Requirements	Applicability (Yes/No)
1.1307, 1.1310, 2.1091 & 2.1093	RF Exposure Limit	Yes
2.1046 & 90.205	RF Power Output	Yes
2.1047(a) & 90.242(b)(8)	Audio Frequency Response	Not applicable to new standard. However, tests are conducted under FCC's recommendation.
2.1047(b) & 90.210	Modulation Limiting	Yes
2.1049, 90.209 & 90.210	Emission Limitation & Emission Mask	Yes
2.1051, 2.1057 & 90.210	Emission Limits - Spurious Emissions at Antenna Terminal	Yes
2.1053, 2.1057 & 90.210	Emission Limits - Field Strength of Spurious Emissions	Yes
2.1055 & 90.213	Frequency Stability	Yes
90.214	Transient Frequency Behavior	Yes
UHF Mobile Transceiver, Model No.: IC-F6011 , by ICOM Incorporated has also been tested and found to comply with FCC Part 15, Subpart B - Radio Receivers and Class B Digital Devices . The engineering test report has been documented and kept on file and it is available upon request.		

4.3. MODIFICATIONS INCORPORATED IN THE EUT FOR COMPLIANCE PURPOSES

None.

4.3.1. DEVIATION OF STANDARD TEST PROCEDURES

None.

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: ICOM-240F90
September 9, 2010

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

EXHIBIT 5. TEST DATA

5.1. RF POWER OUTPUT [§§ 2.1046 & 90.205]


5.1.1. Limits

Please refer to FCC 47 CFR 90.205 for specification details.

5.1.2. Method of Measurements

Refer to Section 7.1 (Conducted) and 7.2 (Radiated) of this report for measurement details

5.1.3. Test Arrangement

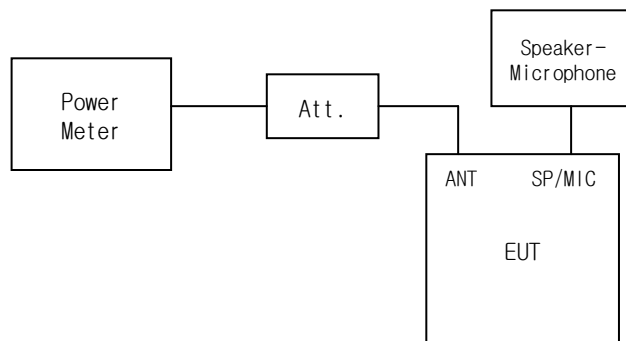

5.1.4. Test Equipment List

Test Instruments	Manufacturer	Model No.	Serial No.	Frequency Range	Calibration Due Date
Power Meter	Hewlett Packard	436A	2347A17246	10 kHz – 50 GHz, sensor dependent	July 09, 2011
Power Sensor	Hewlett Packard	8481A	2702A68983	10 MHz – 18 GHz	July 21, 2011
DC Block	Hewlett Packard	11742A	12460	0.045 – 26.5 GHz	Inhouse calibrated at tests
Attenuator	Weinschell	48-30-34	BM5354	DC - 18 GHz	Inhouse calibrated at tests
DC Power Supply	Hewlett Packard	Harrison 6439B	0K0822	0-60V, 15A	N/A

5.1.5. Test Data

Power Rating: 46.53 dBm (High)

Frequency MHz	Wide/ Narrow	Power Rating Watts	Measured dBm	Measured Watts	Power Rating dBm	Power Margin (dB)
406.20	Narrow	45	46.52	44.87	46.53	-0.01
450.10	Narrow	45	46.56	45.29	46.53	0.03
469.90	Narrow	45	46.42	43.85	46.53	-0.11
406.20	Wide	45	46.52	44.87	46.53	-0.01
450.10	Wide	45	46.56	45.29	46.53	0.03
469.90	Wide	45	46.42	43.85	46.53	-0.11

Power Rating: 36.02 dBm (Low):

Frequency MHz	Wide/ Narrow	Power Rating Watts	Measured dBm	Measured Watts	Power Rating dBm	Power Margin (dB)
406.20	Narrow	4.5	36.66	4.63	36.53	0.13
450.10	Narrow	4.5	36.58	4.55	36.53	0.05
469.90	Narrow	4.5	36.64	4.61	36.53	0.11
406.20	Wide	4.5	36.66	4.63	36.53	0.13
450.10	Wide	4.5	36.58	4.55	36.53	0.05
469.90	Wide	4.5	36.64	4.61	36.53	0.11

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: ICOM-240F90
September 9, 2010

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.2. RF EXPOSURE REQUIREMENTS [§§ 1.1310 & 2.1091]

5.2.1. Limits

§ 1.1310: The criteria listed in the following table shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in 1.1307(b).

LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Average Time (minutes)
(A) Limits for Occupational/Control Exposures				
30-300	61.4	0.163	1.0	6
300-1500	--	--	f/300	6
(B) Limits for General Population/Uncontrolled Exposure				
30-300	27.5	0.073	0.2	30
300-1500	--	--	f/1500	30

Note: f is frequency in MHz

5.2.2. Method of Measurements

Calculation Method of RF Safety Distance:

$$S = \frac{PG}{4\pi \cdot r^2} = \frac{EIRP}{4\pi \cdot r^2}$$

Where,
P: power input to the antenna in mW
EIRP: Equivalent (effective) isotropic radiated power.
S: power density mW/cm²
G: numeric gain of antenna relative to isotropic radiator
r: distance to centre of radiation in cm

$$r = \sqrt{\frac{PG}{4\pi \cdot S}} = \sqrt{\frac{EIRP}{4\pi \cdot S}}$$

FCC radio frequency exposure limits may be exceeded at distances closer than r cm from the antenna of this device.

5.2.3. Evaluation of RF Exposure Compliance Requirements

Maximum RF Power conducted, $P_{\text{conducted}}[\text{dBm}] = 46.53 \text{ dBm}$

Maximum Antenna Gain, $G[\text{dBi}] = 0$

Maximum EIRP, $P_{\text{EIRP}}[\text{dBm}] = 46.53$

User-based time-average for PTT = 50%

MPE Limit for Occupational/Controlled Exposure, $S_{\text{controlled}}[\text{mW/cm}^2] = 406.2/300 = 1.35$

MPE Limit for General Population/Uncontrolled Exposure, $S_{\text{uncontrolled}}[\text{mW/cm}^2] = 406.2/1500 = 0.27$

Calculation of Minimum RF Safety Distance Limits:

Calculated RF Safety Distance for Occupational/Controlled Exposure, $r_{\text{safety_controlled}}[\text{cm}] = 36.4$

Calculated RF Safety Distance for General Population/Uncontrolled Exposure, $r_{\text{safety_uncontrolled}}[\text{cm}] = 81.3$

Results: Manufacturer declares RF Safety Distance of 37 cm for Occupational/Controlled Exposure and 82 cm for General Population/Uncontrolled Exposure which met the FCC Limits. Please refer to Users Manual for details of RF Exposure Information.

5.3. AUDIO FREQUENCY RESPONSE [§§ 2.1047(a) & 90.242(b)(8)]

5.3.1. Limits

§ 2.1047(a): Voice modulated communication equipment. A curve or equivalent data showing the frequency response of the audio modulating circuit over a range of 100 to 5000 Hz shall be submitted. For equipment required to have an audio low-pass filter, a curve showing the frequency response of the filter or of all circuitry installed between the modulation limiter and the modulated stage shall be submitted.


§ 90.242(b)(8): Recommended audio filter attenuation characteristics are given below:

RF Band	Audio band	Minimum Attenuation Rel. to 1 KHz Attenuation
406.1-470 MHz	3 –20 KHz 20 – 30 KHz	$60 \log_{10}(f/3)$ dB where f is in KHz 50dB

5.3.2. Method of Measurements

The rated audio input signal was applied to the input of the audio low-pass filter (or of all modulation stages) using an audio oscillator, this input signal level and its corresponding output signal were then measured and recorded using the FFT Digital Spectrum Analyzer. Tests were repeated at different audio signal frequencies from 0 to 50 KHz.

5.3.3. Test Arrangement

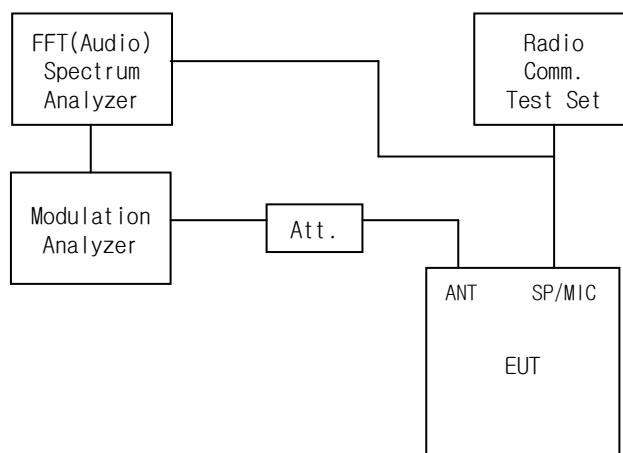

5.3.4. Test Equipment List

Test Instruments	Manufacturer	Model No.	Serial No.	Frequency Range	Calibration Due Date
Modulation Analyzer	Hewlett Packard	8910B	3226A04606	150 kHz – 1300 MHz	Dec 09, 2010
RF Communications Test Set	Hewlett Packard	8920B	US39064699	250 kHz – 1 GHz	Oct 26, 2010
FFT (audio) EMI Receiver	Advantest	R9211E	82020336	10 mHz – 100 kHz, 1 MHz Input Impedance	Oct 26, 2010
DC Block	Hewlett Packard	11742A	12460	0.045 – 26.5 GHz	Inhouse calibrated at tests
Attenuator	Weinschel	48-30-34	BM5354	DC - 18 GHz	Inhouse calibrated at tests
DC Power Supply	Tenma Laboratory	72-6153	0001526	0-18V, 10A	N/A

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: ICOM-240F90

September 9, 2010


All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.3.5. Test Data

5.3.5.1. 12.5 KHz Channel Spacing, F3E, Frequency of All Modulation States

Note: Due to the difficulty of measuring the Frequency Response of the internal low-pass filter, the Frequency Response of All Modulation States is performed to show the roll-off at 3 KHz in comparison with the recommended audio filter attenuation.

Frequency (KHz)	Audio In (dBV)	Audio Out (dBV)	Attenuation (Out - In) (dB)	Attenuation Rel. to 3 KHz (dB)	Recommended Attenuation (dB)
0.1	-75.79	-30.26	45.5	-36.9	--
0.2	-75.79	-18.84	57.0	-25.5	--
0.4	-75.79	-5.29	70.5	-12.0	--
0.6	-75.79	0.23	76.0	-6.4	--
0.8	-75.79	4.09	79.9	-2.6	--
1.0	-75.79	6.68	82.5	0.0	--
1.5	-75.79	8.75	84.5	2.1	--
2.0	-75.79	8.59	84.4	1.9	--
2.5	-75.79	7.13	82.9	0.5	--
3.0	-75.79	5.35	81.1	-1.3	0
3.5	-75.79	2.00	77.8	-4.7	-4
4.0	-75.79	-2.61	73.2	-9.3	-7
4.5	-75.79	-8.42	67.4	-15.1	-11
5.0	-75.79	-14.06	61.7	-20.7	-13
6.0	-75.79	-22.69	53.1	-29.4	-18
7.0	-75.79	-30.61	45.2	-37.3	-22
8.0	-75.79	-38.96	36.8	-45.6	-26
9.0	-75.79	-60.00	15.8	-66.7	-29
10.0	-75.79	-60.00	15.8	-66.7	-31
12.0	-75.79	-60.00	15.8	-66.7	-36
14.0	-75.79	-60.00	15.8	-66.7	-40
16.0	-75.79	-60.00	15.8	-66.7	-44
18.0	-75.79	-60.00	15.8	-66.7	-47
20.0	-75.79	-60.00	15.8	-66.7	-50
25.0	-75.79	-60.00	15.8	-66.7	-50
30.0	-75.79	-60.00	15.8	-66.7	-50
35.0	-75.79	-60.00	15.8	-66.7	-50
40.0	-75.79	-60.00	15.8	-66.7	-50
45.0	-75.79	-60.00	15.8	-66.7	-50
50.0	-75.79	-60.00	15.8	-66.7	-50

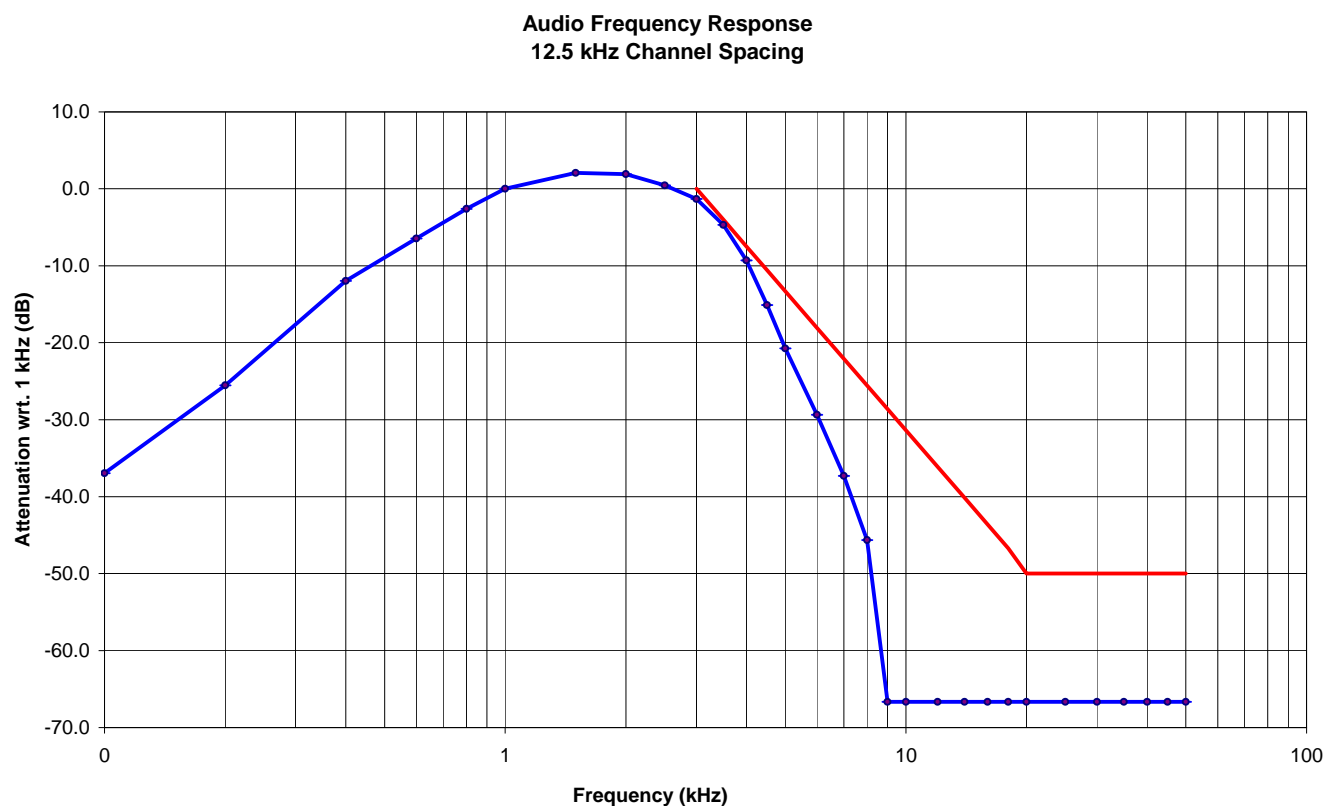

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: yic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: ICOM-240F90

September 9, 2010

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.3.5.2. 25 KHz Channel Spacing, F3E, Frequency of All Modulation States*

Note: Due to the difficulty of measuring the Frequency Response of the internal low-pass filter, the Frequency Response of All Modulation States is performed to show the roll-off at 3 KHz in comparison with the recommended audio filter attenuation.

Frequency (KHz)	Audio In (dBV)	Audio Out (dBV)	Attenuation (Out - In) (dB)	Attenuation Rel. to 3 KHz (dB)	Recommended Attenuation (dB)
0.1	-75.50	-36.46	39.0	-36.0	--
0.2	-75.50	-24.35	51.2	-23.9	--
0.4	-75.50	-11.86	63.6	-11.4	--
0.6	-75.50	-6.45	69.1	-6.0	--
0.8	-75.50	-2.74	72.8	-2.3	--
1.0	-75.50	-0.49	75.0	0.0	--
1.5	-75.50	2.43	77.9	2.9	--
2.0	-75.50	1.81	77.3	2.3	--
2.5	-75.50	-0.27	75.2	0.2	--
3.0	-75.50	-2.51	73.0	-2.0	0
3.5	-75.50	-6.44	69.1	-6.0	-4
4.0	-75.50	-13.51	62.0	-13.0	-7
4.5	-75.50	-20.97	54.5	-20.5	-11
5.0	-75.50	-25.87	49.6	-25.4	-13
6.0	-75.50	-35.11	40.4	-34.6	-18
7.0	-75.50	-60.00	15.5	-59.5	-22
8.0	-75.50	-60.00	15.5	-59.5	-26
9.0	-75.50	-60.00	15.5	-59.5	-29
10.0	-75.50	-60.00	15.5	-59.5	-31
12.0	-75.50	-60.00	15.5	-59.5	-36
14.0	-75.50	-60.00	15.5	-59.5	-40
16.0	-75.50	-60.00	15.5	-59.5	-44
18.0	-75.50	-60.00	15.5	-59.5	-47
20.0	-75.50	-60.00	15.5	-59.5	-50
25.0	-75.50	-60.00	15.5	-59.5	-50
30.0	-75.50	-60.00	15.5	-59.5	-50
35.0	-75.50	-60.00	15.5	-59.5	-50
40.0	-75.50	-60.00	15.5	-59.5	-50
45.0	-75.50	-60.00	15.5	-59.5	-50
50.0	-75.50	-60.00	15.5	-59.5	-50


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: ICOM-240F90

September 9, 2010

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

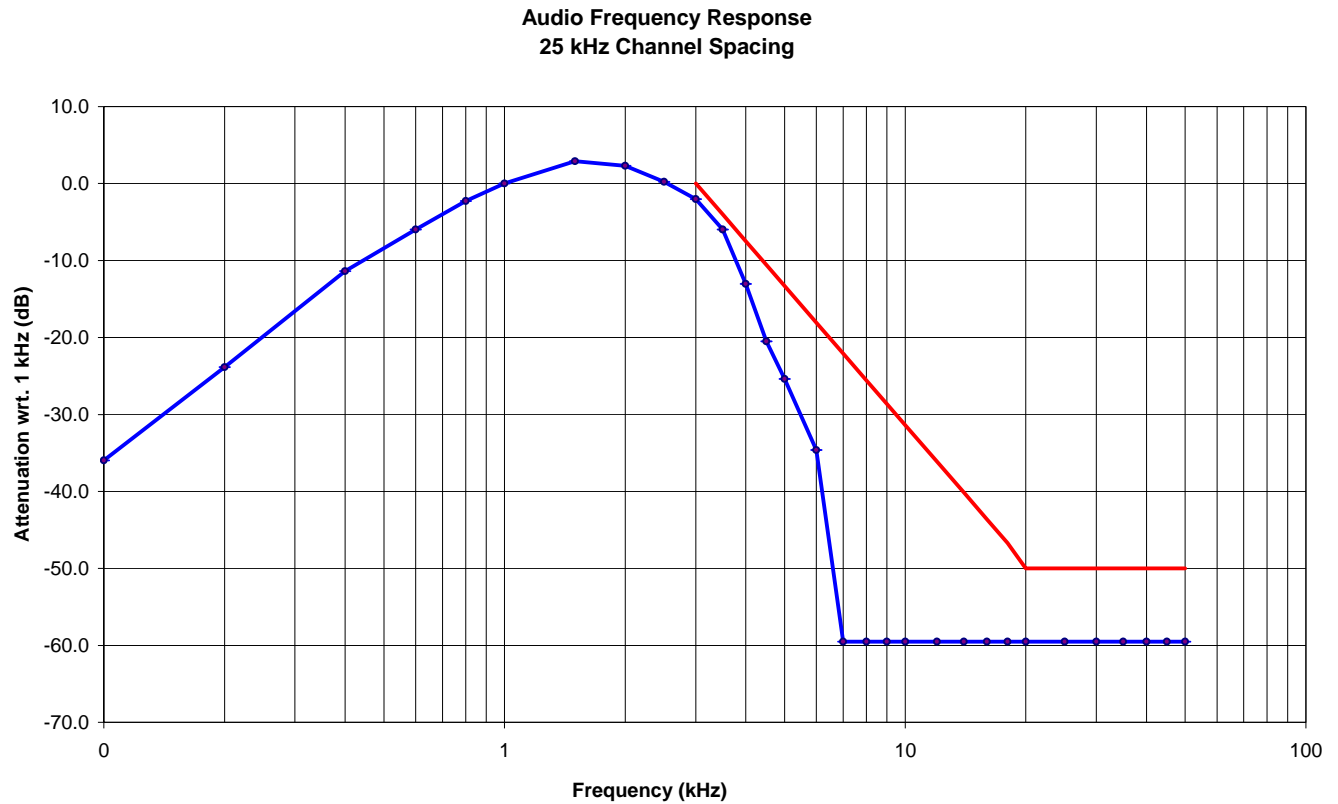

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: yic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: ICOM-240F90

September 9, 2010

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.4. MODULATION LIMITING [§§ 2.1047 (b) & 90.210]

5.4.1. Limits

§ 2.1047(b): Equipment which employs modulation limiting. A curve or family of curves showing the percentage of modulation versus the modulation input voltage shall be supplied. The information submitted shall be sufficient to show modulation limiting capability throughout the range of modulating frequencies and input modulating signal levels employed.

Recommended frequency deviation characteristics are given below:


- 2.5 KHz for 12.5 KHz Channel Spacing System
- 5 KHz for 25 KHz Channel Spacing System

5.4.2. Method of Measurements

For Audio Transmitter: The carrier frequency deviation was measured with the tone input signal level varied from 0 Vp to audio input rating level plus 16 dB at frequencies 0.1, 0.5, 1.0, 3.0 and 5.0 KHz. The maximum deviation was recorded at each test condition.

For Data Transmitter with Maximum Frequency Deviation set by Factory: The EUT was set at maximum frequency deviation, and its peak frequency deviation was then measured using EUT's internal random data source.

5.4.3. Test Arrangement

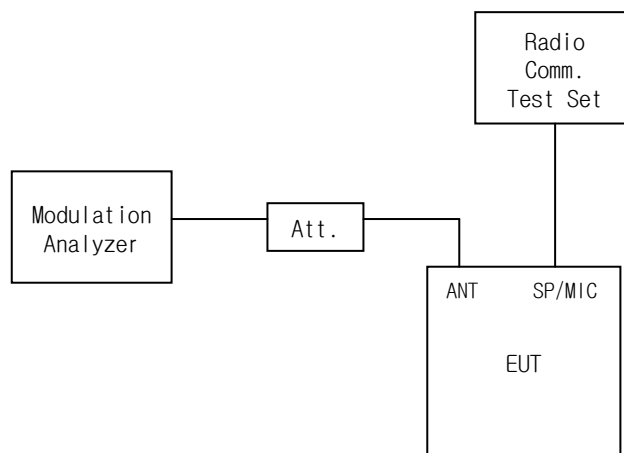

5.4.4. Test Equipment List

Test Instruments	Manufacturer	Model No.	Serial No.	Frequency Range	Calibration Due Date
Modulation Analyzer	Hewlett Packard	8910B	3226A04606	150 kHz – 1300 MHz	Dec 09, 2010
RF Communications Test Set	Hewlett Packard	8920B	US39064699	250 kHz – 1 GHz	Oct 26, 2010
DC Block	Hewlett Packard	11742A	12460	0.045 – 26.5 GHz	Inhouse calibrated at tests
Attenuator	Weinschel	48-30-34	BM5354	DC - 18 GHz	Inhouse calibrated at tests
DC Power Supply	Tenma Laboratory	72-6153	0001526	0-18V, 10A	N/A

5.4.5. Test Data

5.4.5.1. Voice Modulation Limiting for 12.5 KHz Channel Spacing Operation

MODULATING SIGNAL LEVEL	PEAK FREQUENCY DEVIATION (KHz) at the following modulating frequency:					MAXIMUM LIMIT
(mVrms)	0.1 KHz	0.5 KHz	1.0 KHz	3.0 KHz	5.0 KHz	(KHz)
2	0.11	0.36	0.76	1.08	0.13	2.5
4	0.11	0.65	1.44	1.08	0.17	2.5
6	0.12	0.91	1.89	1.08	0.21	2.5
8	0.13	1.19	1.97	1.08	0.21	2.5
10	0.14	1.44	1.97	1.08	0.21	2.5
15	0.16	1.76	1.99	1.08	0.21	2.5
20	0.19	1.94	1.99	1.08	0.21	2.5
25	0.19	1.98	2.01	1.08	0.21	2.5
30	0.21	1.98	2.01	1.08	0.21	2.5
35	0.25	2.01	2.01	1.08	0.21	2.5
40	0.25	2.01	2.01	1.08	0.21	2.5
45	0.28	2.01	2.01	1.08	0.21	2.5
50	0.29	2.01	2.01	1.08	0.21	2.5
55	0.31	2.01	2.01	1.08	0.21	2.5
60	0.32	2.01	2.01	1.08	0.21	2.5
65	0.34	2.01	2.01	1.08	0.21	2.5
70	0.39	2.01	2.01	1.08	0.21	2.5
75	0.41	2.01	2.01	1.08	0.21	2.5

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: ICOM-240F90
September 9, 2010

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Voice Signal Input Level = STD MOD Level + 16 dB
= 22.48 dB(mVrms) + 16 dB
= 38.48 dB(mVrms)
= 83.92 mVrms

Modulation Frequency (KHz)	Peak Deviation (KHz)	Maximum Limit (KHz)
0.1	0.20	2.5
0.2	0.65	2.5
0.4	1.82	2.5
0.6	1.98	2.5
0.8	2.02	2.5
1.0	2.02	2.5
1.2	1.97	2.5
1.4	1.97	2.5
1.6	2.01	2.5
1.8	1.98	2.5
2.0	1.84	2.5
2.5	1.42	2.5
3.0	1.08	2.5
3.5	0.81	2.5
4.0	0.46	2.5
4.5	0.29	2.5
5.0	0.21	2.5
6.0	0.12	2.5
7.0	0.10	2.5
8.0	0.09	2.5
9.0	0.08	2.5
10.0	0.08	2.5

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: yic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: ICOM-240F90

September 9, 2010

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.4.5.2. Voice Modulation Limiting for 25 KHz Channel Spacing Operation

MODULATING SIGNAL LEVEL	PEAK FREQUENCY DEVIATION (KHz) at the following modulating frequency:					MAXIMUM LIMIT
(mVrms)	0.1 KHz	0.5 KHz	1.0 KHz	3.0 KHz	5.0 KHz	(KHz)
2	0.10	0.65	1.46	2.02	0.39	5
4	0.21	1.12	2.69	2.62	0.39	5
6	0.23	1.60	3.69	2.62	0.48	5
8	0.23	2.14	3.83	2.62	0.52	5
10	0.25	2.56	3.86	2.62	0.52	5
15	0.28	3.17	3.89	2.62	0.52	5
20	0.32	3.85	3.90	2.62	0.52	5
25	0.33	3.92	3.90	2.62	0.52	5
30	0.38	3.93	3.91	2.62	0.52	5
35	0.42	3.95	3.92	2.62	0.52	5
40	0.49	3.93	3.92	2.62	0.52	5
45	0.52	3.96	3.92	2.62	0.52	5
50	0.54	3.97	3.92	2.62	0.52	5
55	0.56	3.97	3.92	2.62	0.52	5
60	0.60	3.97	3.92	2.62	0.52	5
65	0.67	3.97	3.92	2.62	0.52	5
70	0.67	3.97	3.92	2.62	0.52	5
75	0.71	3.97	3.92	2.62	0.52	5

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: ICOM-240F90

September 9, 2010

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Voice Signal Input Level = STD MOD Level + 16 dB
= 23.23 dB(mVrms) + 16 dB
= 39.23 dB(mVrms)
= 91.49 mVrms

Modulation Frequency (KHz)	Peak Deviation (KHz)	Maximum Limit (KHz)
0.1	0.35	5.0
0.2	1.26	5.0
0.4	3.84	5.0
0.6	3.87	5.0
0.8	3.91	5.0
1.0	3.86	5.0
1.2	3.83	5.0
1.4	3.86	5.0
1.6	3.92	5.0
1.8	3.96	5.0
2.0	3.85	5.0
2.5	3.21	5.0
3.0	2.59	5.0
3.5	2.06	5.0
4.0	1.22	5.0
4.5	0.75	5.0
5.0	0.51	5.0
6.0	0.26	5.0
7.0	0.17	5.0
8.0	0.13	5.0
9.0	0.13	5.0
10.0	0.13	5.0

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: yic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: ICOM-240F90

September 9, 2010

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.5. OCCUPIED BANDWIDTH & EMISSION MASK [§ 2.1049, 90.209 & 90.210]

5.5.1. Limits


Emissions shall be attenuated below the mean output power of the transmitter as follows:

Frequency Range (MHz)	Maximum Authorized BW (KHz)	Channel Spacing (KHz)	Recommended Frequency Deviation (KHz)	FCC Applicable Mask
150-174, 421-512	20.0	25	5.0	Mask B – Voice Mask C – Data
156-174, 421-512	11.25	12.5	2.5	Mask D – Voice & Data

5.5.2. Method of Measurements

Refer to Section 7.4 of this report for measurement details and TIA-102.CAAA-B.

5.5.3. Test Arrangement

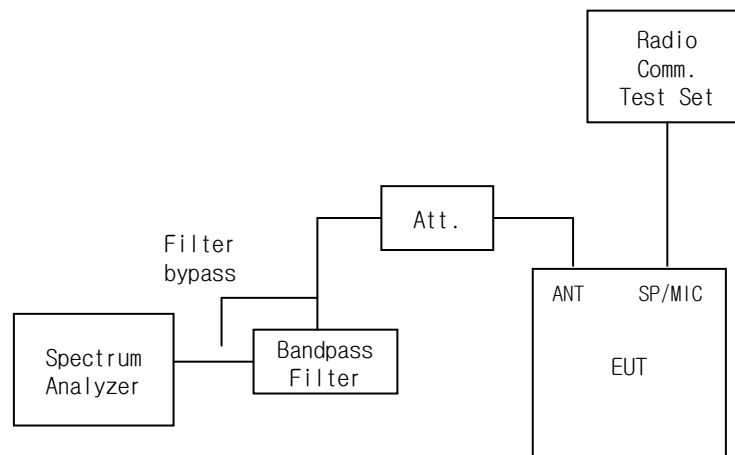

5.5.4. Test Equipment List

Test Instruments	Manufacturer	Model No.	Serial No.	Frequency Range	Calibration Due Date
Spectrum Analyzer	Rohde & Schwarz	FSEK30	100077	20 Hz – 40 GHz	Aug 14, 2011
RF Communications Test Set	Hewlett Packard	8920B	US39064699	250 kHz – 1 GHz	Oct 26, 2010
DC Block	Hewlett Packard	11742A	12460	0.045 – 26.5 GHz	Inhouse calibrated at tests
Attenuator	Weinschell	48-30-34	BM5354	DC - 18 GHz	Inhouse calibrated at tests
DC Power Supply	Hewlett Packard	Harrison 6439B	0K0822	0-60V, 15A	N/A

5.5.5. Test Data

5.5.5.1. 99% Occupied Bandwidth

Frequency (MHz)	Channel Spacing (KHz)	Modulation	*Measured 99% OBW at Maximum Freq. Deviation (KHz)	Maximum Authorized Bandwidth (KHz)
406.2	25.0	FM with 2.5 KHz sine wave signal	10.34	20.0
450.1	25.0	FM with 2.5 KHz sine wave signal	10.41	20.0
469.9	25.0	FM with 2.5 KHz sine wave signal	10.46	20.0
406.2	12.5	FM with 2.5 KHz sine wave signal	5.47	11.25
450.1	12.5	FM with 2.5 KHz sine wave signal	5.47	11.25
469.9	12.5	FM with 2.5 KHz sine wave signal	5.50	11.25

Note: 99% Occupied Bandwidth measurements were done using the built-in auto function of the analyzer.

*Refer to the following test data plots (1 through 6) for details.

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: yic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: ICOM-240F90
September 9, 2010

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot # 1.:

File No.:	ICOM-240Q
Client:	Icom America
Product Description:	UHF Mobile Transceivers
Model(s):	IC-F6011
Test (specified rules):	FCC 90.209 & RSS-119 (5.5) 99% Occupied Bandwidth
Date:	August 29, 2010
Tested by: Name	Hung Trinh
Deviation:	None
Comment(s):	Ch Spacing: 25kHz, Carrier Freq: 406.2 MHz with F3E 2.5 kHz Sine Wave

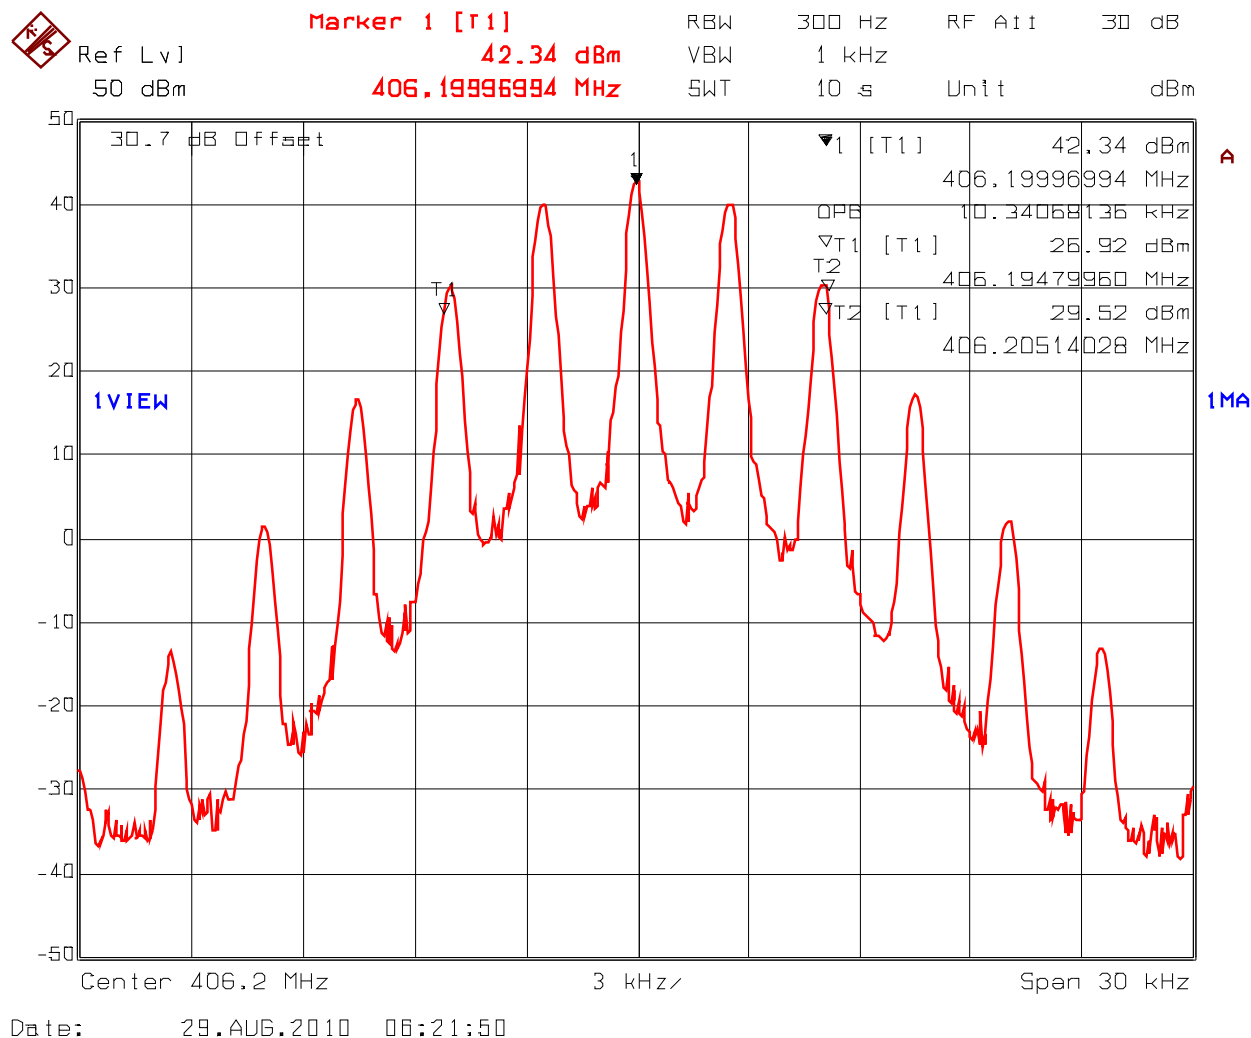

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: ICOM-240F90
 September 9, 2010

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot # 2.:

File No.:	ICOM-240Q
Client:	Icom America
Product Description:	UHF Mobile Transceivers
Model(s):	IC-F6011
Test (specified rules):	FCC 90.209 & RSS-119 (5.5) 99% Occupied Bandwidth
Date:	August 29, 2010
Tested by: Name	Hung Trinh
Deviation:	None
Comment(s):	Ch. Spacing: 25kHz, Carrier Freq.: 450.1 MHz with F3E 2.5 kHz Sine Wave

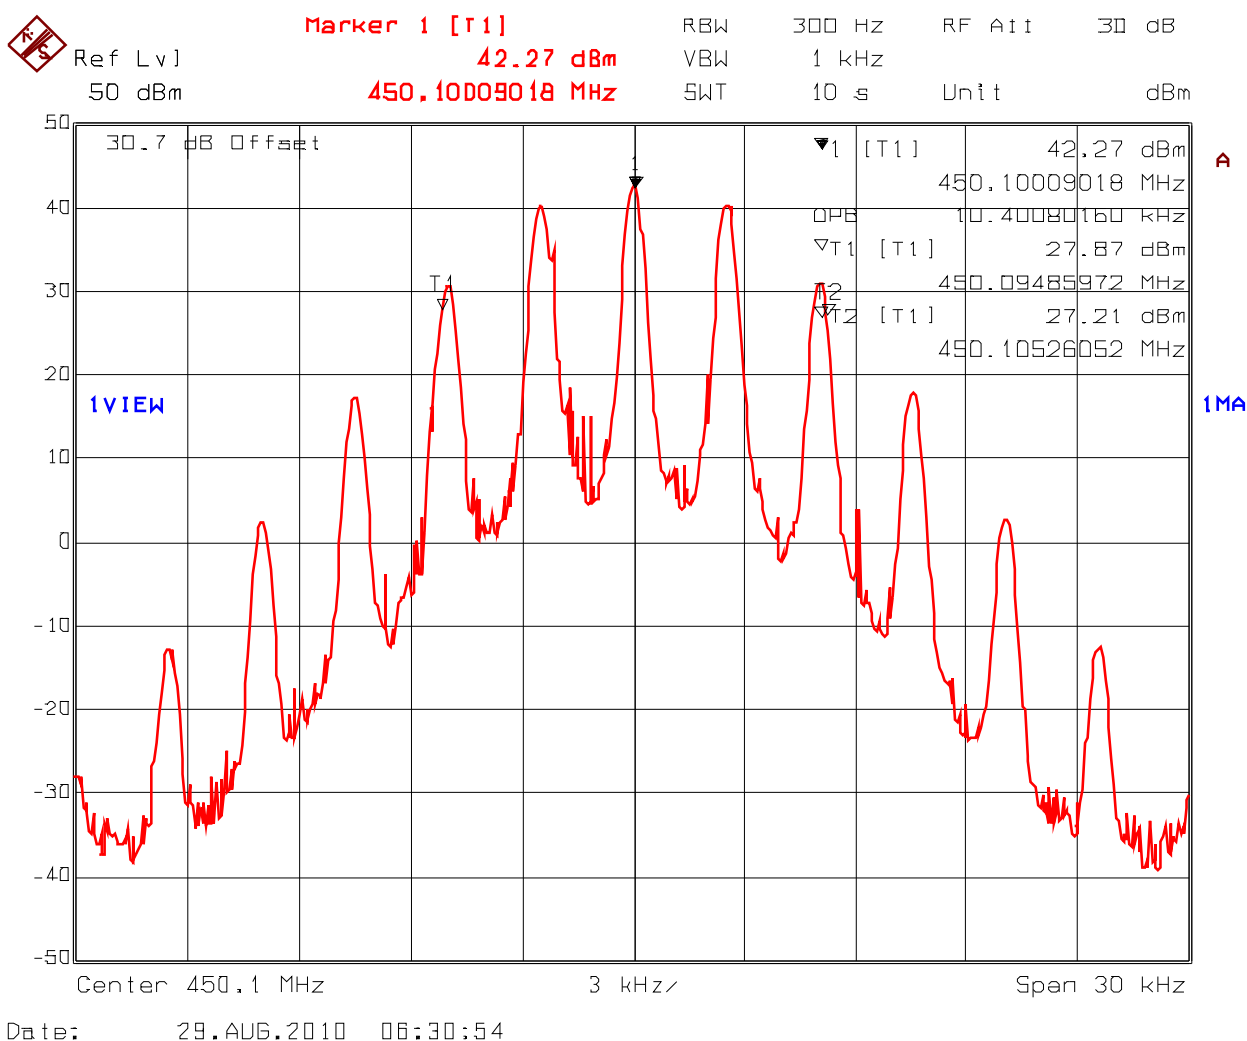

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: yic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: ICOM-240F90
September 9, 2010

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot # 3.:

File No.:	ICOM-240Q
Client:	Icom America
Product Description:	UHF Mobile Transceivers
Model(s):	IC-F6011
Test (specified rules):	FCC 90.209 & RSS-119 (5.5) 99% Occupied Bandwidth
Date:	August 29, 2010
Tested by: Name	Hung Trinh
Deviation:	None
Comment(s):	Ch. Spacing: 25 KHz, Carrier Freq.: 469.9 MHz with F3E 2.5 kHz Sine Wave

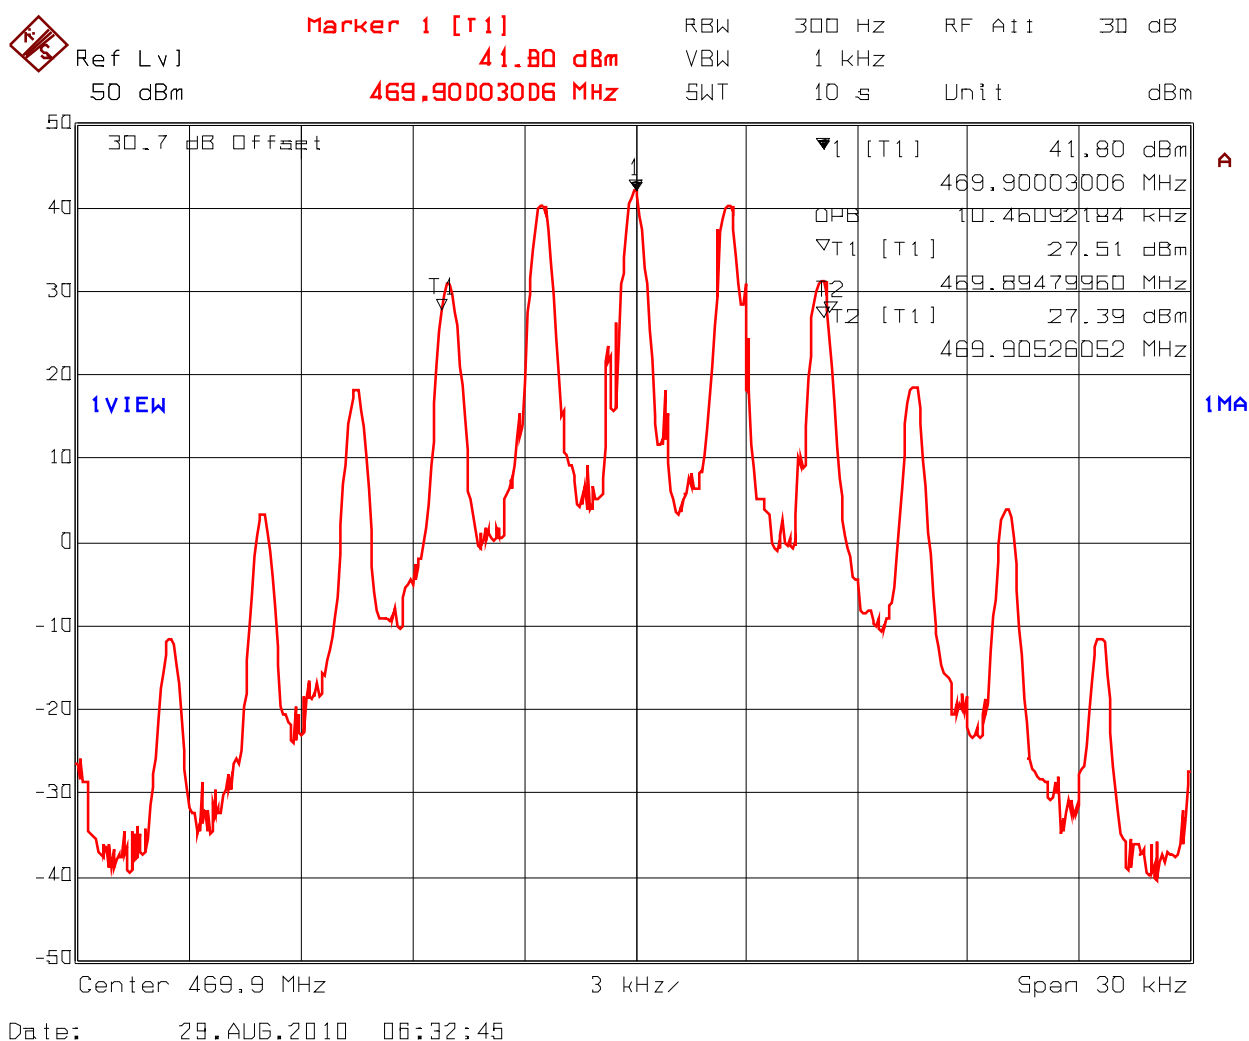

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: yic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: ICOM-240F90
September 9, 2010

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot # 4.:

File No.:	ICOM-240Q
Client:	Icom America
Product Description:	UHF Mobile Transceivers
Model(s):	IC-F6011
Test (specified rules):	FCC 90.209 & RSS-119 (5.5) 99% Occupied Bandwidth
Date:	August 29, 2010
Tested by: Name	Hung Trinh
Deviation:	None
Comment(s):	Ch. Spacing: 12.5 KHz, Carrier Freq.: 406.2 MHz with F3E 2.5 kHz Sine Wave

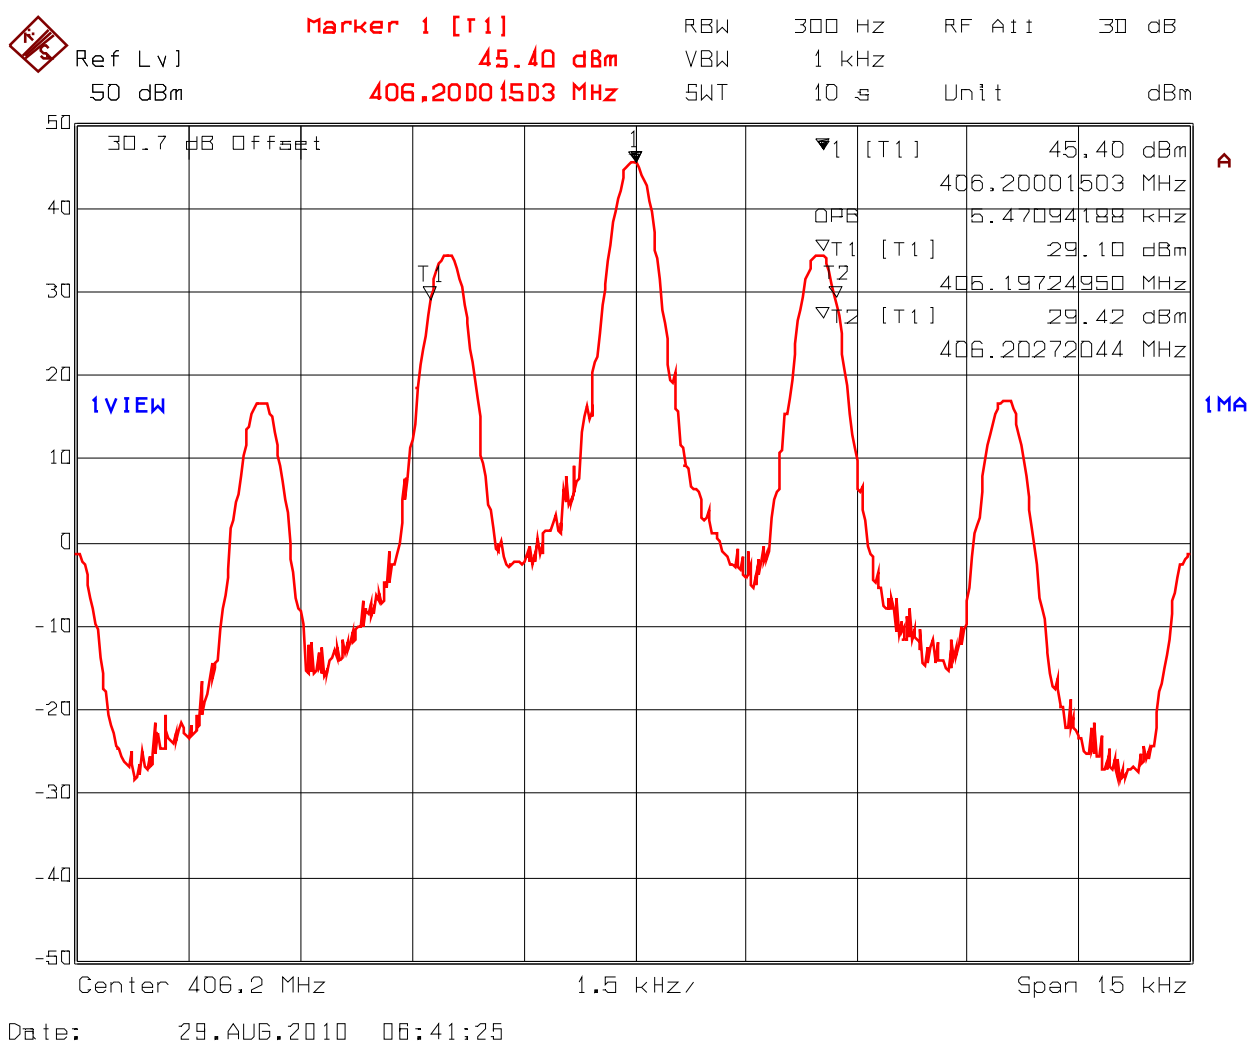

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: ICOM-240F90
September 9, 2010

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot # 5.:

File No.:	ICOM-240Q
Client:	Icom America
Product Description:	UHF Mobile Transceivers
Model(s):	IC-F6011
Test (specified rules):	FCC 90.209 & RSS-119 (5.5) 99% Occupied Bandwidth
Date:	August 29, 2010
Tested by: Name	Hung Trinh
Deviation:	None
Comment(s):	Ch. Spacing: 12.5 KHz, Carrier Freq.: 450.1 MHz with F3E 2.5 kHz Sine Wave

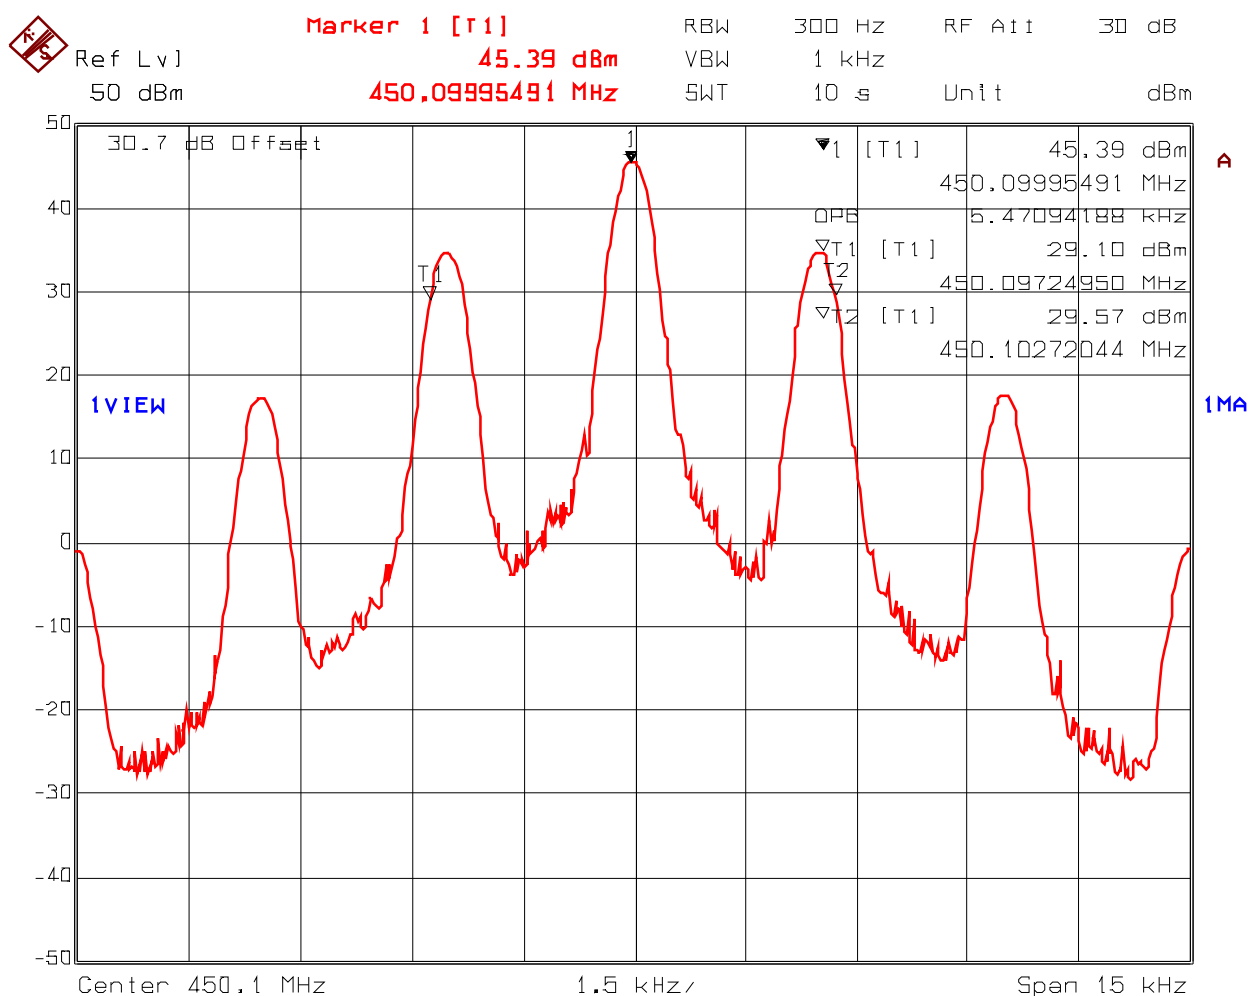

Date: 29.AUG.2010 06:43:24

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: ICOM-240F90
September 9, 2010

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot # 6.:

File No.:	ICOM-240Q
Client:	Icom America
Product Description:	UHF Mobile Transceivers
Model(s):	IC-F6011
Test (specified rules):	FCC 90.209 & RSS-119 (5.5) 99% Occupied Bandwidth
Date:	August 29, 2010
Tested by: Name	Hung Trinh
Deviation:	None
Comment(s):	Ch. Spacing: 12.5 KHz, Carrier Freq.: 469.9 MHz with F3E 2.5 kHz Sine Wave

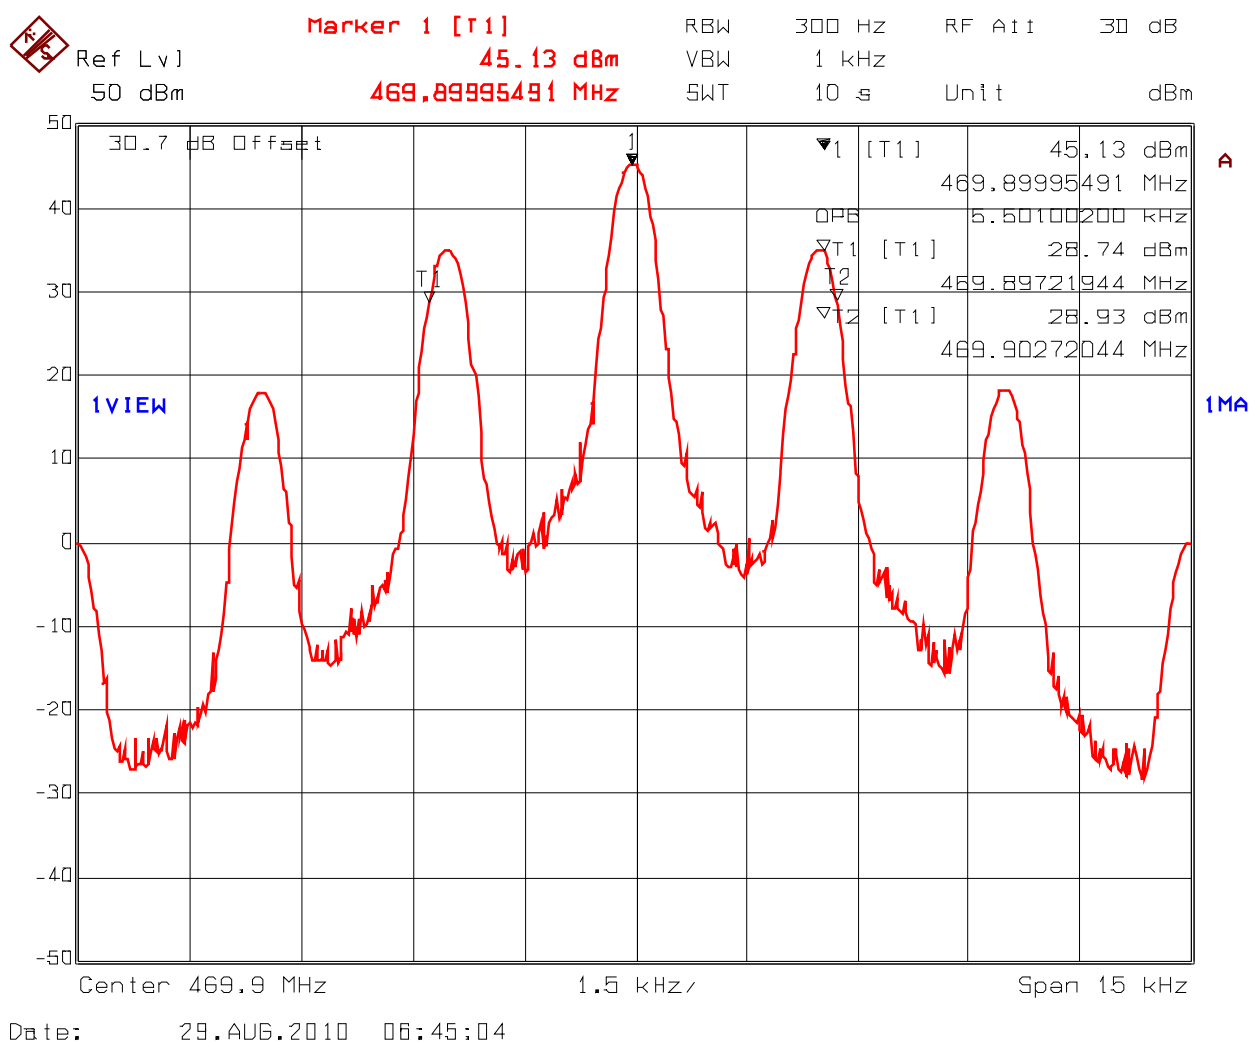

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: ICOM-240F90
September 9, 2010

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot # 7.:

File No.:	ICOM-240Q
Client:	Icom America
Product Description:	UHF Mobile Transceivers
Model(s):	IC-F6011
Test (specified rules):	FCC 90.221 & RSS-119 (5.5) Emissions Mask B
Date:	August 29, 2010
Tested by: Name	Hung Trinh
Deviation:	None
Comment(s):	Power: high, CH. Spacing: 25 KHz, Carrier Freq.: 406.2 MHz with F3E 2.5 kHz Sine Wave

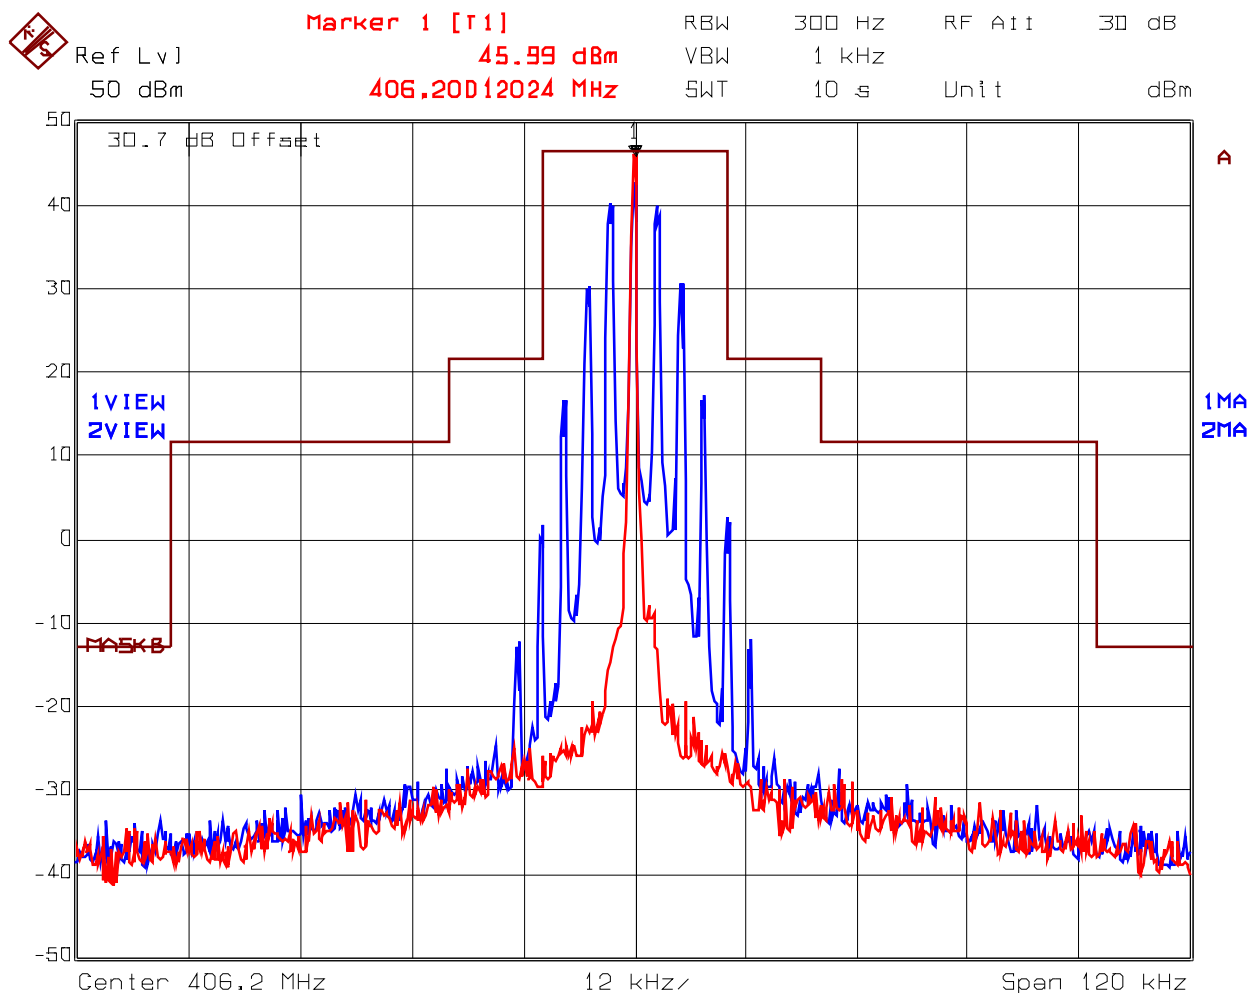

Date: 29.AUG.2010 08:20:49

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: yic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: ICOM-240F90
September 9, 2010

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot # 8.:

File No.:	ICOM-240Q
Client:	Icom America
Product Description:	UHF Mobile Transceivers
Model(s):	IC-F6011
Test (specified rules):	FCC 90.221 & RSS-119 (5.5) Emissions Mask B
Date:	August 29, 2010
Tested by: Name	Hung Trinh
Deviation:	None
Comment(s):	Power: high, CH. Spacing: 25 KHz, Carrier Freq.: 450.1 MHz with F3E 2.5 kHz Sine Wave

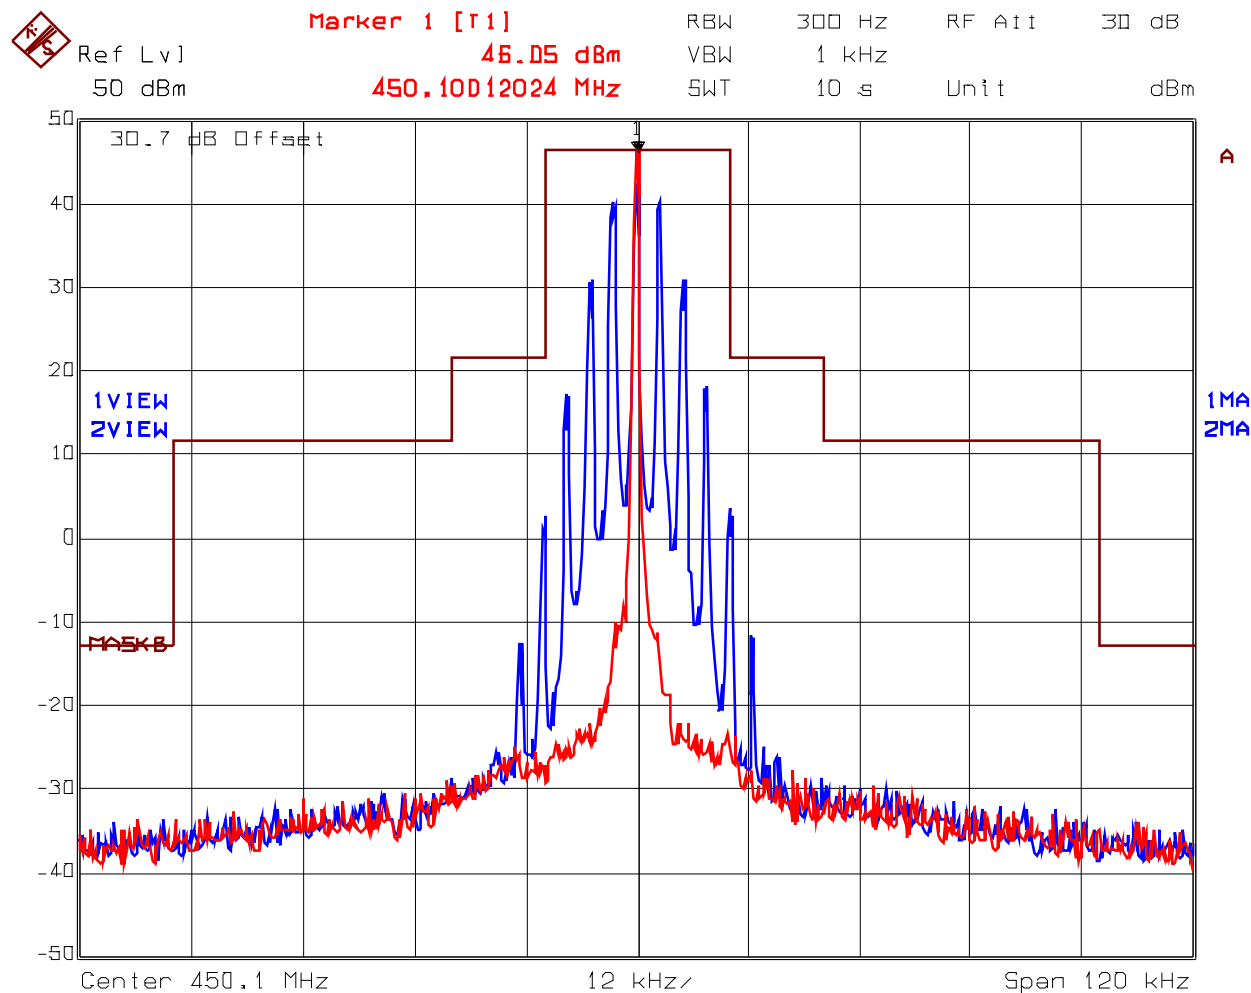

Date: 29.AUG.2010 08:23:44

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: ICOM-240F90
September 9, 2010

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot # 9.:

File No.:	ICOM-240Q
Client:	Icom America
Product Description:	UHF Mobile Transceivers
Model(s):	IC-F6011
Test (specified rules):	FCC 90.221 & RSS-119 (5.5) Emissions Mask B
Date:	August 29, 2010
Tested by: Name	Hung Trinh
Deviation:	None
Comment(s):	Power: high, CH. Spacing: 25 KHz, Carrier Freq.: 469.9 MHz with F3E 2.5 kHz Sine Wave

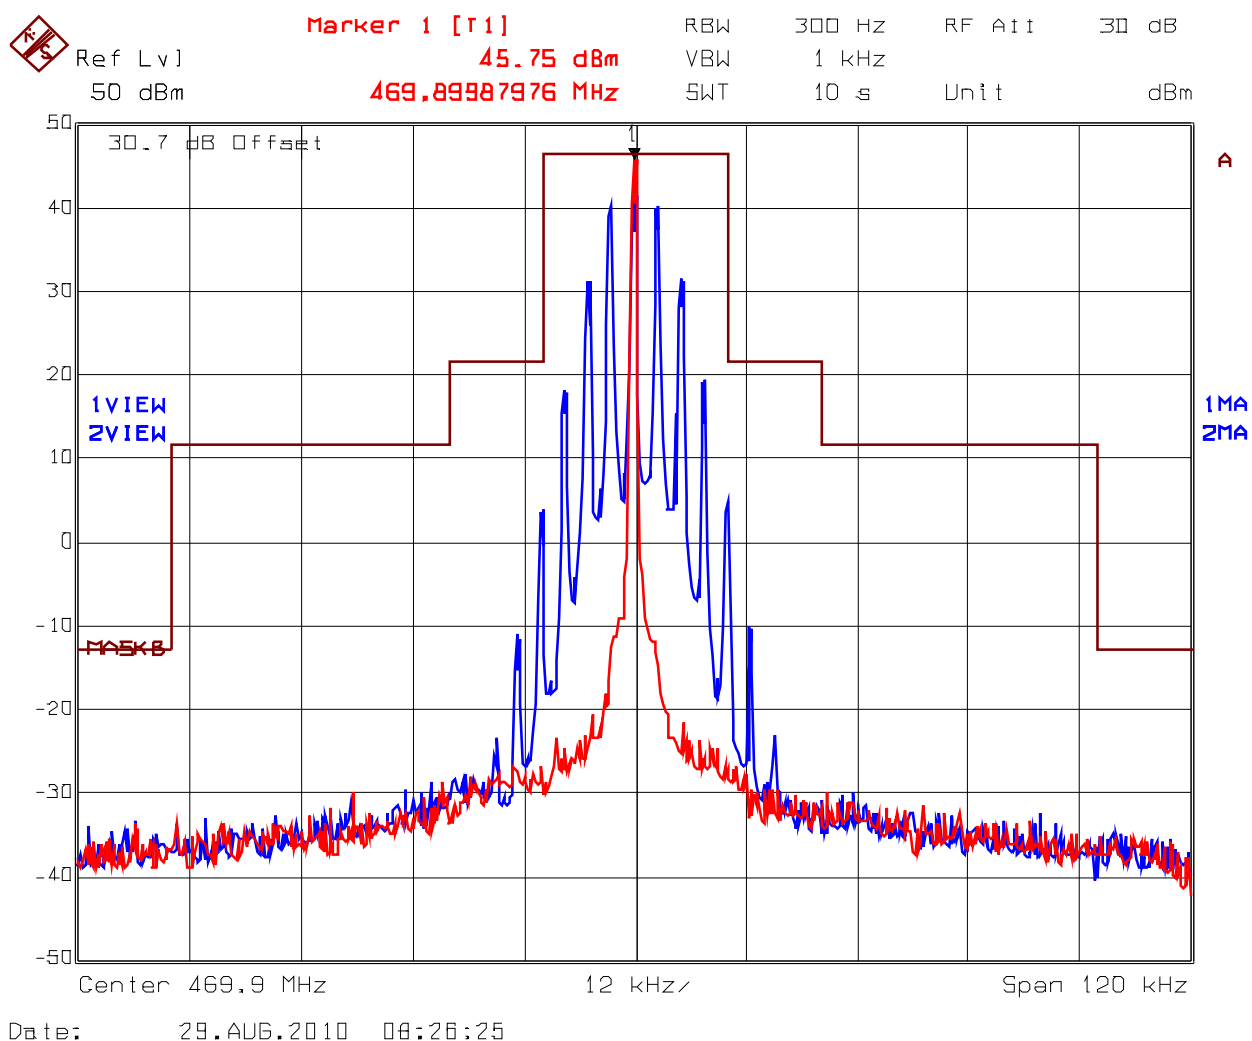

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: yic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: ICOM-240F90
September 9, 2010

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot # 10.:

File No.:	ICOM-240Q
Client:	Icom America
Product Description:	UHF Mobile Transceivers
Model(s):	IC-F6011
Test (specified rules):	FCC 90.221 & RSS-119 (5.5) Emissions Mask B
Date:	August 29, 2010
Tested by: Name	Hung Trinh
Deviation:	None
Comment(s):	Power: low, CH. Spacing: 25 KHz, Carrier Freq.: 406.2 MHz with F3E 2.5 kHz Sine Wave

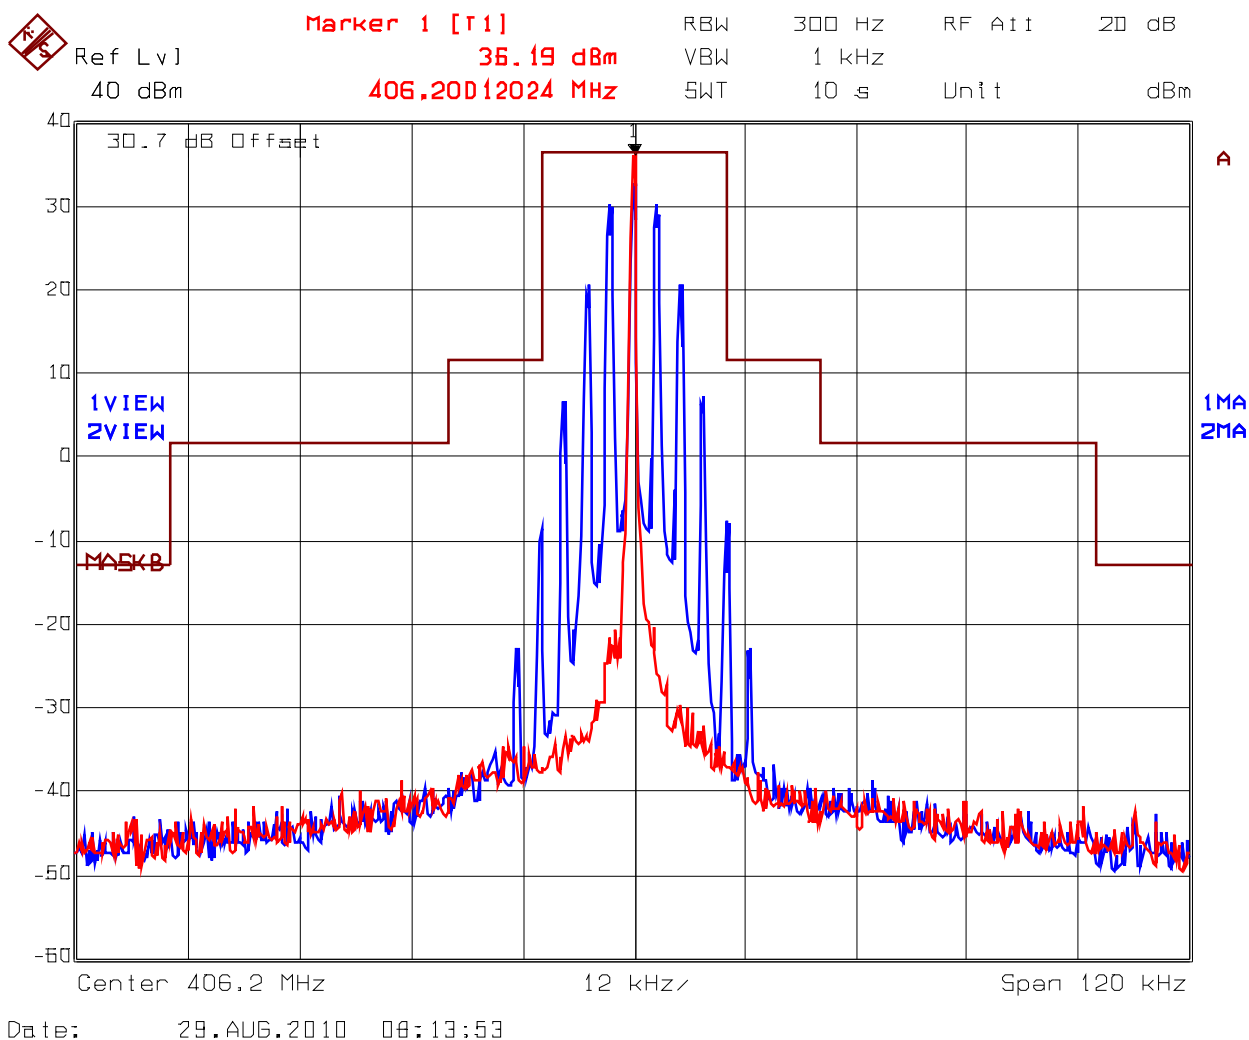

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: yic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: ICOM-240F90
 September 9, 2010

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot # 11.:

File No.:	ICOM-240Q
Client:	Icom America
Product Description:	UHF Mobile Transceivers
Model(s):	IC-F6011
Test (specified rules):	FCC 90.221 & RSS-119 (5.5) Emissions Mask B
Date:	August 29, 2010
Tested by: Name	Hung Trinh
Deviation:	None
Comment(s):	Power: low, CH. Spacing: 25 KHz, Carrier Freq.: 450.1 MHz with F3E 2.5 kHz Sine Wave

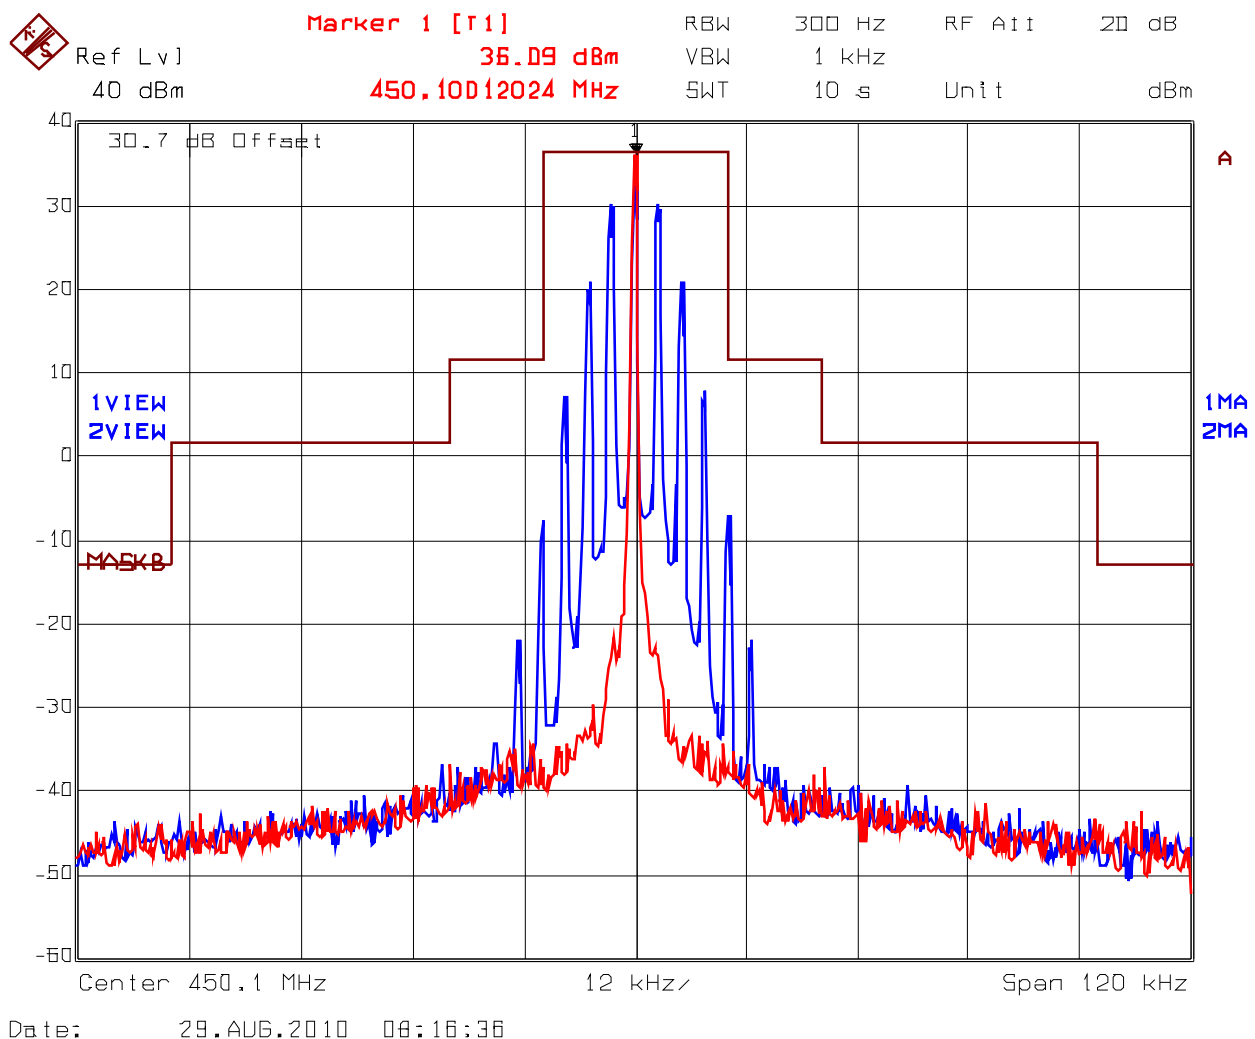

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: yic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: ICOM-240F90
September 9, 2010

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot # 12.:

File No.:	ICOM-240Q
Client:	Icom America
Product Description:	UHF Mobile Transceivers
Model(s):	IC-F6011
Test (specified rules):	FCC 90.221 & RSS-119 (5.5) Emissions Mask B
Date:	August 29, 2010
Tested by: Name	Hung Trinh
Deviation:	None
Comment(s):	Power: low, CH. Spacing: 25 KHz, Carrier Freq.: 469.9 MHz with F3E 2.5 kHz Sine Wave

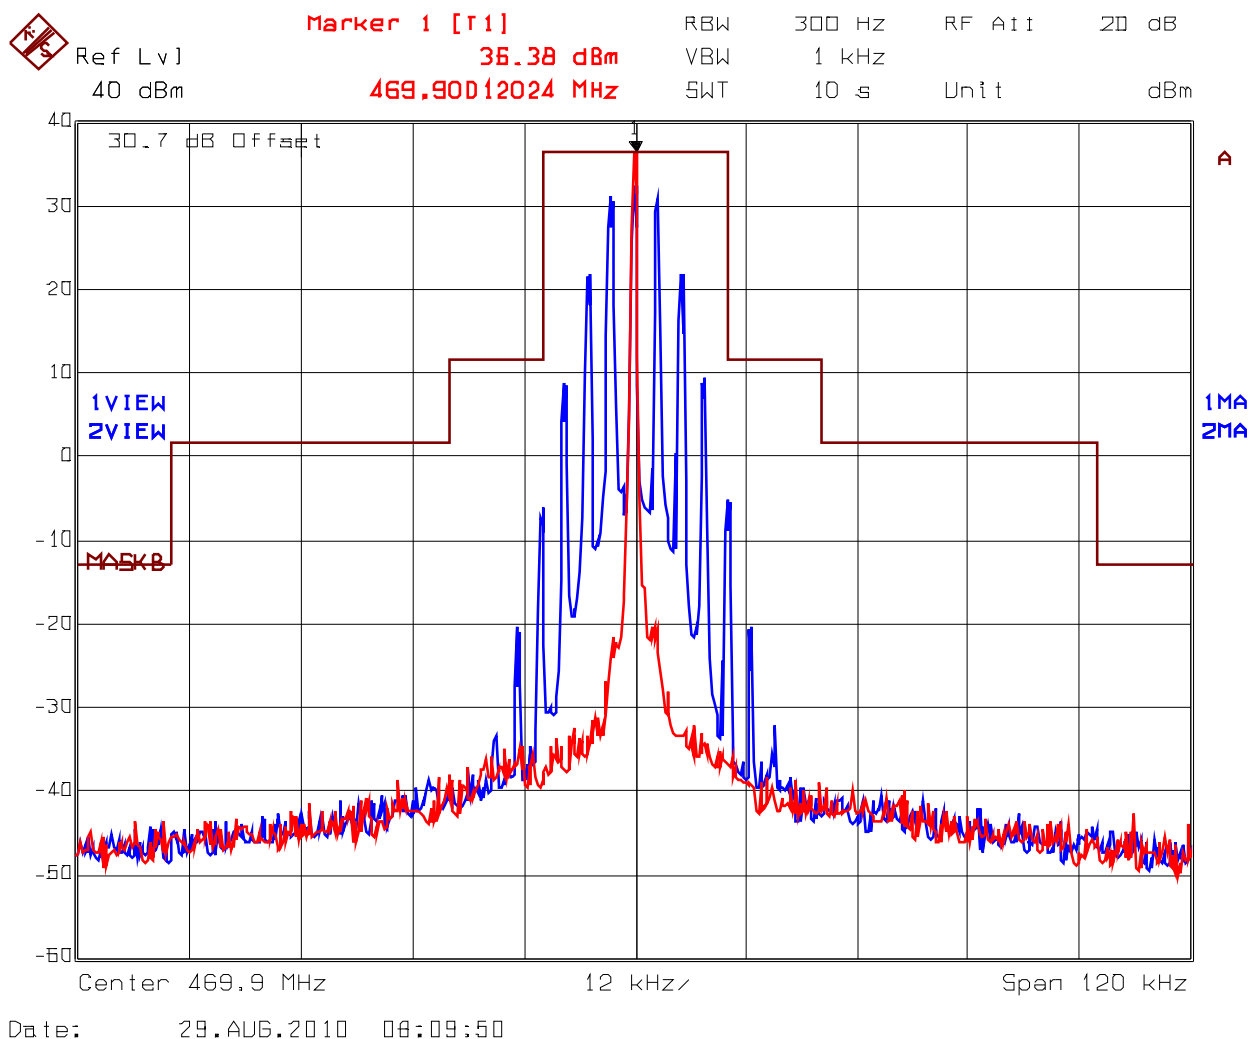

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: yic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: ICOM-240F90
September 9, 2010

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot # 13.:

File No.:	ICOM-240Q
Client:	Icom America
Product Description:	UHF Mobile Transceivers
Model(s):	IC-F6011
Test (specified rules):	FCC 90.221 & RSS-119 (5.5) Emissions Mask D
Date:	August 29, 2010
Tested by: Name	Hung Trinh
Deviation:	None
Comment(s):	Power: high, CH. Spacing: 12.5 KHz, Carrier Freq.: 406.2 MHz with F3E 2.5 kHz Sine Wave

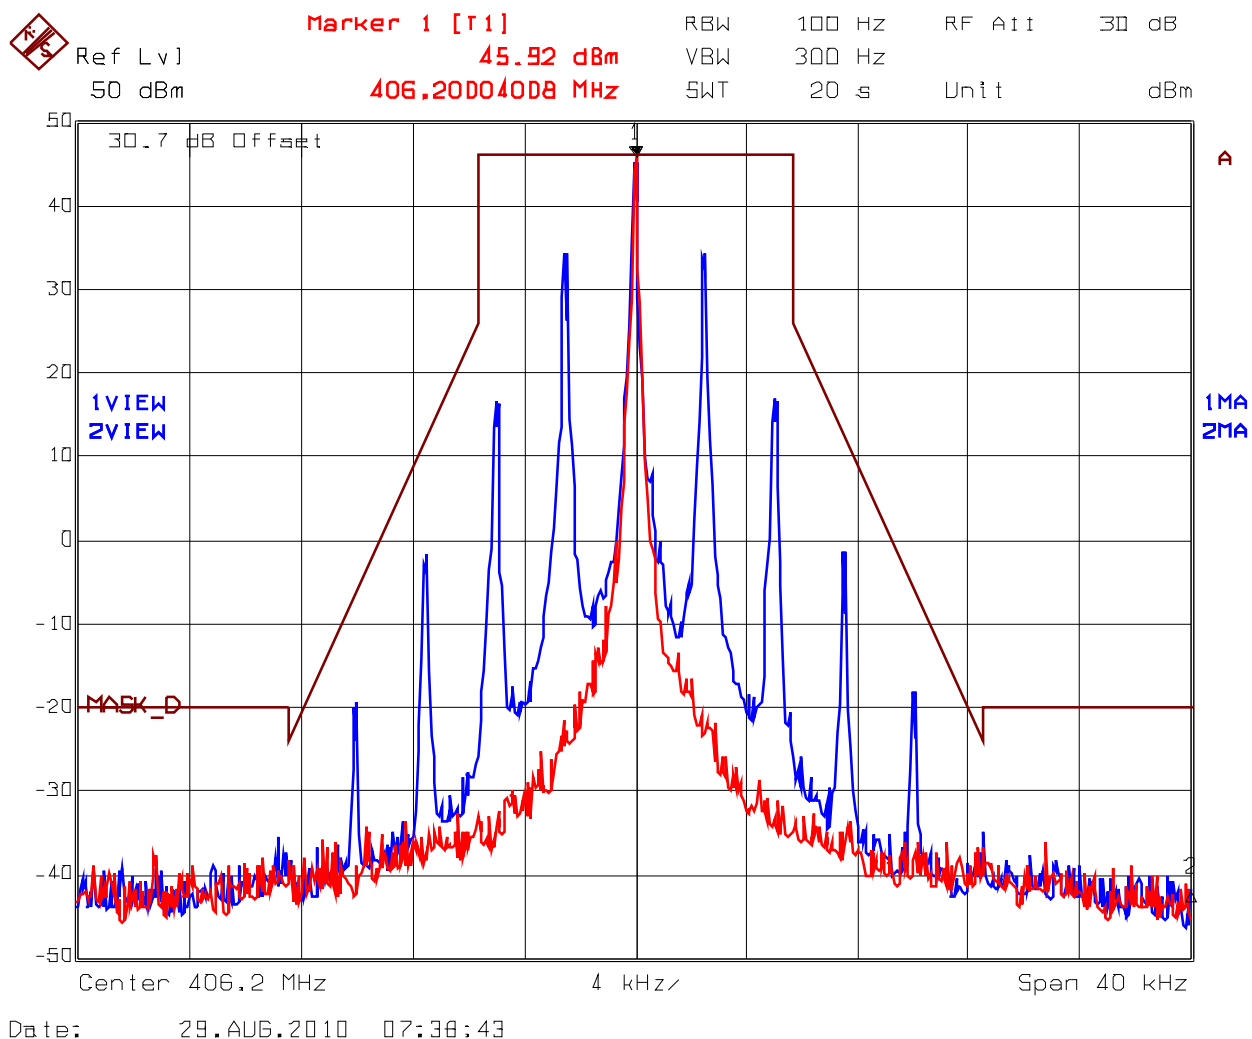

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: ICOM-240F90
September 9, 2010

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot # 14.:

File No.:	ICOM-240Q
Client:	Icom America
Product Description:	UHF Mobile Transceivers
Model(s):	IC-F6011
Test (specified rules):	FCC 90.221 & RSS-119 (5.5) Emissions Mask D
Date:	August 29, 2010
Tested by: Name	Hung Trinh
Deviation:	None
Comment(s):	Power: high, CH. Spacing: 12.5 KHz, Carrier Freq.: 450.1 MHz with F3E 2.5 kHz Sine Wave

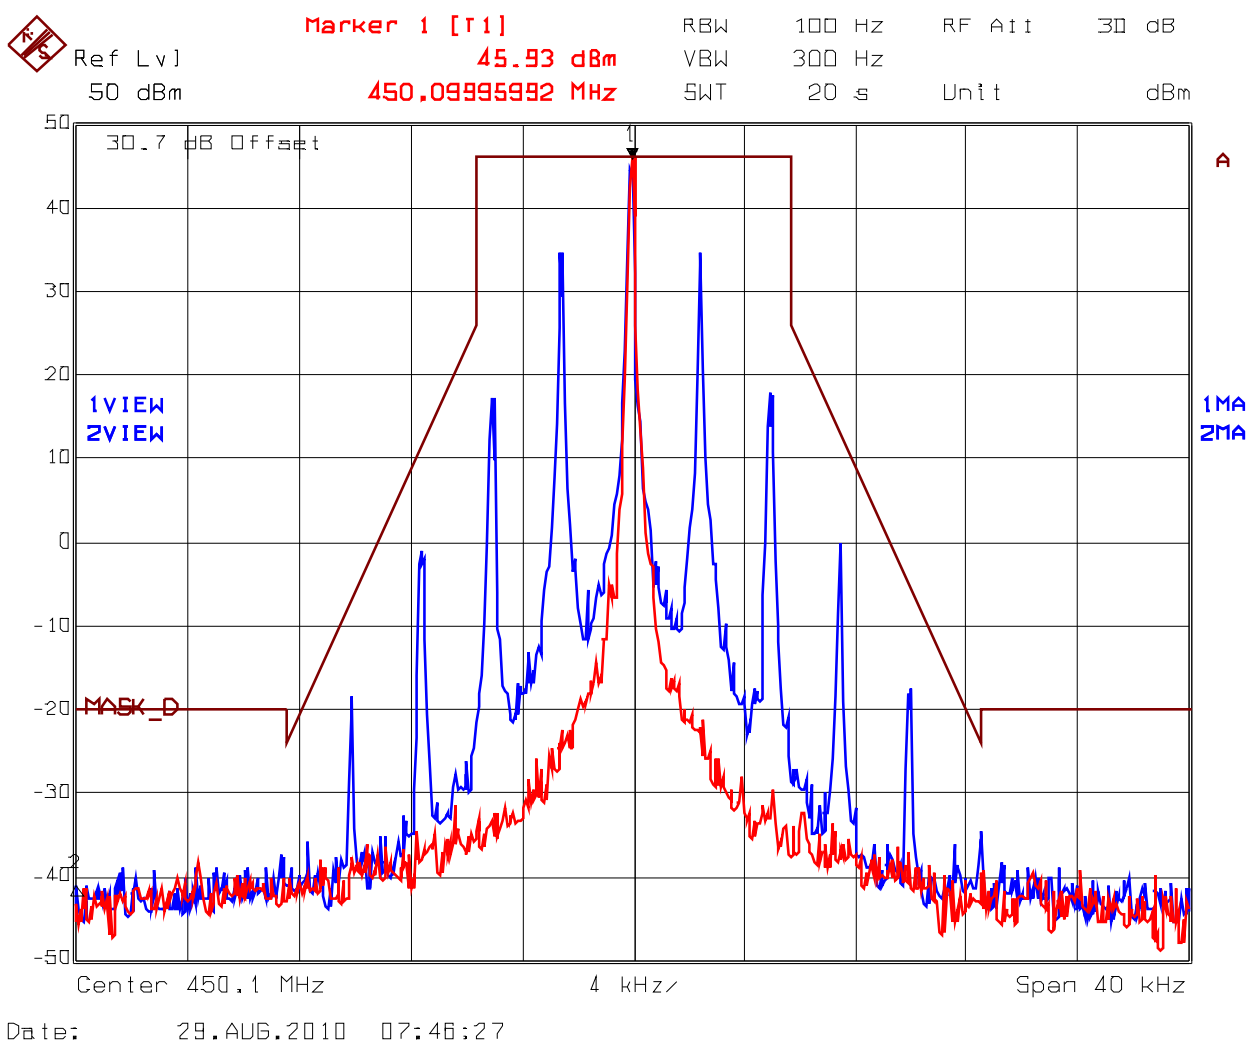

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: yic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: ICOM-240F90
September 9, 2010

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot # 15.:

File No.:	ICOM-240Q
Client:	Icom America
Product Description:	UHF Mobile Transceivers
Model(s):	IC-F6011
Test (specified rules):	FCC 90.221 & RSS-119 (5.5) Emissions Mask D
Date:	August 29, 2010
Tested by: Name	Hung Trinh
Deviation:	None
Comment(s):	Power: high, CH. Spacing: 12.5 KHz, Carrier Freq.: 469.9 MHz with F3E 2.5 kHz Sine Wave

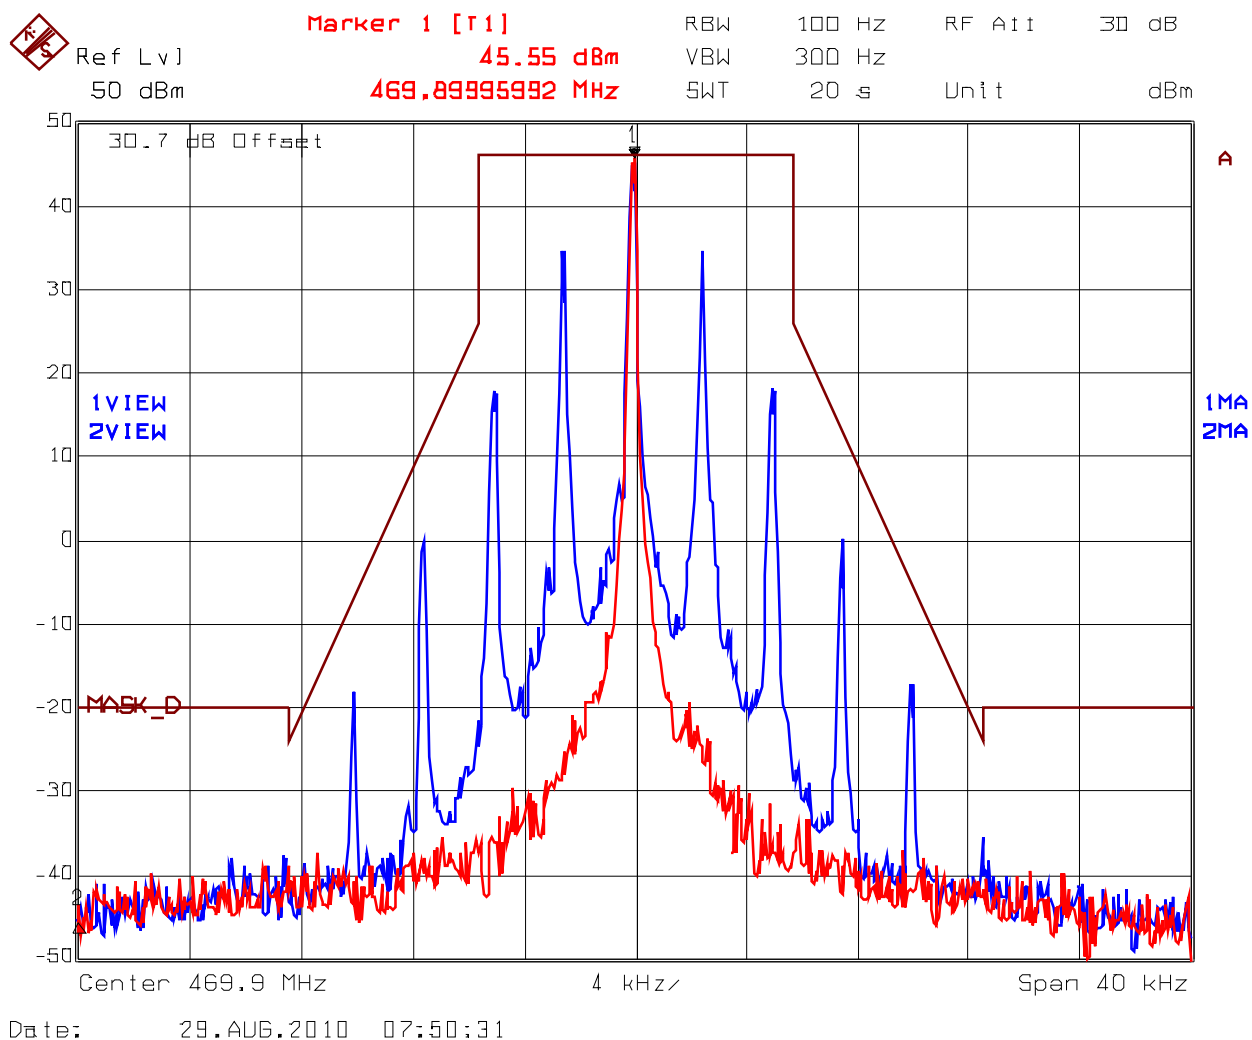

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: ICOM-240F90
September 9, 2010

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot # 16.:

File No.:	ICOM-240Q
Client:	Icom America
Product Description:	UHF Mobile Transceivers
Model(s):	IC-F6011
Test (specified rules):	FCC 90.221 & RSS-119 (5.5) Emissions Mask D
Date:	August 29, 2010
Tested by: Name	Hung Trinh
Deviation:	None
Comment(s):	Power: low, CH. Spacing: 12.5 KHz, Carrier Freq.: 406.2 MHz with F3E 2.5 kHz Sine Wave

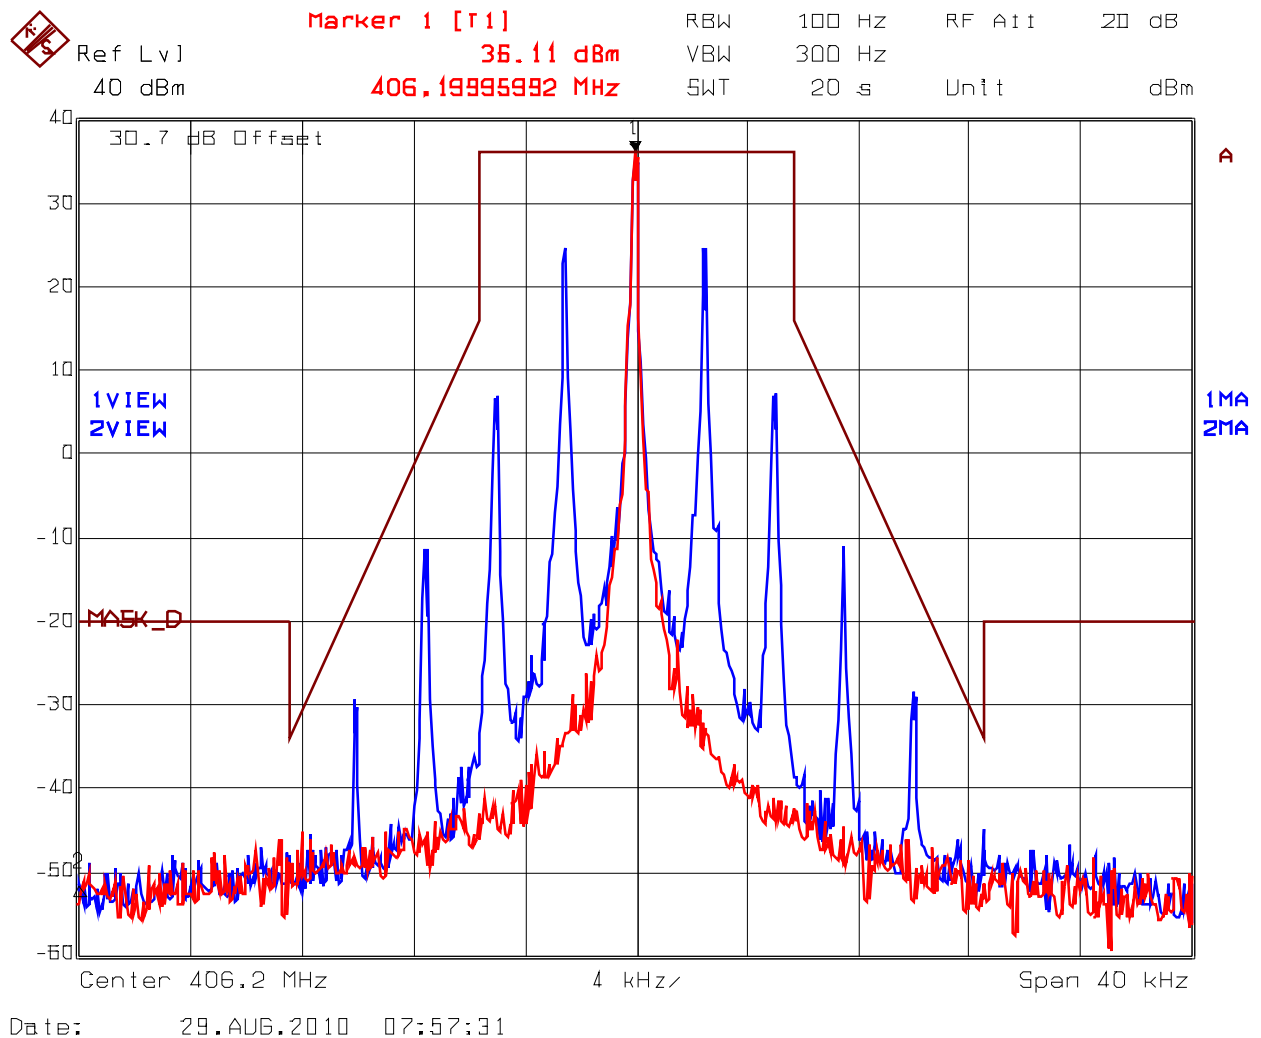

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: yic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: ICOM-240F90
September 9, 2010

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot # 17.:

File No.:	ICOM-240Q
Client:	Icom America
Product Description:	UHF Mobile Transceivers
Model(s):	IC-F6011
Test (specified rules):	FCC 90.221 & RSS-119 (5.5) Emissions Mask D
Date:	August 29, 2010
Tested by: Name	Hung Trinh
Deviation:	None
Comment(s):	Power: low, CH. Spacing: 12.5 KHz, Carrier Freq.: 450.1 MHz with F3E 2.5 kHz Sine Wave

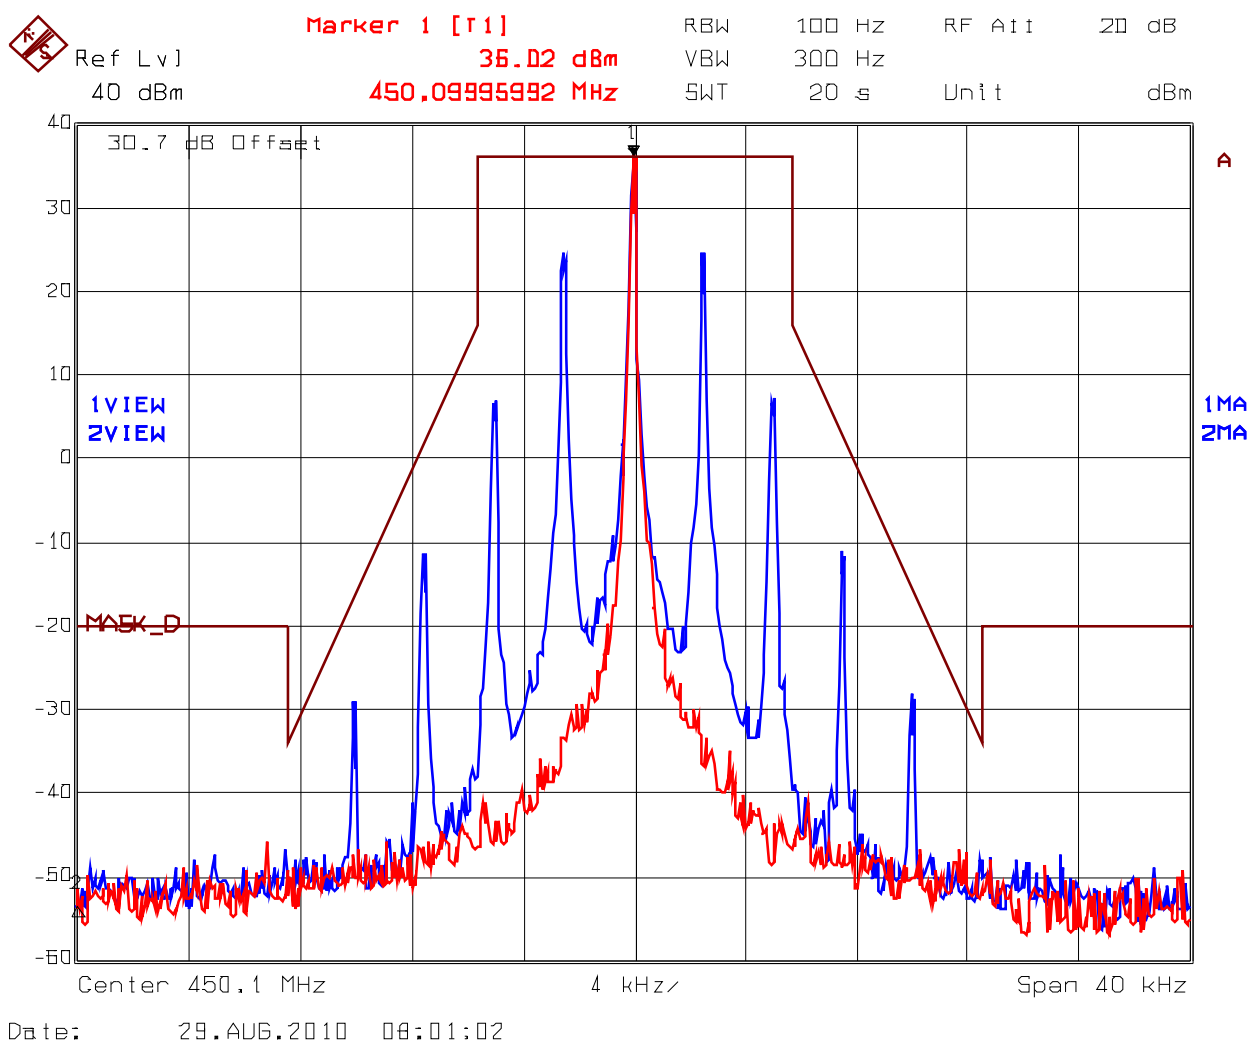

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: ICOM-240F90
September 9, 2010

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot # 18.:

File No.:	ICOM-240Q
Client:	Icom America
Product Description:	UHF Mobile Transceivers
Model(s):	IC-F6011
Test (specified rules):	FCC 90.221 & RSS-119 (5.5) Emissions Mask D
Date:	August 29, 2010
Tested by: Name	Hung Trinh
Deviation:	None
Comment(s):	Power: low, CH. Spacing: 12.5 KHz, Carrier Freq.: 469.9 MHz with F3E 2.5 kHz Sine Wave

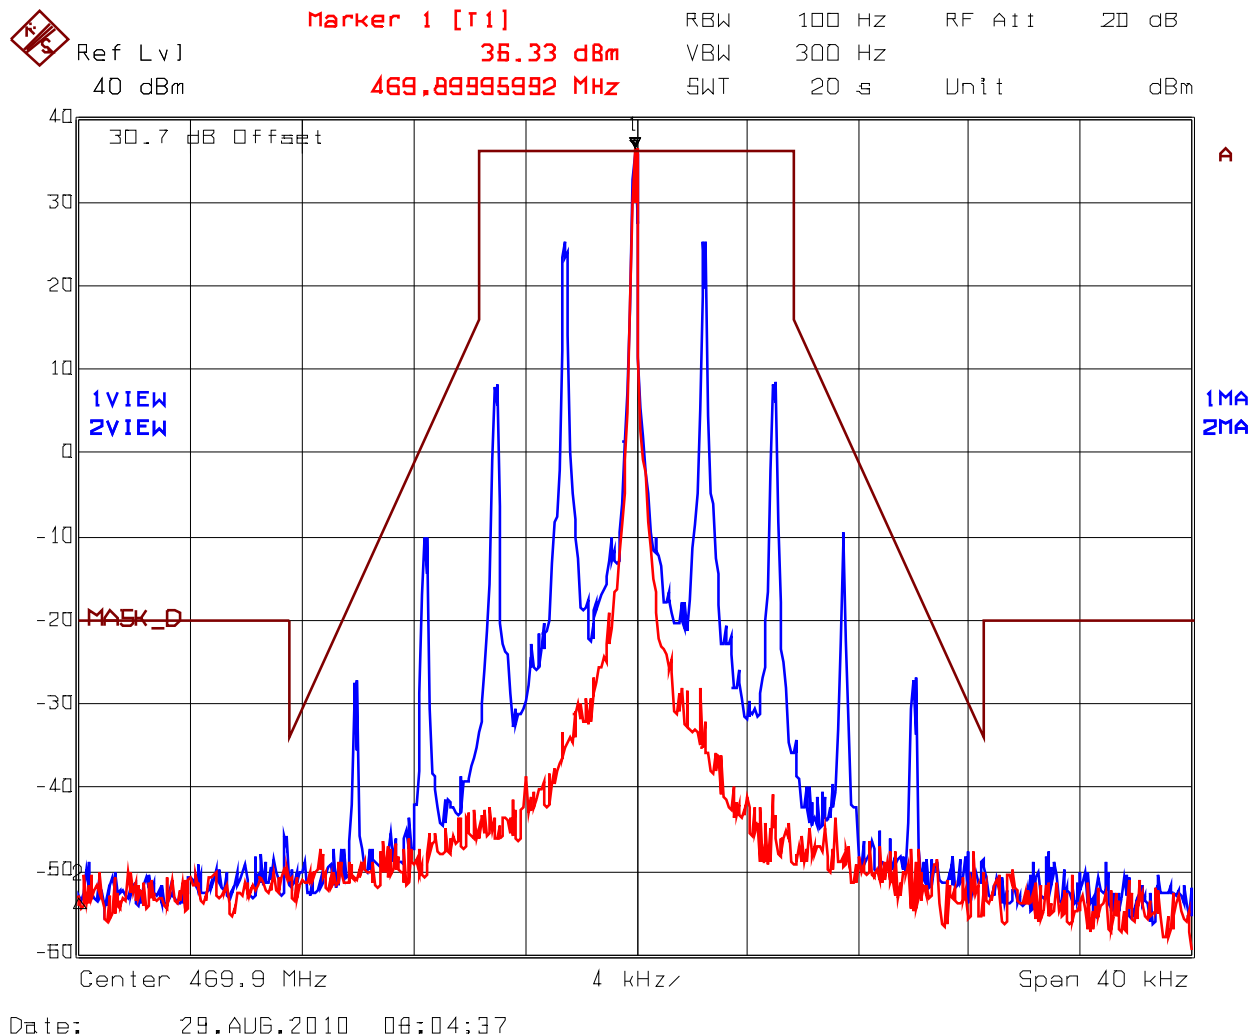

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: yic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: ICOM-240F90
September 9, 2010

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.6. TRANSMITTER ANTENNA POWER SPURIOUS/HARMONIC CONDUCTED EMISSIONS [§§ 2.1051, 2.1057 & 90.210]

5.6.1. Limits


Emissions shall be attenuated below the mean output power of the transmitter as follows:

FCC Rules	Frequency Range	Attenuation Limit (dBc)
§ 90.210(b)	10 MHz to Lowest frequency of the radio to 10 th harmonic of the highest frequency of the radio	At least 43 + 10 log(P) or -13 dBm
§ 90.210(d)	10 MHz to Lowest frequency of the radio to 10 th harmonic of the highest frequency of the radio	At least 50 + 10 log (P) dB or 70 dB, whichever is the lesser attenuation.
§ 90.210(e)	10 MHz to Lowest frequency of the radio to 10 th harmonic of the highest frequency of the radio	At least 55 + 10 log (P) or 65 dB, whichever is the lesser attenuation.

5.6.2. Method of Measurements

Refer to Section 7.5 of this report for measurement details

5.6.3. Test Arrangement

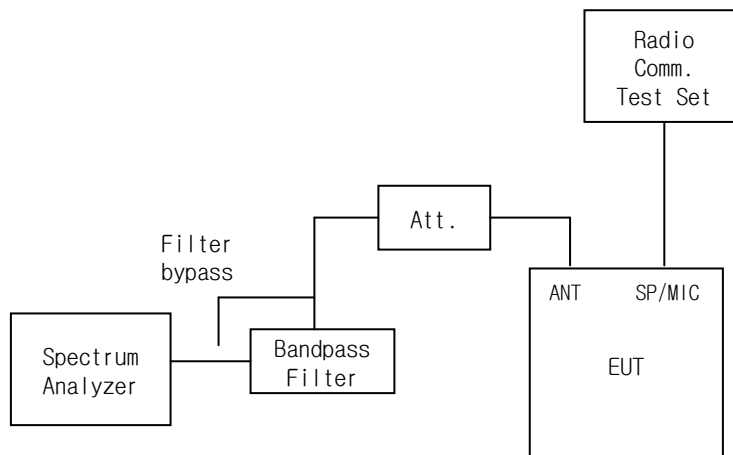

5.6.4. Test Equipment List

Test Instruments	Manufacturer	Model No.	Serial No.	Frequency Range	Calibration Due Date
Spectrum Analyzer	Rohde & Schwarz	FSEK30	100077	20 Hz – 40 GHz	Aug 14, 2011
High Pass Filter	Mini-Circuits	SHP-800	10425	Cut off 400 MHz	Inhouse calibrated at tests
DC Block	Hewlett Packard	11742A	12460	0.045 – 26.5 GHz	Inhouse calibrated at tests
Attenuator	Weinschell	48-30-34	BM5354	DC - 18 GHz	Inhouse calibrated at tests
DC Power Supply	Hewlett Packard	Harrison 6439B	0K0822	0-60V, 15A	N/A


5.6.5. Test Data

Note: There was no difference in spurious/harmonic emissions on the pre-scans for different channel spacing and modulation types. Therefore, the rf spurious/harmonic emissions in this section would be performed for 12.5 KHz channel spacing and the more stringent limit of $50 + 10 \cdot \log(P)$ would be applied for worst case.

5.6.5.1. Near Lowest Frequency (406.20 MHz)

Plot # 19.:

File No.:	ICOM-240Q
Client:	Icom America
Product Description:	UHF Mobile Transceivers
Model(s):	IC-F6011
Test (specified rules):	FCC 90.221 & RSS-119 (5.5) Transmitter Conducted Emission
Date:	August 29, 2010
Tested by: Name	Hung Trinh
Deviation:	None
Comment(s):	Power: high, Carrier Freq.: 406.2 MHz with F3E 2.5 kHz Sine Wave

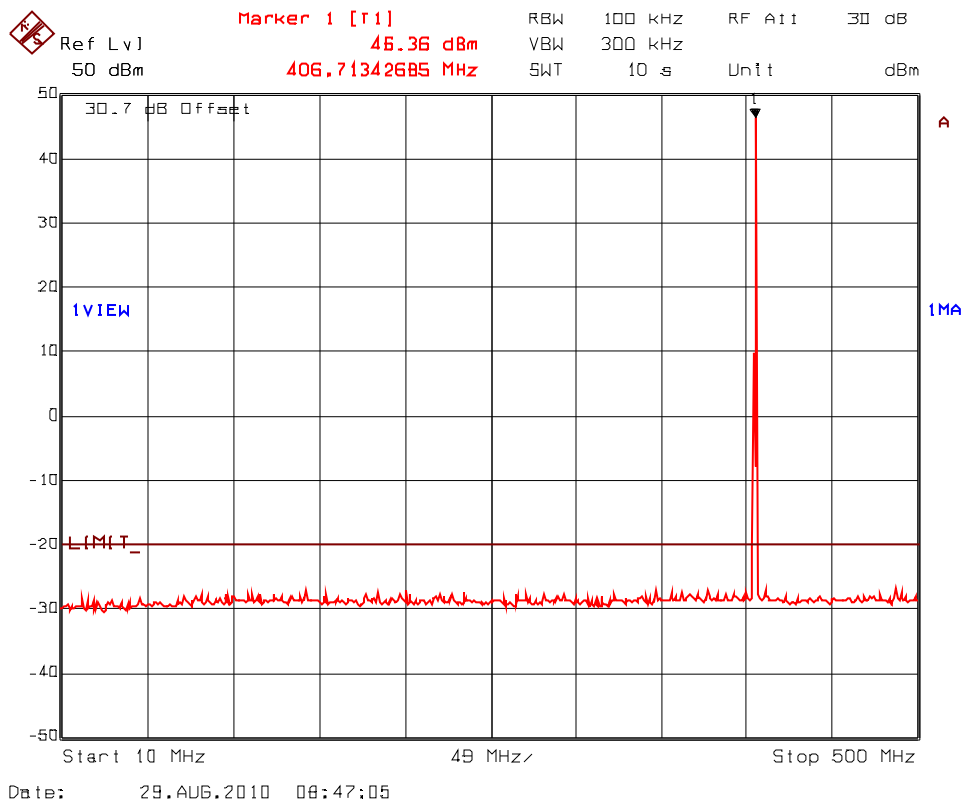


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: yic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: ICOM-240F90
September 9, 2010

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

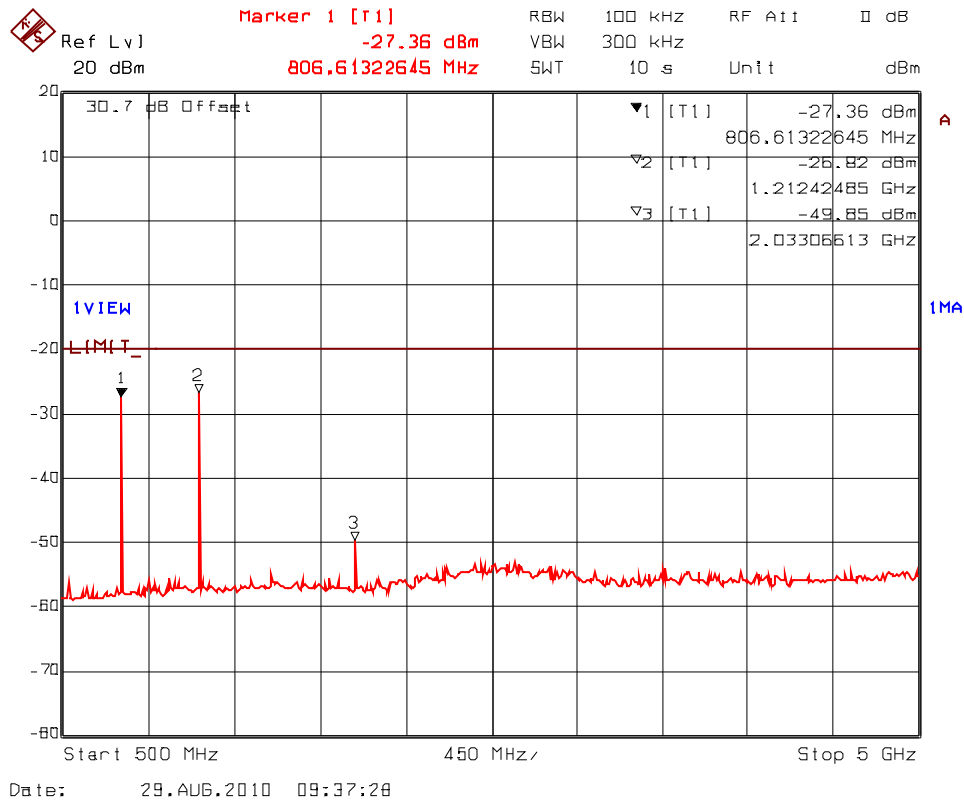

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>


File #: ICOM-240F90

September 9, 2010

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot # 20.:

File No.:	ICOM-240Q
Client:	Icom America
Product Description:	UHF Mobile Transceivers
Model(s):	IC-F6011
Test (specified rules):	FCC 90.221 & RSS-119 (5.5) Transmitter Conducted Emission
Date:	August 29, 2010
Tested by: Name	Hung Trinh
Deviation:	None
Comment(s):	Power: low, Carrier Freq.: 406.2 MHz with F3E 2.5 kHz Sine Wave

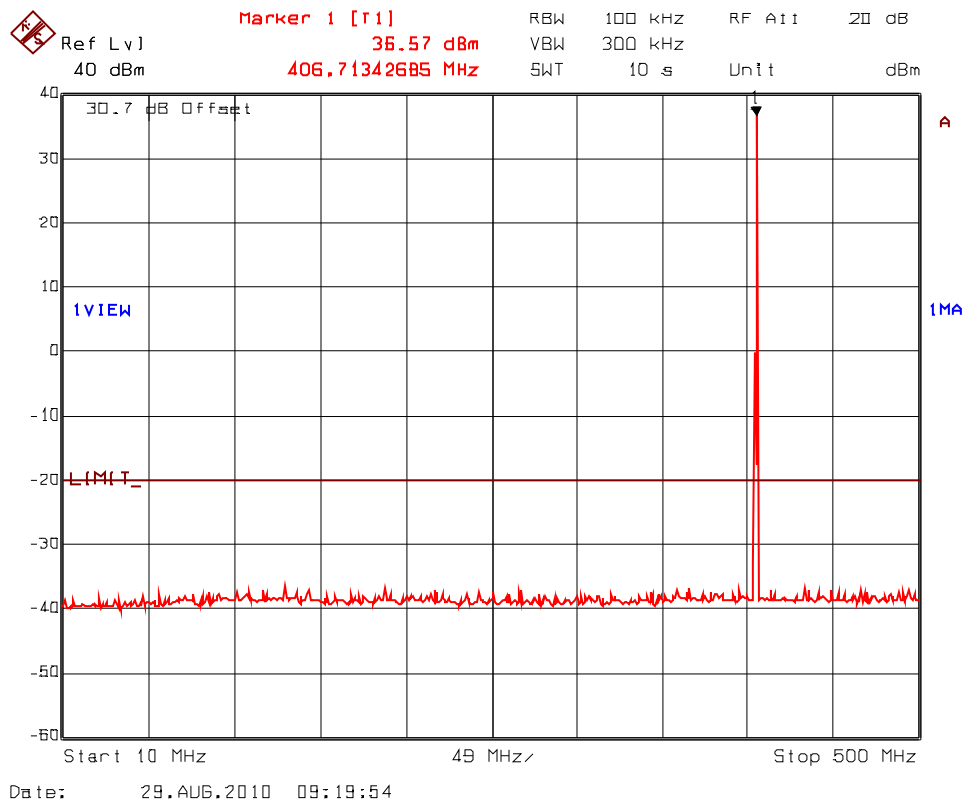


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: ICOM-240F90

September 9, 2010

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

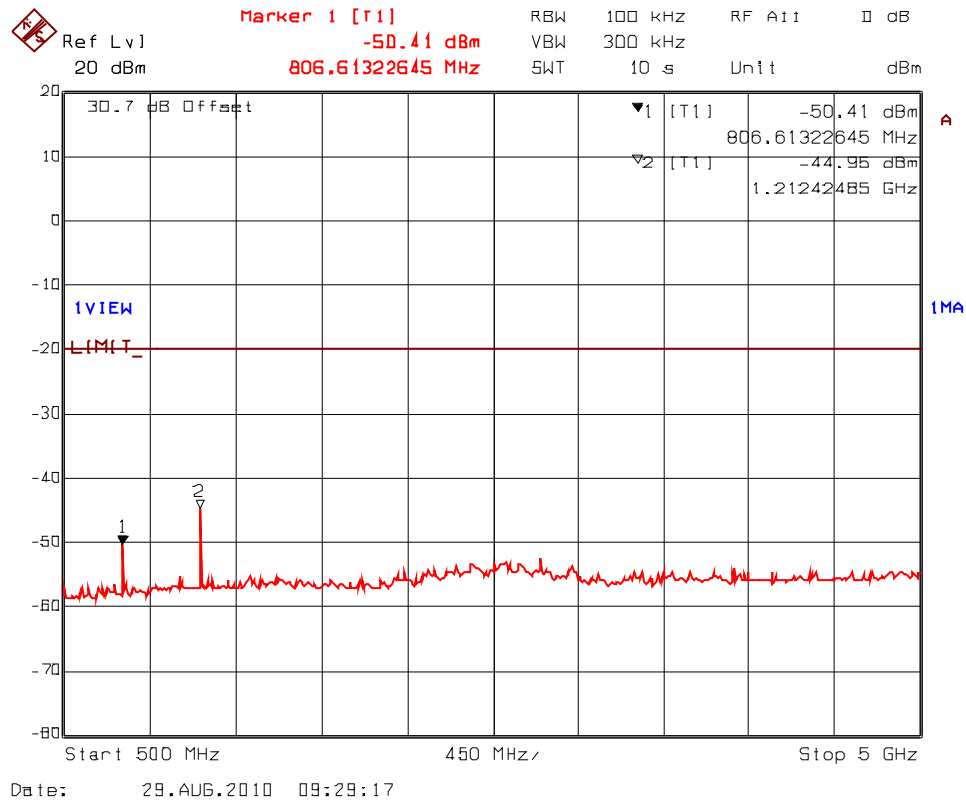

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: ICOM-240F90


September 9, 2010

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.6.5.2. Near Middle Frequency (450.10 MHz)

Plot # 21.:

File No.:	ICOM-240Q
Client:	Icom America
Product Description:	UHF Mobile Transceivers
Model(s):	IC-F6011
Test (specified rules):	FCC 90.221 & RSS-119 (5.5) Transmitter Conducted Emission
Date:	August 29, 2010
Tested by: Name	Hung Trinh
Deviation:	None
Comment(s):	Power: high, Carrier Freq.: 450.1 MHz with F3E 2.5 kHz Sine Wave

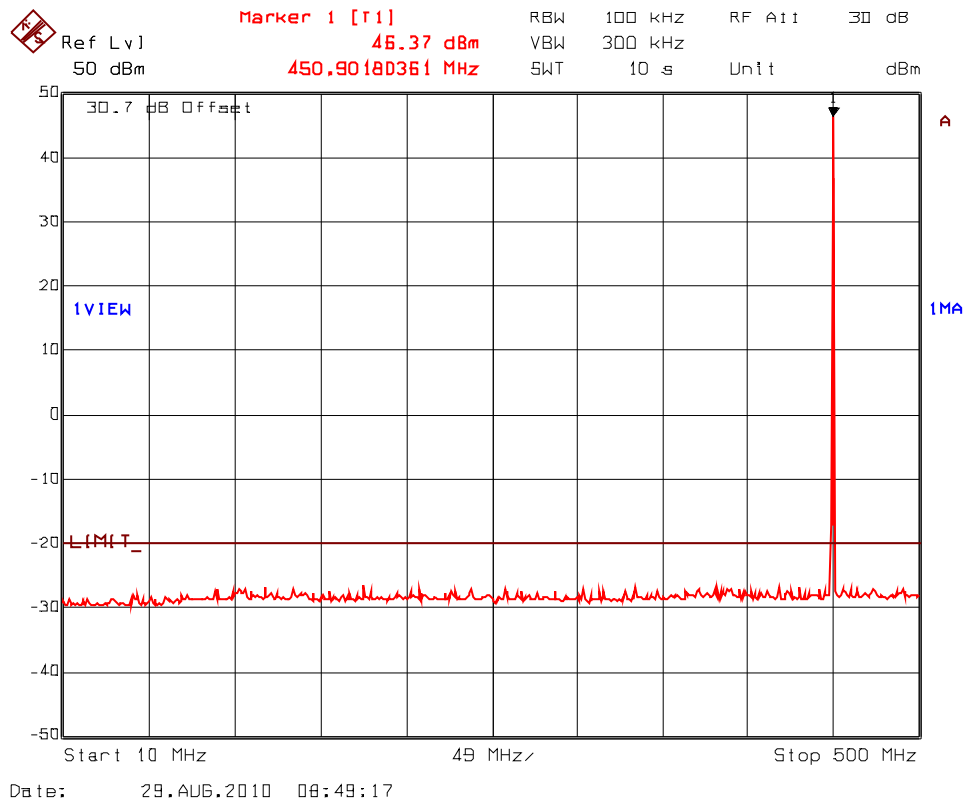


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: ICOM-240F90
September 9, 2010

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

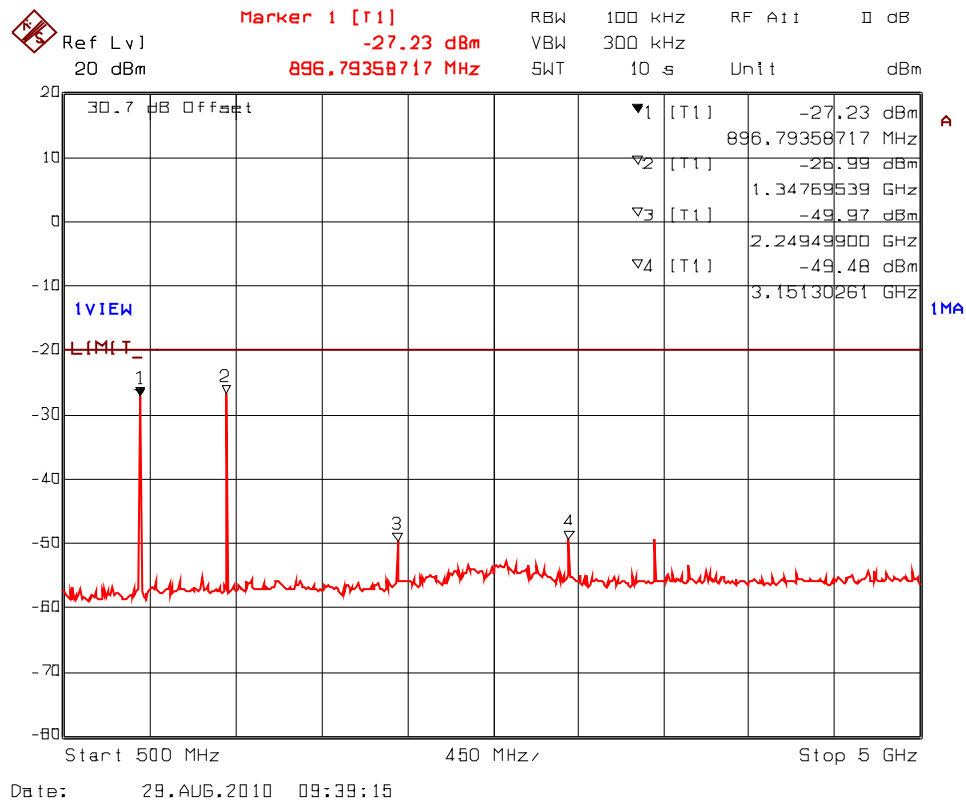

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>


File #: ICOM-240F90

September 9, 2010

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot # 22.:

File No.:	ICOM-240Q
Client:	Icom America
Product Description:	UHF Mobile Transceivers
Model(s):	IC-F6011
Test (specified rules):	FCC 90.221 & RSS-119 (5.5) Transmitter Conducted Emission
Date:	August 29, 2010
Tested by: Name	Hung Trinh
Deviation:	None
Comment(s):	Power: low, Carrier Freq.: 450.1 MHz with F3E 2.5 kHz Sine Wave

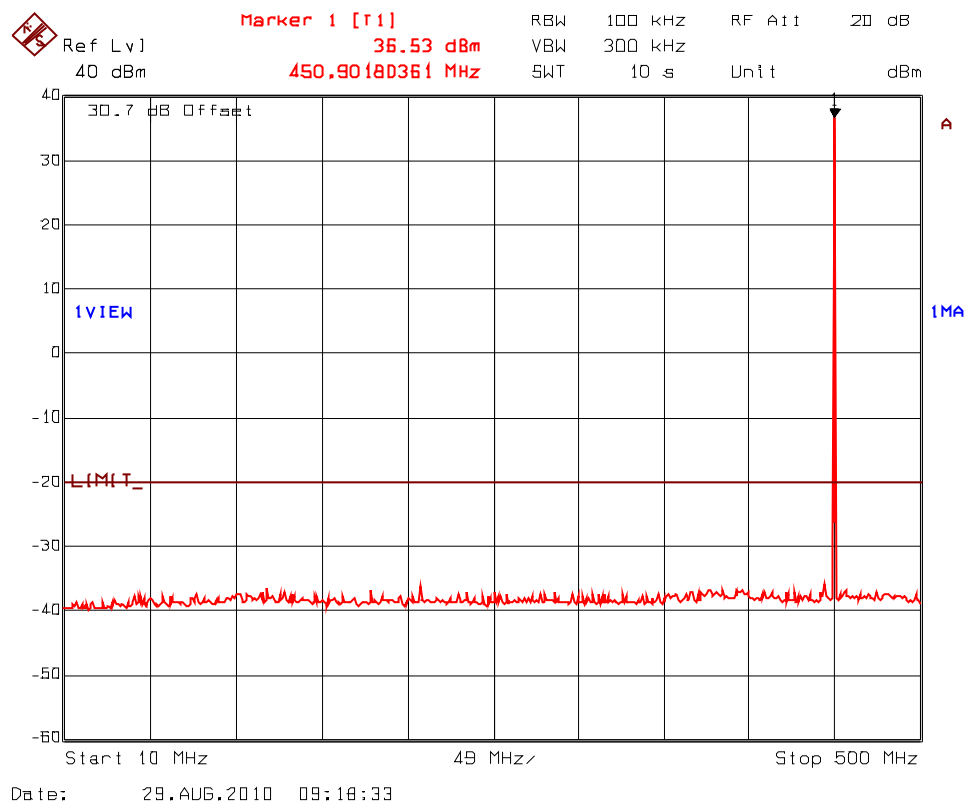


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: yic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: ICOM-240F90

September 9, 2010

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

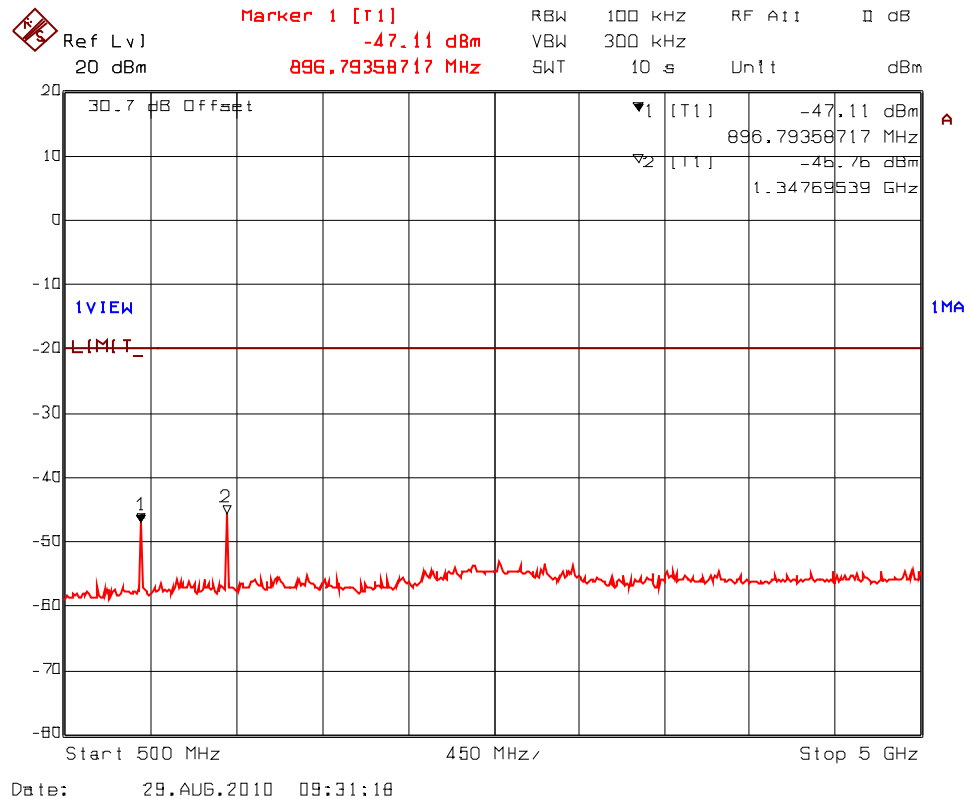

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: ICOM-240F90


September 9, 2010

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.6.5.3. Near Highest Frequency (469.90 MHz)

Plot # 23.:

File No.:	ICOM-240Q
Client:	Icom America
Product Description:	UHF Mobile Transceivers
Model(s):	IC-F6011
Test (specified rules):	FCC 90.221 & RSS-119 (5.5) Transmitter Conducted Emission
Date:	August 29, 2010
Tested by: Name	Hung Trinh
Deviation:	None
Comment(s):	Power: high, Carrier Freq.: 469.9 MHz with F3E 2.5 kHz Sine Wave

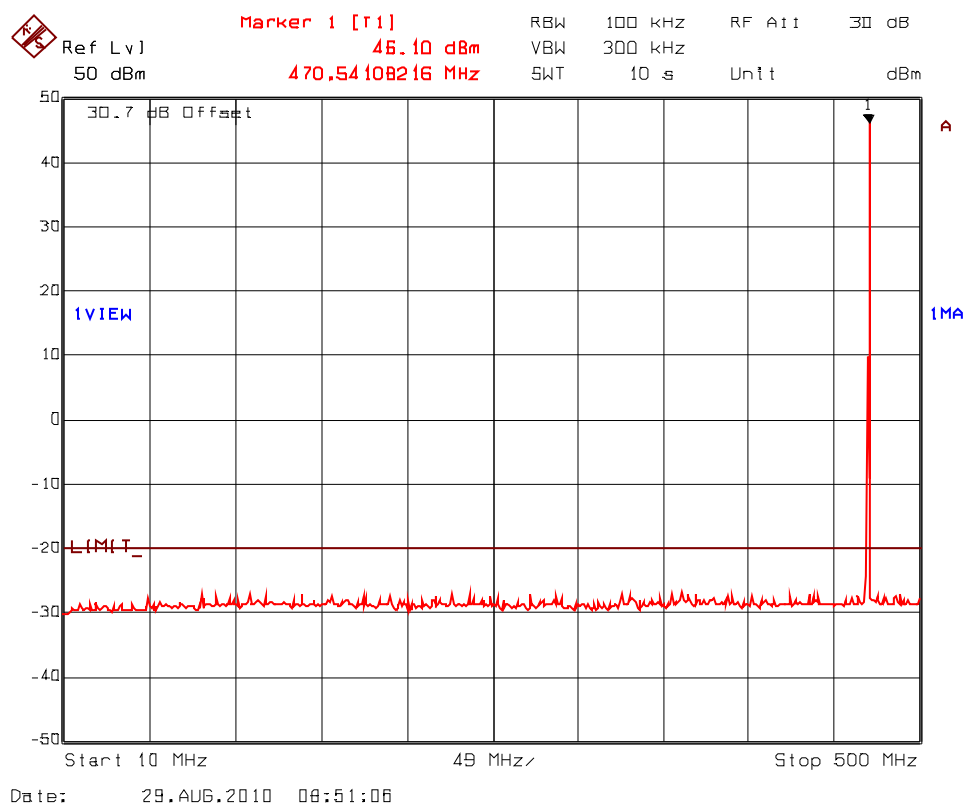


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: ICOM-240F90
September 9, 2010

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

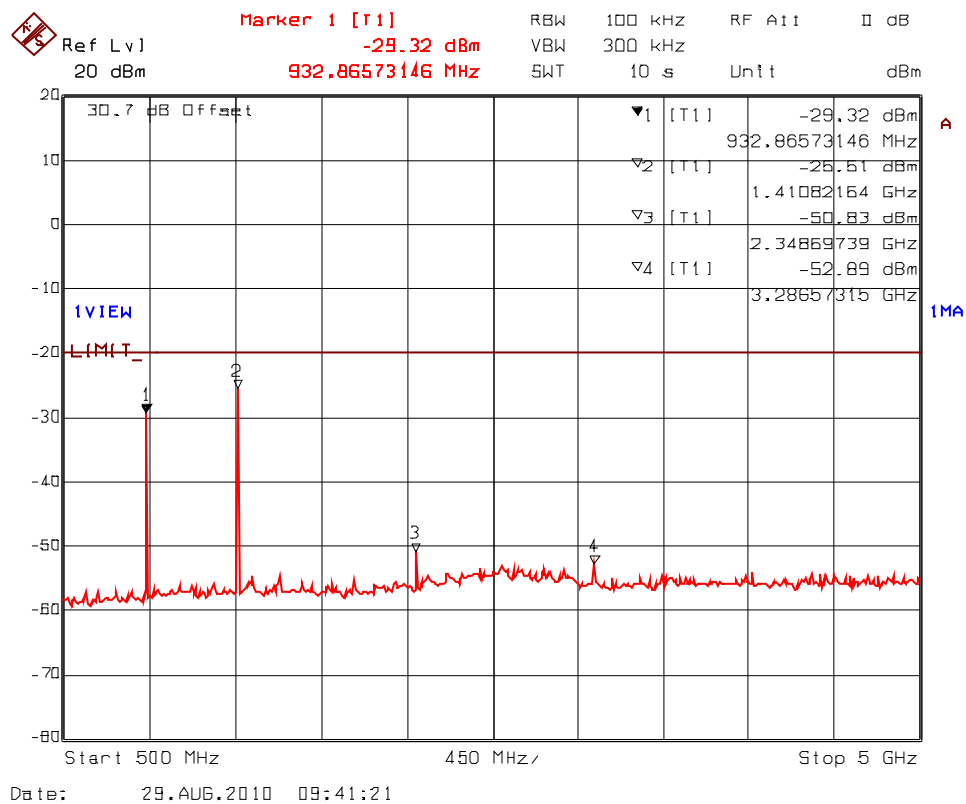

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>


File #: ICOM-240F90

September 9, 2010

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot # 24.:

File No.:	ICOM-240Q
Client:	Icom America
Product Description:	UHF Mobile Transceivers
Model(s):	IC-F6011
Test (specified rules):	FCC 90.221 & RSS-119 (5.5) Transmitter Conducted Emission
Date:	August 29, 2010
Tested by: Name	Hung Trinh
Deviation:	None
Comment(s):	Power: low, Carrier Freq.: 469.9 MHz with F3E 2.5 kHz Sine Wave

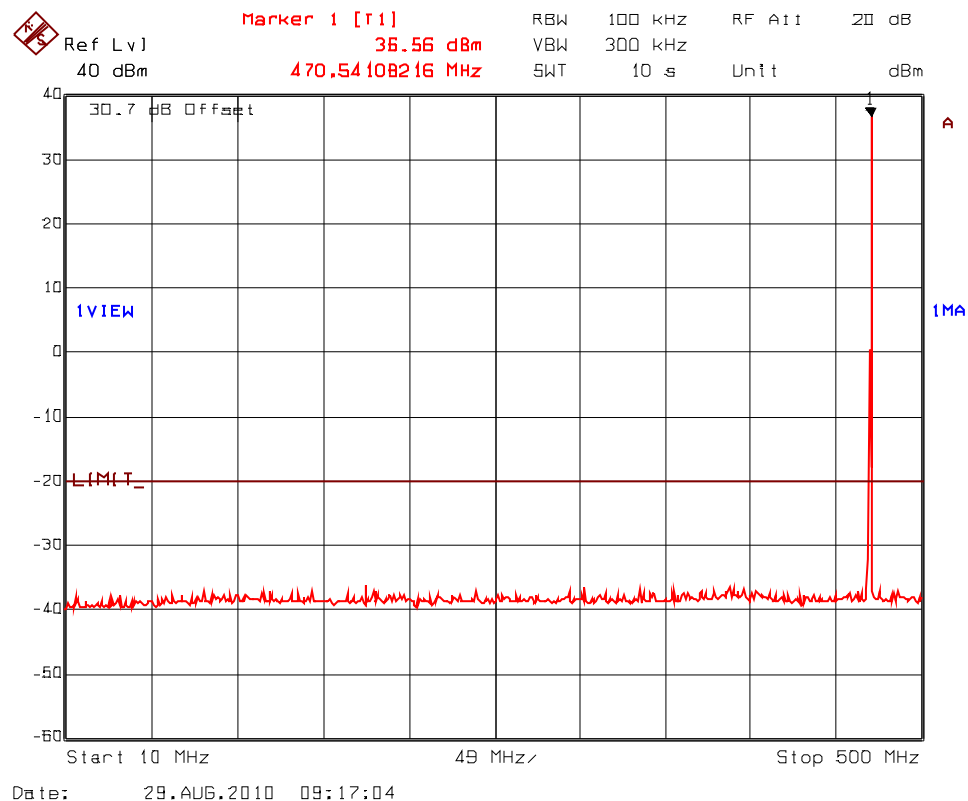


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: ICOM-240F90
September 9, 2010

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

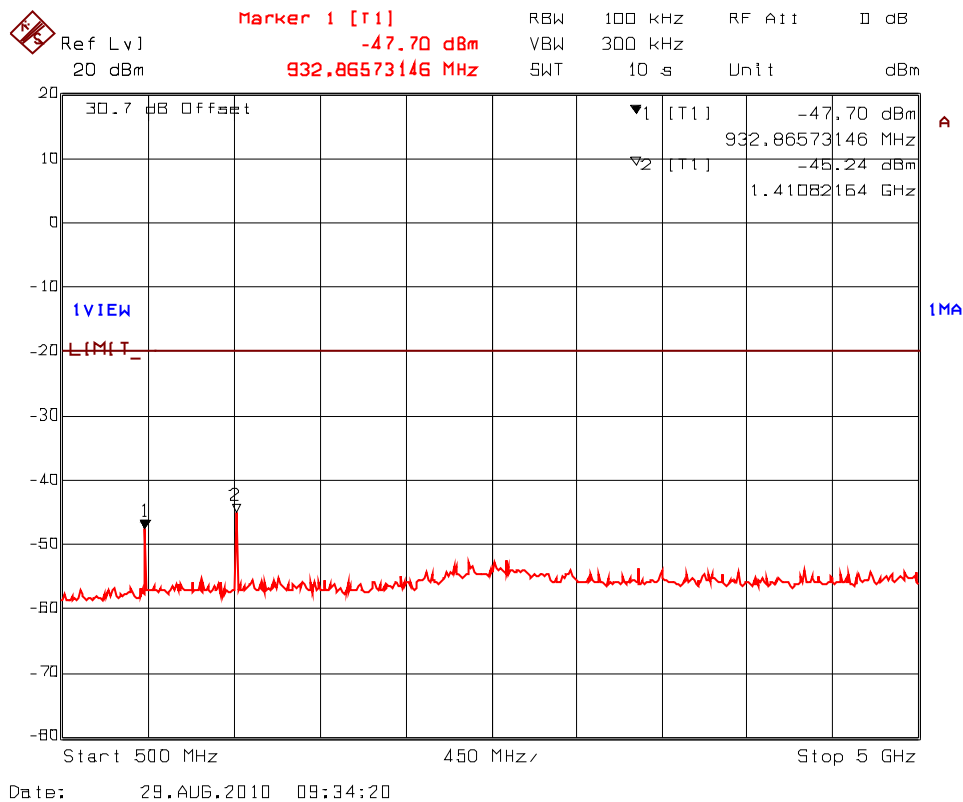

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: ICOM-240F90

September 9, 2010

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.7. TRANSMITTER SPURIOUS/HARMONIC RADIATED EMISSIONS [§§ 2.1053, 2.1057 & 90.210]

5.7.1. Limits


Emissions shall be attenuated below the mean output power of the transmitter as follows:

FCC Rules	Frequency Range	Attenuation Limit (dBc)
§ 90.210(b)	10 MHz to Lowest frequency of the radio to 10 th harmonic of the highest frequency of the radio	At least 43 + 10 log(P) or -13 dBm
§ 90.210(d)	10 MHz to Lowest frequency of the radio to 10 th harmonic of the highest frequency of the radio	At least 50 + 10 log (P) dB or 70 dB, whichever is the lesser attenuation.
§ 90.210(e)	10 MHz to Lowest frequency of the radio to 10 th harmonic of the highest frequency of the radio	At least 55 + 10 log (P) or 65 dB, whichever is the lesser attenuation.

5.7.2. Method of Measurements

The spurious/harmonic ERP measurements are using substitution method specified in Section 7.2 of this report.

5.7.3. Test Arrangement

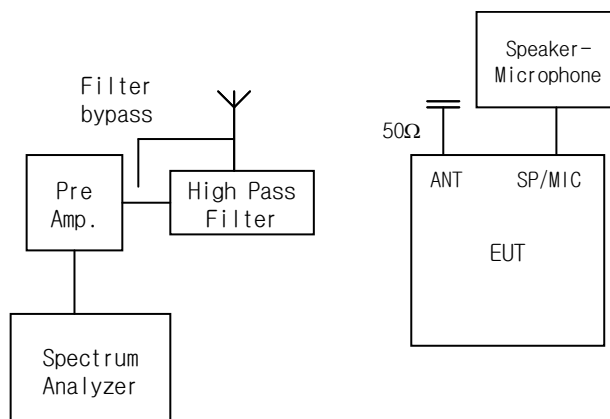

5.7.4. Test Equipment List

Test Instruments	Manufacturer	Model No.	Serial No.	Frequency Range	Calibration Due Date
Spectrum Analyzer	Rohde & Schwarz	FSEK 30	100077	20 Hz – 40 GHz	Aug 14, 2011
Spectrum Analyzer	Rohde & Schwarz	ESU40	100037	20 Hz – 40 GHz	March 09, 2011
Signal Generator	Hewlett Packard	83752B	3610A00457	0.01 – 20 GHz	Oct 19, 2011
RF Amplifier	Hewlett Packard	84498	3008A00769	1 – 26.5 GHz	Nov 2, 2011
RF Amplifier	AH System	PAM-0118	225	20 MHz – 18 GHz	April 18, 2011
Biconi-Log Antenna	Emco	3142C	00026873	26 – 3000 MHz	April 18, 2011
Horn Antenna	Emco	3155	9701-6570	1 – 18 GHz	Nov 20, 2010
Horn Antenna	Emco	3155	9701-5061	1 – 18 GHz	21 Sep 2010
Dipole Antenna	Emco	3121C	434	26 - 1000 MHz	Aug 16, 2011
High Pass filter	Mini-Circuits	SHP-800	10425	Cut off 400 MHz	Inhouse calibrated at tests
Attenuator	Weinschell	48-30-34	BM5354	DC - 18 GHz	Inhouse calibrated at tests
DC Power Supply	Hewlett Packard	Harrison 6439B	0K0822	0-60V, 15A	N/A

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: yic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: ICOM-240F90

September 9, 2010

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.7.5. Test Data

Remarks:

- The RF spurious/harmonic emission characteristics for different channel spacing are indistinguishable. Therefore, the following radiated emissions were performed at 12.5 KHz channel spacing operation, and the results were compared with the more stringent limit of $50+10*\log(P \text{ in Watts})$ for the worst-case.
- The radiated emissions were performed with high power setting (45 Watts) at 3 meters distance to represents the worst-case test configuration.
- The emissions were scanned from 30 MHz to 10th harmonics; all emissions within 40 dB below the limits were recorded.

5.7.5.1. Near Lowest Frequency (406.20 MHz)

Carrier Frequency (MHz): 406.20

Power_{conducted} (dBm): 43

Limit (dBm): -20

Frequency (MHz)	E-Field (dBμV/m)	EMI Detector (Peak/QP)	Antenna Polarization (H/V)	ERP measured (dBm)	Limit (dBm)	Margin (dB)
812.4	59.49	Peak	V	-43.64	-20	-23.6
812.4	62.27	Peak	H	-40.86	-20	-20.9
1218.6	54.61	Peak	V	-47.89	-20	-27.9
1218.6	55.06	Peak	H	-47.44	-20	-27.4
1624.8	49.23	Peak	V	-53.76	-20	-33.8
1624.8	45.79	Peak	H	-57.20	-20	-37.2
2031.0	55.15	Peak	V	-47.85	-20	-27.9
2031.0	56.10	Peak	H	-46.90	-20	-26.9
2437.2	52.00	Peak	V	-49.36	-20	-29.4
2437.2	51.59	Peak	H	-49.77	-20	-29.8
2843.4	52.76	Peak	V	-48.68	-20	-28.7
2843.4	53.81	Peak	H	-47.63	-20	-27.6
3249.6	56.81	Peak	V	-45.58	-20	-25.6
3249.6	56.87	Peak	H	-45.52	-20	-25.5
3655.8	58.37	Peak	V	-47.26	-20	-27.3
3655.8	58.44	Peak	H	-47.19	-20	-27.2
4062.0	61.18	Peak	V	-41.67	-20	-21.7
4062.0	58.32	Peak	H	-44.53	-20	-24.5

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: ICOM-240F90
September 9, 2010

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.7.5.2. Near Middle Frequency (450.10 MHz)

Carrier Frequency (MHz): 450.10

Power_{conducted} (dBm): 43

Limit (dBm): -20

Frequency (MHz)	E-Field (dBμV/m)	EMI Detector (Peak/QP)	Antenna Polarization (H/V)	ERP measured (dBm)	Limit (dBm)	Margin (dB)
900.2	52.19	Peak	V	-49.67	-20	-29.7
900.2	58.51	Peak	H	-43.35	-20	-23.4
1350.3	52.93	Peak	V	-49.61	-20	-29.6
1350.3	56.79	Peak	H	-45.75	-20	-25.8
1800.4	52.85	Peak	V	-49.72	-20	-29.7
1800.4	56.38	Peak	H	-46.19	-20	-26.2
2250.5	51.65	Peak	V	-50.77	-20	-30.8
2250.5	53.63	Peak	H	-48.79	-20	-28.8
2700.6	53.50	Peak	V	-48.13	-20	-28.1
2700.6	52.13	Peak	H	-49.50	-20	-29.5
3150.7	52.14	Peak	V	-51.04	-20	-31.0
3150.7	53.09	Peak	H	-50.09	-20	-30.1
3600.8	64.83	Peak	V	-38.06	-20	-18.1
3600.8	65.93	Peak	H	-36.96	-20	-17.0
4050.9	53.25	Peak	V	-50.87	-20	-30.9
4050.9	52.26	Peak	H	-51.86	-20	-31.9
4501.0	59.11	Peak	V	-44.93	-20	-24.9
4501.0	59.38	Peak	H	-44.18	-20	-24.2

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: ICOM-240F90

September 9, 2010

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.7.5.3. Near Highest Frequency (469.90 MHz)

Carrier Frequency (MHz): 469.9

Power_{conducted} (dBm): 43

Limit (dBm): -20

Frequency (MHz)	E-Field (dBμV/m)	EMI Detector (Peak/QP)	Antenna Polarization (H/V)	ERP measured (dBm)	Limit (dBm)	Margin (dB)
939.8	52.25	Peak	V	-50.86	-20	-30.9
939.8	56.36	Peak	H	-46.75	-20	-26.8
1409.7	46.28	Peak	V	-59.67	-20	-39.7
1409.7	53.77	Peak	H	-52.18	-20	-32.2
1879.6	54.59	Peak	V	-47.78	-20	-27.8
1879.6	55.05	Peak	H	-47.32	-20	-27.3
2349.5	52.77	Peak	V	-49.19	-20	-29.2
2349.5	47.65	Peak	H	-54.31	-20	-34.3
2819.4	51.48	Peak	V	-50.34	-20	-30.3
2819.4	54.17	Peak	H	-47.65	-20	-27.7
3289.3	63.11	Peak	V	-41.49	-20	-21.5
3289.3	62.64	Peak	H	-41.96	-20	-22.0
3759.2	53.16	Peak	V	-50.51	-20	-30.5
3759.2	56.60	Peak	H	-47.07	-20	-27.1
4229.1	54.29	Peak	V	-48.49	-20	-28.5
4229.1	55.76	Peak	H	-47.02	-20	-27.0
4699.0	58.45	Peak	V	-45.11	-20	-25.1
4699.0	59.17	Peak	H	-44.39	-20	-24.4

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: yic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: ICOM-240F90

September 9, 2010

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.8. FREQUENCY STABILITY [§§ 2.1055 & 90.213]

5.8.1. Limits

§ 90.213 Transmitters used must have minimum frequency stability as specified in the following table.


Frequency Range (MHz)	Channel Bandwidth (KHz)	Frequency Tolerance (ppm)		
		Fixed and Base Stations	Mobile Stations	
			> 2 W	≤ 2 W
421-512 MHz	6.25	0.5	1.0	1.0
	12.5	1.5	2.5	2.5
	25	2.5	5.0	5.0

- Stations operating in the 154.45 to 154.49 MHz or the 173.2 to 173.4 MHz bands must have a frequency stability of 5 ppm.
- Paging transmitters operating on paging-only frequencies must operate with frequency stability of 5 ppm in the 150-174 MHz band and 2.5 ppm in the 421-512 MHz band.

5.8.2. Method of Measurements

Refer to Section 7.3 of this report for measurement details

5.8.3. Test Arrangement

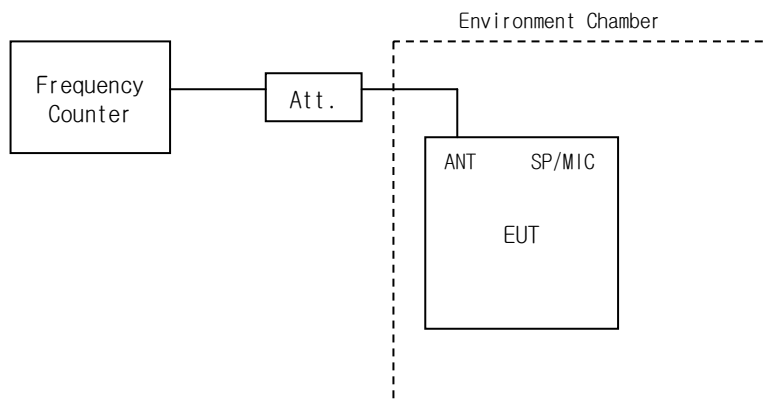

5.8.4. Test Equipment List

Test Instruments	Manufacturer	Model No.	Serial No.	Frequency Range	Calibration Due Date
Frequency Counter	EIP	545A	02683	10 Hz – 18 GHz	Jam 11, 2011
Attenuator	Weinschell	48-30-34	BM5354	DC - 18 GHz	Inhouse calibrated at tests
DC Power Supply	Hewlett Packard	Harrison 6439B	0K0822	0-60V, 15A	N/A
Temperature & Humidity Chamber	Tenney	T5	72-6202	-40 °C – +80 °C range	July 30, 2011

5.8.5. Test Data

Product Name:	UHF Mobile Transceiver
Model No.:	IC-F6011
Center Frequency:	406.20 MHz
Full Power Level:	46.5 dBm
Frequency Tolerance Limit:	± 2.5 ppm or ± 1015.5 Hz
Max. Frequency Tolerance Measured:	-190 Hz or -0.47 ppm
Input Voltage Rating:	13.6 VDC (nominal)

Ambient Temperature (°C)	CENTER FREQUENCY & RF POWER OUTPUT VARIATION		
	Supply Voltage (Nominal) 13.6 VDC	Supply Voltage (85% of Nominal) 11.56 Vdc	Supply Voltage (115% of Nominal) 15.64 Vdc
	Hz	Hz	Hz
-30	173	N/A	N/A
-20	127	N/A	N/A
-10	-123	N/A	N/A
0	113	N/A	N/A
+10	95	N/A	N/A
+20	-58	-115	-133
+30	53	N/A	N/A
+40	-137	N/A	N/A
+50	-185	N/A	N/A
+60	-190	N/A	N/A

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: ICOM-240F90

September 9, 2010

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.9. TRANSIENT FREQUENCY BEHAVIOR [§ 90.214]

5.9.1. Limits

Transient frequencies must be within the maximum frequency difference limits during the time intervals indicated:


Time intervals ^{1, 2}	Maximum frequency difference ³	All equipment	
		150 to 174 MHz	421 to 512MHz
Transient Frequency Behavior for Equipment Designed to Operate on 25 KHz Channels			
t ₁ ⁴	± 25.0 KHz	5.0 ms	10.0 ms
t ₂	± 12.5 KHz	20.0 ms	25.0 ms
t ₃ ⁴	± 25.0 KHz	5.0 ms	10.0 ms
Transient Frequency Behavior for Equipment Designed to Operate on 12.5 KHz Channels			
t ₁ ⁴	± 12.5 KHz	5.0 ms	10.0 ms
t ₂	± 6.25 KHz	20.0 ms	25.0 ms
t ₃ ⁴	± 12.5 KHz	5.0 ms	10.0 ms
Transient Frequency Behavior for Equipment Designed to Operate on 6.25 KHz Channels			
t ₁ ⁴	±6.25 KHz	5.0 ms	10.0 ms
t ₂	±3.125 KHz	20.0 ms	25.0 ms
t ₃ ⁴	±6.25 KHz	5.0 ms	10.0 ms

- t_{on} is the instant when a 1 KHz test signal is completely suppressed, including any capture time due to phasing.
t₁ is the time period immediately following t_{on}.
t₂ is the time period immediately following t₁.
t₃ is the time period from the instant when the transmitter is turned off until t_{off}.
t_{off} is the instant when the 1 KHz test signal starts to rise.
- During the time from the end of t₂ to the beginning of t₃, the frequency difference must not exceed the limits specified in § 90.213.
- Difference between the actual transmitter frequency and the assigned transmitter frequency.
- If the transmitter carrier output power rating is 4 Watts or less, the frequency difference during this time period may exceed the maximum frequency difference for this time period.

5.9.2. Method of Measurements

Refer to Section 7.6 of this test report and ANSI/TIA/EIA-603-B-2002, Section 2.2.19.

5.9.3. Test Arrangement

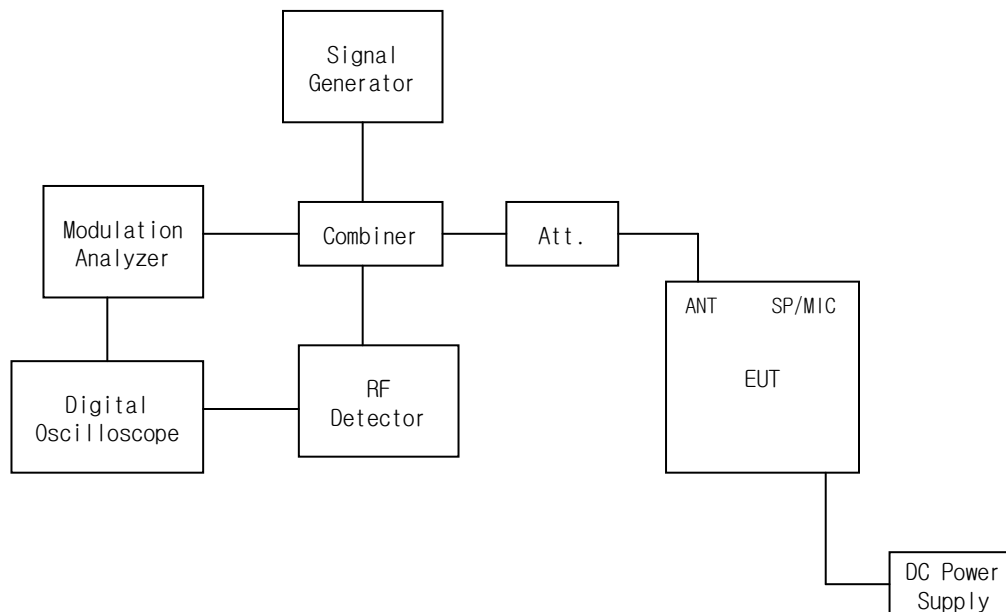

5.9.4. Test Equipment List

Test Instruments	Manufacturer	Model No.	Serial No.	Frequency Range	Calibration Due Date
Modulation Analyzer	Hewlett Packard	8910B	3226A04606	150 kHz – 1300 MHz	Dec 09, 2010
RF Communications Test Set	Hewlett Packard	8920B	US39064699	250 kHz – 1 GHz	Oct 26, 2010
DC Block	Hewlett Packard	11742A	12460	0.045 – 26.5 GHz	Inhouse calibrated at tests
Attenuator	Weinschel	48-30-34	BM5354	DC - 18 GHz	Inhouse calibrated at tests
DC Power Supply	Hewlett Packard	Harrison 6439B	0K0822	0-60V, 15A	N/A
RF Detector	Narda	503A-03	0105	0.01-18 GHz	Inhouse calibrated at tests
Infinium Oscilloscope	Hewlett Packard	54810A	US38380192	500 MHz, 1 GSa/s	May 31, 2011
Signal Generator	Hewlett Packard	83752B	3610A00457	0.01-20 GHz	Oct 19, 2011
Combiner	Mini-Circuits	15542	105	1 MHz – 1 GHz	Inhouse calibrated at tests

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: yic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: ICOM-240F90
September 9, 2010

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.9.5. Test Data

5.9.5.1. Transient Frequency Behavior for 25 KHz Channel Spacing

Plot # 25.:


Transient Frequency Behavior

Carrier Frequency: 406.2 MHz

Channel Spacing: 25 KHz

Power: 45 W

Description: Switch on condition t_{on} , t_1 , and t_2

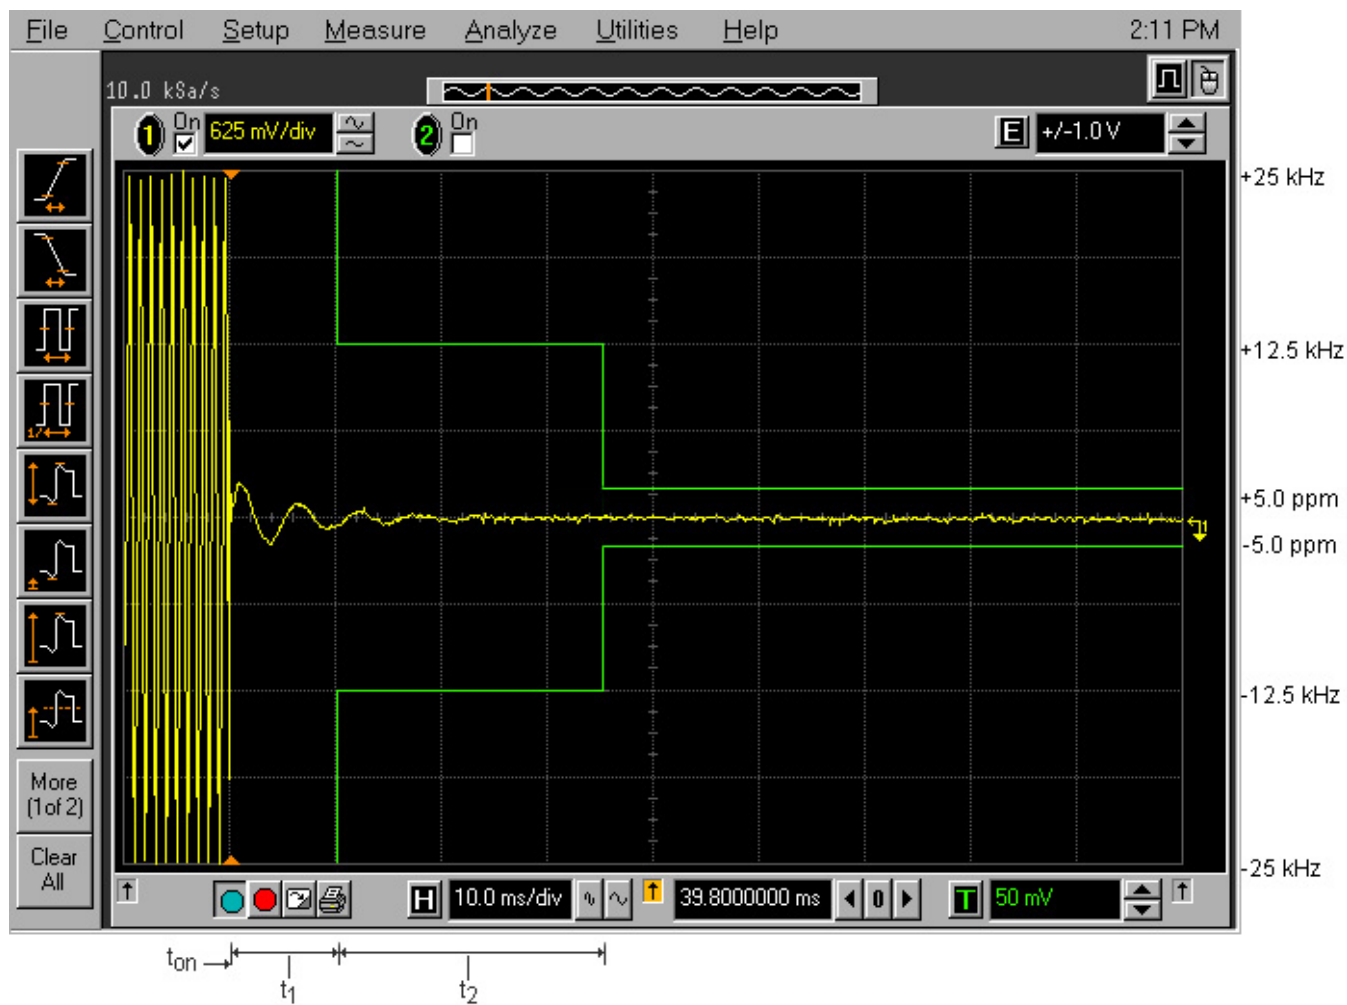

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: ICOM-240F90
September 9, 2010

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot # 26.:


Transient Frequency Behavior

Carrier Frequency: 406.2 MHz

Channel Spacing: 25 KHz

Power: 45 W

Description: Switch off condition t_3 , t_{off}

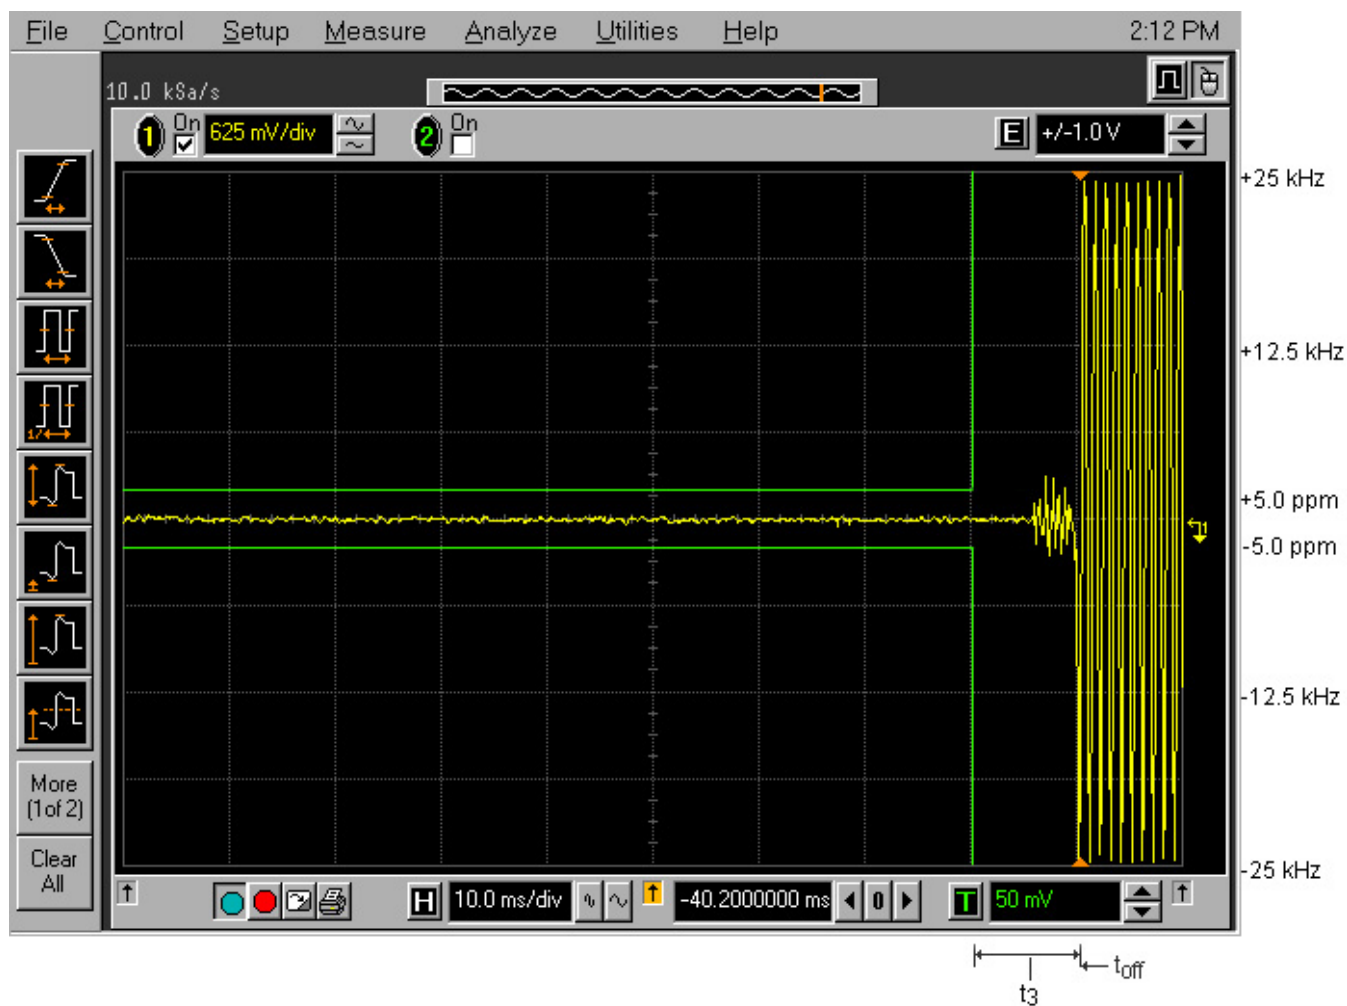

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: ICOM-240F90
September 9, 2010

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.9.5.2. Transient Frequency Behavior for 12.5 KHz Channel Spacing

Plot # 27.:


Transient Frequency Behavior

Carrier Frequency: 406.2 MHz

Channel Spacing: 12.5 KHz

Power: 45 W

Description: Switch on condition t_{on} , t_1 , and t_2

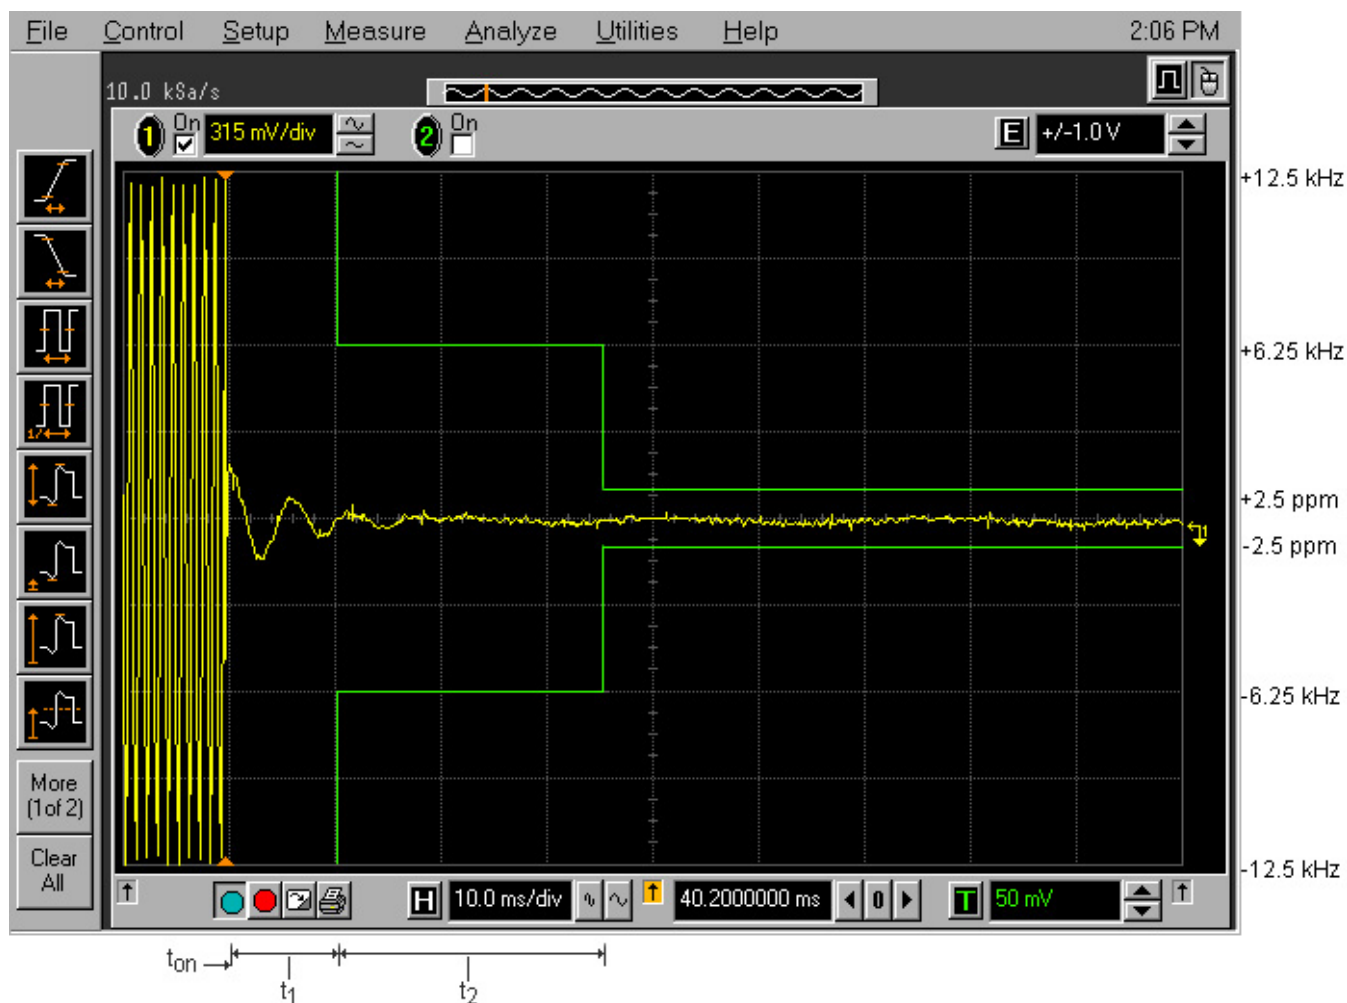

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: ICOM-240F90
September 9, 2010

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot # 28.:


Transient Frequency Behavior

Carrier Frequency: 406.2 MHz

Channel Spacing: 12.5 KHz

Power: 45 W

Description: Switch off condition t_3 , t_{off}

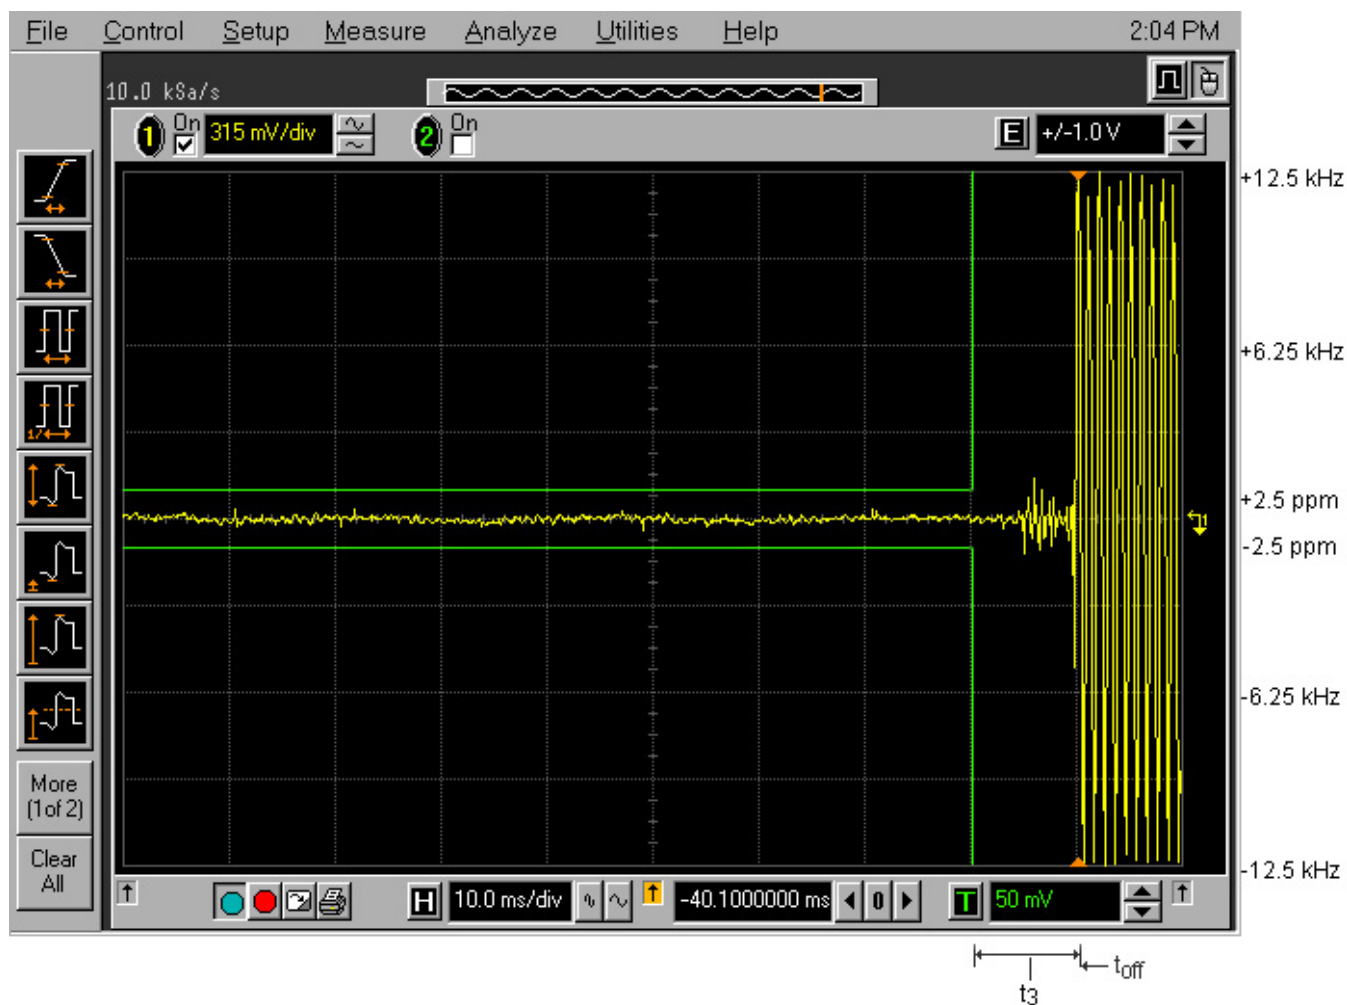**ULTRATECH GROUP OF LABS**

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: ICOM-240F90

September 9, 2010

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

EXHIBIT 6. Test Instruments & MEASUREMENT UNCERTAINTY (k=2, 95% Confidence Level)

The measurement uncertainties stated were calculated in accordance with the requirements of CISPR 16-4-2 @ IEC:2003 and JCGM 100:2008 (GUM 1995) – Guide to the Expression of Uncertainty in Measurement.

Radiated Emission Measurement Uncertainty

	Radiated Emission Measurement Uncertainty @ 3m, Horizontal (30-1000 MHz):	Measured	Limit
u_c	Combined standard uncertainty: $u_c(y) = \sqrt{\sum_{i=1}^m u_i^2(y)}$	± 2.15	± 2.6
U	Expanded uncertainty U: $U = 2u_c(y)$	± 4.30	± 5.2

	Radiated Emission Measurement Uncertainty @ 3m, Vertical (30-1000 MHz):	Measured	Limit
u_c	Combined standard uncertainty: $u_c(y) = \sqrt{\sum_{i=1}^m u_i^2(y)}$	± 2.39	± 2.6
U	Expanded uncertainty U: $U = 2u_c(y)$	± 4.78	± 5.2

	Radiated Emission Measurement Uncertainty @ 3 m, Horizontal & Vertical (1 – 18 GHz):	Measured	Limit
u_c	Combined standard uncertainty: $u_c(y) = \sqrt{\sum_{i=1}^m u_i^2(y)}$	± 1.87	Under consideration
U	Expanded uncertainty U: $U = 2u_c(y)$	± 3.75	Under consideration

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: ICOM-240F90
September 9, 2010

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

EXHIBIT 7. MEASUREMENT METHODS

7.1. CONDUCTED POWER MEASUREMENTS

- The following shall be applied to the combination(s) of the radio device and its intended antenna(e).
- If the RF level is user adjustable, all measurements shall be made with the highest power level available to the user for that combination.
- The following method of measurement shall apply to both conducted and radiated measurements.
- The radiated measurements are performed at the Ultratech Calibrated Open Field Test Site.
- The measurement shall be performed using normal operation of the equipment with modulation.

Test procedure shall be as follows:

Step 1: Duty Cycle measurements if the transmitter's transmission is transient

- Using a EMI Receiver with the frequency span set to 0 Hz and the sweep time set at a suitable value to capture the envelope peaks and the duty cycle of the transmitter output signal;
- The duty cycle of the transmitter, $x = \text{Tx on} / (\text{Tx on} + \text{Tx off})$ with $0 < x < 1$, is measure and recorded in the test report. For the purpose of testing, the equipment shall be operated with a duty cycle that is equal or more than 0.1.


Step 2: Calculation of Average EIRP. See Figure 1

- The average output power of the transmitter shall be determined using a wideband, calibrated RF average power meter with the power sensor with an integration period that exceeds the repetition period of the transmitter by a factor 5 or more. The observed value shall be recorded as "A" (in dBm);
- The e.i.r.p. shall be calculated from the above measured power output "A", the observed duty cycle x, and the applicable antenna assembly gain "G" in dBi, according to the formula:

$$\text{EIRP} = A + G + 10\log(1/x)$$

{X = 1 for continuous transmission => $10\log(1/x) = 0$ dB}

Figure 1.

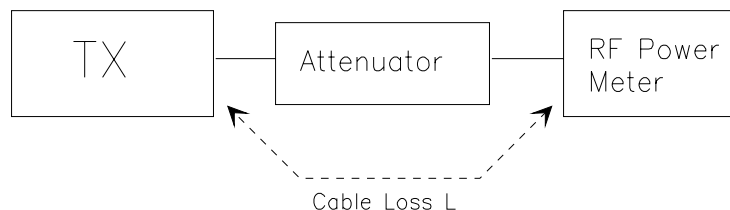

7.2. RADIATED POWER MEASUREMENTS (ERP & EIRP) USING SUBSTITUTION METHOD

7.2.1. MAXIMIZING RF EMISSION LEVEL (E-FIELD)

- (a) The measurements were performed with full rf output power and modulation.
- (b) Test was performed at listed 3m open area test site (listed with FCC, IC, ITI, NVLAP, ACA & VCCI).
- (c) The transmitter under test was placed at the specified height on a non-conducting turntable (80 cm height)
- (d) The BICONILOG antenna (20 MHz to 1 GHz) or HORN antenna (1 GHz to 18 GHz) was used for measuring.
- (e) Load an appropriate correction factors file in EMI Receiver for correcting the field strength reading level

Total Correction Factor recorded in the EMI Receiver = Cable Loss + Antenna Factor
 $E \text{ (dB}\mu\text{V/m)} = \text{Reading (dB}\mu\text{V)} + \text{Total Correction Factor (dB/m)}$

- (f) Set the EMI Receiver and #2 as follows:

Center Frequency: test frequency
Resolution BW: 100 KHz
Video BW: same
Detector Mode: positive
Average: off
Span: 3 x the signal bandwidth

- (g) The test antenna was lowered or raised from 1 to 4 meters until the maximum signal level was detected.
- (h) The transmitter was rotated through 360° about a vertical axis until a higher maximum signal was received.
- (i) The test antenna was lowered or raised again from 1 to 4 meters until a maximum was obtained. This level was recorded.
- (j) The recorded reading was corrected to the true field strength level by adding the antenna factor, cable loss and subtracting the pre-amplifier gain.
- (k) The above steps were repeated with both transmitters' antenna and test receiving antenna placed in vertical and horizontal polarization. Both readings with the antennas placed in vertical and horizontal polarization shall be recorded.
- (l) Repeat for all different test signal frequencies.

7.2.2. Measuring the EIRP of Spurious/Harmonic Emissions using Substitution Method

- (a) Set the EMI Receiver (for measuring E-Field) and Receiver #2 (for measuring EIRP) as follows:

Center Frequency: equal to the signal source
Resolution BW: 100 KHz
Video BW: VBW > RBW
Detector Mode: positive
Average: off
Span: 3 x the signal bandwidth

- (b) Load an appropriate correction factors file in EMI Receiver for correcting the field strength reading level

Total Correction Factor recorded in the EMI Receiver = Cable Loss + Antenna Factor
 $E \text{ (dBuV/m)} = \text{Reading (dBuV)} + \text{Total Correction Factor (dB/m)}$

- (c) Select the frequency and E-field levels obtained in the Section 8.2.1 for ERP/EIRP measurements.
(d) Substitute the EUT by a signal generator and one of the following transmitting antenna (substitution antenna):
 - ◆ DIPOLE antenna for frequency from 30-1000 MHz or
 - ◆ HORN antenna for frequency above 1 GHz }.(e) Mount the transmitting antenna at 1.5 meter high from the ground plane.
(f) Use one of the following antenna as a receiving antenna:
 - ◆ DIPOLE antenna for frequency from 30-1000 MHz or
 - ◆ HORN antenna for frequency above 1 GHz }.(g) If the DIPOLE antenna is used, tune it's elements to the frequency as specified in the calibration manual.
(h) Adjust both transmitting and receiving antenna in a VERTICAL polarization.
(i) Tune the EMI Receivers to the test frequency.
(j) Lower or raise the test antenna from 1 to 4 meters until the maximum signal level was detected.
(k) The transmitter was rotated through 360° about a vertical axis until a higher maximum signal was received.
(l) Lower or raise the test antenna from 1 to 4 meters until the maximum signal level was detected.
(m) Adjust input signal to the substitution antenna until an equal or a known related level to that detected from the transmitter was obtained in the test receiver.
(n) Record the power level read from the Average Power Meter and calculate the ERP/EIRP as follows:

$$P = P1 - L1 = (P2 + L2) - L1 = P3 + A + L2 - L1$$

$$\text{EIRP} = P + G1 = P3 + L2 - L1 + A + G1$$

$$\text{ERP} = \text{EIRP} - 2.15 \text{ dB}$$

$$\text{Total Correction factor in EMI Receiver \# 2} = L2 - L1 + G1$$

Where:

P:	Actual RF Power fed into the substitution antenna port after corrected.
P1:	Power output from the signal generator
P2:	Power measured at attenuator A input
P3:	Power reading on the Average Power Meter
EIRP:	EIRP after correction
ERP:	ERP after correction

- (o) Adjust both transmitting and receiving antenna in a HORIZONTAL polarization, then repeat step (k) to (o)
(p) Repeat step (d) to (o) for different test frequency
(q) Repeat steps (c) to (j) with the substitution antenna oriented in horizontal polarization.
(r) Actual gain of the EUT's antenna is the difference of the measured EIRP and measured RF power at the RF port. Correct the antenna gain if necessary.

Figure 2


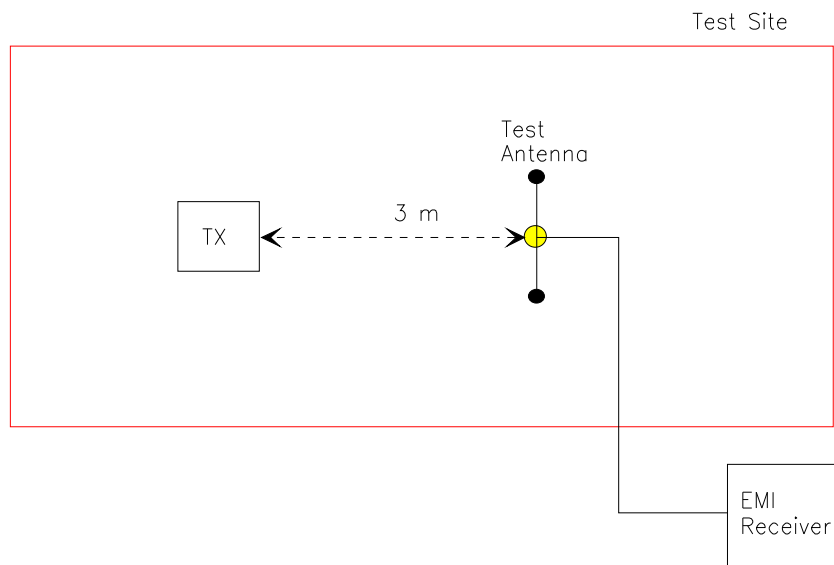


Figure 3

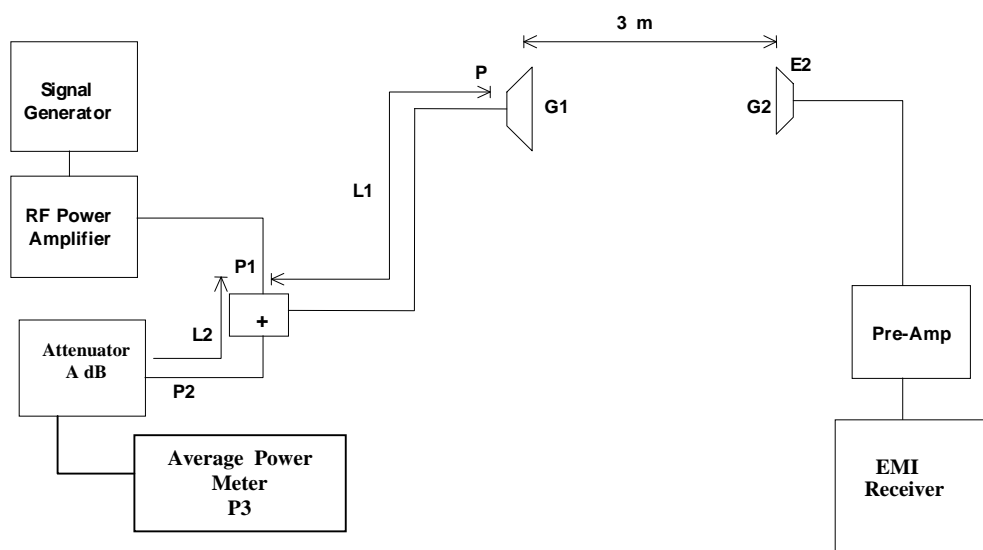

7.3. FREQUENCY STABILITY

Refer to FCC @ 2.1055.

- (a) The frequency stability shall be measured with variation of ambient temperature as follows: From -30 to +50 centigrade except that specified in subparagraph (2) & (3) of this paragraph.
- (b) Frequency measurements shall be made at extremes of the specified temperature range and at intervals of not more than 10 centigrade through the range. A period of time sufficient to stabilize all of the components of the oscillator circuit at each temperature level shall be allowed prior to frequency measurement. The short-term transient effects on the frequency of the transmitter due to keying (except for broadcast transmitters) and any heating element cycling normally occurring at each ambient temperature level also shall be shown. Only the portion or portions of the transmitter containing the frequency determining and stability circuitry need be subjected to the temperature variation test.
- (d) The frequency stability supply shall be measured with variation of primary supply voltage as follows:
 - (1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.
 - (2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.
 - (3) The supply voltage shall be measured at the input to the cable normally provide with the equipment, or at the power supply terminals if cables are not normally provided. Effects on frequency of transmitter keying (except for broadcast transmitters) and any heating element cycling at the nominal supply voltage and at each extreme also shall be shown.
- (e) When deemed necessary, the Commission may require tests of frequency stability under conditions in addition to those specifically set out in paragraphs (a), (b), (c) and (d) of this section. (For example, measurements showing the effect of proximity to large metal objects, or of various types of antennas, may be required for portable equipment).

7.4. EMISSION MASK

Voice or Digital Modulation Through a Voice Input Port @ 2.1049(c)(i): The transmitter was modulated by a 2.5 KHz tone signal at an input level 16 dB greater than that required to produce 50% modulation (e.g.: ± 2.5 KHz peak deviation at 1 KHz modulating frequency). The input level was established at the frequency of maximum response of the audio modulating circuit.

Digital Modulation Through a Data Input Port @ 2.1049(h): Transmitters employing digital modulation techniques - when modulated by an input signal such that its amplitude and symbol rate represent the maximum rated conditions under which the equipment will be operated. The signal shall be applied through any filter networks, pseudo-random generators or other devices required in normal service. Additionally, the Emission Masks shall be shown for operation with any devices used for modifying the spectrum when such devices are operational at the discretion of the user.

The following EMI Receiver bandwidth shall be used for measurement of Emission Mask/Out-of-Band Emission Measurements:

- (1) For 25 KHz Channel Spacing: RBW = 300 Hz
- (2) For 12.5 KHz or 6.25 KHz Channel Spacings: RBW = 100 Hz

The all cases the Video Bandwidth shall be equal or greater than the measuring bandwidth.

7.5. SPURIOUS EMISSIONS (CONDUCTED)

With transmitter modulation characteristics described in Out-of-Band Emissions measurements @ 2.1049, the transmitter spurious and harmonic emissions were scanned. The spurious and harmonic emissions were measured with the EMI Receiver controls set as RBW = 30 KHz minimum, VBW \geq RBW and SWEEP TIME = AUTO). The transmitter was operated at a full rated power output, and modulated as follows:

FCC 47 CFR 2.1057 - Frequency spectrum to be investigated: The spectrum was investigated from the lowest radio generated in the equipment up to at least the 10th harmonic of the carrier frequency or to the highest frequency practicable in the present state of the art of measuring techniques, whichever is lower. Particular attention should be paid to harmonics and subharmonics of the carrier frequency. Radiation at the frequencies of multiplier stages should be checked. The amplitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be reported.

FCC 47 CFR 2.1051 - Spurious Emissions at Antenna Terminal: The radio frequency voltage or powers generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. Curves or equivalent data shall show the magnitude of the harmonic and other spurious emission that can be detected when the equipment is operated under the conditions specified in 2.1049 as appropriate. The magnitude of spurious emissions, which are attenuated more than 20 dB below the permissible value, need not be specified.

7.6. TRANSIENT FREQUENCY BEHAVIOR

1. Connect the transmitter under tests as shown in the above block diagram
2. Set the signal generator to the assigned frequency and modulate with a 1 KHz tone at ± 12.5 KHz deviation and its output level to be 50 dB below the transmitter rf output at the test receiver end.
3. Set the horizontal sweep rate on the storage scope to 10 milliseconds per division and adjust the display to continuously view the 1000 Hz tone from the Demodulator Output Port (DOP) of the Test Receiver. Adjust the vertical scale amplitude control of the scope to display the 1000 Hz at ± 4 divisions vertical Center at the display.
4. Adjust the scope so it will trigger on an increasing magnitude from the RF trigger signal of the transmitter under test when the transmitter was turned on. Set the controls to store the display.
5. The output at the DOP, due to the change in the ratio of the power between the signal generator input power and transmitter output power will, because of the capture effect of the test receiver, produce a change in display: For the first part of the sweep it will show the 1 KHz test signal. Then once the receiver's demodulator has been captured by the transmitter power, the display will show the frequency difference from the assigned frequency to the actual transmitter frequency versus time. The instant when the 1 KHz test signal is completely suppressed (including any capture time due to phasing) is considered to be t_{on} . The trace should be maintained within the allowed divisions during the period t_1 and t_2 .
6. During the time from the end of t_2 to the beginning of t_3 the frequency difference should not exceed the limits set by the FCC in Part 90.214 and the outlined in the Carrier Frequency Stability sections. The allowed limit is equal to FCC frequency tolerance limits specified in FCC 90.213.
7. Repeat the above steps when the transmitter was turned off for measuring t_3 .