


ENGINEERING TEST REPORT



VHF Marine Transceiver
Model No.: IC-M24
FCC ID: AFJ334000

Applicant:

ICOM Incorporated
1-1-32, Kamiminami,
Hirano-ku, Osaka
Japan, 547-0003

Tested in Accordance With

Federal Communications Commission (FCC)
47 CFR, Part 2, Part 80 (Marine in 156.025-157.425 MHz)

UltraTech's File No.: ICOM-265_FCC80

This Test report is Issued under the Authority of
Tri M. Luu, Professional Engineer,
Vice President of Engineering
UltraTech Group of Labs

Date: January 11, 2011

Report Prepared by: Dharmajit Solanki

Tested by: Wayne Wu, RF Technician

Issued Date: January 11, 2011

Test Dates: December 28, 2010 – January 5, 2011

*The results in this Test Report apply only to the sample(s) tested, and the sample tested is randomly selected.
This report must not be used by the client to claim product endorsement by NVLAP or any agency of the US Government.*

UltraTech

3000 Bristol Circle, Oakville, Ontario, Canada, L6H 6G4
Tel.: (905) 829-1570 Fax.: (905) 829-8050
Website: www.ultratech-labs.com, Email: vic@ultratech-labs.com, Email: tri@ultratech-labs.com

FCC

91038



1309



46390-2049



NVLAP Lab Code
200093-0



SL2-IN-E-1119R



Korea KCC-RRL
CA2049

TABLE OF CONTENTS

EXHIBIT 1. INTRODUCTION	1
1.1. SCOPE.....	1
1.2. RELATED SUBMITTAL(S)/GRANT(S).....	1
1.3. NORMATIVE REFERENCES	1
EXHIBIT 2. PERFORMANCE ASSESSMENT	2
2.1. CLIENT INFORMATION	2
2.2. EQUIPMENT UNDER TEST (EUT) INFORMATION.....	2
2.3. EUT'S TECHNICAL SPECIFICATIONS	3
2.4. LIST OF EUT'S PORTS	3
2.5. ANCILLARY EQUIPMENT	3
EXHIBIT 3. EUT OPERATING CONDITIONS AND CONFIGURATIONS DURING TESTS	4
3.1. CLIMATE TEST CONDITIONS	4
3.2. OPERATIONAL TEST CONDITIONS & ARRANGEMENT FOR TEST SIGNALS	4
EXHIBIT 4. SUMMARY OF TEST RESULTS	5
4.1. LOCATION OF TESTS	5
4.2. APPLICABILITY & SUMMARY OF EMC EMISSION TEST RESULTS	5
4.3. MODIFICATIONS INCORPORATED IN THE EUT FOR COMPLIANCE PURPOSES.....	5
4.4. DEVIATION OF STANDARD TEST PROCEDURES	5
EXHIBIT 5. TEST DATA	6
5.1. RF POWER OUTPUT [§ 2.1046 & 80.215]	6
5.2. FREQUENCY STABILITY [§ 80.209 & § 2.1055]	8
5.3. MODULATION LIMITING [§ 80.213 & § 2.1047(B)].....	10
5.4. FREQUENCY RESPONSE OF THE AUDIO LOW PASS FILTER [§ 80.213(E) & 2.1047(A)].....	13
5.5. EMISSION MASK [§ 80.205, § 80.211 & § 2.1049].....	16
5.6. TRANSMITTER ANTENNA POWER SPURIOUS/HARMONIC CONDUCTED EMISSIONS [§ 80.211(F)(3)].	28
5.7. TRANSMITTER SPURIOUS/HARMONIC RADIATED EMISSIONS [§ 80.211(F)(3)]	37
EXHIBIT 6. TEST INSTRUMENTS & MEASUREMENT UNCERTAINTY (K=2, 95% CONFIDENCE LEVEL) 39	
6.1. RADIATED EMISSION MEASUREMENT UNCERTAINTY	39
EXHIBIT 7. MEASUREMENT METHODS	40
7.1. CONDUCTED POWER MEASUREMENTS.....	40
7.2. RADIATED POWER MEASUREMENTS (ERP & EIRP) USING SUBSTITUTION METHOD	41
7.3. FREQUENCY STABILITY	44
7.4. EMISSION MASK.....	45
7.5. SPURIOUS EMISSIONS (CONDUCTED)	45

EXHIBIT 1. INTRODUCTION

1.1. SCOPE

Reference:	FCC Parts 2 and 80
Title:	Telecommunication - Code of Federal Regulations, 47CFR, Parts 2 and 80
Purpose of Test:	To gain FCC Equipment Authorization for Radio operating in the frequency bands, 156.025-157.425 MHz (Marine)
Test Procedures:	Both conducted and radiated emissions measurements were conducted in accordance with TIA/EIA Standard TIA/EIA-603 (01-Nov-2002) – Land Mobile FM or PM Communications Equipment Measurement and performance Standards.
Categories of Station:	Ship station transceiver operating in 156.025-157.425 MHz band

1.2. RELATED SUBMITTAL(S)/GRANT(S)

None.

1.3. NORMATIVE REFERENCES

Publication	Year	Title
FCC CFR Parts 0-19, 80-End	2009	Code of Federal Regulations – Telecommunication
ANSI C63.4	2003	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
CISPR 16-1	2003	Specification for Radio Disturbance and Immunity measuring apparatus and methods
TIA-603-B	2002	Land Mobile FM or PM Communications Equipment, Measurement and Performance Standards.

EXHIBIT 2. PERFORMANCE ASSESSMENT

2.1. CLIENT INFORMATION

APPLICANT	
Name:	Icom Incorporated
Address:	1-1-32, Kamiminami Hirano-ku, Oaska Japan, 547-0003
Contact Person:	Mr. Takayuki Watanabe Phone #: +81-66-793-5302 Fax #: +81-66-793-0013 Email Address: export@icom.co.jp

MANUFACTURER	
Name:	Icom Incorporated
Address:	1-1-32, Kamiminami Hirano-ku, Oaska Japan, 547-0003
Contact Person:	Mr. Takayuki Watanabe Phone #: +81-66-793-5302 Fax #: +81-66-793-0013 Email Address: export@icom.co.jp

2.2. EQUIPMENT UNDER TEST (EUT) INFORMATION

The following information (with the exception of the Date of Receipt) has been supplied by the applicant.

Brand Name:	ICOM Incorporated
Product Name:	VHF Marine Transceiver
Model Name or Number:	IC-M24
Serial Number:	00000030
Type of Equipment:	Licensed Non-Broadcast Hand-held Transceiver
Power Supply Requirement:	Rechargeable Li-Ion battery pack (M/N:BP-266, 3.7V,1500 mAh)
Transmitting/Receiving Antenna Type:	Non-integral
Primary User Functions of EUT:	Voice wireless communication for Marine in 156.025-157.425 MHz band.

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: ICOM-265_FCC80
January 11, 2011

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

2.3. EUT'S TECHNICAL SPECIFICATIONS

TRANSMITTER	
Equipment Type:	Portable
Intended Operating Environment:	Marine
Power Supply Requirement:	3.7 V DC, 1500 mAh
RF Output Power Rating:	5 Watts (High) and 1 Watt (Low)
Operating Frequency Range:	156.025-157.425 MHz (Marine)
RF Output Impedance:	50 Ohms
Channel Spacing:	25 kHz
Modulation Employed	FM
Occupied Bandwidth (99%):	15.09 kHz
Emission Designation*:	16K0G3E
Antenna Type:	¼ Helical whip antenna (M/N: FA-SC58V, 156-157.5 MHz, -15.5 dBi, Green ring)

For an average case of commercial telephony, the Necessary Bandwidth is calculated as follows:

Channel Spacing = 25 KHz, D = 5 KHz max, K = 1, M = 3 KHz

$B_n = 2M + 2DK = 2(3) + 2(5)(1) = \mathbf{16\ KHz}$

Emission designation: 16K0G3E

2.4. LIST OF EUT'S PORTS

Port Number	EUT's Port Description	Number of Identical Ports	Connector Type	Cable Type (Shielded/Non-shielded)
1	Antenna	1	J type	N/A
2	DC Jack	1	Plug-in Jack	N/A

2.5. ANCILLARY EQUIPMENT

None.

EXHIBIT 3. EUT OPERATING CONDITIONS AND CONFIGURATIONS DURING TESTS

3.1. CLIMATE TEST CONDITIONS

The climate conditions of the test environment are as follows:

Temperature:	21°C
Humidity:	51%
Pressure:	102 kPa
Power input source:	4.2 VDC

3.2. OPERATIONAL TEST CONDITIONS & ARRANGEMENT FOR TEST SIGNALS

Operating Modes:	The transmitter was operated in a continuous transmission mode with the carrier modulated as specified in the Test Data.
Special Test Software:	N/A
Special Hardware Used:	N/A
Transmitter Test Antenna:	The EUT is tested with the transmitter antenna port terminated to a 50 Ohms RF Load.

Transmitter Test Signals	
Frequency Band(s):	<ul style="list-style-type: none"> ▪ 156.025 - 157.425 MHz
Test Frequency(ies): (Near lowest & near highest frequencies in the frequency range of operation.)	<ul style="list-style-type: none"> ▪ 156.025 and 157.425 MHz
Transmitter Wanted Output Test Signals:	
<ul style="list-style-type: none"> • Transmitter Power (measured maximum output power): • Normal Test Modulation: • Modulating signal source: 	<p>5 Watts High, 1 Watt Low</p> <p>Variable reactance frequency modulation</p> <p>External</p>

EXHIBIT 4. SUMMARY OF TEST RESULTS

4.1. LOCATION OF TESTS

All of the measurements described in this report were performed at Ultratech Group of Labs located in the city of Oakville, Province of Ontario, Canada.

- Radiated Emissions were performed at the Ultratech's 3-10 TDK Semi-Anechoic Chamber situated in the Town of Oakville, province of Ontario. This test site been calibrated in accordance with ANSI C63.4, and found to be in compliance with the requirements of Sec. 2.948 of the FCC Rules. The descriptions and site measurement data of the Oakville 3-10 TDK Semi-Anechoic Chamber has been filed with FCC office (FCC File No.: 91038) and Industry Canada office (Industry Canada File No.: 2049A-3). Expiry Date: 2011-05-01.

4.2. APPLICABILITY & SUMMARY OF EMC EMISSION TEST RESULTS

FCC Section(s)	Test Requirements	Applicability (Yes/No)
80.215 & 2.1046	RF Power Output	Yes
1.1307, 1.1310, 2.1091 & 2.1093	RF Exposure Limit	Yes
80.209 & 2.1055	Frequency Stability	Yes
80.213(e) & 2.1047(a)	Audio Frequency Response	Yes
80.213 & 2.1047(b)	Modulation Limiting	Yes
80.205, 80.211(f) & 2.1049	Emission Limitation / Emission Mask	Yes
80.211(f)(3), 2.1051 & 2.1057	Emission Limits - Spurious Emissions at Antenna Terminal	Yes
80.211(f)(3), 2.1053 & 2.1057	Emission Limits - Field Strength of Spurious Emissions	Yes
80.217	Suppression of Interference aboard ships	Yes (complies with FCC Part 15, Subpart B)
VHF Marine Transceiver, Model No.: IC-M24, by ICOM Incorporated has also been tested and found to comply with FCC Part 15, Subpart B - Radio Receivers and Class B Digital Devices . The engineering test report has been documented and it is available upon FCC request.		

4.3. MODIFICATIONS INCORPORATED IN THE EUT FOR COMPLIANCE PURPOSES

None.

4.4. DEVIATION OF STANDARD TEST PROCEDURES

None.

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: ICOM-265_FCC80
January 11, 2011

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

EXHIBIT 5. TEST DATA

5.1. RF POWER OUTPUT [§ 2.1046 & 80.215]

5.1.1. Limits

§ 80.215- For 156-162 MHz Band:


- Hand-held portable transmitters: 10W

5.1.2. Method of Measurements

Refer to 7.1 (Conducted) and 7.2 (Radiated) in this test report for test procedures and test setup.

5.1.3. Test Arrangement

Power at RF Power Output Terminals

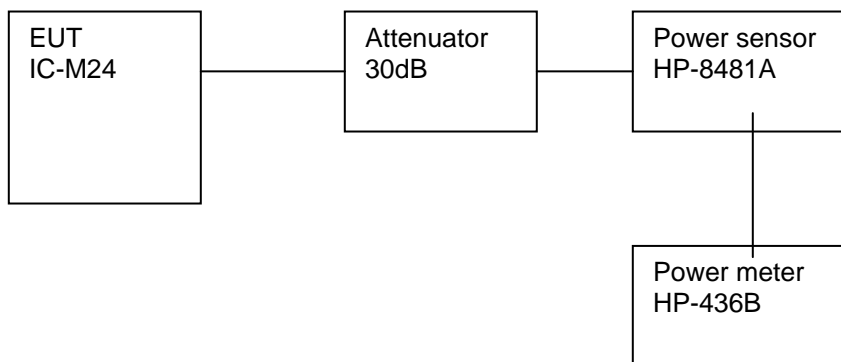

5.1.4. Test Equipment List

Test Instruments	Manufacturer	Model No.	Serial No.	Frequency Range	Calibration Due Date
Power Meter	Hewlett Packard	436B	2347A17246	10 kHz – 50 GHz, sensor dependent	May 20, 2011
Power Sensor	Hewlett Packard	8481A	2702A68983	10 MHz – 18 GHz	July 21, 2011
DC Block	Hewlett Packard	11742A	12460	0.045 – 26.5 GHz	Inhouse calibrated at tests
Attenuator	Pasternack	PE7019-10	-	DC - 18 GHz	Inhouse calibrated at tests
Attenuator	Pasternack	PE7019-20	-	DC - 18 GHz	Inhouse calibrated at tests
DC Power Supply	Tenma Laboratory	72-7295	490300297	0-18V, 10A	N/A

5.1.5. Test Data

Transmitter Channel Output	Fundamental Frequency (MHz)	Measured (Average) Conducted Power (Watts)	Power Rating (Watts)
Power Setting: High			
Lowest	156.025	4.62	5.0
Highest	157.425	4.60	5.0
Power Setting: Low			
Lowest	156.025	0.82	1.0
Highest	157.425	0.89	1.0

5.2. FREQUENCY STABILITY [§ 80.209 & § 2.1055]

5.2.1. Limits

§ 80.209

Operating Frequency Band (MHz)	Coast Stations		Ship Stations
	Below 3 W	3 to 100 W	
156-162	10 ppm	¹ 5 ppm	² 10 ppm


1 For transmitters operated at private coast stations with antenna heights less than 6 meters (20 feet) above ground and output power of 25 Watts or less the frequency tolerance is 10 parts in 10⁶.

2 For transmitters in the radiolocation and associated telecommand service operating on 154.585 MHz, 159.480 MHz, 160.725 MHz and 160.785 MHz the frequency tolerance is 15 parts in 10⁶.

5.2.2. Method of Measurements

Refer to 7.3 of this report for measurement details

5.2.3. Test Arrangement

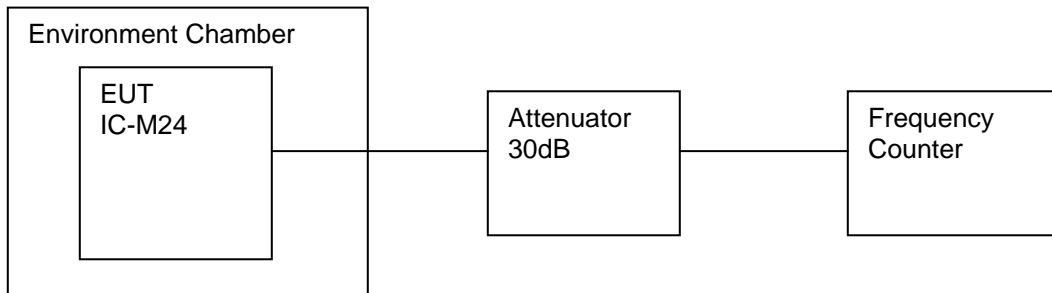

5.2.4. Test Equipment List

Test Instruments	Manufacturer	Model No.	Serial No.	Frequency Range	Calibration Due Date
Frequency Counter	EIP	545A	02683	10 Hz – 18 GHz	Jan 11, 2011
Attenuator	Pasternack	PE7019-10	-	DC - 18 GHz	Inhouse calibrated at tests
Attenuator	Pasternack	PE7019-20	-	DC - 18 GHz	Inhouse calibrated at tests
DC Power Supply	Tenma Laboratory	72-7295	490300297	0-18V, 10A	N/A
Temperature & Humidity Chamber	Tenney	T5	72-6202	-40 °C – +80 °C range	July 30, 2010

5.2.5. Test Data

5.2.5.1. Frequency Tolerance versus Ambient Temperature

Product Name:	VHF Marine Transceiver
Model No.:	IC-M24
Center Frequency:	156.025 MHz
Full Power Level:	36.65 dBm
Frequency Tolerance Limit (Worst Case):	± 10 ppm or 1560.25 Hz
Max. Frequency Tolerance Measured:	-638 Hz or 4.1 ppm
Input Voltage Rating:	4.2 VDC

CENTER FREQUENCY & RF POWER OUTPUT VARIATION			
Ambient Temperature (°C)	Supply Voltage (Nominal) 4.2 Volts	Supply Voltage (Minimum before switch-off) 3.6 Volts	Supply Voltage (115% of Nominal) 4.8 Volts
	Hz	Hz	Hz
-20	-622	N/A	N/A
-10	-631	N/A	N/A
0	-638	N/A	N/A
+10	-236	N/A	N/A
+20	169	173	154
+30	145	N/A	N/A
+40	200	N/A	N/A
+50	383	N/A	N/A
+60	161	N/A	N/A

5.3. MODULATION LIMITING [§ 80.213 & § 2.1047(b)]

5.3.1. Limits

§ 80.213 (a)(2) When phase or frequency modulation is used in the 156-162 MHz band the peak modulation must be maintained between 75 and 100 percent. A frequency deviation of ± 5 kHz is defined as 100 percent peak modulation; and


§ 80.213 (b) Radiotelephone transmitters using A3E, F3E and G3E emission must have a modulation limiter to prevent any modulation over 100 percent. This requirement does not apply to survival craft transmitters, to transmitters that do not require a license or to transmitters whose output power does not exceed 3 watts.

§ 80.213 (d) Ship and coast station transmitters operating in the 156-162 MHz and 216-220 bands must be capable of proper operation with a frequency deviation that does not exceed ± 5 kHz when using any emission authorized by Sec. 80.207.

5.3.2. Method of Measurements

For Audio Transmitter:- The carrier frequency deviation was measured with the tone input signal level varied from 0 Vp to audio input rating level plus 16 dB at frequencies 0.1, 0.5, 1.0, 3.0 and 5.0 kHz. The maximum deviation was recorded at each test condition.

5.3.3. Test Arrangement

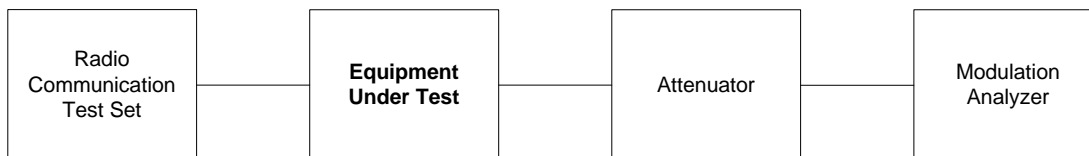

5.3.4. Test Equipment List

Test Instruments	Manufacturer	Model No.	Serial No.	Frequency Range	Calibration Due Date
Modulation Analyzer	Hewlett Packard	8910B	3226A04606	150kHz – 1.3GHz	Dec 21, 2011
RF Communication Test Set	Hewlett Packard	8920B	US39064699	30 MHz – 1 GHz	Oct 27, 2011
DC Block	Hewlett Packard	11742A	12460	0.045 – 26.5 GHz	Inhouse calibrated at tests
Attenuator	Pasternack	PE7019-10	-	DC - 18 GHz	Inhouse calibrated at tests
Attenuator	Pasternack	PE7019-20	-	DC - 18 GHz	Inhouse calibrated at tests
DC Power Supply	Tenma Laboratory	72-7295	490300297	0-18V, 10A	N/A

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: ICOM-265_FCC80
January 11, 2011

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.3.5. Test Data

5.3.5.1. Voice Modulation Limiting

MODULATING SIGNAL LEVEL	PEAK FREQUENCY DEVIATION (kHz) at the following modulating frequency:					MAXIMUM LIMIT (KHz)
	(mVrms)	0.1 KHz	0.5 KHz	1.0 KHz	3.0 KHz	
1	0.11	0.59	1.16	2.78	0.88	5.0
2	0.13	1.03	2.32	3.96	0.98	5.0
4	0.19	2.00	3.75	4.03	0.99	5.0
6	0.24	2.98	4.41	4.03	0.99	5.0
8	0.31	3.76	4.41	4.03	0.99	5.0
10	0.36	3.88	4.41	4.04	0.99	5.0
15	0.50	4.19	4.41	4.04	1.00	5.0
20	0.69	4.19	4.41	4.05	1.00	5.0
25	0.84	4.19	4.41	4.05	1.00	5.0
30	0.99	4.19	4.41	4.06	1.00	5.0
35	1.16	4.19	4.41	4.08	1.00	5.0
40	1.29	4.19	4.41	4.08	1.00	5.0
45	1.43	4.19	4.41	4.08	1.00	5.0
50	1.60	4.19	4.41	4.08	1.00	5.0
60	1.93	4.19	4.41	4.08	1.00	5.0
70	3.10	4.19	4.41	4.08	1.00	5.0
80	4.03	4.19	4.41	4.08	1.00	5.0
90	4.25	4.19	4.41	4.08	1.00	5.0
100	4.25	4.19	4.41	4.08	1.00	5.0

Voice Signal Input Level = STD MOD Level + 16 dB
= 24.63 dB(mVrms)
= 17.04 mVrms

Modulation Frequency (KHz)	Peak Deviation (KHz)	Maximum Limit (KHz)
0.1	0.61	5.0
0.2	2.03	5.0
0.4	4.02	5.0
0.6	4.24	5.0
0.8	4.28	5.0
1.0	4.41	5.0
1.2	4.38	5.0
1.4	4.36	5.0
1.6	4.37	5.0
1.8	4.41	5.0
2.0	4.43	5.0
2.5	4.45	5.0
3.0	4.05	5.0
3.5	3.15	5.0
4.0	2.19	5.0
4.5	1.46	5.0
5.0	1.00	5.0
6.0	0.51	5.0
7.0	0.28	5.0
8.0	0.17	5.0
9.0	0.10	5.0
10.0	0.08	5.0

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: ICOM-265_FCC80
January 11, 2011

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.4. FREQUENCY RESPONSE OF THE AUDIO LOW PASS FILTER [§ 80.213(e) & 2.1047(a)]


5.4.1. Limits

(e) Coast station transmitters operated in the 156–162 MHz band must be equipped with an audio low-pass filter. The filter must be installed between the modulation limiter and the modulated radio frequency stage. At frequencies between 3 kHz and 20 kHz it must have an attenuation greater than at 1 kHz by at least $60\log_{10}(f/3)$ dB where “f” is the audio frequency in kilohertz. At frequencies above 20 kHz the attenuation must be at least 50 dB greater than at 1 kHz

5.4.2. Method of Measurements

The rated audio input signal was applied to the input of the audio lowpass filter (or of all modulation stages) using an audio oscillator, this input signal level and its corresponding output signal were then measured and recorded using the FFT (Audio) spectrum analyzer. Tests were repeated at different audio signal frequencies from 0 to 50 kHz.

5.4.3. Test Arrangement

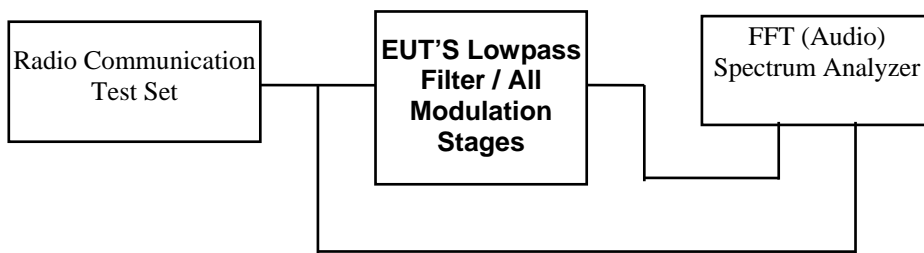

5.4.4. Test Equipment List

Test Instruments	Manufacturer	Model No.	Serial No.	Frequency Range	Calibration Due Date
Modulation Analyzer	Hewlett Packard	8910B	3226A04606	150kHz – 1.3GHz	Dec 21, 2011
RF Communication Test Set	Hewlett Packard	8920B	US39064699	30 MHz – 1 GHz	Oct 27, 2011
FFT (audio) EMI Receiver	Advantest	R9211E	82020336	10 MHz – 100 kHz, 1 MHz Input Impedance	Nov 12, 2011
DC Block	Hewlett Packard	11742A	12460	0.045 – 26.5 GHz	In-house calibrated at tests
Attenuator	Pasternack	PE7019-10	-	DC - 18 GHz	In-house calibrated at tests
Attenuator	Pasternack	PE7019-20	-	DC - 18 GHz	In-house calibrated at tests
DC Power Supply	Tenma Laboratory	72-7295	490300297	0-18V, 10A	N/A

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: ICOM-265_FCC80
January 11, 2011


All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.4.5. Test Data

Note: Due to the difficulty of measuring the Frequency Response of the internal lowpass filter, the Frequency Response of All Modulation States are performed to show the roll-off at 3 kHz in comparison with Industry Canada Limit for audio low-pass filter.

▪ **Minimum Attenuation Rel. to 1 kHz Attenuation (25 kHz channel spacing)**

Frequency (kHz)	Audio IN (dBV)	Audio OUT (dBV)	Attenuation (OUT - IN) (dB)	Attenuation wrt. 1 kHz (dB)	Recommended FCC Limit (dB)
0.1	-51.37	-24.85	26.5	-31.4	--
0.2	-51.37	-13.35	38.0	-19.9	--
0.4	-51.37	-3.13	48.2	-9.7	--
0.6	-51.37	1.28	52.7	-5.3	--
0.8	-51.37	4.26	55.6	-2.3	--
1.0	-51.37	6.57	57.9	0.0	--
1.5	-51.37	9.76	61.1	3.2	--
2.0	-51.37	10.22	61.6	3.7	--
2.5	-51.37	10.06	61.4	3.5	--
3.0	-51.37	9.12	60.5	2.6	0
3.5	-51.37	6.67	58.0	0.1	-4
4.0	-51.37	3.46	54.8	-3.1	-7
4.5	-51.37	-0.06	51.3	-6.6	-11
5.0	-51.37	-3.37	48.0	-9.9	-13
6.0	-51.37	-9.56	41.8	-16.1	-18
7.0	-51.37	-15.35	36.0	-21.9	-22
8.0	-51.37	-20.28	31.1	-26.9	-26
9.0	-51.37	-24.83	26.5	-31.4	-29
10.0	-51.37	-29.92	21.5	-36.5	-31
12.0	-51.37	-36.76	14.6	-43.3	-36
14.0	-51.37	-42.71	8.7	-49.3	-40
16.0	-51.37	-48.58	2.8	-55.2	-44
18.0	-51.37	-53.17	-1.8	-59.7	-47
20.0	-51.37	-59.46	-8.1	-66.0	-49
22.0	-51.37	-65.78	-14.4	-72.4	-50
25.0	-51.37	-70.00	-18.6	-76.6	-50
30.0	-51.37	-70.00	-18.6	-76.6	-50
35.0	-51.37	-70.00	-18.6	-76.6	-50
40.0	-51.37	-70.00	-18.6	-76.6	-50
45.0	-51.37	-70.00	-18.6	-76.6	-50
50.0	-51.37	-70.00	-18.6	-76.6	-50

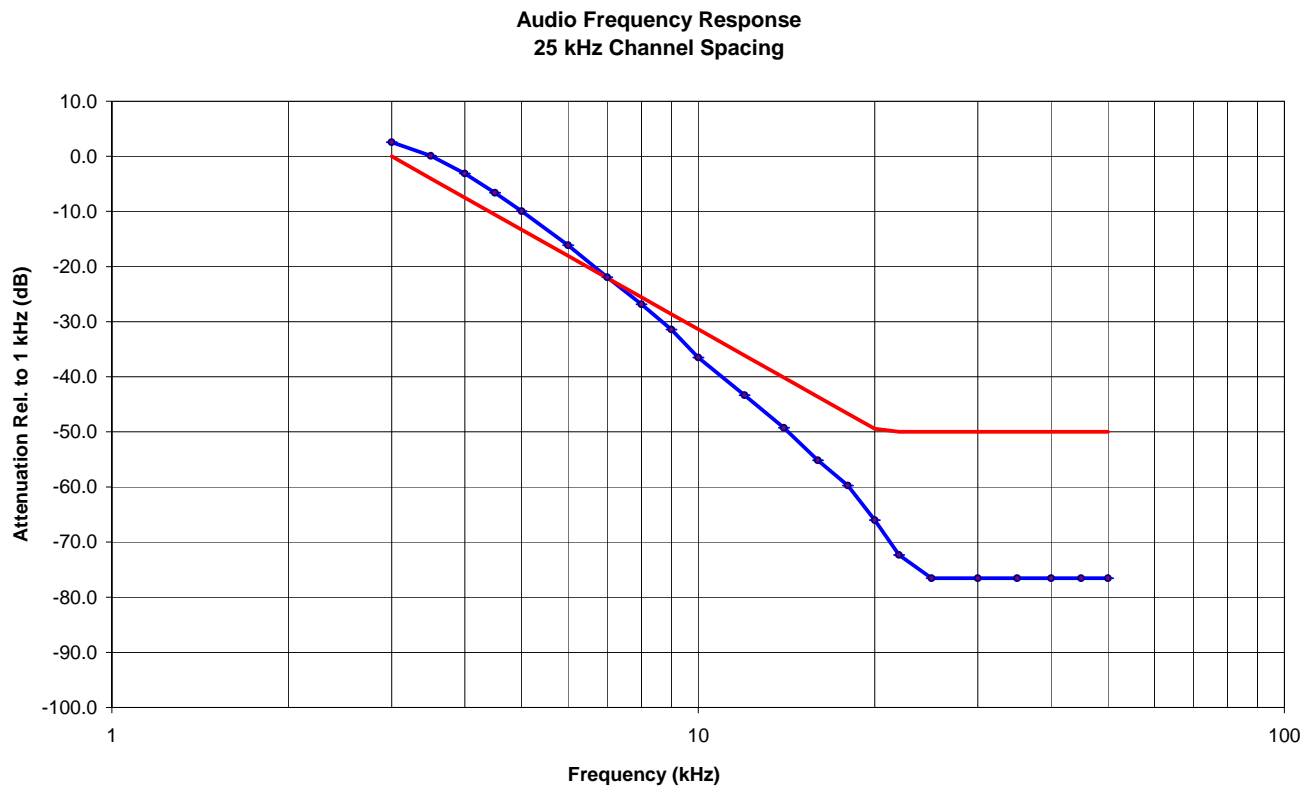

5.5. EMISSION MASK [§ 80.205, § 80.211 & § 2.1049]

5.5.1. Limits

Emissions shall be attenuated below the mean output power of the transmitter as follows:

§ 80.205 (a)

Emission designator	Maximum Authorized BW (KHz)	Channel Spacing (KHz)	Recommended Frequency Deviation (KHz)	FCC Applicable Mask
16K0G3E	20.0	25.0	5.0	See § 80.211 (f)

§ 80.211 (f)(1) On any frequency removed from the assigned frequency by more than 50 percent up to and including 100 percent of the authorized bandwidth: At least 25 dB;

§ 80.211 (f)(2) On any frequency removed from the assigned frequency by more than 100 percent up to and including 250 percent of the authorized bandwidth: At least 35 dB; and


§ 80.211 (f)(3) On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least 43 plus $10\log_{10}$ (mean power in watts) dB.

Remark: More stringent IC/RSS-182 maximum authorization bandwidth of 16 kHz for voice is applied instead of 20 kHz specified in Sec. 80.205 to verify and confirm compliance with both FCC and IC using single set of test data.

5.5.2. Method of Measurements

Refer to 7.4 of this report for measurement details

5.5.3. Test Arrangement



5.5.4. Test Equipment List

Test Instruments	Manufacturer	Model No.	Serial No.	Frequency Range	Calibration Due Date
Spectrum Analyzer	Rohde & Schwarz	FSEK 30	100077	20 Hz – 40 GHz	Aug 14, 2011
RF Communication Test Set	Hewlett Packard	8920B	US39064699	30 MHz – 1 GHz	Oct 27, 2011
DC Block	Hewlett Packard	11742A	12460	0.045 – 26.5 GHz	Inhouse calibrated at tests
Attenuator	Pasternack	PE7019-10	-	DC - 18 GHz	Inhouse calibrated at tests
Attenuator	Pasternack	PE7019-20	-	DC - 18 GHz	Inhouse calibrated at tests
DC Power Supply	Tenma Laboratory	72-7295	490300297	0-18V, 10A	N/A

5.5.5. Test Data


5.5.5.1. 99% Occupied Bandwidth

Frequency (MHz)	Channel Spacing (kHz)	Measured 99% OBW (kHz)	Authorized Bandwidth (kHz)
156.025	25.0	15.09	16
157.425	25.0	15.09	16

Remark: 99% Occupied Bandwidth measurements were done using the built-in auto function of the analyzer.

See the following plots (1 & 2) for details of measurements.

Plot # 1.:
 Occupied Bandwidth
 Carrier Frequency: 156.025 MHz
 Channel Spacing: 25.0 kHz
 Power: 5 W
 Modulation: G3E, 2.5 kHz sine wave

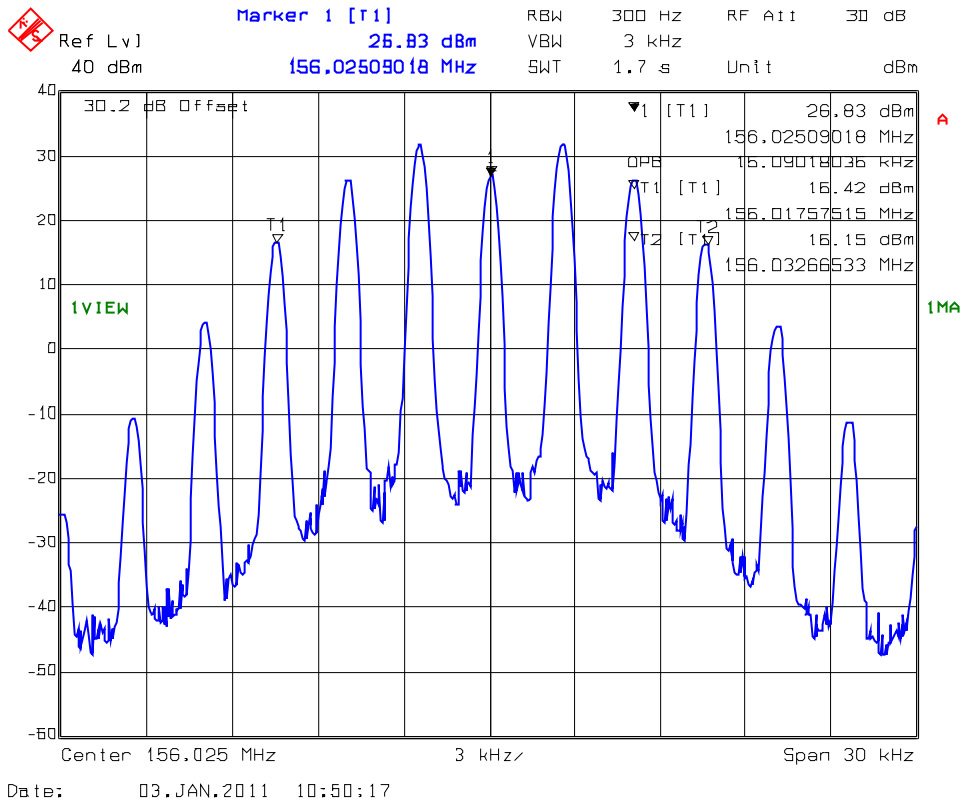


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: ICOM-265_FCC80
 January 11, 2011

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot # 2.:
Occupied Bandwidth
Carrier Frequency: 157.425 MHz
Channel Spacing: 25.0 kHz
Power: 5 W
Modulation: G3E, 2.5 kHz sine wave

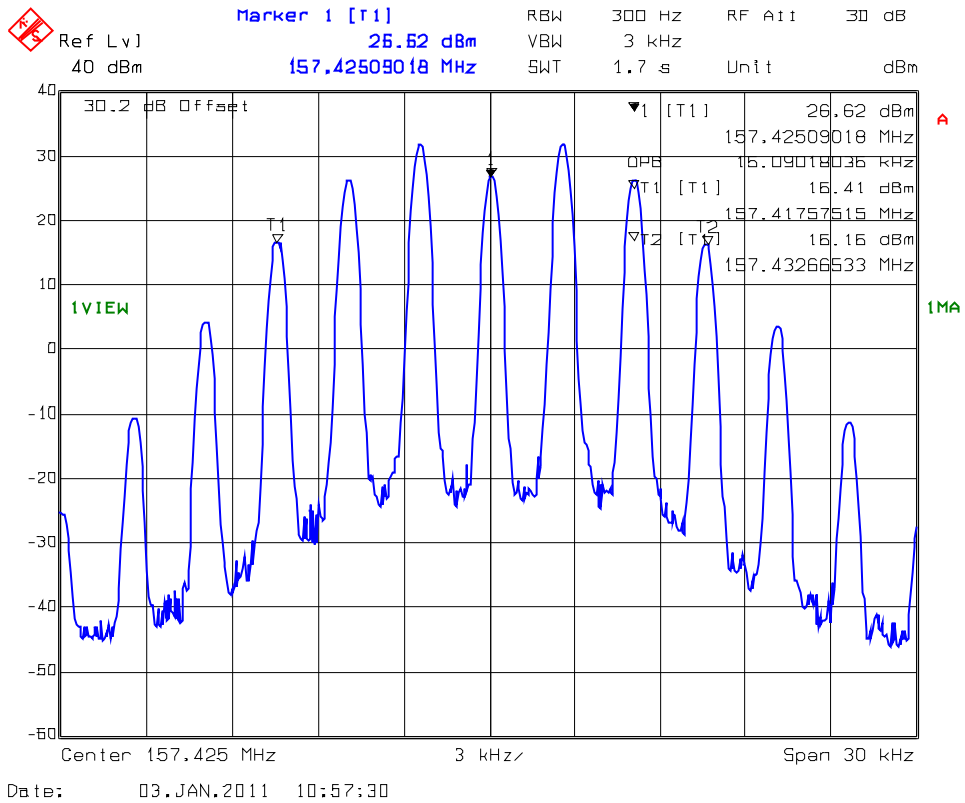

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: ICOM-265_FCC80
January 11, 2011


All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.5.5.2. Emission Masks

Remark: More stringent IC/RSS-182 maximum authorization bandwidth of 16 kHz for voice is applied instead of 20 kHz specified in Sec. 80.205 to verify and confirm compliance with both FCC and IC using single set of test data.

Conform. See the following test data plots (3 through 6) for details.

Plot # 3.:
Emission Mask B
Carrier Frequency: 156.025 MHz
Channel Spacing: 25 kHz
Power: 5 W
Modulation: G3E, 2.5 kHz sine wave

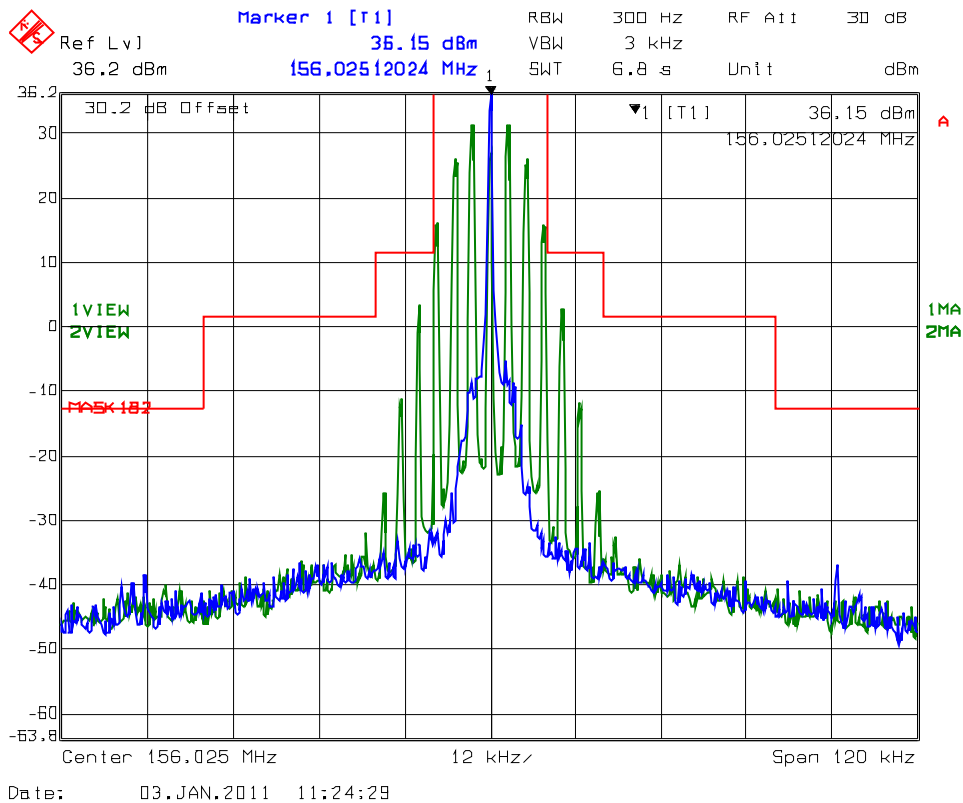


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: ICOM-265_FCC80
January 11, 2011

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot # 4.:
Emission Mask B
Carrier Frequency: 156.025 MHz
Channel Spacing: 25 kHz
Power: 5 W
Modulation: G3E, 2.5 kHz sine wave

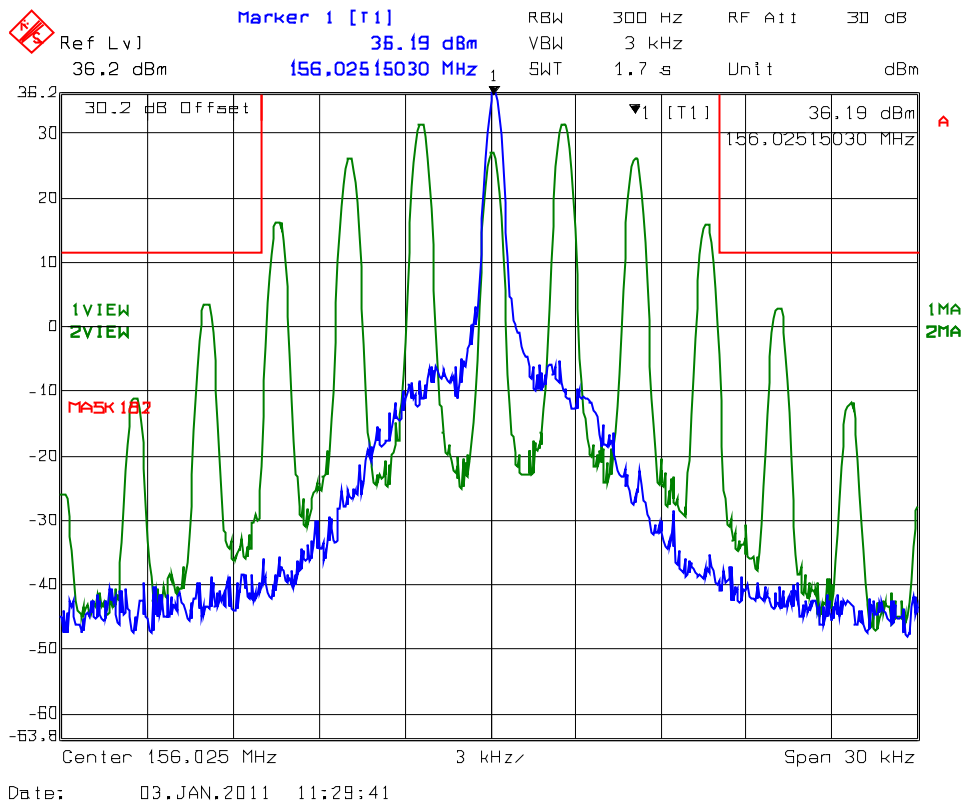


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: ICOM-265_FCC80
January 11, 2011

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot # 5.:
Emission Mask B
Carrier Frequency: 157.425 MHz
Channel Spacing: 25 kHz
Power: 5 W
Modulation: G3E, 2.5 kHz sine wave

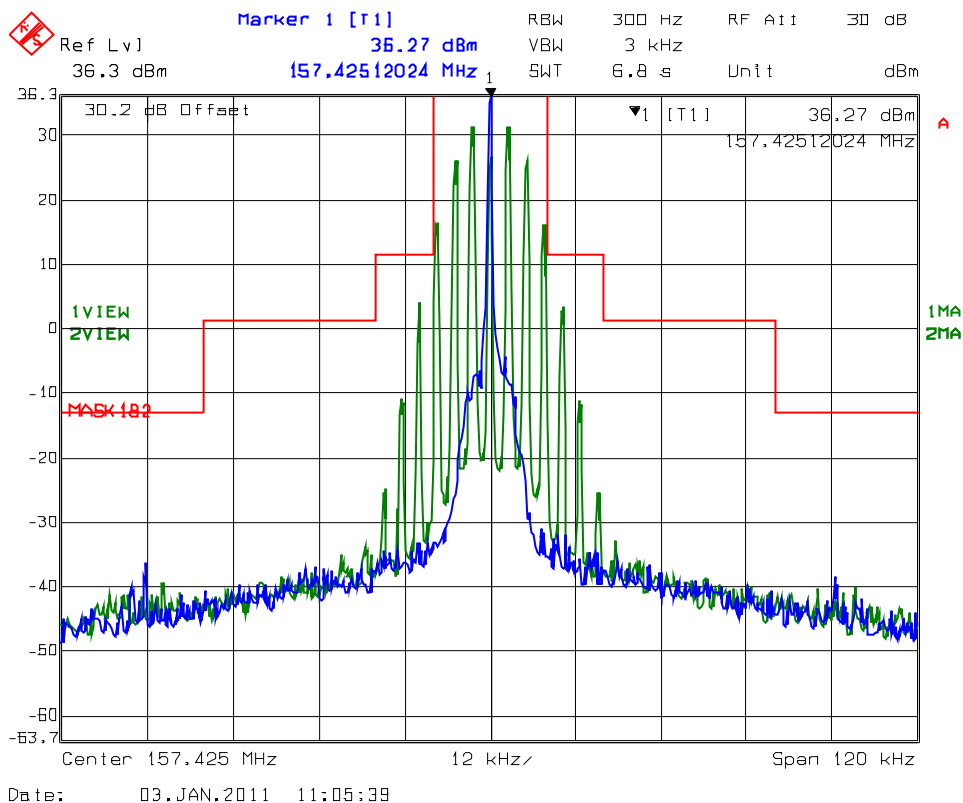


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: ICOM-265_FCC80
January 11, 2011

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot # 6.:
Emission Mask B
Carrier Frequency: 157.425 MHz
Channel Spacing: 25 kHz
Power: 5 W
Modulation: G3E, 2.5 kHz sine wave

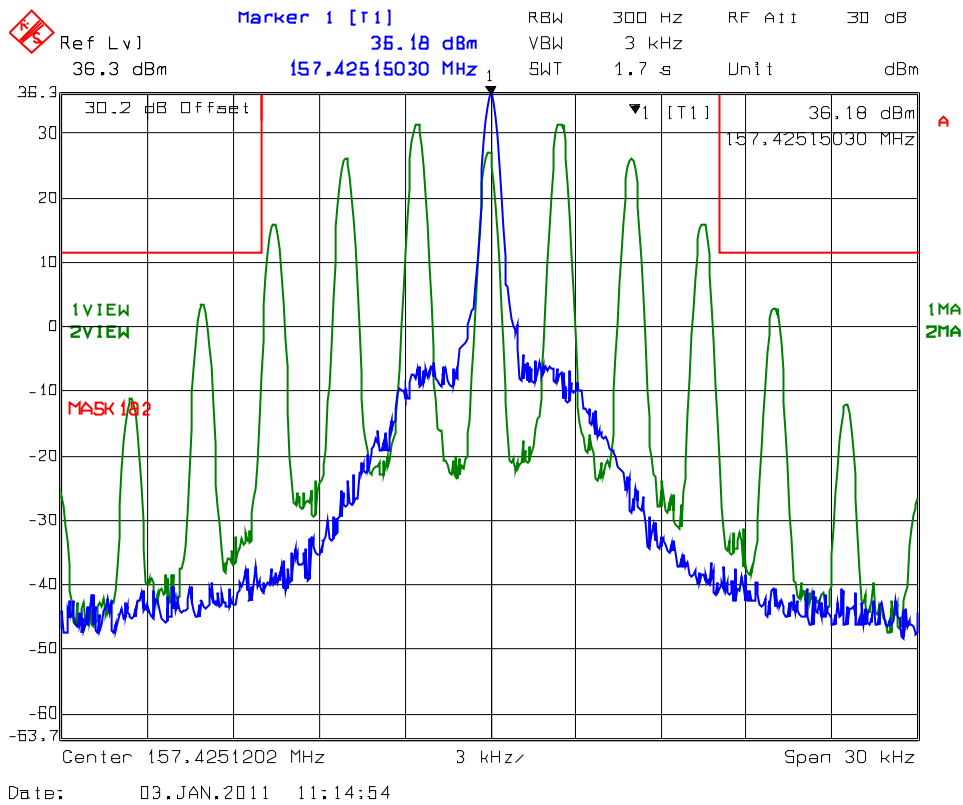


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: ICOM-265_FCC80
January 11, 2011

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot # 7.:
Emission Mask B
Carrier Frequency: 156.025 MHz
Channel Spacing: 25 kHz
Power: 1 W
Modulation: G3E, 2.5 kHz sine wave

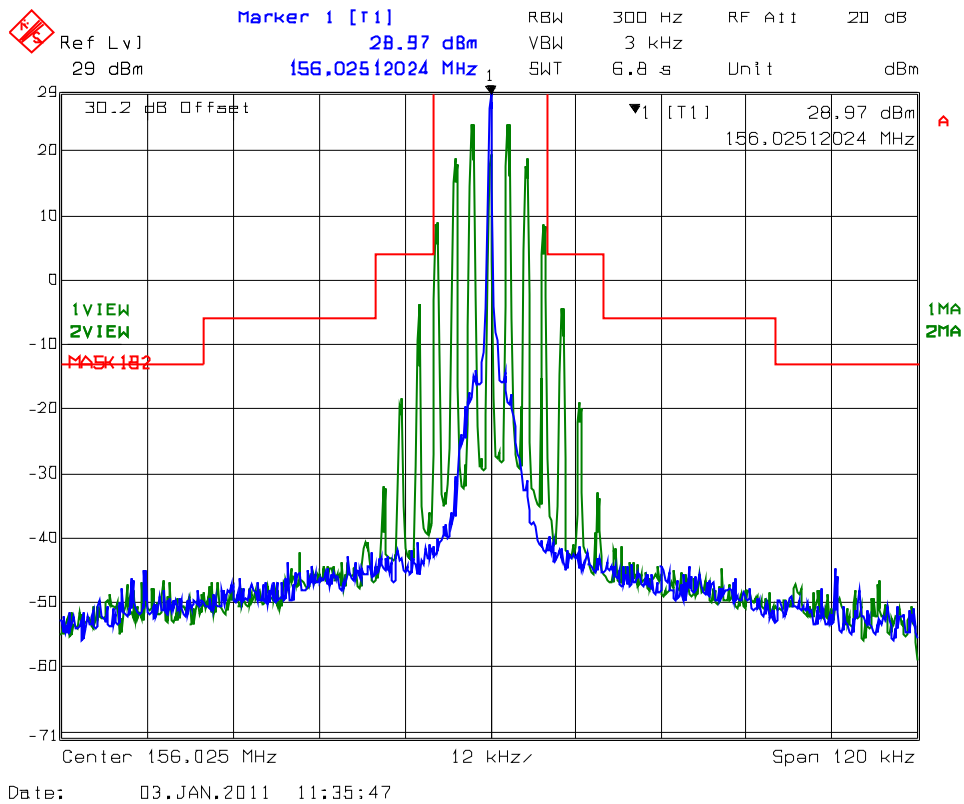


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: ICOM-265_FCC80
January 11, 2011

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot # 8.:
Emission Mask B
Carrier Frequency: 156.025 MHz
Channel Spacing: 25 kHz
Power: 1 W
Modulation: G3E, 2.5 kHz sine wave

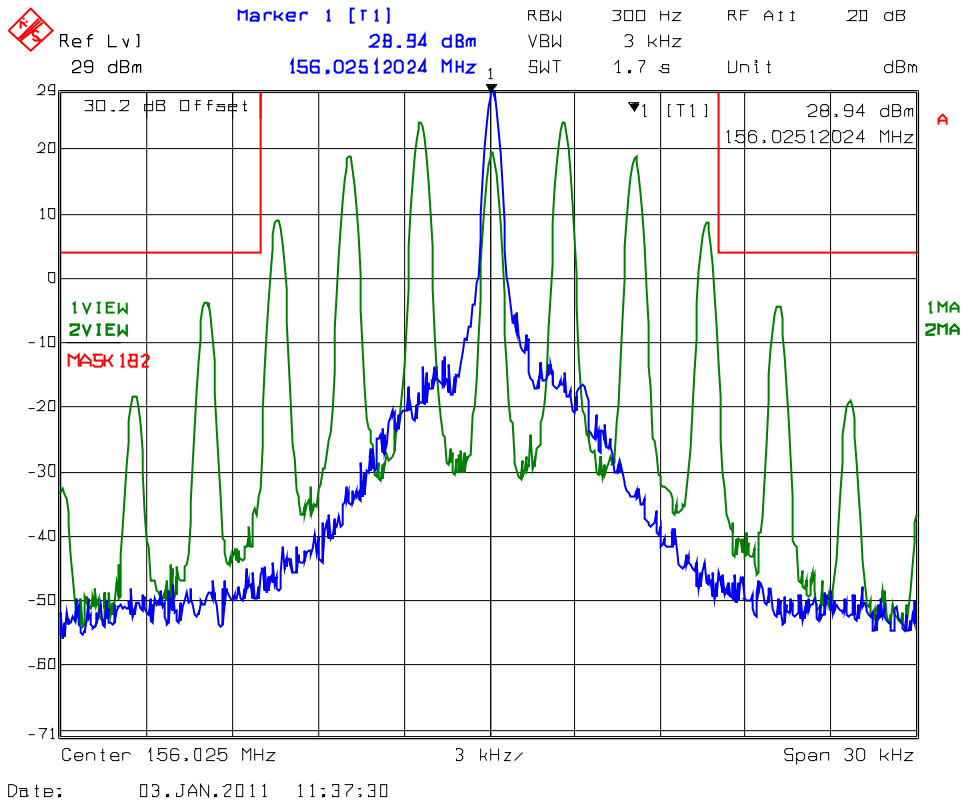


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: ICOM-265_FCC80
January 11, 2011

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot # 9.:
Emission Mask B
Carrier Frequency: 157.425 MHz
Channel Spacing: 25 kHz
Power: 1W
Modulation: G3E, 2.5 kHz sine wave

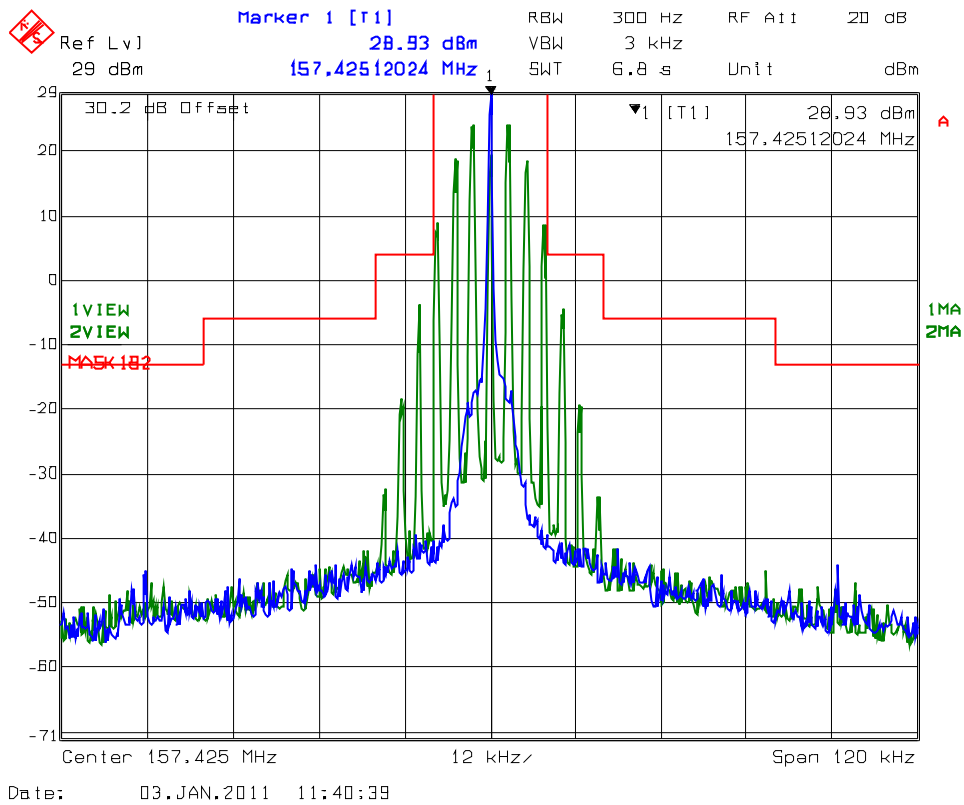


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: ICOM-265_FCC80
January 11, 2011

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot # 10.:
Emission Mask B
Carrier Frequency: 157.425 MHz
Channel Spacing: 25 kHz
Power: 1W
Modulation: G3E, 2.5 kHz sine wave

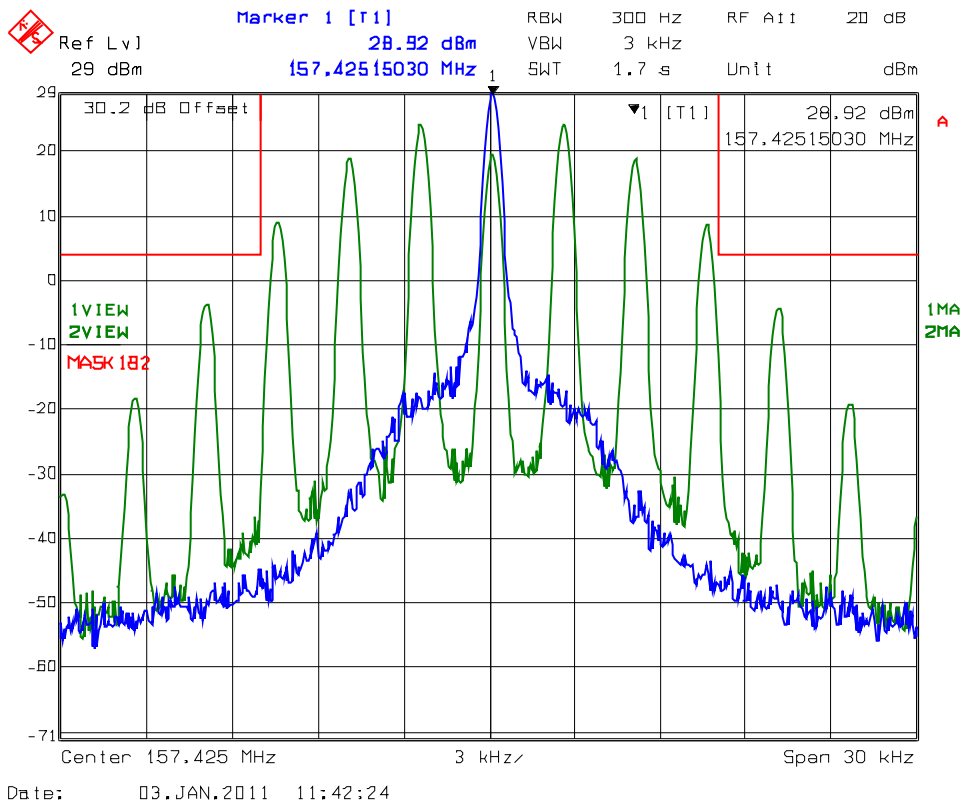

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: ICOM-265_FCC80
January 11, 2011

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.6. TRANSMITTER ANTENNA POWER SPURIOUS/HARMONIC CONDUCTED EMISSIONS [§ 80.211(f)(3)]


5.6.1. Limits

§ 80.211 (f)(3) On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least 43 plus 10log10 (mean power in watts) dB.

5.6.2. Method of Measurements

Refer to 7.5 of this report for measurement details

5.6.3. Test Arrangement

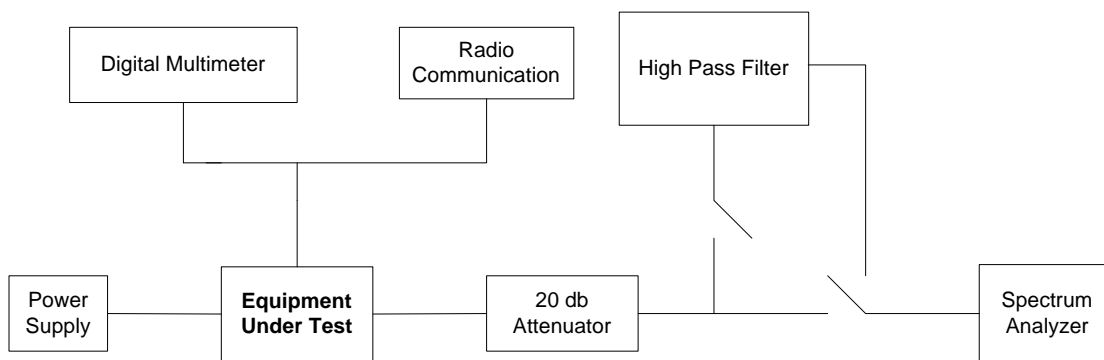

5.6.4. Test Equipment List

Test Instruments	Manufacturer	Model No.	Serial No.	Frequency Range	Calibration Due Date
Spectrum Analyzer	Rohde & Schwarz	FSEK 30	100077	20 Hz – 40 GHz	Aug 14, 2011
RF Communication Test Set	Hewlett Packard	8920B	US39064699	30 MHz – 1 GHz	Oct 27, 2011
DC Block	Hewlett Packard	11742A	12460	0.045 – 26.5 GHz	Inhouse calibrated at tests
Attenuator	Pasternack	PE7019-10	-	DC - 18 GHz	Inhouse calibrated at tests
Attenuator	Pasternack	PE7019-20	-	DC - 18 GHz	Inhouse calibrated at tests
High Pass Filter	Mini Circuit	SHP 250	-	Cut off 230 MHz	Inhouse calibrated at tests
DC Power Supply	Tenma Laboratory	72-7295	490300297	0-18V, 10A	N/A

5.6.5. Test Data

5.6.5.1. Near Lowest Frequency (156.025 MHz)


Carrier Frequency (MHz): 156.025

Power (dBm): 36.65

Limit (dBm): -13

All emissions found were more than 20 dB below the permissible limits.

Plot # 11.:
Spurious Emissions at Antenna Terminals
Carrier Frequency: 156.025 MHz
Channel Spacing: 25.0kHz
Power: 5 W
Modulation: G3E, 2.5 kHz sine wave

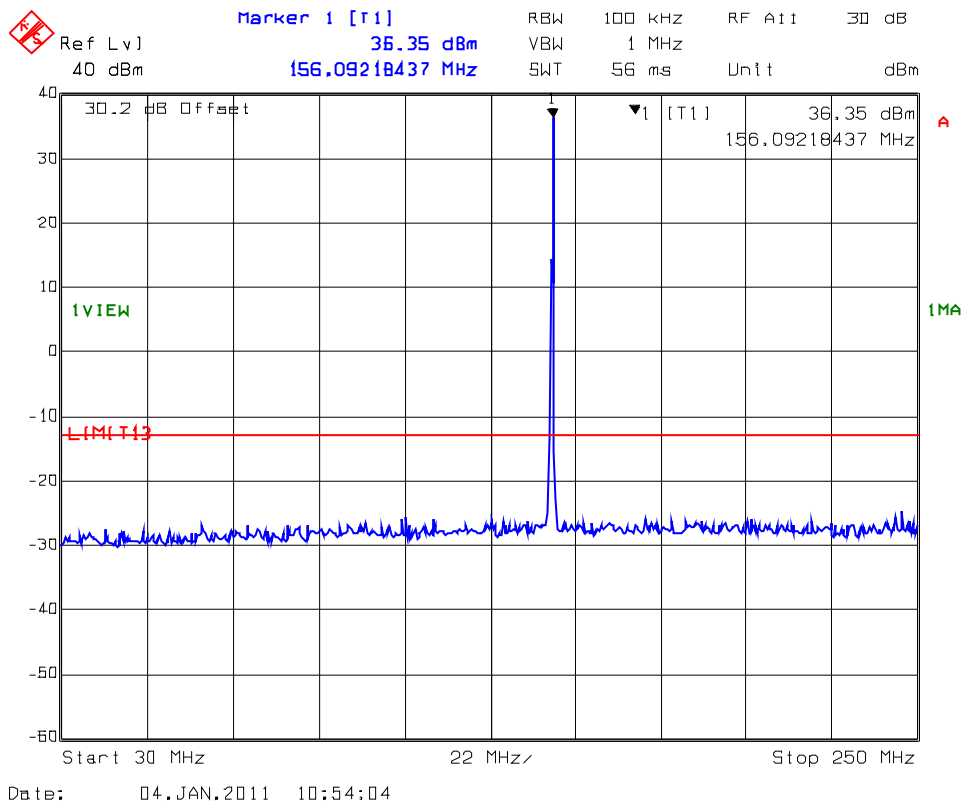


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: ICOM-265_FCC80
January 11, 2011

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot # 12.:
Spurious Emissions at Antenna Terminals
Carrier Frequency: 156.025 MHz
Channel Spacing: 25.0 kHz
Power: 5 W
Modulation: G3E, 2.5 kHz sine wave

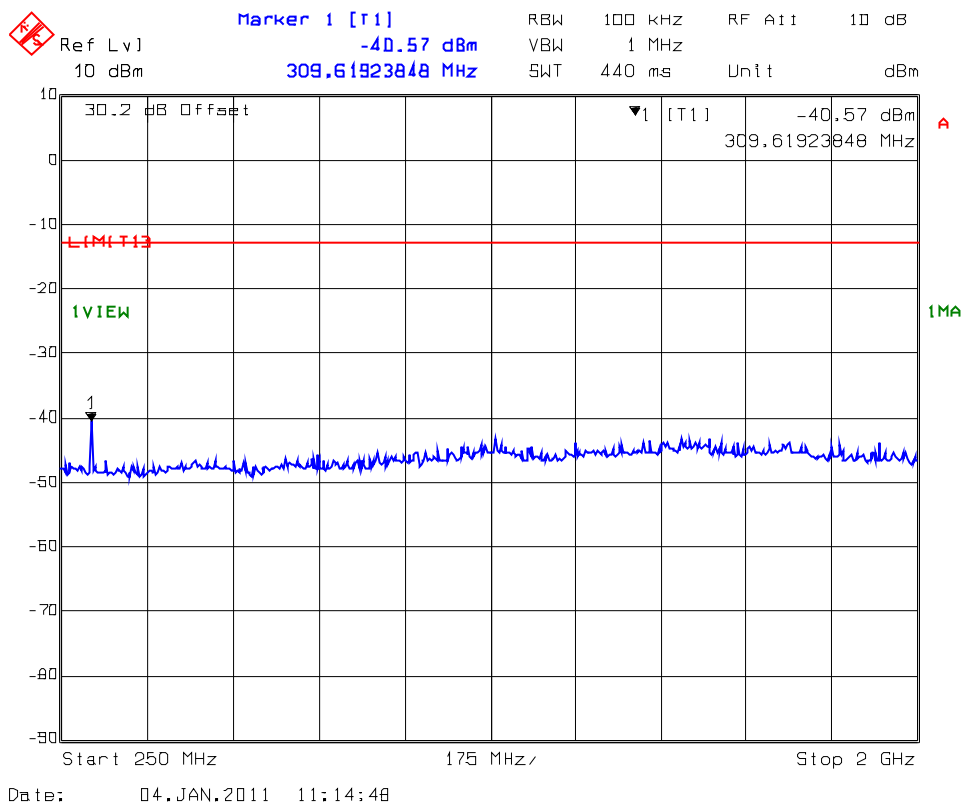

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>


File #: ICOM-265_FCC80
January 11, 2011

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Carrier Frequency (MHz): 156.025
Power (dBm): 29.13
Limit (dBm): -13

All emissions found were more than 20 dB below the permissible limits.

Plot # 13.:
Spurious Emissions at Antenna Terminals
Carrier Frequency: 156.025 MHz
Channel Spacing: 25.0 kHz
Power: 1 W
Modulation: G3E, 2.5 kHz sine wave

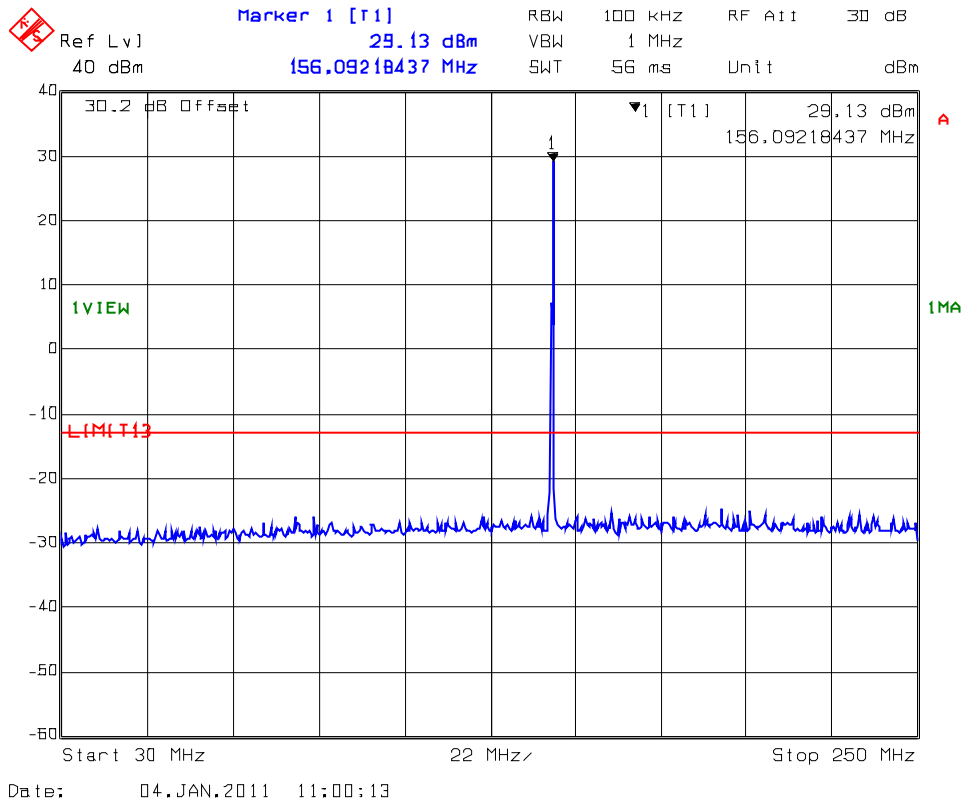


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: ICOM-265_FCC80
January 11, 2011

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot # 14.:
Spurious Emissions at Antenna Terminals
Carrier Frequency: 156.025 MHz
Channel Spacing: 25.0 kHz
Power: 1 W
Modulation: G3E, 2.5 kHz sine wave

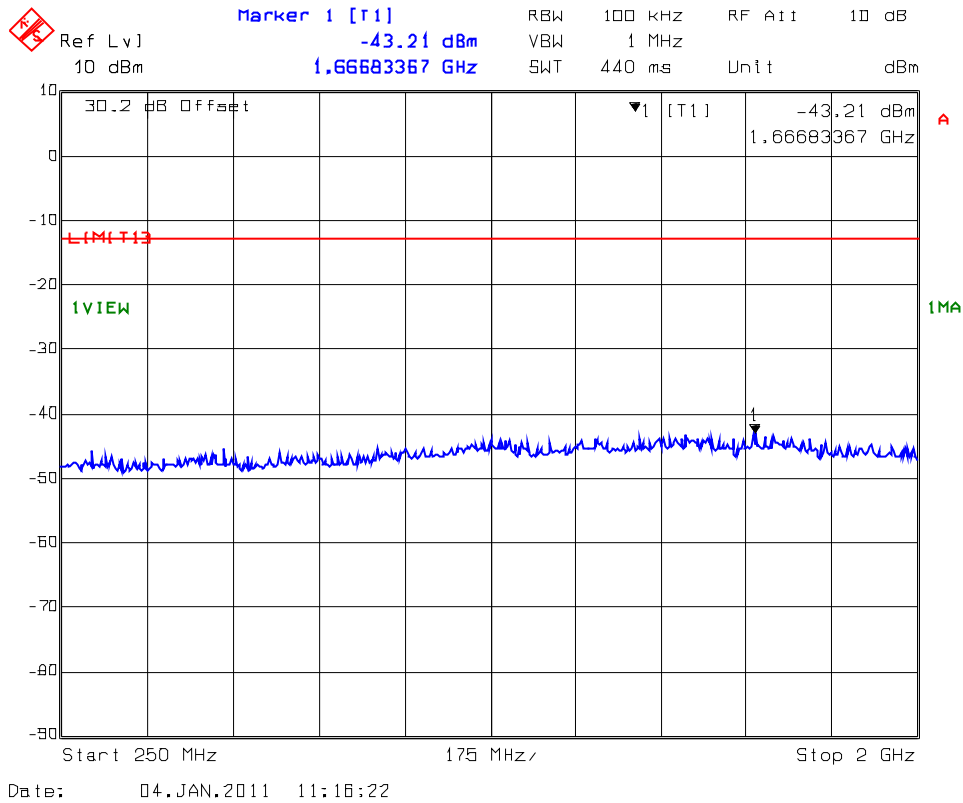

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: ICOM-265_FCC80
January 11, 2011


All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.6.5.2. Near Highest Frequency (157.425 MHz)

Carrier Frequency (MHz): 157.425
Power (dBm): 36.63
Limit (dBm): -13

All emissions found were more than 20 dB below the permissible limits.

Plot # 15.:
Spurious Emissions at Antenna Terminals
Carrier Frequency: 157.425 MHz
Channel Spacing: 25.0 kHz
Power: 5 W
Modulation: G3E, 2.5 kHz sine wave

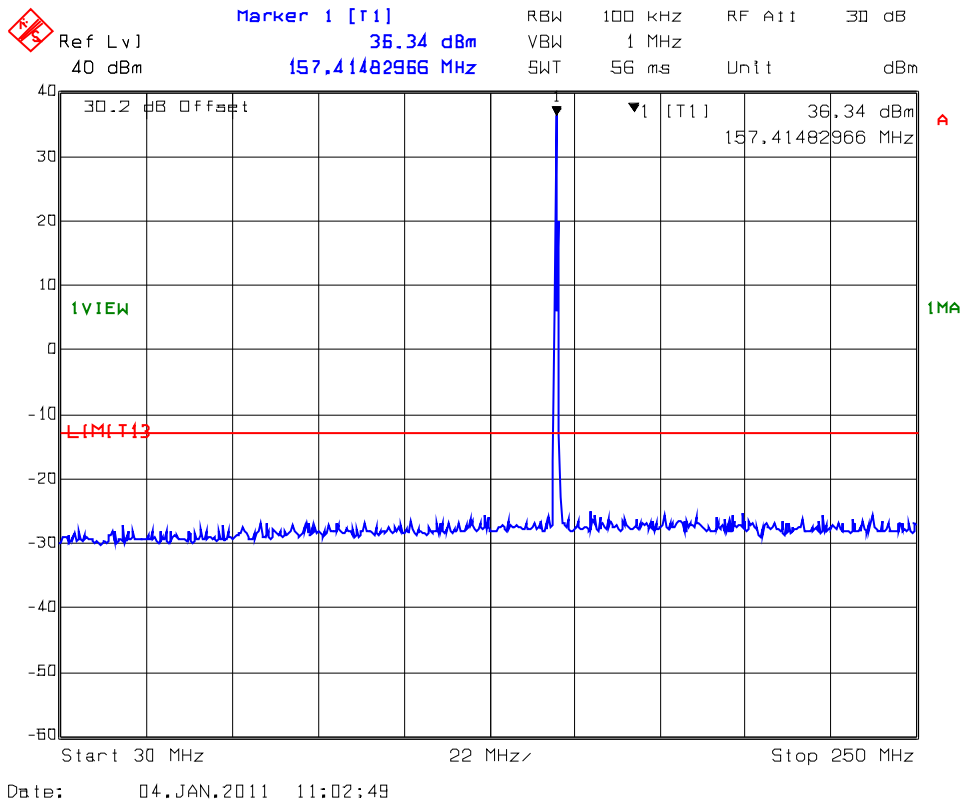


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: ICOM-265_FCC80
January 11, 2011

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot # 16.:
Spurious Emissions at Antenna Terminals
Carrier Frequency: 157.425 MHz
Channel Spacing: 25.0 kHz
Power: 5 W
Modulation: G3E, 2.5 kHz sine wave

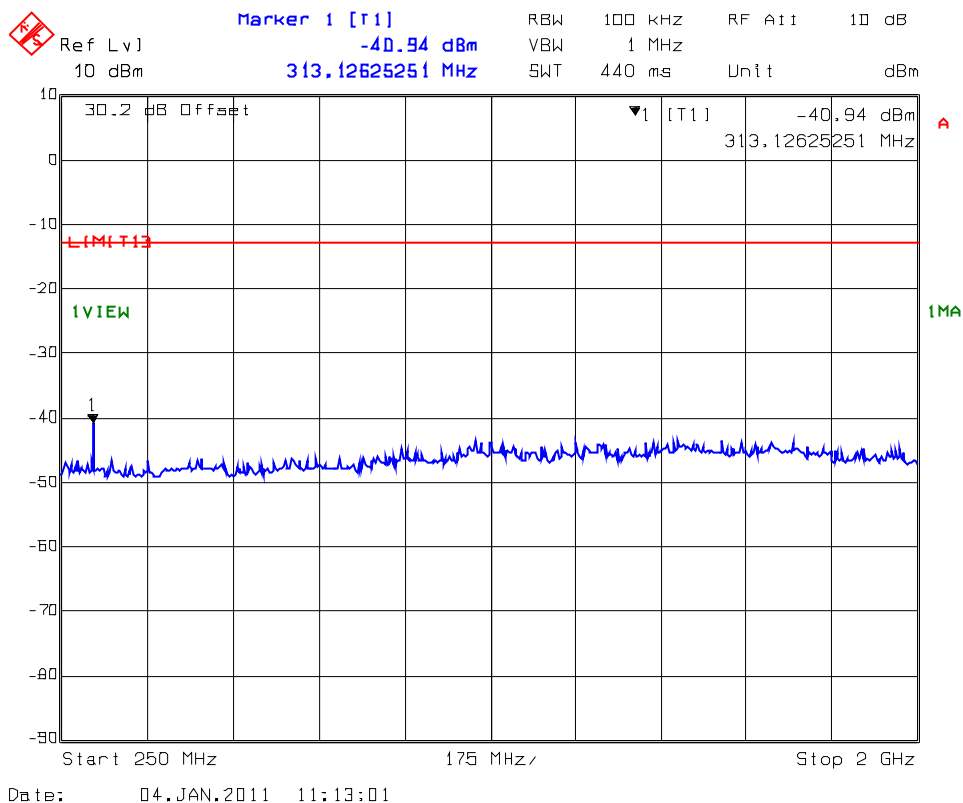

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>


File #: ICOM-265_FCC80
January 11, 2011

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Carrier Frequency (MHz): 157.425
Power (dBm): 29.16
Limit (dBm): -13

All emissions found were more than 20 dB below the permissible limits.

Plot # 17.:
Spurious Emissions at Antenna Terminals
Carrier Frequency: 157.425 MHz
Channel Spacing: 25.0 kHz
Power: 1 W
Modulation: G3E, 2.5 kHz sine wave

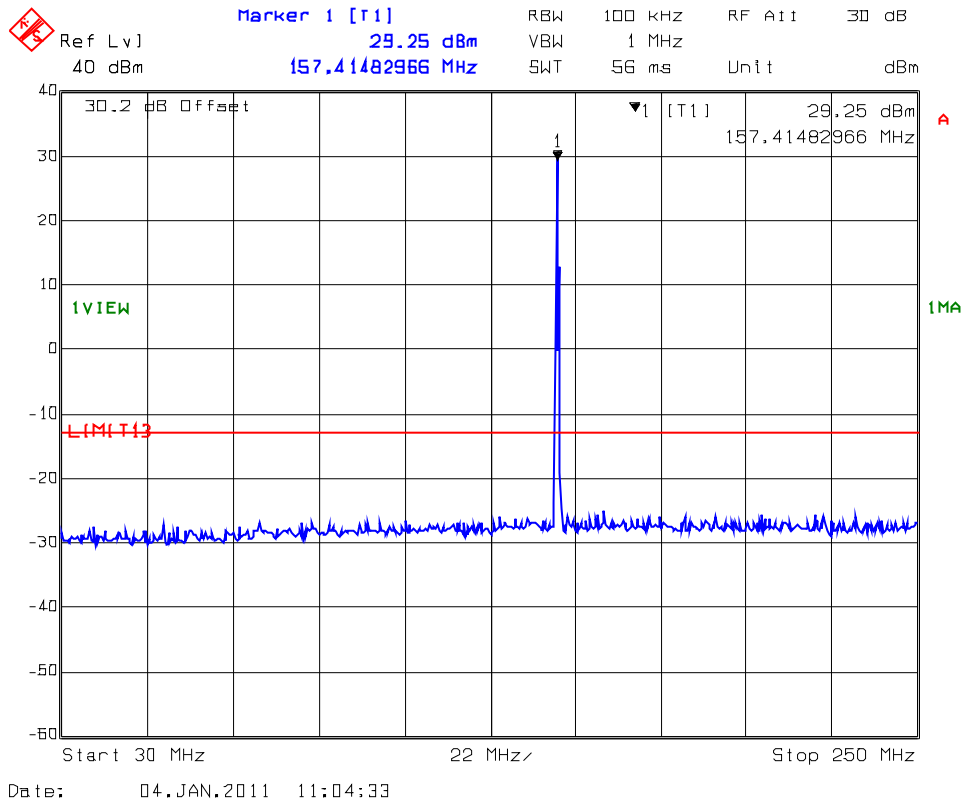

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: ICOM-265_FCC80
January 11, 2011

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot # 18.:
Spurious Emissions at Antenna Terminals
Carrier Frequency: 157.425 MHz
Channel Spacing: 25.0 kHz
Power: 1 W
Modulation: G3E, 2.5 kHz sine wave



ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: ICOM-265_FCC80
January 11, 2011

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.7. TRANSMITTER SPURIOUS/HARMONIC RADIATED EMISSIONS [§ 80.211(f)(3)]

5.7.1. Limits

§ 80.211 (f)(3) On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least 43 plus 10log10 (mean power in watts) dB.

5.7.2. Method of Measurements

The spurious/harmonic ERP measurements are using substitution method specified in 7.2 of this report and its value in dBc is calculated as follows:

- (1) If the transmitter's antenna is an integral part of the EUT, the ERP is measured using substitution method.
- (2) If the transmitter's antenna is non-integral and diverse, the lowest ERP of the carrier with 0 dBi antenna gain is used for calculation of the spurious/harmonic emissions in dBc:
Lowest ERP of the carrier = EIRP - 2.15 dB = Pc + G - 2.15 dB = Pc dBm (conducted) + 0 dBi - 2.15 dB

5.7.3. Test Equipment List

Test Instruments	Manufacturer	Model No.	Serial No.	Frequency Range	Calibration Due Date
Spectrum Analyzer	Rohde & Schwarz	FSEK 30	100077	20 Hz – 40 GHz	Aug 14, 2011
Spectrum Analyzer	Rohde & Schwarz	ESU40	100037	20 Hz – 40 GHz	March 09, 2011
Signal Generator	Hewlett Packard	8648C	3443U00391	100 kHz – 3200 MHz	Dec 16, 2011
RF Amplifier	Hewlett Packard	84498	3008A00769	1 – 26.5 GHz	Nov 2, 2011
RF Amplifier	AH System	PAM-0118	225	20 MHz – 18 GHz	April 18, 2011
Biconi-Log Antenna	Emco	3142C	00026873	26 – 3000 MHz	April 18, 2011
Horn Antenna	Emco	3155	9701-6570	1 – 18 GHz	Nov 20, 2010
Dipole Antenna	Emco	3121C	434	26 - 1000 MHz	Aug 16, 2011
High Pass filter	Mini-Circuits	SHP-300	10427	Cut off 158 MHz	Inhouse calibrated at tests
Attenuator	Pasternack	PE7019-10	-	DC - 18 GHz	Inhouse calibrated at tests
Attenuator	Pasternack	PE7019-20	-	DC - 18 GHz	Inhouse calibrated at tests
DC Power Supply	Tenma Laboratory	72-6153	0001526	0-18V, 10A	N/A

5.7.4. Test Data

Remarks: The radiated emissions are performed with high power setting (5 Watts) at 3 meters distance to represents the worst-case test configuration.

5.7.4.1. Near Lowest Frequency (156.025 MHz)

Carrier Frequency (MHz):	156.025
Power (dBm):	36.65
Limit (dBm):	-13

All emissions found were more than 20 dB below the permissible limits.

5.7.4.2. Near Highest Frequency (157.425 MHz)

Carrier Frequency (MHz):	157.425
Power (dBm):	36.63
Limit (dBm):	-13

All emissions found were more than 20 dB below the permissible limits.

EXHIBIT 6. TEST INSTRUMENTS & MEASUREMENT UNCERTAINTY (k=2, 95% Confidence Level)

The measurement uncertainties stated were calculated in accordance with the requirements of CISPR 16-4-2 @ IEC:2003 and JCGM 100:2008 (GUM 1995) – Guide to the Expression of Uncertainty in Measurement.

6.1. RADIATED EMISSION MEASUREMENT UNCERTAINTY

	Radiated Emission Measurement Uncertainty @ 3m, Horizontal (30-1000 MHz):	Measured	Limit
u_c	Combined standard uncertainty: $u_c(y) = \sqrt{\sum_{i=1}^m u_i^2(y)}$	± 2.15	± 2.6
U	Expanded uncertainty U: $U = 2u_c(y)$	± 4.30	± 5.2

	Radiated Emission Measurement Uncertainty @ 3m, Vertical (30-1000 MHz):	Measured	Limit
u_c	Combined standard uncertainty: $u_c(y) = \sqrt{\sum_{i=1}^m u_i^2(y)}$	± 2.39	± 2.6
U	Expanded uncertainty U: $U = 2u_c(y)$	± 4.78	± 5.2

	Radiated Emission Measurement Uncertainty @ 3 m, Horizontal & Vertical (1 – 18 GHz):	Measured	Limit
u_c	Combined standard uncertainty: $u_c(y) = \sqrt{\sum_{i=1}^m u_i^2(y)}$	± 1.87	Under consideration
U	Expanded uncertainty U: $U = 2u_c(y)$	± 3.75	Under consideration

EXHIBIT 7. MEASUREMENT METHODS

7.1. CONDUCTED POWER MEASUREMENTS

The following shall be applied to the combination(s) of the radio device and its intended antenna(e).

- If the RF level is user adjustable, all measurements shall be made with the highest power level available to the user for that combination.
- The following method of measurement shall apply to both conducted and radiated measurements.
 - The radiated measurements are performed at the Ultratech Calibrated Open Field Test Site.
 - The measurement shall be performed using normal operation of the equipment with modulation.
- Test procedure shall be as follows:

Step 1: Duty Cycle measurements if the transmitter's transmission is transient

- Using a EMI Receiver with the frequency span set to 0 Hz and the sweep time set at a suitable value to capture the envelope peaks and the duty cycle of the transmitter output signal;
- The duty cycle of the transmitter, $x = \text{Tx on} / (\text{Tx on} + \text{Tx off})$ with $0 < x < 1$, is measure and recorded in the test report. For the purpose of testing, the equipment shall be operated with a duty cycle that is equal or more than 0.1.


Step 2: Calculation of Average EIRP. See Figure 1

- The average output power of the transmitter shall be determined using a wideband, calibrated RF average power meter with the power sensor with an integration period that exceeds the repetition period of the transmitter by a factor 5 or more. The observed value shall be recorded as "A" (in dBm);
- The e.i.r.p. shall be calculated from the above measured power output "A", the observed duty cycle x , and the applicable antenna assembly gain "G" in dBi, according to the formula:

$$\text{EIRP} = \text{A} + \text{G} + 10\log(1/x)$$

{ $X = 1$ for continuous transmission $\Rightarrow 10\log(1/x) = 0 \text{ dB}$ }

Figure 1.

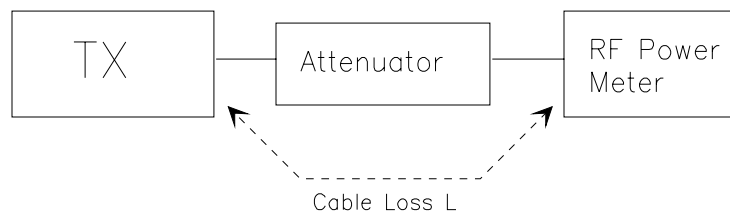

7.2. RADIATED POWER MEASUREMENTS (ERP & EIRP) USING SUBSTITUTION METHOD

7.2.1. Maximizing RF Emission Level (E-Field)

- The measurements was performed with full rf output power and modulation.
- Test was performed at listed 3m open area test site (listed with FCC, IC, ITI, NVLAP, ACA & VCCI).
- The transmitter under test was placed at the specified height on a non-conducting turntable (80 cm height)
- The BICONILOG antenna (20 MHz to 1 GHz) or HORN antenna (1 GHz to 18 GHz) was used for measuring.
- Load an appropriate correction factors file in EMI Receiver for correcting the field strength reading level

Total Correction Factor recorded in the EMI Receiver = Cable Loss + Antenna Factor
E (dBuV/m) = Reading (dBuV) + Total Correction Factor (dB/m)

- Set the EMI Receiver #1 and #2 as follows:

Center Frequency:	test frequency
Resolution BW:	100 kHz
Video BW:	same
Detector Mode:	positive
Average:	off
Span:	3 x the signal bandwidth

- The test antenna was lowered or raised from 1 to 4 meters until the maximum signal level was detected.
- The transmitter was rotated through 360° about a vertical axis until a higher maximum signal was received.
- The test antenna was lowered or raised again from 1 to 4 meters until a maximum was obtained. This level was recorded.
- The recorded reading was corrected to the true field strength level by adding the antenna factor, cable loss and subtracting the pre-amplifier gain.
- The above steps were repeated with both transmitters' antenna and test receiving antenna placed in vertical and horizontal polarization. Both readings with the antennas placed in vertical and horizontal polarization shall be recorded.
- Repeat for all different test signal frequencies

7.2.2. Measuring the EIRP of Spurious/Harmonic Emissions using Substitution Method

- Set the EMI Receiver (for measuring E-Field) and Receiver #2 (for measuring EIRP) as follows:

Center Frequency: equal to the signal source
Resolution BW: 100 kHz
Video BW: VBW > RBW
Detector Mode: positive
Average: off
Span: 3 x the signal bandwidth

- Load an appropriate correction factors file in EMI Receiver for correcting the field strength reading level

Total Correction Factor recorded in the EMI Receiver = Cable Loss + Antenna Factor
 $E \text{ (dBuV/m)} = \text{Reading (dBuV)} + \text{Total Correction Factor (dB/m)}$

- Select the frequency and E-field levels obtained in the Section 8.2.1 for ERP/EIRP measurements.
- Substitute the EUT by a signal generator and one of the following transmitting antenna (substitution antenna):
 - DIPOLE antenna for frequency from 30-1000 MHz or
 - HORN antenna for frequency above 1 GHz }.
- Mount the transmitting antenna at 1.5 meter high from the ground plane.
- Use one of the following antenna as a receiving antenna:
 - DIPOLE antenna for frequency from 30-1000 MHz or
 - HORN antenna for frequency above 1 GHz }.
- If the DIPOLE antenna is used, tune it's elements to the frequency as specified in the calibration manual.
- Adjust both transmitting and receiving antenna in a VERTICAL polarization.
- Tune the EMI Receivers to the test frequency.
- Lower or raise the test antenna from 1 to 4 meters until the maximum signal level was detected.
- The transmitter was rotated through 360° about a vertical axis until a higher maximum signal was received.
- Lower or raise the test antenna from 1 to 4 meters until the maximum signal level was detected.
- Adjust input signal to the substitution antenna until an equal or a known related level to that detected from the transmitter was obtained in the test receiver.
- Record the power level read from the Average Power Meter and calculate the ERP/EIRP as follows:

$$P = P1 - L1 = (P2 + L2) - L1 = P3 + A + L2 - L1$$

$$\text{EIRP} = P + G1 = P3 + L2 - L1 + A + G1$$

$$\text{ERP} = \text{EIRP} - 2.15 \text{ dB}$$

$$\text{Total Correction factor in EMI Receiver \# 2} = L2 - L1 + G1$$

Where: P: Actual RF Power fed into the substitution antenna port after corrected.
P1: Power output from the signal generator
P2: Power measured at attenuator A input
P3: Power reading on the Average Power Meter
EIRP: EIRP after correction
ERP: ERP after correction

- Adjust both transmitting and receiving antenna in a HORIZONTAL polarization, then repeat step (k) to (o)
- Repeat step (d) to (o) for different test frequency
- Repeat steps (c) to (j) with the substitution antenna oriented in horizontal polarization.
- Actual gain of the EUT's antenna is the difference of the measured EIRP and measured RF power at the RF port. Correct the antenna gain if necessary.

Figure 2


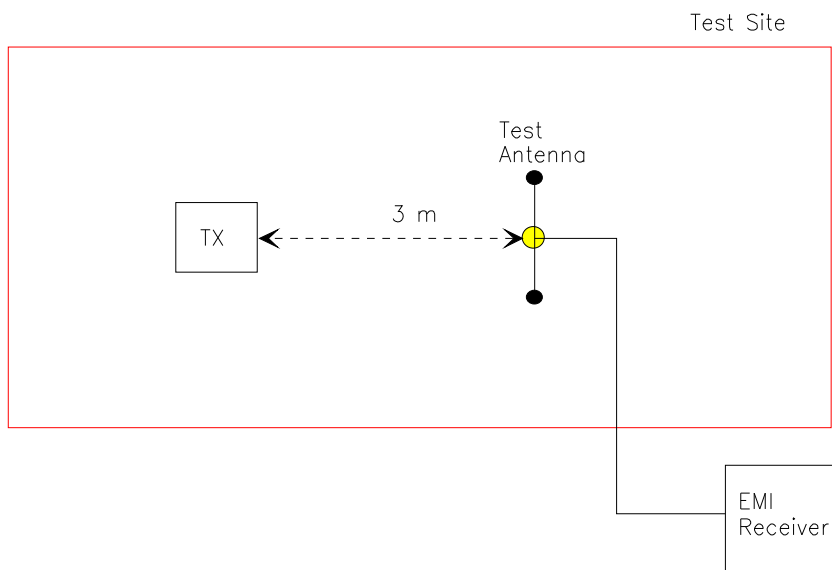


Figure 3

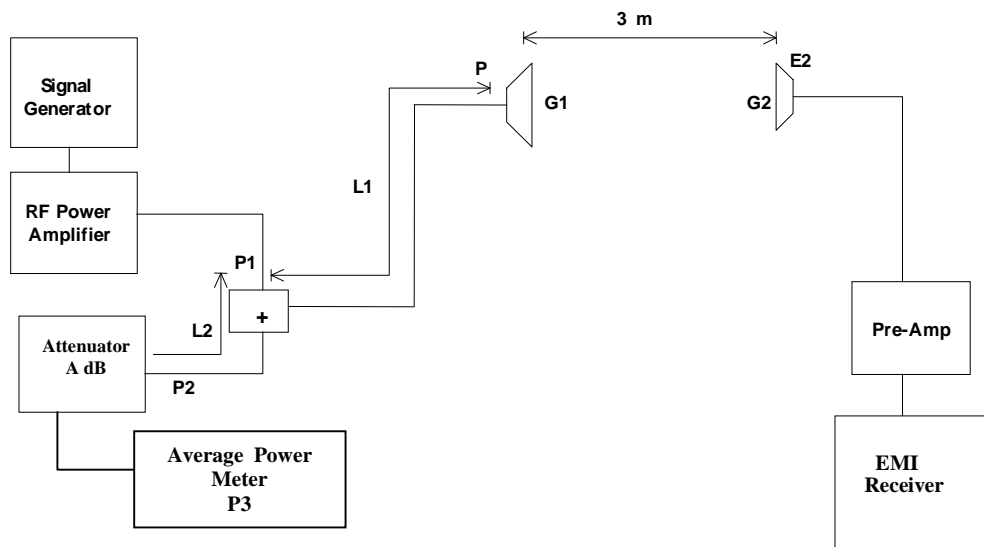

7.3. FREQUENCY STABILITY

Refer to § 2.1055.

- (a) The frequency stability shall be measured with variation of ambient temperature as follows: From -30 to +50 centigrade except that specified in subparagraph (2) & (3) of this paragraph.
- (b) Frequency measurements shall be made at extremes of the specified temperature range and at intervals of not more than 10 centigrade through the range. A period of time sufficient to stabilize all of the components of the oscillator circuit at each temperature level shall be allowed prior to frequency measurement. The short-term transient effects on the frequency of the transmitter due to keying (except for broadcast transmitters) and any heating element cycling normally occurring at each ambient temperature level also shall be shown. Only the portion or portions of the transmitter containing the frequency determining and stability circuitry need be subjected to the temperature variation test.
- (d) The frequency stability supply shall be measured with variation of primary supply voltage as follows:
 - (1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.
 - (2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.
 - (3) The supply voltage shall be measured at the input to the cable normally provide with the equipment, or at the power supply terminals if cables are not normally provided. Effects on frequency of transmitter keying (except for broadcast transmitters) and any heating element cycling at the nominal supply voltage and at each extreme also shall be shown.
- (e) When deemed necessary, the Commission may require tests of frequency stability under conditions in addition to those specifically set out in paragraphs (a), (b), (c) and (d) of this section. (For example, measurements showing the effect of proximity to large metal objects, or of various types of antennas, may be required for portable equipment).

7.4. EMISSION MASK

Voice or Digital Modulation Through a Voice Input Port @ 2.1049(c)(i):- The transmitter was modulated by a 2.5 KHz tone signal at an input level 16 dB greater than that required to produce 50% modulation (e.g.: ± 2.5 KHz peak deviation at 1 KHz modulating frequency). The input level was established at the frequency of maximum response of the audio modulating circuit.

Digital Modulation Through a Data Input Port @ 2.1049(h):- Transmitters employing digital modulation techniques - when modulated by an input signal such that its amplitude and symbol rate represent the maximum rated conditions under which the equipment will be operated. The signal shall be applied through any filter networks, pseudo-random generators or other devices required in normal service. Additionally, the Emission Masks shall be shown for operation with any devices used for modifying the spectrum when such devices are operational at the discretion of the user.

The following EMI Receiver bandwidth shall be used for measurement of Emission Mask/Out-of-Band Emission Measurements:

For 25 kHz Channel Spacing: RBW = 300 Hz

For 12.5 kHz or 6.25 kHz Channel Spacings: RBW = 100 Hz

The all cases the Video Bandwidth shall be equal or greater than the measuring bandwidth.

7.5. SPURIOUS EMISSIONS (CONDUCTED)

With transmitter modulation characteristics described in Out-of-Band Emissions measurements @ 2.1049, the transmitter spurious and harmonic emissions were scanned. The spurious and harmonic emissions were measured with the EMI Receiver controls set as RBW = 30 kHz minimum , VBW \geq RBW and SWEEP TIME = AUTO). The transmitter was operated at a full rated power output, and modulated as follows:

FCC 47 CFR 2.1057 - Frequency Spectrum to be investigated: The spectrum was investigated from the lowest radio generated in the equipment up to at least the 10th harmonic of the carrier frequency or to the highest frequency practicable in the present state of the art of measuring techniques, whichever is lower. Particular attention should be paid to harmonics and subharmonics of the carrier frequency. Radiation at the frequencies of multiplier stages should be checked. The amplitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be reported.

FCC 47 CFR 2.1051 - Spurious Emissions at Antenna Terminal: The radio frequency voltage or powers generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. Curves or equivalent data shall show the magnitude of the harmonic and other spurious emission that can be detected when the equipment is operated under the conditions specified in 2.1049 as appropriate. The magnitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be specified.