

APPENDIX 1

SAR Measurement Data

Table of Contents

EXHIBIT 1. PRESCAN MEASUREMENT SUMMARY.....	3
<i>File Name: ICOM-458Q FA-B02AR 127.5MHz MB-133.da52:0.....</i>	<i>4</i>
<i>File Name: ICOM-458Q FA-B02AR 127.5MHz MB-96N.da52:0.....</i>	<i>5</i>
EXHIBIT 2. SAR MEASUREMENTS RESULTS	6
EXHIBIT 3. HEAD MEASUREMENTS.....	7
<i>File Name: ICOM-458Q FA-B02AR 118MHz.da52:0.....</i>	<i>7</i>
<i>File Name: ICOM-458Q FA-B02AR 122.75MHz.da52:0.....</i>	<i>8</i>
<i>File Name: ICOM-458Q FA-B02AR 127.5MHz.da52:0.....</i>	<i>9</i>
<i>File Name: ICOM-458Q FA-B02AR 132.25MHz.da52:0.....</i>	<i>10</i>
<i>File Name: ICOM-458Q FA-B02AR 137MHz.da52:0.....</i>	<i>11</i>
EXHIBIT 4. BODY MEASUREMENTS.....	12
<i>File Name: ICOM-458Q FA-B02AR 118MHz.da52:0.....</i>	<i>12</i>
<i>File Name: ICOM-458Q FA-B02AR 122.75MHz.da52:0.....</i>	<i>13</i>
<i>File Name: ICOM-458Q FA-B02AR 127.5MHz MB-133.da52:0.....</i>	<i>14</i>
<i>File Name: ICOM-458Q FA-B02AR 132.25MHz.da52:0.....</i>	<i>15</i>
<i>File Name: ICOM-458Q FA-B02AR 137MHz.da52:0.....</i>	<i>16</i>

EXHIBIT 1. **PRESCAN MEASUREMENT SUMMARY**

Belt Clip	Antenna	Power (dBm)	CH	CH. Freq	BODY SAR1g (W/Kg)	BODY SAR10g (W/Kg)
				(MHz)	BP-288	BP-288
MB-133	FA-B02AR	32.84	3	127.5	0.637	0.493
MB-96N		32.84	3	127.5	0.336	0.264

Test Laboratory: Ultratech Group of Labs

File Name: [ICOM-458Q_FA-B02AR_127.5MHz_MB-133.da52:0](#)

DUT: IC-A25N; Type: VHF Transceiver; Serial: 00000107

Communication System: UID 0, CW (0); Frequency: 127.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 128$ MHz; $\sigma = 0.792$ S/m; $\epsilon_r = 60.879$; $\rho = 1000$ kg/m³; Phantom section:
Flat Section; Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3673; ConvF(10.93, 10.93, 10.93); Calibrated: 3/20/2017;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn874; Calibrated: 8/22/2016
- Phantom: ELI 4.0; Type: QD OVA 001 BB; Serial: 1057
- DASYS 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration_Body_IC-A25N/Body Back, P=5W, d=0mm/Area Scan (61x161x1):

Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.706 W/kg

Configuration_Body_IC-A25N/Body Back, P=5W, d=0mm/Zoom Scan (5x5x7)


(6x6x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 11.67 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.831 W/kg

SAR(1 g) = 0.637 W/kg; SAR(10 g) = 0.493 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.698 W/kg

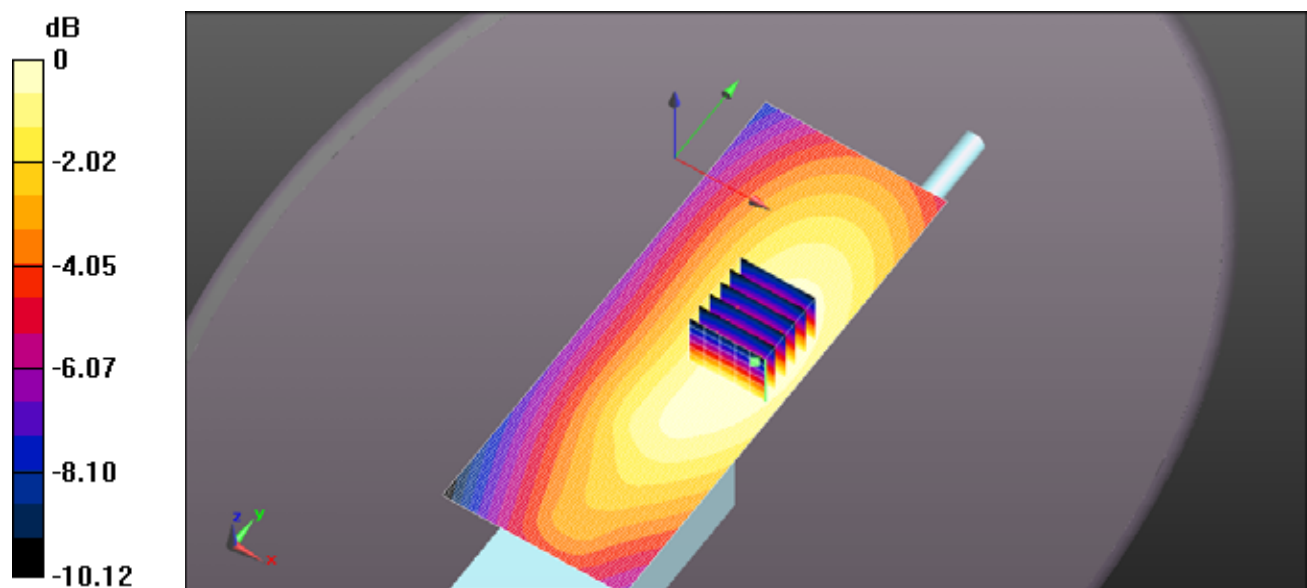

0 dB = 0.706 W/kg = -1.51 dBW/kg

Test Laboratory: Ultratech Group of Labs

File Name: [ICOM-458Q_FA-B02AR_127.5MHz_MB-96N.da52:0](#)

DUT: IC-A25N; Type: VHF Transceiver; Serial: 00000107

Communication System: UID 0, CW (0); Frequency: 127.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 128$ MHz; $\sigma = 0.792$ S/m; $\epsilon_r = 60.879$; $\rho = 1000$ kg/m³; Phantom section:
Flat Section; Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:


- Probe: EX3DV4 - SN3673; ConvF(10.93, 10.93, 10.93); Calibrated: 3/20/2017;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn874; Calibrated: 8/22/2016
- Phantom: ELI 4.0; Type: QD OVA 001 BB; Serial: 1057
- DASYS 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration_Body_IC-A25N/Body Back, P=5W, d=0mm/Area Scan (61x161x1):

Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.370 W/kg

Configuration_Body_IC-A25N/Body Back, P=5W, d=0mm/Zoom Scan (5x5x7)

(6x6x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 8.675 V/m; Power Drift = -0.11 dB
Peak SAR (extrapolated) = 0.430 W/kg
SAR(1 g) = 0.336 W/kg; SAR(10 g) = 0.264 W/kg (SAR corrected for target medium)
Maximum value of SAR (measured) = 0.367 W/kg

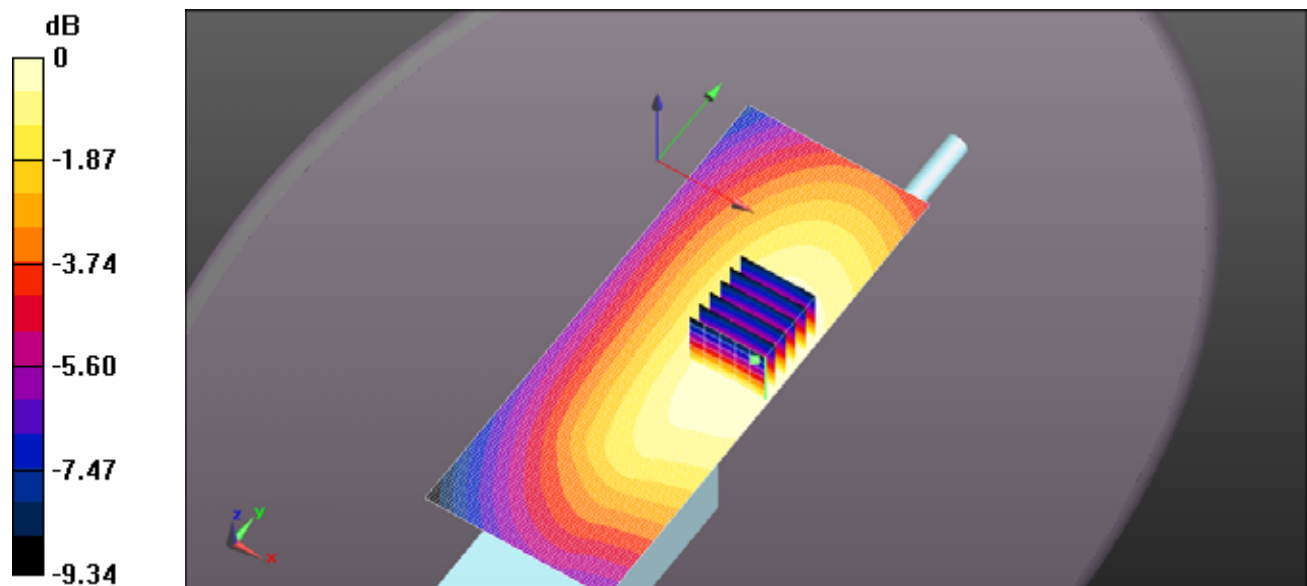

0 dB = 0.370 W/kg = -4.32 dBW/kg

EXHIBIT 2. SAR MEASUREMENTS RESULTS

Antenna	Power (dBm)	CH	CH. Freq	HEAD SAR1g (W/Kg)	HEAD SAR10g (W/Kg)	BODY SAR1g (W/Kg)	BODY SAR10g (W/Kg)
			(MHz)	BP-288	BP-288	BP-288	BP-288
				2200mAh	2200mAh	2200mAh	2200mAh
FA-B02AR	32.63	1	118	0.237	0.188	0.339	0.263
	32.71	2	122.75	0.31	0.248	0.434	0.337
	32.84	3	127.5	0.571	0.456	0.637	0.493
	32.63	4	132.25	1.07	0.852	0.565	0.437
	32.59	5	137	0.816	0.648	0.136	0.104

EXHIBIT 3. HEAD MEASUREMENTS

File Name: [ICOM-458Q FA-B02AR 118MHz.da52:0](#)

DUT: IC-A25N; Type: VHF Transceiver; Serial: 00000107

Communication System: UID 0, CW (0); Frequency: 118 MHz; Duty Cycle: 1:1
Medium parameters used (extrapolated): $f = 118$ MHz; $\sigma = 0.704$ S/m; $\epsilon_r = 54.264$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section ; Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3673; ConvF(11.15, 11.15, 11.15); Calibrated: 3/20/2017;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn874; Calibrated: 8/22/2016
- Phantom: ELI 4.0; Type: QD OVA 001 BB; Serial: 1057
- DASYS 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration_Head_IC-A25N/Head Front, P=5W, d=25mm/Area Scan (61x161x1):

Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.267 W/kg

Configuration_Head_IC-A25N/Head Front, P=5W, d=25mm/Zoom Scan (5x5x7)


(6x6x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 14.96 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.301 W/kg

SAR(1 g) = 0.237 W/kg; SAR(10 g) = 0.188 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.258 W/kg

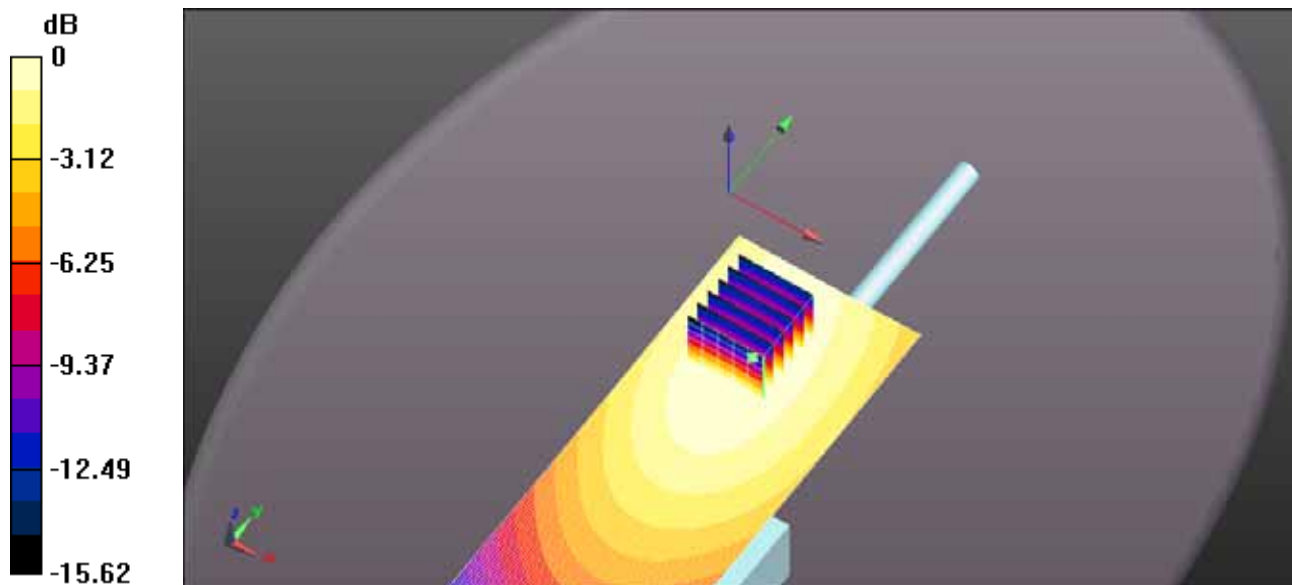

0 dB = 0.267 W/kg = -5.74 dBW/kg

Test Laboratory: Ultratech Group of Labs

File Name: [ICOM-458Q_FA-B02AR_122.75MHz_da52:0](#)

DUT: IC-A25N; Type: VHF Transceiver; Serial: 00000107

Communication System: UID 0, CW (0); Frequency: 122.75 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 122.75$ MHz; $\sigma = 0.708$ S/m; $\epsilon_r = 54.024$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section ; Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:


- Probe: EX3DV4 - SN3673; ConvF(11.15, 11.15, 11.15); Calibrated: 3/20/2017;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn874; Calibrated: 8/22/2016
- Phantom: ELI 4.0; Type: QD OVA 001 BB; Serial: 1057
- DASYS 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration_Head_IC-A25N/Head Front, P=5W, d=25mm/Area Scan (61x161x1):

Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.350 W/kg

Configuration_Head_IC-A25N/Head Front, P=5W, d=25mm/Zoom Scan (5x5x7)

(6x6x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 14.20 V/m; Power Drift = -0.13 dB
Peak SAR (extrapolated) = 0.392 W/kg
SAR(1 g) = 0.310 W/kg; SAR(10 g) = 0.248 W/kg (SAR corrected for target medium)
Maximum value of SAR (measured) = 0.338 W/kg

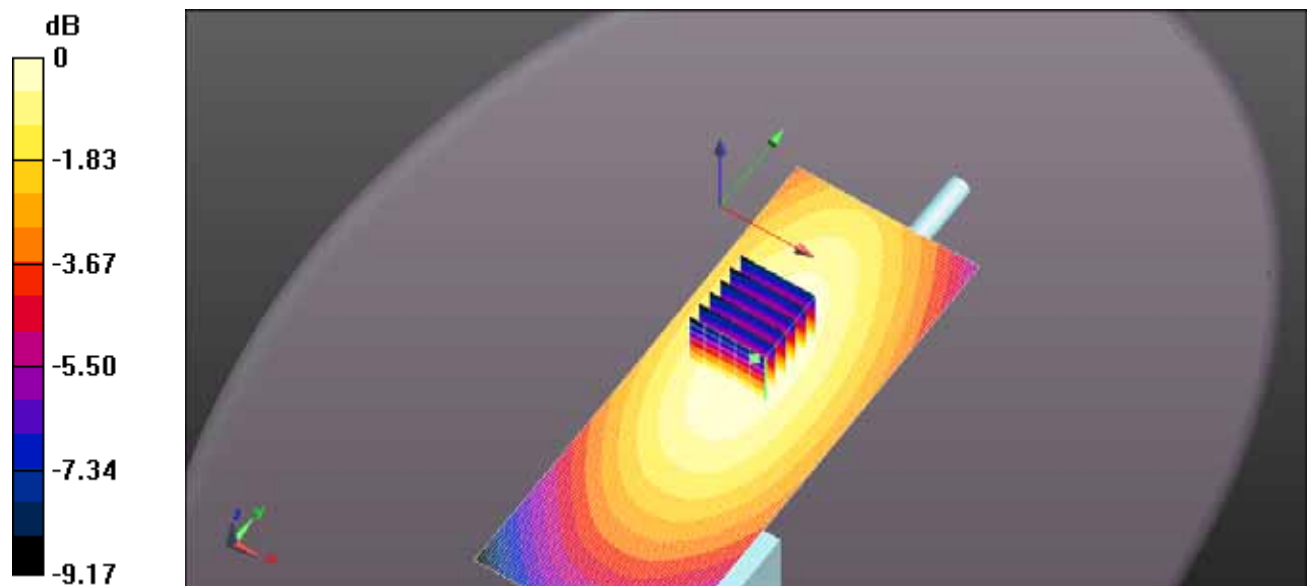

0 dB = 0.350 W/kg = -4.56 dBW/kg

Test Laboratory: Ultratech Group of Labs

File Name: [ICOM-458Q_FA-B02AR_127.5MHz.da52:0](#)

DUT: IC-A25N; Type: VHF Transceiver; Serial: 00000107

Communication System: UID 0, CW (0); Frequency: 127.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 128$ MHz; $\sigma = 0.713$ S/m; $\epsilon_r = 53.253$; $\rho = 1000$ kg/m³; Phantom section:
Flat Section; Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:


- Probe: EX3DV4 - SN3673; ConvF(11.15, 11.15, 11.15); Calibrated: 3/20/2017;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn874; Calibrated: 8/22/2016
- Phantom: ELI 4.0; Type: QD OVA 001 BB; Serial: 1057
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration_Head_IC-A25N/Head Front, P=5W, d=25mm/Area Scan (61x161x1):

Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.630 W/kg

Configuration_Head_IC-A25N/Head Front, P=5W, d=25mm/Zoom Scan (5x5x7)

(6x6x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 19.33 V/m; Power Drift = -0.11 dB
Peak SAR (extrapolated) = 0.722 W/kg
SAR(1 g) = 0.571 W/kg; SAR(10 g) = 0.456 W/kg (SAR corrected for target medium)
Maximum value of SAR (measured) = 0.621 W/kg

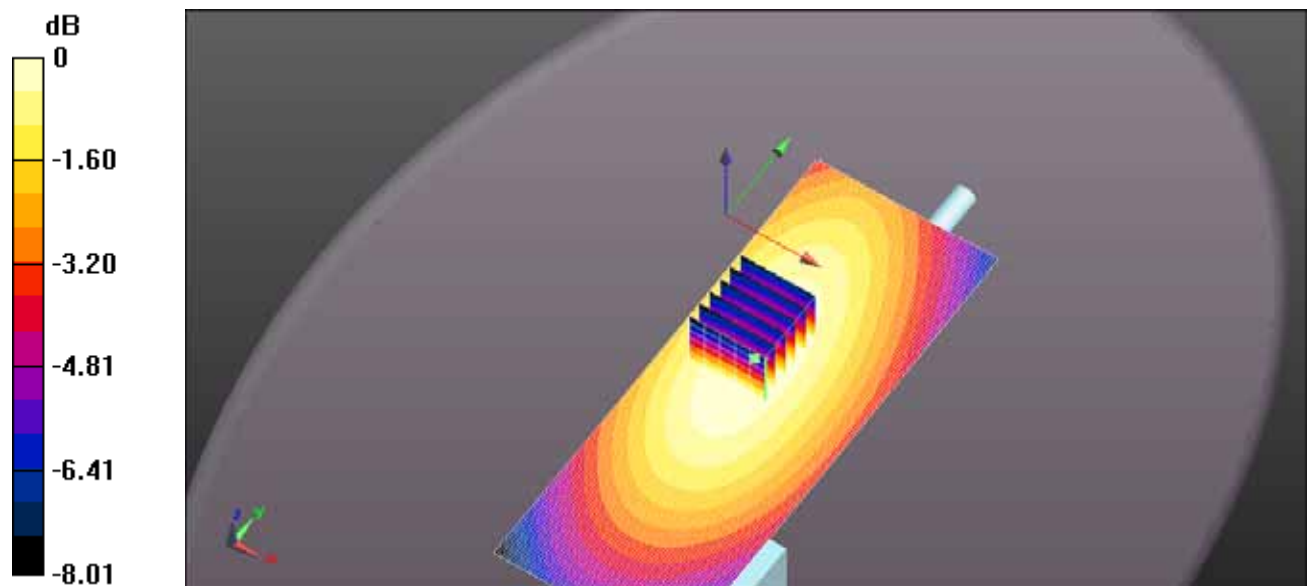

0 dB = 0.630 W/kg = -2.01 dBW/kg

Test Laboratory: Ultratech Group of Labs

File Name: [ICOM-458Q_FA-B02AR_132.25MHz_da52:0](#)

DUT: IC-A25N; Type: VHF Transceiver; Serial: 00000107

Communication System: UID 0, CW (0); Frequency: 132.25 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 132.25$ MHz; $\sigma = 0.716$ S/m; $\epsilon_r = 52.849$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section ; Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:


- Probe: EX3DV4 - SN3673; ConvF(11.15, 11.15, 11.15); Calibrated: 3/20/2017;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn874; Calibrated: 8/22/2016
- Phantom: ELI 4.0; Type: QD OVA 001 BB; Serial: 1057
- DASYS 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration_Head_IC-A25N/Head Front, P=5W, d=25mm/Area Scan (61x161x1):

Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.20 W/kg

Configuration_Head_IC-A25N/Head Front, P=5W, d=25mm/Zoom Scan (5x5x7)

(6x6x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 24.79 V/m; Power Drift = -0.11 dB
Peak SAR (extrapolated) = 1.36 W/kg
SAR(1 g) = 1.07 W/kg; SAR(10 g) = 0.852 W/kg (SAR corrected for target medium)
Maximum value of SAR (measured) = 1.17 W/kg

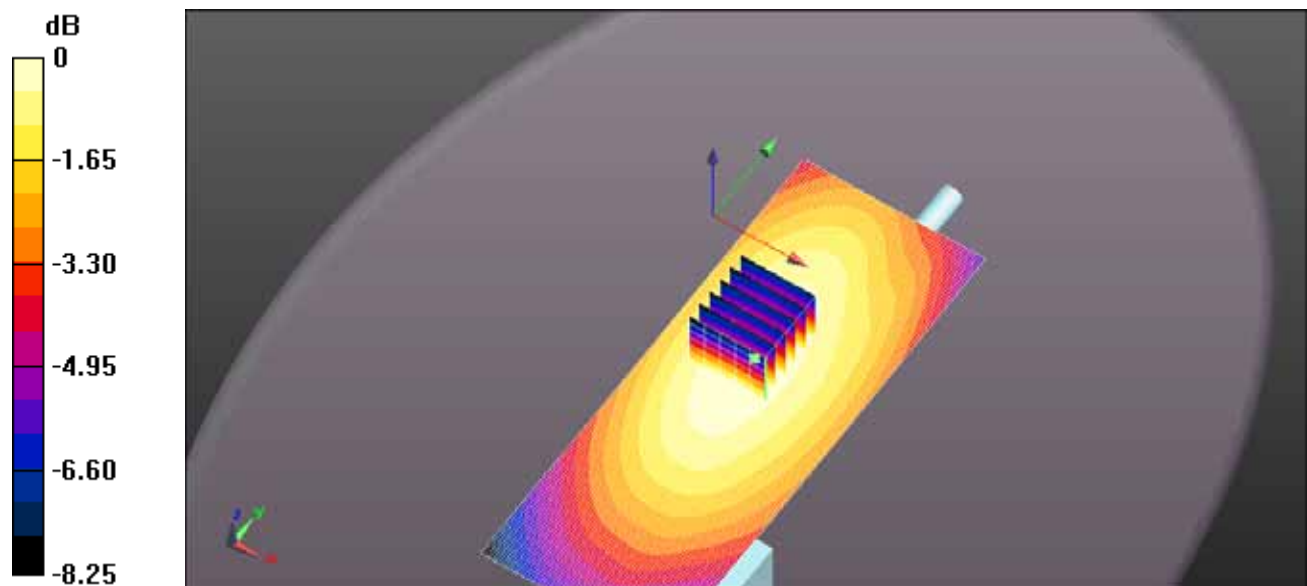

0 dB = 1.20 W/kg = 0.79 dBW/kg

Test Laboratory: Ultratech Group of Labs

File Name: [ICOM-458Q_FA-B02AR_137MHz_da52:0](#)

DUT: IC-A25N; Type: VHF Transceiver; Serial: 00000107

Communication System: UID 0, CW (0); Frequency: 137 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 137 \text{ MHz}$; $\sigma = 0.723 \text{ S/m}$; $\epsilon_r = 52.183$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Flat Section ; Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:


- Probe: EX3DV4 - SN3673; ConvF(11.15, 11.15, 11.15); Calibrated: 3/20/2017;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn874; Calibrated: 8/22/2016
- Phantom: ELI 4.0; Type: QD OVA 001 BB; Serial: 1057
- DASYS 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration_Head_IC-A25N/Head Front, P=5W, d=25mm/Area Scan (61x161x1):

Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
Maximum value of SAR (interpolated) = 0.925 W/kg

Configuration_Head_IC-A25N/Head Front, P=5W, d=25mm/Zoom Scan (5x5x7)

(6x6x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$
Reference Value = 21.32 V/m ; Power Drift = -0.13 dB
Peak SAR (extrapolated) = 1.04 W/kg
SAR(1 g) = 0.816 W/kg ; SAR(10 g) = 0.648 W/kg (SAR corrected for target medium)
Maximum value of SAR (measured) = 0.887 W/kg

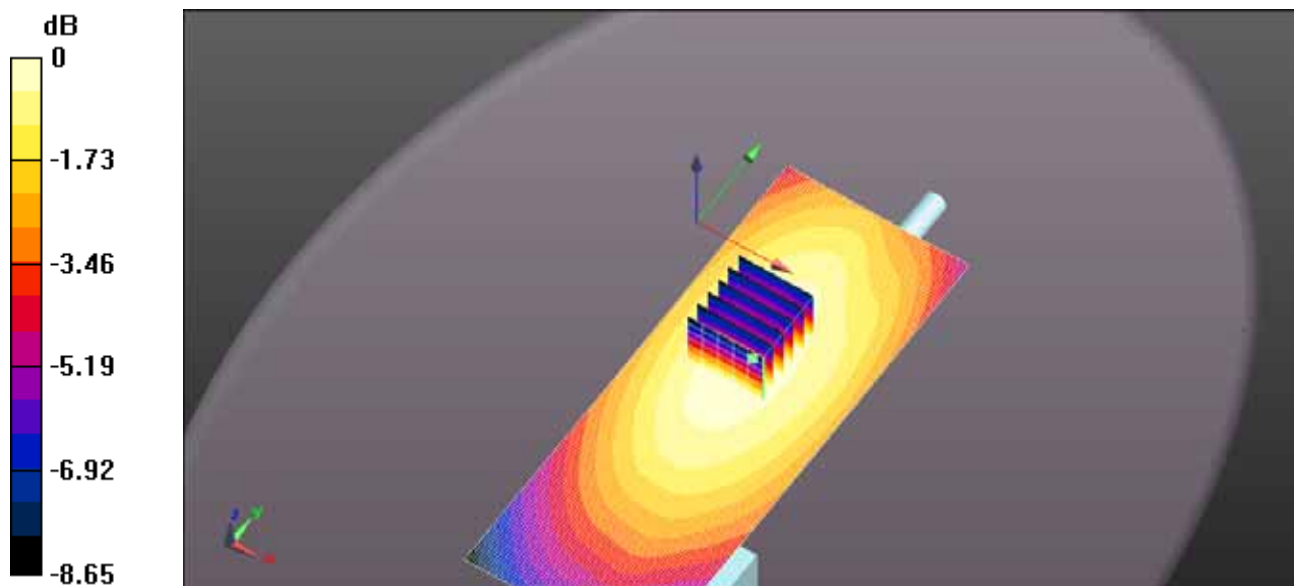

0 dB = $0.925 \text{ W/kg} = -0.34 \text{ dBW/kg}$

EXHIBIT 4. BODY MEASUREMENTS

File Name: [ICOM-458Q FA-B02AR 118MHz.da52:0](#)

DUT: IC-A25N; Type: VHF Transceiver; Serial: 00000107

Communication System: UID 0, CW (0); Frequency: 118 MHz; Duty Cycle: 1:1
Medium parameters used (extrapolated): $f = 118$ MHz; $\sigma = 0.793$ S/m; $\epsilon_r = 60.167$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section ; Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3673; ConvF(10.93, 10.93, 10.93); Calibrated: 3/20/2017;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn874; Calibrated: 8/22/2016
- Phantom: ELI 4.0; Type: QD OVA 001 BB; Serial: 1057
- DASYS 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration_Body_IC-A25N/Body Back, P=5W, d=0mm/Area Scan (61x161x1):

Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.386 W/kg

Configuration_Body_IC-A25N/Body Back, P=5W, d=0mm/Zoom Scan (5x5x7)


(6x6x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 10.04 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.440 W/kg

SAR(1 g) = 0.339 W/kg; SAR(10 g) = 0.263 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.372 W/kg

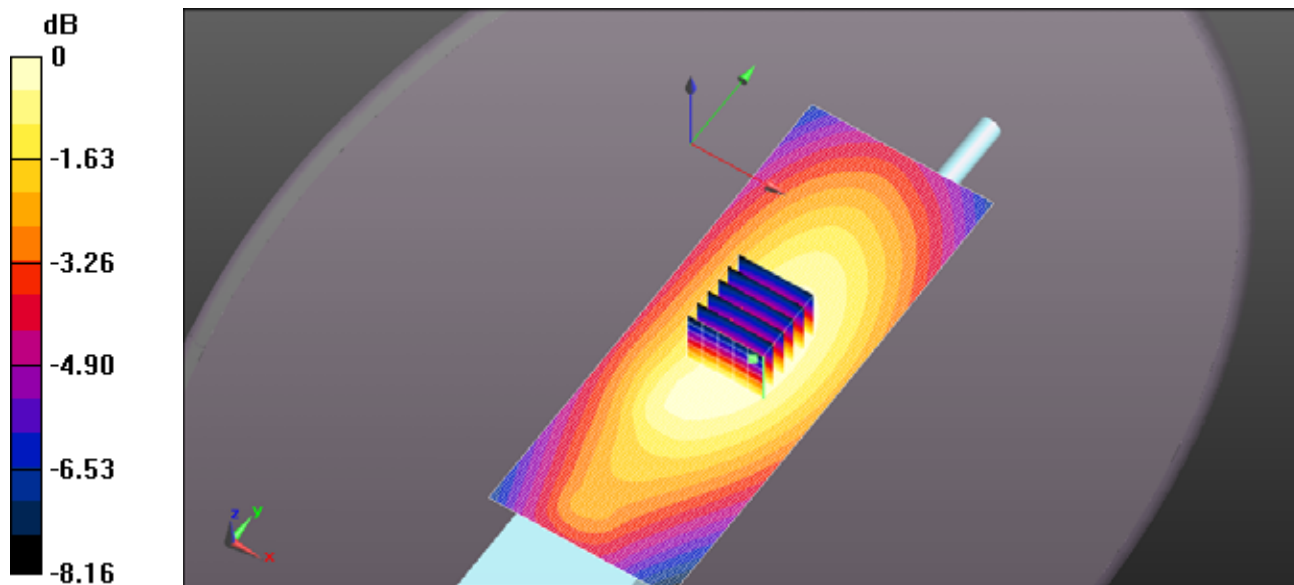

0 dB = 0.386 W/kg = -4.14 dBW/kg

Test Laboratory: Ultratech Group of Labs

File Name: [ICOM-458Q_FA-B02AR_122.75MHz.da52:0](#)

DUT: IC-A25N; Type: VHF Transceiver; Serial: 00000107

Communication System: UID 0, CW (0); Frequency: 122.75 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 122.75$ MHz; $\sigma = 0.791$ S/m; $\epsilon_r = 60.658$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section ; Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:


- Probe: EX3DV4 - SN3673; ConvF(10.93, 10.93, 10.93); Calibrated: 3/20/2017;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn874; Calibrated: 8/22/2016
- Phantom: ELI 4.0; Type: QD OVA 001 BB; Serial: 1057
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration_Body_IC-A25N/Body Back, P=5W, d=0mm/Area Scan (61x161x1):

Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.489 W/kg

Configuration_Body_IC-A25N/Body Back, P=5W, d=0mm/Zoom Scan (5x5x7)

(6x6x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 12.52 V/m; Power Drift = -0.10 dB
Peak SAR (extrapolated) = 0.563 W/kg
SAR(1 g) = 0.434 W/kg; SAR(10 g) = 0.337 W/kg (SAR corrected for target medium)
Maximum value of SAR (measured) = 0.477 W/kg

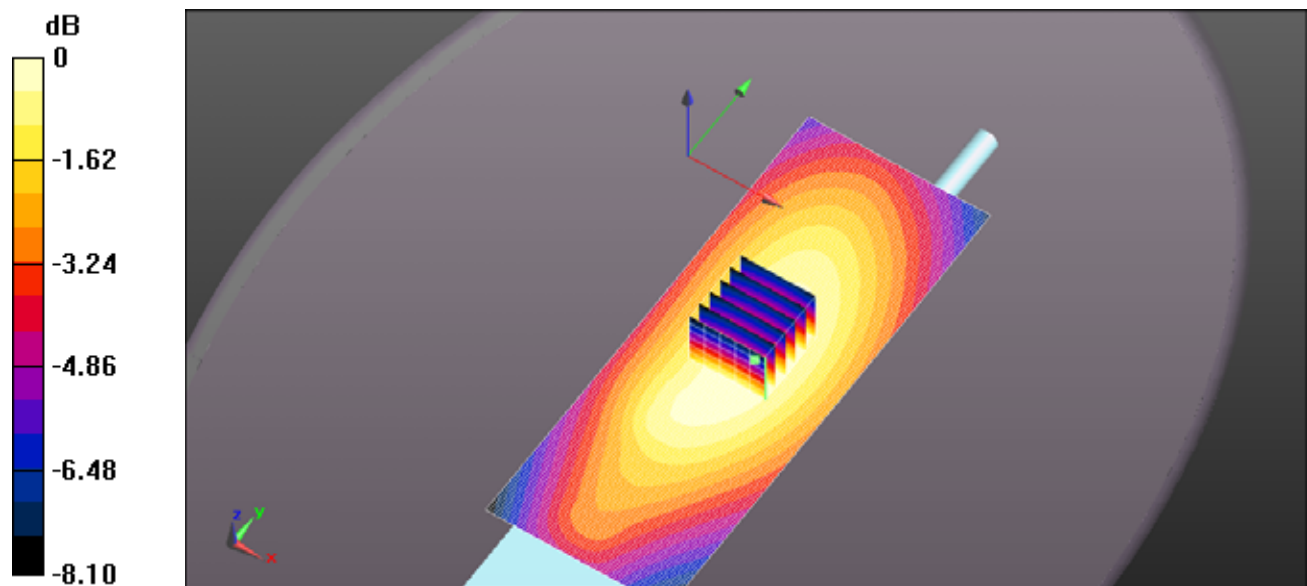

0 dB = 0.489 W/kg = -3.11 dBW/kg

Test Laboratory: Ultratech Group of Labs

File Name: [ICOM-458Q_FA-B02AR_127.5MHz_MB-133.da52:0](#)

DUT: IC-A25N; Type: VHF Transceiver; Serial: 00000107

Communication System: UID 0, CW (0); Frequency: 127.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 128$ MHz; $\sigma = 0.792$ S/m; $\epsilon_r = 60.879$; $\rho = 1000$ kg/m³; Phantom section:
Flat Section; Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:


- Probe: EX3DV4 - SN3673; ConvF(10.93, 10.93, 10.93); Calibrated: 3/20/2017;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn874; Calibrated: 8/22/2016
- Phantom: ELI 4.0; Type: QD OVA 001 BB; Serial: 1057
- DASYS 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration_Body_IC-A25N/Body Back, P=5W, d=0mm/Area Scan (61x161x1):

Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.706 W/kg

Configuration_Body_IC-A25N/Body Back, P=5W, d=0mm/Zoom Scan (5x5x7)

(6x6x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 11.67 V/m; Power Drift = -0.14 dB
Peak SAR (extrapolated) = 0.831 W/kg
SAR(1 g) = 0.637 W/kg; SAR(10 g) = 0.493 W/kg (SAR corrected for target medium)
Maximum value of SAR (measured) = 0.698 W/kg

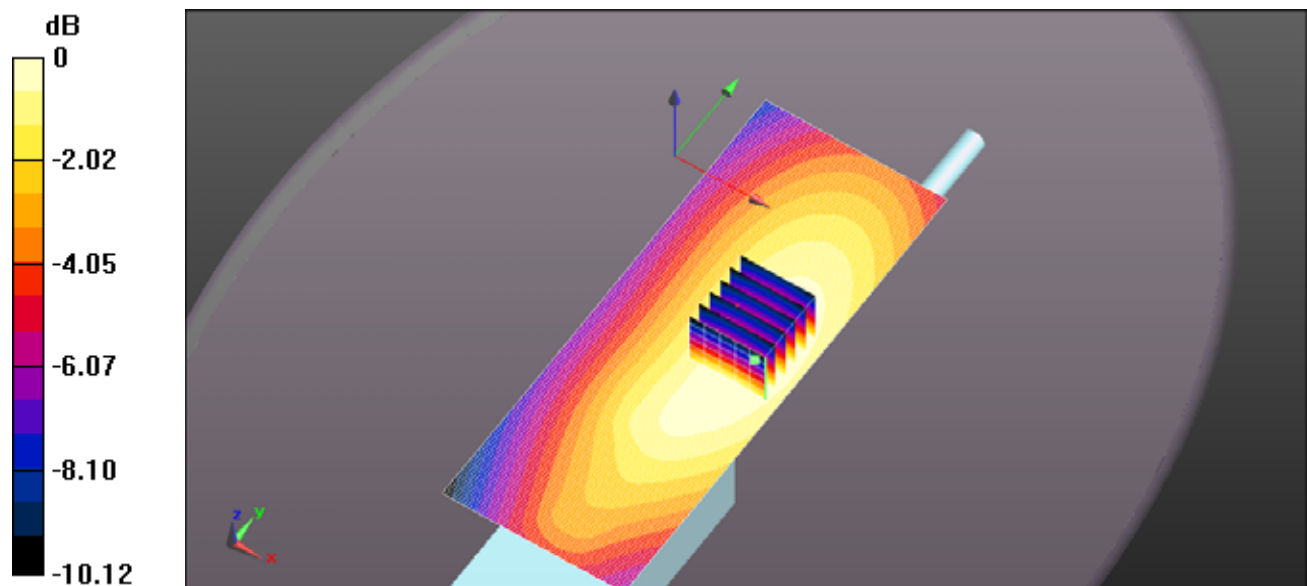

0 dB = 0.706 W/kg = -1.51 dBW/kg

Test Laboratory: Ultratech Group of Labs

File Name: [ICOM-458Q_FA-B02AR_132.25MHz.da52:0](#)

DUT: IC-A25N; Type: VHF Transceiver; Serial: 00000107

Communication System: UID 0, CW (0); Frequency: 132.25 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 132.25$ MHz; $\sigma = 0.789$ S/m; $\epsilon_r = 60.945$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section ; Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3673; ConvF(10.93, 10.93, 10.93); Calibrated: 3/20/2017;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn874; Calibrated: 8/22/2016
- Phantom: ELI 4.0; Type: QD OVA 001 BB; Serial: 1057
- DASYS 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration_Body_IC-A25N/Body Back, P=5W, d=0mm/Area Scan (61x161x1):

Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.632 W/kg

Configuration_Body_IC-A25N/Body Back, P=5W, d=0mm/Zoom Scan (5x5x7)


(6x6x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 14.06 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.738 W/kg

SAR(1 g) = 0.565 W/kg; SAR(10 g) = 0.437 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.622 W/kg

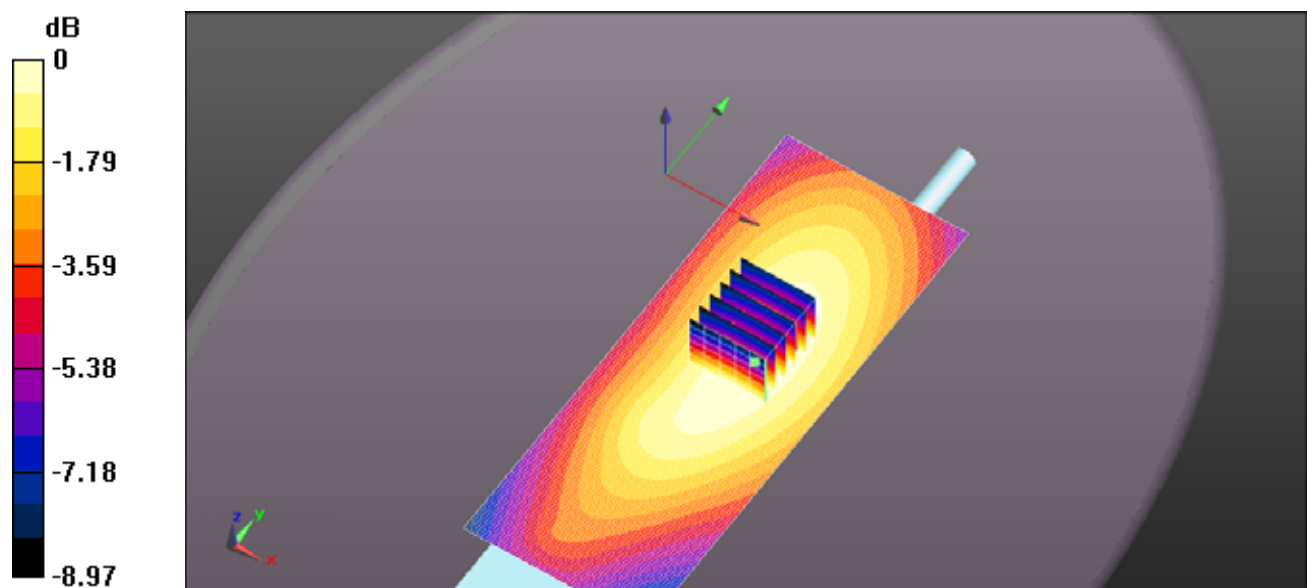

0 dB = 0.632 W/kg = -2.00 dBW/kg

Test Laboratory: Ultratech Group of Labs

File Name: [ICOM-458Q_FA-B02AR_137MHz.da52:0](#)

DUT: IC-A25N; Type: VHF Transceiver; Serial: 00000107

Communication System: UID 0, CW (0); Frequency: 137 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 137$ MHz; $\sigma = 0.786$ S/m; $\epsilon_r = 61.456$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section ; Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:


- Probe: EX3DV4 - SN3673; ConvF(10.93, 10.93, 10.93); Calibrated: 3/20/2017;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn874; Calibrated: 8/22/2016
- Phantom: ELI 4.0; Type: QD OVA 001 BB; Serial: 1057
- DASYS 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration_Body_IC-A25N/Body Back, P=5W, d=0mm/Area Scan (61x161x1):

Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.150 W/kg

Configuration_Body_IC-A25N/Body Back, P=5W, d=0mm/Zoom Scan (5x5x7)

(6x6x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 5.683 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 0.178 W/kg
SAR(1 g) = 0.136 W/kg; SAR(10 g) = 0.104 W/kg (SAR corrected for target medium)
Maximum value of SAR (measured) = 0.150 W/kg

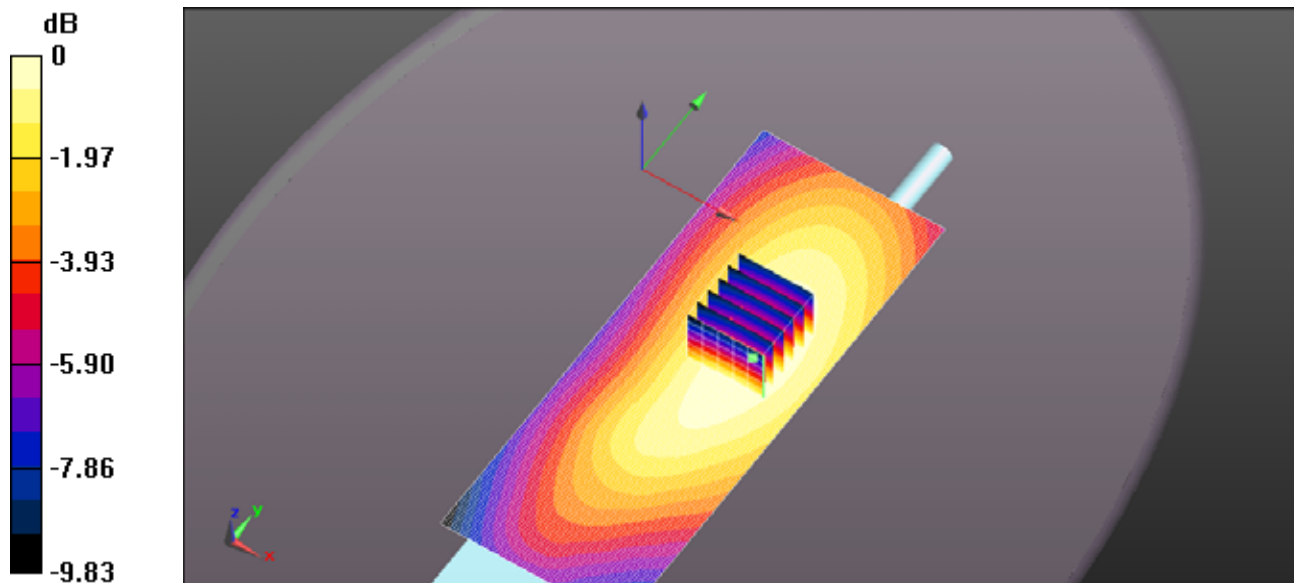

0 dB = 0.150 W/kg = -8.24 dBW/kg