



## **Compliance Testing, LLC**

Previously Flom Test Lab

EMI, EMC, RF Testing Experts Since 1963

toll-free: (866) 311-3268

fax: (480) 926-3598

<http://www.ComplianceTesting.com>

[info@ComplianceTesting.com](mailto:info@ComplianceTesting.com)

# **Test Report**

**Prepared for: Icom Incorporated**

**Model: IC-R30**

**Description: Communications Receiver**

**FCC ID: AFJ375410**

**To**

**FCC Part 15.121**

**Date of Issue: May 8, 2018**

**On the behalf of the applicant:**

**Icom Incorporated  
1-1-32 Kamiminami Hirano-ku  
Osaka 547-0003  
Japan**

**Attention of:**

**Atsushi Tomiyama, General Manager of QA Department  
Ph: +81 6 6793 8424  
E-Mail: [world\\_support@icom.co.jp](mailto:world_support@icom.co.jp)**

**Prepared by  
Compliance Testing, LLC  
1724 S. Nevada Way  
Mesa, AZ 85204  
(480) 926-3100 phone / (480) 926-3598 fax  
[www.compliancetesting.com](http://www.compliancetesting.com)  
Project No: p1840008.2**

**Greg Corbin  
Project Test Engineer**

This report may not be reproduced, except in full, without written permission from Compliance Testing.  
All results contained herein relate only to the sample tested



### Test Report Revision History

Revision	Date	Revised By	Reason for Revision
1.0	April 27, 2018	Greg Corbin	Original Document
2.0	May 7, 2018	Amanda Reed	Updated company information & typo on accessories list
3.0	May 8, 2018	Greg Corbin	Updated cal due date for asset i00379

## Table of Contents

<b><u>Description</u></b>	<b><u>Page</u></b>
Standard Test Conditions Engineering Practices.....	6
Test Results Summary .....	8
Conducted Spurious Emissions .....	9
Radiated Spurious Emissions .....	10
15.107 A/C Powerline Conducted Emissions.....	11
Test Equipment Utilized .....	14

**ILAC / A2LA**

Compliance Testing, LLC, has been accredited in accordance with the recognized International Standard ISO/IEC 17025:2005. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to the joint ISO-ILAC-IAF Communiqué dated January 2009).

The tests results contained within this test report all fall within our scope of accreditation, unless noted in the table below.

Please refer to <http://www.compliancetesting.com/labscope.html> for current scope of accreditation.

Testing Certificate Number: **2152.01**



**FCC Site Reg. #349717**

**IC Site Reg. #2044A-2**

**Non-accredited tests contained in this report:**

**N/A**

**The applicant has been cautioned as to the following:**

**15.21 Information to User**

The user's manual or instruction manual for an intentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

**15.27(a) Special Accessories**

Equipment marketed to a consumer must be capable of complying with the necessary regulations in the configuration in which the equipment is marketed. Where special accessories, such as shielded cables and/or special connectors are required to enable an unintentional or intentional radiator to comply with the emission limits in this part, the equipment must be marketed with, i.e. shipped and sold with, those special accessories. However, in lieu of shipping or packaging the special accessories with the unintentional or intentional radiator the responsible part may employ other methods of ensuring that the special accessories are provided to the consumer, without an additional charge.

Information detailing any alternative method used to supply the special accessories for a grant of equipment authorization or retained in the verification records, as appropriate. The party responsible for the equipment, as detailed in § 2.909 of this chapter, shall ensure that these special accessories are provided with the equipment. The instruction manual for such devices shall include appropriate instructions on the first page of text concerned with the installation of the device that these special accessories must be used with the device. It is the responsibility of the user to use the needed special accessories supplied with the equipment.

## Standard Test Conditions Engineering Practices

Except as noted herein, the following conditions and procedures were observed during the testing: FCC Part15.121.

In accordance with ANSI C63.10-2014 and unless otherwise indicated in the specific measurement results, the ambient temperature of the actual EUT was maintained within the range of 10° to 40°C (50° to 104°F), unless the particular equipment requirements specified testing over a different temperature range. Also, unless otherwise indicated, the humidity levels were in the range of 10% to 90% relative humidity.

Measurement results, unless otherwise noted, are worst-case measurements.

Environmental Conditions		
Temperature (°C)	Humidity (%)	Pressure (mbar)
24.8 – 27.1	21.7 – 37.0	963.8 – 968.2

### EUT Description

**Model:** IC-R30

**Description:** Communications Receiver

**Firmware:** 3.19

**Serial Number:** 00000307

**Additional Information:**

The EUT is a portable, digital and analog scanning receiver with 2 receive bands.

Band A frequency range is 0.100 – 3304.999990 MHz.

Band B frequency range is 108 – 520 MHz.

The scanning receiver is capable of operating in the following receive modes:

FM, FM-N, WFM, AM, AM-N, LSB, USB, CW, CW-R, D-Star (DV), P25, dPMR, NXDN-VN, NXDN-N, DCR

Some receive modes are frequency and band dependent. Refer to the user manual for further details.

The EUT is powered by a 3.6 vdc rechargeable Li-Ion battery.

This scanning receiver does not provide blocking of cellular radiotelephone service bands per FCC 15.121(a)(1)(2) and 15.121(b).

Per FCC 15.121(c) Scanning receivers and frequency converters designed or marketed for use with scanning receivers, are not subject to the requirements of paragraphs (a) and (b) of this section provided that they are manufactured exclusively for, and marketed exclusively to, entities described in 18 U.S.C. 2512(2), or are marketed exclusively as test equipment pursuant to §15.3(dd)

### EUT Operation during Tests

Receiver was tested in normal operating mode in scanning and non-scanning modes of operation.

In the non-scanning mode the receiver was set to the low, mid, and high frequencies of operation.

In the scanning mode the receiver was set to the maximum allowable step size and scanned across the allowable frequency range.



**Accessories:**

Qty	Description	Manufacturer	Model	S/N
1	Antenna	ICOM	FA-S01RE	N/A
1	Earphone	ICOM	SP-40	N/A
1	Battery, Li-Ion	ICOM	BP-287	83A
1	Charger Stand	ICOM	BC-223	N/A
1	ITE Power Supply, AC to DC	ICOM	BC123SA	N/A

**Cables:** None

**Modifications:** None



## Test Results Summary

Specification	Test Name	Pass, Fail, N/A	Comments
15.109(f), 15.111(a)	Conducted Spurious Emissions	Pass	
15.109	Radiated Spurious Emissions	Pass	
15.107	AC Powerline Conducted Emissions	Pass	



## Conducted Spurious Emissions

**Engineer:** Greg Corbin

**Test Date:** 4/26/2018

### Test Procedure

Per FCC section 15.109(f), For a receiver which employs terminals for the connection of an external receiving antenna, the receiver shall be tested to demonstrate compliance with the provisions of this section with an antenna connected to the antenna terminals unless the antenna conducted power is measured as specified in §15.111(a).

FCC section 15.111(a) states: In addition to the radiated emission limits, receivers that operate (tune) in the frequency range 30 to 960 MHz and CB receivers that provide terminals for the connection of an external receiving antenna may be tested to demonstrate compliance with the provisions of §15.109 with the antenna terminals shielded and terminated with a resistive termination equal to the impedance specified for the antenna, provided these receivers also comply with the following: With the receiver antenna terminal connected to a resistive termination equal to the impedance specified or employed for the antenna, the power at the antenna terminal at any frequency within the range of measurements specified in §15.33 shall not exceed 2.0 nanowatts.

All signals measured at the receiver antenna port were below 2 nanowatts (-57 dBm). Refer to Annex A for supporting test data.

The EUT was connected directly to the spectrum analyzer and conducted spurious emissions were recorded for each type of modulation in both scanning and non-scanning mode. Scanning mode was performed across the allowed frequency range of 30 – 3000 MHz.

### Test Setup



**Refer to Annex A for conducted spurious emission test results.**

## Radiated Spurious Emissions

**Engineer:** Greg Corbin

**Test Date:** 4/26/2018

### Test Procedure

The EUT was tested in a semi-anechoic chamber with the turntable set 3m from the receiving antenna. A spectrum analyzer was used to verify that the EUT met the requirements for Radiated Emissions. The EUT was tested by rotating it 360 degrees with the antennas in both the vertical and horizontal orientation while raised from 1 to 4 meters to ensure the signal levels were maximized. All emissions from 30 MHz to 15 GHz were examined.


The EUT antenna ports were terminated with their characteristic impedance.

Radiated measurements were only performed with the receiver tuned to fixed frequencies due to the receiver taking a long time to scan the entire band and the complex nature of trying to measure a scanning receiver with a spectrum analyzer also scanning across a certain frequency range.

RBW = 120 kHz below 1 GHz.

RBW = 1 MHz above 1 GHz.

### Test Setup



**Refer to Annex B for Radiated Spurious Emission test data**

### 15.107 A/C Powerline Conducted Emissions


**Engineer:** Greg Corbin

**Test Date:** 4/26/2018

#### Test Procedure

The EUT power cable was connected to a LISN and the monitored output of the LISN was connected to a transient limiter, which then connected directly to a spectrum analyzer. The conducted emissions from 150 kHz to 30 MHz were measured and compared to the specification limits.


#### Test Setup






## Conducted Emissions Test Results

### Line 1 Peak Plot

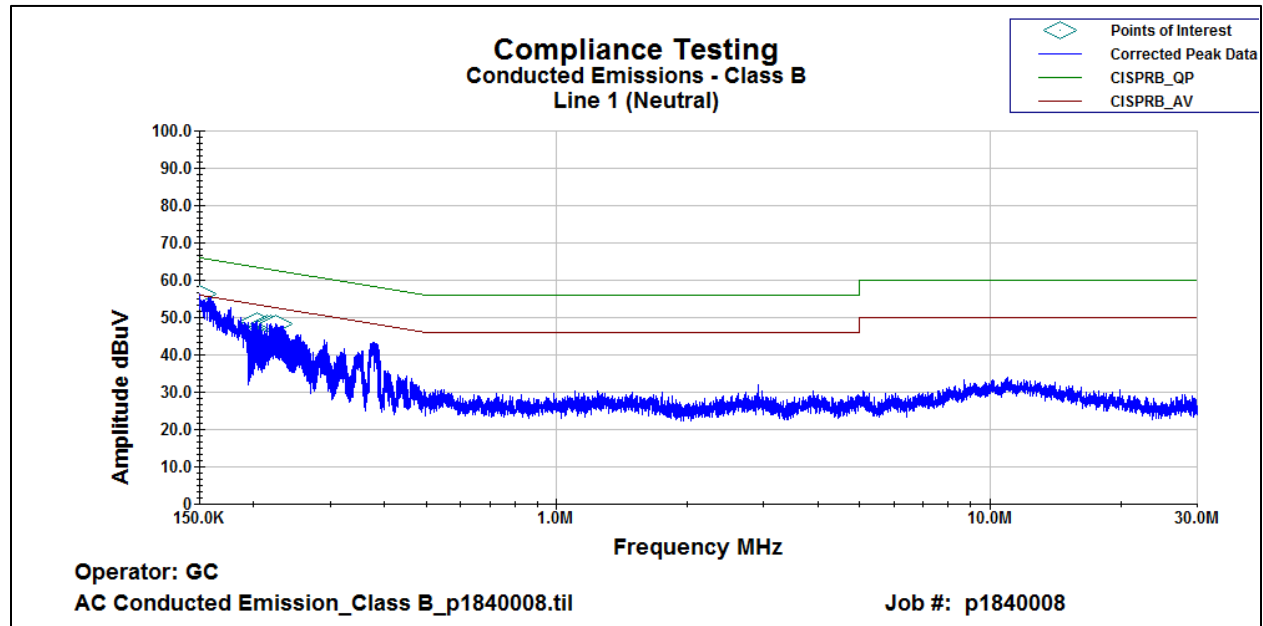

### Line 2 Peak Plot

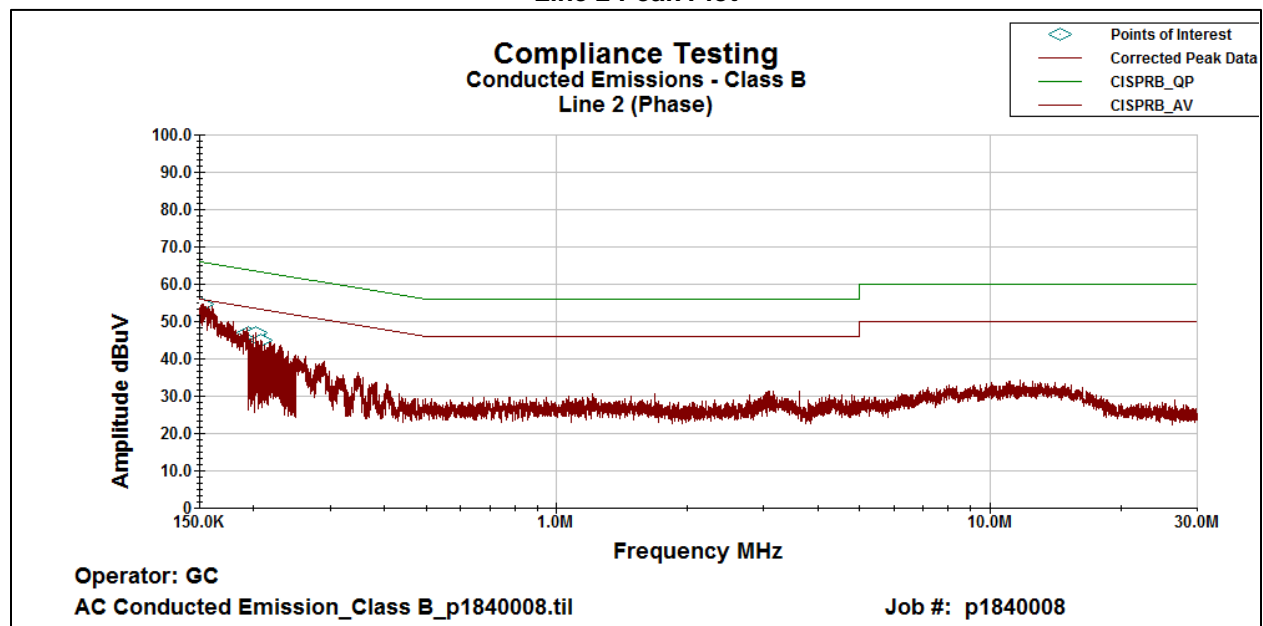



**Line 1 Neutral Avg Detector**

Frequency	Measured Value (dBuV)	LISN Correction Factor (dB)	Cable Loss (dB)	Transient Limiter (dB)	Final Data (dBuV)	Limit (dBuV)	Avg Margin (dB)
157.48 KHz	25.24	0.23	0.02	10.2	35.682	55.786	-20.104
186.04 KHz	19.76	0.2	0.02	10.1	30.08	54.97	-24.89
202.05 KHz	20.47	0.2	0.02	10.1	30.786	54.513	-23.727
221.73 KHz	24.15	0.19	0.021	10.1	34.46	53.951	-19.49
222.21 KHz	24.2	0.19	0.021	10.1	34.51	53.937	-19.427
221.03 KHz	23.95	0.19	0.021	10.1	34.261	53.971	-19.71

**Line 2 Phase Avg Detector**

Frequency	Measured Value (dBuV)	LISN Correction Factor (dB)	Cable Loss (dB)	Transient Limiter (dB)	Final Data (dBuV)	Limit (dBuV)	Avg Margin (dB)
150.13 KHz	25.9	0.3	0.02	10.2	36.419	55.996	-19.578
179.86 KHz	17.45	0.2	0.02	10.1	27.77	55.147	-27.377
188.95 KHz	16.37	0.2	0.02	10.1	26.693	54.887	-28.194
189.39 KHz	16.25	0.2	0.02	10.1	26.573	54.875	-28.301
190.52 KHz	16.57	0.2	0.02	10.1	26.89	54.842	-27.952
192.65 KHz	16.18	0.2	0.02	10.1	26.5	54.781	-28.281

**Line 1 Neutral QP Detector**

Frequency	Measured Value (dBuV)	LISN Correction Factor (dB)	Cable Loss (dB)	Transient Limiter (dB)	Final Data (dBuV)	Limit (dBuV)	QP Margin (dB)
157.48 KHz	40.71	0.225	0.02	10.2	51.155	65.786	-14.631
186.04 KHz	33.68	0.2	0.02	10.1	44	64.97	-20.97
202.05 KHz	33.82	0.199	0.02	10.1	44.139	64.513	-20.374
221.73 KHz	33.49	0.189	0.021	10.1	43.8	63.951	-20.15
222.21 KHz	33.55	0.189	0.021	10.1	43.86	63.937	-20.077
221.03 KHz	33.5	0.189	0.021	10.1	43.811	63.971	-20.16

**Line 2 Phase QP Detector**

Frequency	Measured Value (dBuV)	LISN Correction Factor (dB)	Cable Loss (dB)	Transient Limiter (dB)	Final Data (dBuV)	Limit (dBuV)	QP Margin (dB)
150.13 KHz	40.5	0.3	0.02	10.2	51.019	65.996	-14.978
179.86 KHz	33.58	0.2	0.02	10.1	43.9	65.147	-21.247
188.95 KHz	32.79	0.2	0.02	10.1	43.11	64.887	-21.777
189.39 KHz	32.74	0.2	0.02	10.1	43.06	64.875	-21.815
190.52 KHz	32.86	0.2	0.02	10.1	43.18	64.842	-21.662
192.65 KHz	32.49	0.2	0.02	10.1	42.81	64.781	-21.971



## Test Equipment Utilized

Description	Manufacturer	Model Number	CT Asset Number	Last Cal Date	Cal Due Date
Horn Antenna	ARA	DRG-118/A	i00271	6/16/16	6/16/18
Humidity / Temp Meter	Newport	IBTHX-W-5	i00282	6/9/2017	6/9/2018
Bi-Log Antenna	Schaffner	CBL 6111D	i00349	8/3/16	8/3/18
EMI Analyzer	Agilent	E7405A	i00379	2/13/18	2/13/19
Signal Generator	Rohde & Schwarz	SMU200A	i00405	5/5/17	5/5/18
Spectrum Analyzer	Textronix	RSA5126A	i00424	5/3/17	5/3/18
3 Meter Semi-Anechoic Chamber	Panashield	3 Meter Semi-Anechoic Chamber	i00428	8/15/16	8/15/19
Preamplifier for 1-18GHz horn antenna	Miteq	AFS44 00101 400 23-10P-44	i00509	N/A	N/A
Spectrum Analyzer	Agilent	E4448A	S/N:US42070207	8/5/16	8/5/18

In addition to the above listed equipment standard RF connectors and cables were utilized in the testing of the described equipment. Prior to testing these components were tested to verify proper operation.

END OF TEST REPORT