



Toll-free: (866) 311-3268
Fax: (480) 926-3598

www.ComplianceTesting.com
info@ComplianceTesting.com

Test Report

Prepared for: Icom Incorporated

Model: ID-52A

Description: VHF/UHF Digital transceiver

Serial Number: 00000505

FCC ID: AFJ386700
IC: 202D-386700

To

FCC Part 15.121

And

IC RSS-215 Issue 2 (June 2009)

Date of Issue: November 18, 2020

On the behalf of the applicant: **ICOM Incorporated**
1-1-32 Kamiminami Hirano-ku
Osaka, 547-0003
Japan

Attention of: **Masaaki Takahashi,**
Ph: (425)450-6043
E-Mail: MasaakiTakahashi@IcomAmerica

Prepared By
Compliance Testing, LLC
1724 S. Nevada Way
Mesa, AZ 85204
(480) 926-3100 phone / (480) 926-3598 fax
www.compliancetesting.com
Project No: p2090002

Poona Saber
Project Test Engineer

This report may not be reproduced, except in full, without written permission from Compliance Testing.
All results contained herein relate only to the sample tested.

Test Report Revision History

| Revision | Date | Revised By | Reason for Revision |
|-----------------|------------------|-------------------|----------------------------|
| 1.0 | November 18,2020 | Poona Saber | Original Document |
| | | | |
| | | | |
| | | | |



Table of Contents

| <u>Description</u> | <u>Page</u> |
|--|-------------|
| Standard Test Conditions Engineering Practices | 6 |
| Test Results Summary | 8 |
| Conducted Spurious Emissions | 9 |
| 15.107 A/C Powerline Conducted Emissions | 15 |
| 15.109 Radiated Emissions | 20 |
| Test Equipment Utilized | 21 |



The applicant has been cautioned as to the following

FCC

15.21 – Information to user

The user's manual or instruction manual for an intentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

15.27(a) – Special Accessories

Equipment marketed to a consumer must be capable of complying with the necessary regulations in the configuration in which the equipment is marketed. Where special accessories such as shielded cables and/or special connectors are required to enable an unintentional or intentional radiator to comply with the emission limits in the part, the equipment must be marketed with, i.e. shipped and sold with, those special accessories. However, in lieu of shipping or packaging the special accessories with the unintentional or intentional radiator, the responsible party may employ other methods of ensuring that the special accessories are provided to the consumer without an additional charge.

Information detailing any alternative method used to supply the special accessories for a grant of equipment authorization or retained in the verification records, as appropriate. The party responsible for the equipment, as detailed in §2.909 of this chapter, shall ensure that these special accessories are provided with the equipment. The instruction manual for such devices shall include appropriate instructions on the first page of text concerned with the installation of the device that these special accessories must be used with the device. It is the responsibility of the user to use the needed special accessories supplied with the equipment.

ANAB

Compliance Testing, LLC, has been accredited in accordance with the recognized International Standard ISO/IEC 17025:2017. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to the joint ISO-ILAC-IAF Communiqué dated January 2009).

The tests results contained within this test report all fall within our scope of accreditation, unless noted below.

Please refer to <http://www.compliancetesting.com/labscope.html> for current scope of accreditation.



FCC Site Reg. #349717

IC Site Reg. #2044A-2

Non-accredited tests contained in this report:

N/A

Standard Test Conditions Engineering Practices

Except as noted herein, the following conditions and procedures were observed during the testing: FCC Part 15.121.

In accordance with ANSI C63.10-2014 and unless otherwise indicated in the specific measurement results, the ambient temperature of the actual EUT was maintained within the range of 10° to 40°C (50° to 104°F), unless the particular equipment requirements specified testing over a different temperature range. Also, unless otherwise indicated, the humidity levels were in the range of 10% to 90% relative humidity.

Measurement results, unless otherwise noted, are worst-case measurements.

| Environmental Conditions | | |
|--------------------------|--------------|-----------------|
| Temperature (°C) | Humidity (%) | Pressure (mbar) |
| 24.3 | 30.2 | 973.4 |

EUT Description

Model: ID-52

Description: VHF/UHF Digital transceiver

Serial Number: 0000505

Additional Information:

Device under test is a VHF/UHF digital transceiver with the scanning receiver that works in the following range:
 88-108 MHz, FM mode.
 108-174 MHz Am and FM mode.
 225-479 MHz, FM mode.

Device works Both with a Li-ion battery that comes with a rapid charger and AC/DC power adapter. It has an external BNC antenna connector with a 50 Ohms impedance.

The transmitter is used for amateur radio service per Part 97 and is exempt from FCC certification. As stated at one of the FCC Wireless Telecommunications Bureau (WTB) websites for Part 97, the FCC (OET) equipment authorization program does not generally apply to amateur radio service station transmitters.

The scanning receiver was tested to comply with part47 CFR 15.109, 15.111, and 15.121.

This scanning receiver upper operating range is up to 479 MHz and is not capable of scanning in the Part 22 Cellular Radiotelephone Service band per 15.121(a)(1). Therefor this scanning receiver meets the requirements of section 15.121 (b) by design since it cannot receive any signals above 479 MHz.

Unit contains a pre certified Bluetooth (FCC ID: VIYHRM1016, IC: 7305A-HRM1016) and GPS radios. Bluetooth radio is put on off mode and GPS position Fix is on manual.

EUT Operation during Tests

Unit is powered with 7.4V Li-ion battery and an AC/DC power adapter. It is tested with both power Li-ion battery on rapid charger and with AC adapter. The external antenna is connected for radiated measurement and terminated to spectrum analyzer for conducted measurements.

Accessories:

| Qty | Description | Manufacturer | Model | S/N |
|-----|-----------------------------|--------------|----------|-----|
| 1 | AC Charger | ICOM | BC-167SA | N/A |
| 1 | AC battery charger | ICOM | BC-123SA | N/A |
| 1 | DC Li-ion rapid charger | ICOM | BC-202 | N/A |
| 1 | Rechargeable Li-ion Battery | ICOM | BP-307 | N/A |

Cables:

| Qty | Description | Length (M) | Shielding Y/N | Shielded Hood Y/N | Termination |
|-----|-------------|------------|---------------|-------------------|-------------|
| | None | | | | |

Modifications: None

Test Results Summary

| FCC Specification | ISED Specification | Test Name | Pass, Fail, N/A | Comments |
|--------------------------|----------------------------|----------------------------------|------------------------|---|
| 15.109(f), 15.111(a) | RSS 215 5.1 RSS Gen 7.4 | Conducted Spurious Emissions | Pass | |
| 15.109 | RSS 215 5.1 RSS Gen 7.3 | Radiated Spurious Emissions | Pass | |
| 15.107 | RSS Gen 7.2 | AC Powerline Conducted Emissions | Pass | |
| 15.121(b) | NA | Rejection | N/A | EUT is not capable of operating in the Part 22 Cellular Radiotelephone band |

Conducted Spurious Emissions

Engineer: Poona Saber

Test Date: 11/18/2020

Test Procedure

Per FCC section 15.109(f), For a receiver which employs terminals for the connection of an external receiving antenna, the receiver shall be tested to demonstrate compliance with the provisions of this section with an antenna connected to the antenna terminals unless the antenna conducted power is measured as specified in §15.111(a).


FCC section 15.111(a) states: In addition to the radiated emission limits, receivers that operate (tune) in the frequency range 30 to 960 MHz and CB receivers that provide terminals for the connection of an external receiving antenna may be tested to demonstrate compliance with the provisions of §15.109 with the antenna terminals shielded and terminated with a resistive termination equal to the impedance specified for the antenna, provided these receivers also comply with the following: With the receiver antenna terminal connected to a resistive termination equal to the impedance specified or employed for the antenna, the power at the antenna terminal at any frequency within the range of measurements specified in §15.33 shall not exceed 2.0 nanowatts.

The EUT was connected as shown in the test set-up and tested at both scanning and non-scanning modes. All signals measured at the receiver antenna port were below 2 nanowatts (-57 dBm) for upto 1 GHz and 5 nanowatts (-54 dBm) for above 1 GHz.


Test Results

30 MHz-1GHz non-scanning


Spurious Emissions radio toned at 88 MHz

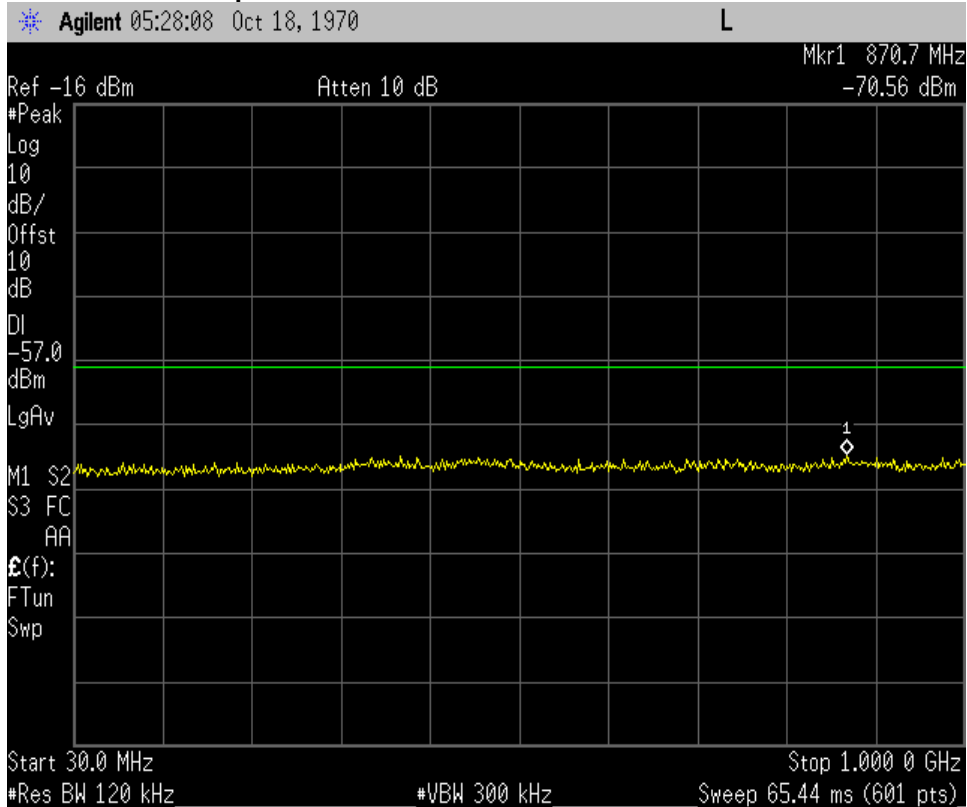


Spurious Emissions radio toned at 98 MHz

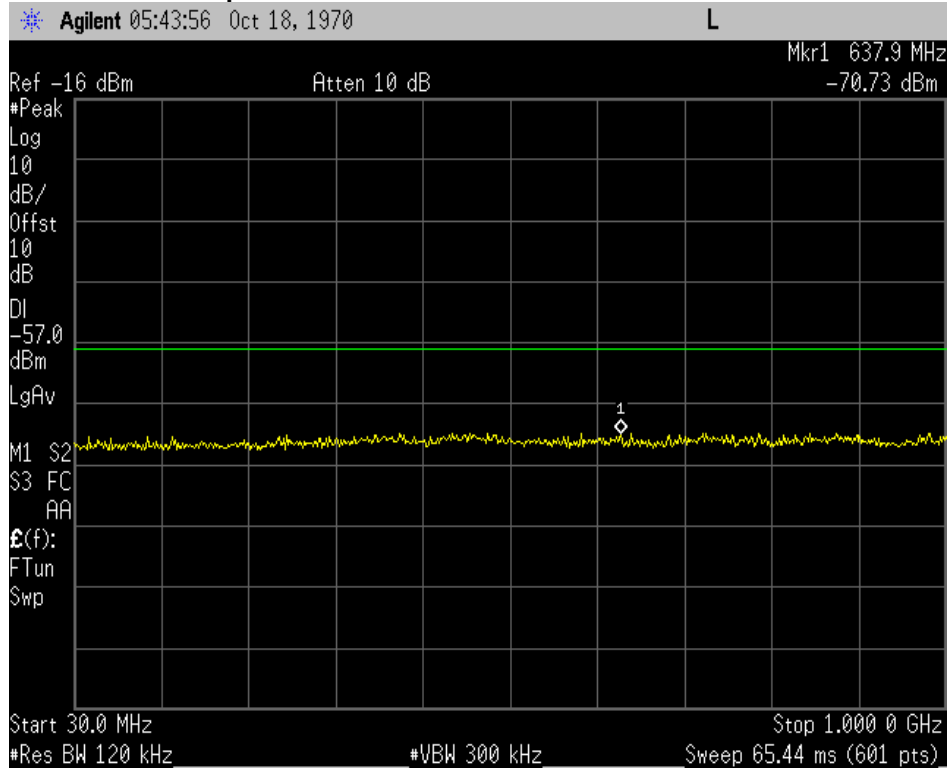


Spurious Emissions radio toned at 107 MHz

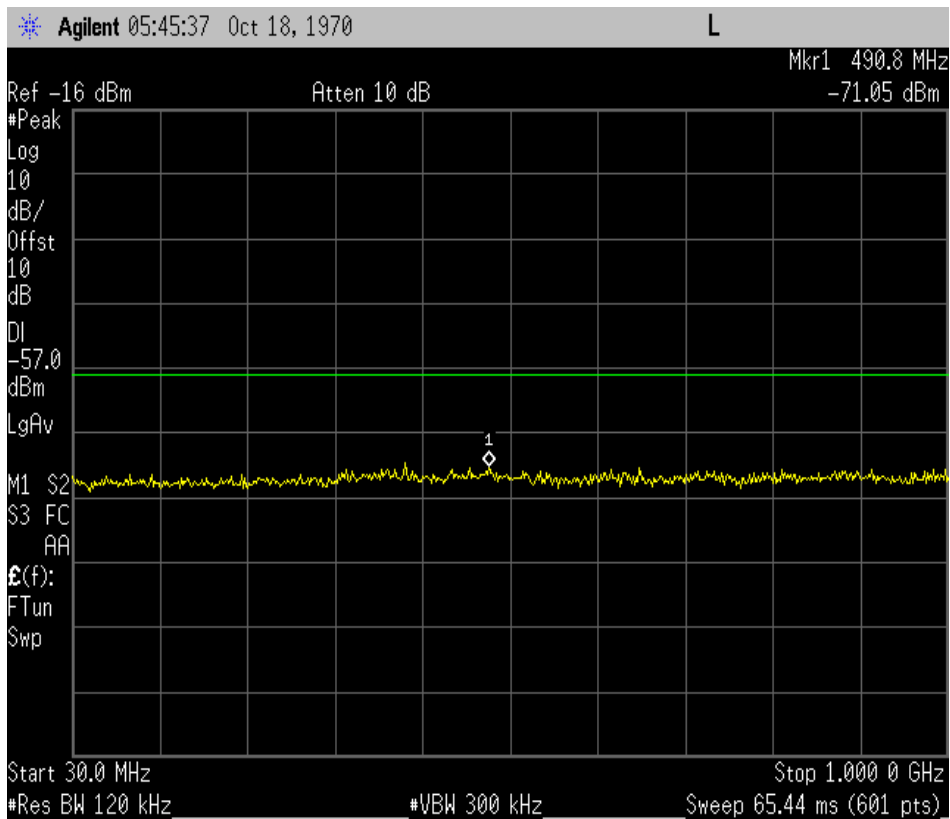


Spurious Emissions radio toned at 108 MHz

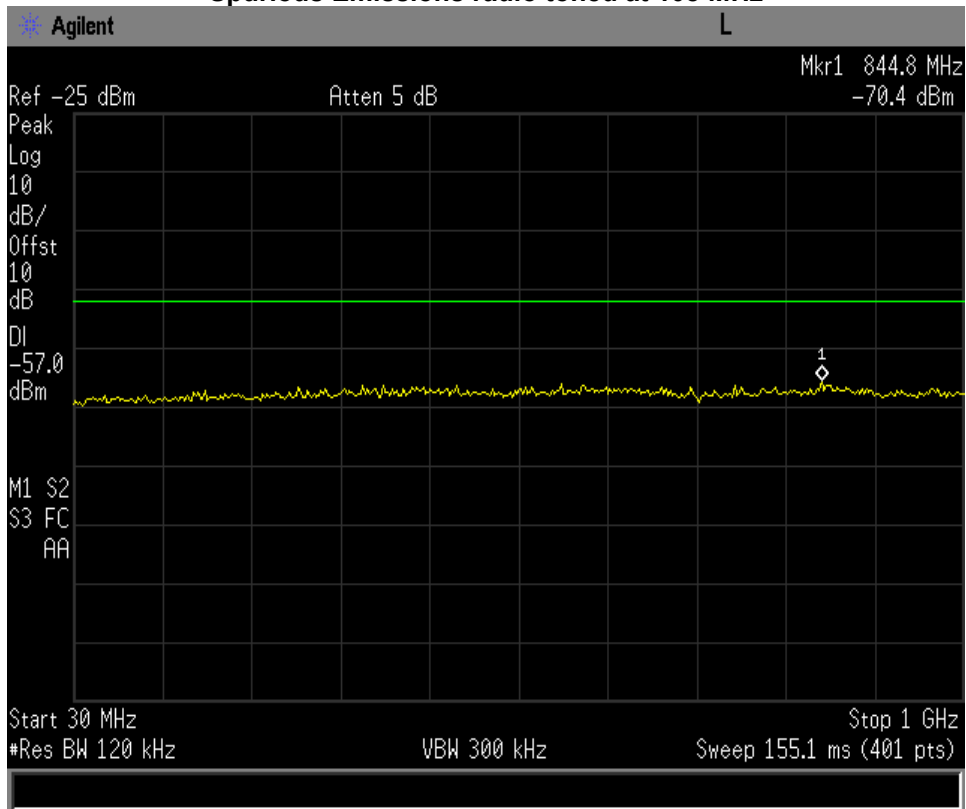


Spurious Emissions radio toned at 141 MHz

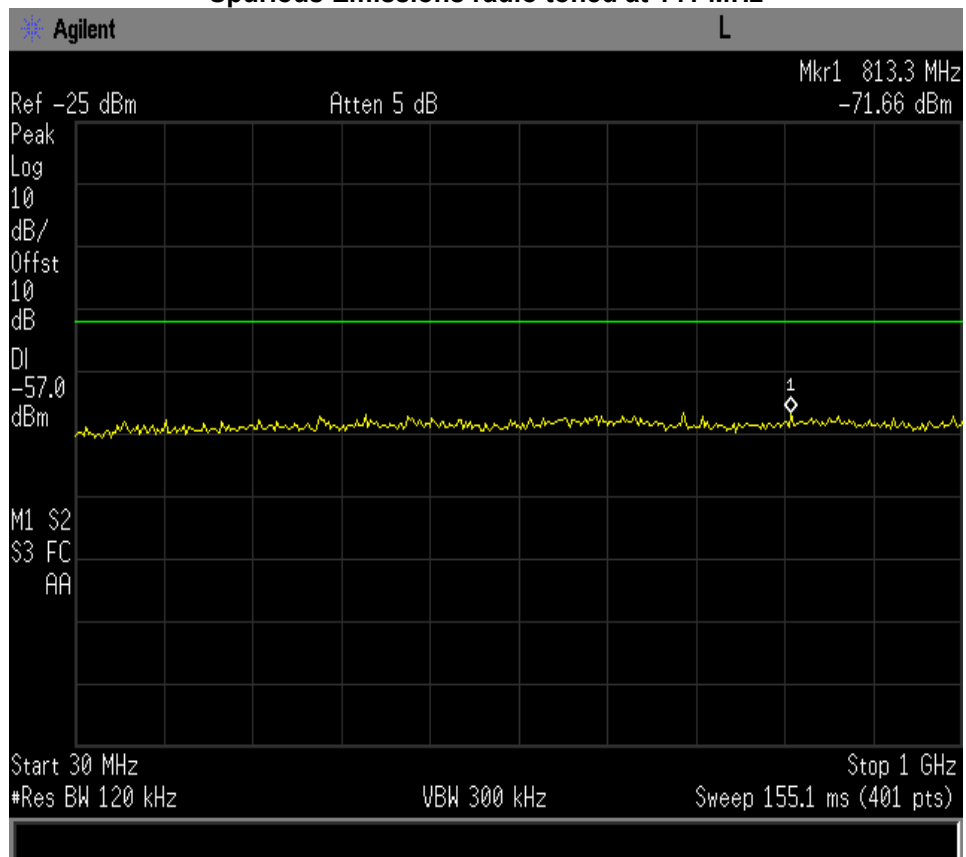


Spurious Emissions radio toned at 174 MHz

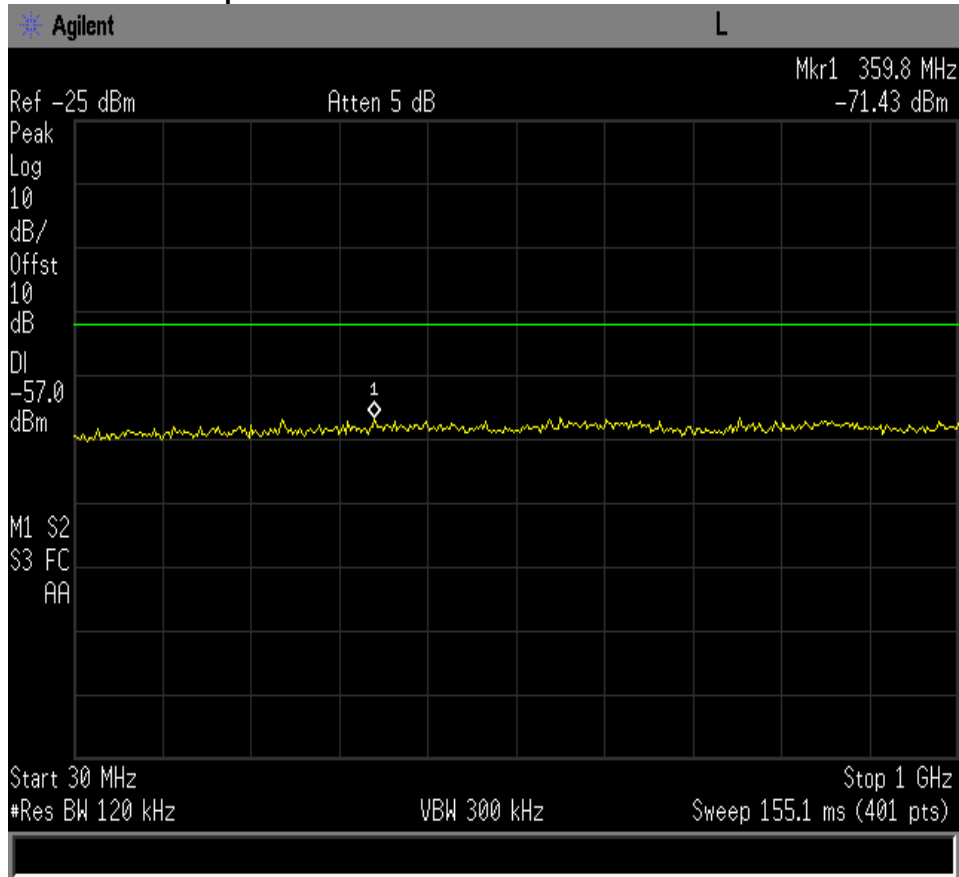


Spurious Emissions radio toned at 225 MHz

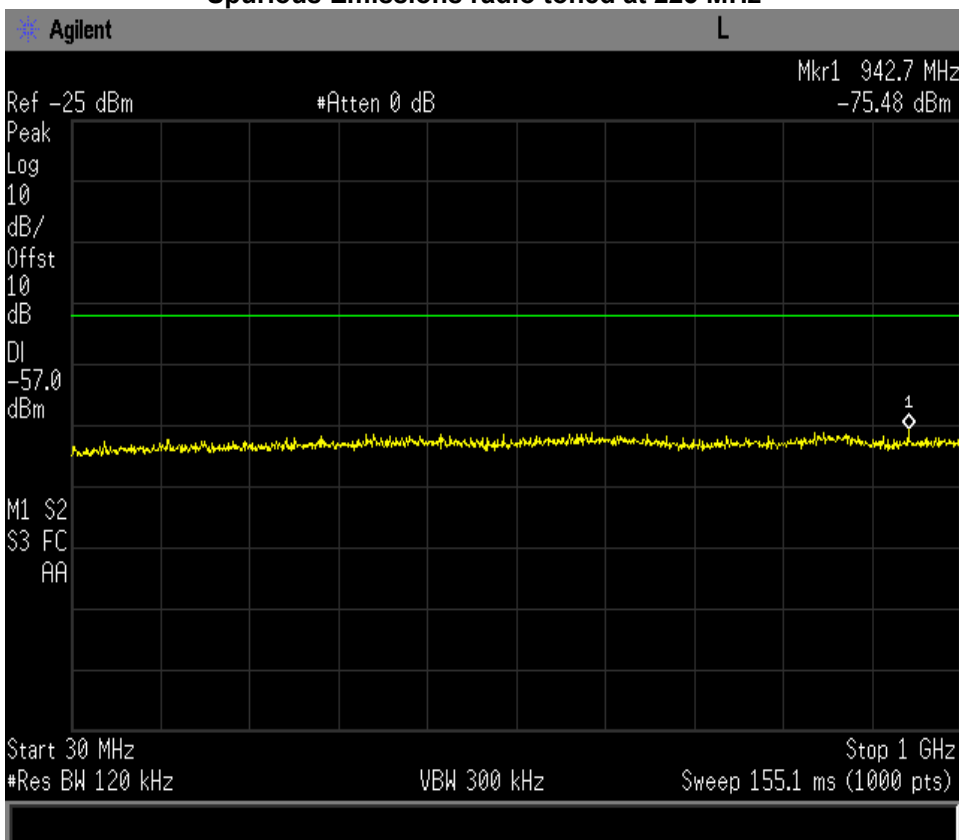


Spurious Emissions radio toned at 350 MHz

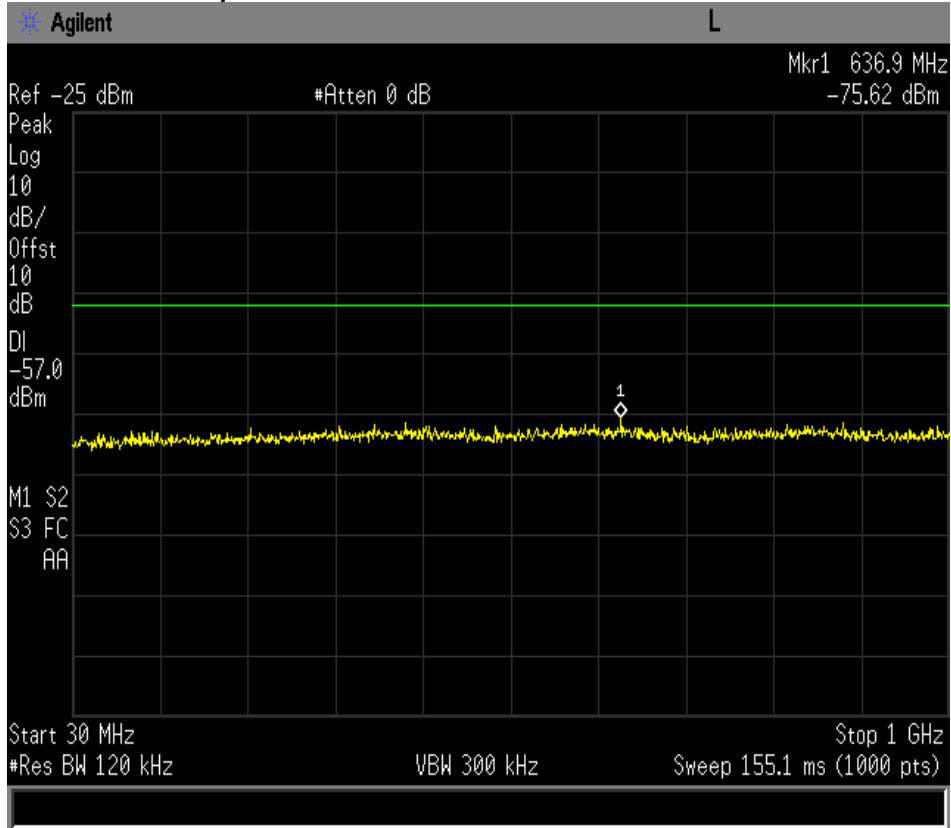


Spurious Emissions radio toned at 400 MHz

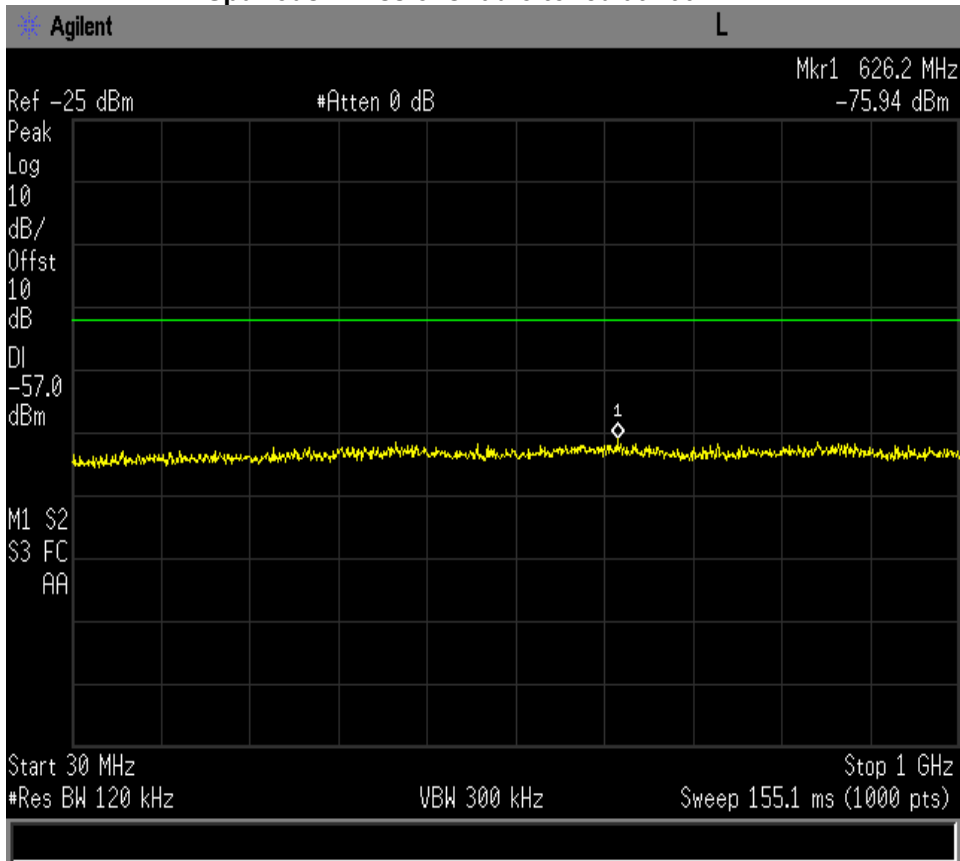

Spurious Emissions radio toned at 479 MHz

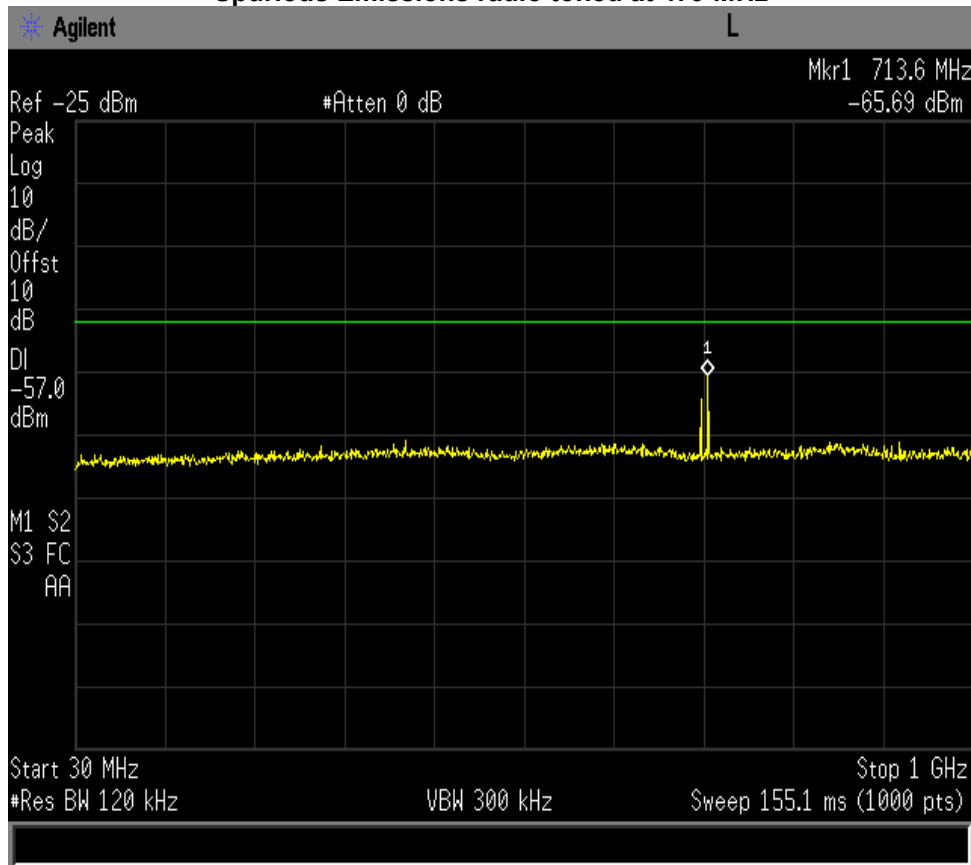

30 MHz-1GHz -scanning

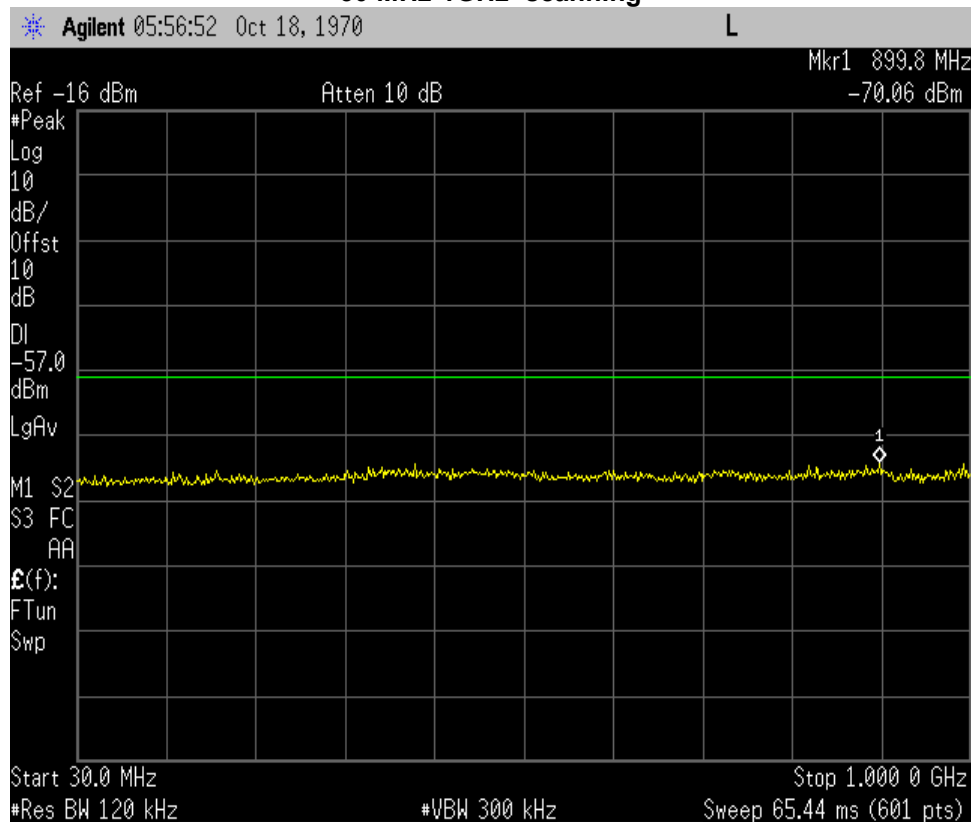

15.107 A/C Powerline Conducted Emissions


Engineer: Poona Saber

Test Date: 11/17/2020

Test Procedure

The EUT power cable was connected to a LISN and the monitored output of the LISN was connected to a transient limiter, which then connected directly to a spectrum analyzer. The conducted emissions from 150 kHz to 30 MHz were measured and compared to the specification limits.

Test Setup




Conducted Emissions Test Results

Tested with Power Supply

Line 1 Peak Plot

**Compliance Testing
Conducted Emissions - Class B
Line 1 (Neutral)**

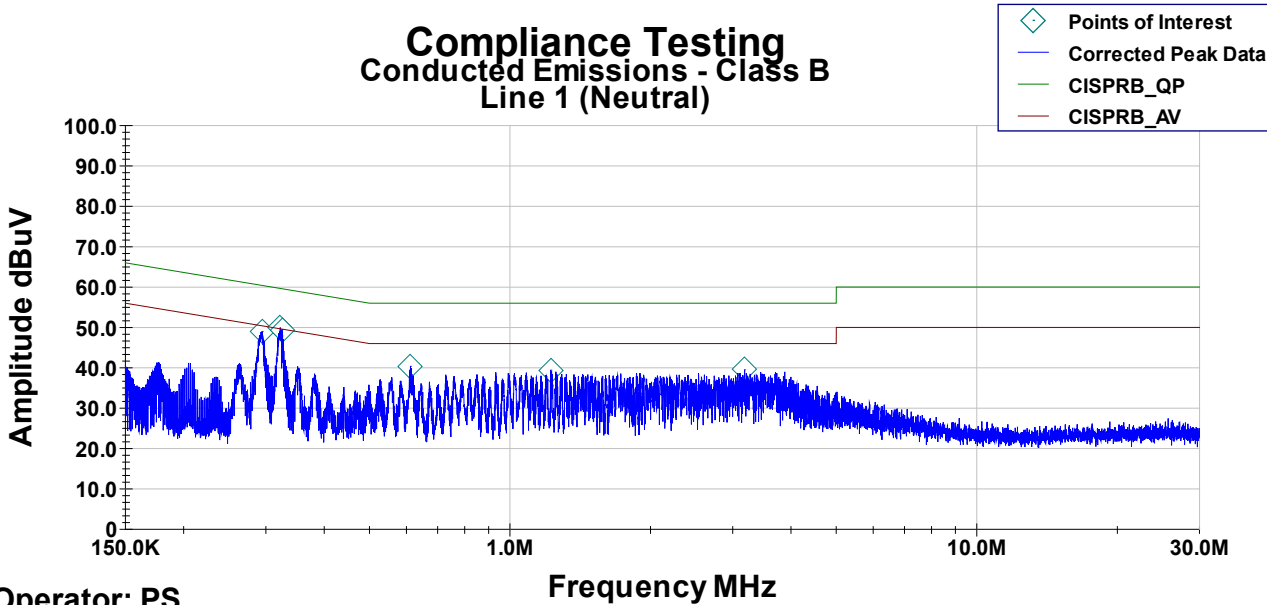


Operator: PS

EN55032 Class B_85462 EMI Rec_with Power Supply.til

Job #:

Line 2 Peak Plot

**Compliance Testing
Conducted Emissions - Class B
Line 2 (Phase)**

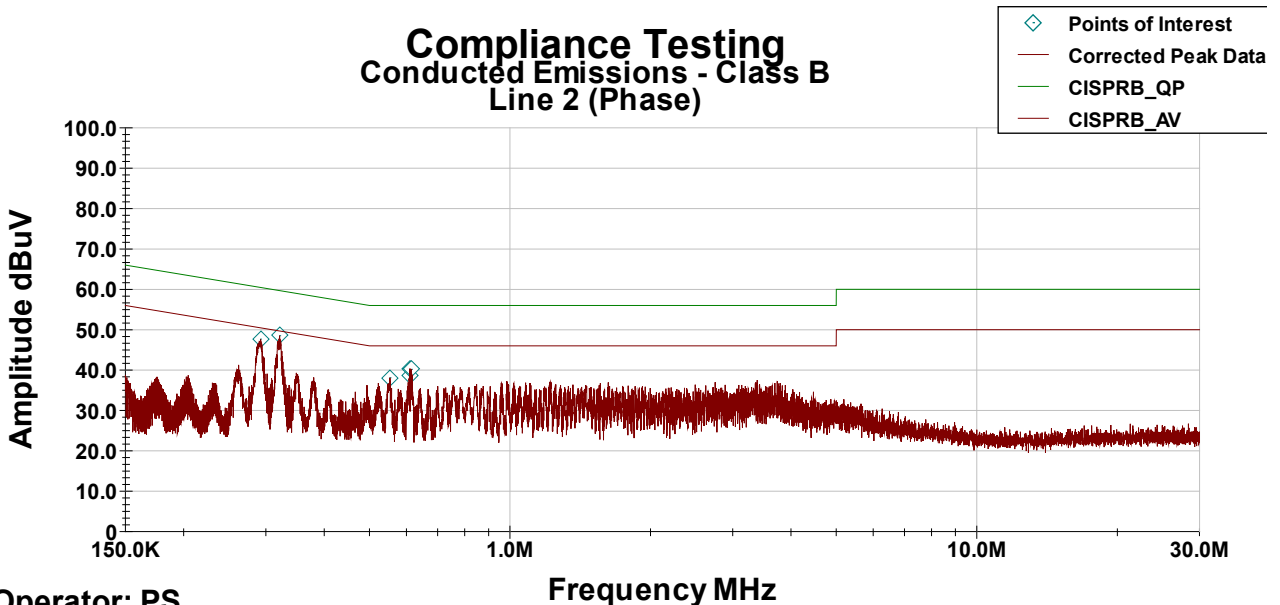

Operator: PS

EN55032 Class B_85462 EMI Rec_with Power Supply.til

Job #:

All peak readings are below the quasi peak and average limits; therefore, no tabular data was recorded.

Line 1 Neutral Avg Detector

| Frequency | Measured Value (dBuV) | LISN Correction Factor (dB) | Cable Loss (dB) | Transient Limiter (dB) | Final Data (dBuV) | Limit (dBuV) | Avg Margin (dB) |
|------------|-----------------------|-----------------------------|-----------------|------------------------|-------------------|--------------|-----------------|
| 296.38 KHz | 23.47 | 0.17 | 0.025 | 10.100 | 33.768 | 51.818 | -18.050 |
| 321.72 KHz | 28.40 | 0.16 | 0.026 | 10.100 | 38.691 | 51.094 | -12.403 |
| 325.01 KHz | 25.14 | 0.16 | 0.026 | 10.100 | 35.430 | 51.000 | -15.570 |
| 613.15 KHz | 13.71 | 0.10 | 0.031 | 10.100 | 23.941 | 46.000 | -22.059 |
| 1.2219 MHz | 13.00 | 0.08 | 0.041 | 10.100 | 23.224 | 46.000 | -22.776 |
| 3.1719 MHz | 8.58 | 0.08 | 0.080 | 10.114 | 18.857 | 46.000 | -27.143 |

Line 2 Phase Avg Detector

| Frequency | Measured Value (dBuV) | LISN Correction Factor (dB) | Cable Loss (dB) | Transient Limiter (dB) | Final Data (dBuV) | Limit (dBuV) | Avg Margin (dB) |
|------------|-----------------------|-----------------------------|-----------------|------------------------|-------------------|--------------|-----------------|
| 289.96 KHz | 29.63 | 0.17 | 0.024 | 10.100 | 39.926 | 52.001 | -12.075 |
| 321.68 KHz | 29.68 | 0.15 | 0.026 | 10.100 | 39.950 | 51.095 | -11.145 |
| 551.92 KHz | 17.72 | 0.09 | 0.030 | 10.100 | 27.936 | 46.000 | -18.064 |
| 606.33 KHz | 12.25 | 0.08 | 0.030 | 10.100 | 22.464 | 46.000 | -23.536 |
| 609.1 KHz | 15.06 | 0.08 | 0.030 | 10.100 | 25.267 | 46.000 | -20.733 |
| 611.45 KHz | 15.34 | 0.08 | 0.031 | 10.100 | 25.551 | 46.000 | -20.449 |

Line 1 Neutral QP Detector

| Frequency | Measured Value (dBuV) | LISN Correction Factor (dB) | Cable Loss (dB) | Transient Limiter (dB) | Final Data (dBuV) | Limit (dBuV) | QP Margin (dB) |
|------------|-----------------------|-----------------------------|-----------------|------------------------|-------------------|--------------|----------------|
| 296.38 KHz | 34.130 | 0.173 | 0.025 | 10.100 | 44.428 | 61.818 | -17.390 |
| 321.72 KHz | 37.630 | 0.161 | 0.026 | 10.100 | 47.917 | 61.094 | -13.176 |
| 325.01 KHz | 35.430 | 0.160 | 0.026 | 10.100 | 45.716 | 61.000 | -15.283 |
| 613.15 KHz | 25.920 | 0.100 | 0.031 | 10.100 | 36.151 | 56.000 | -19.849 |
| 1.2219 MHz | 26.560 | 0.080 | 0.041 | 10.100 | 36.781 | 56.000 | -19.219 |
| 3.1719 MHz | 24.430 | 0.080 | 0.080 | 10.114 | 34.704 | 56.000 | -21.296 |

Line 2 Phase QP Detector


| Frequency | Measured Value (dBuV) | LISN Correction Factor (dB) | Cable Loss (dB) | Transient Limiter (dB) | Final Data (dBuV) | Limit (dBuV) | QP Margin (dB) |
|------------|-----------------------|-----------------------------|-----------------|------------------------|-------------------|--------------|----------------|
| 289.96 KHz | 35.34 | 0.17 | 0.024 | 10.100 | 45.633 | 62.001 | -16.369 |
| 321.68 KHz | 35.66 | 0.15 | 0.026 | 10.100 | 45.933 | 61.095 | -15.162 |
| 551.92 KHz | 24.54 | 0.09 | 0.030 | 10.100 | 34.760 | 56.000 | -21.240 |
| 606.33 KHz | 22.86 | 0.08 | 0.030 | 10.100 | 33.070 | 56.000 | -22.930 |
| 609.1 KHz | 24.33 | 0.08 | 0.030 | 10.100 | 34.540 | 56.000 | -21.460 |
| 611.45 KHz | 24.13 | 0.08 | 0.031 | 10.100 | 34.341 | 56.000 | -21.659 |

Conducted Emissions Test Results

Tested with Battery

Line 1 Peak Plot

**Compliance Testing
Conducted Emissions - Class B
Line 1 (Neutral)**

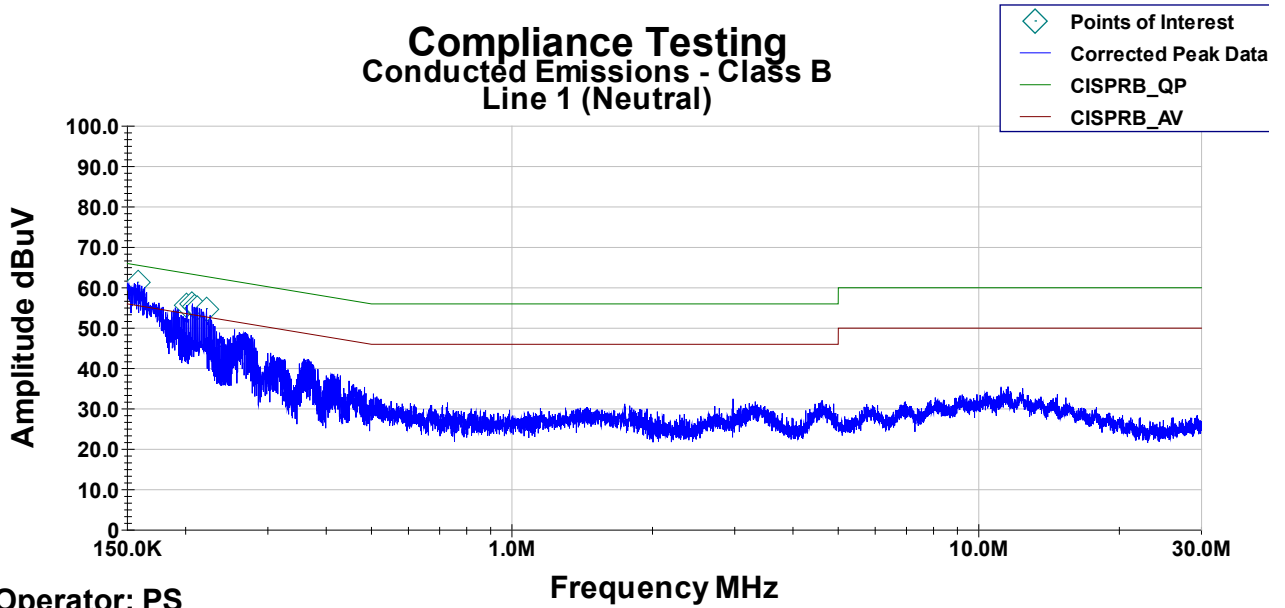


Operator: PS

EN55032 Class B_85462 EMI Rec_with Battery.til

Job #:

Line 2 Peak Plot

**Compliance Testing
Conducted Emissions - Class B
Line 2 (Phase)**

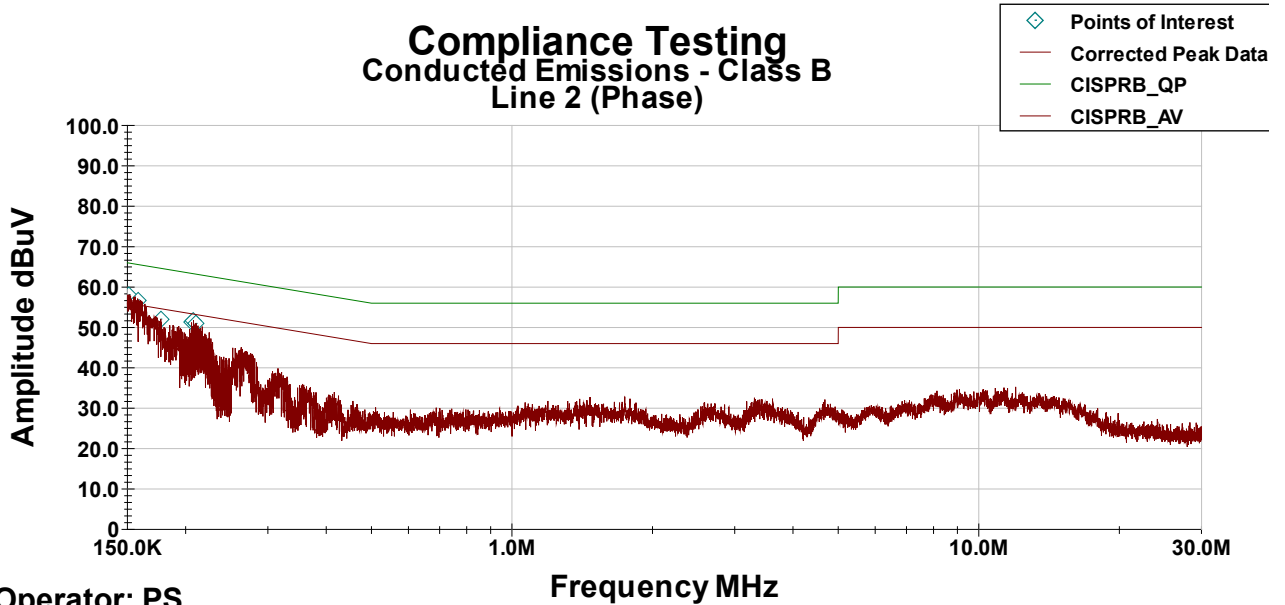

Operator: PS

EN55032 Class B_85462 EMI Rec_with Battery.til

Job #:

All peak readings are below the quasi peak and average limits; therefore, no tabular data was recorded.

Line 1 Neutral Avg Detector

| Frequency | Measured Value (dBuV) | LISN Correction Factor (dB) | Cable Loss (dB) | Transient Limiter (dB) | Final Data (dBuV) | Limit (dBuV) | Avg Margin (dB) |
|------------|-----------------------|-----------------------------|-----------------|------------------------|-------------------|--------------|-----------------|
| 156.13 KHz | 28.62 | 0.40 | 0.020 | 10.200 | 39.232 | 55.825 | -16.593 |
| 204.56 KHz | 23.99 | 0.27 | 0.020 | 10.100 | 34.384 | 54.441 | -20.057 |
| 207.39 KHz | 25.03 | 0.27 | 0.020 | 10.100 | 35.417 | 54.360 | -18.944 |
| 209.17 KHz | 26.66 | 0.27 | 0.020 | 10.100 | 37.048 | 54.309 | -17.262 |
| 210.71 KHz | 27.37 | 0.27 | 0.021 | 10.100 | 37.759 | 54.265 | -16.507 |
| 214.19 KHz | 28.88 | 0.26 | 0.021 | 10.100 | 39.258 | 54.166 | -14.908 |

Line 2 Phase Avg Detector

| Frequency | Measured Value (dBuV) | LISN Correction Factor (dB) | Cable Loss (dB) | Transient Limiter (dB) | Final Data (dBuV) | Limit (dBuV) | Avg Margin (dB) |
|------------|-----------------------|-----------------------------|-----------------|------------------------|-------------------|--------------|-----------------|
| 150.78 KHz | 26.97 | 0.44 | 0.020 | 10.200 | 37.624 | 55.978 | -18.354 |
| 151.68 KHz | 26.77 | 0.43 | 0.020 | 10.200 | 37.423 | 55.952 | -18.529 |
| 164.55 KHz | 24.32 | 0.38 | 0.020 | 10.155 | 34.873 | 55.584 | -20.711 |
| 205.29 KHz | 20.57 | 0.27 | 0.020 | 10.100 | 30.962 | 54.420 | -23.458 |
| 208.5 KHz | 22.20 | 0.27 | 0.020 | 10.100 | 32.590 | 54.329 | -21.738 |
| 208.78 KHz | 22.28 | 0.27 | 0.020 | 10.100 | 32.666 | 54.321 | -21.654 |

Line 1 Neutral QP Detector

| Frequency | Measured Value (dBuV) | LISN Correction Factor (dB) | Cable Loss (dB) | Transient Limiter (dB) | Final Data (dBuV) | Limit (dBuV) | QP Margin (dB) |
|------------|-----------------------|-----------------------------|-----------------|------------------------|-------------------|--------------|----------------|
| 156.13 KHz | 45.370 | 0.395 | 0.020 | 10.200 | 55.985 | 65.825 | -9.839 |
| 204.56 KHz | 36.840 | 0.274 | 0.020 | 10.100 | 47.234 | 64.441 | -17.207 |
| 207.39 KHz | 38.300 | 0.270 | 0.020 | 10.100 | 48.690 | 64.360 | -15.670 |
| 209.17 KHz | 39.900 | 0.267 | 0.020 | 10.100 | 50.288 | 64.309 | -14.022 |
| 210.71 KHz | 39.920 | 0.265 | 0.021 | 10.100 | 50.306 | 64.265 | -13.960 |
| 214.19 KHz | 39.180 | 0.260 | 0.021 | 10.100 | 49.561 | 64.166 | -14.605 |

Line 2 Phase QP Detector

| Frequency | Measured Value (dBuV) | LISN Correction Factor (dB) | Cable Loss (dB) | Transient Limiter (dB) | Final Data (dBuV) | Limit (dBuV) | QP Margin (dB) |
|------------|-----------------------|-----------------------------|-----------------|------------------------|-------------------|--------------|----------------|
| 150.78 KHz | 43.06 | 0.44 | 0.020 | 10.200 | 53.717 | 65.978 | -12.261 |
| 151.68 KHz | 42.88 | 0.43 | 0.020 | 10.200 | 53.533 | 65.952 | -12.419 |
| 164.55 KHz | 39.52 | 0.38 | 0.020 | 10.155 | 50.076 | 65.584 | -15.508 |
| 205.29 KHz | 33.42 | 0.27 | 0.020 | 10.100 | 43.812 | 64.420 | -20.608 |
| 208.5 KHz | 35.35 | 0.27 | 0.020 | 10.100 | 45.737 | 64.329 | -18.592 |
| 208.78 KHz | 35.64 | 0.27 | 0.020 | 10.100 | 46.026 | 64.321 | -18.294 |

15.109 Radiated Emissions


Engineer: Poona Saber

Test Date: 11/17/19

Test Procedure

The EUT was tested in a semi-anechoic chamber with the turntable set 3m from the receiving antenna. A spectrum analyzer was used to verify that the EUT met the requirements for Radiated Emissions. The EUT was tested by rotating it 360 degrees with the antennas in both the vertical and horizontal orientation while raised from 1 to 4 meters to ensure the signal levels were maximized. All emissions from 30 MHz to 1 GHz were examined.

Test Setup



Settings below 1 GHz

RBW = 120 KHz

VBW = 300 KHz

Detector – Quasi Peak

Settings above 1 GHz

RBW = 1 MHz

VBW = 3 MHz

Detector – Peak

Sample Calculations

Corrected Value = Measured Value + Correction factor

Correction factor = ACF + Cable loss

Radiated Emissions

30 MHz-1GHz

| Emission Frequency (MHz) | Measured Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (cm) | Antenna Polarity (V/H) | Turntable Position (deg) | Detector (QP,PK,Avg) |
|--------------------------|-------------------------|----------------|-------------|---------------------|------------------------|--------------------------|----------------------|
| 30.00 | 29.661 | 40.000 | -10.339 | 325.000 | V | 259.000 | PK |
| 32.96 | 30.212 | 40.000 | -9.788 | 400.000 | H | 252.000 | PK |
| 882.28 | 27.227 | 46.000 | -18.773 | 395.000 | H | 282.000 | PK |
| 908.93 | 26.615 | 46.000 | -19.385 | 325.000 | H | 259.000 | PK |
| 922.19 | 27.480 | 46.000 | -18.520 | 395.000 | H | 344.000 | PK |
| 930.13 | 28.359 | 46.000 | -17.641 | 325.000 | H | 359.000 | PK |
| 940.19 | 28.385 | 46.000 | -17.615 | 395.000 | H | 282.000 | PK |




Test Equipment Utilized

| Description | Manufacturer | Model # | CT Asset # | Last Cal Date | Cal Due Date |
|-------------------------------|--------------|-------------------------------|------------|-------------------------|--------------|
| EMI Receiver | HP | 8546A | i00033 | 5/18/20 | 5/18/21 |
| Transient Limiter | Com-Power | LIT-153 | i00123 | Verified on: 11/17/2020 | |
| Humidity / Temp Meter | Newport | IBTHX-W-5 | i00282 | 8/28/2020 | 8/28/2021 |
| Bi-Log antenna | Chase | CBL6111C | i00267 | 8/28/2020 | 8/28/2022 |
| AC Power Source | Behlman | BL 6000 | i00362 | Verified on: 11/17/2020 | |
| EMI Analyzer | Agilent | E7405A | i00379 | 1/21/20 | 1/21/21 |
| ESA Spectrum Analyzer | Agilent | E4407B | i00331 | 12/18/19 | 12/18/2020 |
| 3 Meter Semi-Anechoic Chamber | Panashield | 3 Meter Semi-Anechoic Chamber | i00428 | 7/17/2020 | 7/17/2023 |
| LISN | COM-Power | LI-125A | i00446 | 4/28/20 | 4/28/22 |
| LISN | COM-Power | LI-125A | i00448 | 4/28/20 | 4/28/22 |

In addition to the above listed equipment standard RF connectors and cables were utilized in the testing of the described equipment. Prior to testing these components were tested to verify proper operation.

END OF TEST REPORT

Radiated Emissions Test Setup Photos

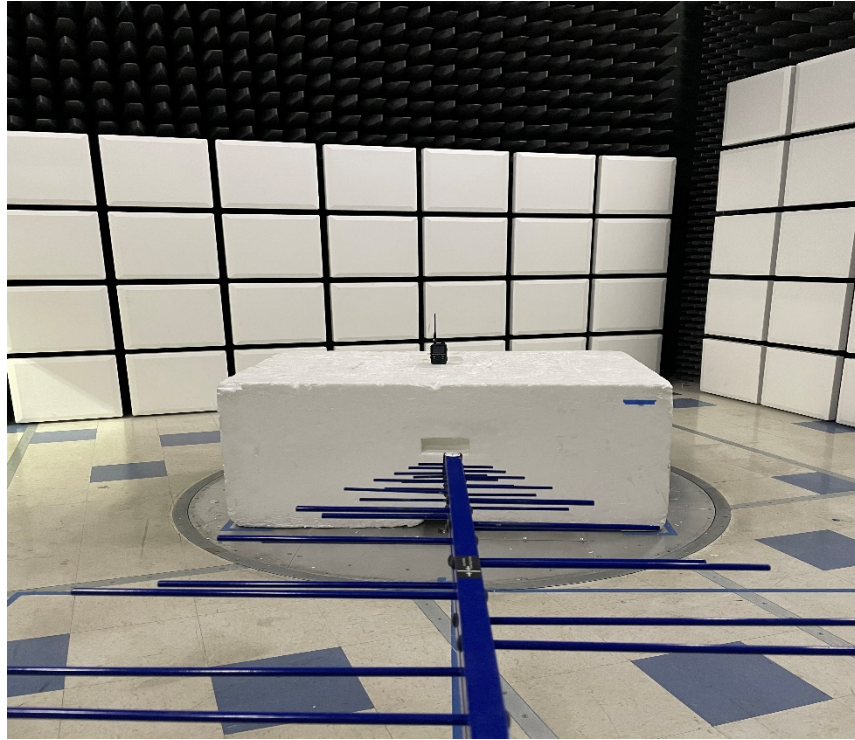


A/C Conducted Emissions Test Setup Photos

With Battery



With Power Supply

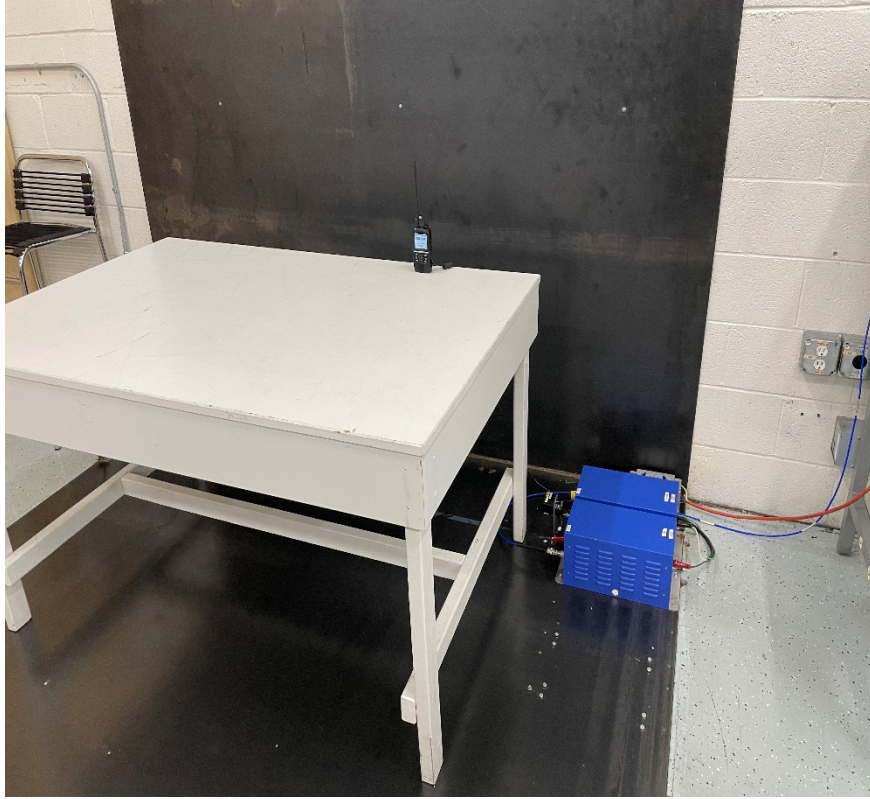

With Power Supply Side

