

APPENDIX 1

SAR Measurement Data

Table of content

EXHIBIT 1. HEAD 150 MHZ SAR MEASUREMENTS (BP-292UL)	3
HEAD 150 MHZ SAR MEASUREMENT SUMMARY	3
File Name: ICOM-590Q Head IC-M85UL FA-SC58V 136.050MHz.da52:0.....	4
File Name: ICOM-590Q Head IC-M85UL FA-SC58V 155.050MHz.da52:0.....	5
File Name: ICOM-590Q Head IC-M85UL FA-SC58V 156.050MHz.da52:0.....	6
File Name: ICOM-590Q Head IC-M85UL FA-SC58V 156.400MHz.da52:0.....	7
File Name: ICOM-590Q Head IC-M85UL FA-SC58V 157.025MHz.da52:0.....	8
File Name: ICOM-590Q Head IC-M85UL FA-SC58V 157.425MHz.da52:0.....	9
File Name: ICOM-590Q Head IC-M85UL FA-SC58V 173.95MHz.da52:0.....	10
EXHIBIT 2. BODY 150 MHZ SAR MEASUREMENTS (BP-292UL)	11
BODY 150 MHZ SAR MEASUREMENT SUMMARY	11
File Name: ICOM-590Q Body IC-M85UL FA-SC58V 136.05MHz.da52:0.....	12
File Name: ICOM-590Q Body IC-M85UL FA-SC58V 155.05MHz.da52:0.....	13
File Name: ICOM-590Q Body IC-M85UL FA-SC58V 156.05MHz.da52:0.....	14
File Name: ICOM-590Q Body IC-M85UL FA-SC58V 156.40MHz.da52:0.....	15
File Name: ICOM-590Q Body IC-M85UL FA-SC58V 157.025MHz.da52:0.....	16
File Name: ICOM-590Q Body IC-M85UL FA-SC58V 157.425MHz.da52:0.....	17
File Name: ICOM-590Q Body IC-M85UL FA-SC58V 173.95MHz.da52:0.....	18
EXHIBIT 3. PRESCAN FOR MB-136 BELT CLIP(BP-292UL)	19
File Name: ICOM-590Q (MB-136 Prescan) Body IC-M85UL FA-SC58V 173.95MHz.da52:0	19

EXHIBIT 1. HEAD 150 MHZ SAR MEASUREMENTS (BP-292UL)

HEAD 150 MHZ SAR MEASUREMENT SUMMARY

Antenna	Power (W)	CH	CH. Freq	HEAD SAR1g (W/Kg)	HEAD SAR10g (W/Kg)	Power Drift (dB)
				BP-292UL	BP-292UL	
			(MHz)	1910mAh	1910mAh	
FA-SC58V	4.900	F4	136.050	0.104	0.079	-0.04
	4.950	F5	155.050	0.526	0.395	-0.06
	4.950	1001	156.050	0.595	0.446	-0.03
	4.850	8	156.400	0.474	0.357	-0.03
	4.840	1080	157.025	0.598	0.448	0
	4.860	88	157.425	0.758	0.567	-0.04
	4.980	F6	173.950	1.020	0.757	-0.01

File Name: ICOM-590Q Head IC-M85UL FA-SC58V 136.050MHz.da52:0

DUT: ICOM IC-M85UL; Type: VHF Marine Transceiver; Serial: 00000305

Communication System: UID 0, CW (0); Frequency: 136.05 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 136.05$ MHz; $\sigma = 0.783$ S/m; $\epsilon_r = 52.444$; $\rho = 1000$ kg/m³; Phantom section:
Flat Section; Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: ES3DV3 - SN3208; ConvF(7.51, 7.51, 7.51); Calibrated: 3/18/2022;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn874; Calibrated: 8/25/2022
- Phantom: ELI 4.0; Type: QD OVA 001 BB; Serial: 1057
- DASYS2 52.10.0(1446); SEMCAD X 14.6.10(7417)

Configuration_Head_IC-M85UL/Head Front, P=5W,d=25mm, (SAR corrected for target medium)/Area Scan (51x161x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.116 W/kg


Configuration_Head_IC-M85UL/Head Front, P=5W,d=25mm,(SAR corrected for target medium)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=7.5mm

Reference Value = 11.26 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.152 W/kg

SAR(1 g) = 0.104 W/kg; SAR(10 g) = 0.079 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.116 W/kg

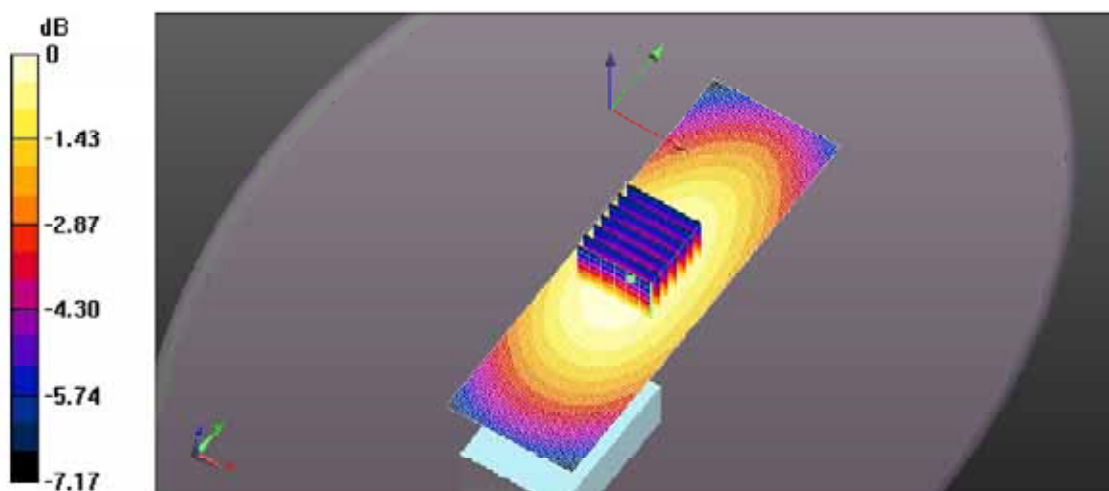

0 dB = 0.116 W/kg = -9.35 dBW/kg

File Name: ICOM-590Q Head IC-M85UL FA-SC58V 155.050MHz.da52:0

DUT: ICOM IC-M85UL; Type: VHF Marine Transceiver; Serial: 0000305

Communication System: UID 0, CW (0); Frequency: 155.05 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 155.05$ MHz; $\sigma = 0.796$ S/m; $\epsilon_r = 52.619$; $\rho = 1000$ kg/m³; Phantom section:
Flat Section; Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: ES3DV3 - SN3208; ConvF(7.51, 7.51, 7.51); Calibrated: 3/18/2022;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn874; Calibrated: 8/25/2022
- Phantom: ELI 4.0; Type: QD OVA 001 BB; Serial: 1057
- DASYS2 52.10.0(1446); SEMCAD X 14.6.10(7417)

Configuration_Head_IC-M85UL/Head Front, P=5W,d=25mm, (SAR corrected for target medium)/Area Scan (51x161x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.588 W/kg


Configuration_Head_IC-M85UL/Head Front, P=5W,d=25mm,(SAR corrected for target medium)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=7.5mm

Reference Value = 24.33 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.774 W/kg

SAR(1 g) = 0.526 W/kg; SAR(10 g) = 0.395 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.589 W/kg

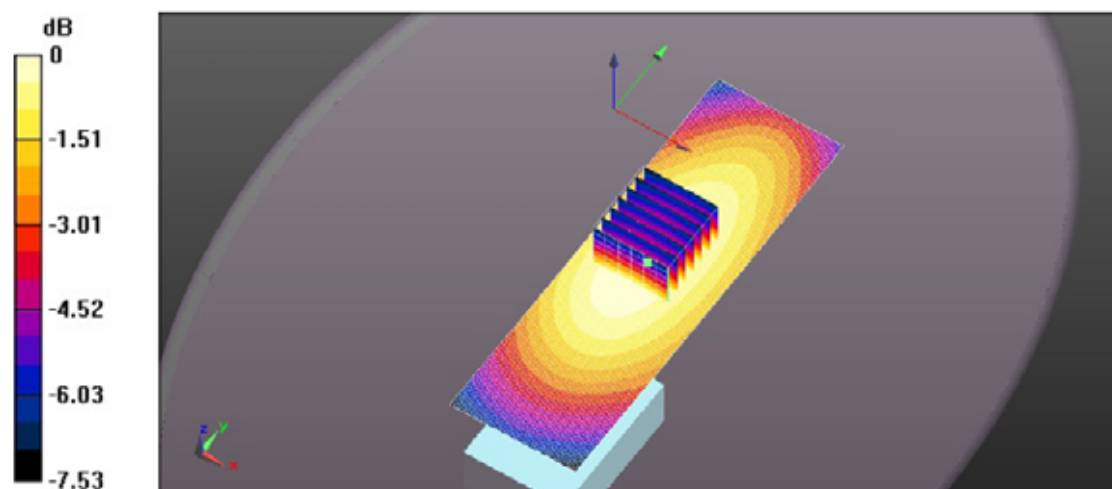

0 dB = 0.589 W/kg = -2.30 dBW/kg

[File Name: ICOM-590Q Head IC-M85UL FA-SC58V 156.050MHz.da52:0](#)

DUT: ICOM IC-M85UL; Type: VHF Marine Transceiver; Serial: 0000305

Communication System: UID 0, CW (0); Frequency: 156.05 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 156.05$ MHz; $\sigma = 0.796$ S/m; $\epsilon_r = 51.618$; $\rho = 1000$ kg/m³; Phantom section:
Flat Section; Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: ES3DV3 - SN3208; ConvF(7.51, 7.51, 7.51); Calibrated: 3/18/2022;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn874; Calibrated: 8/25/2022
- Phantom: ELI 4.0; Type: QD OVA 001 BB; Serial: 1057
- DASYS2 52.10.0(1446); SEMCAD X 14.6.10(7417)

Configuration_Head_IC-M85UL/Head Front, P=5W,d=25mm, (SAR corrected for target medium)/Area Scan (51x161x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.666 W/kg


Configuration_Head_IC-M85UL/Head Front, P=5W,d=25mm,(SAR corrected for target medium)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=7.5mm

Reference Value = 25.48 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.875 W/kg

SAR(1 g) = 0.595 W/kg; SAR(10 g) = 0.446 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.664 W/kg

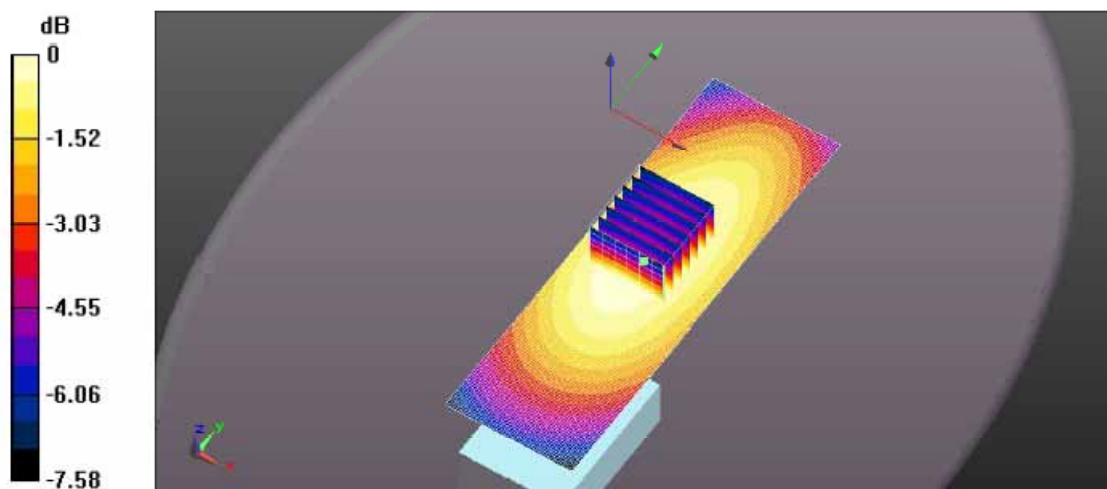

0 dB = 0.664 W/kg = -1.78 dBW/kg

File Name: ICOM-590Q Head IC-M85UL FA-SC58V 156.400MHz.da52:0

DUT: ICOM IC-M85UL; Type: VHF Marine Transceiver; Serial: 0000305

Communication System: UID 0, CW (0); Frequency: 156.4 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 156.4$ MHz; $\sigma = 0.796$ S/m; $\epsilon_r = 51.616$; $\rho = 1000$ kg/m³; Phantom section:
Flat Section; Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: ES3DV3 - SN3208; ConvF(7.51, 7.51, 7.51); Calibrated: 3/18/2022;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn874; Calibrated: 8/25/2022
- Phantom: ELI 4.0; Type: QD OVA 001 BB; Serial: 1057
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Configuration_Head_IC-M85UL/Head Front, P=5W,d=25mm, (SAR corrected for target medium)/Area Scan (51x161x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.529 W/kg


Configuration_Head_IC-M85UL/Head Front, P=5W,d=25mm,(SAR corrected for target medium)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=7.5mm

Reference Value = 23.54 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.696 W/kg

SAR(1 g) = 0.474 W/kg; SAR(10 g) = 0.357 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.529 W/kg

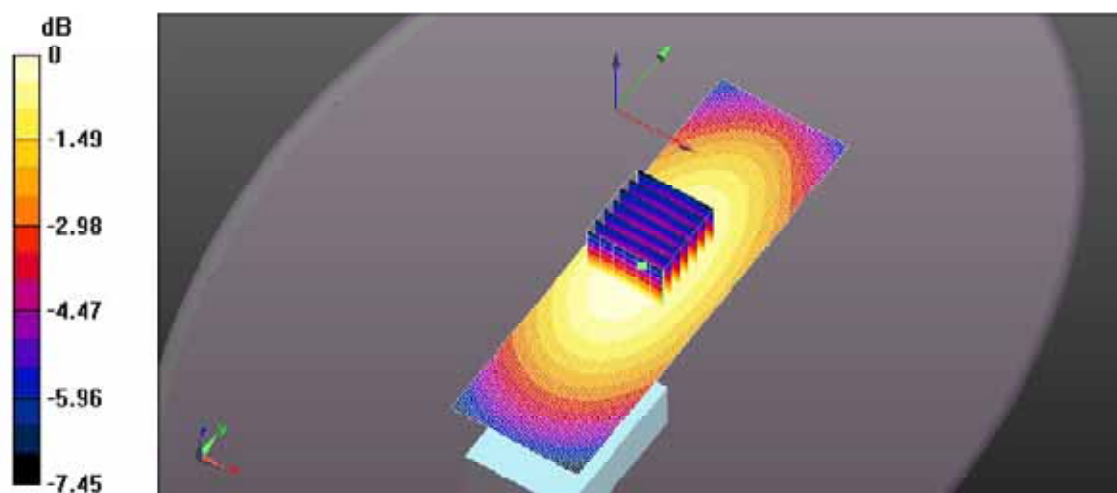

0 dB = 0.529 W/kg = -2.77 dBW/kg

[File Name: ICOM-590Q Head IC-M85UL FA-SC58V 157.025MHz.da52:0](#)

DUT: ICOM IC-M85UL; Type: VHF Marine Transceiver; Serial: 00000305

Communication System: UID 0, CW (0); Frequency: 157.025 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 158$ MHz; $\sigma = 0.798$ S/m; $\epsilon_r = 51.606$; $\rho = 1000$ kg/m³; Phantom section:
Flat Section ; Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: ES3DV3 - SN3208; ConvF(7.51, 7.51, 7.51); Calibrated: 3/18/2022;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn874; Calibrated: 8/25/2022
- Phantom: ELI 4.0; Type: QD OVA 001 BB; Serial: 1057
- DASYS2 52.10.0(1446); SEMCAD X 14.6.10(7417)

Configuration_Head_IC-M85UL/Head Front, P=5W,d=25mm, (SAR corrected for target medium)/Area Scan (51x161x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.668 W/kg


Configuration_Head_IC-M85UL/Head Front, P=5W,d=25mm,(SAR corrected for target medium)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=7.5mm

Reference Value = 26.40 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.881 W/kg

SAR(1 g) = 0.598 W/kg; SAR(10 g) = 0.448 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.669 W/kg

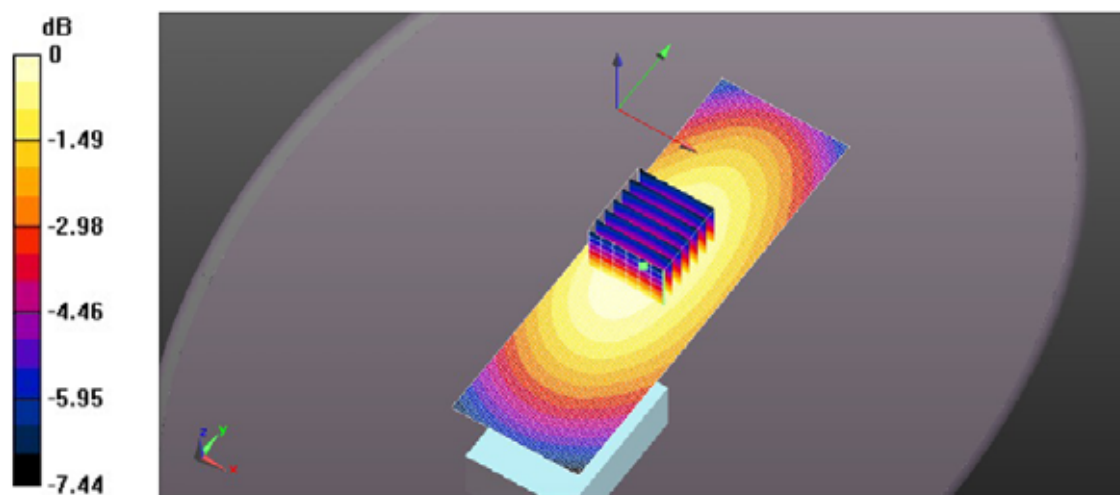

0 dB = 0.669 W/kg = -1.74 dBW/kg

[File Name: ICOM-590Q Head IC-M85UL FA-SC58V 157.425MHz.da52:0](#)

DUT: ICOM IC-M85UL; Type: VHF Marine Transceiver; Serial: 0000305

Communication System: UID 0, CW (0); Frequency: 157.425 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 158$ MHz; $\sigma = 0.798$ S/m; $\epsilon_r = 51.606$; $\rho = 1000$ kg/m³; Phantom section:
Flat Section ; Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: ES3DV3 - SN3208; ConvF(7.51, 7.51, 7.51); Calibrated: 3/18/2022;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn874; Calibrated: 8/25/2022
- Phantom: ELI 4.0; Type: QD OVA 001 BB; Serial: 1057
- DASYS2 52.10.0(1446); SEMCAD X 14.6.10(7417)

Configuration_Head_IC-M85UL/Head Front, P=5W,d=25mm, (SAR corrected for target medium)/Area Scan (51x161x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.846 W/kg


Configuration_Head_IC-M85UL/Head Front, P=5W,d=25mm,(SAR corrected for target medium)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=7.5mm

Reference Value = 29.55 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.12 W/kg

SAR(1 g) = 0.758 W/kg; SAR(10 g) = 0.567 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.849 W/kg

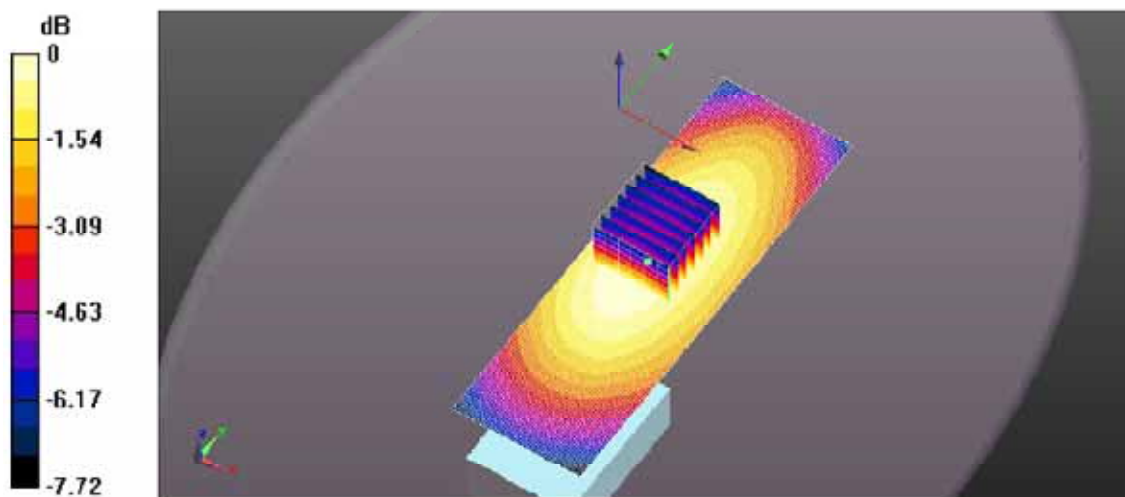

0 dB = 0.849 W/kg = -0.71 dBW/kg

File Name: ICOM-590Q Head IC-M85UL FA-SC58V 173.95MHz.da52:0

DUT: ICOM IC-M85UL; Type: VHF Marine Transceiver; Serial: 00000305

Communication System: UID 0, CW (0); Frequency: 173.95 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 174$ MHz; $\sigma = 0.812$ S/m; $\epsilon_r = 50.899$; $\rho = 1000$ kg/m³; Phantom section:
Flat Section ; Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: ES3DV3 - SN3208; ConvF(7.51, 7.51, 7.51); Calibrated: 3/18/2022;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn874; Calibrated: 8/25/2022
- Phantom: ELI 4.0; Type: QD OVA 001 BB; Serial: 1057
- DASYS2 52.10.0(1446); SEMCAD X 14.6.10(7417)

Configuration_Head_IC-M85UL/Head Front, P=5W,d=25mm, (SAR corrected for target medium)/Area Scan (51x161x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.14 W/kg


Configuration_Head_IC-M85UL/Head Front, P=5W,d=25mm,(SAR corrected for target medium)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=7.5mm

Reference Value = 31.95 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.51 W/kg

SAR(1 g) = 1.02 W/kg; SAR(10 g) = 0.757 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 1.14 W/kg

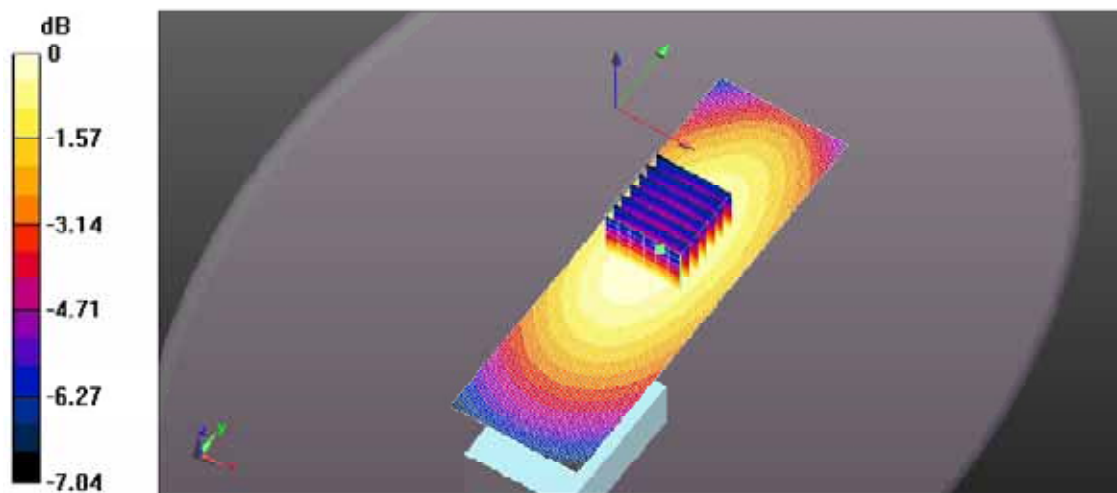

0 dB = 1.14 W/kg = 0.58 dBW/kg

EXHIBIT 2. BODY 150 MHZ SAR MEASUREMENTS (BP-292UL)

BODY 150 MHZ SAR MEASUREMENT SUMMARY

Antenna	Power (W)	CH	CH. Freq	BODY SAR1g (W/Kg)	BODY SAR10g (W/Kg)	Power Drift
				MBB-3 & BP-292UL	MBB3 & BP-292UL	
			(MHz)	1910mAh	1910mAh	(dB)
FA-SC58V	4.900	F4	136.050	0.203	0.146	-0.1
	4.950	F5	155.050	0.654	0.432	-0.04
	4.950	1001	156.050	0.811	0.549	-0.05
	4.850	8	156.400	0.877	0.599	-0.06
	4.840	1080	157.025	0.96	0.658	-0.07
	4.860	88	157.425	0.871	0.586	-0.06
	4.980	F6	173.950	0.527	0.394	-0.07

File Name: ICOM-590Q Body IC-M85UL FA-SC58V 136.05MHz.da52:0

DUT: ICOM IC-M85UL; Type: VHF Marine Transceiver; Serial: 0000305

Communication System: UID 0, CW (0); Frequency: 136.05 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 136.05$ MHz; $\sigma = 0.828$ S/m; $\epsilon_r = 59.472$; $\rho = 1000$ kg/m³; Phantom section:
Flat Section; Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: ES3DV3 - SN3208; ConvF(7.36, 7.36, 7.36); Calibrated: 3/18/2022;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn874; Calibrated: 8/25/2022
- Phantom: ELI 4.0; Type: QD OVA 001 BB; Serial: 1057
- DASYS 52.10.0(1446); SEMCAD X 14.6.10(7417)

Configuration_Body_IC-M85UL/Body Back, P=5W,d=0mm, (SAR corrected for target medium)/Area Scan (61x161x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.234 W/kg


Configuration_Body_IC-M85UL/Body Back, P=5W,d=0mm,(SAR corrected for target medium)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 13.78 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.311 W/kg

SAR(1 g) = 0.203 W/kg; SAR(10 g) = 0.146 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.231 W/kg

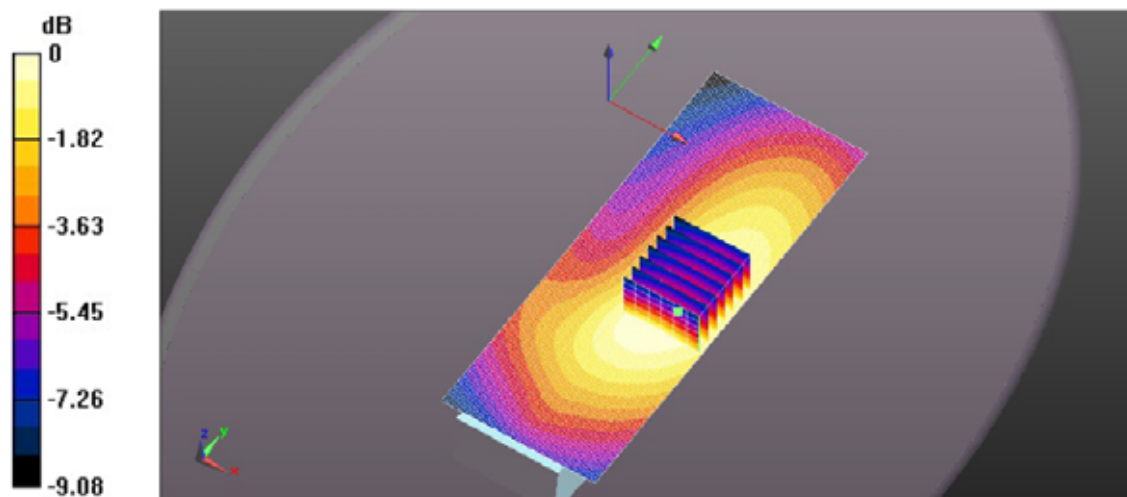

0 dB = 0.231 W/kg = -6.37 dBW/kg

[File Name: ICOM-590Q Body IC-M85UL FA-SC58V 155.05MHz.da52:0](#)

DUT: ICOM IC-M85UL; Type: VHF Marine Transceiver; Serial: 0000305

Communication System: UID 0, CW (0); Frequency: 155.05 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 156$ MHz; $\sigma = 0.839$ S/m; $\epsilon_r = 59.122$; $\rho = 1000$ kg/m³; Phantom section:
Flat Section ; Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: ES3DV3 - SN3208; ConvF(7.36, 7.36, 7.36); Calibrated: 3/18/2022;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn874; Calibrated: 8/25/2022
- Phantom: ELI 4.0; Type: QD OVA 001 BB; Serial: 1057
- DASYS 52.10.0(1446); SEMCAD X 14.6.10(7417)

Configuration_Body_IC-M85UL/Body Back, P=5W,d=0mm, (SAR corrected for target medium)/Area Scan (51x161x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.724 W/kg


Configuration_Body_IC-M85UL/Body Back, P=5W,d=0mm,(SAR corrected for target medium)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 29.18 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.25 W/kg

SAR(1 g) = 0.654 W/kg; SAR(10 g) = 0.432 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.751 W/kg

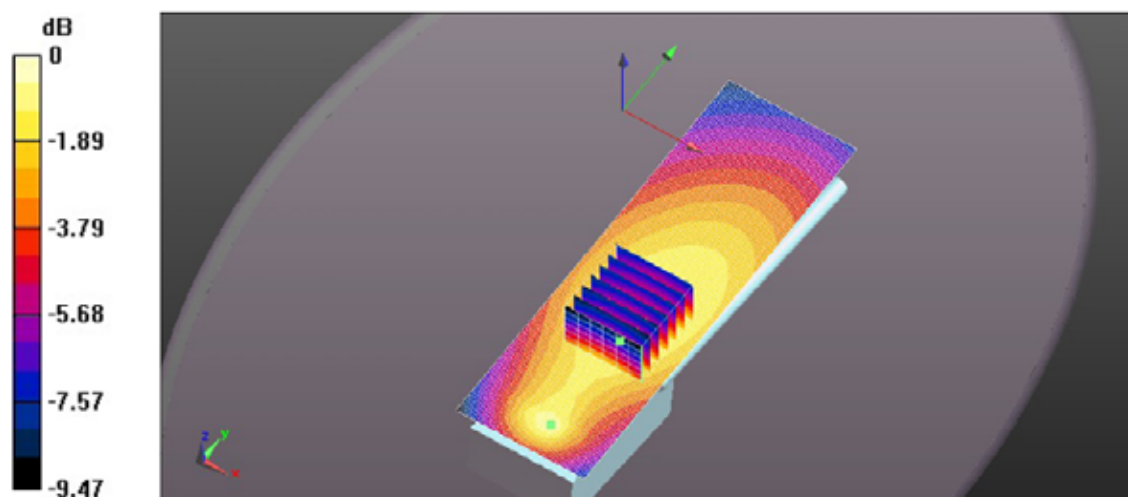

0 dB = 0.751 W/kg = -1.24 dBW/kg

[File Name: ICOM-590Q Body IC-M85UL FA-SC58V 156.05MHz.da52:0](#)

DUT: ICOM IC-M85UL; Type: VHF Marine Transceiver; Serial: 00000305

Communication System: UID 0, CW (0); Frequency: 156.05 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 156.05$ MHz; $\sigma = 0.839$ S/m; $\epsilon_r = 59.12$; $\rho = 1000$ kg/m³; Phantom section:
Flat Section; Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: ES3DV3 - SN3208; ConvF(7.36, 7.36, 7.36); Calibrated: 3/18/2022;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn874; Calibrated: 8/25/2022
- Phantom: ELI 4.0; Type: QD OVA 001 BB; Serial: 1057
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Configuration_Body_IC-M85UL/Body Back, P=5W,d=0mm, (SAR corrected for target medium)/Area Scan (51x161x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.927 W/kg


Configuration_Body_IC-M85UL/Body Back, P=5W,d=0mm,(SAR corrected for target medium)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 31.67 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.50 W/kg

SAR(1 g) = 0.811 W/kg; SAR(10 g) = 0.549 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.937 W/kg

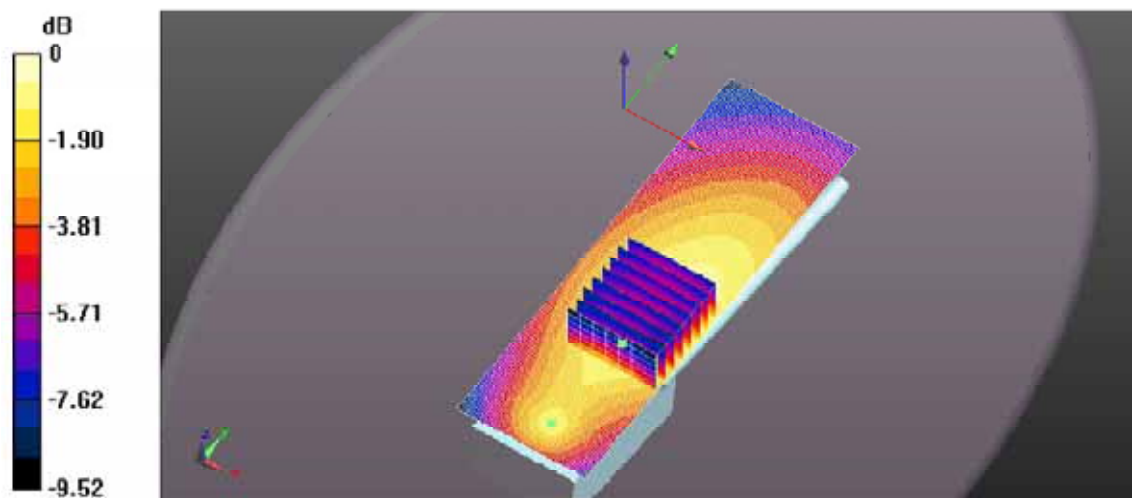

0 dB = 0.937 W/kg = -0.28 dBW/kg

[File Name: ICOM-590Q Body IC-M85UL FA-SC58V 156.40MHz.da52:0](#)

DUT: ICOM IC-M85UL; Type: VHF Marine Transceiver; Serial: 0000305


Communication System: UID 0, CW (0); Frequency: 156.4 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 156.4$ MHz; $\sigma = 0.839$ S/m; $\epsilon_r = 59.108$; $\rho = 1000$ kg/m³; Phantom section:
Flat Section; Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: ES3DV3 - SN3208; ConvF(7.36, 7.36, 7.36); Calibrated: 3/18/2022;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn874; Calibrated: 8/25/2022
- Phantom: ELI 4.0; Type: QD OVA 001 BB; Serial: 1057
- DASYS 52.10.0(1446); SEMCAD X 14.6.10(7417)

Configuration_Body_IC-M85UL/Body Back, P=5W,d=0mm, (SAR corrected for target medium)/Area Scan (51x161x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.989 W/kg

Configuration_Body_IC-M85UL/Body Back, P=5W,d=0mm,(SAR corrected for target medium)/Zoom Scan (7x7x7) (8x8x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 33.38 V/m; Power Drift = -0.06 dB
Peak SAR (extrapolated) = 1.61 W/kg
SAR(1 g) = 0.877 W/kg; SAR(10 g) = 0.599 W/kg (SAR corrected for target medium)
Maximum value of SAR (measured) = 1.00 W/kg

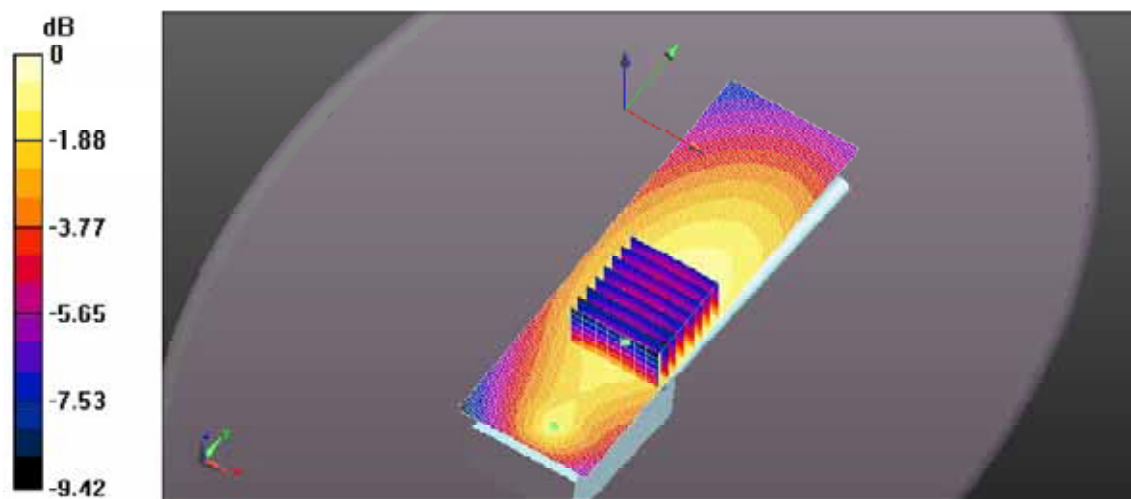

0 dB = 1.00 W/kg = 0.00 dBW/kg

[File Name: ICOM-590Q Body IC-M85UL FA-SC58V 157.025MHz.da52:0](#)

DUT: ICOM IC-M85UL; Type: VHF Marine Transceiver; Serial: 00000305

Communication System: UID 0, CW (0); Frequency: 157.025 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 158 \text{ MHz}$; $\sigma = 0.838 \text{ S/m}$; $\epsilon_r = 59.05$; $\rho = 1000 \text{ kg/m}^3$; Phantom section:
Flat Section; Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: ES3DV3 - SN3208; ConvF(7.36, 7.36, 7.36); Calibrated: 3/18/2022;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn874; Calibrated: 8/25/2022
- Phantom: ELI 4.0; Type: QD OVA 001 BB; Serial: 1057
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Configuration_Body_IC-M85UL/Body Back, P=5W,d=0mm, (SAR corrected for target medium)/Area Scan (51x161x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
Maximum value of SAR (interpolated) = 1.12 W/kg


Configuration_Body_IC-M85UL/Body Back, P=5W,d=0mm,(SAR corrected for target medium)/Zoom Scan (7x7x7) (8x8x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 33.82 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 1.75 W/kg

SAR(1 g) = 0.960 W/kg; SAR(10 g) = 0.658 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 1.11 W/kg

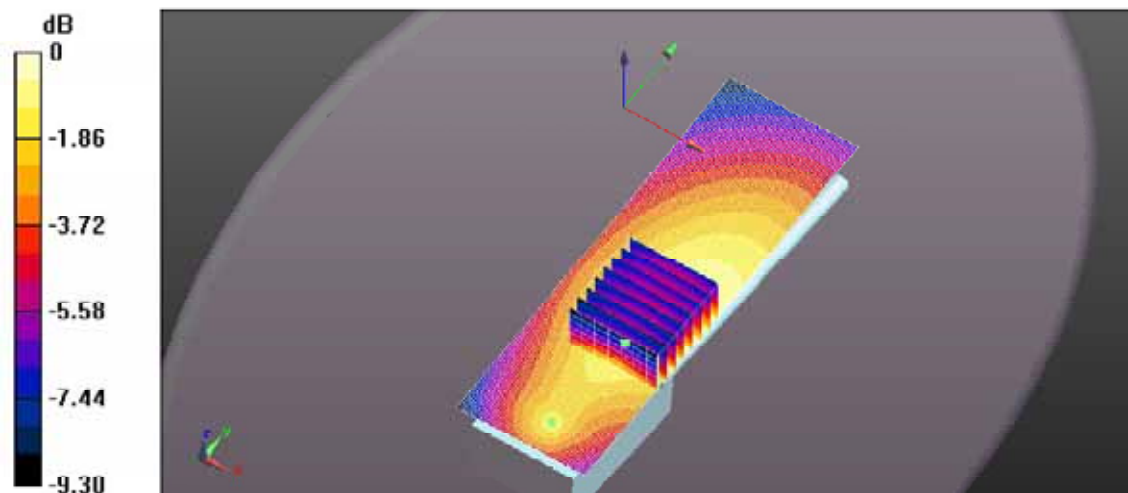

0 dB = 1.11 W/kg = 0.44 dBW/kg

[File Name: ICOM-590Q Body IC-M85UL FA-SC58V 157.425MHz.da52:0](#)

DUT: ICOM IC-M85UL; Type: VHF Marine Transceiver; Serial: 00000305

Communication System: UID 0, CW (0); Frequency: 157.425 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 158$ MHz; $\sigma = 0.838$ S/m; $\epsilon_r = 59.05$; $\rho = 1000$ kg/m³; Phantom section:
Flat Section; Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: ES3DV3 - SN3208; ConvF(7.36, 7.36, 7.36); Calibrated: 3/18/2022;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn874; Calibrated: 8/25/2022
- Phantom: ELI 4.0; Type: QD OVA 001 BB; Serial: 1057
- DASYS 52.10.0(1446); SEMCAD X 14.6.10(7417)

Configuration_Body_IC-M85UL/Body Back, P=5W,d=0mm, (SAR corrected for target medium)/Area Scan (51x161x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.967 W/kg


Configuration_Body_IC-M85UL/Body Back, P=5W,d=0mm,(SAR corrected for target medium)/Zoom Scan (7x7x7) (8x8x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 33.48 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.62 W/kg

SAR(1 g) = 0.871 W/kg; SAR(10 g) = 0.586 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 1.00 W/kg

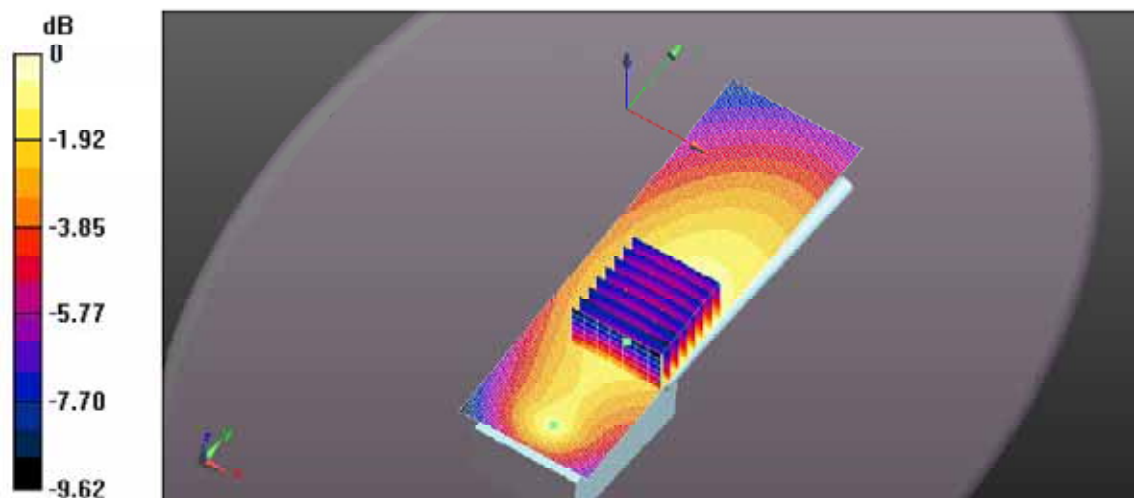

0 dB = 1.00 W/kg = 0.00 dBW/kg

[File Name: ICOM-590Q Body IC-M85UL FA-SC58V 173.95MHz.da52:0](#)

DUT: ICOM IC-M85UL; Type: VHF Marine Transceiver; Serial: 00000305

Communication System: UID 0, CW (0); Frequency: 173.95 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 174$ MHz; $\sigma = 0.85$ S/m; $\epsilon_r = 58.44$; $\rho = 1000$ kg/m³; Phantom section: Flat Section; Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: ES3DV3 - SN3208; ConvF(7.36, 7.36, 7.36); Calibrated: 3/18/2022;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn874; Calibrated: 8/25/2022
- Phantom: ELI 4.0; Type: QD OVA 001 BB; Serial: 1057
- DASYS 52.10.0(1446); SEMCAD X 14.6.10(7417)

Configuration_Body_IC-M85UL/Body Back, P=5W,d=0mm, (SAR corrected for target medium)/Area Scan (51x161x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.592 W/kg


Configuration_Body_IC-M85UL/Body Back, P=5W,d=0mm,(SAR corrected for target medium)/Zoom Scan (7x7x7) (8x8x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 25.57 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.774 W/kg

SAR(1 g) = 0.527 W/kg; SAR(10 g) = 0.394 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.589 W/kg

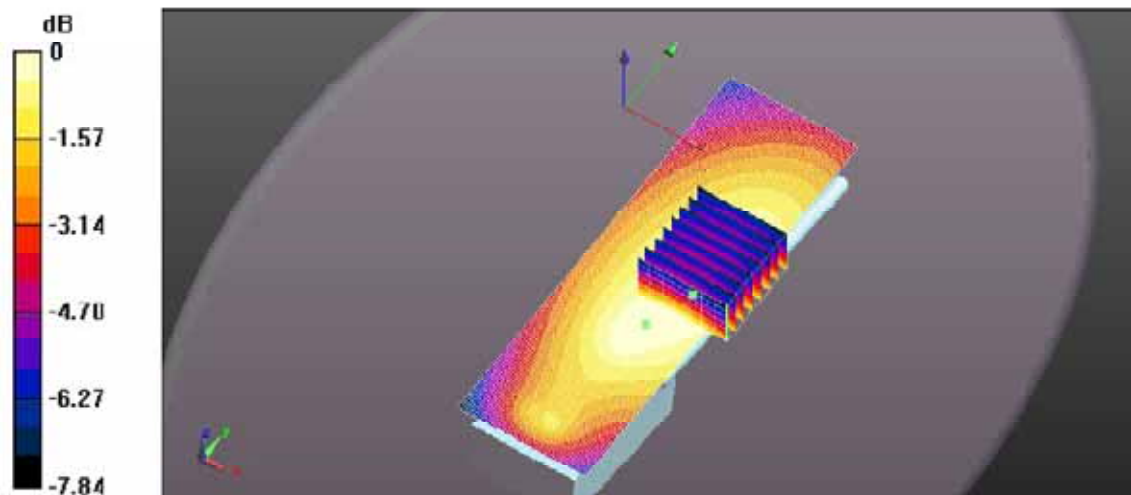

0 dB = 0.589 W/kg = -2.30 dBW/kg

EXHIBIT 3. PRESCAN FOR MB-136 BELT CLIP(BP-292UL)

[File Name: ICOM-590Q \(MB-136 Prescan\) Body IC-M85UL FA-SC58V 173.95MHz.da52:0](#)

DUT: ICOM IC-M85UL; Type: VHF Marine Transceiver; Serial: 00000305

Communication System: UID 0, CW (0); Frequency: 157.025 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 158$ MHz; $\sigma = 0.789$ S/m; $\epsilon_r = 59.889$; $\rho = 1000$ kg/m³; Phantom section:
Flat Section; Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: ES3DV3 - SN3208; ConvF(7.36, 7.36, 7.36); Calibrated: 3/18/2022;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn874; Calibrated: 8/25/2022
- Phantom: ELI 4.0; Type: QD OVA 001 BB; Serial: 1057
- DASYS 52.10.0(1446); SEMCAD X 14.6.10(7417)

Configuration_Body_IC-M85UL/Body Back, P=5W,d=0mm, (SAR corrected for target medium)/Area Scan (51x161x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.337 W/kg


Configuration_Body_IC-M85UL/Body Back, P=5W,d=0mm,(SAR corrected for target medium)/Zoom Scan (7x7x7) (8x8x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 19.83 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.461 W/kg

SAR(1 g) = 0.306 W/kg; SAR(10 g) = 0.229 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.343 W/kg

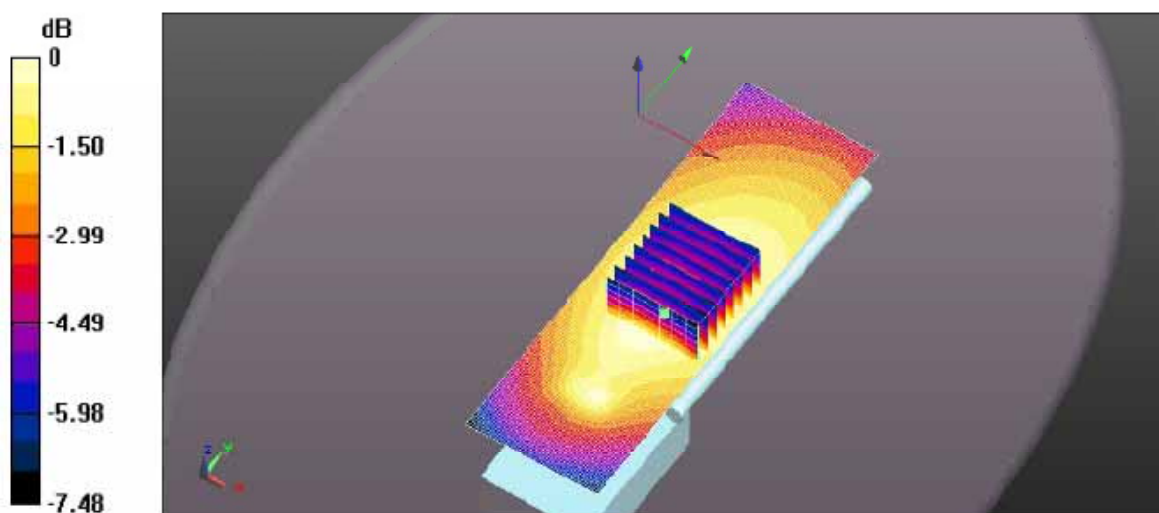

0 dB = 0.343 W/kg = -4.65 dBW/kg

