


Procedure to display the Authentication screen

1. Turn ON the transceiver. Hold down [⏻] for 2 seconds. And wait until standby screen displayed.
2. Push [MENU], and push [Δ/▽] to select “Authentication”.
3. Push [ENT]. You can scroll the Authentication screen by [Δ/▽] keys.

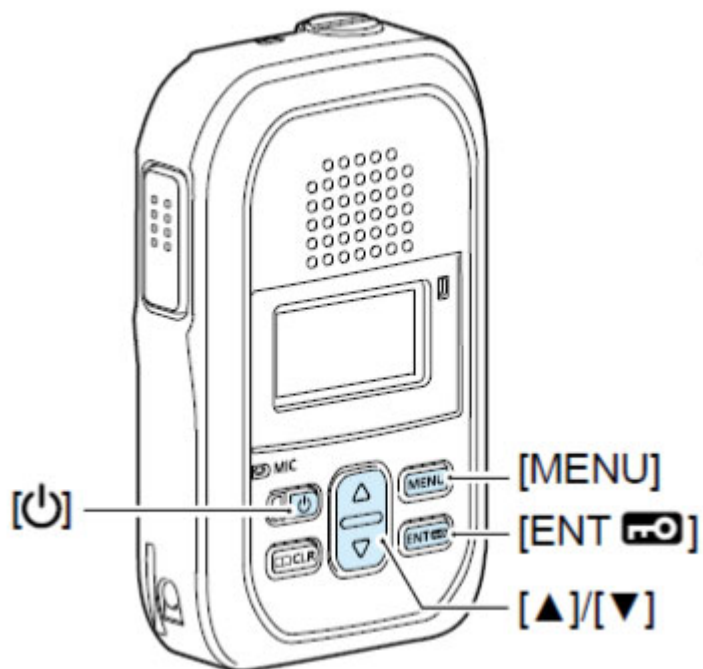

Authentication

IP110H

U.S.

FCC ID: AFJ399500



Restricted to occupational use to satisfy FCC RF exposure limits. See user manual for operating requirements.

This device complies with part 15 of the FCC Rules.

Operation is subject to the condition that this device does not cause harmful interference.

Canada

IC: 202D-399500

Model: IP110H

HVIN: 399500-01

Bluetooth

Contains FCCID:

VIYHRM1016

Contains IC:

7305A-HRM1016

Model: HRM1016

