



November 20, 2000

**ICOM Incorporate**  
1-6-19 Kamikurazukuri Hirano-Ku  
Osaka, Japan, 547

**Attn.: Mr. Tadashi Maebayshi**

**Subject: Verification Testing in accordance with SAR (Specific Absorption Rate) requirements using guidelines established in:**

**IEEE C95.1-1991,  
FCC OET Bulletin 65 (Supplement C)  
Industry Canada RSS-102 (Issue 1)  
ACA Radiocommunications (Electromagnetic Radiation – Human Exposure) Amendment Standard 2000 (No. 1)**

**Product: UHF Transceiver  
Model: IC-F40GT-2**

Dear Mr. Maebayshi

The product sample has been tested in accordance with **SAR (Specific Absorption Rate) requirements using guidelines established in IEEE C95.1-1991, FCC OET Bulletin 65 (Supplement C), Industry Canada RSS-102 (Issue 1) and ACA Radiocommunications (Electromagnetic Radiation – Human Exposure) Amendment Standard 2000 (No. 1)**, and the results and observation were recorded in the engineering report, Our File No.: ICOM-017-SAR

Enclosed you will find a copy of the engineering report. If you have any queries, please do not hesitate to contact us.

Yours truly,

A handwritten signature in blue ink over a red circular stamp. The stamp contains the text "LENGUOY PROFESSIONAL ENGINEER" around the perimeter and "T.M. LUU" in the center.


Tri Minh Luu, P.Eng  
Vice President - Engineering

Encl.

3000 Bristol Circle,  
Oakville, Ontario, Canada  
L6H 6G4

Telephone (905) 829-1570  
Facsimile (905) 829-8050

# CERTIFICATE OF COMPLIANCE



November 20, 2000

File No.: ICOM-017-SAR

**ICOM Incorporate**

1-6-19 Kamikurazukuri Hirano-Ku  
Osaka, Japan, 547

## NOT TRANSFERABLE

This Verification Certificate is hereby issued to the named GRANTEE and is VALID ONLY for the equipment identified hereon for use under the rules and regulations listed below:

<b>GRANTEE'S NAME:</b>	<b>ICOM Incorporate</b>
<b>PRODUCT UNDER TEST:</b>	<b>UHF Transceiver</b>
<b>MODEL NO.:</b>	<b>IC-F40GT-2</b>
<b>FCC ID:</b>	<b>AFJ IC-F40G-2</b>
<b>OPERATING FREQUENCY RANGE:</b>	<b>450.05-489.95 MHz</b>
<b>NOMINAL RF OUTPUT POWER:</b>	<b>4.0 W Peak/Average</b>
<b>MAXIMUM S.A.R.:</b>	<b>5.417 W/Kg</b>

**APPLICABLE STANDARDS:** SAR (Specific Absorption Rate) requirements using guidelines established in IEEE C95.1-1991, FCC OET Bulletin 65 (Supplement C), Industry Canada RSS-102 (Issue 1) and ACA Radiocommunications (Electromagnetic Radiation – Human Exposure) Amendment Standard 2000 (No. 1)

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA )
- *All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST Technology (NIST)*




**Approved by: Tri M. Luu, P.Eng.  
V.P. – Engineering**

## UltraTech

3000 Bristol Circle, Oakville, Ontario, Canada, L6H 6G4  
Telephone (905) 829-1570  
Facsimile (905) 829-8050  
Website: [www.ultratech-labs.com](http://www.ultratech-labs.com)  
Email: [vhk.ultratech@sympatico.ca](mailto:vhk.ultratech@sympatico.ca)

# ENGINEERING TEST REPORT



## UHF Transceiver Model No.: IC-F40GT-2

### Tested For

**ICOM Incorporate**  
1-6-19 Kamikurazukuri Hirano-Ku  
Osaka, Japan, 547

### In Accordance With

**SAR (Specific Absorption Rate) Requirements  
using guidelines established in IEEE C95.1-1991,  
FCC OET Bulletin 65 (Supplement C),  
Industry Canada RSS-102 (Issue 1) and  
ACA Radiocommunications (Electromagnetic Radiation – Human Exposure)  
Amendment Standard 2000 (No. 1)**

**UltraTech's File No.: ICOM-017-SAR**

This Test report is Issued under the Authority of  
Tri M. Luu, Professional Engineer,  
Vice President of Engineering  
UltraTech Group of Labs



Date: November 20, 2000

Report Prepared by: Carolyn Luu

Tested by: JaeWook Choi

Issued Date: November 20, 2000

Test Dates: November 13, 2000

*The results in this Test Report apply only to the sample(s) tested, which has been randomly selected.*

## UltraTech

3000 Bristol Circle, Oakville, Ontario, Canada, L6H 6G4  
Telephone (905) 829-1570 Facsimile (905) 829-8050  
Website: [www.ultratech-labs.com](http://www.ultratech-labs.com) Email: [vhk.ultratech@sympatico.ca](mailto:vhk.ultratech@sympatico.ca)

# TABLE OF CONTENTS

**EXHIBIT 1. INTRODUCTION.....3**

1.1. SCOPE..... 3

1.2. REFERENCES ..... 3

**EXHIBIT 2. PERFORMANCE ASSESSMENT .....4**

2.1. CLIENT AND MANUFACTURER INFORMATION..... 4

2.2. DEVICE UNDER TEST (DUT) DESCRIPTION..... 4

2.3. LIST OF DUT’S ACCESSORIES: ..... 5

2.4. SPECIAL CHANGES ON THE DUT’S HARDWARE/SOFTWARE FOR TESTING PURPOSES ..... 9

2.5. ANCILLARY EQUIPMENT ..... 9

2.6. GENERAL TEST CONFIGURATIONS..... 9

2.6.1. *Equipment Configuration* ..... 9

2.6.2. *Exercising Equipment*..... 9

2.7. SPECIFIC OPERATING CONDITIONS..... 9

2.8. BLOCK DIAGRAM OF TEST SETUP ..... 10

**EXHIBIT 3. SUMMARY OF TEST RESULTS.....11**

3.1. LOCATION OF TESTS ..... 11

3.2. APPLICABILITY & SUMMARY OF SAR RESULTS..... 11

**EXHIBIT 4. MEASUREMENTS, EXAMINATIONS & TEST DATA.....12**

4.1. TEST SETUP ..... 12

4.2. PHOTOGRAPH OF EUT WITH ALL ACCESSORIES ..... 14

4.3. PHOTOGRAPHS OF EUT POSITION ..... 17

4.4. MAXIMUM FIELD LOCATION..... 21

4.5. PEAK SPATIAL-AVERAGE SAR MEASURED ..... 22

4.6. SAR MEASUREMENT DATA ..... 22

**EXHIBIT 5. SAR SYSTEM CONFIGURATION & TEST METHODOLOGY .....23**

5.1. MEASUREMENT SYSTEM SPECIFICATIONS..... 23

5.2. TEST PROCEDURES..... 23

5.3. PHANTOM..... 23

5.4. SIMULATED TISSUE ..... 24

5.4.1. *Preparation*..... 24

5.5. MEASUREMENT OF ELECTRICAL CHARACTERISTICS OF SIMULATED TISSUE ..... 24

5.5.1. *Description of the slotted coaxial waveguide* ..... 24

5.6. SYSTEM DESCRIPTION ..... 26

5.7. DATA EXTRAPOLATION (CURVE FITTING)..... 27

5.8. INTERPOLATION AND GRAM AVERAGING..... 27

5.9. POWER MEASUREMENT ..... 28

5.10. POSITIONING OF D.U.T. .... 28

5.11. SAR MEASUREMENT UNCERTAINTY..... 30

**ULTRATECH GROUP OF LABS**

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

**File #: ICOM-017-SAR**

**November 20, 2000**

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA )
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

**SPECIFIC ABSORPTION RATIO (SAR)**

**Page 2**

IEEE C95.1-1991, FCC OET Bulletin 65 (Supplement C), Industry Canada RSS-102(Issue 1) and ACA Radiocommunications (Electromagnetic Radiation – Human Exposure) Amendment Standard 2000 (No. 1)

**UHF Transceiver, Model No.: IC-F40GT-2**

**FCC ID: AFJ IC-F40G-2**

---

**ANNEX A: Waist SAR Measurement**

**ANNEX B: Head-front SAR Measurement**

**ANNEX D: Tissue Calibration**

---

**ULTRATECH GROUP OF LABS**

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

**File #: ICOM-017-SAR**

**November 20, 2000**

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- *All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)*

## EXHIBIT 1. INTRODUCTION

### 1.1. SCOPE

<b>Reference:</b>	SAR (Specific Absorption Rate) Requirements IEEE C95.1-1991, FCC OET Bulletin 65 (Supplement C) Industry Canada RSS-102 (Issue 1). ACA Radiocommunications (Electromagnetic Radiation – Human Exposure) Amendment Standard 2000 (No. 1)
<b>Title</b>	Safety Levels with respect to human exposure to Radio Frequency Electromagnetic Fields Guideline for Evaluating the Environmental Effects of Radio Frequency Radiation
<b>Purpose of Test:</b>	To show compliance with Federal regulated SAR requirements in Canada and the US.
<b>Method of Measurements:</b>	IEEE C95.1-1991, FCC OET Bulletin 65 (Supplement C) and Industry Canada RSS-102(Issue 1)
<b>Exposure Category</b>	[ ] General population, uncontrolled exposure [X] <b>occupational, controlled exposure</b>

### 1.2. REFERENCES

The methods and procedures used for the measurements contained in this report are details in the following reference standards:

Publications	Year	Title
Industry Canada RSS102	1999	"Evaluation Procedure for Mobile and Portable Radio Transmitters with respect to Health Canada's Safety Code 6 for Exposure of Humans to Radio Frequency Fields"
ACA	2000	ACA Radiocommunications (Electromagnetic Radiation – Human Exposure) Amendment Standard 2000 (No. 1)
NCRP Report No.86	1986	"Biological Effects and Exposure Criteria for radio Frequency Electromagnetic Fields"
FCC OET Bulletin 65	1997	"Evaluating Compliance with FCC Guidelines for Human Exposure to radio Frequency Fields"
ANSI/IEEE C95.3	1992	"Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave"
ANSI/IEEE C95.1	1992	"Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3kHz to 300GHz"
AS/NZS 2722.1	1998	Interim Australian/New Zealand Standard. "Radiofrequency fields, Part 1:Maximum exposure levels – 3kHz to 300GHz "

## ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vhk.ultratech@sympatico.ca](mailto:vhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

**File #: ICOM-017-SAR**  
**November 20, 2000**

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

**EXHIBIT 2. PERFORMANCE ASSESSMENT**

**2.1. CLIENT AND MANUFACTURER INFORMATION**

<b>APPLICANT:</b>	
<b>Name:</b>	ICOM Incorporate
<b>Address:</b>	1-6-19 Kamikurazukuri Hirano-Ku Osaka, Japan , 547
<b>Contact Person:</b>	Mr. Tadashi Maebayshi Phone #: 0118167 Email Address: export@icom.co.jp

<b>MANUFACTURER:</b>	
<b>Name:</b>	ICOM Incorporated
<b>Address:</b>	1-6-19 Kamikurazukuri Hirano-Ku Osaka, Japan, 547
<b>Contact Person:</b>	ICOM Incorporated Phone #: 0118167 Email Address: export@icom.co.jp

**2.2. DEVICE UNDER TEST (DUT) DESCRIPTION**

The following information are supplied by the applicant.

<b>Trade Name</b>	ICOM Inc.
<b>Type/Model Number</b>	IC-F40GT-2
<b>Serial Number</b>	0002
<b>Type of Equipment</b>	UHF Transceiver
<b>Frequency of Operation</b>	450.05 ~ 489.95 MHz
<b>Rated RF Power</b>	4.0 W
<b>Duty Cycle</b>	50 %
<b>Modulation Employed</b>	Frequency Modulation
<b>Antenna Type</b>	Monopole
<b>External Power Supply</b>	Ni-MH Battery (7.2V/1650mAh) Ni-Cd Battery (7.2V/1100mAh)
<b>Primary User Functions of DUT:</b>	Voice Radio Communication Through Air

**ULTRATECH GROUP OF LABS**

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: ICOM-017-SAR  
November 20, 2000

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA )
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

**SPECIFIC ABSORPTION RATIO (SAR)**

IEEE C95.1-1991, FCC OET Bulletin 65 (Supplement C), Industry Canada RSS-102(Issue 1) and ACA Radiocommunications (Electromagnetic Radiation – Human Exposure) Amendment Standard 2000 (No. 1)

UHF Transceiver, Model No.: IC-F40GT-2

FCC ID: AFJ IC-F40G-2

**2.3. LIST OF DUT'S ACCESSORIES:**



<Battery Charger, BC-137 >



<AC adapter, BC-122>

**ULTRATECH GROUP OF LABS**

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: ICOM-017-SAR

November 20, 2000

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



**SPECIFIC ABSORPTION RATIO (SAR)**

IEEE C95.1-1991, FCC OET Bulletin 65 (Supplement C), Industry Canada RSS-102(Issue 1) and ACA Radiocommunications (Electromagnetic Radiation – Human Exposure) Amendment Standard 2000 (No. 1)

**UHF Transceiver, Model No.: IC-F40GT-2**

**FCC ID: AFJ IC-F40G-2**



<Battery Charger, BC-119 + AD-94>



<AC adapter BC-124 >

**ULTRATECH GROUP OF LABS**

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: ICOM-017-SAR

November 20, 2000

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

**SPECIFIC ABSORPTION RATIO (SAR)**

IEEE C95.1-1991, FCC OET Bulletin 65 (Supplement C), Industry Canada RSS-102(Issue 1) and ACA Radiocommunications (Electromagnetic Radiation – Human Exposure) Amendment Standard 2000 (No. 1)

**UHF Transceiver, Model No.: IC-F40GT-2**

**FCC ID: AFJ IC-F40G-2**



< Battery pack : Ni-MH 7.2V/1650mAh, BP-210 >



< Battery pack : Ni-Cd 7.2V/1100mAh, BP-209 >

**ULTRATECH GROUP OF LABS**

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: ICOM-017-SAR

November 20, 2000

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

**SPECIFIC ABSORPTION RATIO (SAR)**

IEEE C95.1-1991, FCC OET Bulletin 65 (Supplement C), Industry Canada RSS-102(Issue 1) and ACA Radiocommunications (Electromagnetic Radiation – Human Exposure) Amendment Standard 2000 (No. 1)

**UHF Transceiver, Model No.: IC-F40GT-2**

**FCC ID: AFJ IC-F40G-2**



< Speaker-Microphone, EM-80 >



< Belt clip, MB-68 >



< Belt clip(alligator type), MB-74 >

**ULTRATECH GROUP OF LABS**

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

**File #: ICOM-017-SAR**

**November 20, 2000**

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

---

## **2.4. SPECIAL CHANGES ON THE DUT'S HARDWARE/SOFTWARE FOR TESTING PURPOSES**

None

## **2.5. ANCILLARY EQUIPMENT**

Battery Charger, Belt Clip, AC Adapter, Battery NI-Cd-7.2V/1100mAh, Battery Ni-MH-7.2V/1650mAh,

## **2.6. GENERAL TEST CONFIGURATIONS**

### **2.6.1. Equipment Configuration**

Power and signal distribution, grounding, interconnecting cabling and physical placement of equipment of a test system shall simulate the typical application and usage in so far as is practicable, and shall be in accordance with the relevant product specifications of the manufacturer.

The configuration that tends to maximize the DUT's emission or minimize its immunity is not usually intuitively obvious and in most instances selection will involve some trial and error testing. For example, interface cables may be moved or equipment re-orientated during initial stages of testing and the effects on the results observed.

Only configurations within the range of positions likely to occur in normal use need to be considered.

The configuration selected shall be fully detailed and documented in the test report, together with the justification for selecting that particular configuration.

### **2.6.2. Exercising Equipment**

The exercising equipment and other auxiliary equipment shall be sufficiently decoupled from the EUT so that the performance of such equipment does not significantly influence the test results.

## **2.7. SPECIFIC OPERATING CONDITIONS**

Not specified.

---

### **ULTRATECH GROUP OF LABS**

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>


**File #: ICOM-017-SAR**

**November 20, 2000**

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- *All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)*

**2.8. BLOCK DIAGRAM OF TEST SETUP**

The EUT was configured as normal intended use. The following block diagram shows the equipment arrangement during tests:

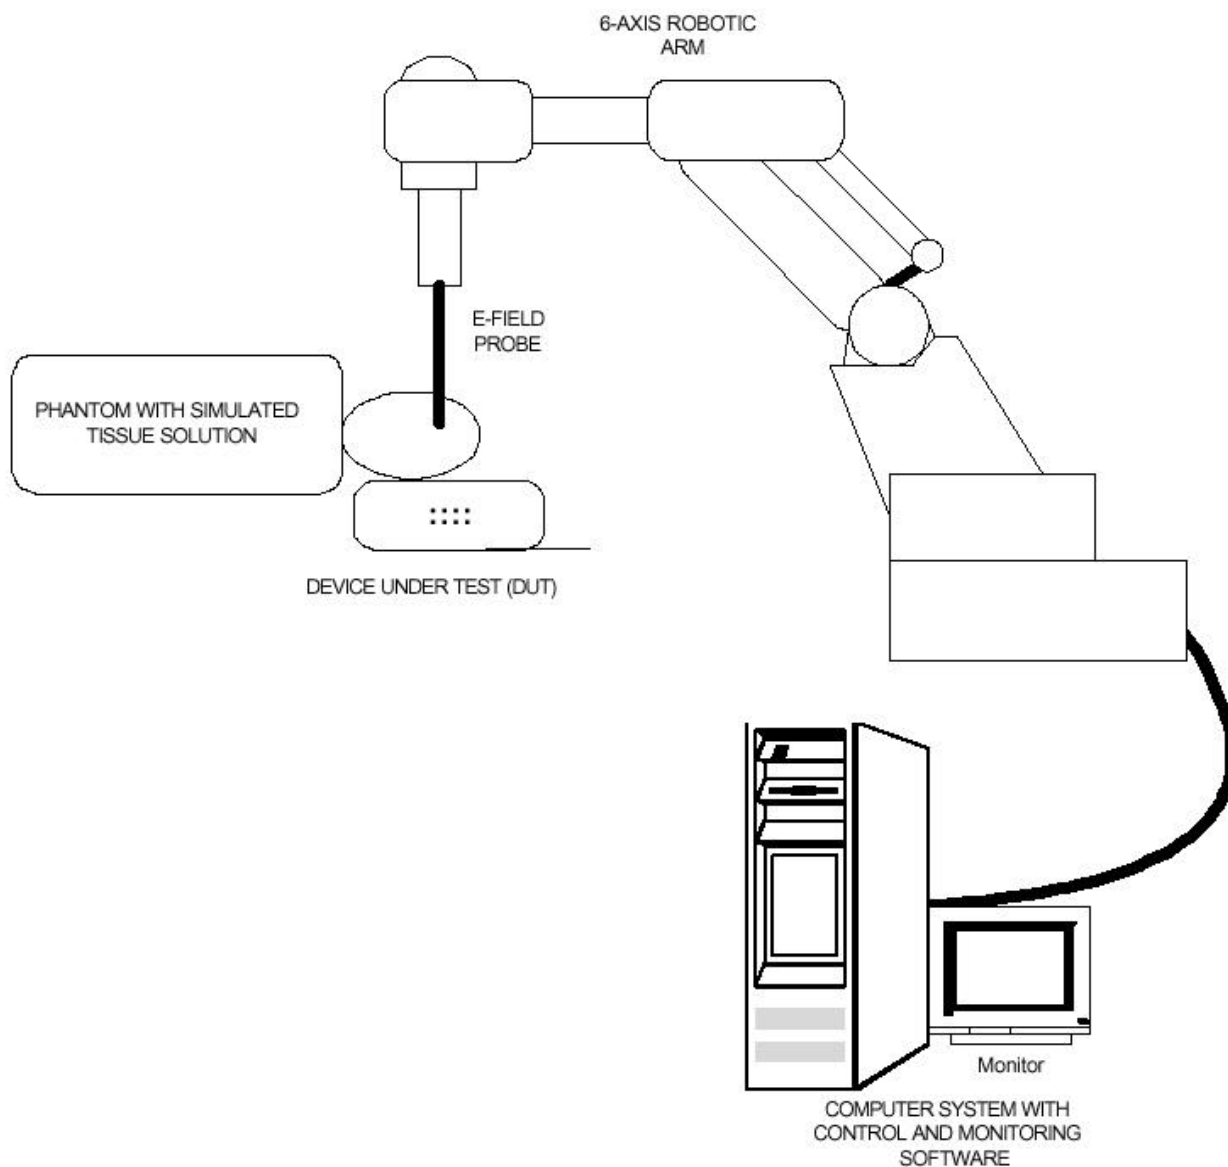

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

**EXHIBIT 3. SUMMARY OF TEST RESULTS**

**3.1. LOCATION OF TESTS**

All of the measurements described in this report were performed at UltraTech Group of Labs located in:

3000 Bristol Circle, Oakville, Ontario, Canada.

**3.2. APPLICABILITY & SUMMARY OF SAR RESULTS**

The peak spatial - average SAR measured was found to be 5.417W/Kg

SAR Limits	Test Requirements	Compliance (Yes/No)
<p><b>General population/Uncontrolled exposure</b></p> <p>0.08W/kg whole body average and spatial peak SAR of 1.6W/kg, averaged over 1gram of tissue Hands, wrist, feet and ankles have a peak SAR not to exceed 4 W/kg, averaged over 10 grams of tissue.</p>	<p>Requirements using guidelines established in IEEE C95.1-1991</p> <p>FCC OET Bulletin 65 (Supplement C)</p> <p>Industry Canada RSS-102 (Issue 1).</p> <p>ACA Radiocommunications (Electromagnetic Radiation – Human Exposure) Amendment Standard 2000 (No. 1)</p>	<p>N/A</p>
<p><b>Occupational/Controlled Exposure</b></p> <p>0.4W/kg whole body average and spatial peak SAR of 8W/kg, averaged over 1gram of tissue Hands, wrist, feet and ankles have a peak SAR not to exceed 20 W/kg, averaged over 10 grams of tissue.</p>	<p>Requirements using guidelines established in IEEE C95.1-1991</p> <p>FCC OET Bulletin 65 (Supplement C),</p> <p>Industry Canada RSS-102 (Issue 1)</p> <p>ACA Radiocommunications (Electromagnetic Radiation – Human Exposure) Amendment Standard 2000 (No. 1)</p>	<p>Yes</p>

**ULTRATECH GROUP OF LABS**

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: ICOM-017-SAR

November 20, 2000

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

**EXHIBIT 4. MEASUREMENTS, EXAMINATIONS & TEST DATA**

**4.1. TEST SETUP**

EUT Information		Condition	
Radio Type	UHF Transceiver	Robot Type	6 Axis
Model Number	IC-F40GT-2	Scan Type	SAR
Serial Number	0002	Measured Field	E
Frequency Band (MHz)	450.05-489.95	Phantom Type	Open back full body
Frequency Tested (MHz)	450.05, 470.05, 489.95	Phantom Position	Waist, Head-front
Nominal Output Power (W)	4.0	Room Temperature	25 ± 1 °C
Antenna Type	Attachable Monopole		
Signal Type	CW		
Duty Cycle	50% (Half-duplex type PTT*)		

Type of Tissue	Brain	Muscle		
Target Frequency (MHz)	470	470		
Target Dielectric Constant	48.6	57.5		
Target Conductivity (S/m)	0.62	0.84		
Composition (by weight)	Tap Water (43.40%) Sugar (55.06%) Salt (1.40%) HEC (0.10%) Bactericide (0.05%)	Tap Water (51.16 %) Sugar (46.78 %) Salt (1.49%) HEC (0.52 %) Bactericide (0.05%)		
Measured Dielectric Constant	50.2	58.1		
Measured Conductivity (S/m)	0.65	0.82		
Probe Name	E	E		
Probe Orientation	Isotropic	Isotropic		
Probe Offset (mm)	2.25	2.25		
Sensor Factor	10.8	10.8		
Conversion Factor	0.316	0.452		
Calibration Date (MM/DD/YY)	10/7/99	10/8/99		

\* EUT is transmitting with 100% duty cycle but **50% duty factor** can only be applied for truly PTT device, that is using a mechanical switch and the device is designed for PTT that does not have feasibility to be connected to wired lines through an operator.

**ULTRATECH GROUP OF LABS**

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vhk.ultratech@sympatico.ca](mailto:vhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

**File #: ICOM-017-SAR**  
**November 20, 2000**

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

**4.2. PHOTOGRAPH OF EUT**



**< Front View >**

**ULTRATECH GROUP OF LABS**

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

**File #: ICOM-017-SAR**

**November 20, 2000**

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- *All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)*



**SPECIFIC ABSORPTION RATE (SAR)**

IEEE C95.1-1991, FCC OET Bulletin 65 (Supplement C), Industry Canada RSS-102(Issue 1) and ACA Radiocommunications (Electromagnetic Radiation – Human Exposure) Amendment Standard 2000 (No. 1)

**UHF Transceiver, Model No.: IC-F40GT-2**

**FCC ID: AFJ IC-F40G-2**



< Rear View >

**ULTRATECH GROUP OF LABS**

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

**File #: ICOM-017-SAR**

**November 20, 2000**

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- *All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)*

### 4.3. PHOTOGRAPHS OF EUT POSITION

The worst case test configuration was determined with different orientation of the EUT (Antenna parallel to the phantom and the tip of the antenna in contact with the phantom) and belt clips (normal (MN:MB-68) and alligator belt clip (MN:MB-74)). The EUT positioned parallel to the phantom with normal belt clip yield higher SAR reading.



#### **ULTRATECH GROUP OF LABS**

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>**File #: ICOM-017-SAR****November 20, 2000**

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- *All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)*

**SPECIFIC ABSORPTION RATIO (SAR)**

IEEE C95.1-1991, FCC OET Bulletin 65 (Supplement C), Industry Canada RSS-102(Issue 1) and ACA Radiocommunications (Electromagnetic Radiation – Human Exposure) Amendment Standard 2000 (No. 1)

**UHF Transceiver, Model No.: IC-F40GT-2**

**FCC ID: AFJ IC-F40G-2**



< Close-up view – Waist with the antenna positioned parallel with the phantom >

**ULTRATECH GROUP OF LABS**

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

**File #: ICOM-017-SAR**

**November 20, 2000**

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- *All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)*

**SPECIFIC ABSORPTION RATE (SAR)**

IEEE C95.1-1991, FCC OET Bulletin 65 (Supplement C), Industry Canada RSS-102(Issue 1) and ACA Radiocommunications (Electromagnetic Radiation – Human Exposure) Amendment Standard 2000 (No. 1)

**UHF Transceiver, Model No.: IC-F40GT-2**

**FCC ID: AFJ IC-F40G-2**



< Overview - Head Front >

**ULTRATECH GROUP OF LABS**

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

**File #: ICOM-017-SAR**

**November 20, 2000**


- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- *All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)*

**SPECIFIC ABSORPTION RATE (SAR)**

IEEE C95.1-1991, FCC OET Bulletin 65 (Supplement C), Industry Canada RSS-102(Issue 1) and ACA Radiocommunications (Electromagnetic Radiation – Human Exposure) Amendment Standard 2000 (No. 1)

**UHF Transceiver, Model No.: IC-F40GT-2**

**FCC ID: AFJ IC-F40G-2**

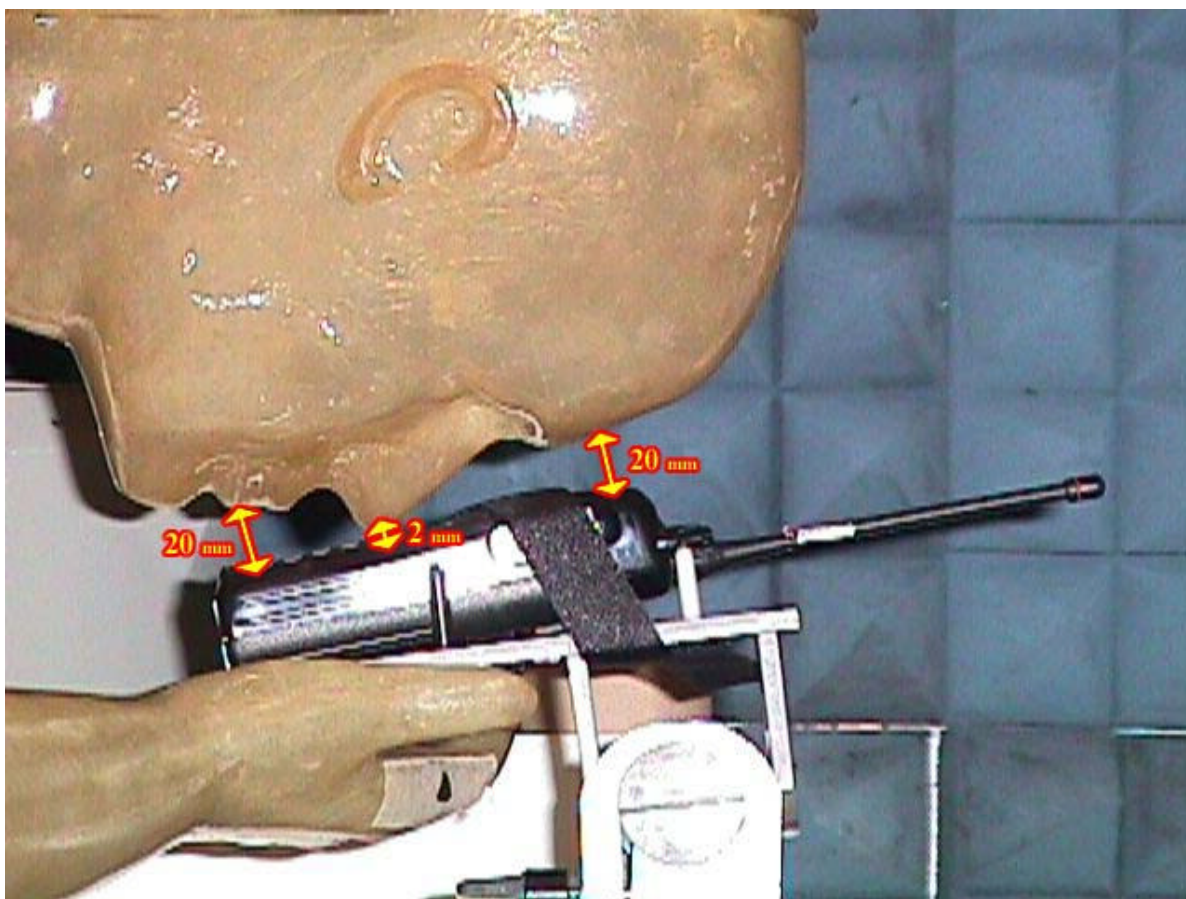

< Close-up view >

**ULTRATECH GROUP OF LABS**

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4


Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

**File #: ICOM-017-SAR**

**November 20, 2000**

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

**4.4. MAXIMUM FIELD LOCATION**

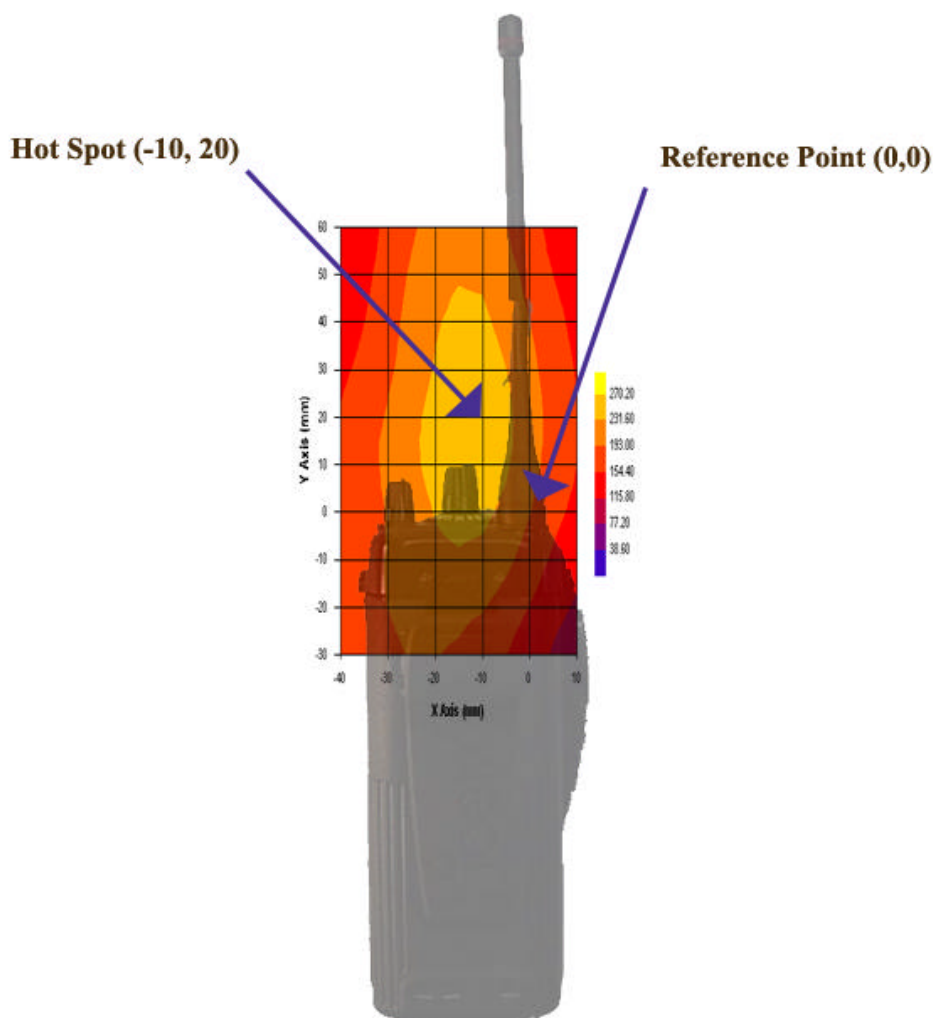

**ULTRATECH GROUP OF LABS**

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

**File #: ICOM-017-SAR**

**November 20, 2000**

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

**4.5. PEAK SPATIAL-AVERAGE SAR MEASURED**

<b>Maximum Field at ( -10, 20 )</b>				
DUT Positioning	Frequency (MHz)	Measured Power (W)	SAR (W/Kg)	DUT Configuration
Waist	450.05 N	3.93	5.417 (10.833)	Waist with large capacity battery pack

**4.6. SAR MEASUREMENT DATA**

DUT Positioning	Frequency (MHz)	Measured Power (W)	SAR (W/Kg)	DUT Configuration
Waist	450.05 W	4.00	4.973 (9.945)	Waist with large capacity battery pack
	470.05 W	3.89	3.994 (7.988)	
	489.95 W	4.20	3.691 (7.381)	
	450.05 N	3.93	5.417 (10.833)	
	470.05 N	3.97	3.890 (7.779)	
	489.95 N	4.25	3.583 (7.165)	
Head – Front	450.05 W	3.96	1.393 (2.785)	Head front with large capacity battery pack
	470.05 W	3.97	1.257 (2.513)	
	489.95 W	4.01	1.169 (2.338)	
	450.05 N	3.93	1.245 (2.490)	
	470.05 N	3.96	1.155 (2.310)	
	489.95 N	3.94	1.113 (2.225)	

\* The SAR Measurement inside the parenthesis indicates the reading before 50 % duty factor is applied for the half-duplex type PTT.

**ULTRATECH GROUP OF LABS**

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

**File #: ICOM-017-SAR**

**November 20, 2000**

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

**EXHIBIT 5. SAR SYSTEM CONFIGURATION & TEST METHODOLOGY**

**5.1. MEASUREMENT SYSTEM SPECIFICATIONS**

Positioning Equipment	Probe
Type : 3D Near Field Scanner Location Repeatability : 0.1mm Speed 180 °/sec AC motors	Sensor : E-Field Spatial Resolution : 0.1 cm <sup>3</sup> Isotropic Response : ± 0.25 dB Dynamic Range : 2 µW/g to 100 mW/g
Computer	Phantom
Type : 166 MHz Pentium Memory : 32 Meg. RAM Operating System : Windows NT Monitor : 17" SVGA	Tissue : Simulated Tissue with electrical characteristics similar to those of the human at normal body temperature. Shell : Fiberglass human shell shaped (1.5 mm thick)

**5.2. TEST PROCEDURES**

In the SAR measurement, the positioning of the probes must be performed with sufficient accuracy to obtain repeatable measurements in the presence of rapid spatial attenuation phenomena. The accurate positioning of the E-field probe is accomplished by using a high precision robot. The robot can be taught to position the probe sensor following a specific pattern of points. In a first sweep, the sensor is positioned as close as possible to the interface, with the sensor enclosure touching the inside of the fiberglass shell. The SAR is measured on a grid of points, which covers the curved surface of the phantom in an area larger than the size of the DUT. After the initial scan, a high- resolution grid is used to locate the absolute maximum measured energy point. At this location, attenuation versus depth scan will be accomplished by the measurement system to calculate the SAR value.

**5.3. PHANTOM**

The phantom used in the evaluation of the RF exposure of the user of the wireless device is a clear fiberglass enclosure 1.5 mm thick, shaped like a human head or body and filled with a mixture simulating the dielectric characteristics of the brain, muscle or other types of human tissue. The maximum width of the cranial model is 17 cm, the cephalic index is 0.7 and the crown circumference of the cranial model is 61 cm. The ear is 6 mm above the outer surface of the shell.

**ULTRATECH GROUP OF LABS**

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: ICOM-017-SAR

November 20, 2000

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)



**5.4. SIMULATED TISSUE**

Simulated Tissue: Suggested in a paper by George Hartsgrove and colleagues in University of Ottawa Ref.: Bioelectromagnetics 8:29-36 (1987)

<b>Ingredient</b>	<b>Quantity</b>
Water	40.4 %
Sugar	56.0 %
Salt	2.5 %
HEC	1.0 %
Bactericide	0.1 %

Table. Example of composition of simulated tissue.

This simulated tissue is mainly composed of water, sugar and salt. At higher frequencies, in order to achieve the proper conductivity, the solution does not contain salt. Also, at these frequencies, D.I. water and alcohol is preferred.

Tissue Density : Approximately 1.25 g/cm<sup>3</sup>

**5.4.1. Preparation**

We determine the volume needs and carefully measure all components. A clean container is used were the ingredients will be mixed. A stirring paddle and a hand drill is used to stir the mixture. First we heat the DI water to about 40 °C to help the ingredients to dissolve and then we pour the salt and the bactericide. We stir until all the ingredients are completely dissolved. We continue stirring slowly while adding the sugar. We avoid high RPM from the mixing device to prevent air bubbles in the mixture. Later on, we add the HEC to maintain the solution homogeneous. Mixing time is approximately 30 to 40 min.

**5.5. MEASUREMENT OF ELECTRICAL CHARACTERISTICS OF SIMULATED TISSUE**

- 1) Network Analyzer HP8753C or others
- 2) Slotted Coaxial Waveguide

**5.5.1. Description of the slotted coaxial waveguide**

The cylindrical waveguide is constructed with copper tube of about 30 to 40 cm of length, generally 12.5 mm diameter, with connectors at both ends. Inside of this tube, a conductive rod about 6.3 mm is coaxial supported by the two ends connectors (radiator). A slot 3 mm wide start at the beginning of the tube to almost the two third of the tube length. The outer edge of the slotted tube is marked in centimeters (10 to 12) every 1 centimeter, 0.5 if higher frequencies. A saddle piece containing the sampling probe is inserted in the slot so the tip of the probe is close but not in contact with the inner conductor (radiator).

To measure the electrical characteristics of the liquid simulated tissue, we fill the coaxial waveguide, select CW frequency and measure amplitude and phase with the Network Analyzer for every point in the slot (typically 11). An effort is made to keep the results dielectric constant and conductivity within 5 % of published data.

**ULTRATECH GROUP OF LABS**


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

**File #: ICOM-017-SAR**  
**November 20, 2000**

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## Electrical Characteristics Measurement Setup

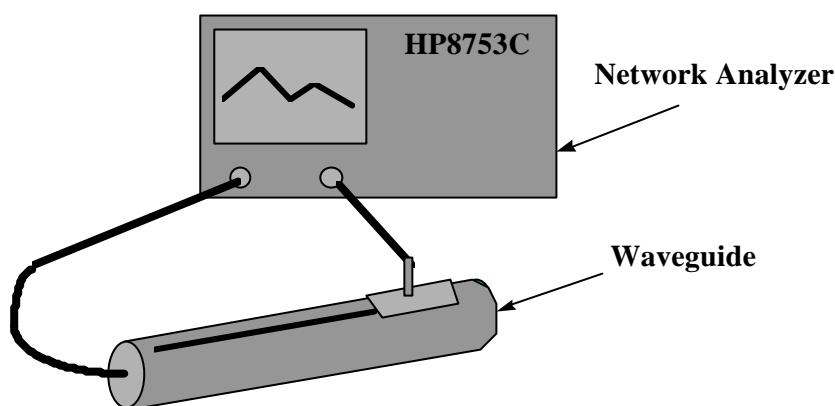

$$c = 3 \cdot 10^8 \text{ m/s}$$

$$A = \frac{\Delta A}{20} \ln_{10} \frac{1}{m}$$

$$\theta = \frac{\Delta \theta \cdot 2\pi}{360}$$

$$\lambda = \frac{c}{f} \cdot \frac{100}{2.54} \text{ inches}$$

$$\epsilon_{re} = \frac{(A^2 + \theta^2) \cdot \lambda^2}{4\pi^2}$$

$$\theta' = \left| \frac{|A| \cdot \lambda}{4\pi \sqrt{\epsilon_{re}}} \right|$$

$$S = \tan(2\theta')$$

$$\epsilon_r = \frac{\epsilon_{re}}{\sqrt{1 + S^2}}$$

$$\sigma = S \cdot 2\pi \cdot f \cdot 8.854 \cdot 10^{12} \cdot \epsilon_r \text{ (S/m)}$$

### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

**File #: ICOM-017-SAR**

**November 20, 2000**

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

where;

$\Delta A$  is the amplitude attenuation in dB

$\Delta\theta$  is the phase change in degrees for 5 cm of wave propagation in the slotted line

f is the frequency of interest in Hz

## 5.6. SYSTEM DESCRIPTION

The measurement system consists of an E-field probe, instrumentation amplifiers, RF transparent cable connecting the amplifiers to the computer, the robotics arm with its extension and proximity sensors, a phantom with simulated tissue and a radio holder to support the device under test. The E-field probe is a three channel device used to measure RF electric fields in the near vicinity of the source. The three sensors are mutually orthogonal positioned dipoles, and are constructed over a quartz substrate. Located in the center of the dipole is a Schottky diode. High impedance lines are connecting the sensor to the amplifier and then optically linked to the computer. The probe has an isotropic response and is transparent to the RF fields.

Calibration is performed by two steps:

- 1) Determination of free space E-field from amplified probe outputs in a test RF field. This calibration is performed in a TEM cell when the frequency is below 1 GHz and in a waveguide or some other methodologies above 1 GHz. For the free space calibration, we place the probe in the volumetric center of the cavity and at the proper orientation with the field. The probe is then rotated 360 degrees until the three channels show the maximum reading. This reading equate to  $1\text{mW}/\text{cm}^2$  if that power density is available in the correspondent cavity.
- 2) Correlation of the measured free space E-field, to temperature rise in a dielectric medium. E-field temperature correlation calibration is performed in a planar phantom filled with the appropriate simulated tissue.

For temperature correlation calibration, a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe. First, the location of the maximum E-field close to the phantom’s inner surface is determined as a function of power into the RF source; in this case, a dipole. Then, the E-field probe is moved sideways so that the temperature probe, while affixed to the E-field probe is placed at the previous location of the E-field probe. Finally, temperature changes for 30 seconds exposure at the same RF power levels used for the E-field measurement are recorded. The following equation relates SAR to initial temperature slope:

$$SAR = C \frac{\Delta T}{\Delta t}$$

where:

$\Delta t$  = exposure time (30 seconds),

C = heat capacity of tissue (brain or muscle),

$\Delta T$  = temperature increase due to RF exposure.

The heat capacity used for brain simulated tissue is  $2.7 \text{ joules}^{\circ}\text{C}/\text{g}$  and  $3.0 \text{ joules}^{\circ}\text{C}/\text{g}$  for muscle.

SAR is proportional to  $T / t$ , the initial rate of tissue heating, before thermal diffusion takes place. Now, it’s possible to quantify the electric field in the simulated tissue by equating the thermally derived SAR to the E-field;

---

### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vhk.ultratech@sympatico.ca](mailto:vhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

**File #: ICOM-017-SAR**

**November 20, 2000**

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

$$SAR = \frac{|E|^2 \cdot \sigma}{\rho}$$

where:

$\sigma$  = Simulated tissue conductivity,

$\rho$  = Tissue density (1.25 g/cm<sup>3</sup> for simulated tissue)

## 5.7. DATA EXTRAPOLATION (CURVE FITTING)

There is a distance from the center of the sensor (diode) to the end of the protective tube called ‘probe offset’. To compensate we use an exponential curve fitting method to obtain the peak surface value from the voltages measured at the distance from the inner surface of the phantom. At the point where the highest voltage was recorded, the field is measured as close as possible to the phantom’s surface and every 1mm along the ‘Z’ axis for a distance of 50 mm. The appropriate exponential curve is obtained from all the points measured and used to define an exponential decay of the energy density versus depth.

$$E(z) = E_0 \cdot e^{-z/\delta} \text{ (mV)}$$

## 5.8. INTERPOLATION AND GRAM AVERAGING

The voltage, (1 cm) above the phantoms surface ( $E_{ot}$  1 cm), is needed to calculate the exposure over one gram of tissue. This SAR value that estimates the average over 1 gram of tissue, is obtained by taking the integral over 1 cm<sup>2</sup> surface of the measured field along the exponential decay curve of the energy density with depth.

$$SAR(mW/g) = \int_{v=1g} SAR(\bullet) dv = \int_{s=1cm^2} \int_0^{1cm} E(z) \cdot \frac{CF}{SensorFactor} dz ds$$

---

### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

**File #: ICOM-017-SAR**


**November 20, 2000**

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

### 5.9. POWER MEASUREMENT

When ever possible, a conducted power measurement is performed. To accomplish this, we utilize a fully charged battery, a calibrated power meter and a cable adapter provided by the manufacturer. The data of the cable and related circuit losses are also provided by the manufacturer. The power measurement is then performed across the operational band and the channel with the highest output power is recorded.

Power measurement is performed before and after the SAR to verify if the battery was delivering full power for the time of test. A difference in output power would determinate a need for battery replacement and repetition the SAR test.

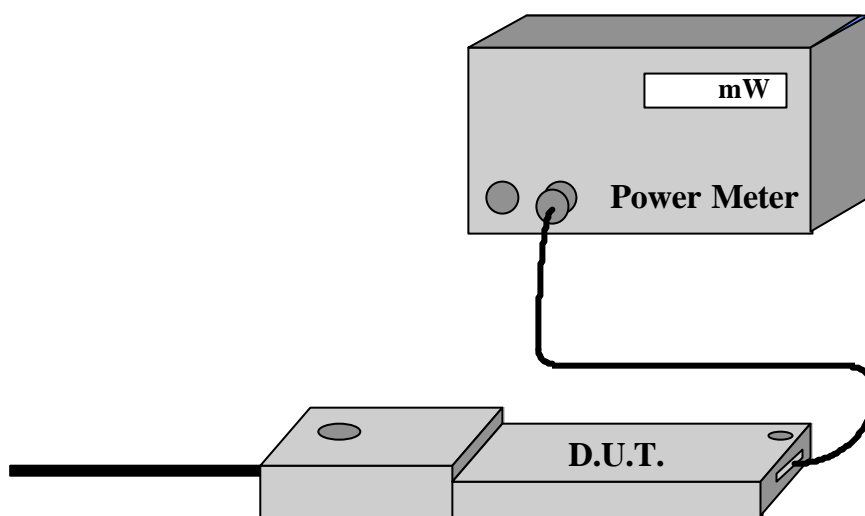

Measured Power Measured Power + Cable and Switching Mechanism Loss


### 5.10. POSITIONING OF D.U.T.

The clear fiberglass phantom shell have been previously marked with a highly visible line, so can easily be seen through the liquid simulated tissue. In the case of testing a cellular phone, this line is connecting the ear channel with the corner of the lips. The D.U.T. is then placed by centering the speaker with the ear channel and the center of the radio width with the corner of the mouth. At the same time the surface of the D.U.T. is always in contact with the phantoms shell. Three points contact; two in the ear region and one on the chin in addition to the previously describe alignment will assure repeatability of the test.


For HAND HELD devices (push-to-talk), or any other type of wireless transmitters, the D.U.T. will be positioned as suggested by manufacturer operational manuals .

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA )
- *All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)*

## Positioning of the D.U.T.

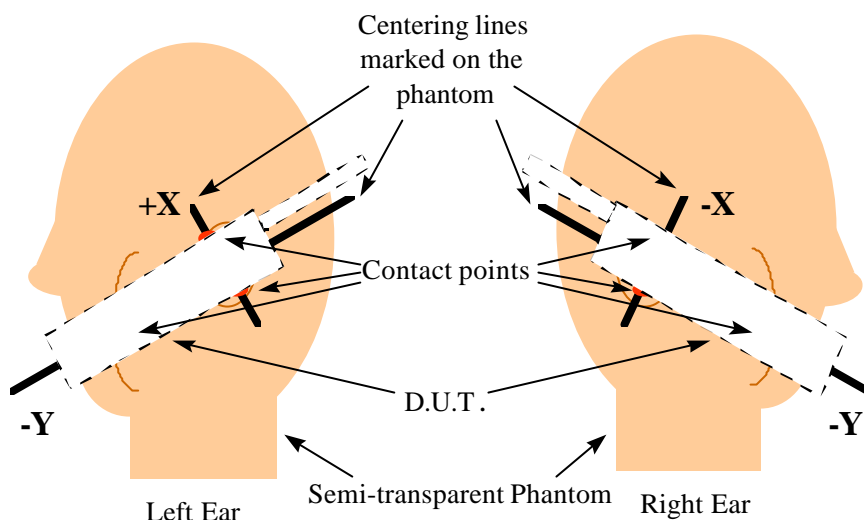

## Side View

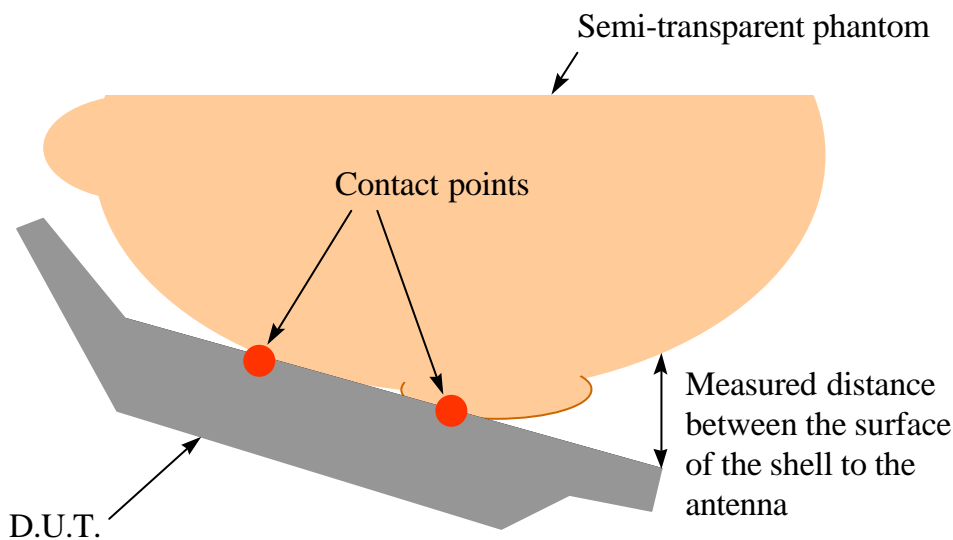

### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

**File #: ICOM-017-SAR**

**November 20, 2000**

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## 5.11. SAR MEASUREMENT UNCERTAINTY

This uncertainty analysis covers the 3D-EMC Laboratory test procedure for Specific Absorption Rate (SAR) associated with wireless telephones and similar devices.

### Standards Covered Are:

WGMTE 96/4 - Secretary SC211/B

FCC 96-326, ET Docket No. 93-62

Industry Canada RSS 102

ACA Radiocommunications (Electromagnetic Radiation – Human Exposure) Amendment Standard 2000 (No. 1)

The laboratory test procedure, and this uncertainty analysis, may be used to cover all standards above. It is based on test equipment and procedures specified by 3D-EMC Laboratories, Inc. located in Ft. Lauderdale, Florida.

### Measurement Uncertainty:

Table I. Estimated SAR Measurement Uncertainty

Contribution	Error (±dB)	Probability Distribution	Type Evaluation	Standard Uncertainty (±dB)
A. Field Measurement Errors:		Rectangular	Type B	
Isotropy in Phantom BTS Liquid	0.8			0.46
Frequency Response	0.2			0.12
Linearity	0.2			0.12
Probe Calibration Error (rss)	0.7			0.40
Duty Factor Variability	0.2			0.12
B. Spatial Peak SAR Errors:		Normal	Type A	
Extrapolation & Interpolation, and Position	0.2			0.20
Integration & Search Routine	0.1			0.10
Cube Shape	0.2			0.20
C. Additional Errors:		Rectangular	Type B	
Solution Variability (Worst-Case SAR)	0.21			0.12
D. Combined Standard Uncertainty, $u_c$ :		Normal	-	0.52
E. Expanded Uncertainty, $U$ :		Normal (k=2)	-	1.04
		95% Confidence	-	27.14%

### **ULTRATECH GROUP OF LABS**

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

**File #: ICOM-017-SAR**

**November 20, 2000**

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## ANNEX A: Waist SAR Measurement

450.05 MHz W	- 4.973(9.945) W/Kg
470.05 MHz W	- 3.994(7.988) W/Kg
489.95 MHz W	- 3.691(7.381) W/Kg
450.05 MHz N	- 5.417(10.833) W/Kg
470.05 MHz N	- 3.890(7.779) W/Kg
489.95 MHz N	- 3.583(7.165) W/Kg

\* The SAR Measurement inside the parenthesis indicates the reading before 50 % duty factor is applied for the half-duplex type PTT.

---

### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

**File #: ICOM-017-SAR**

**November 20, 2000**

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- *All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)*



Test Information

Date : 11/2/00  
Time : 9:36:04 AM

<u>Product</u>	: UHF Transceiver	<u>Test</u>	: SAR
<u>Manufacturer</u>	: ICOM Incorporated	<u>Frequency (MHz)</u>	: 450.05 W
<u>Model Number</u>	: IC-F40GT-2	<u>Nominal Output Power (W)</u>	: 4.0
<u>Serial Number</u>	: 0002	<u>Antenna Type</u>	: Monopole
<u>FCC ID Number</u>	: AFJ IC-F40G-2	<u>Signal</u>	: CW

<u>Phantom</u>	: Waist	<u>Dielectric Constant</u>	: 60.2
<u>Simulated Tissue</u>	: Muscle	<u>Conductivity</u>	: 0.82

<u>Probe</u>	: ETR_225_1_999	<u>Antenna Position</u>	: FIX
<u>Probe Offset (mm)</u>	: 2.250	<u>Measured Power (W)</u>	: 4.0
<u>Sensor Factor (mV)</u>	: 10.8	(conducted)	
<u>Conversion Factor</u>	: 0.452	<u>Cable Insertion Loss (dB)</u>	: 0.1
<u>Calibrated Date</u>	: 10/8/99	<u>Compensated Power (W)</u>	: 4.093

Amplifier Setting :

Channel 1 : 0.0070	Channel 2 : 0.0067	Channel 3 : 0.0081
--------------------	--------------------	--------------------



Location of Maximum Field :



X = -10                      Y = 20


Measured Values (mV) :


278.441	254.119	229.869	214.226	202.104	191.431
180.984	172.326	156.053	155.146	147.890	


<u>Peak Voltage (mV)</u>	: 290.076	<u>1 Cm Voltage (mV)</u>	: 170.434	<u>SAR (W/Kg)</u>	: 9.945
--------------------------	-----------	--------------------------	-----------	-------------------	---------

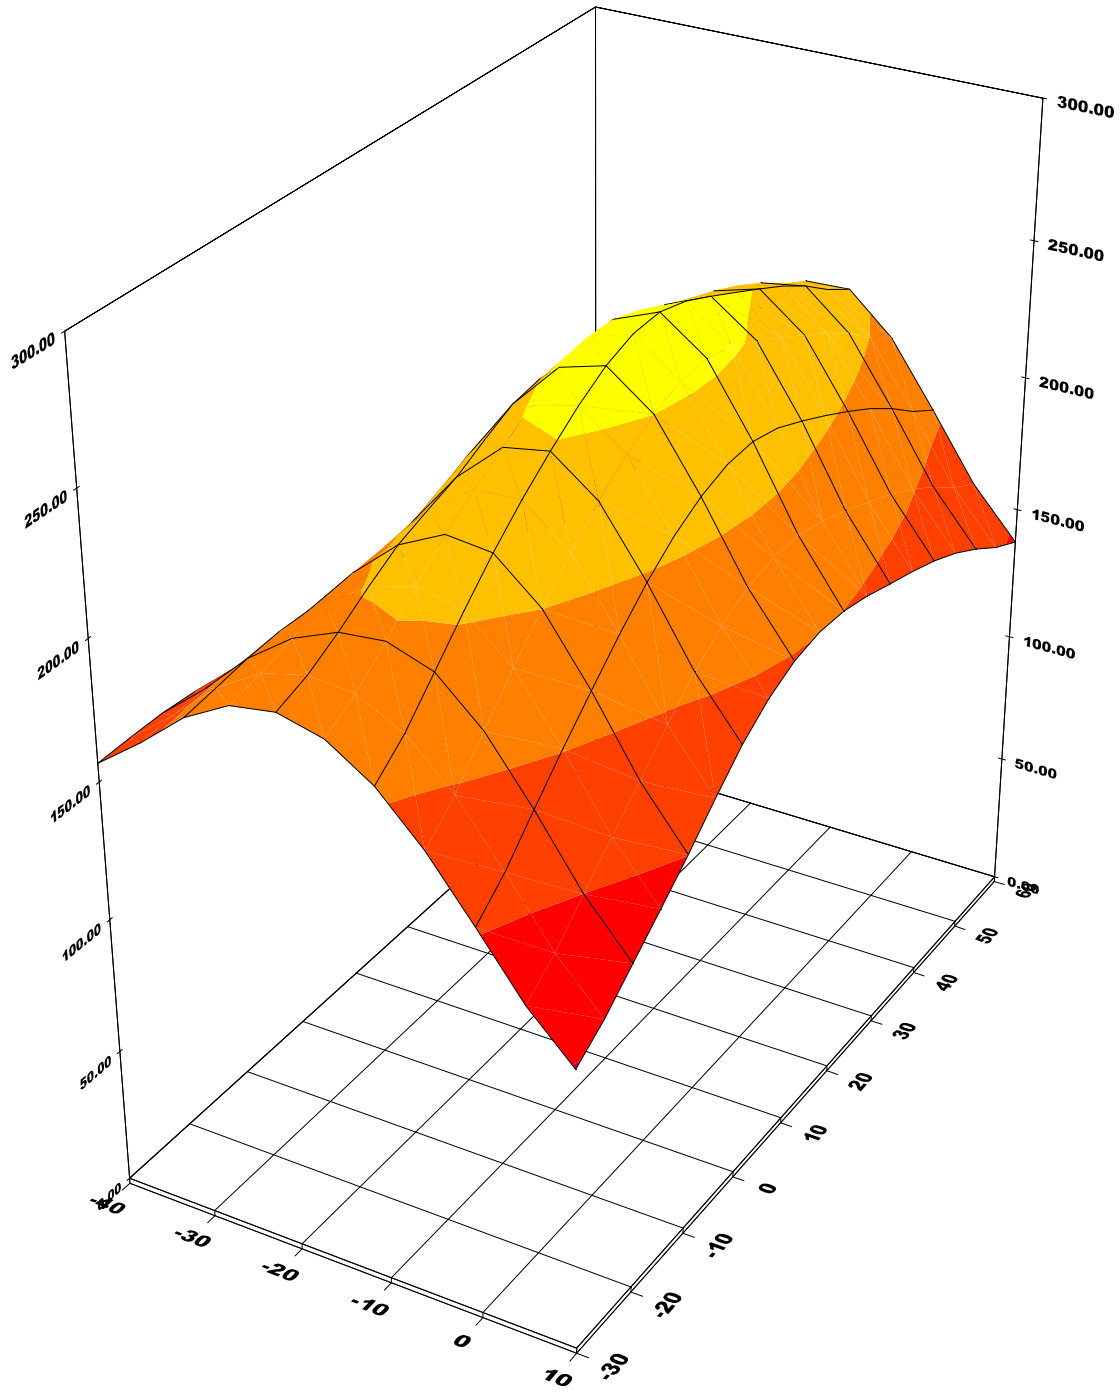


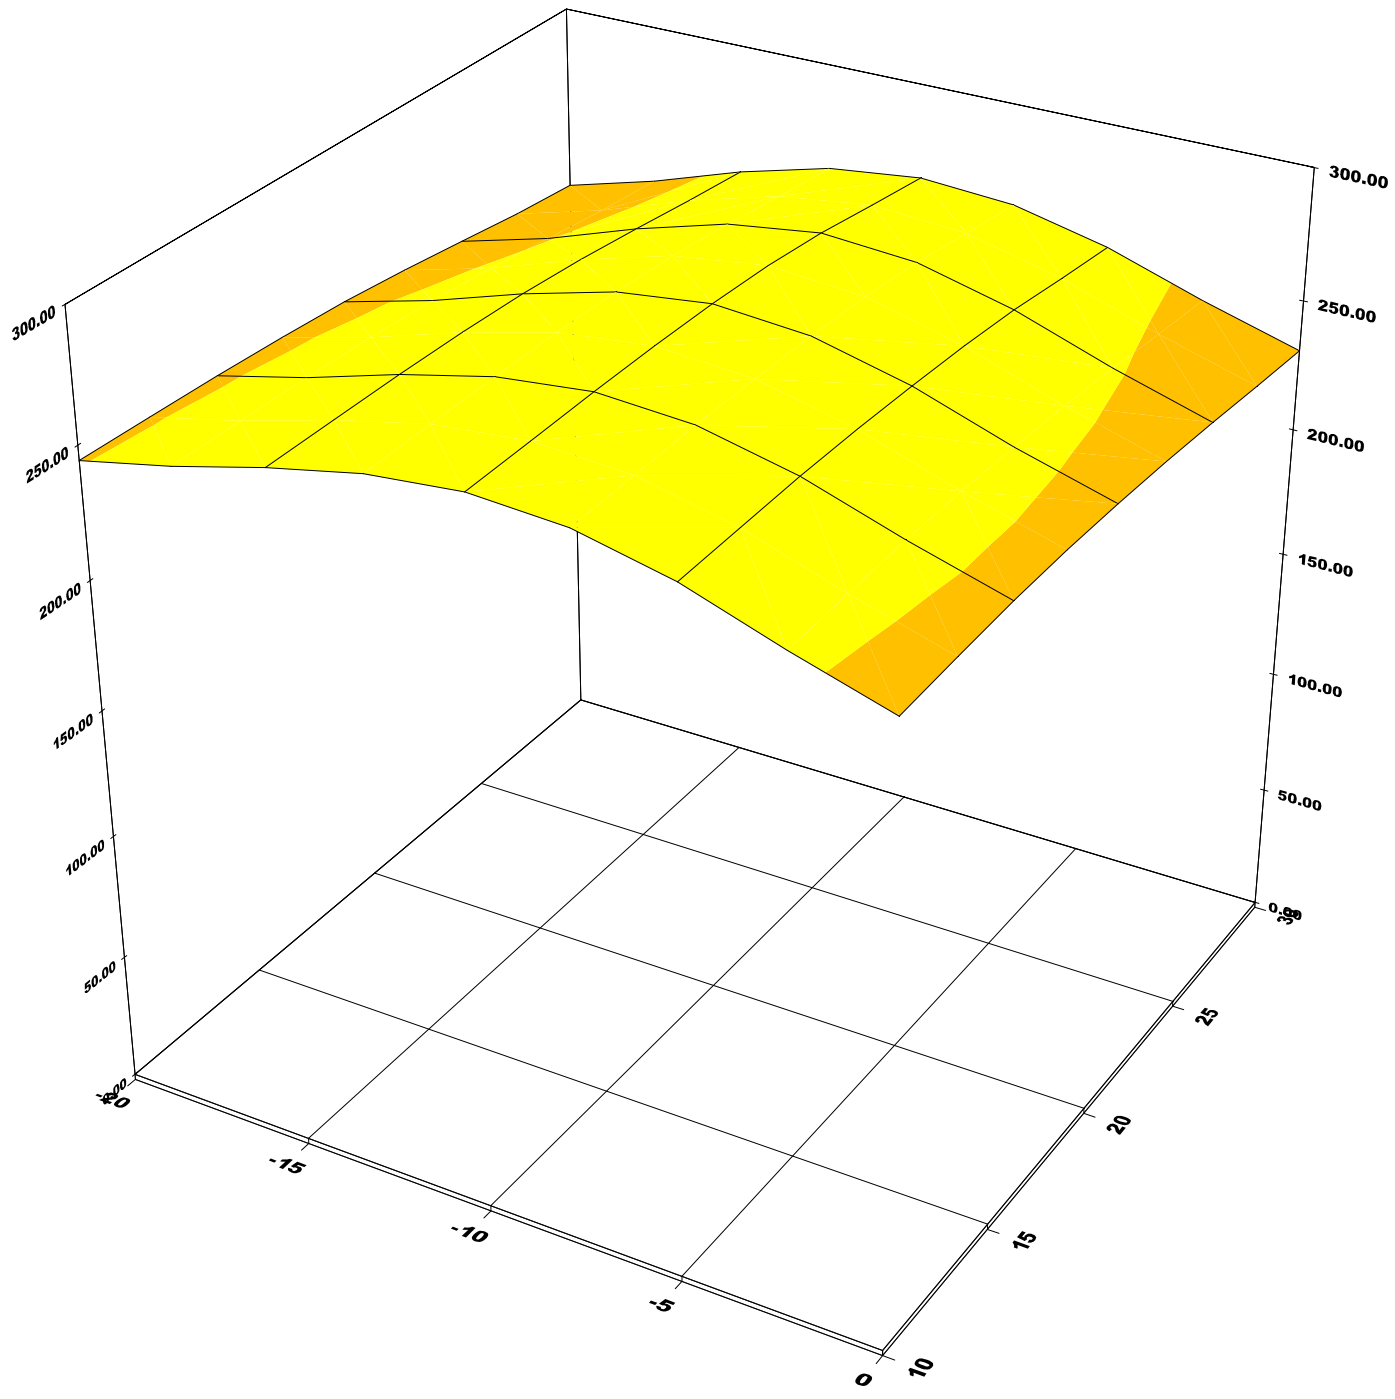

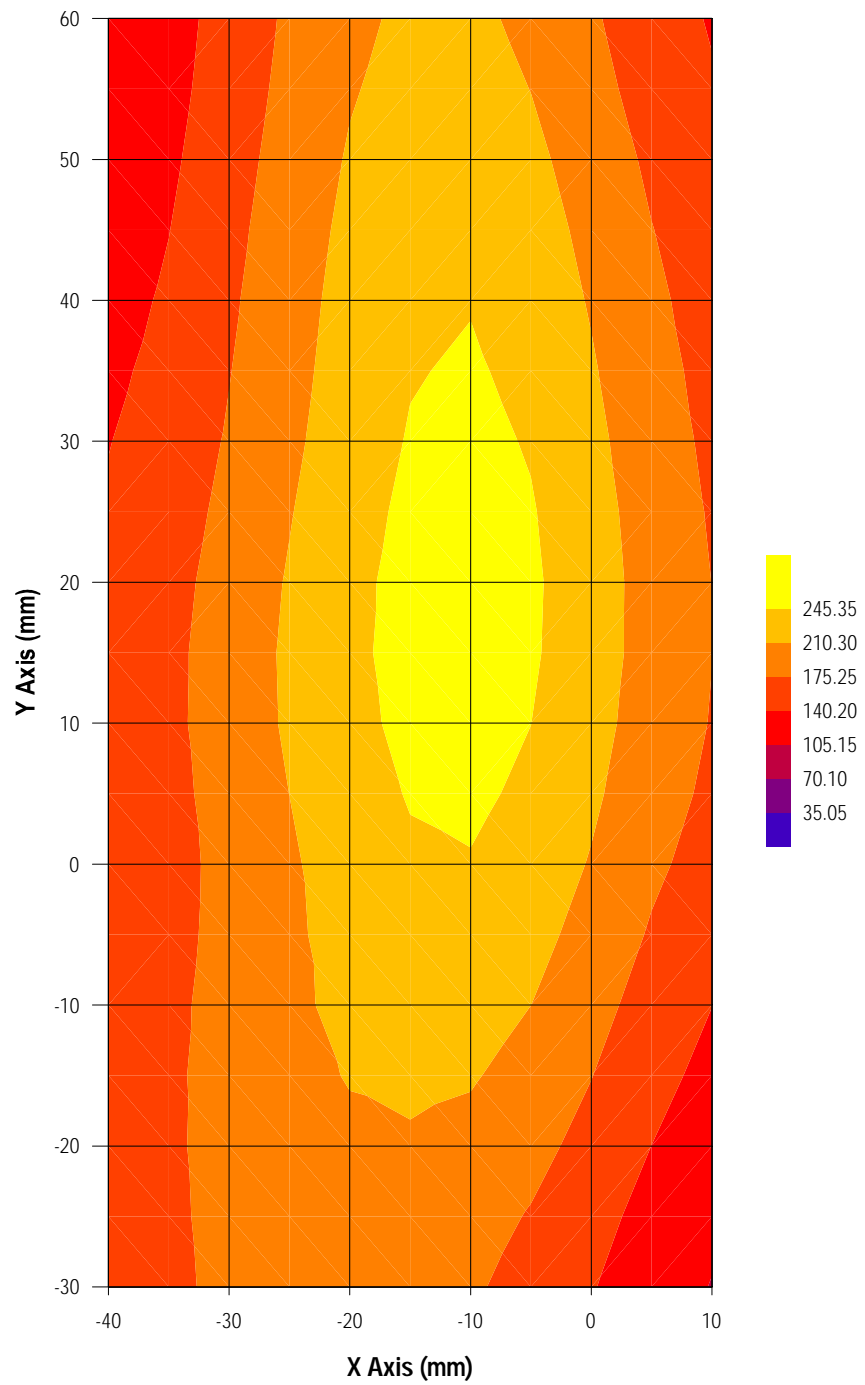

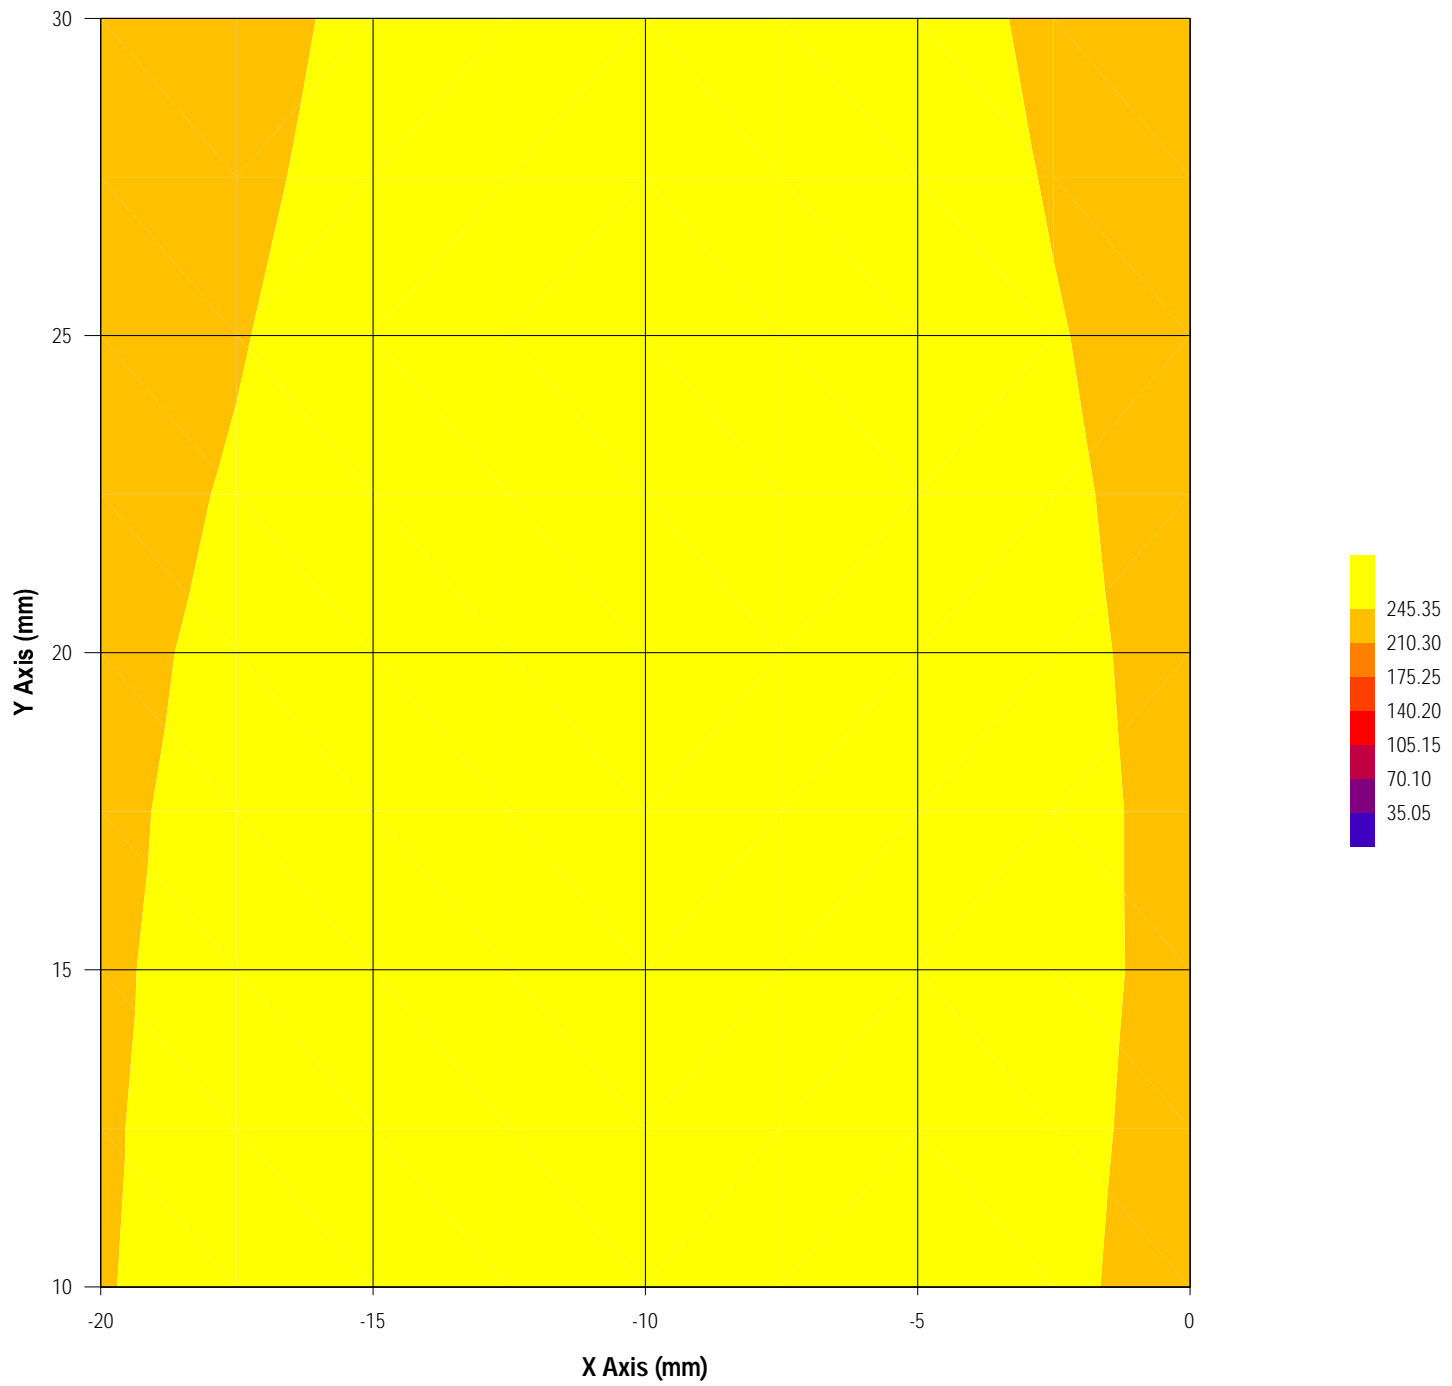

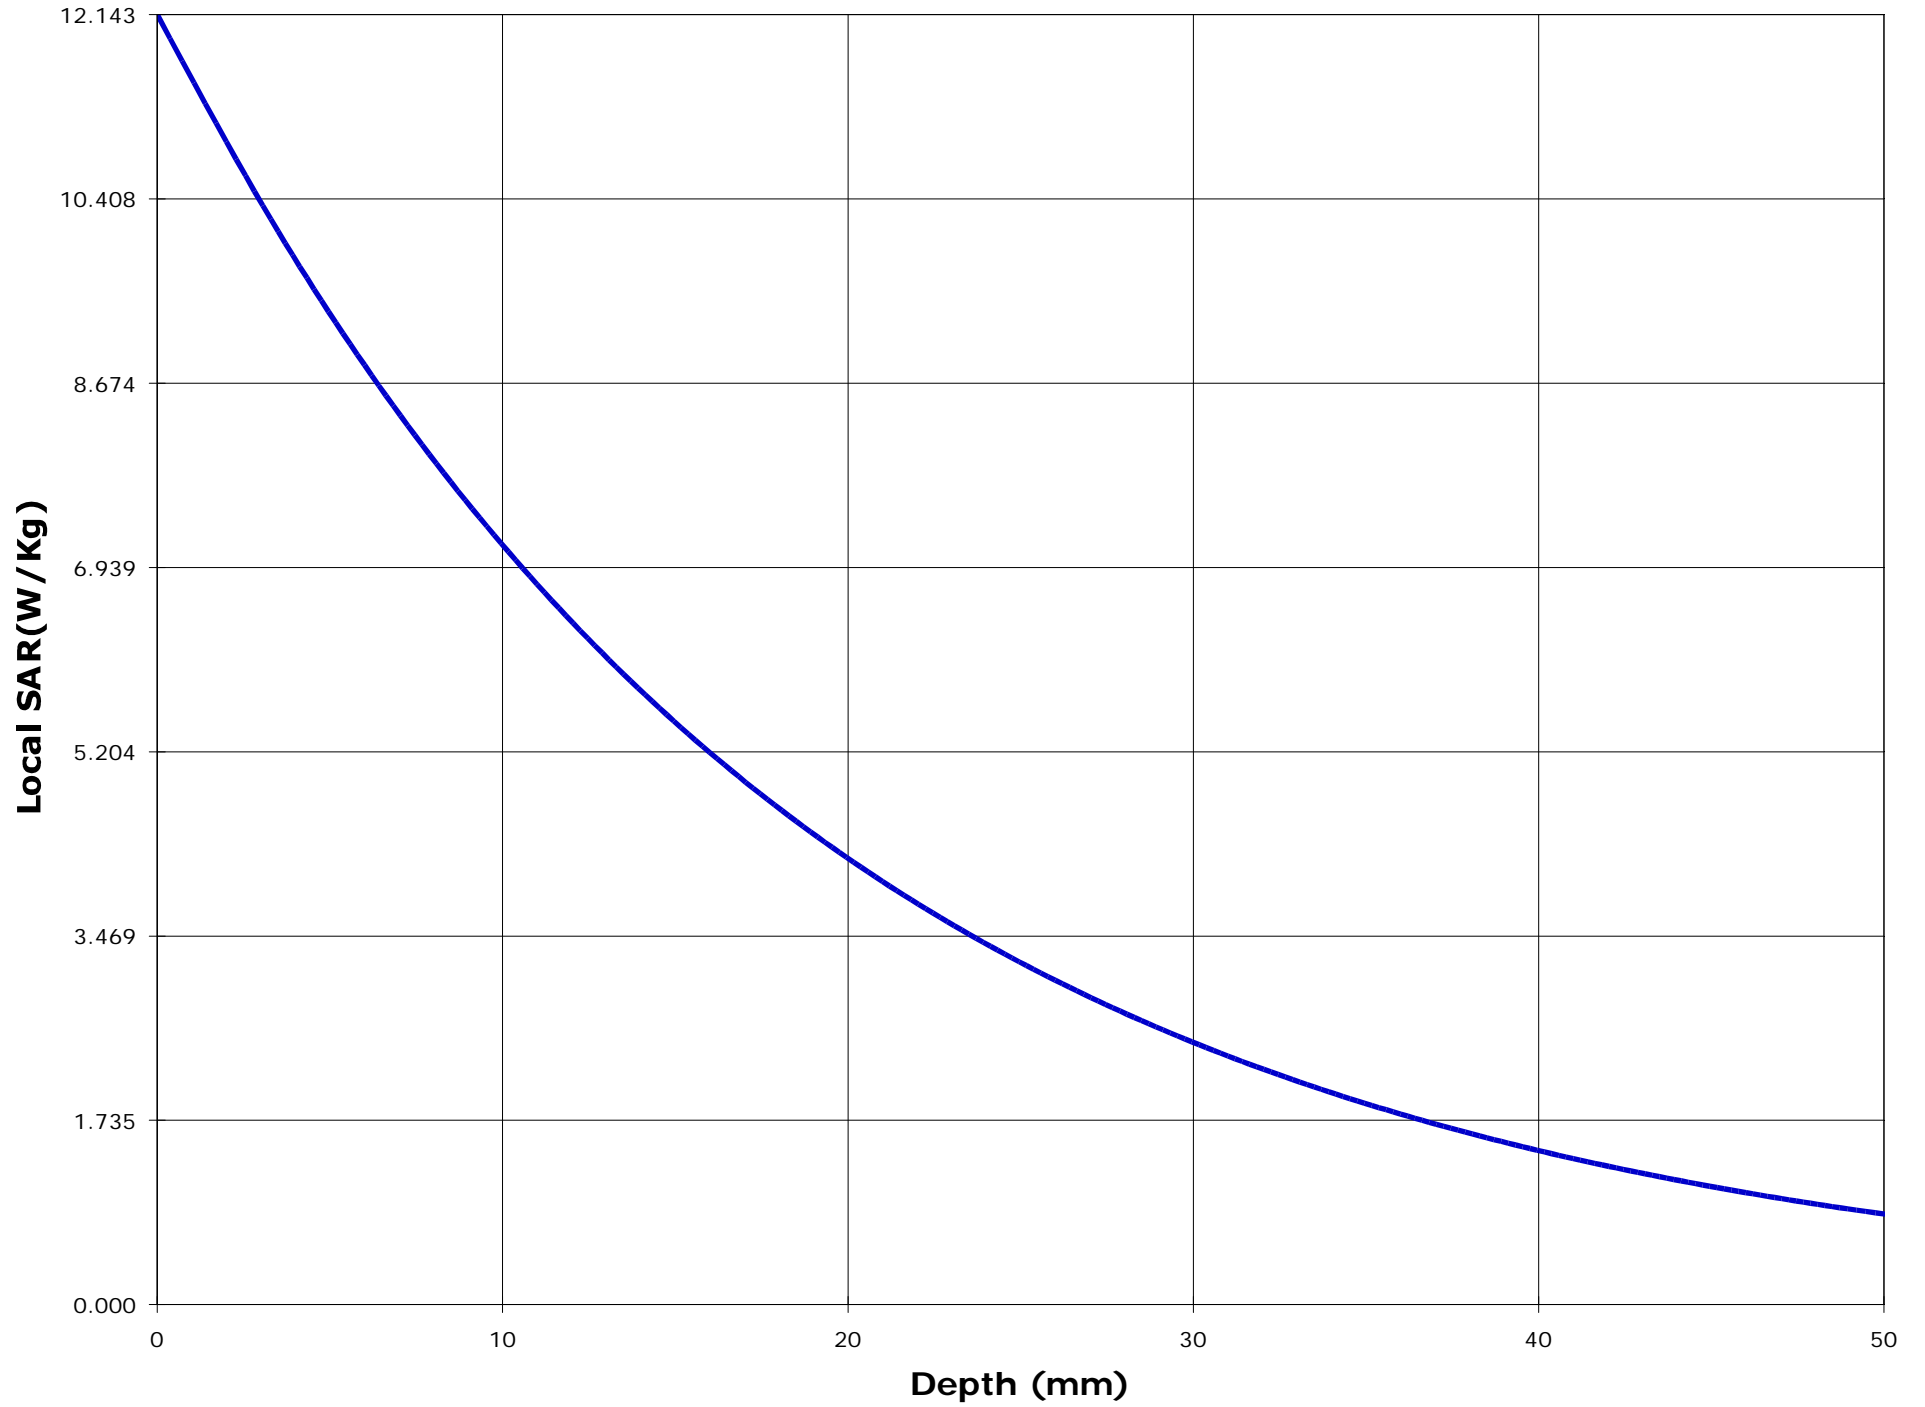

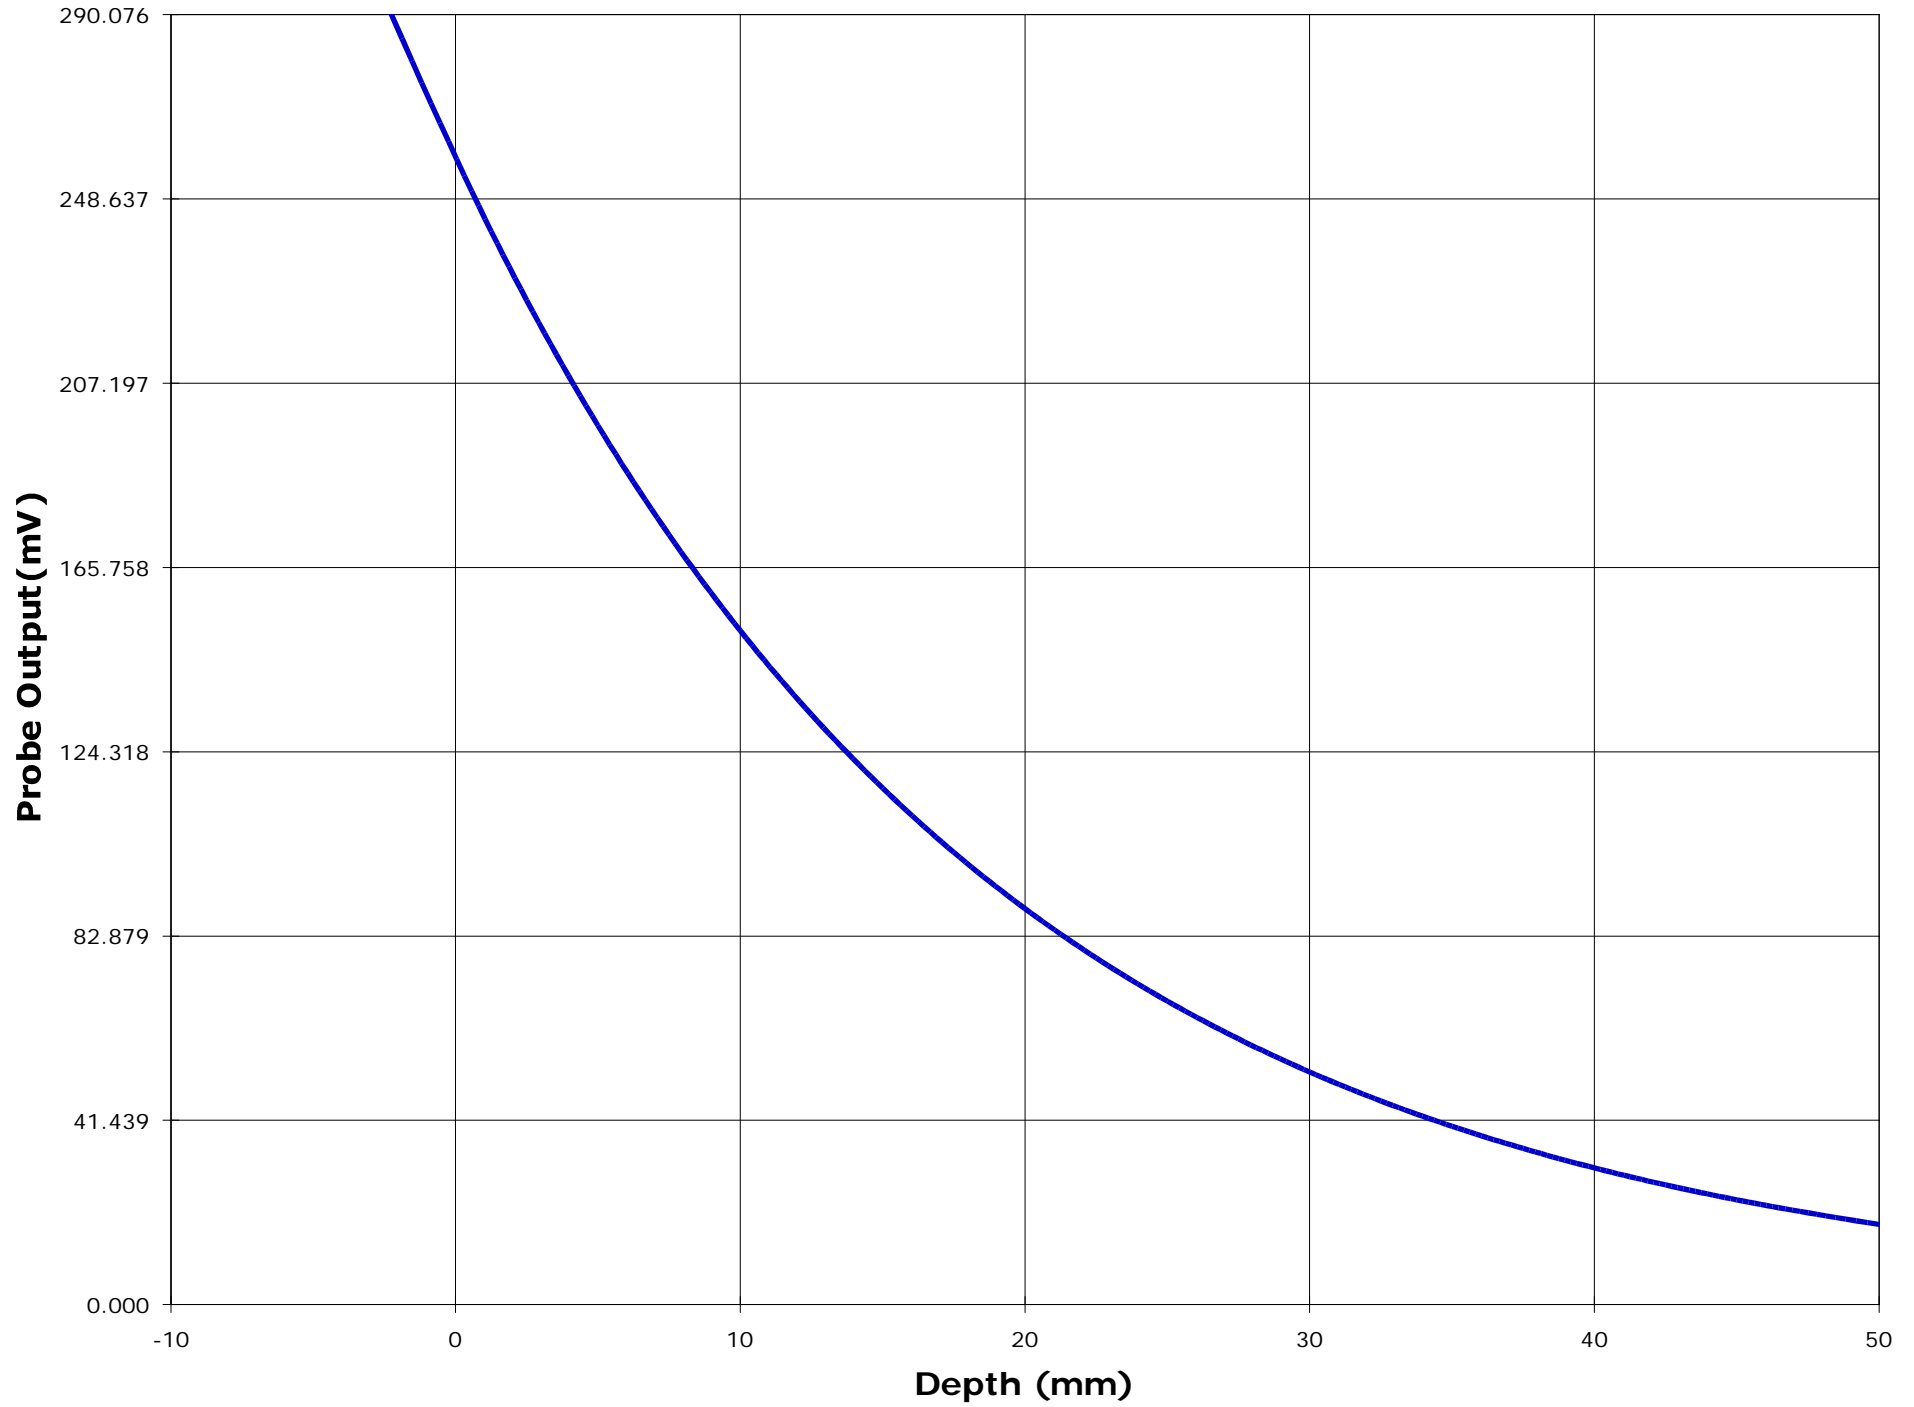

Test Information

Date : 11/2/00  
Time : 10:16:56 AM

<u>Product</u>	: UHF Transceiver	<u>Test</u>	: SAR
<u>Manufacturer</u>	: ICOM Incorporated	<u>Frequency (MHz)</u>	: 470.05 W
<u>Model Number</u>	: IC-F40GT-2	<u>Nominal Output Power (W)</u>	: 4.0
<u>Serial Number</u>	: 0002	<u>Antenna Type</u>	: Monopole
<u>FCC ID Number</u>	: AFJ IC-F40G-2	<u>Signal</u>	: CW

<u>Phantom</u>	: Waist	<u>Dielectric Constant</u>	: 60.2
<u>Simulated Tissue</u>	: Muscle	<u>Conductivity</u>	: 0.82

<u>Probe</u>	: ETR_225_1_999	<u>Antenna Position</u>	: FIX
<u>Probe Offset (mm)</u>	: 2.250	<u>Measured Power (W)</u>	: 3.89
<u>Sensor Factor (mV)</u>	: 10.8	(conducted)	
<u>Conversion Factor</u>	: 0.452	<u>Cable Insertion Loss (dB)</u>	: 0.1
<u>Calibrated Date</u>	: 10/8/99	<u>Compensated Power (W)</u>	: 3.981

Amplifier Setting :

Channel 1 : 0.0070	Channel 2 : 0.0067	Channel 3 : 0.0081
--------------------	--------------------	--------------------

Location of Maximum Field :



X = -10                      Y = 20



Measured Values (mV) :


224.145	201.471	182.275	169.894	159.657	150.957
142.930	135.456	128.539	122.038	115.905	


<u>Peak Voltage (mV)</u>	: 233.520	<u>1 Cm Voltage (mV)</u>	: 134.697	<u>SAR (W/Kg)</u>	: 7.988
--------------------------	-----------	--------------------------	-----------	-------------------	---------




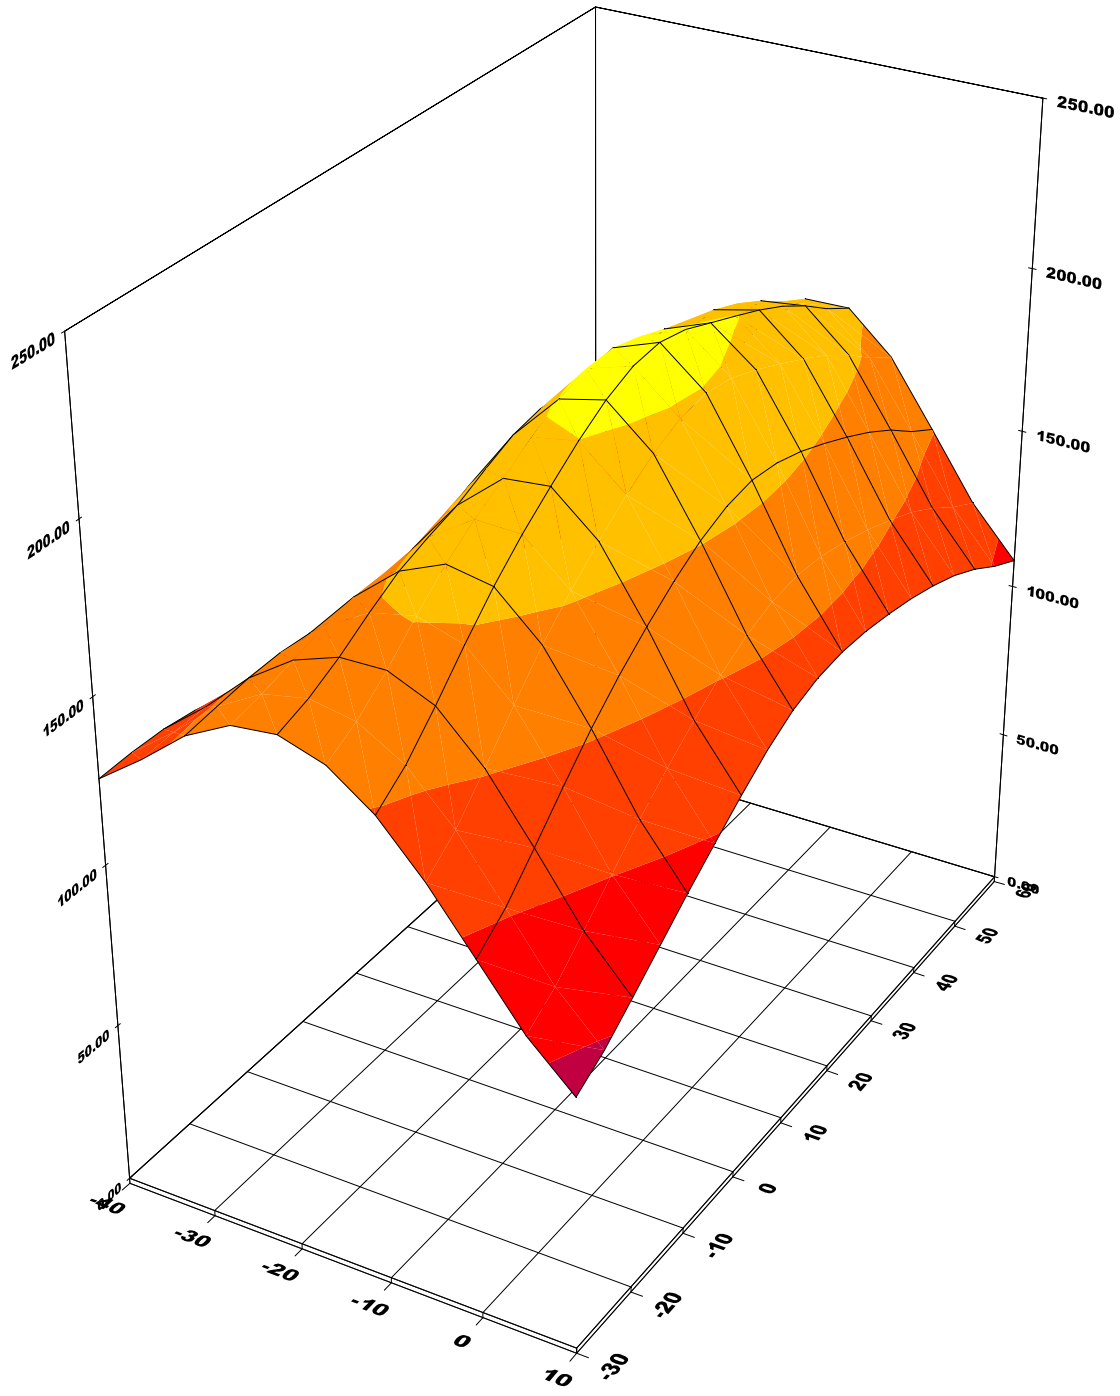


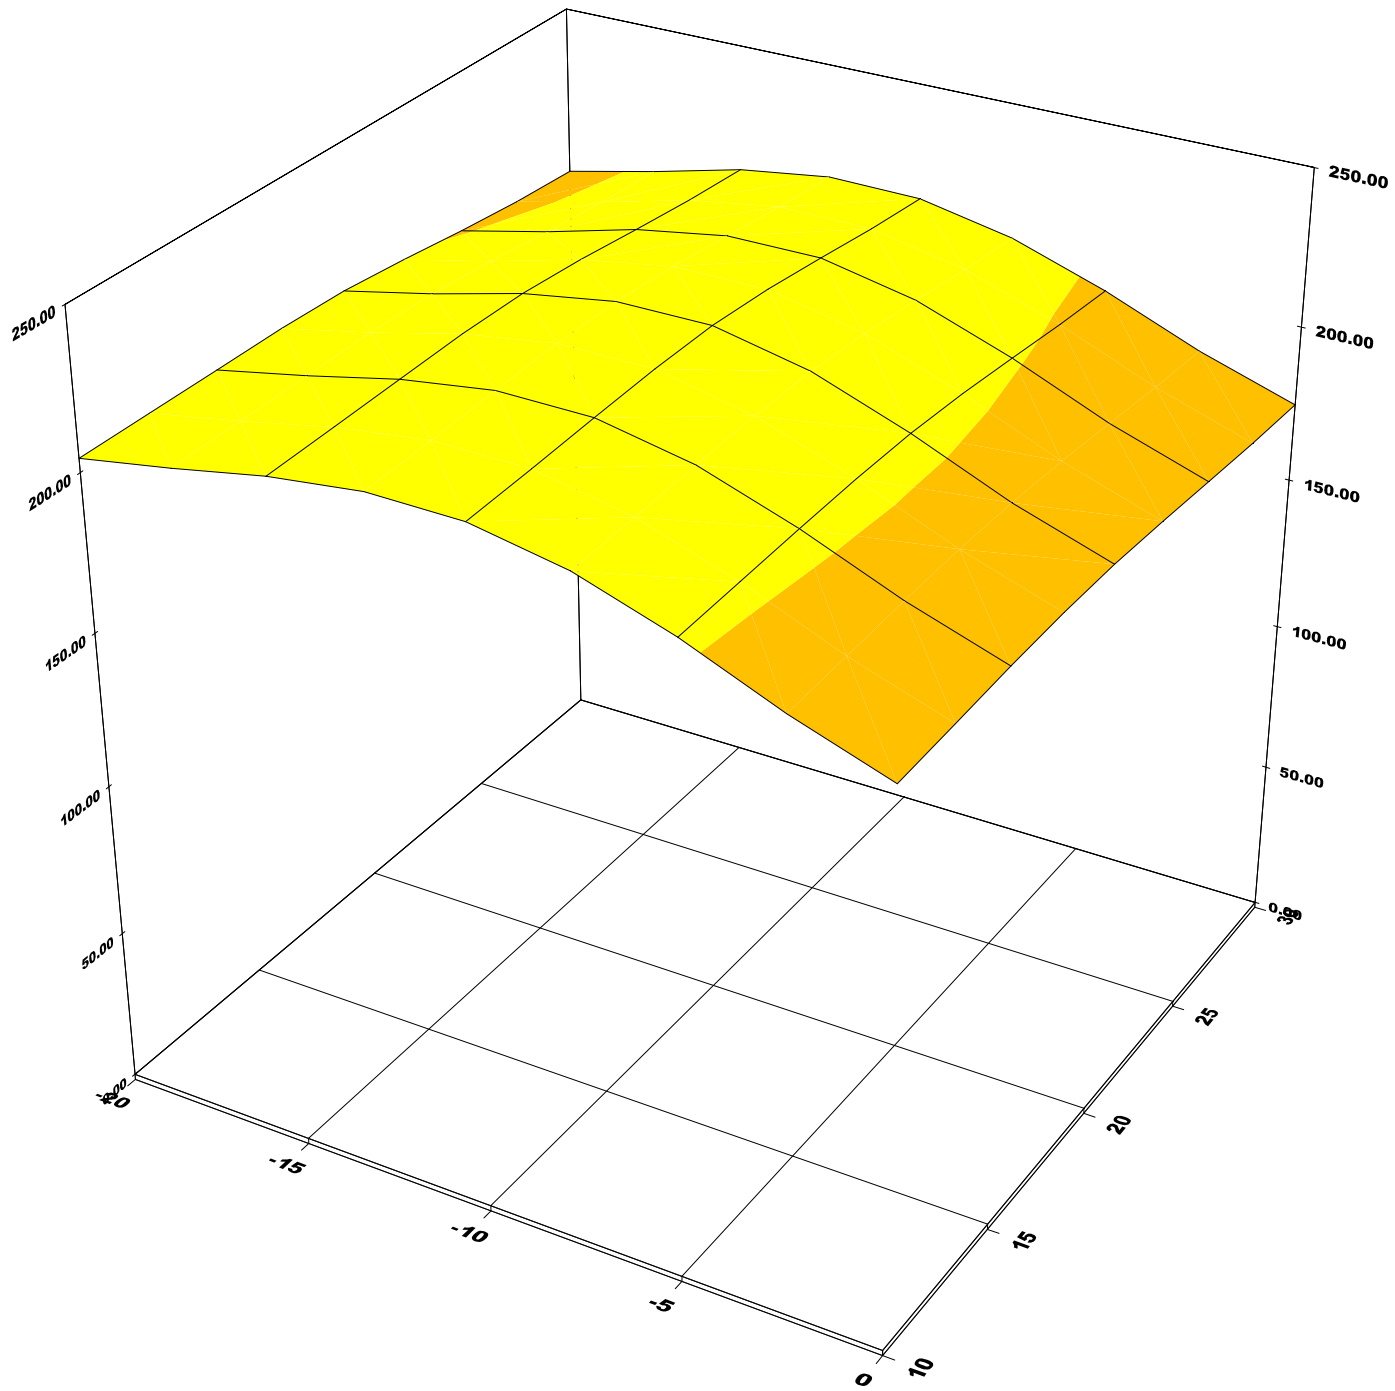

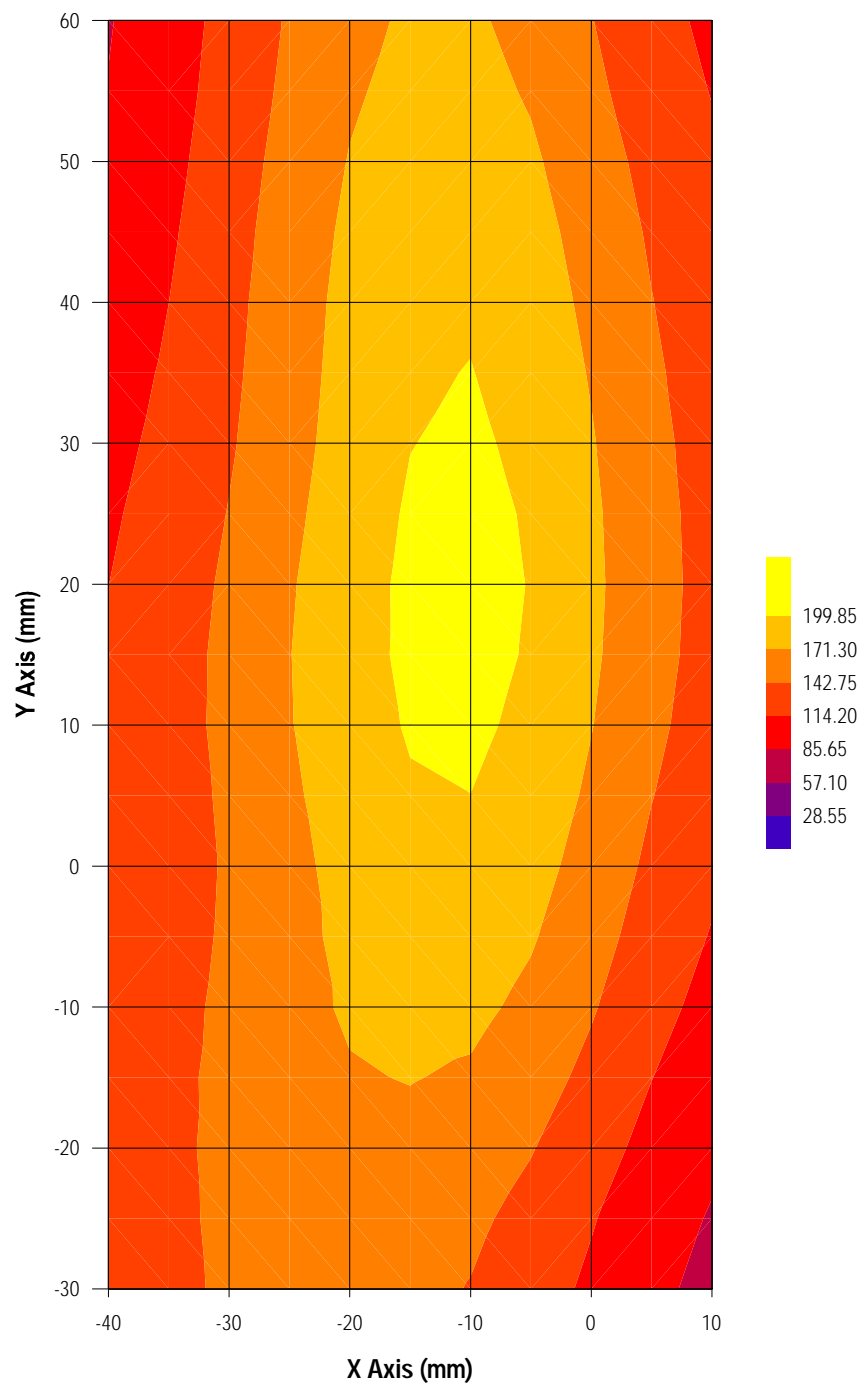

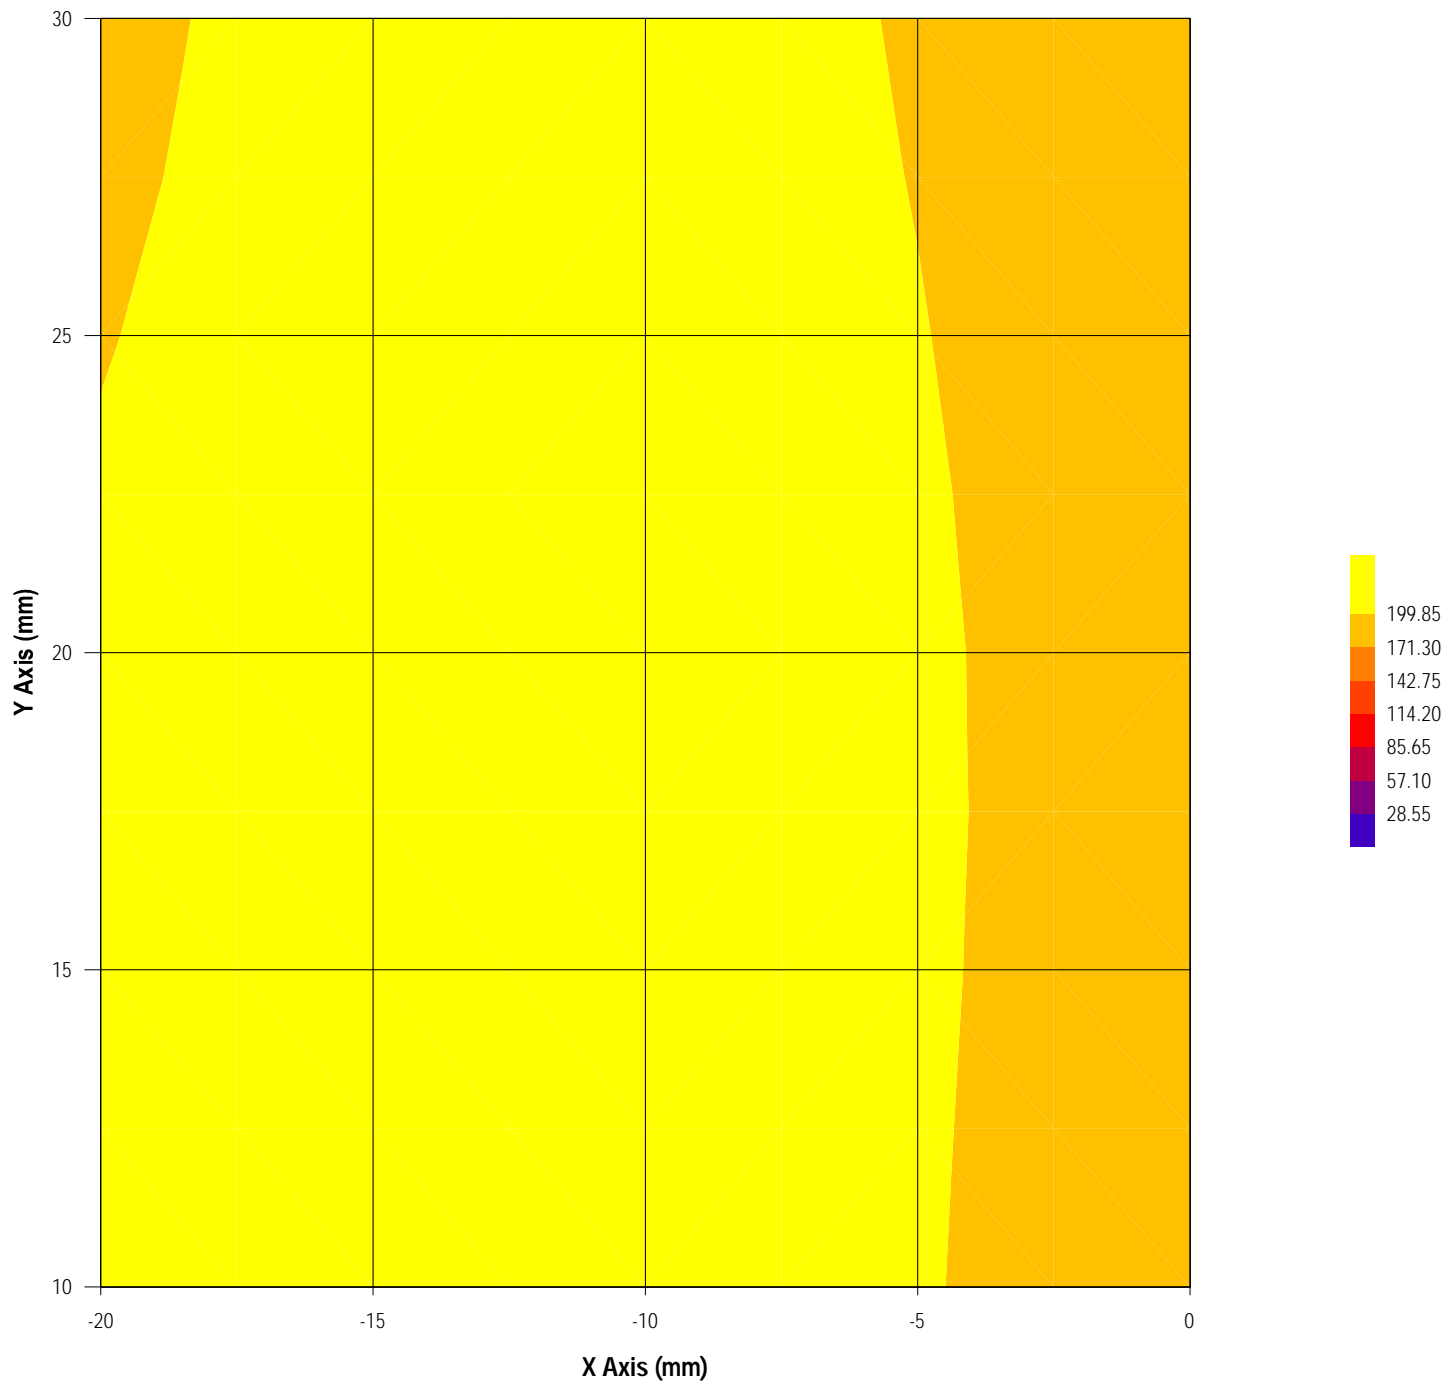

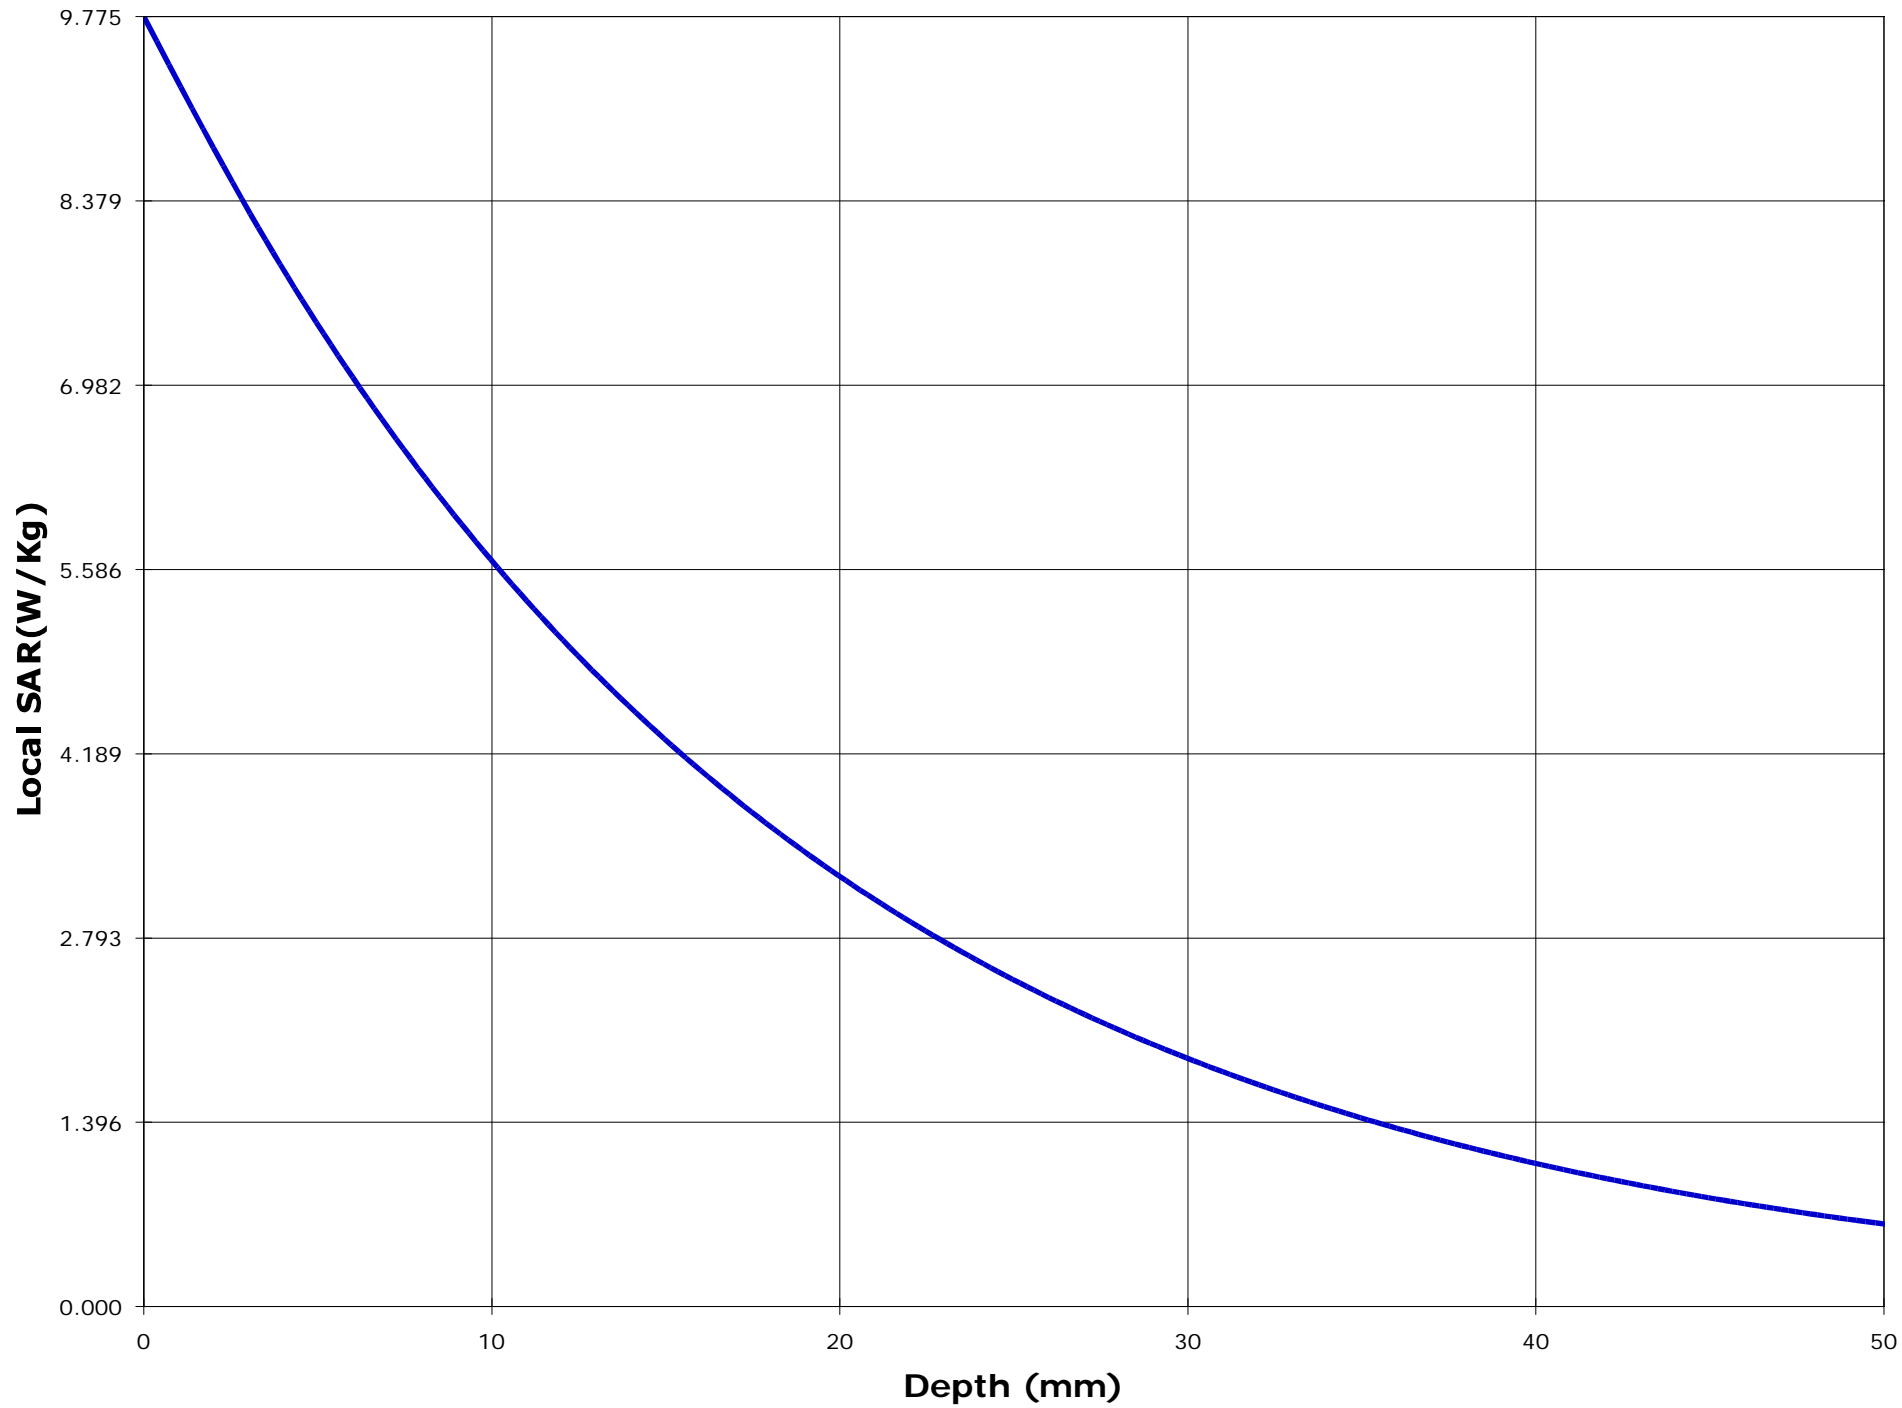

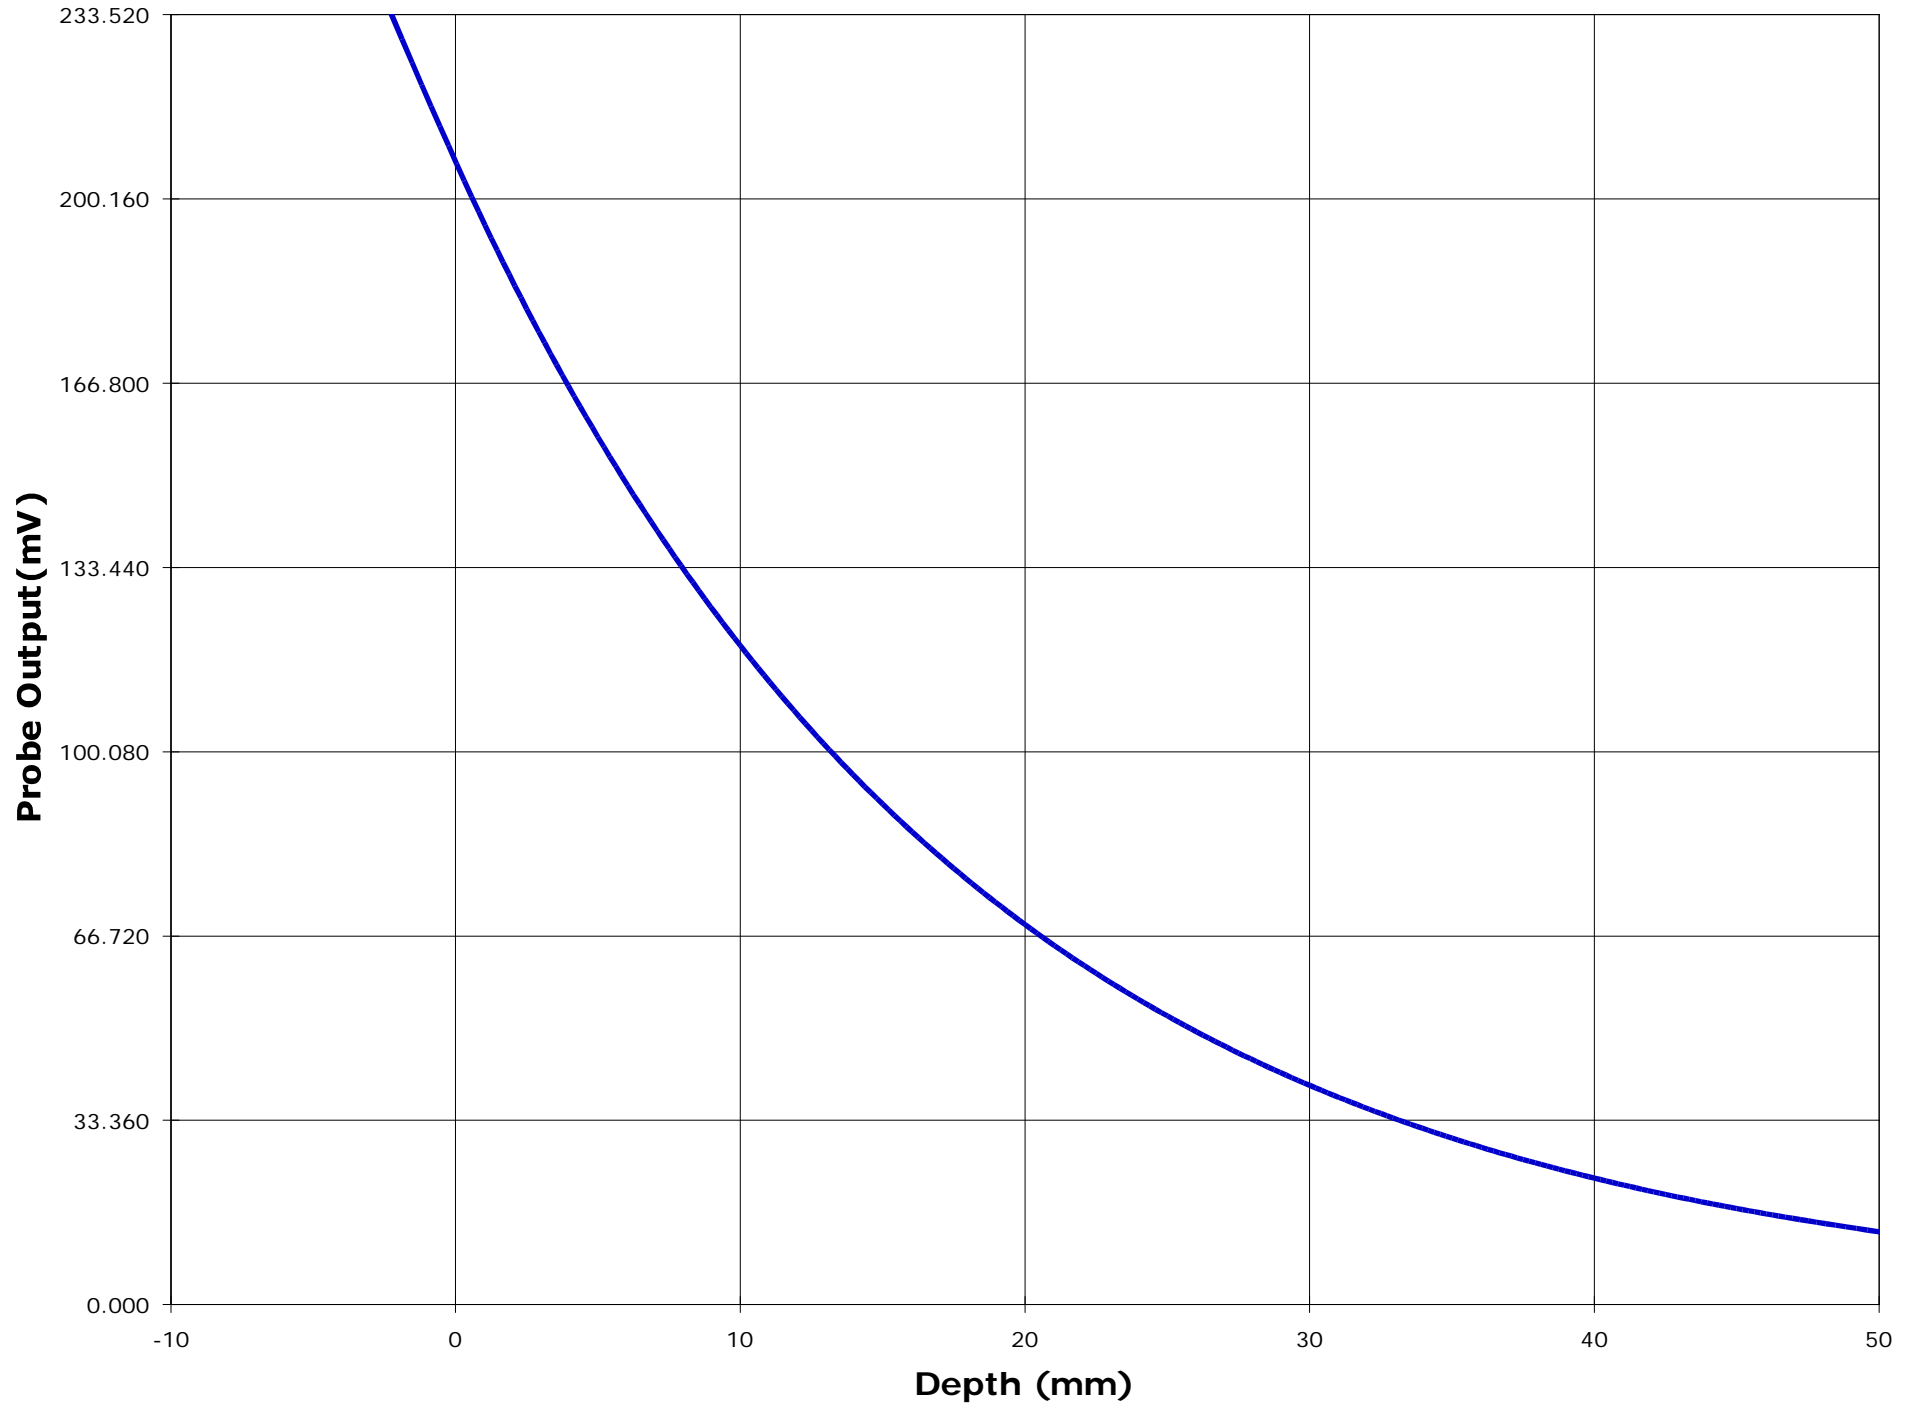

Test Information

Date : 11/2/00  
Time : 11:18:42 AM

<u>Product</u>	: UHF Transceiver	<u>Test</u>	: SAR
<u>Manufacturer</u>	: ICOM Incorporated	<u>Frequency (MHz)</u>	: 489.95 W
<u>Model Number</u>	: IC-F40GT-2	<u>Nominal Output Power (W)</u>	: 4.0
<u>Serial Number</u>	: 0002	<u>Antenna Type</u>	: Monopole
<u>FCC ID Number</u>	: AFJ IC-F40G-2	<u>Signal</u>	: CW

<u>Phantom</u>	: Waist	<u>Dielectric Constant</u>	: 60.2
<u>Simulated Tissue</u>	: Muscle	<u>Conductivity</u>	: 0.82

<u>Probe</u>	: ETR_225_1_999	<u>Antenna Position</u>	: FIX
<u>Probe Offset (mm)</u>	: 2.250	<u>Measured Power (W)</u>	: 4.2
<u>Sensor Factor (mV)</u>	: 10.8	(conducted)	
<u>Conversion Factor</u>	: 0.452	<u>Cable Insertion Loss (dB)</u>	: 0.1
<u>Calibrated Date</u>	: 10/8/99	<u>Compensated Power (W)</u>	: 4.298

Amplifier Setting :

Channel 1 : 0.0070	Channel 2 : 0.0067	Channel 3 : 0.0081
--------------------	--------------------	--------------------



Location of Maximum Field :

X = -10                      Y = 20



Measured Values (mV) :


210.498	188.679	170.332	159.023	149.053	140.741
133.307	125.981	119.485	113.263	107.526	


Peak Voltage (mV) : 220.405      1 Cm Voltage (mV) : 124.967      SAR (W/Kg) : 7.381

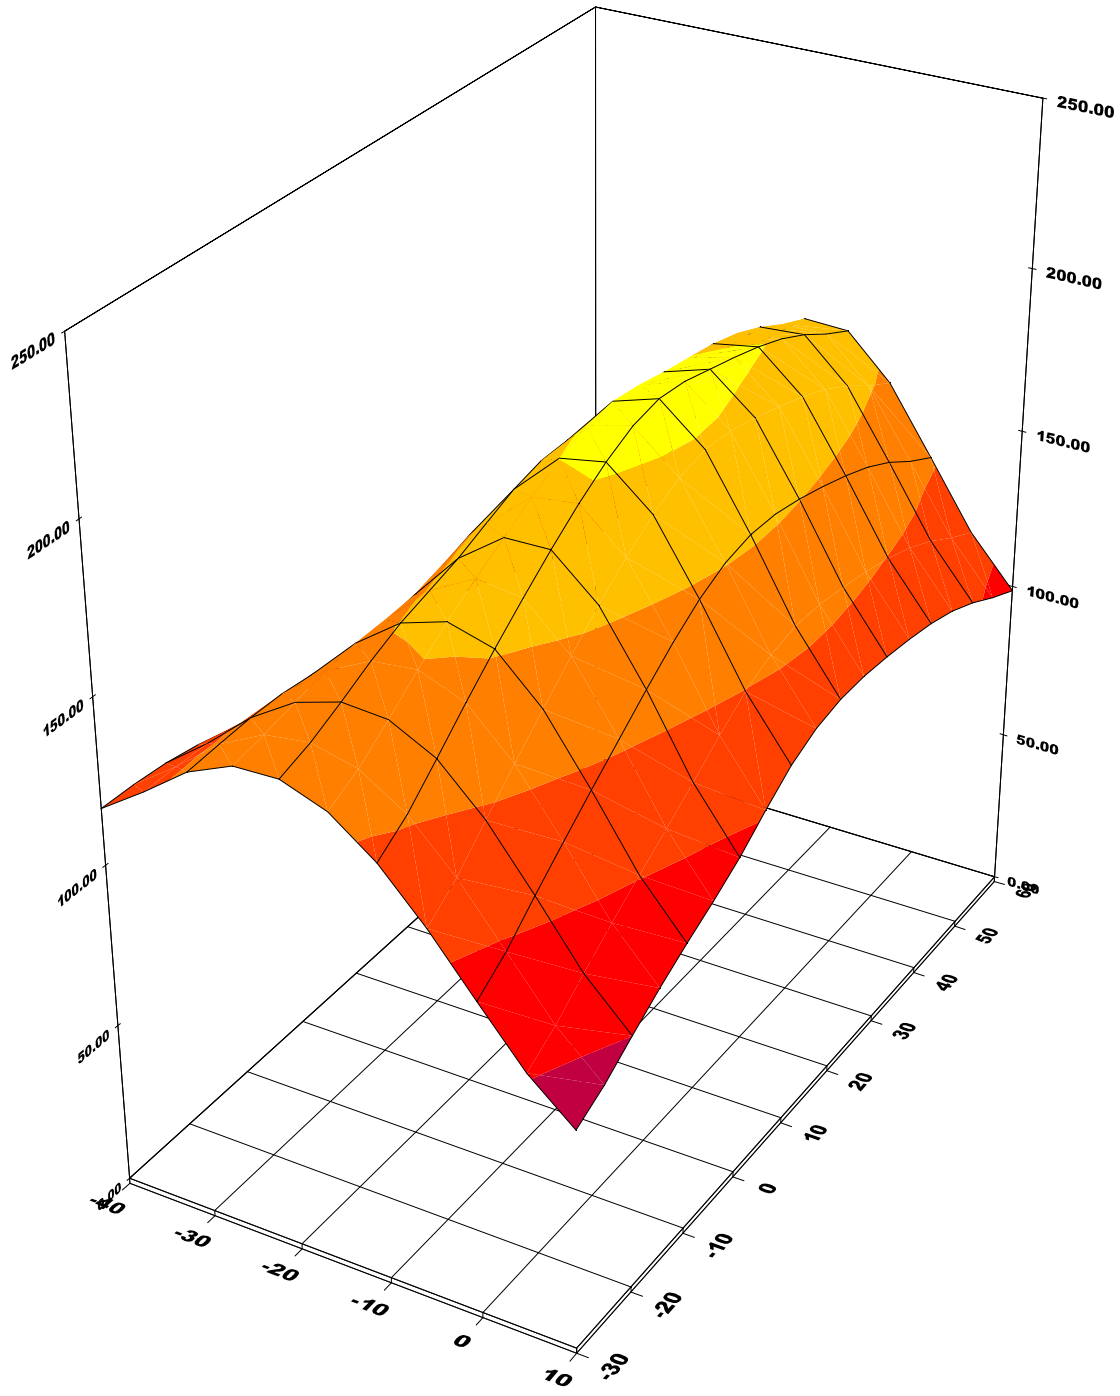





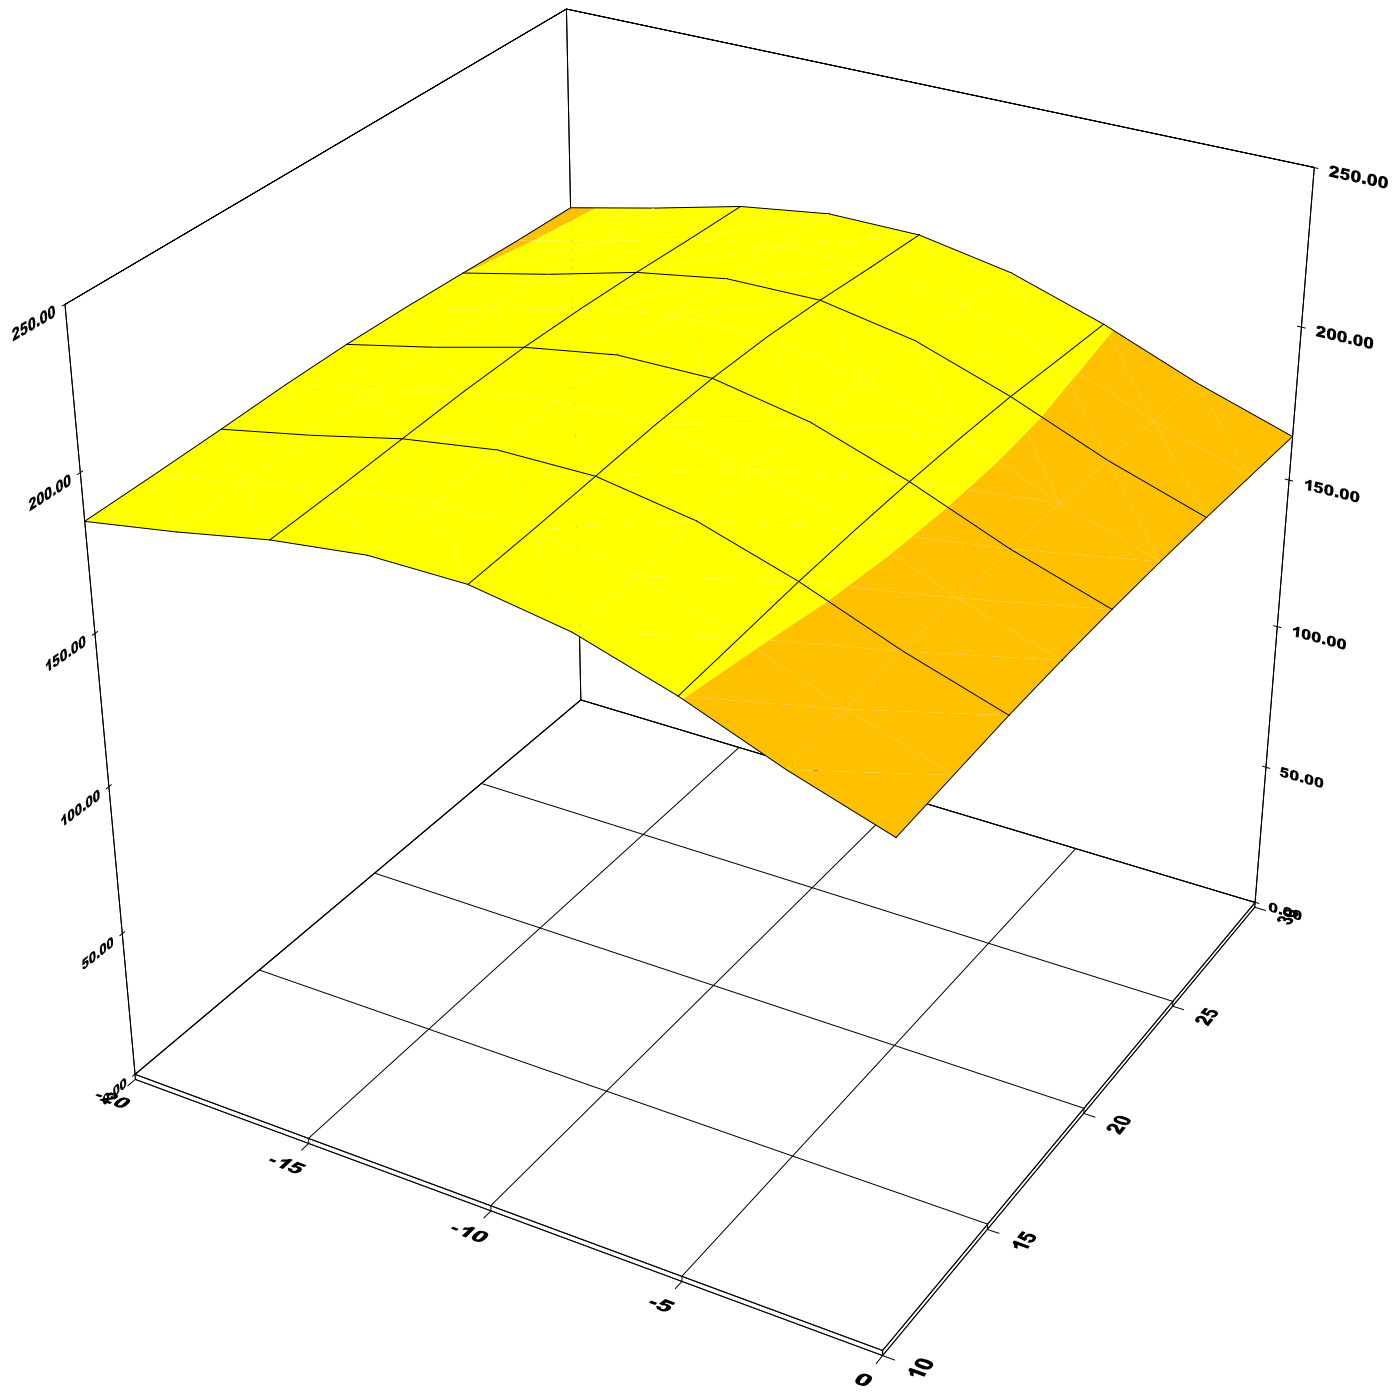

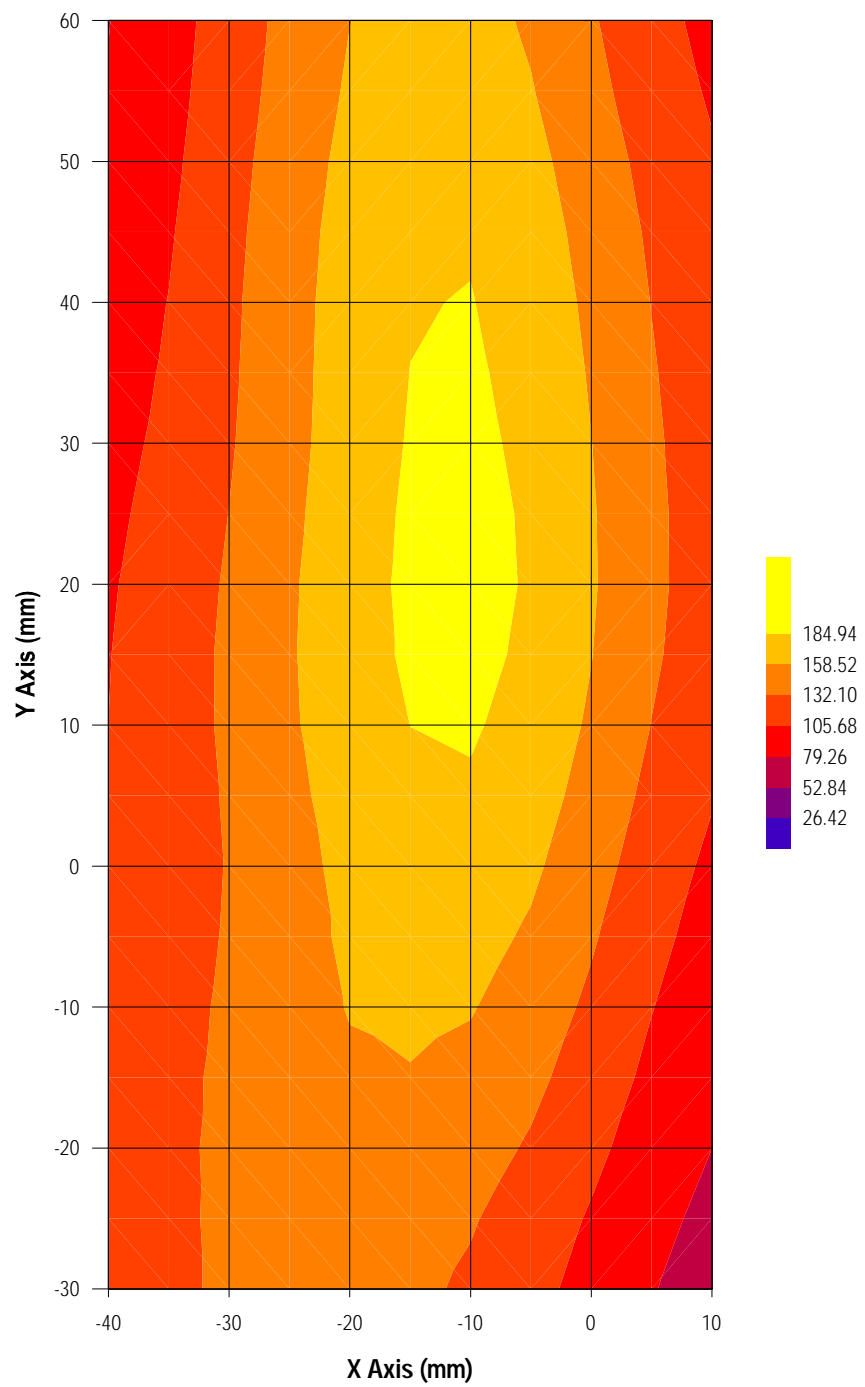

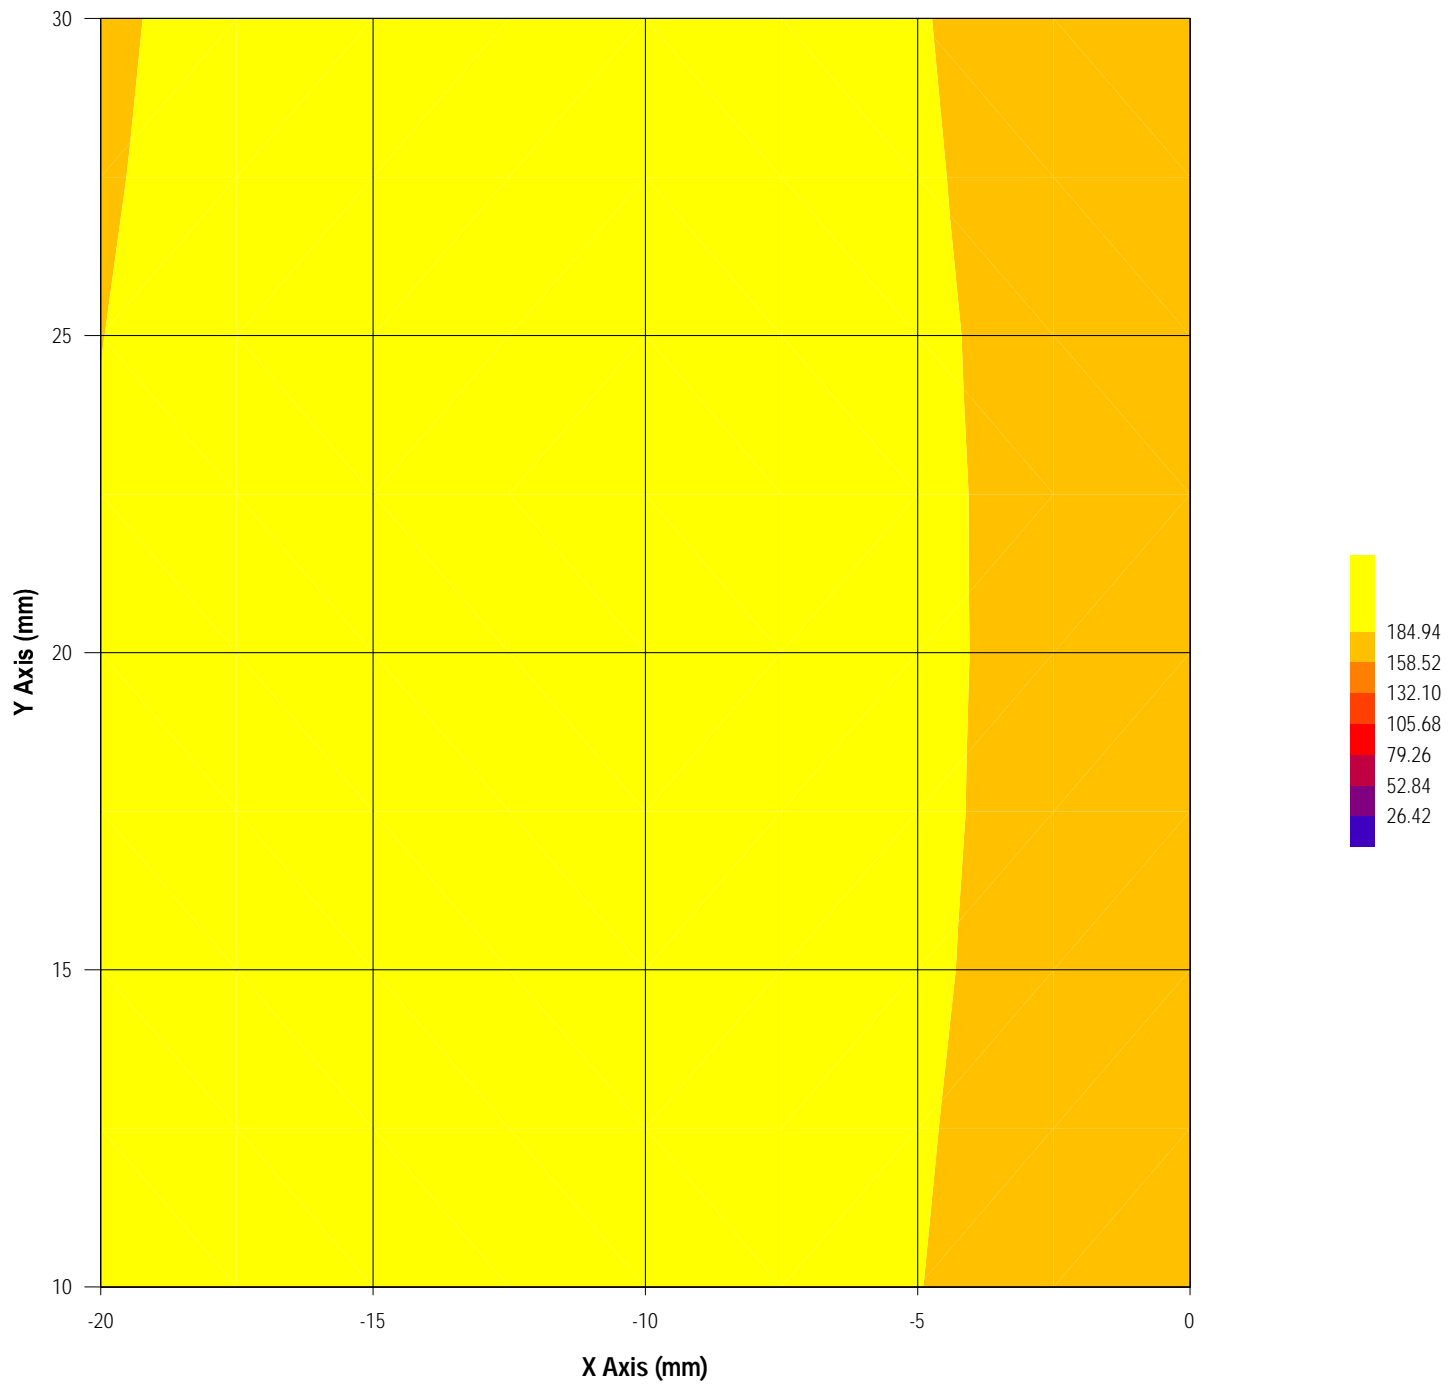

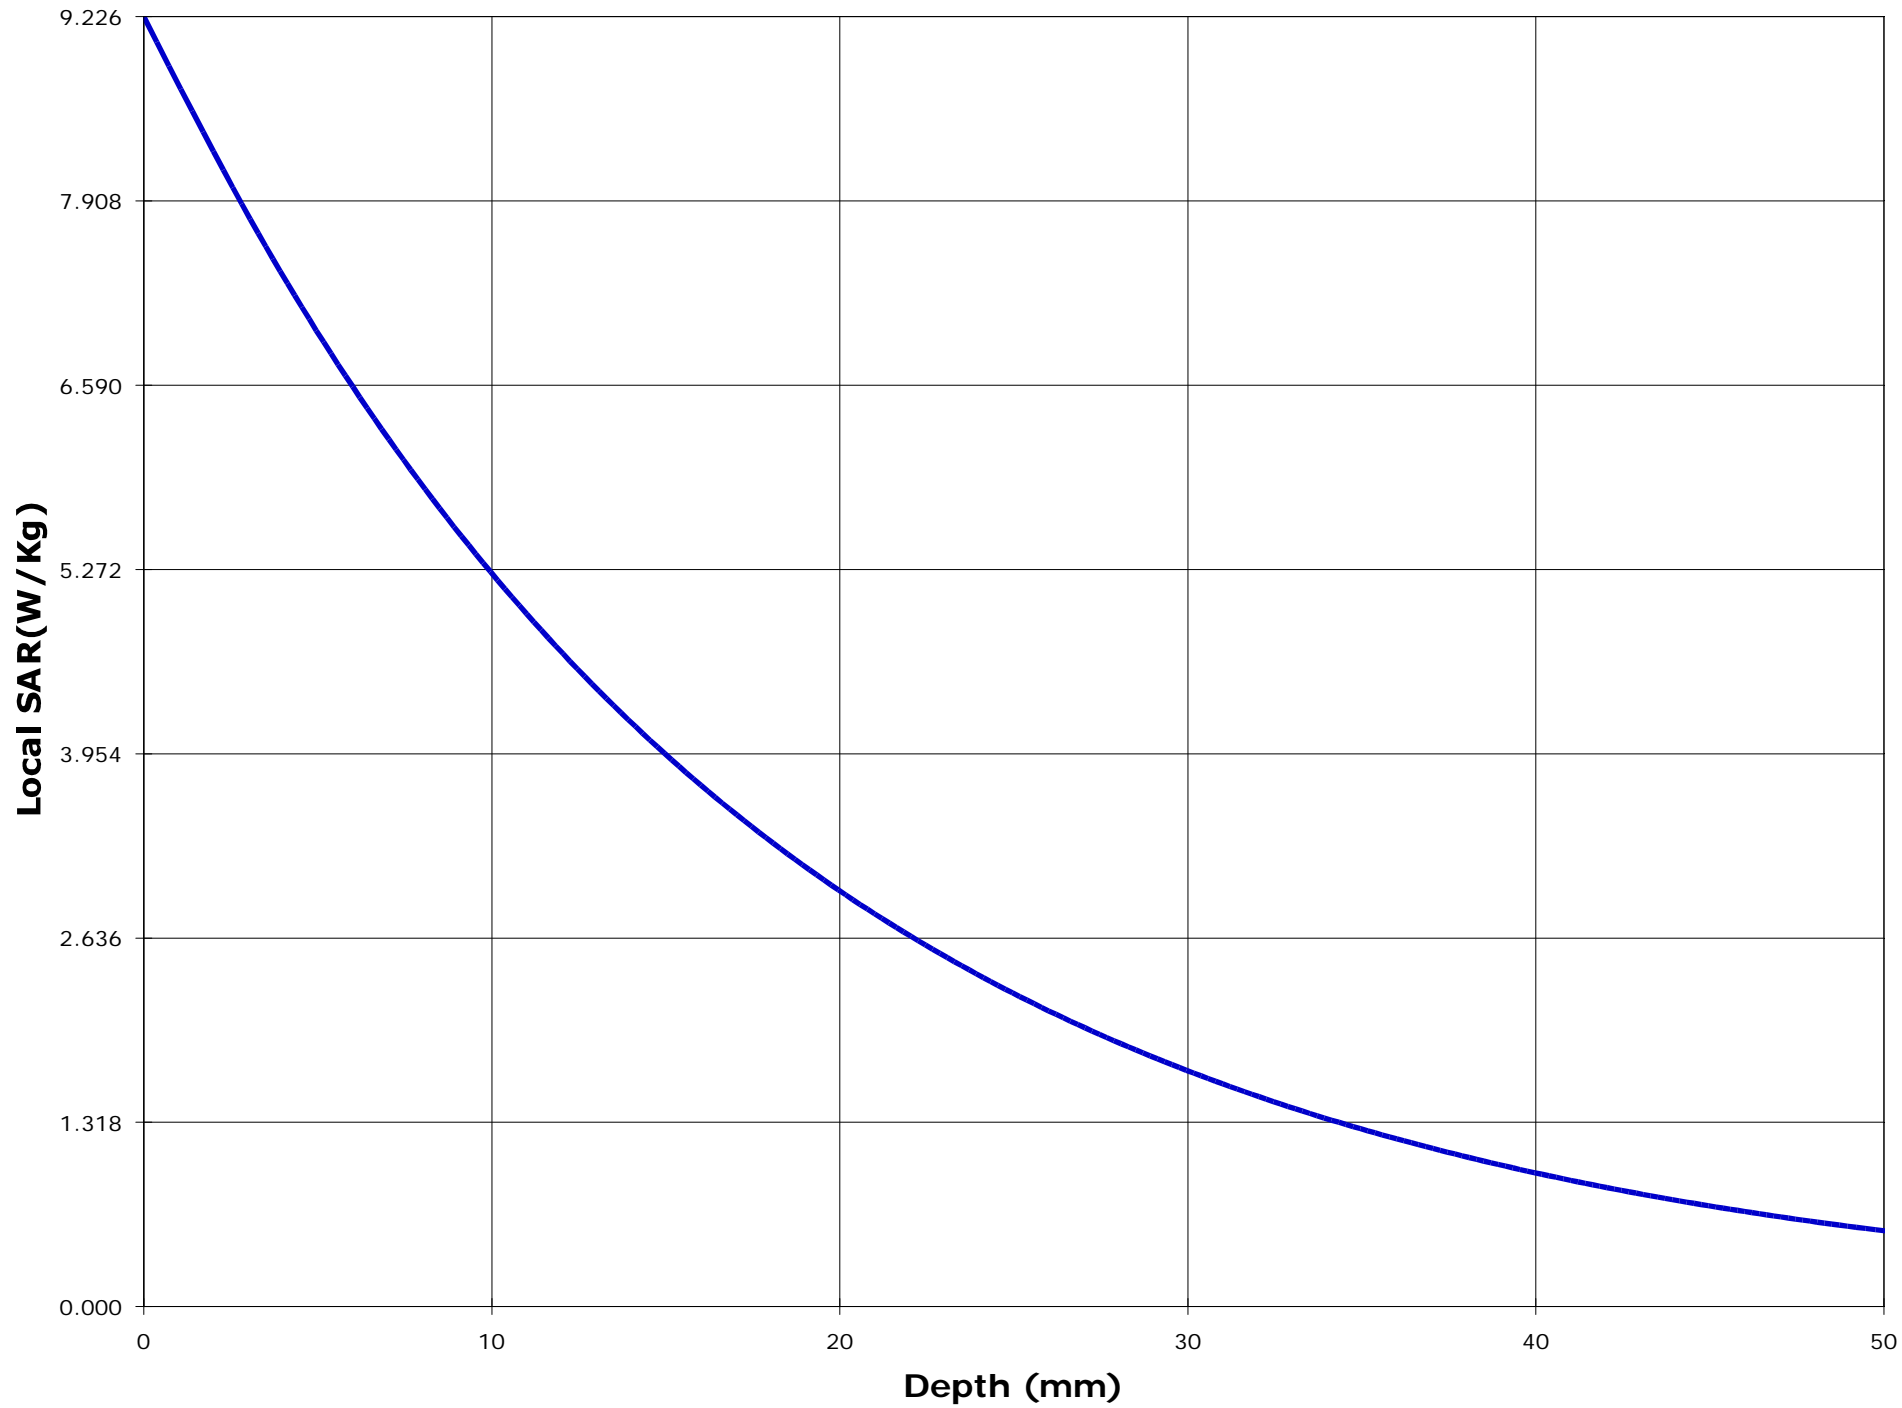

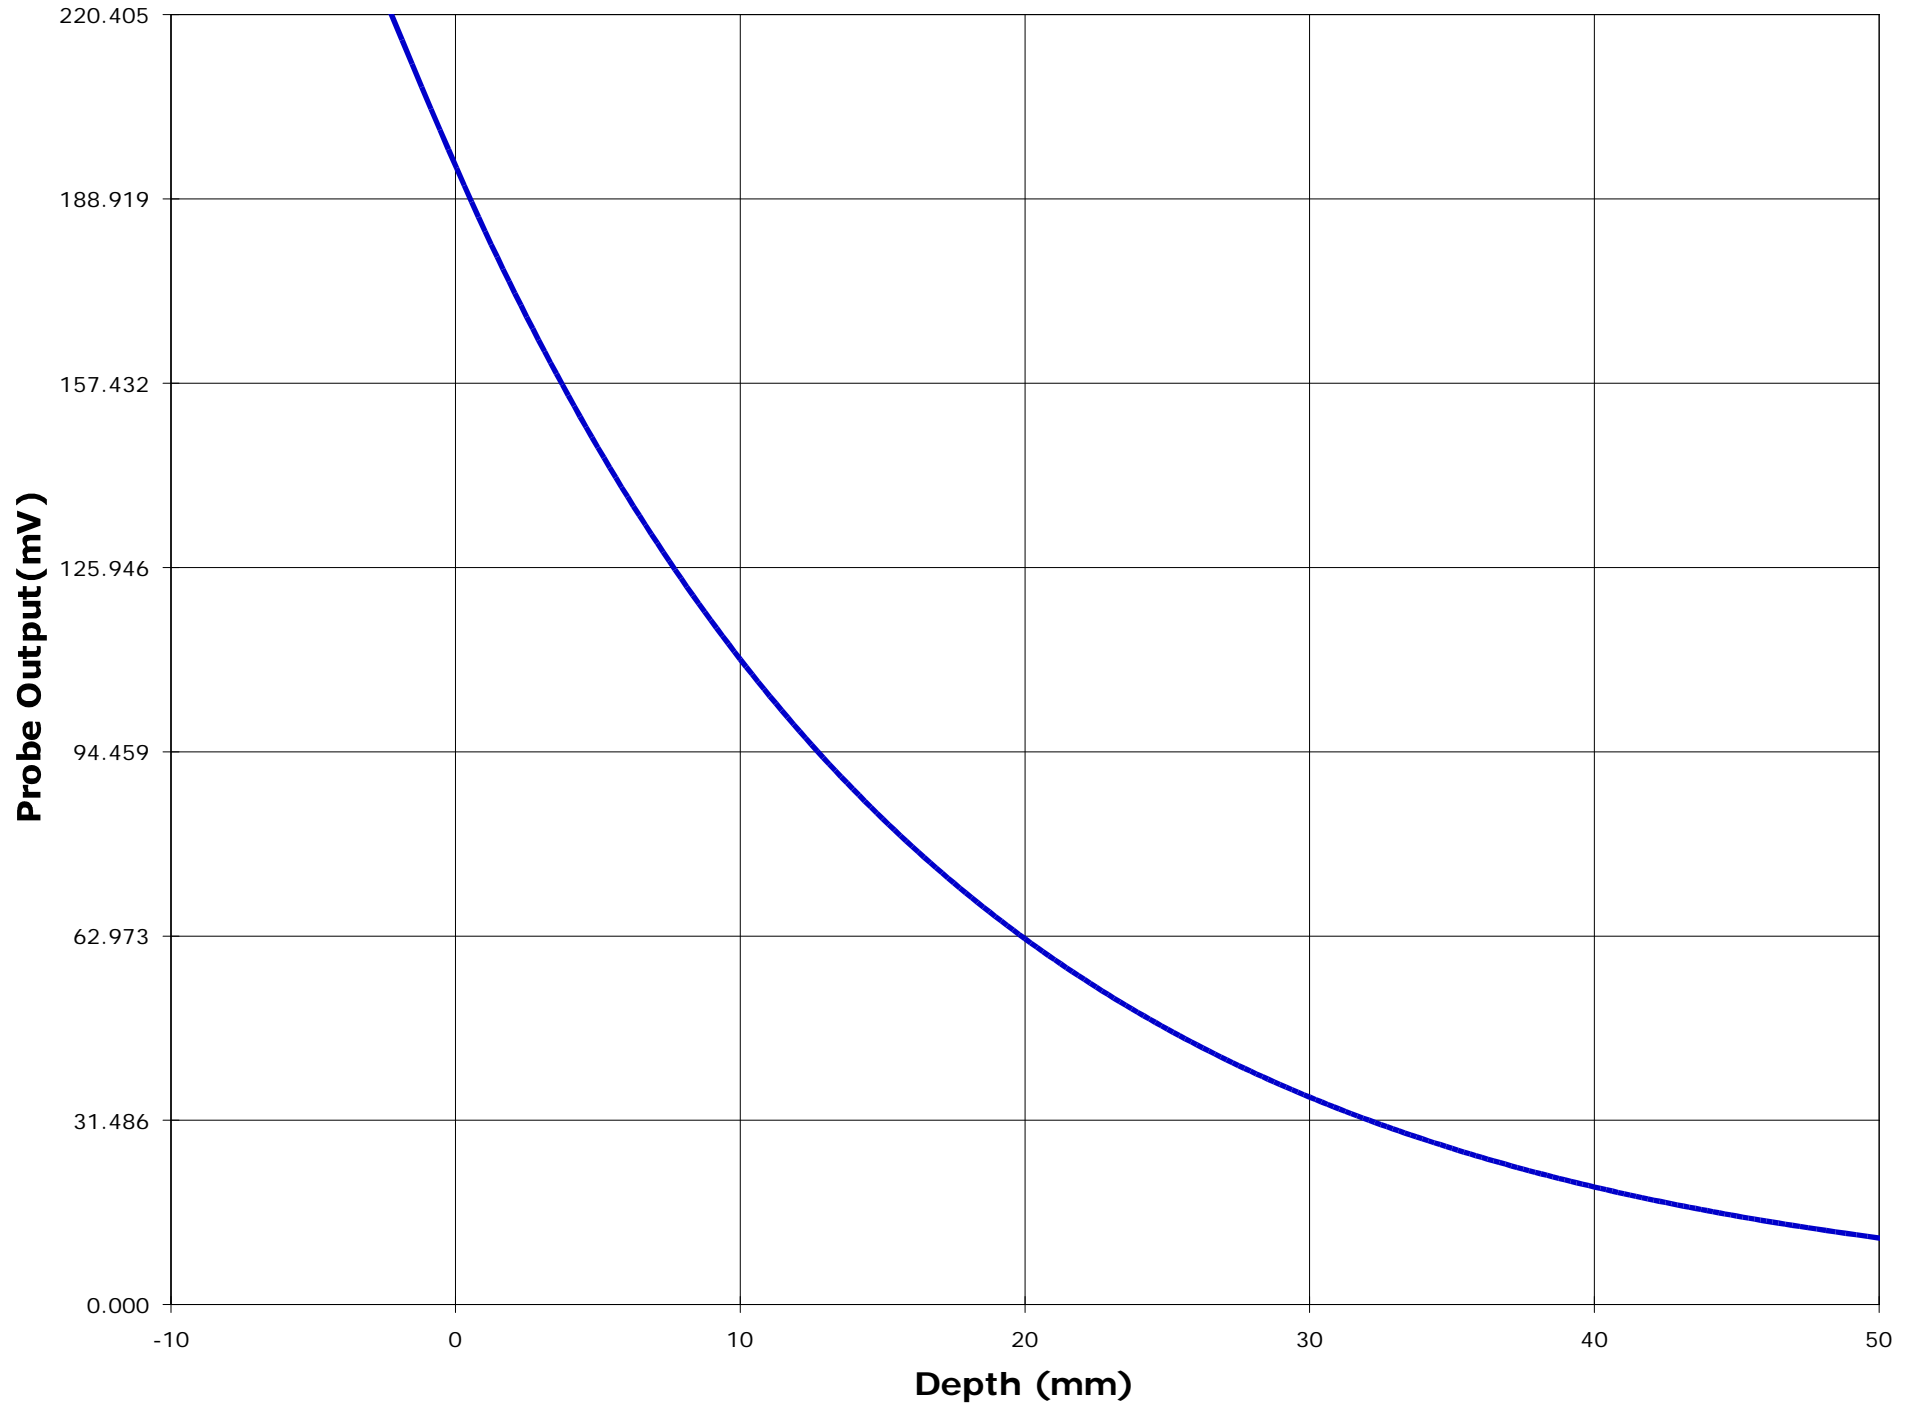

Test Information

Date : 11/2/00  
Time : 11:54:05 AM

<u>Product</u>	: UHF Transceiver	<u>Test</u>	: SAR
<u>Manufacturer</u>	: ICOM Incorporated	<u>Frequency (MHz)</u>	: 450.05 N
<u>Model Number</u>	: IC-F40GT-2	<u>Nominal Output Power (W)</u>	: 4.0
<u>Serial Number</u>	: 0002	<u>Antenna Type</u>	: Monopole
<u>FCC ID Number</u>	: AFJ IC-F40G-2	<u>Signal</u>	: CW

<u>Phantom</u>	: Waist	<u>Dielectric Constant</u>	: 60.2
<u>Simulated Tissue</u>	: Muscle	<u>Conductivity</u>	: 0.82

<u>Probe</u>	: ETR_225_1_999	<u>Antenna Position</u>	: FIX
<u>Probe Offset (mm)</u>	: 2.250	<u>Measured Power (W)</u>	: 3.93
<u>Sensor Factor (mV)</u>	: 10.8	(conducted)	
<u>Conversion Factor</u>	: 0.452	<u>Cable Insertion Loss (dB)</u>	: 0.1
<u>Calibrated Date</u>	: 10/8/99	<u>Compensated Power (W)</u>	: 4.022

Amplifier Setting :

Channel 1 : 0.0070	Channel 2 : 0.0067	Channel 3 : 0.0081
--------------------	--------------------	--------------------



Location of Maximum Field :



X = -10                      Y = 20

Measured Values (mV) :


306.300	274.369	249.425	231.555	218.632	205.879
195.265	185.531	176.228	167.242	158.650	


<u>Peak Voltage (mV)</u>	: 318.088	<u>1 Cm Voltage (mV)</u>	: 184.461	<u>SAR (W/Kg)</u>	: 10.833
--------------------------	-----------	--------------------------	-----------	-------------------	----------

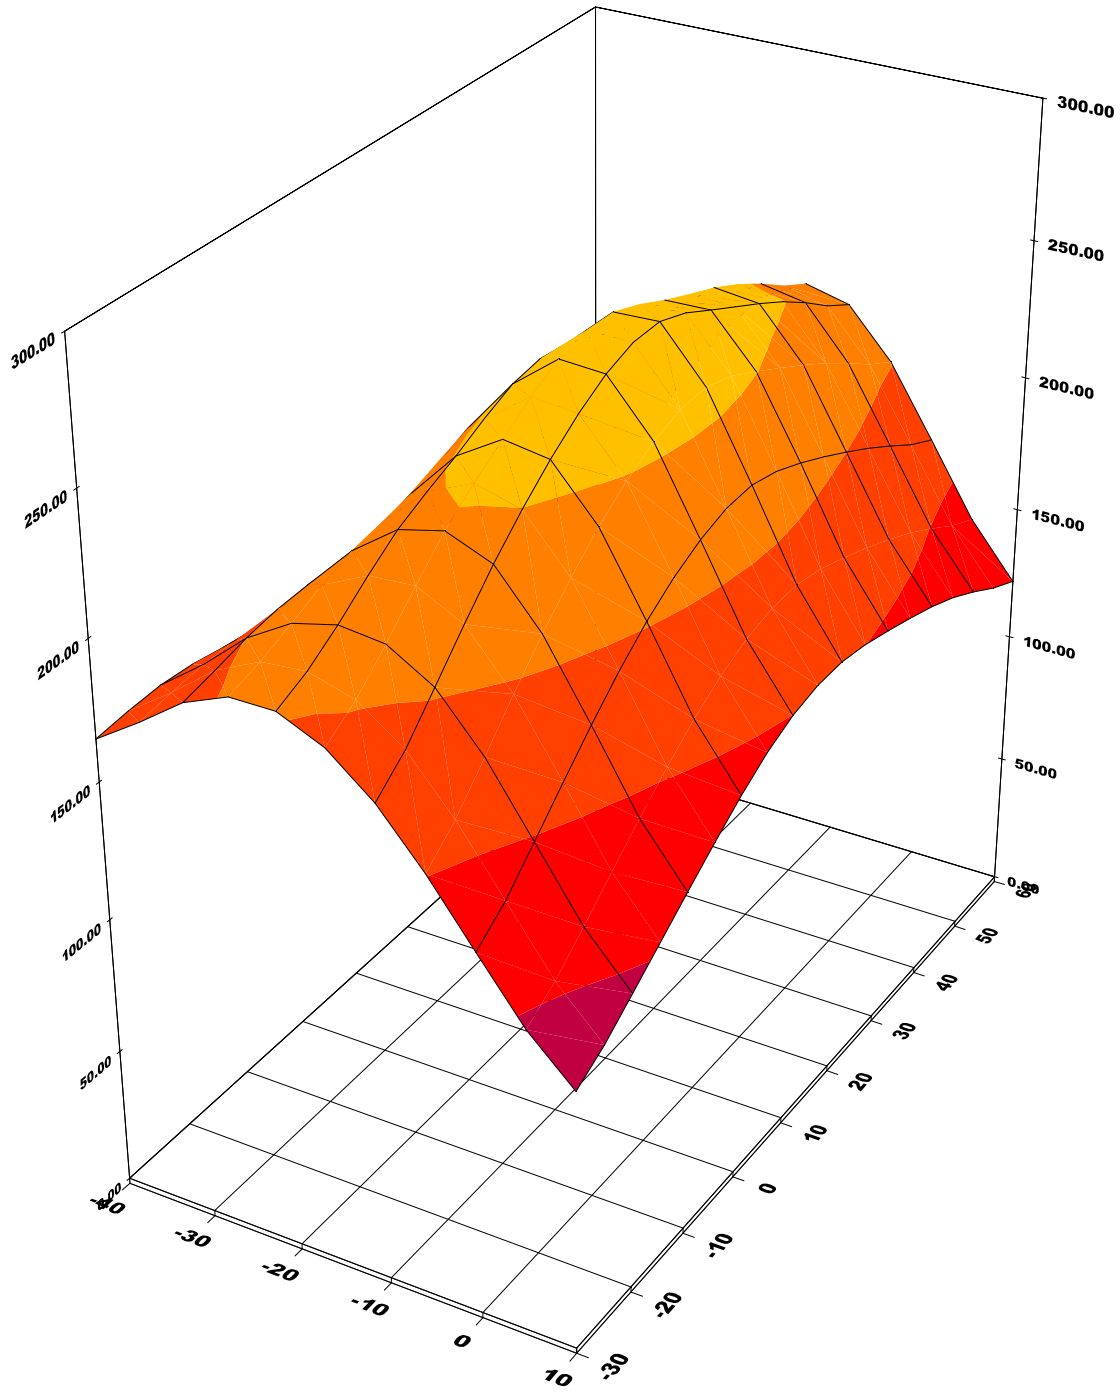


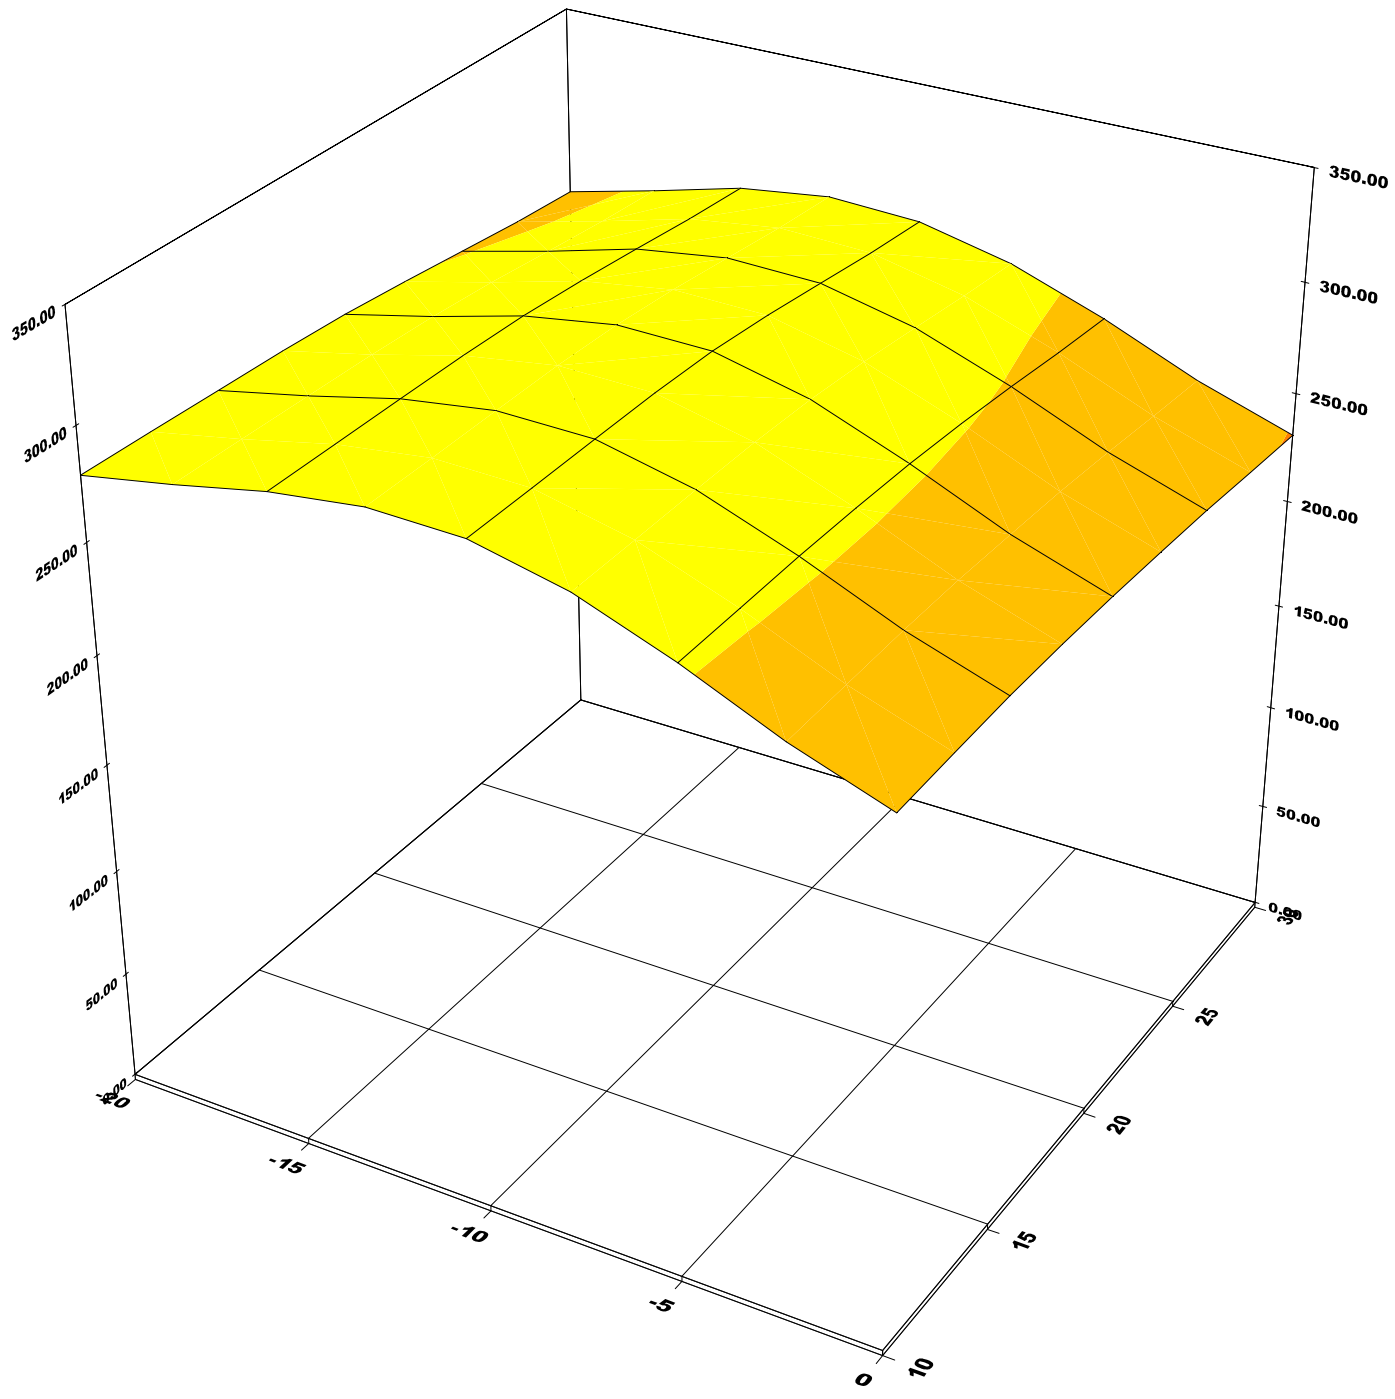




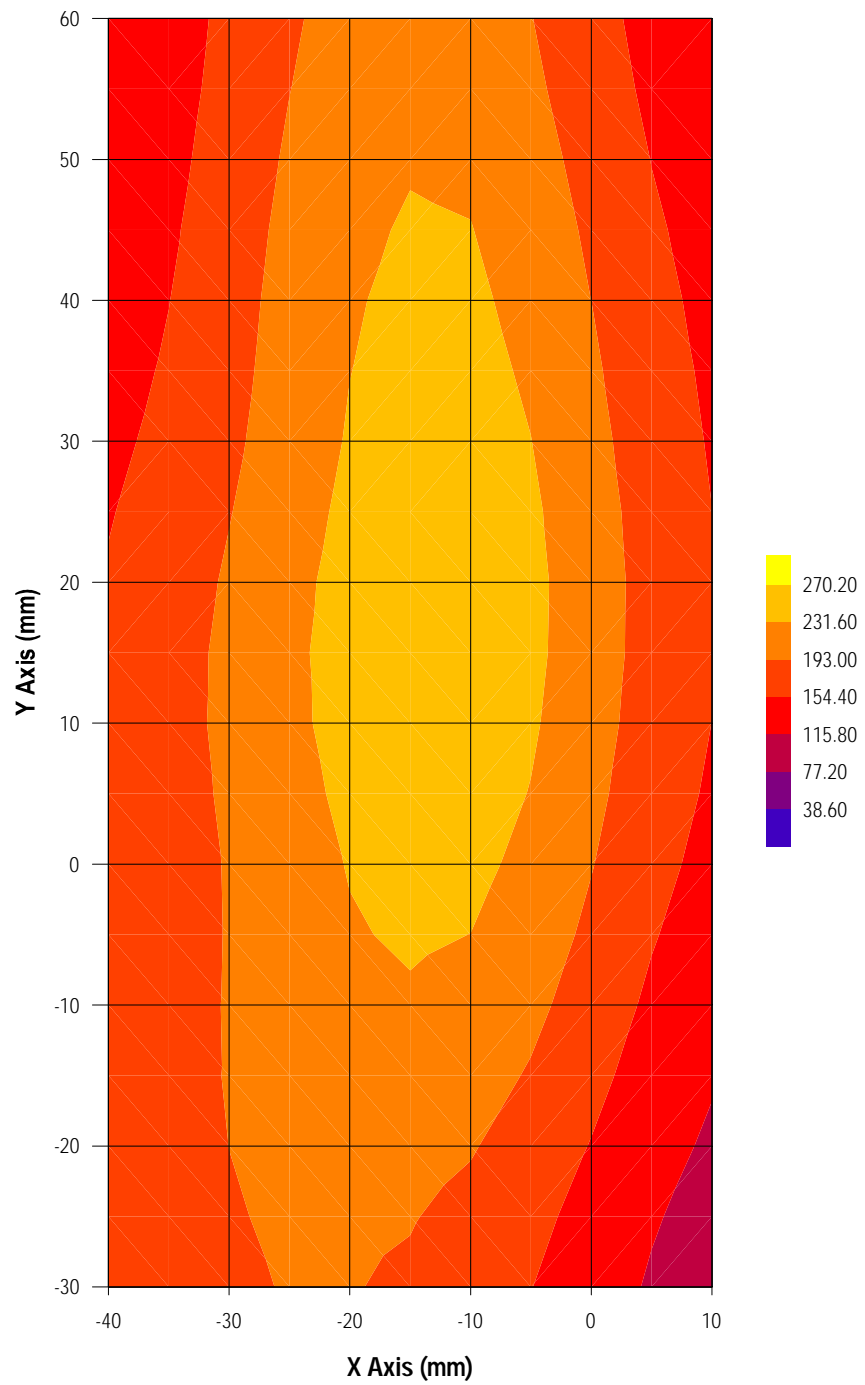

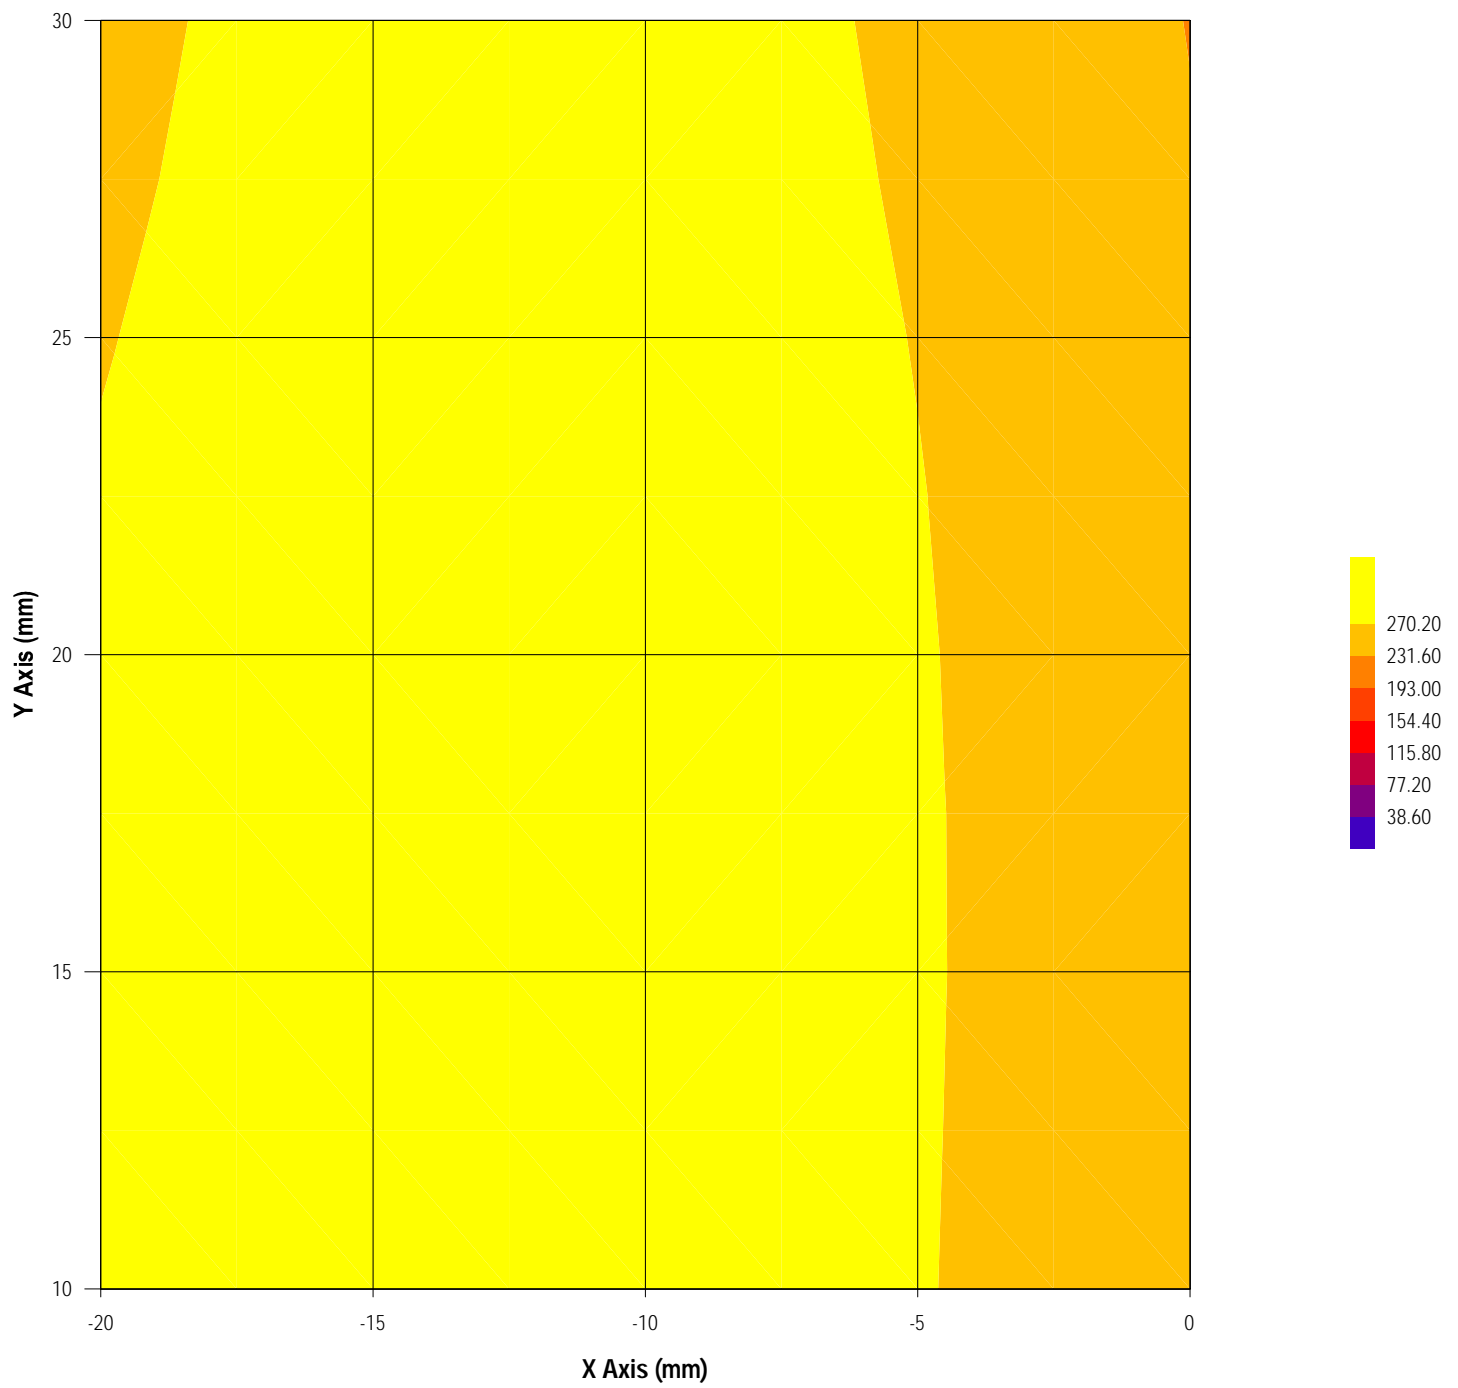

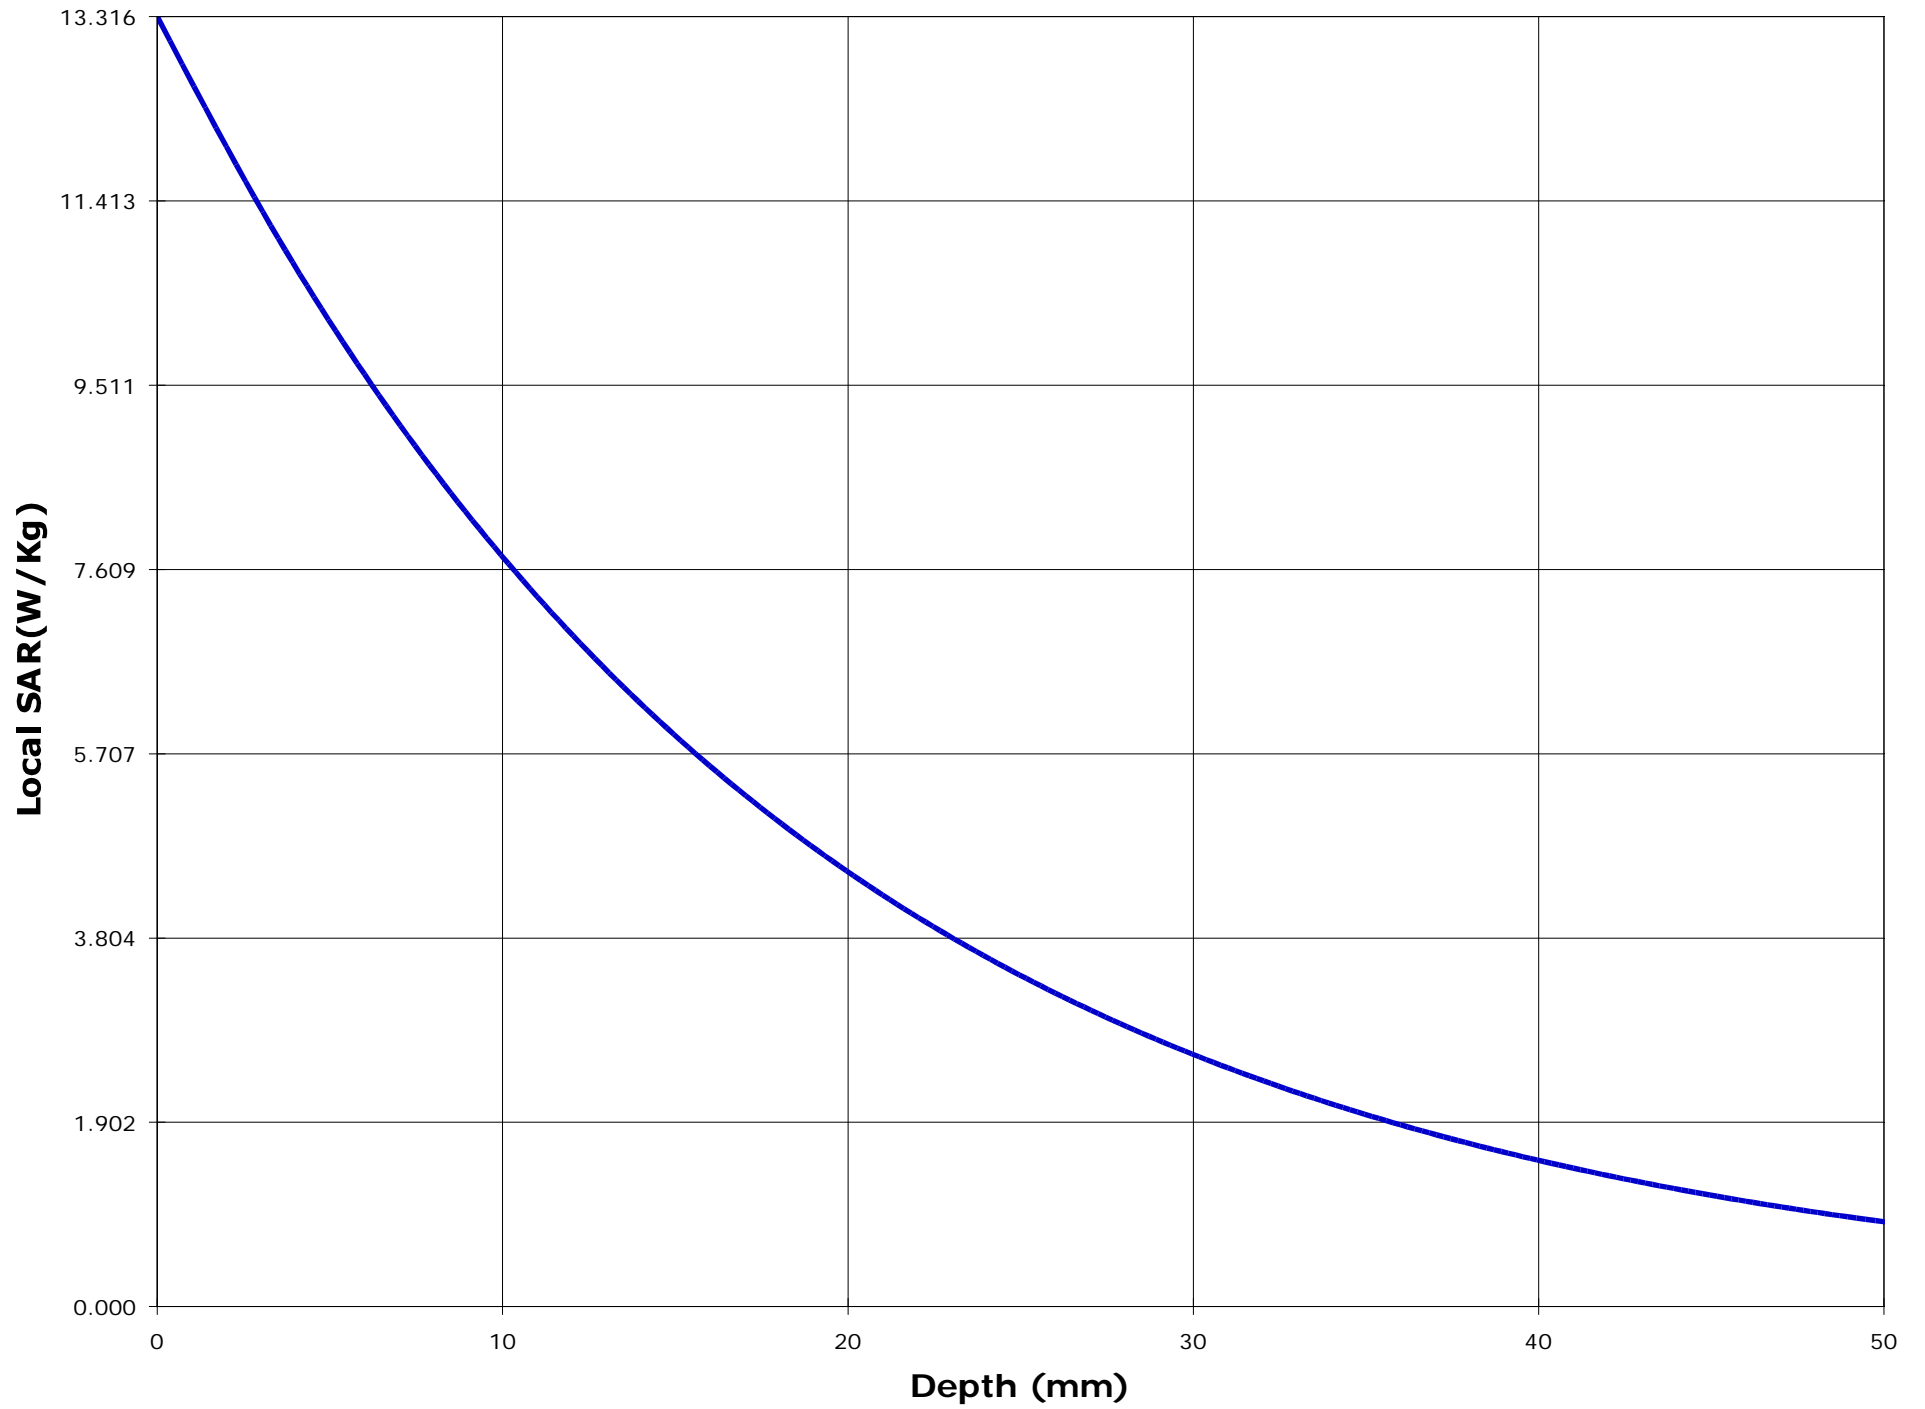

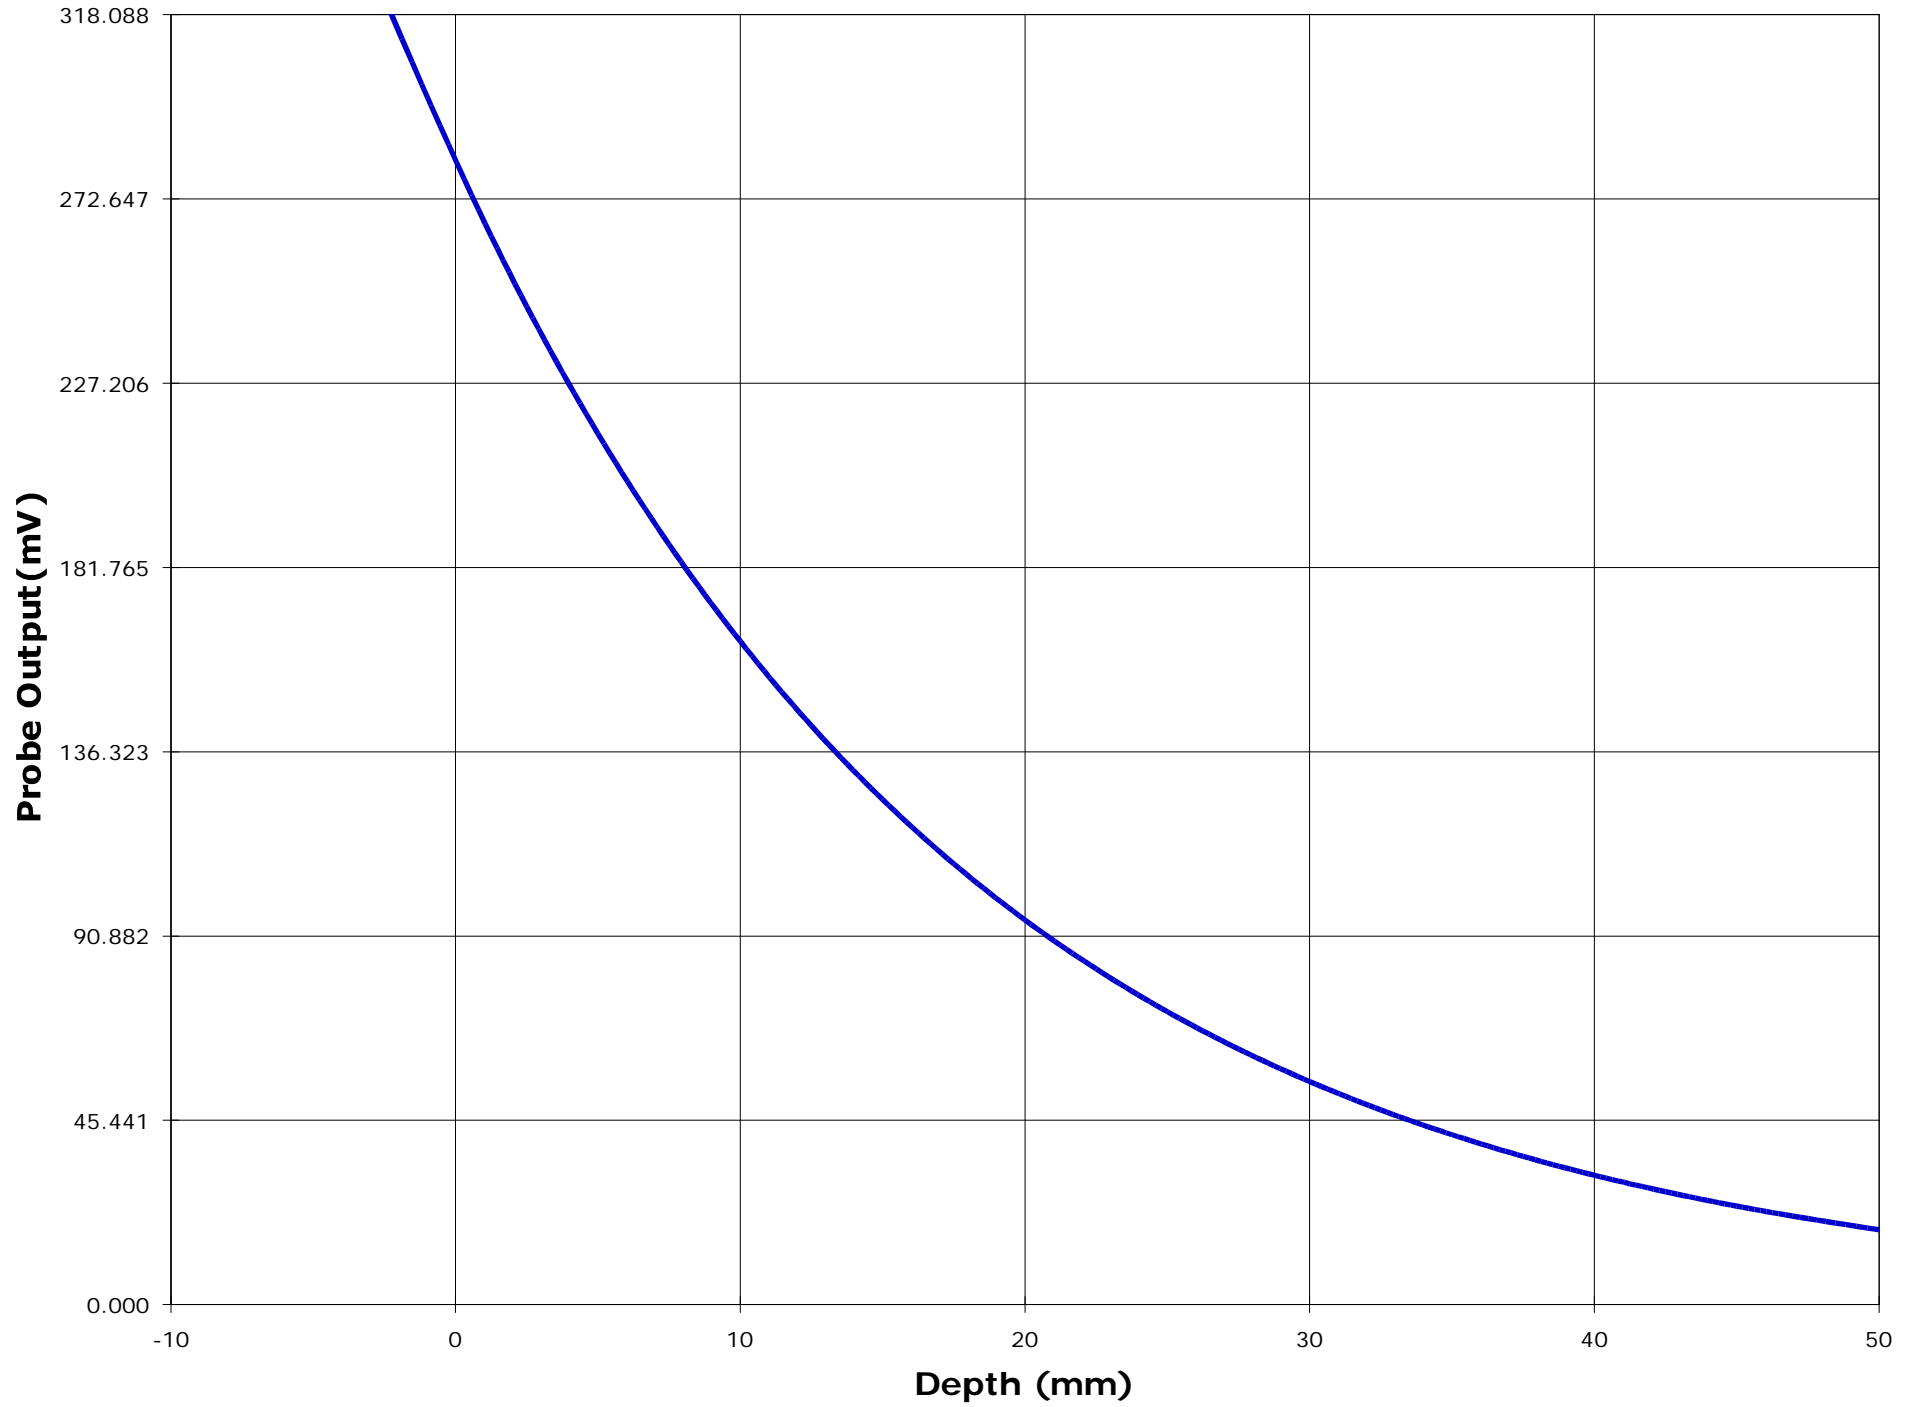

Test Information

Date : 11/2/00  
Time : 4:05:14 PM

<u>Product</u>	: UHF Transceiver	<u>Test</u>	: SAR
<u>Manufacturer</u>	: ICOM Incorporated	<u>Frequency (MHz)</u>	: 470.05 N
<u>Model Number</u>	: IC-F40GT-2	<u>Nominal Output Power (W)</u>	: 4.0
<u>Serial Number</u>	: 0002	<u>Antenna Type</u>	: Monopole
<u>FCC ID Number</u>	: AFJ IC-F40G-2	<u>Signal</u>	: CW

<u>Phantom</u>	: Waist	<u>Dielectric Constant</u>	: 60.2
<u>Simulated Tissue</u>	: Muscle	<u>Conductivity</u>	: 0.82

<u>Probe</u>	: ETR_225_1_999	<u>Antenna Position</u>	: FIX
<u>Probe Offset (mm)</u>	: 2.250	<u>Measured Power (W)</u>	: 3.97
<u>Sensor Factor (mV)</u>	: 10.8	(conducted)	
<u>Conversion Factor</u>	: 0.452	<u>Cable Insertion Loss (dB)</u>	: 0.1
<u>Calibrated Date</u>	: 10/8/99	<u>Compensated Power (W)</u>	: 4.062

Amplifier Setting :

Channel 1 : 0.0070	Channel 2 : 0.0067	Channel 3 : 0.0081
--------------------	--------------------	--------------------



Location of Maximum Field :



X = -5                      Y = 15


Measured Values (mV) :

220.044	200.818	182.803	169.402	159.308	150.315
142.151	134.093	127.648	121.499	115.174	


<u>Peak Voltage (mV)</u>	: 232.136	<u>1 Cm Voltage (mV)</u>	: 133.617	<u>SAR (W/Kg)</u>	: 7.779
--------------------------	-----------	--------------------------	-----------	-------------------	---------

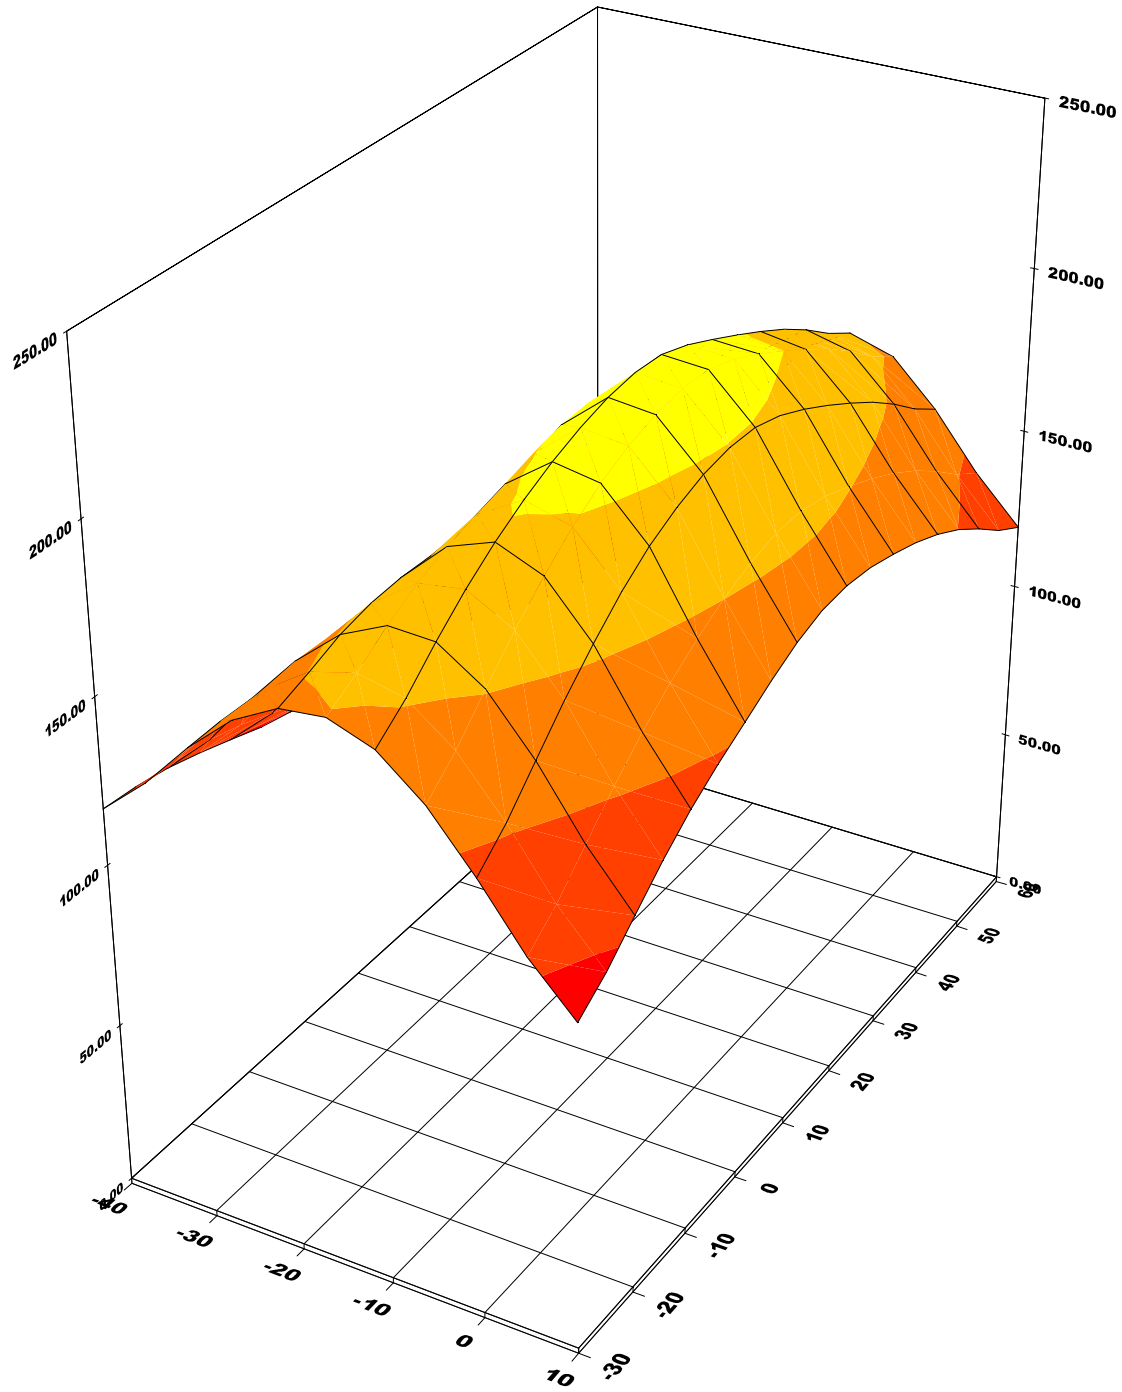


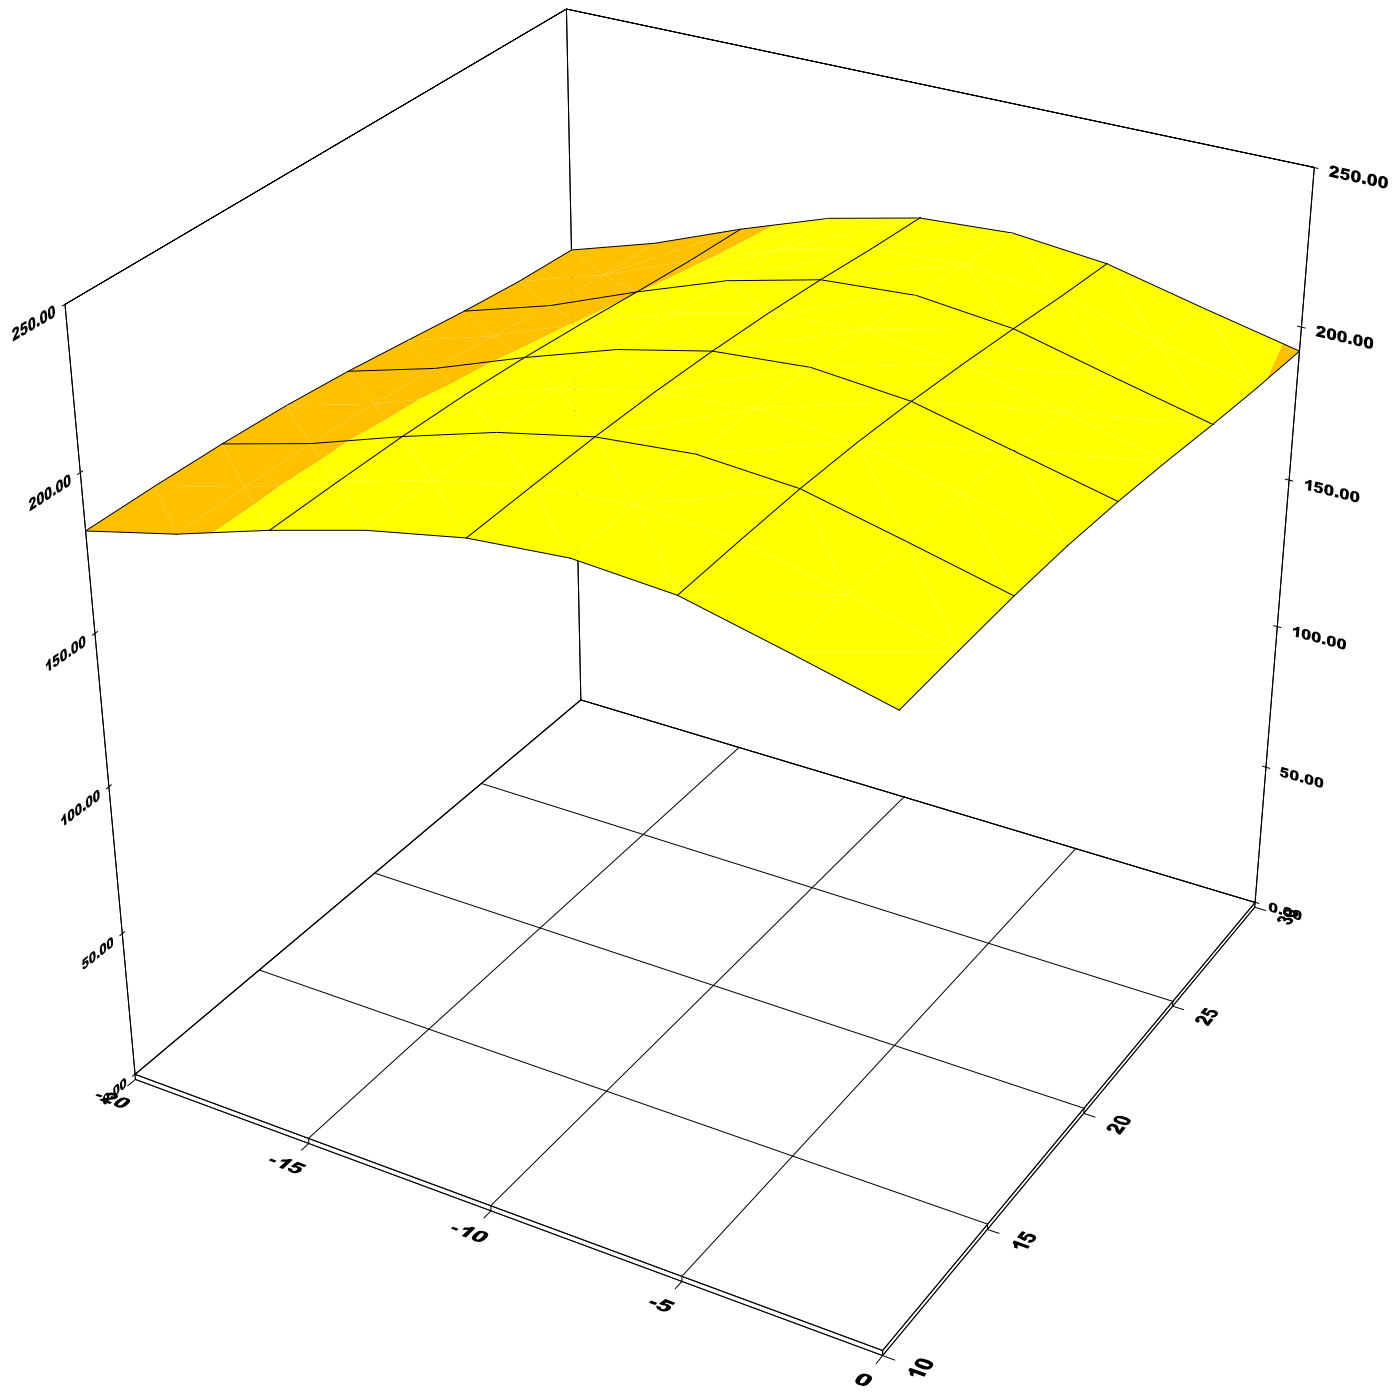


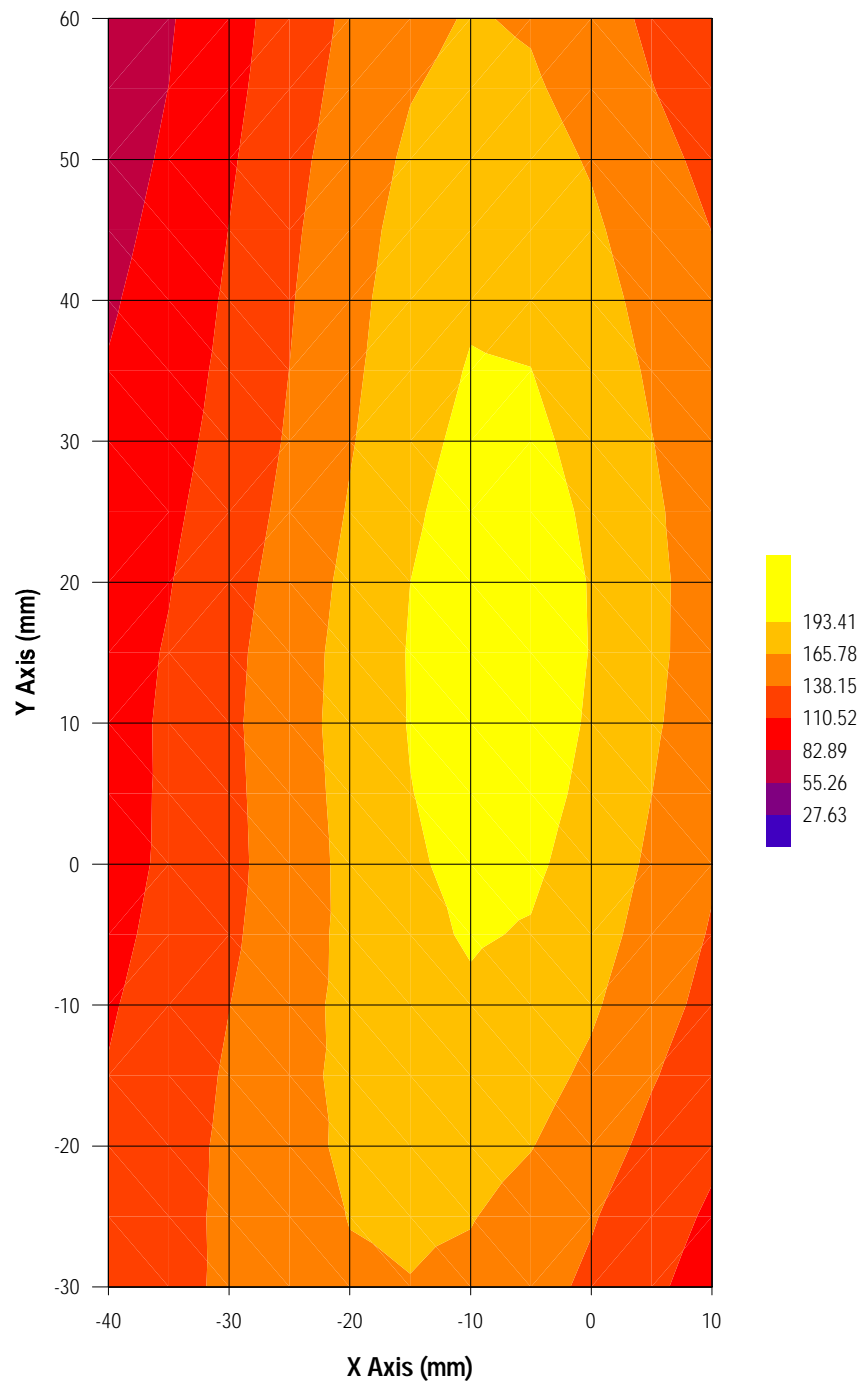



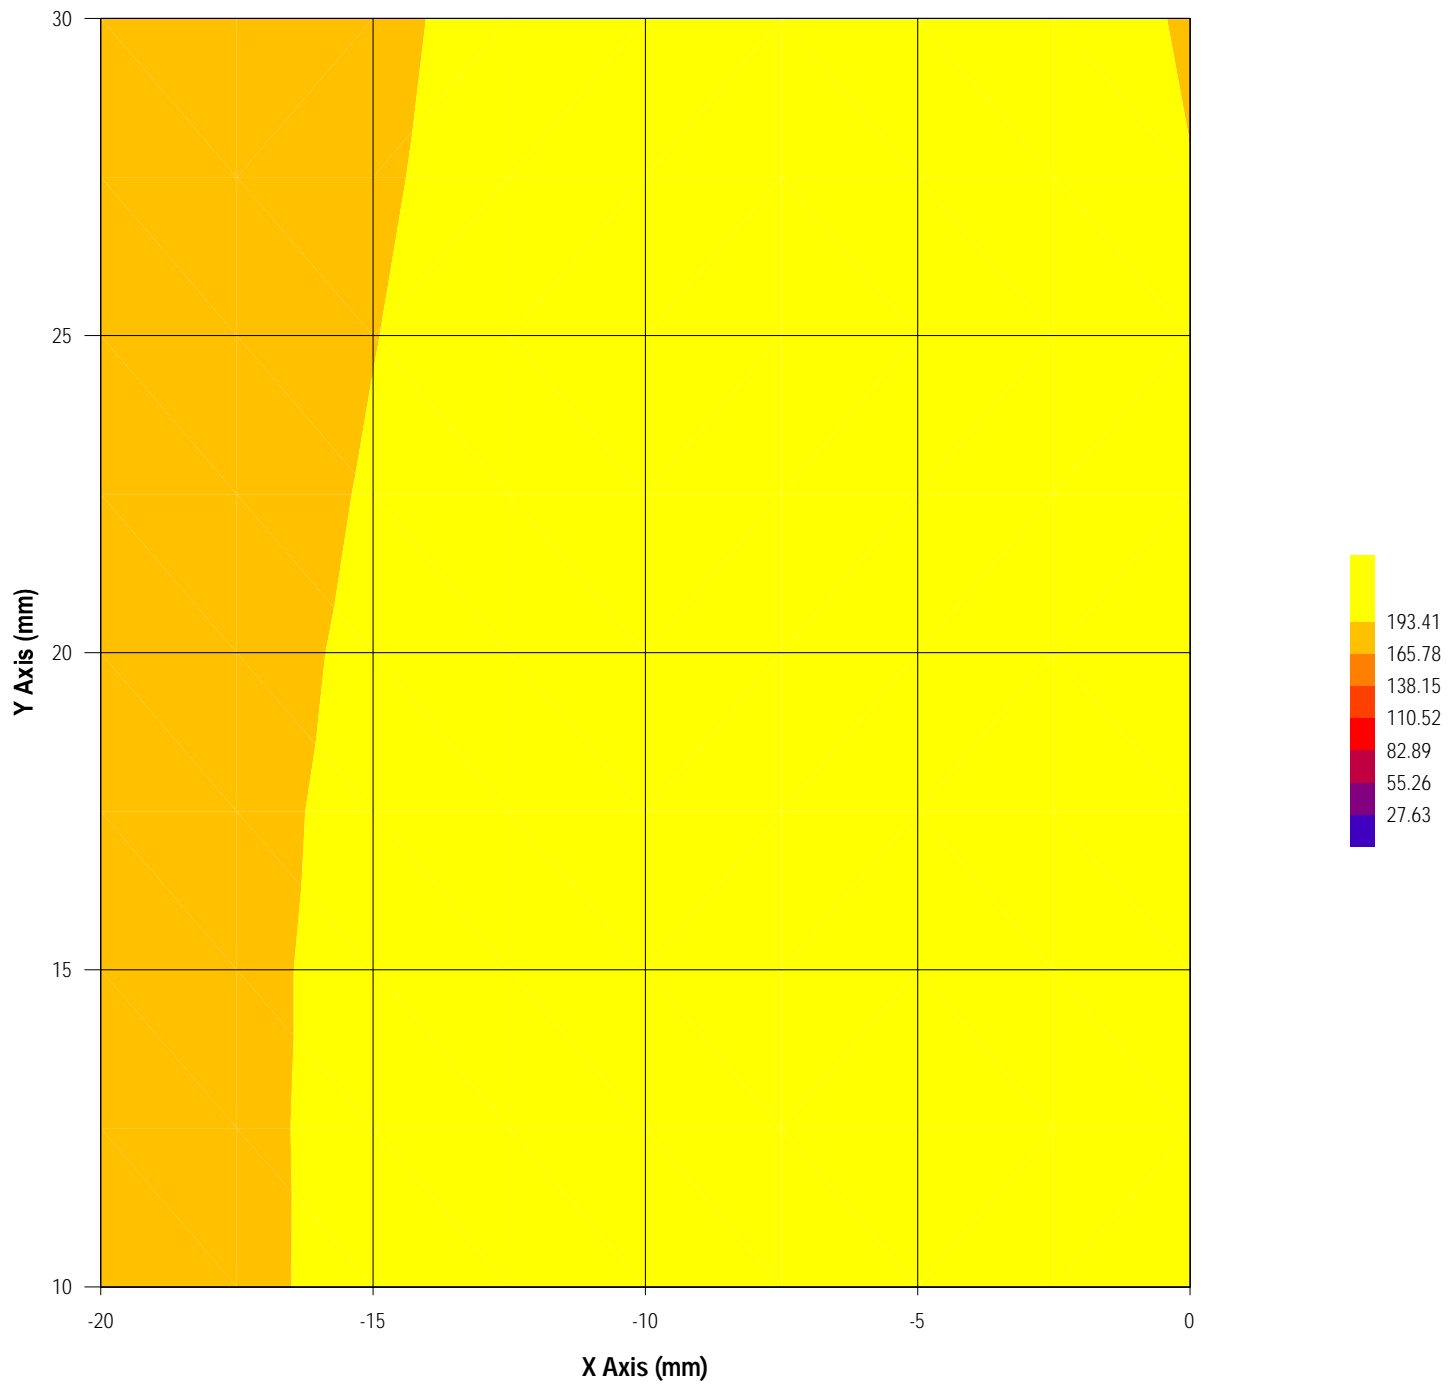

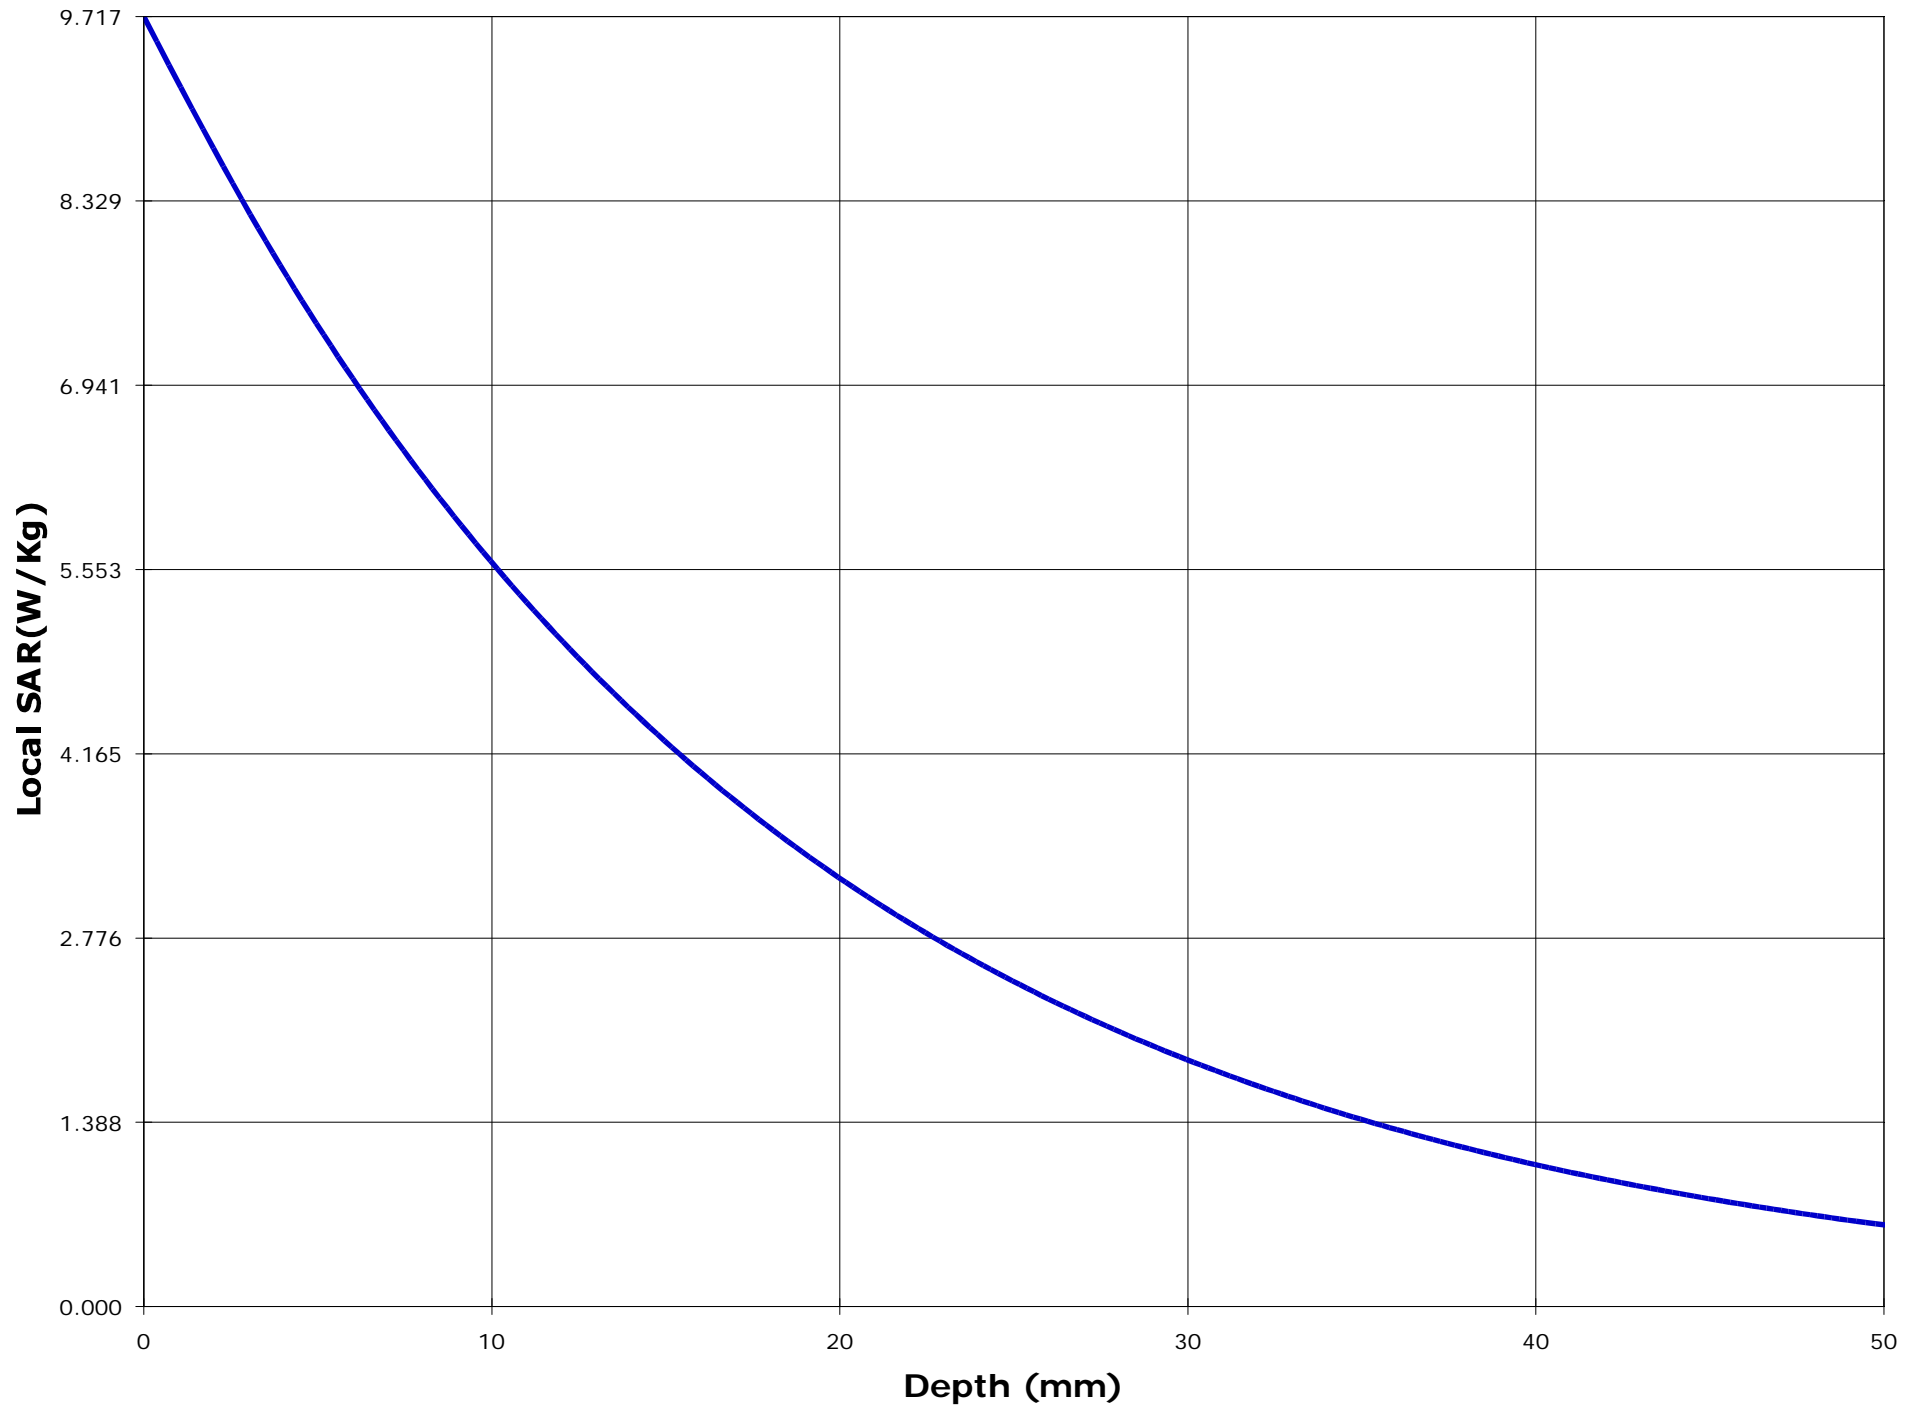

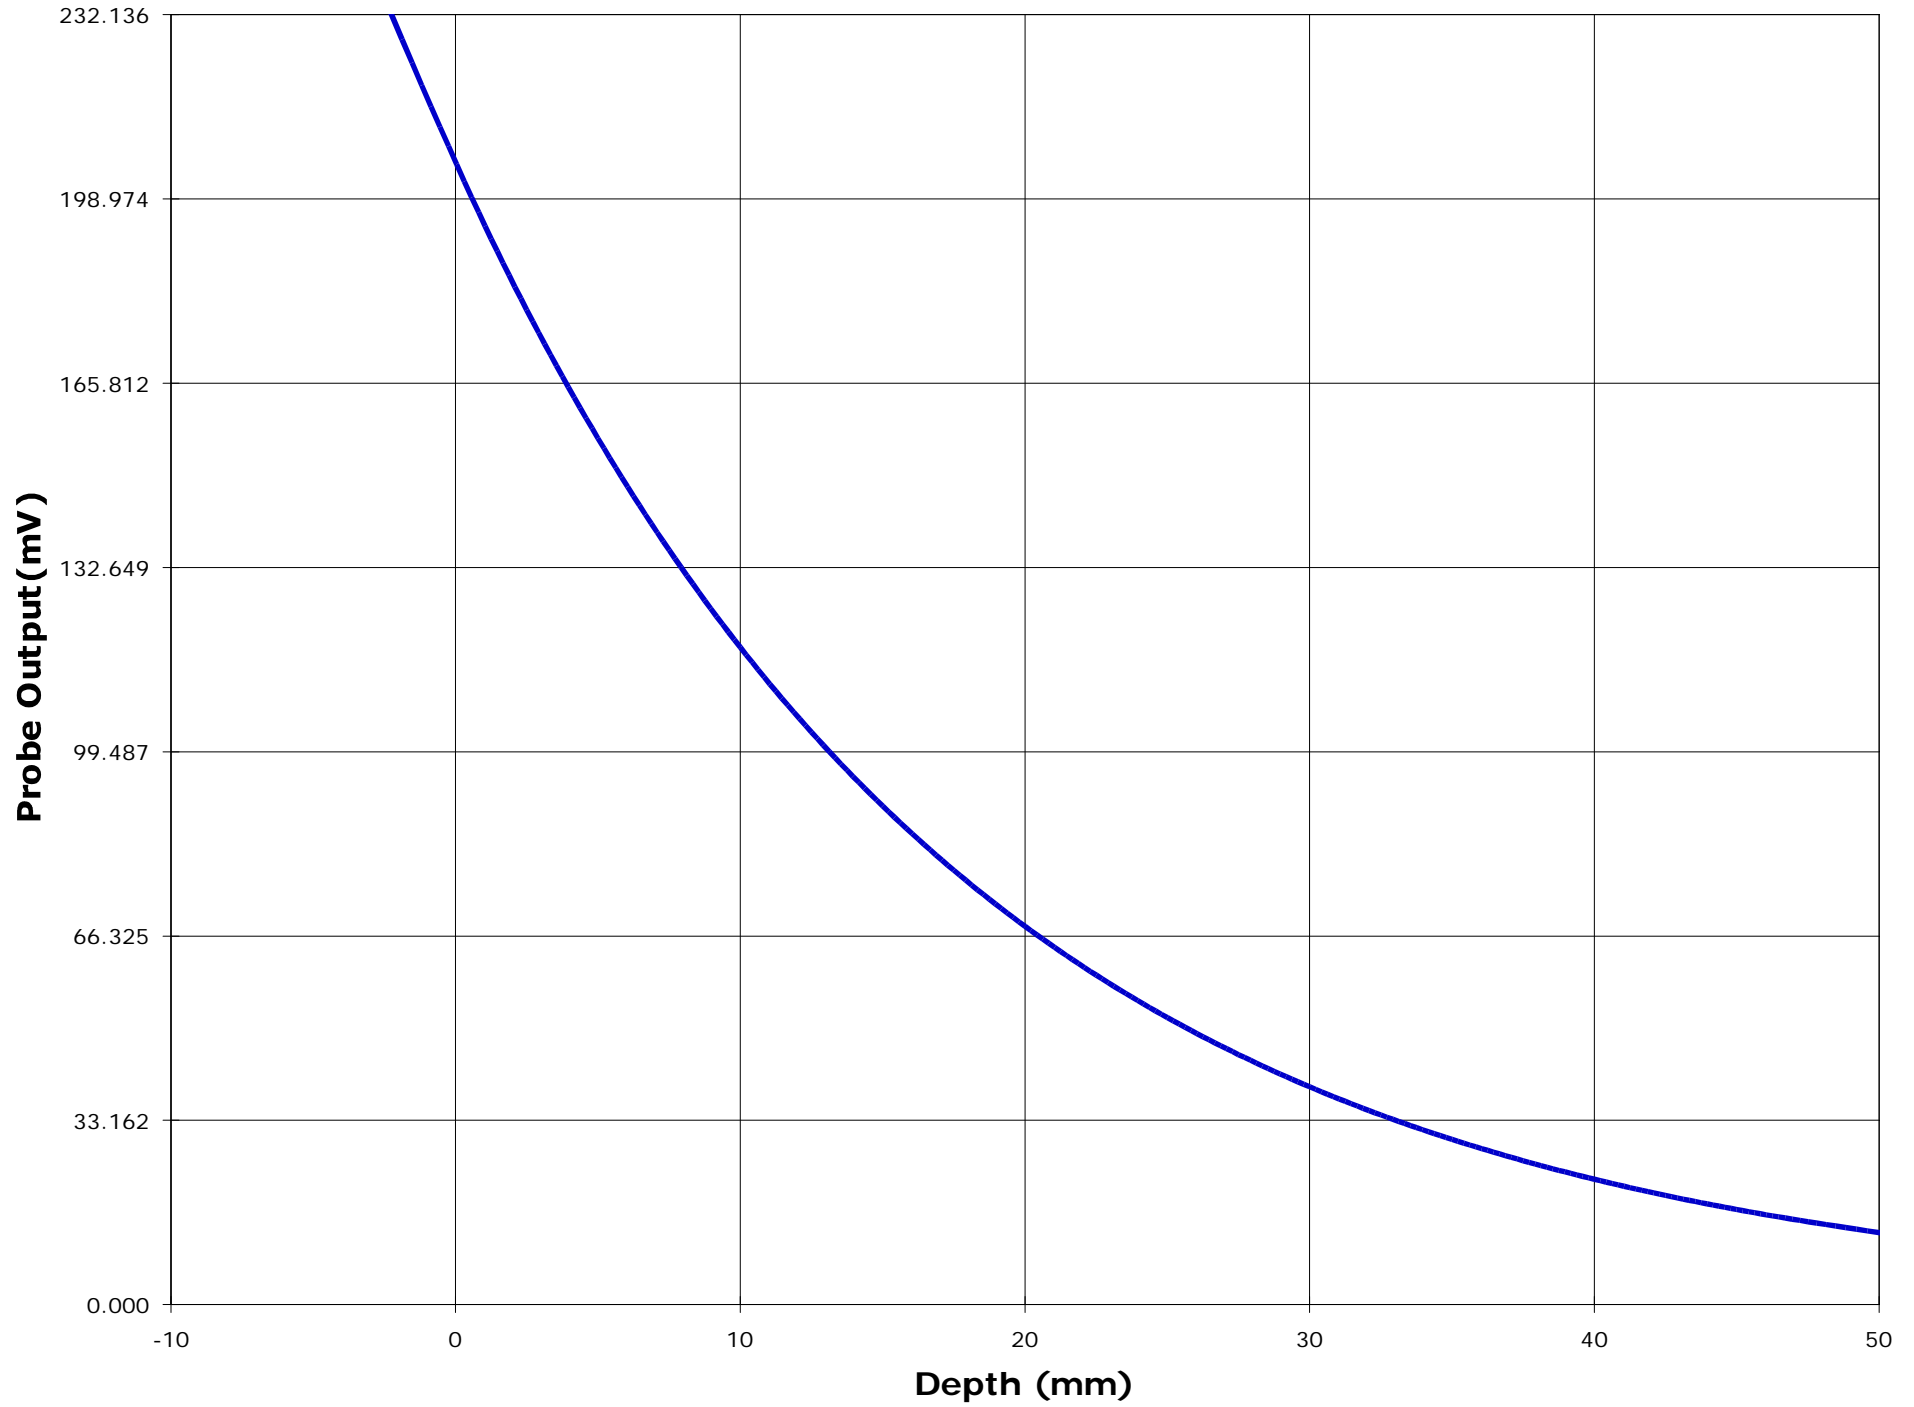

Test Information

Date : 11/2/00  
Time : 1:58:58 PM

<u>Product</u>	: UHF Transceiver	<u>Test</u>	: SAR
<u>Manufacturer</u>	: ICOM Incorporated	<u>Frequency (MHz)</u>	: 489.95 N
<u>Model Number</u>	: IC-F40GT-2	<u>Nominal Output Power (W)</u>	: 4.0
<u>Serial Number</u>	: 0002	<u>Antenna Type</u>	: Monopole
<u>FCC ID Number</u>	: AFJ IC-F40G-2	<u>Signal</u>	: CW

<u>Phantom</u>	: Waist	<u>Dielectric Constant</u>	: 60.2
<u>Simulated Tissue</u>	: Muscle	<u>Conductivity</u>	: 0.82

<u>Probe</u>	: ETR_225_1_999	<u>Antenna Position</u>	: FIX
<u>Probe Offset (mm)</u>	: 2.250	<u>Measured Power (W)</u>	: 4.25
<u>Sensor Factor (mV)</u>	: 10.8	(conducted)	
<u>Conversion Factor</u>	: 0.452	<u>Cable Insertion Loss (dB)</u>	: 0.1
<u>Calibrated Date</u>	: 10/8/99	<u>Compensated Power (W)</u>	: 4.349

Amplifier Setting :

Channel 1 : 0.0070	Channel 2 : 0.0067	Channel 3 : 0.0081
--------------------	--------------------	--------------------



Location of Maximum Field :



X = -5                      Y = 20


Measured Values (mV) :


204.804	180.405	164.070	153.139	143.742	135.866
128.339	121.585	115.416	109.570	104.263	

<u>Peak Voltage (mV)</u>	: 212.220	<u>1 Cm Voltage (mV)</u>	: 120.869	<u>SAR (W/Kg)</u>	: 7.165
--------------------------	-----------	--------------------------	-----------	-------------------	---------

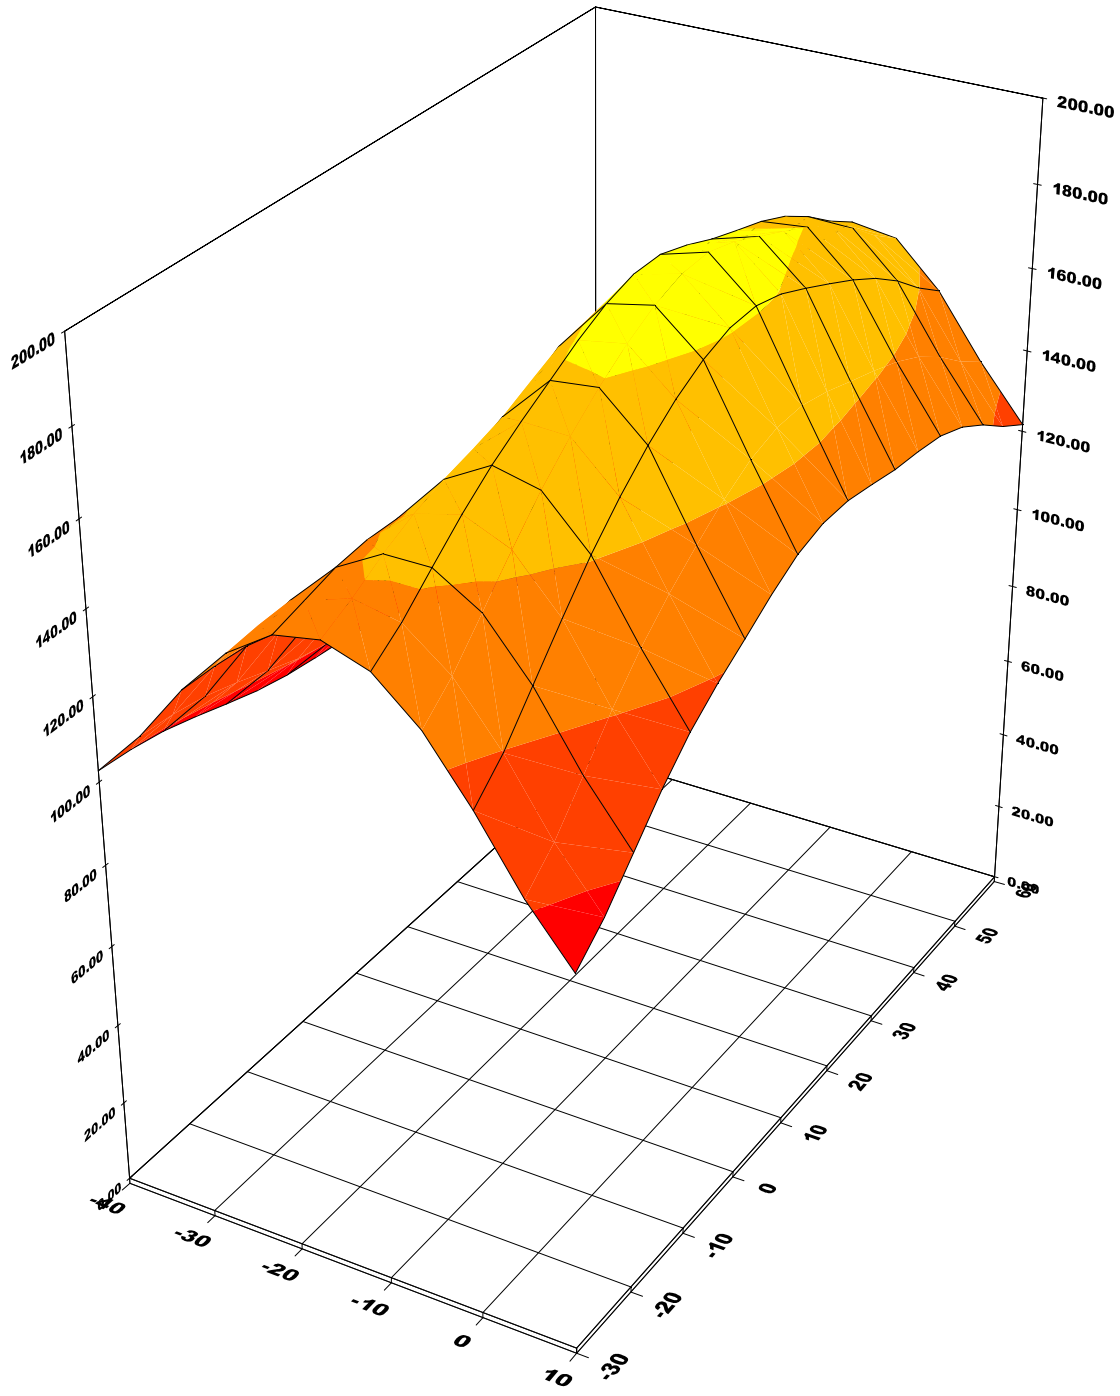


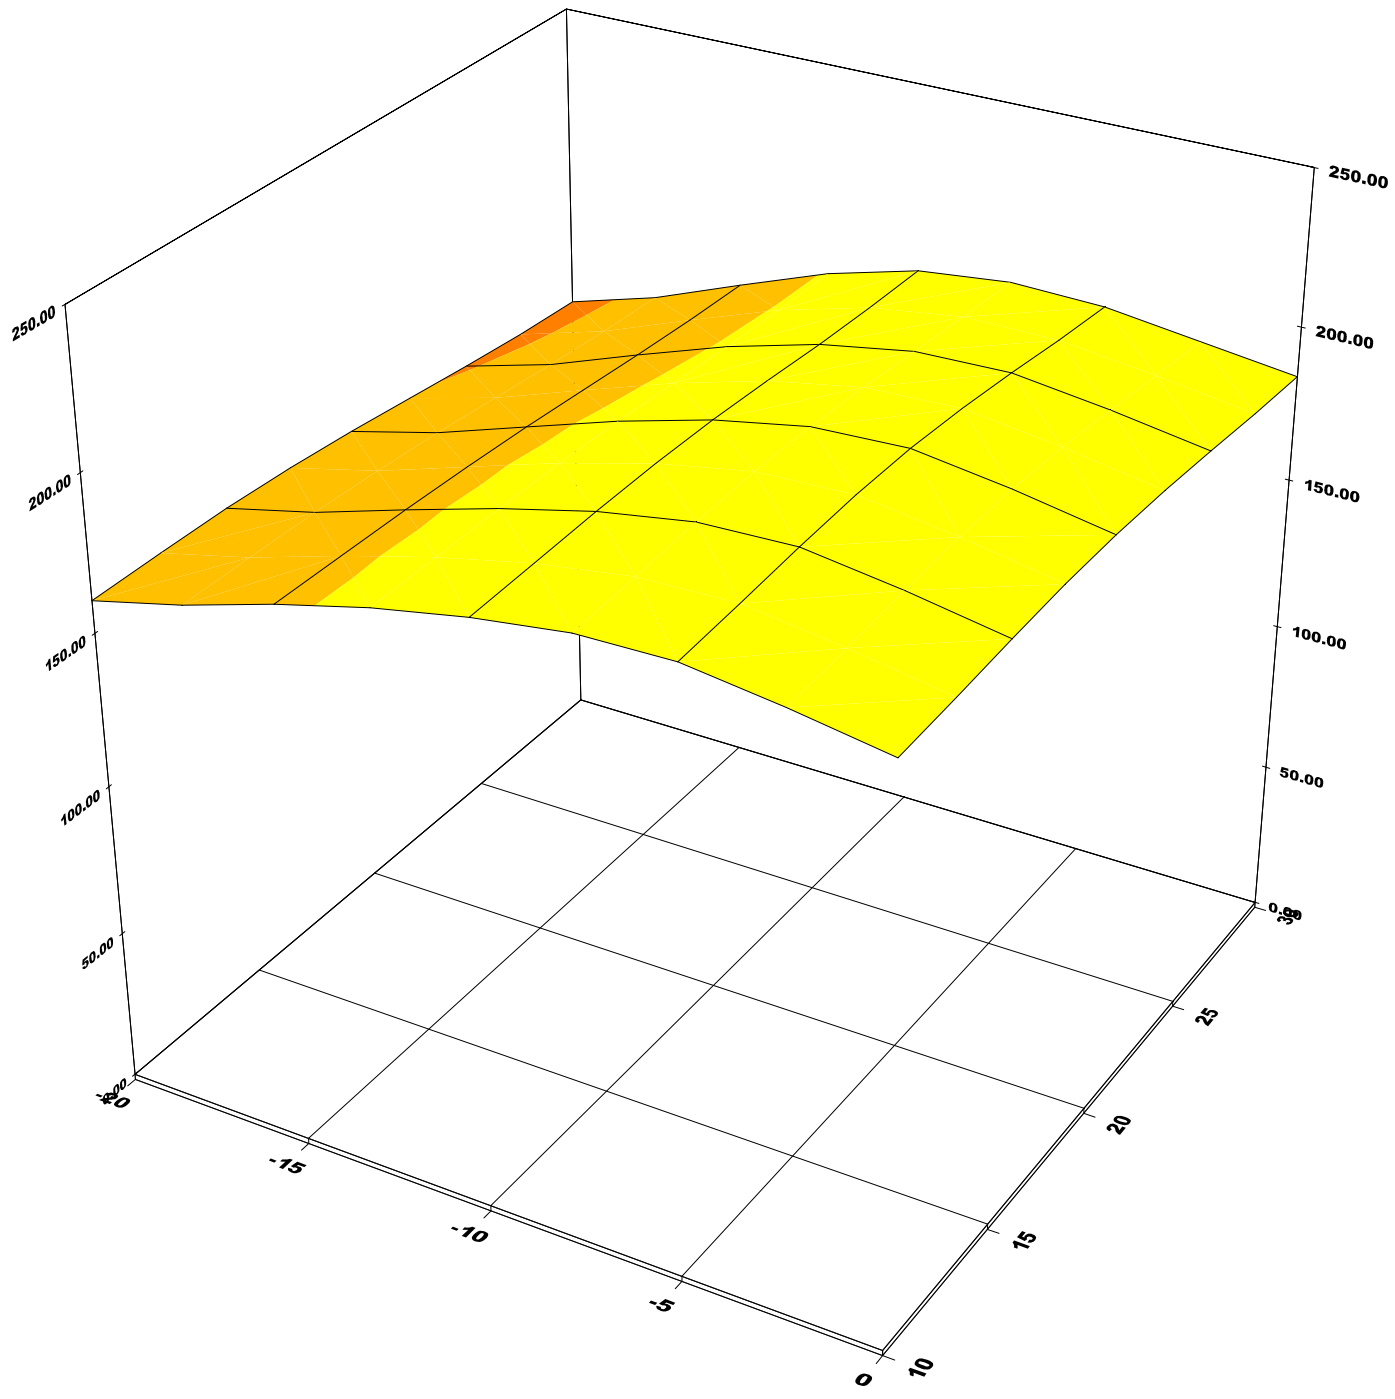


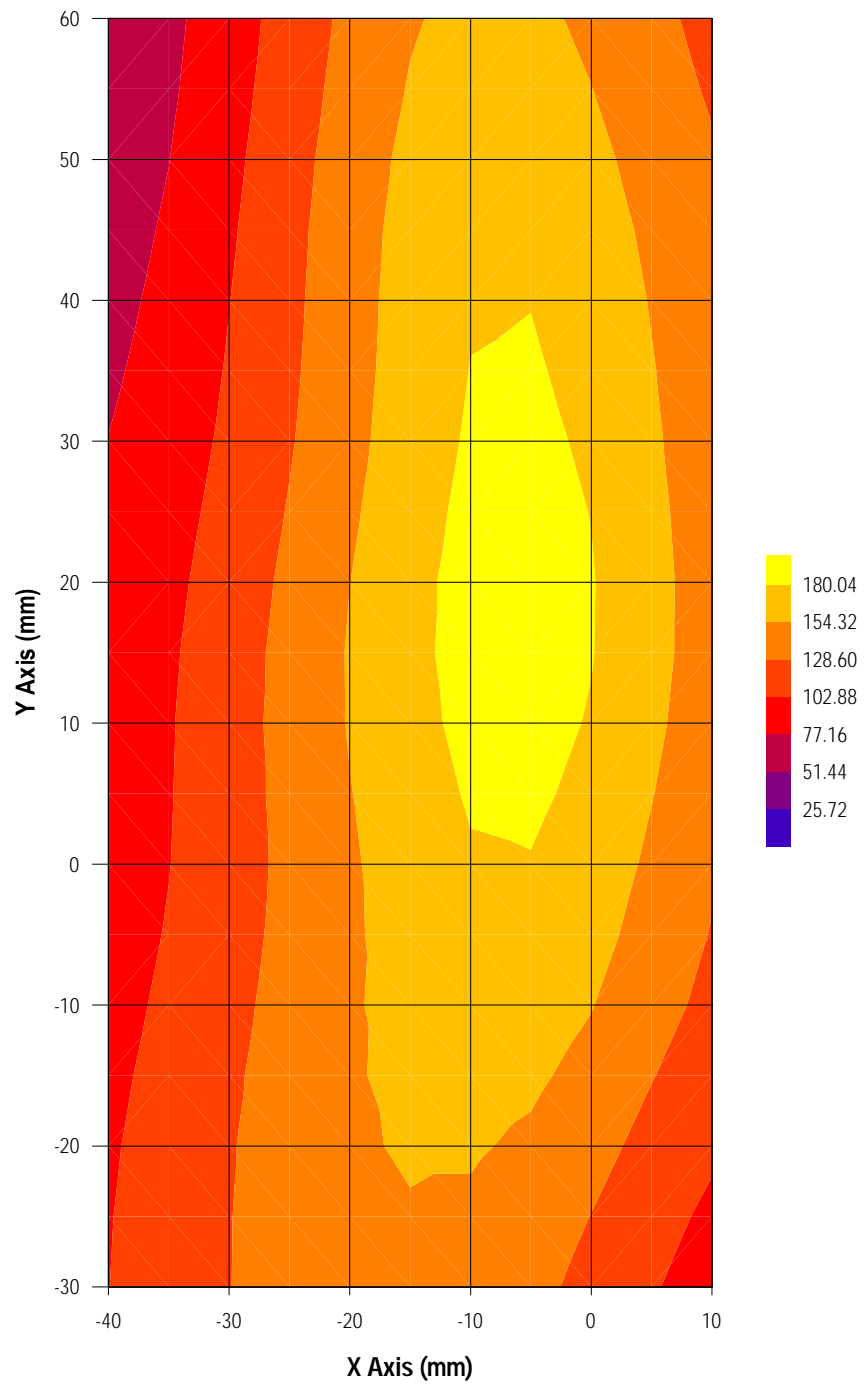

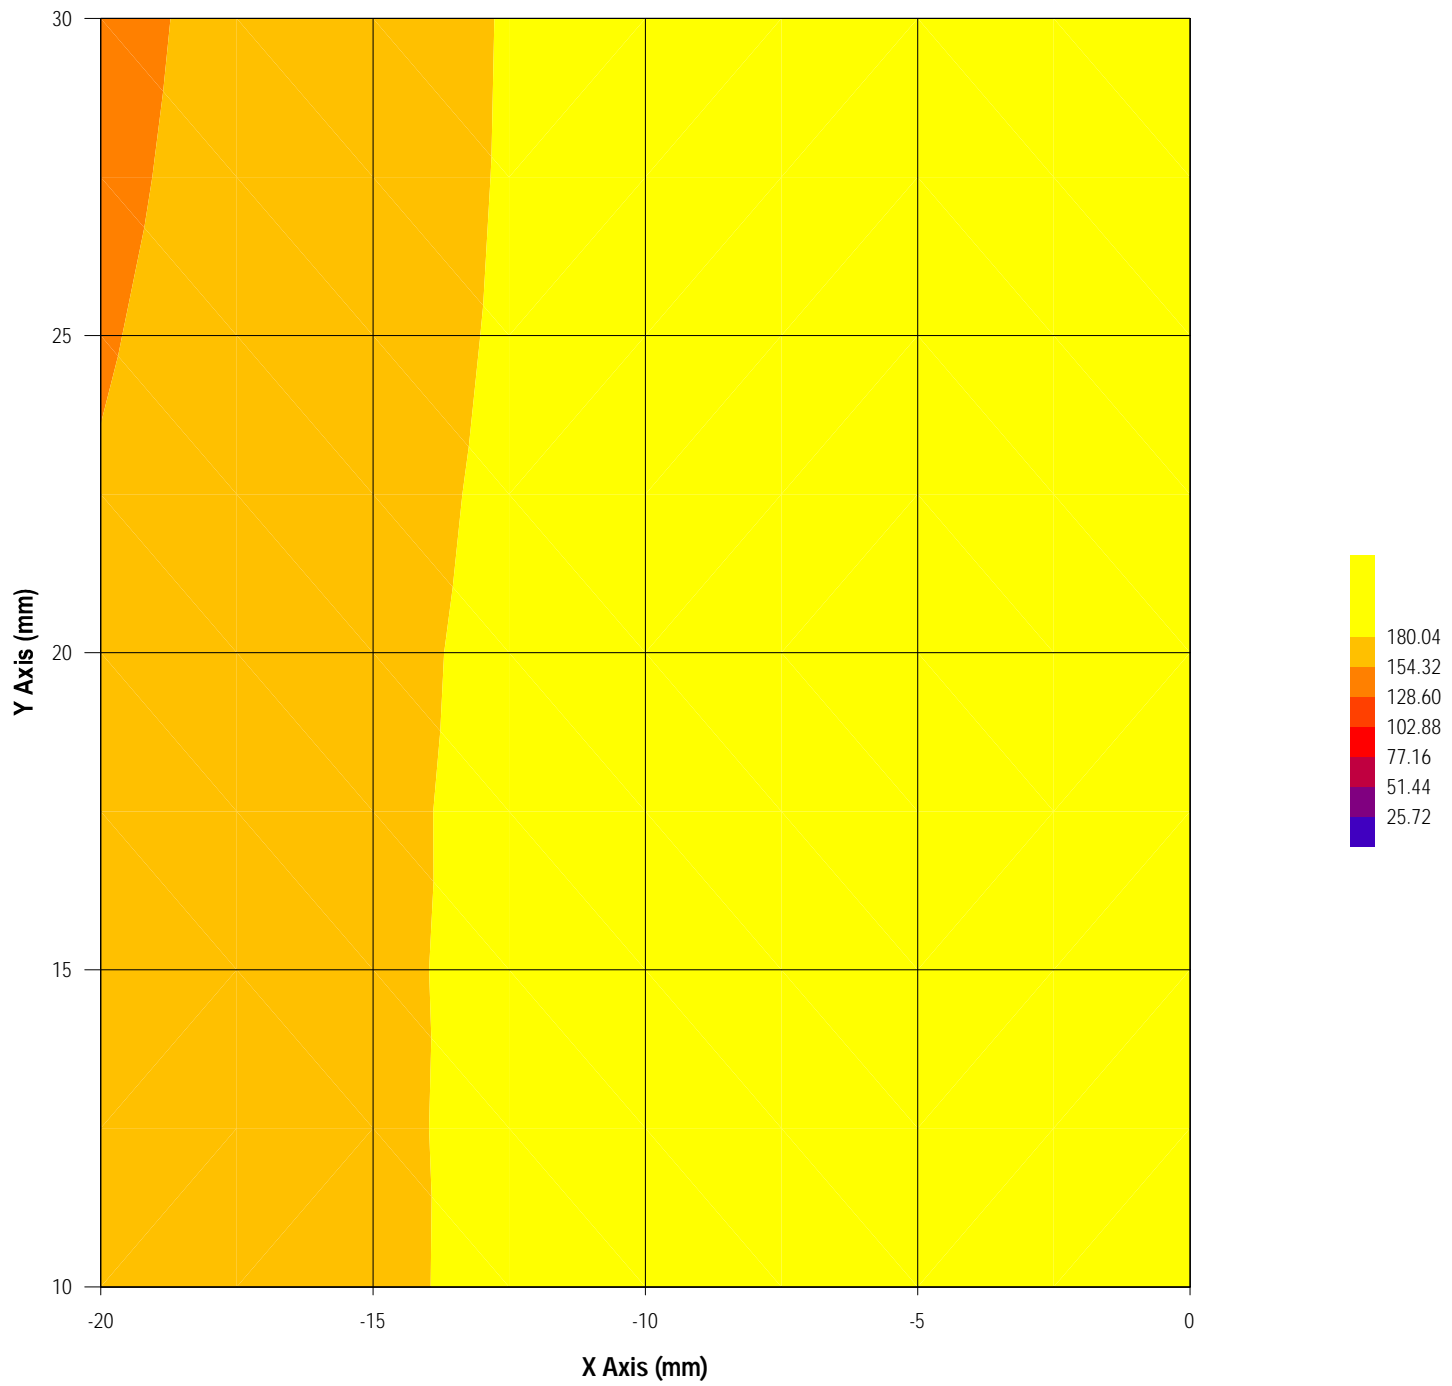



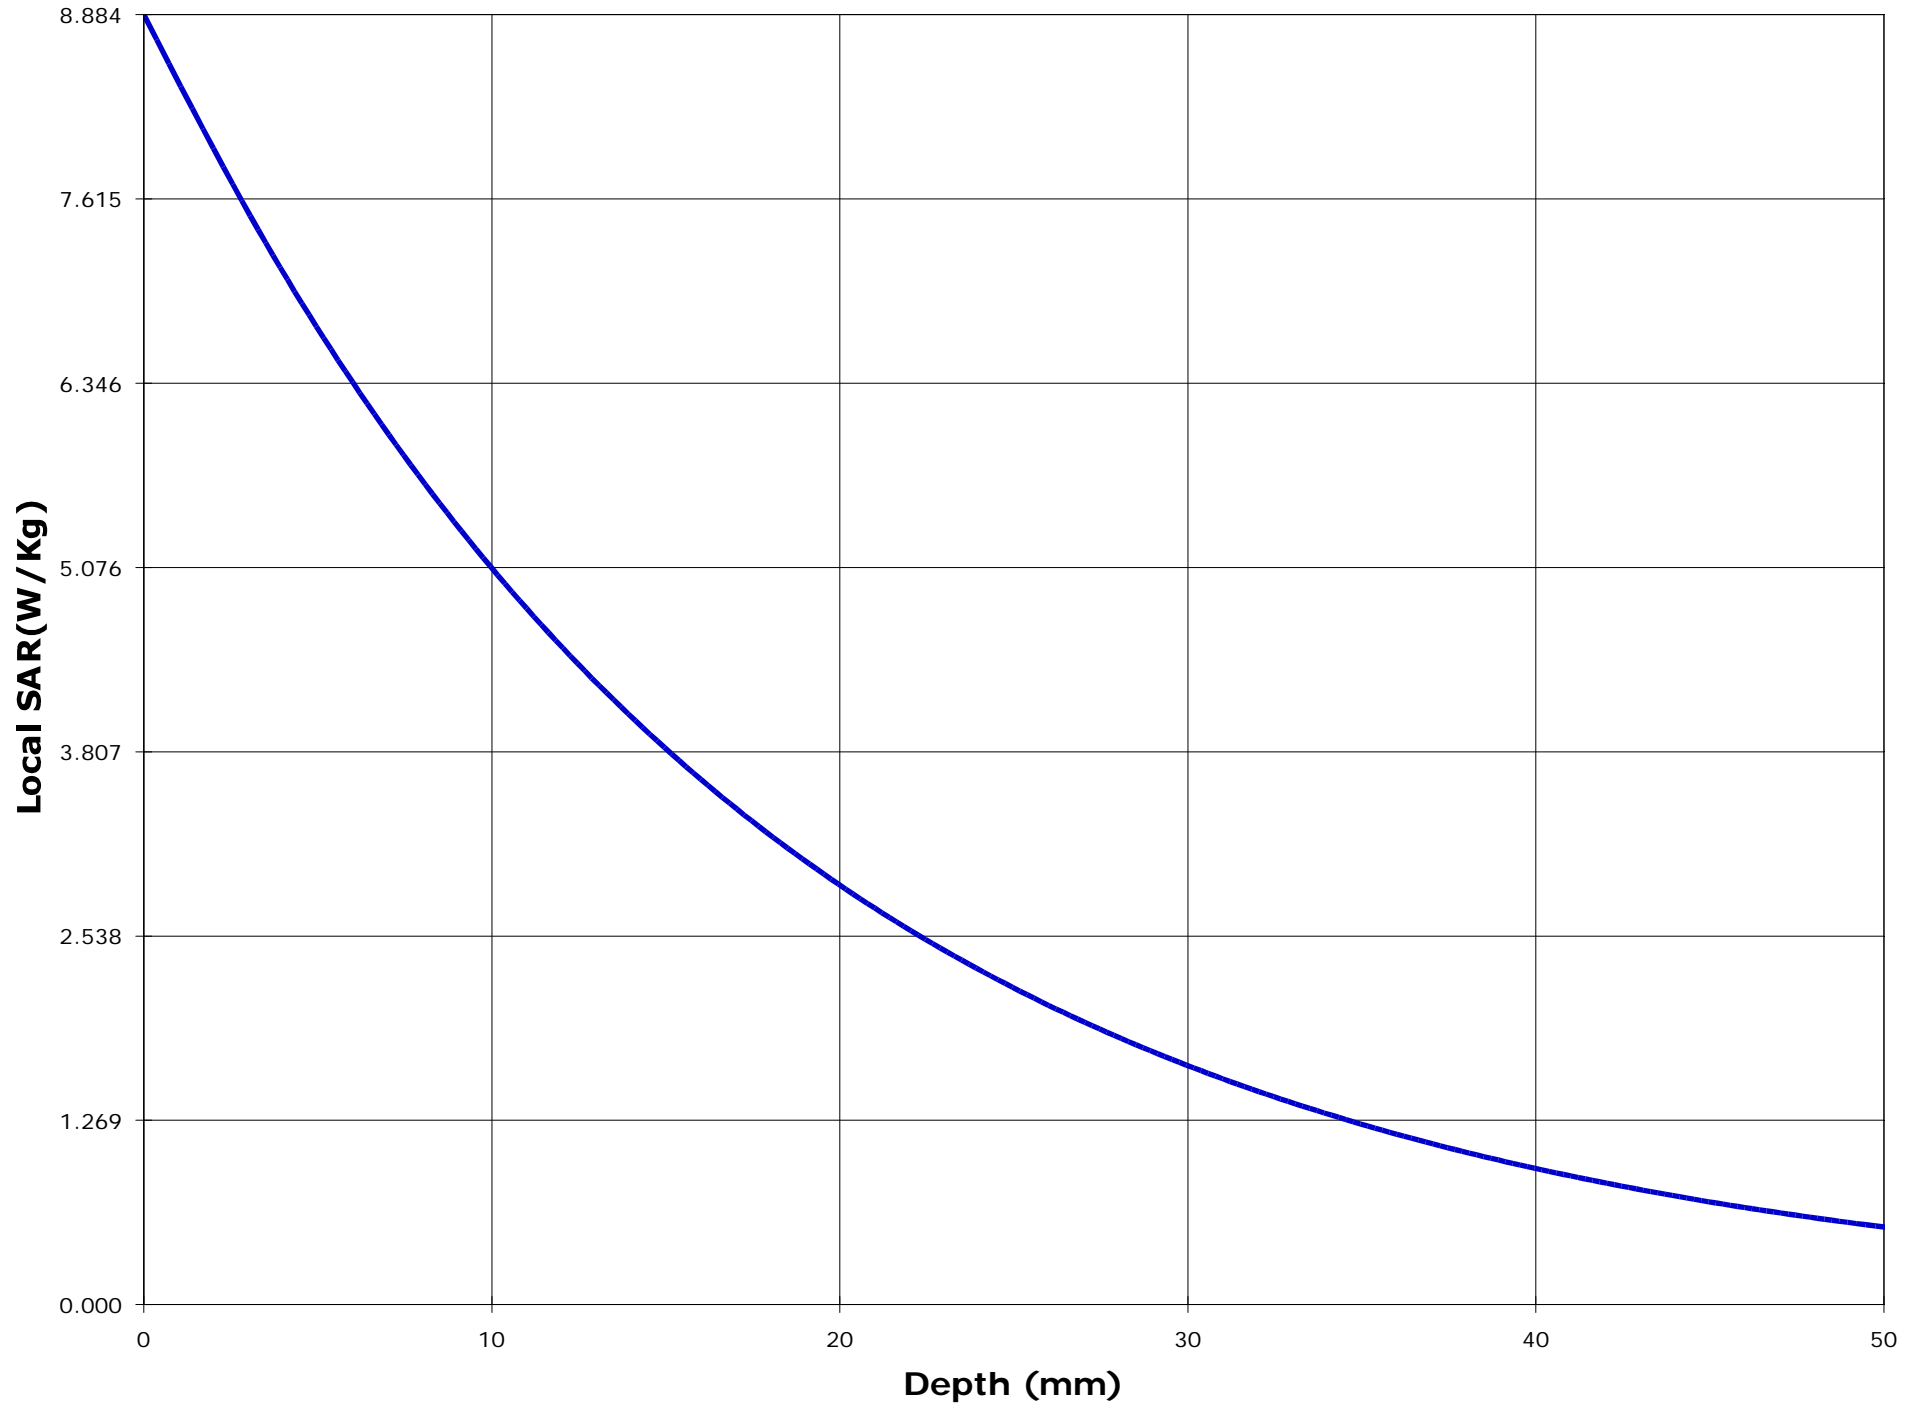

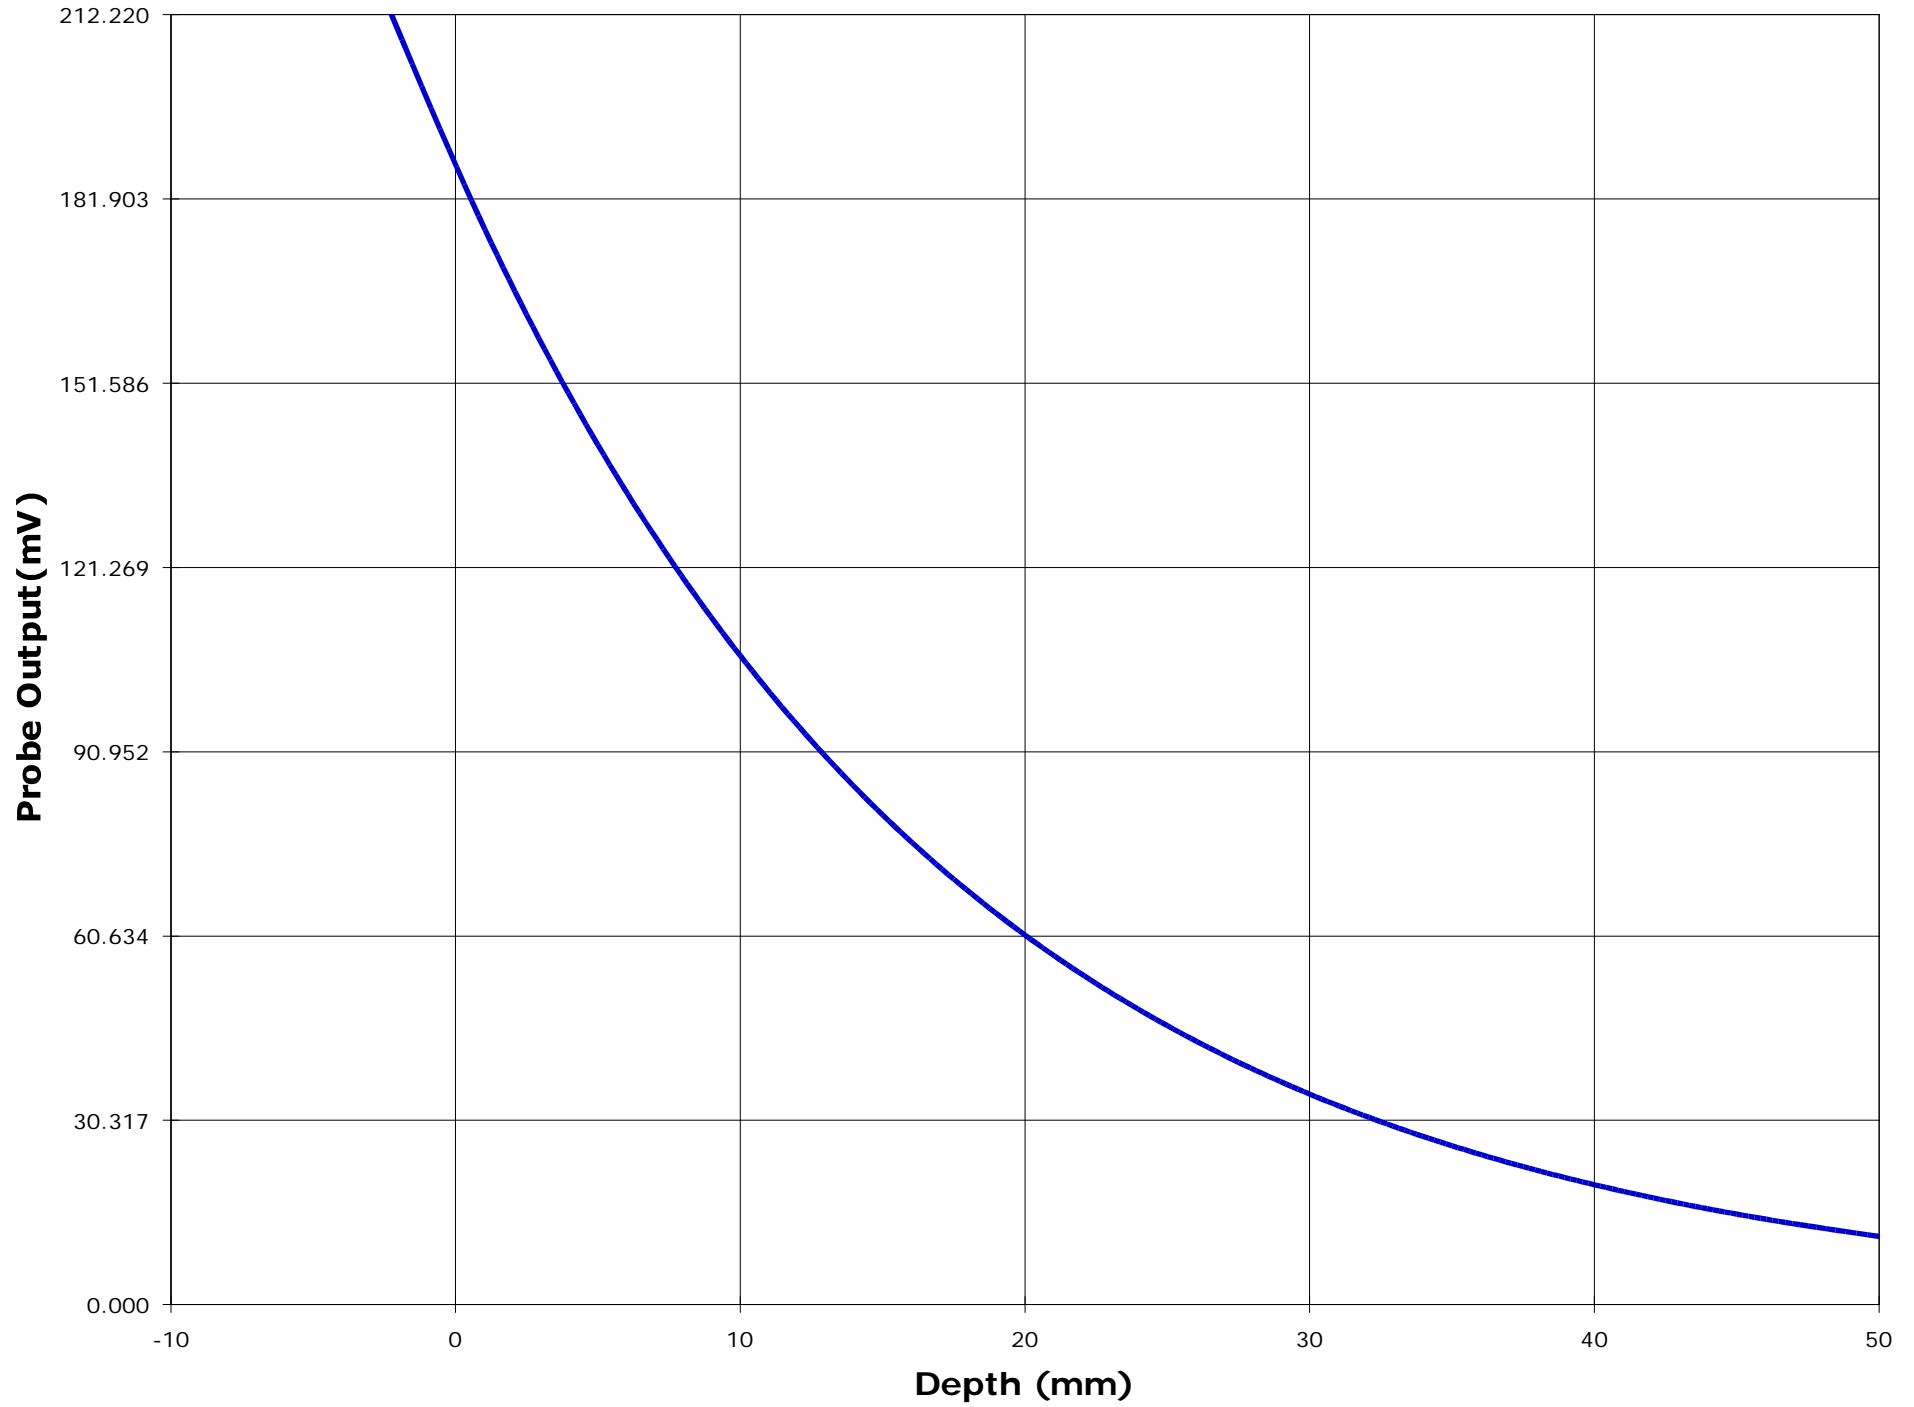

## SPECIFIC ABSORPTION RATIO (SAR)

IEEE C95.1-1991, FCC OET Bulletin 65 (Supplement C), Industry Canada RSS-102(Issue 1) and ACA Radiocommunications (Electromagnetic Radiation – Human Exposure) Amendment Standard 2000 (No. 1)

Page 30

UHF Transceiver, Model No.: IC-F40GT-2

FCC ID: AFJ IC-F40G-2

## ANNEX B: Head-front SAR Measurement

450.05 MHz W	- 1.393(2.785) W/Kg
470.05 MHz W	- 1.257(2.513) W/Kg
489.95 MHz W	- 1.169(2.338) W/Kg
450.05 MHz N	- 1.245(2.490) W/Kg
470.05 MHz N	- 1.155(2.310) W/Kg
489.95 MHz N	- 1.113(2.225) W/Kg

\* The SAR Measurement inside the parenthesis indicates the reading before 50 % duty factor is applied for the half-duplex type PTT.

### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

File #: ICOM-017-SAR

November 20, 2000

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Test Information

Date : 11/10/00  
Time : 4:07:25 PM

Product : UHF Transceiver  
Manufacturer : ICOM Incorporated  
Model Number : IC-F40GT-2  
Serial Number : 0002  
FCC ID Number : AFJ IC-F40G-2

Test : SAR  
Frequency (MHz) : 450.05 W  
Nominal Output Power (W) : 4.0  
Antenna Type : Monopole  
Signal : CW

Phantom : Head - Front  
Simulated Tissue : Brain

Dielectric Constant : 58.1  
Conductivity : 0.82

Probe : ETR\_225\_1\_999  
Probe Offset (mm) : 2.250  
Sensor Factor (mV) : 10.8  
Conversion Factor : 0.316  
Calibrated Date : 10/7/99

Antenna Position : FIX  
Measured Power (W) : 3.96  
(conducted)  
Cable Insertion Loss (dB) : 0.1  
Compensated Power (W) : 4.052

Amplifier Setting :

Channel 1 : 0.0070      Channel 2 : 0.0067      Channel 3 : 0.0081



Location of Maximum Field :


X = 0                      Y = 80


Measured Values (mV) :


117.522    119.403    107.581    94.160    84.201    76.635  
69.926    63.965    58.800    55.376    51.158

Peak Voltage (mV) : 121.955      1 Cm Voltage (mV) : 70.040      SAR (W/Kg) : 2.785

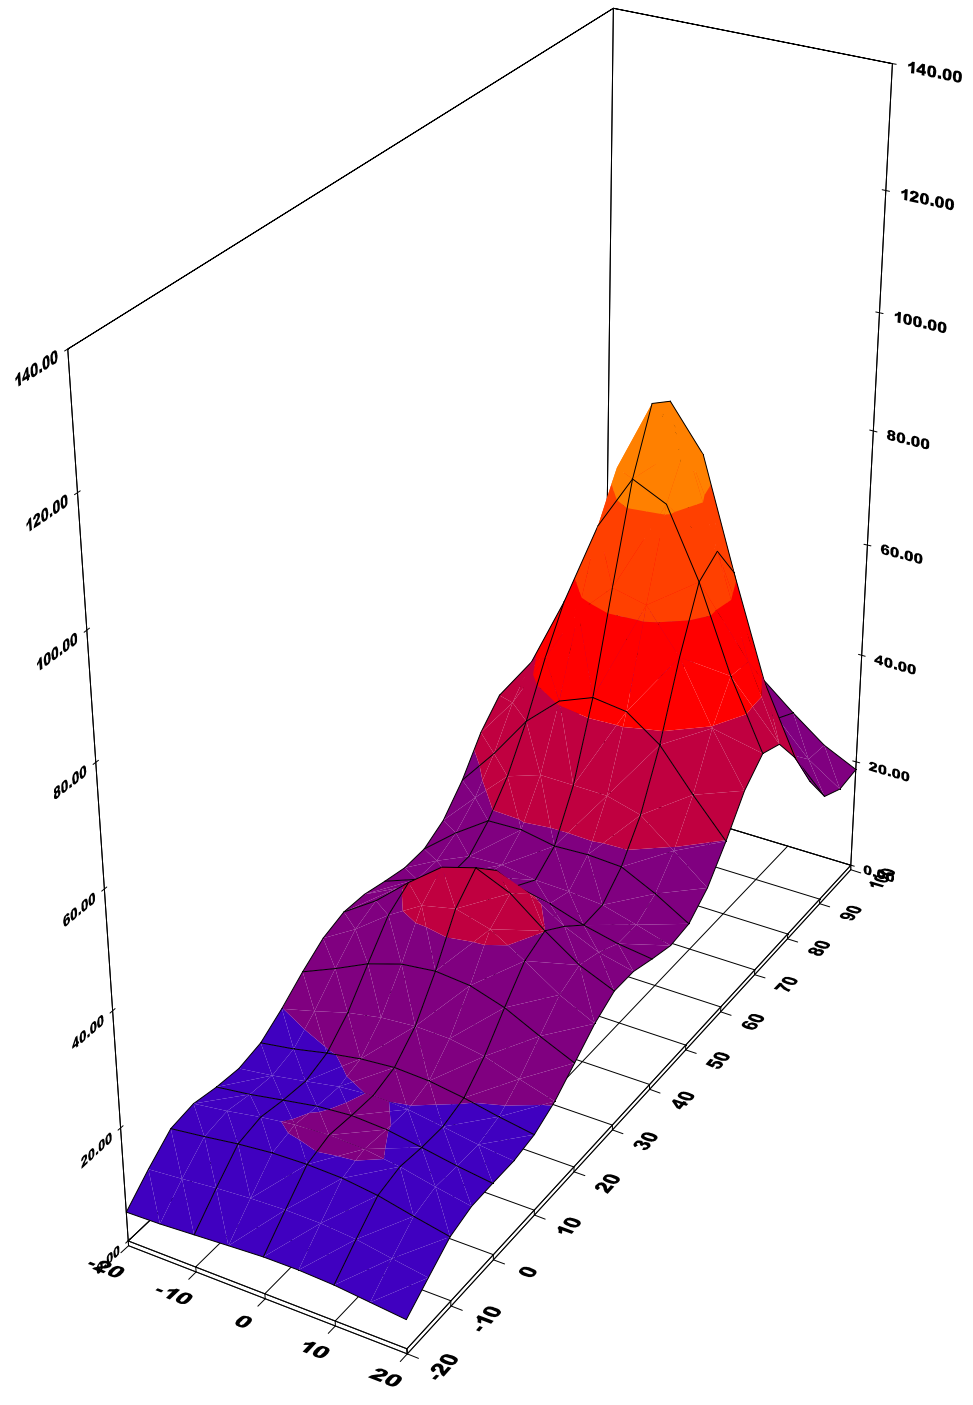


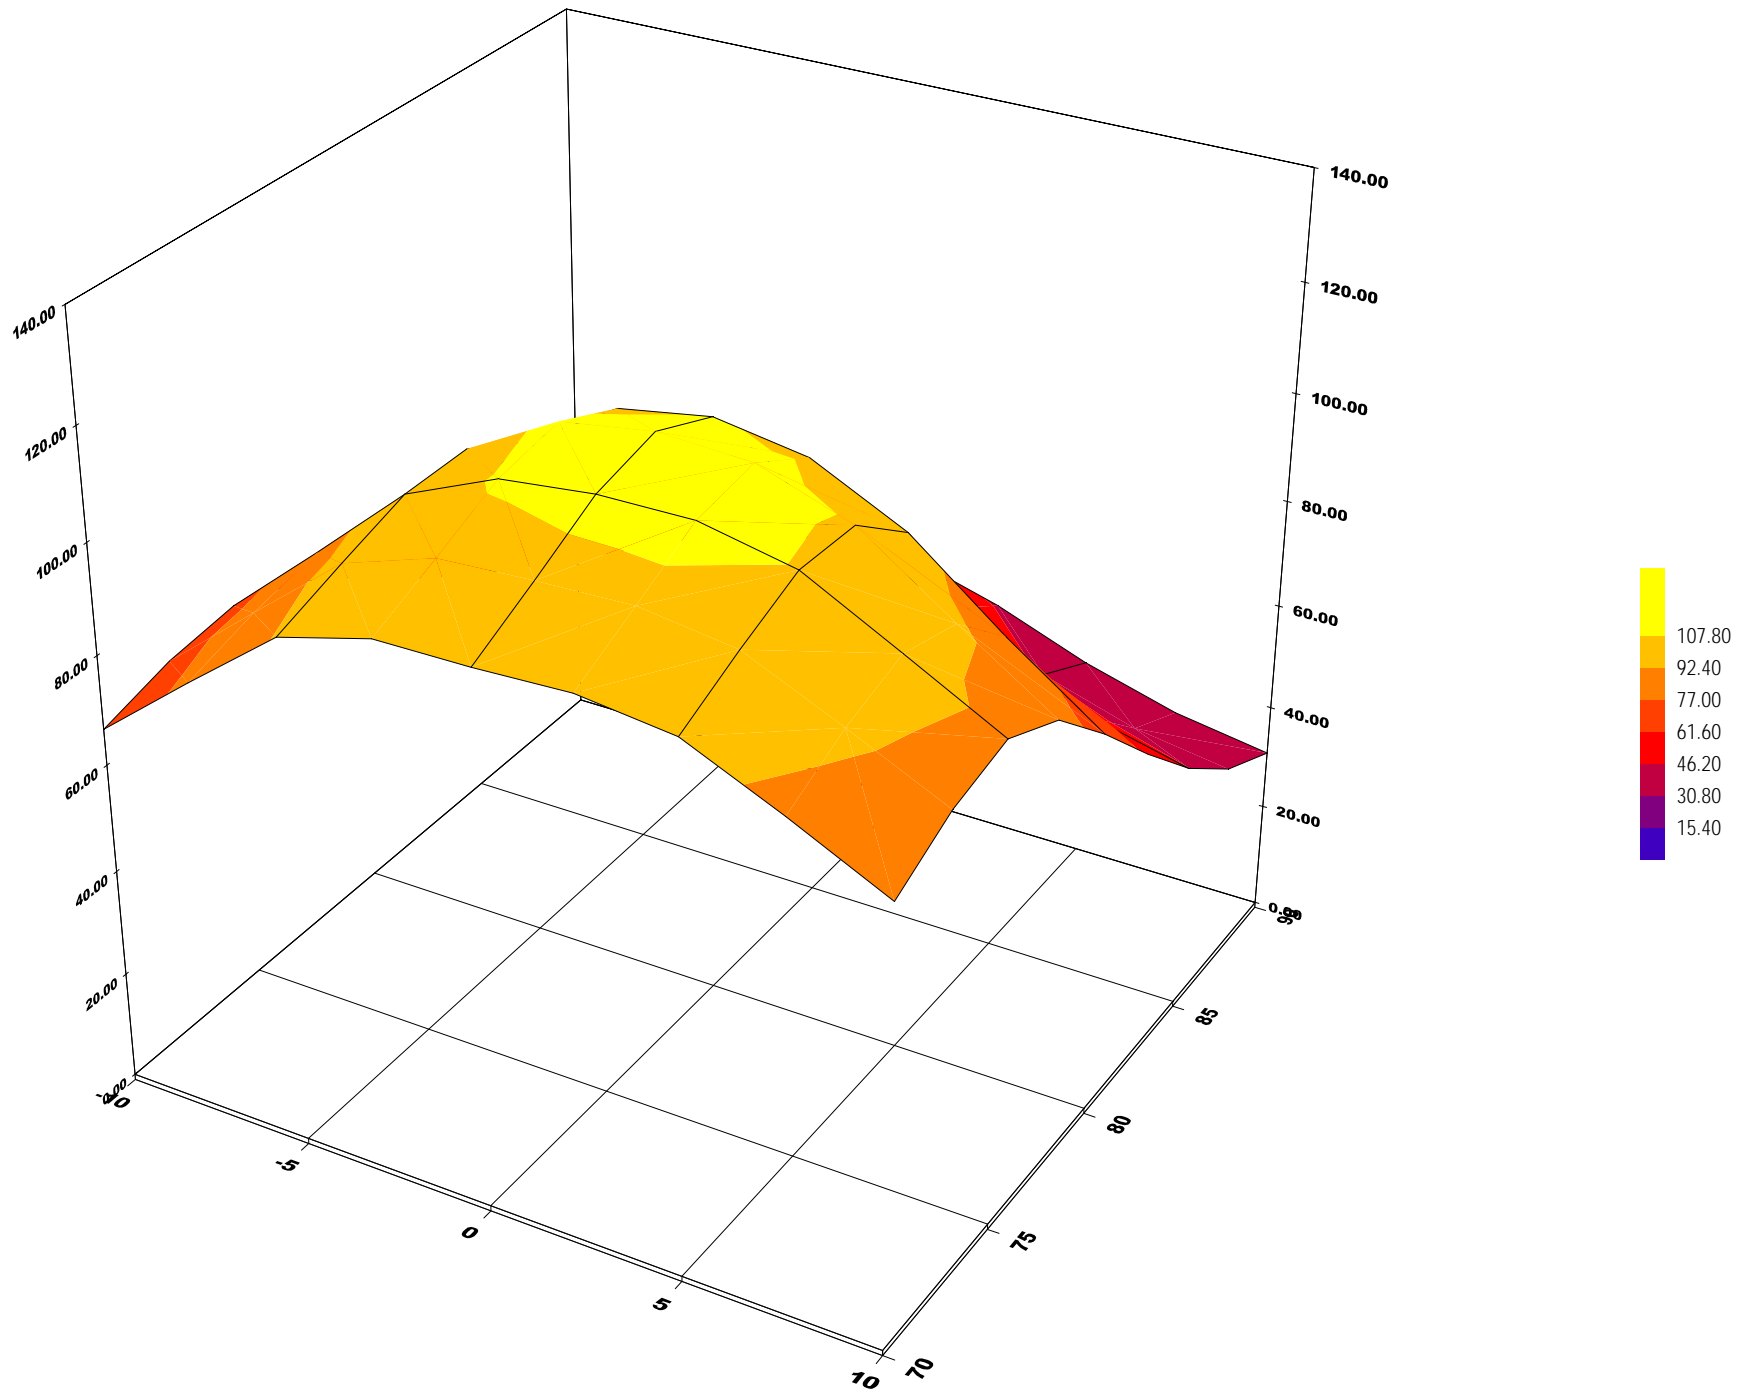


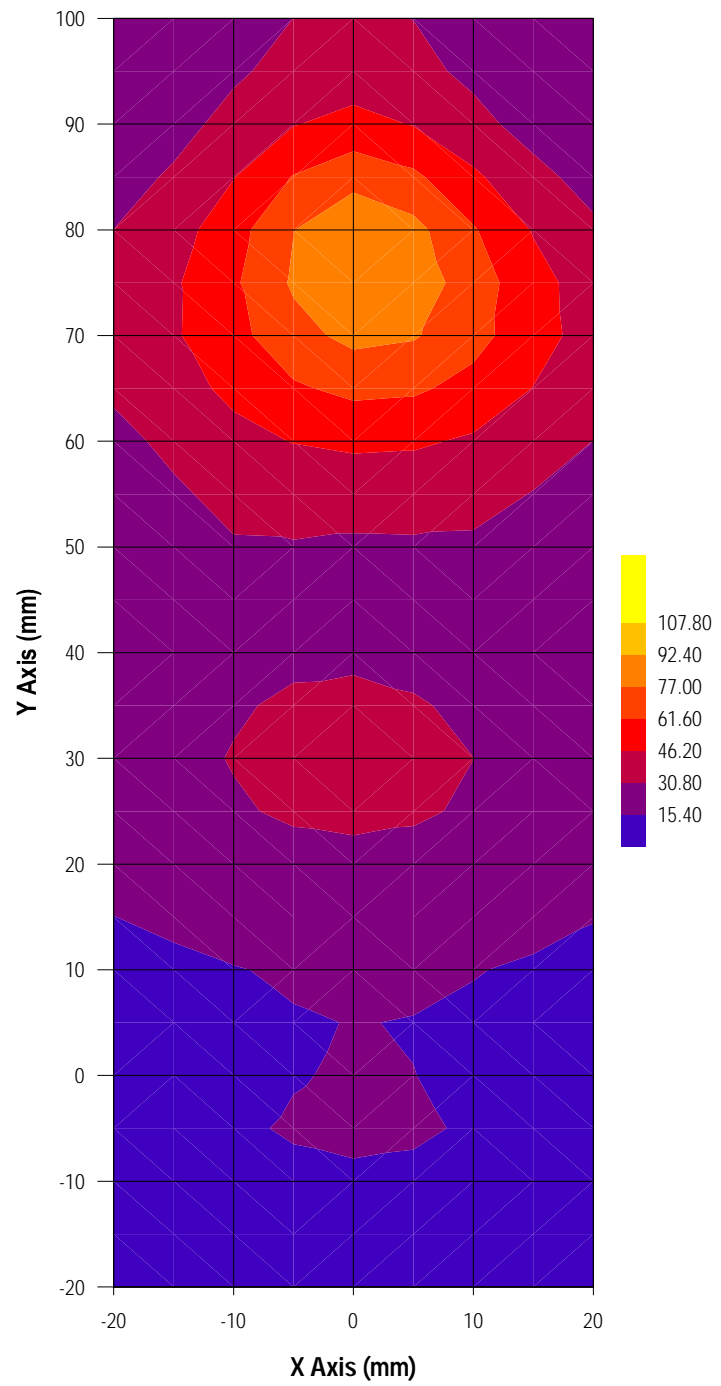

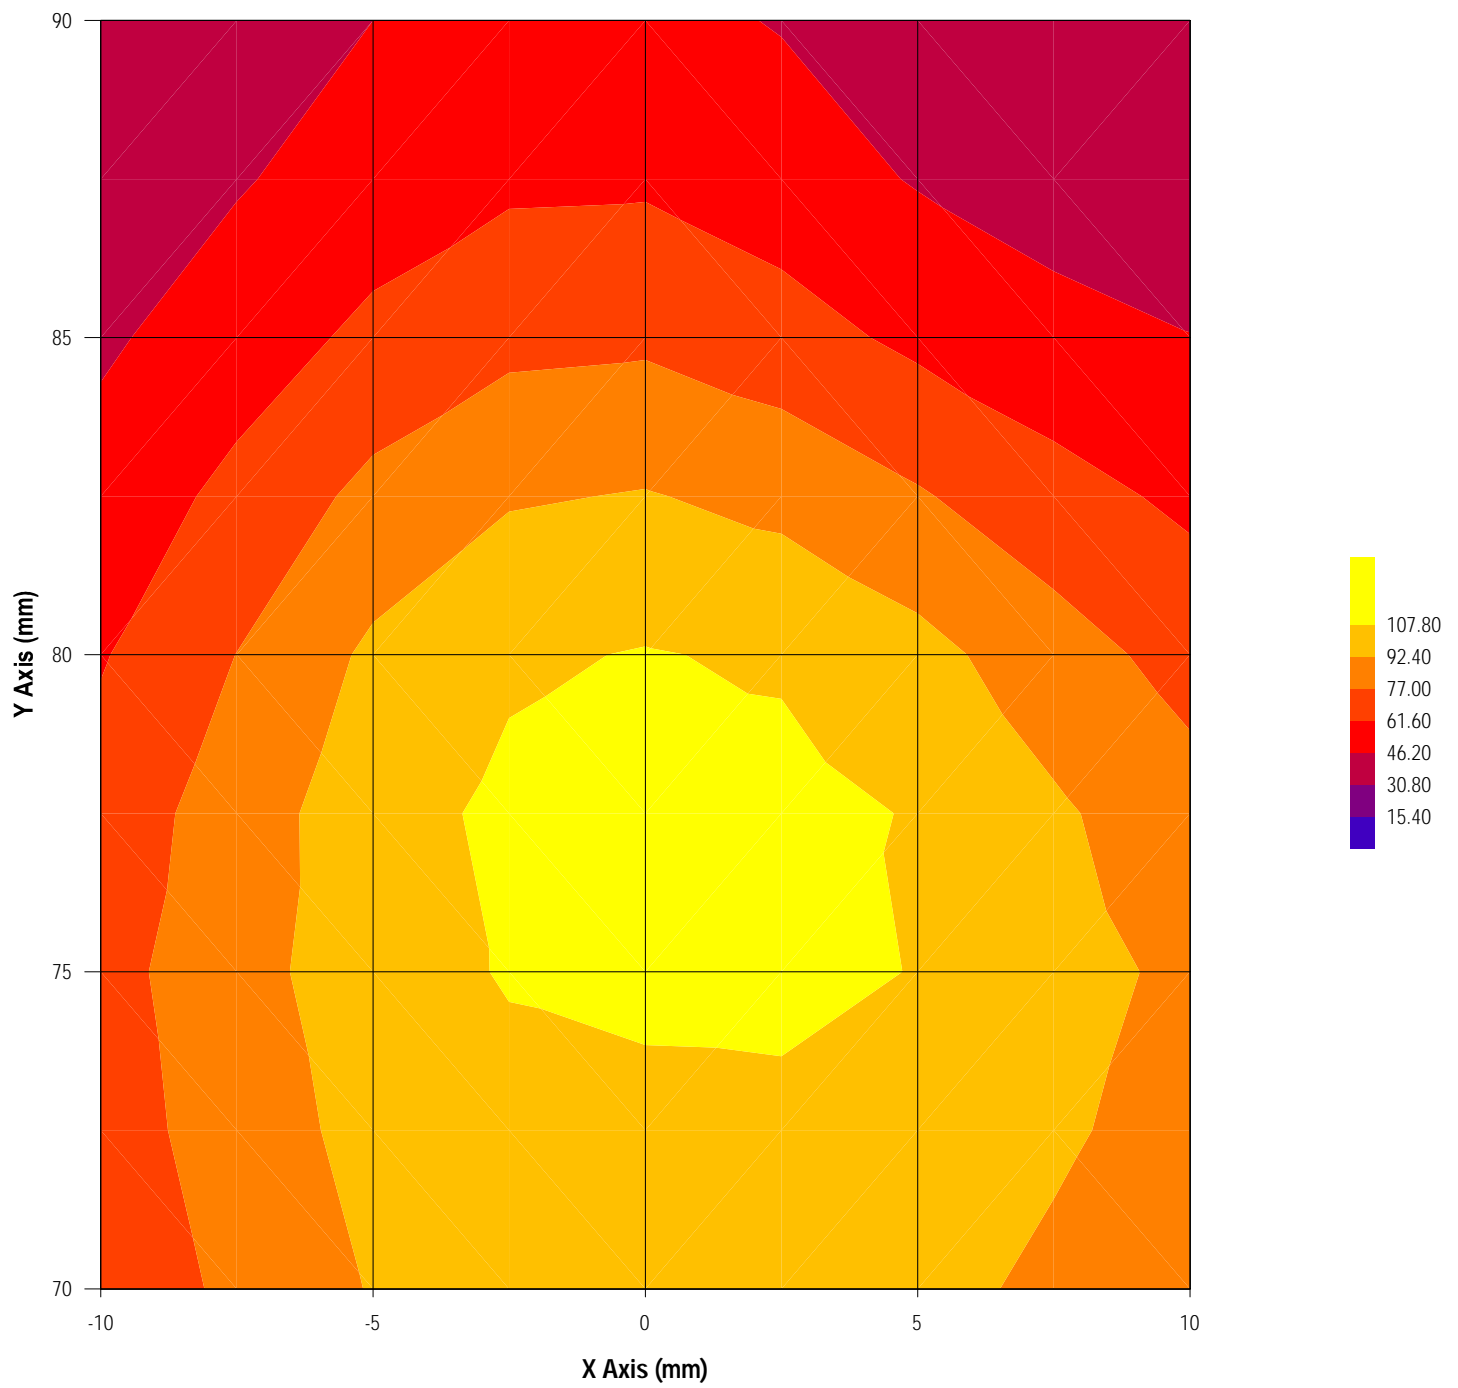



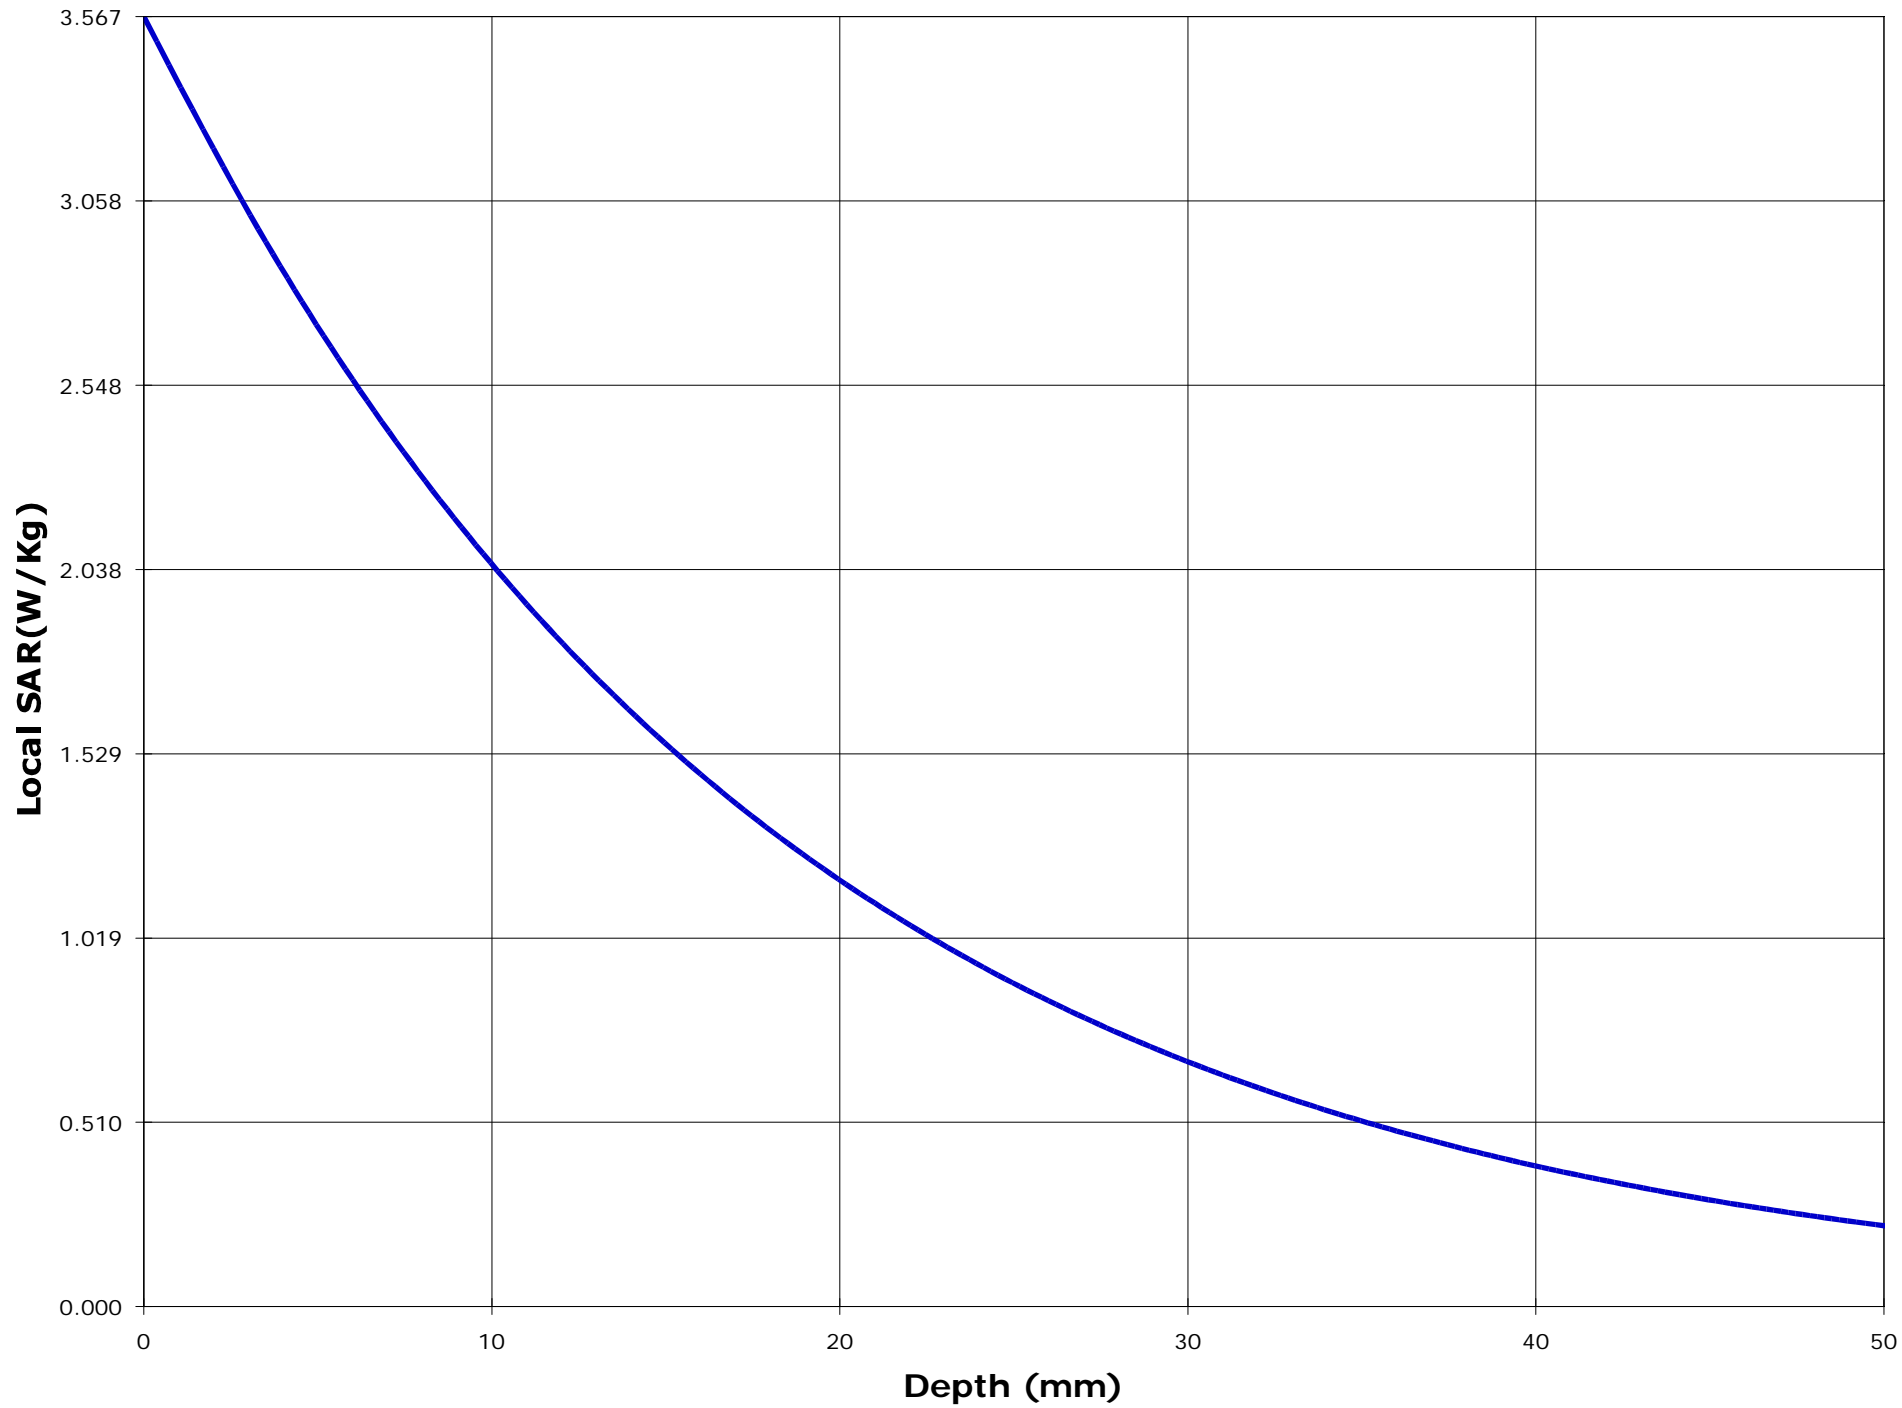

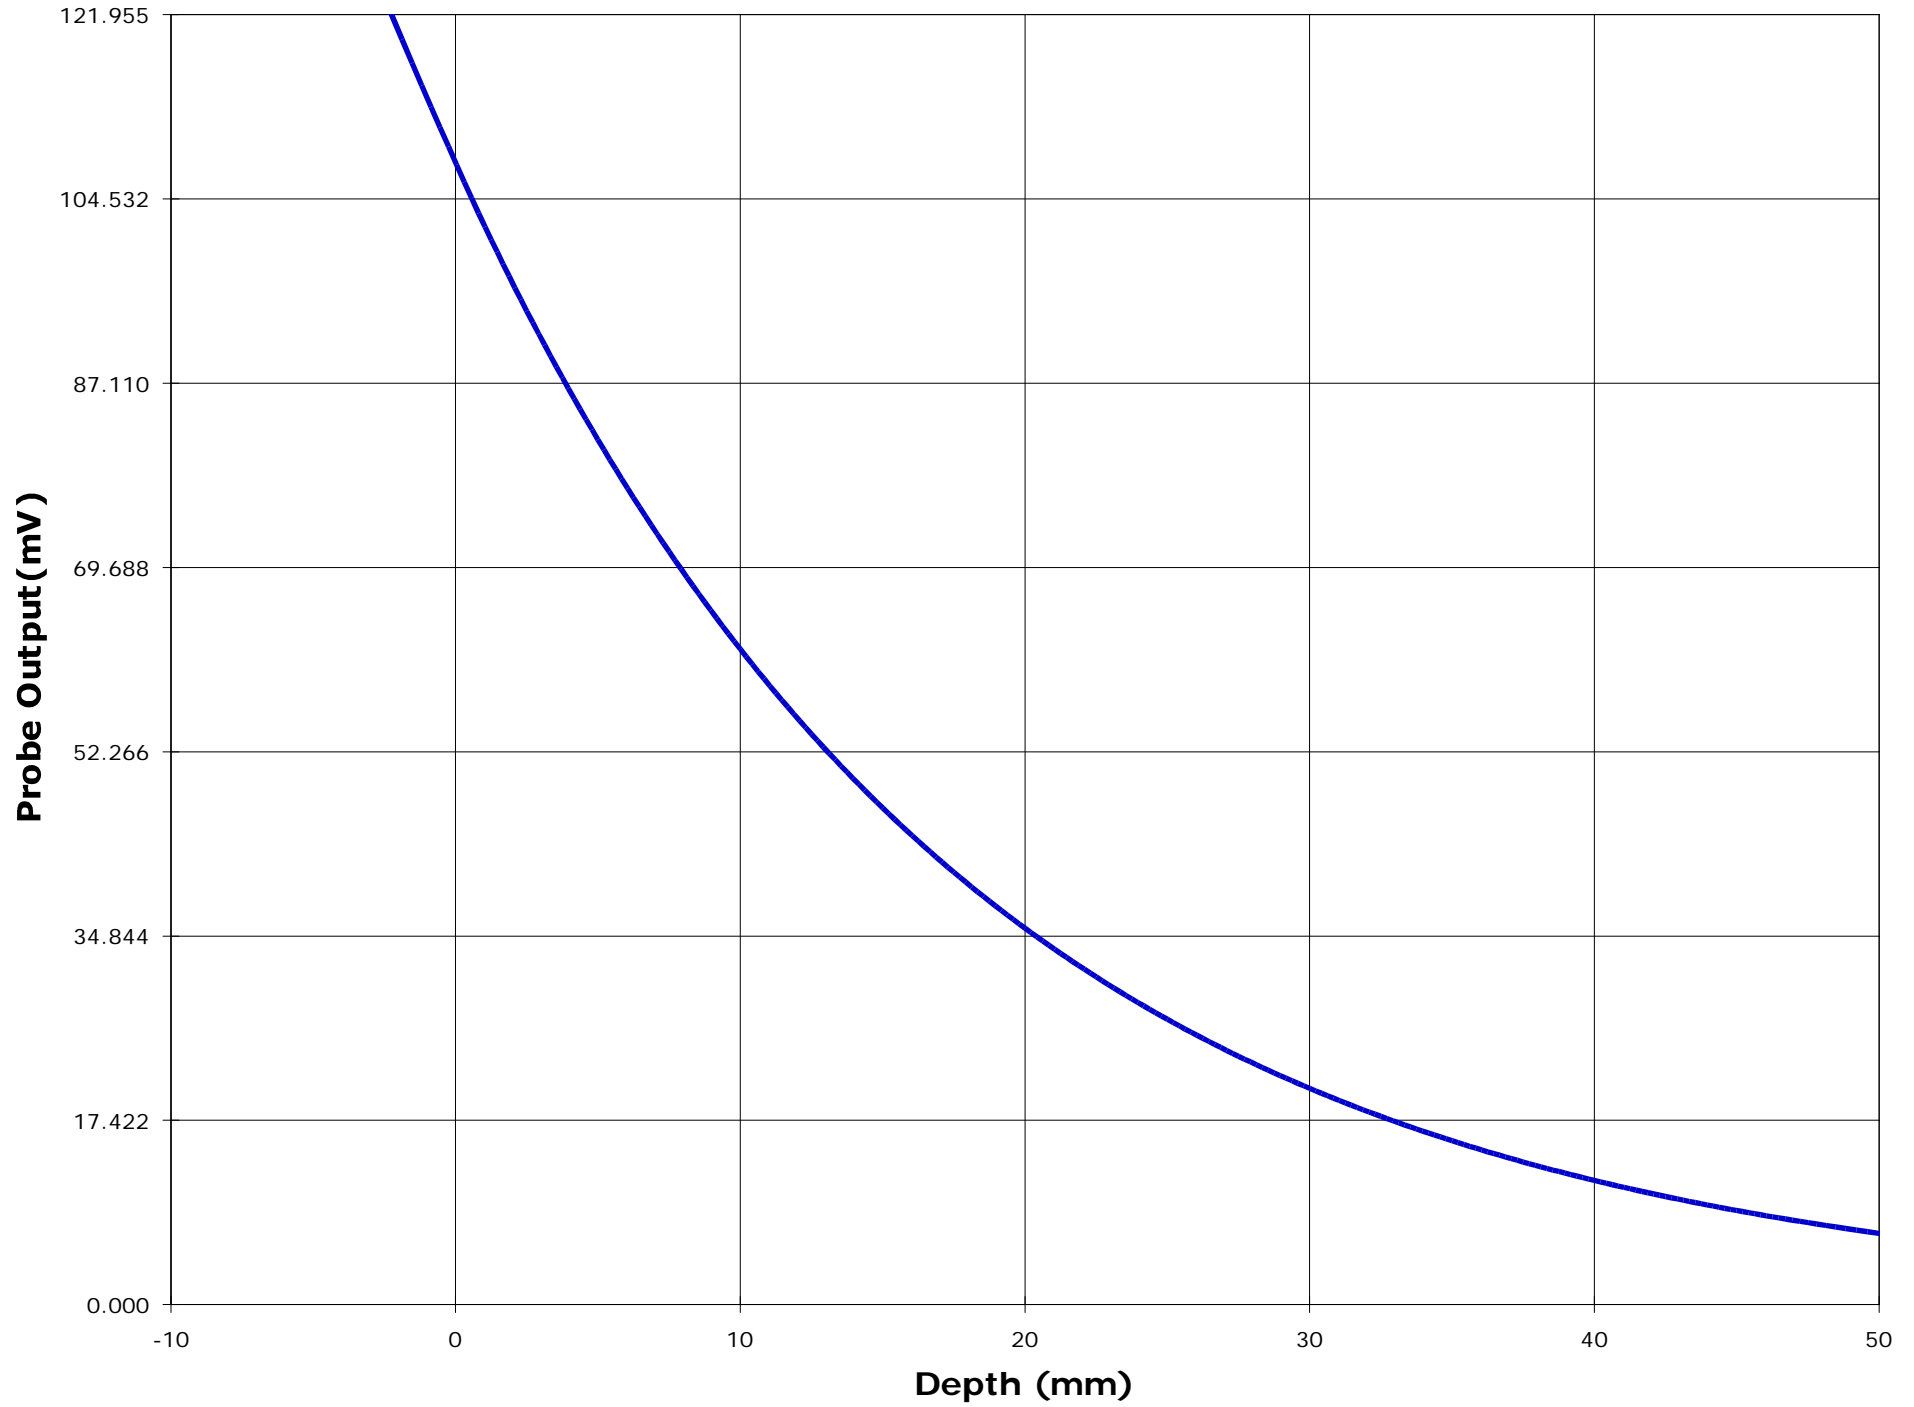

Test Information

Date : 11/10/00  
Time : 5:08:06 PM

Product : UHF Transceiver  
Manufacturer : ICOM Incorporated  
Model Number : IC-F40GT-2  
Serial Number : 0002  
FCC ID Number : AFJ IC-F40G-2

Test : SAR  
Frequency (MHz) : 470.05 W  
Nominal Output Power (W) : 4.0  
Antenna Type : Monopole  
Signal : CW

Phantom : Head - Front  
Simulated Tissue : Brain

Dielectric Constant : 58.1  
Conductivity : 0.82

Probe : ETR\_225\_1\_999  
Probe Offset (mm) : 2.250  
Sensor Factor (mV) : 10.8  
Conversion Factor : 0.316  
Calibrated Date : 10/7/99

Antenna Position : FIX  
Measured Power (W) : 3.97  
(conducted)  
Cable Insertion Loss (dB) : 0.1  
Compensated Power (W) : 4.062

Amplifier Setting :

Channel 1 : 0.0070      Channel 2 : 0.0067      Channel 3 : 0.0081



Location of Maximum Field :


X = 5                      Y = 80


Measured Values (mV) :


109.706    108.048    102.944    91.265    81.824    74.548  
68.352    63.356    58.569    54.233    50.477


Peak Voltage (mV) : 118.715      1 Cm Voltage (mV) : 66.355      SAR (W/Kg) : 2.513

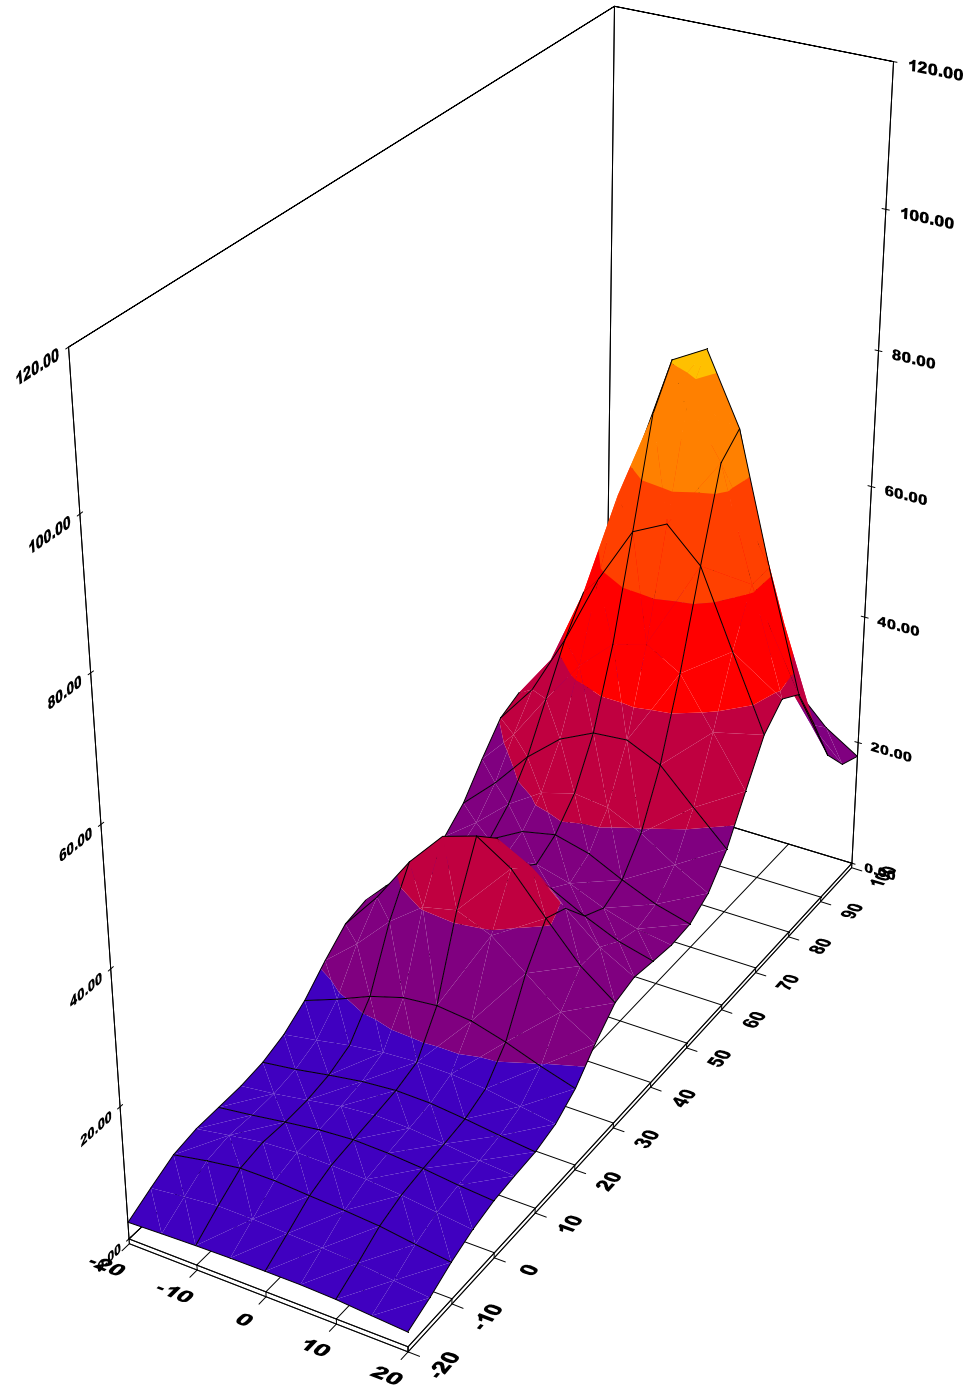

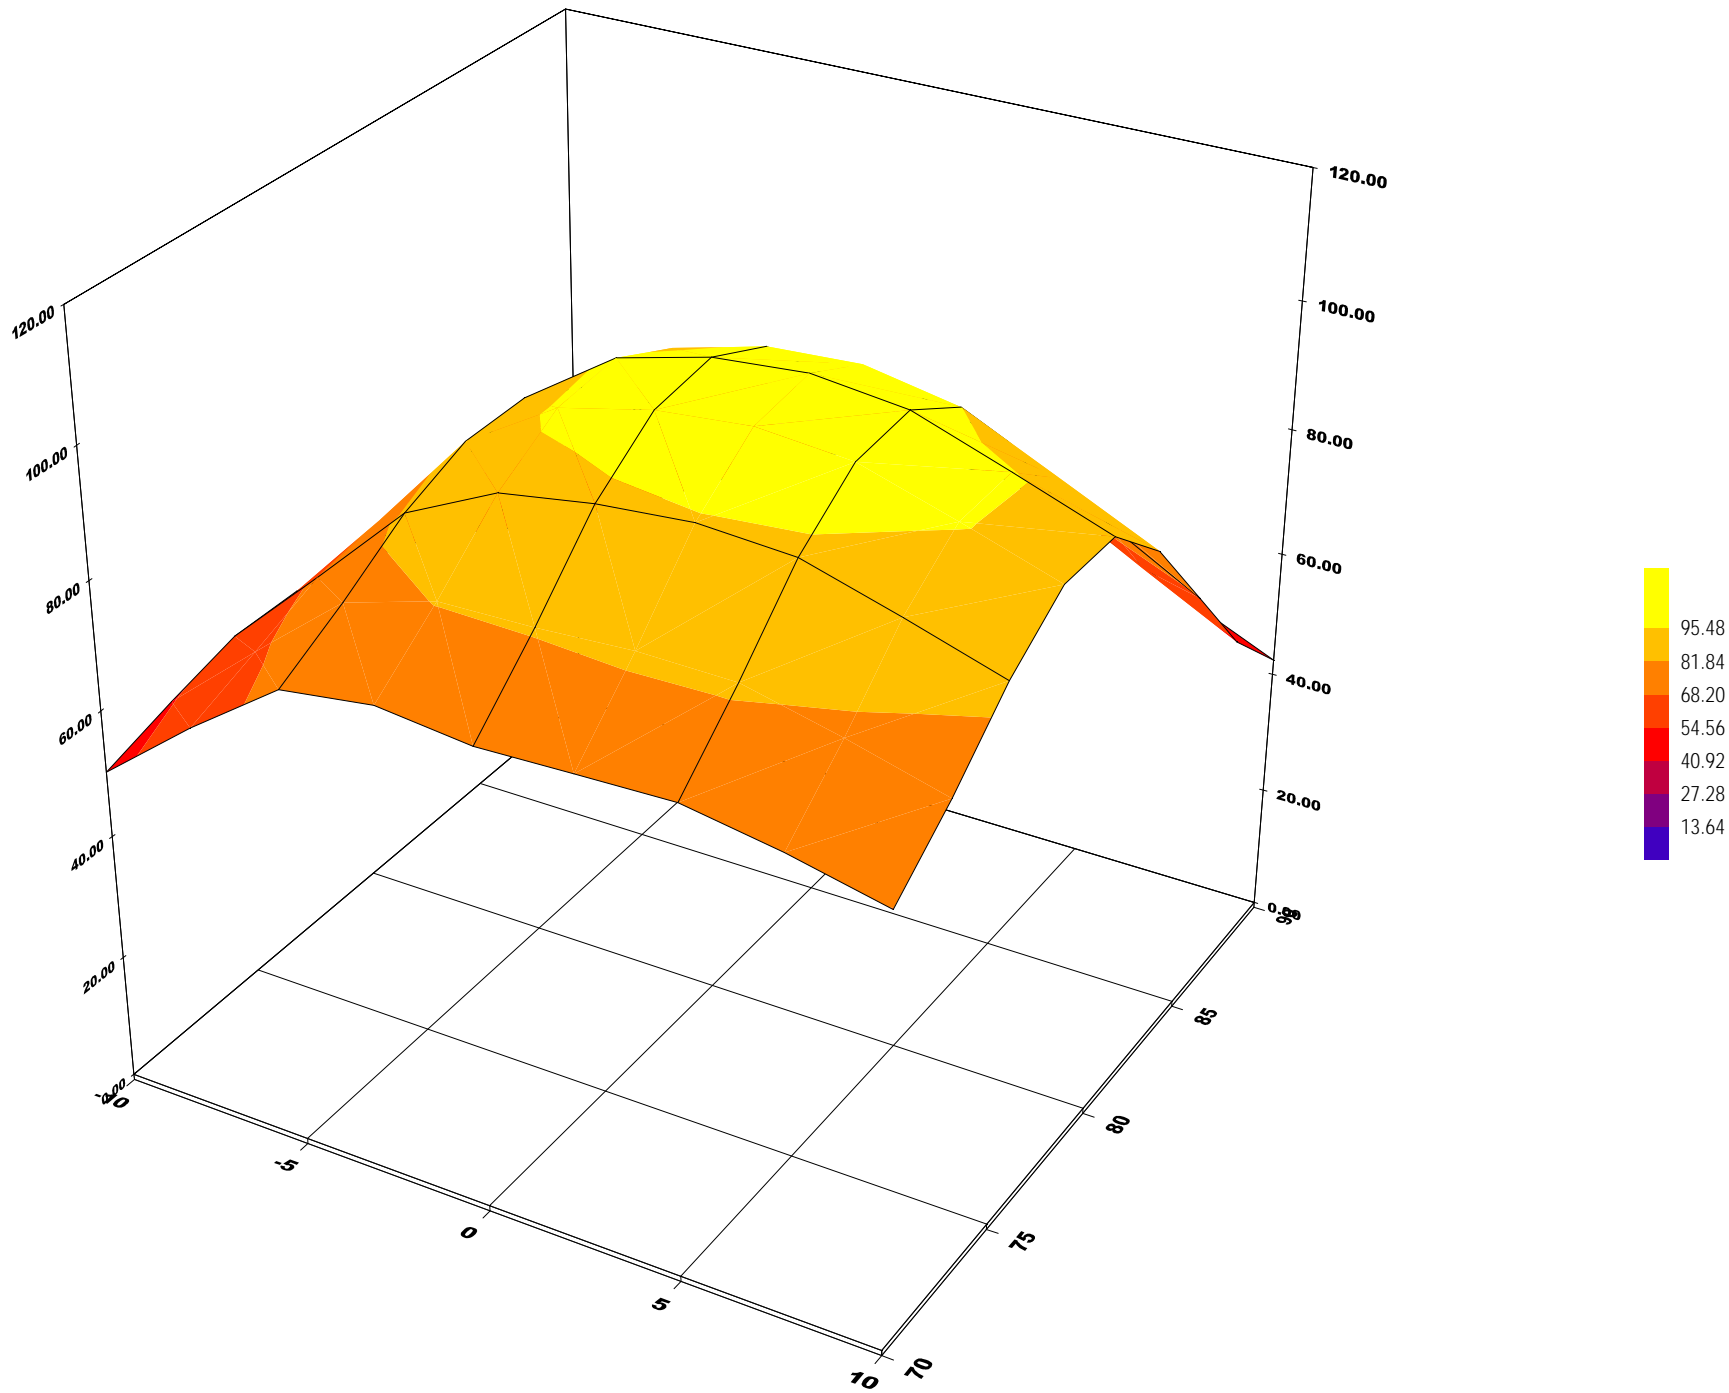


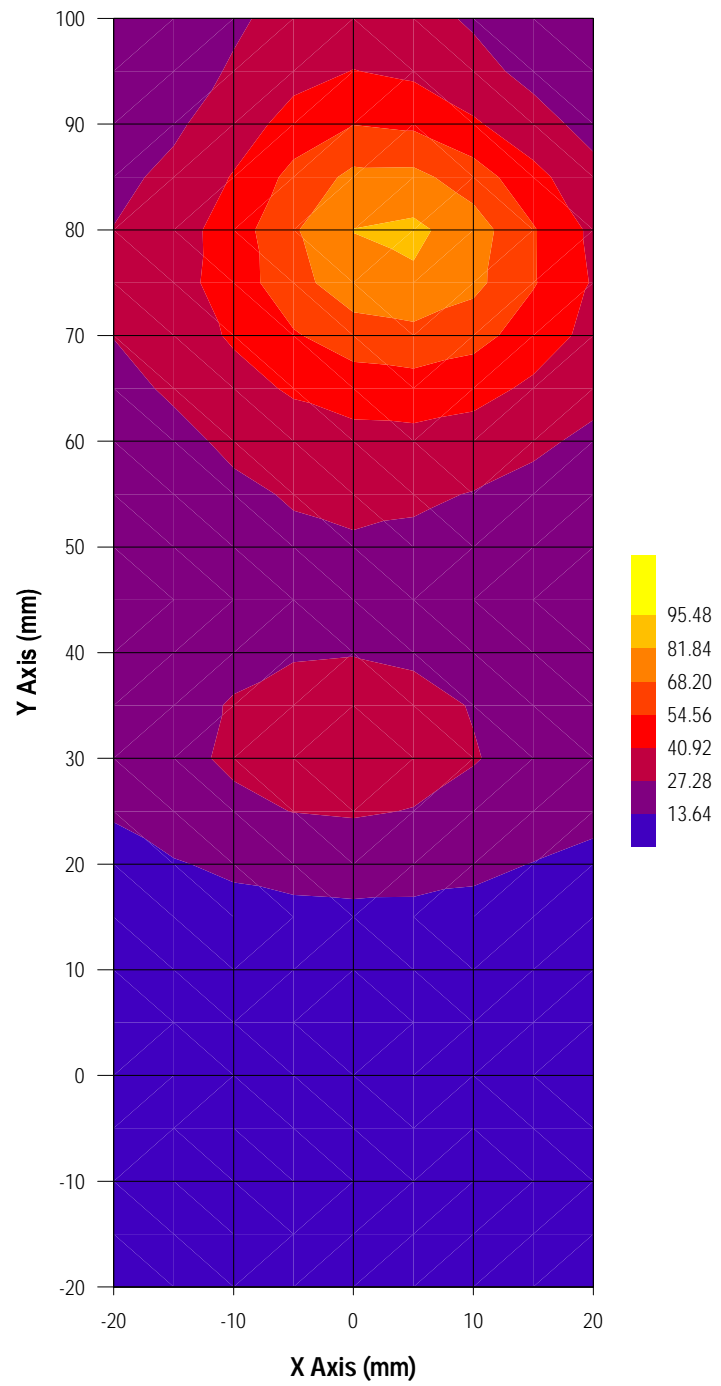

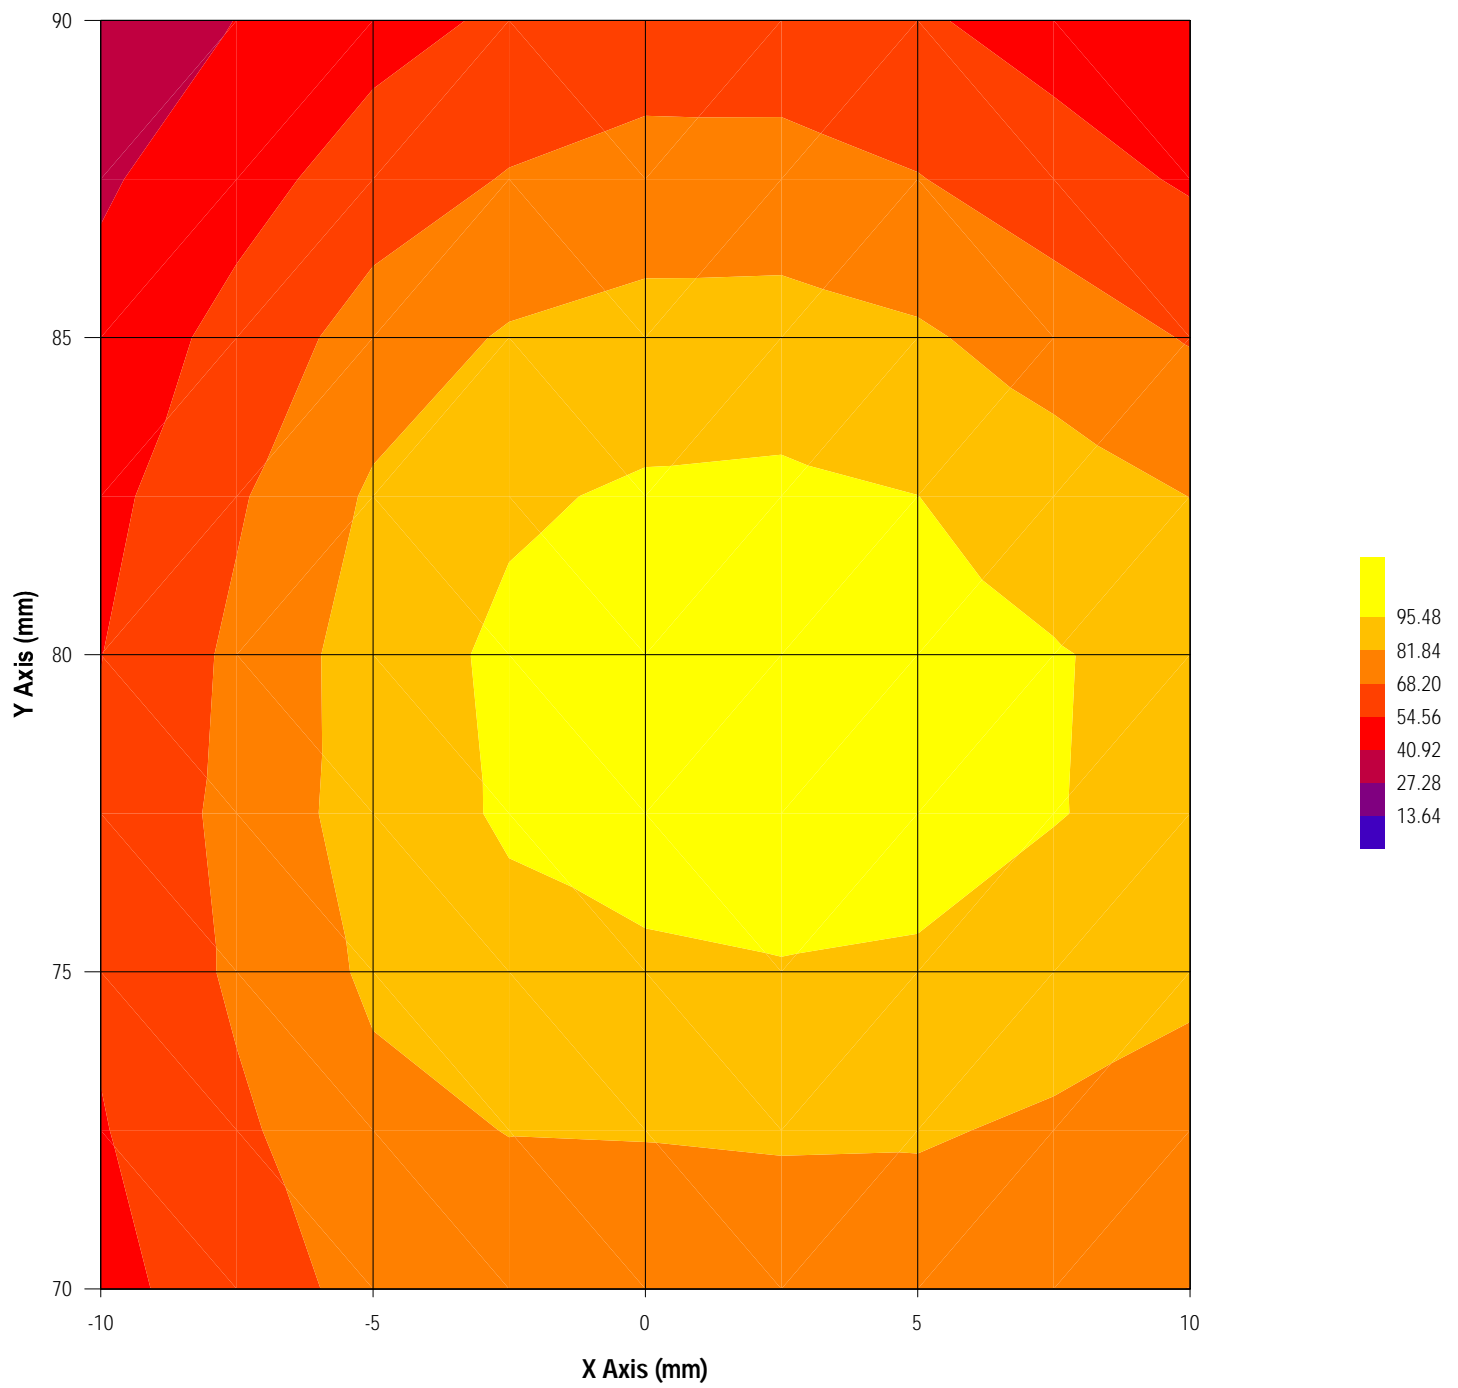

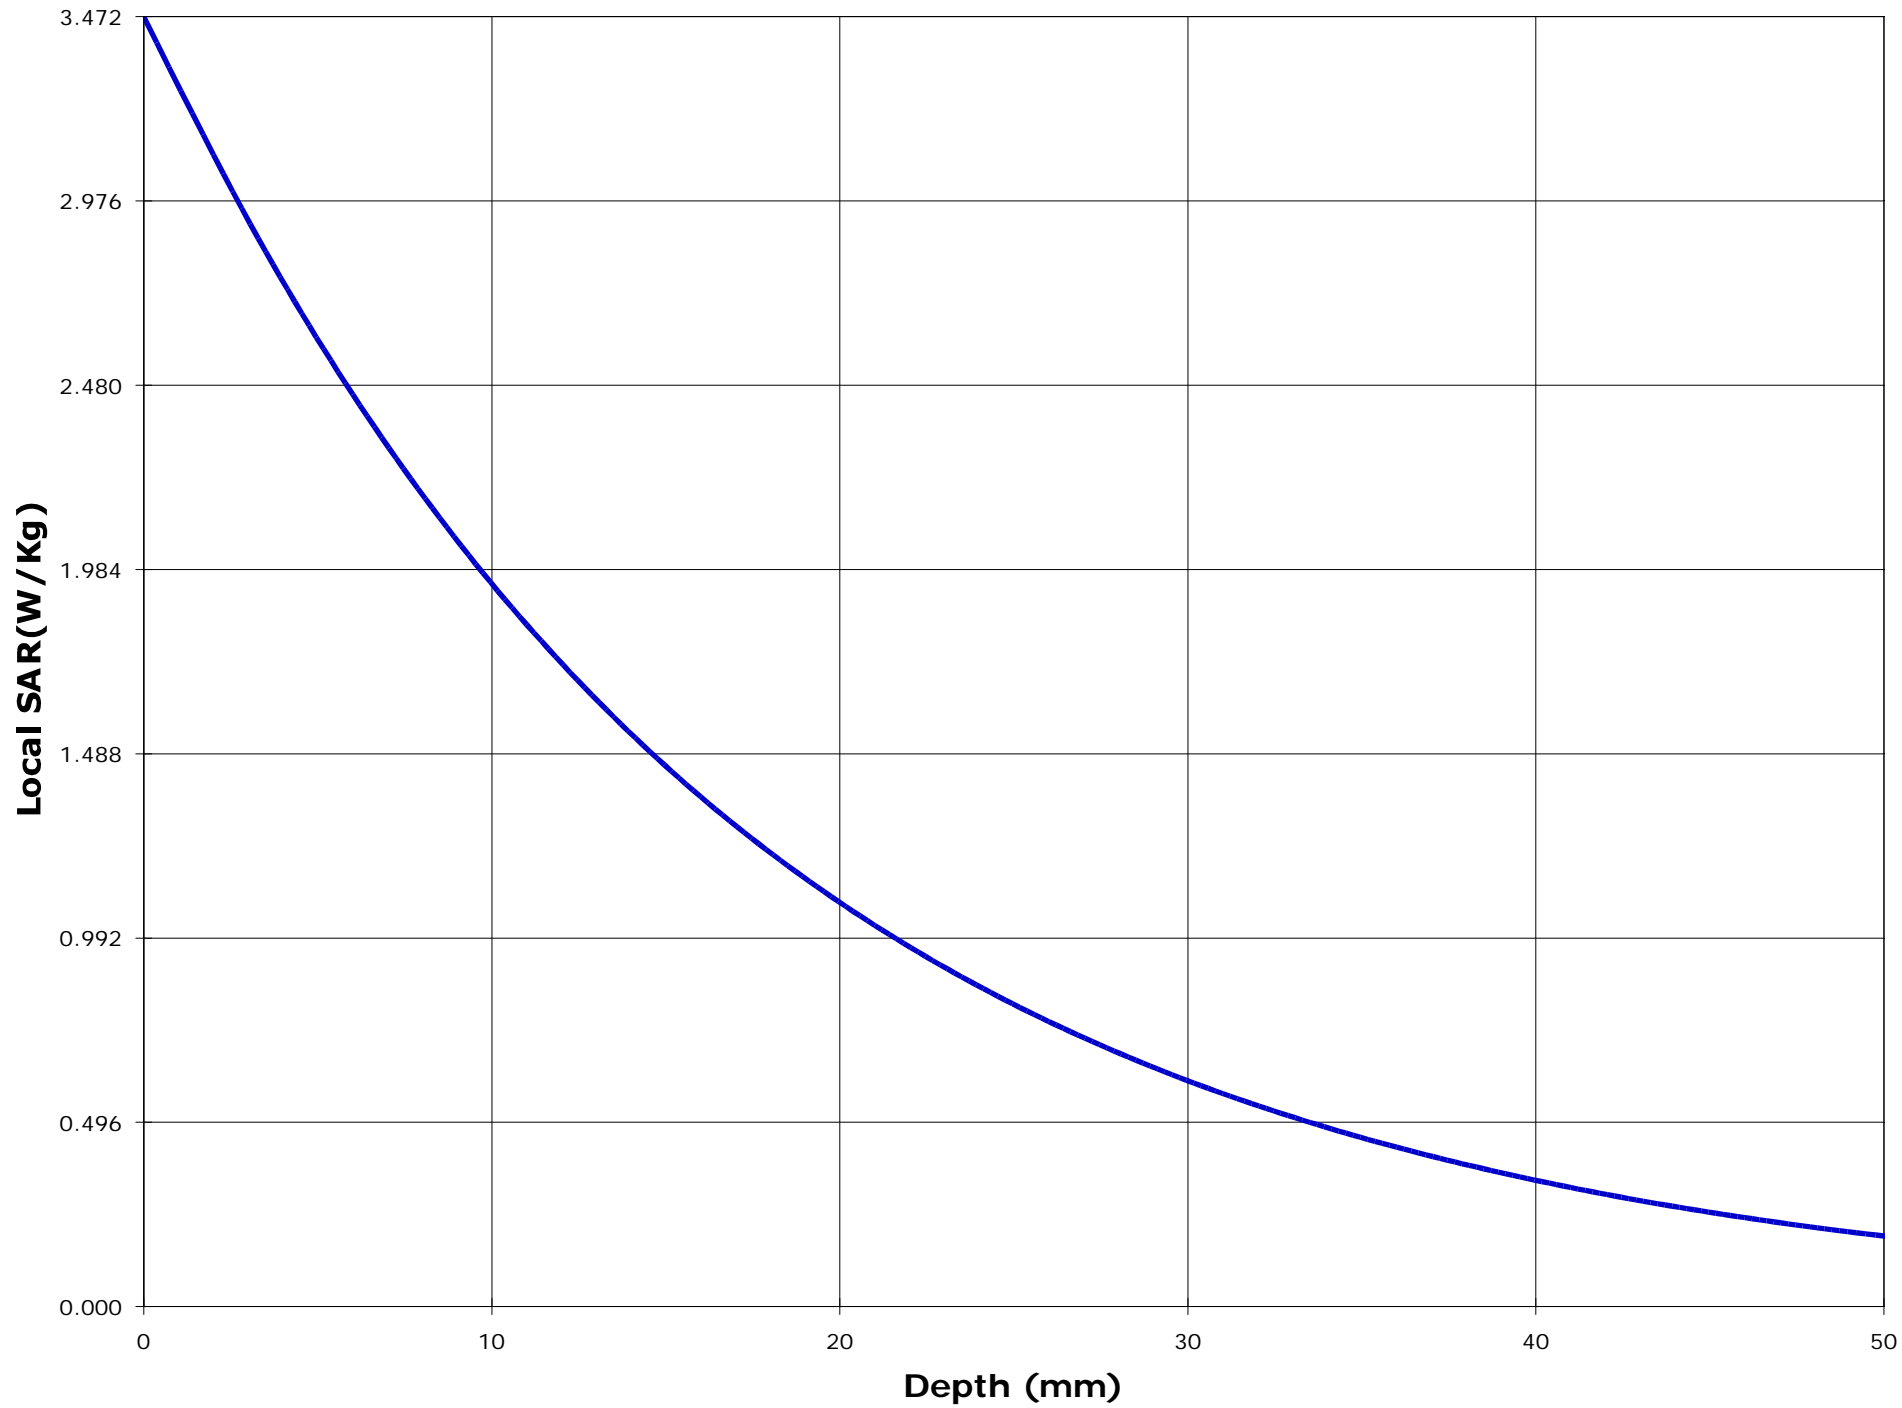



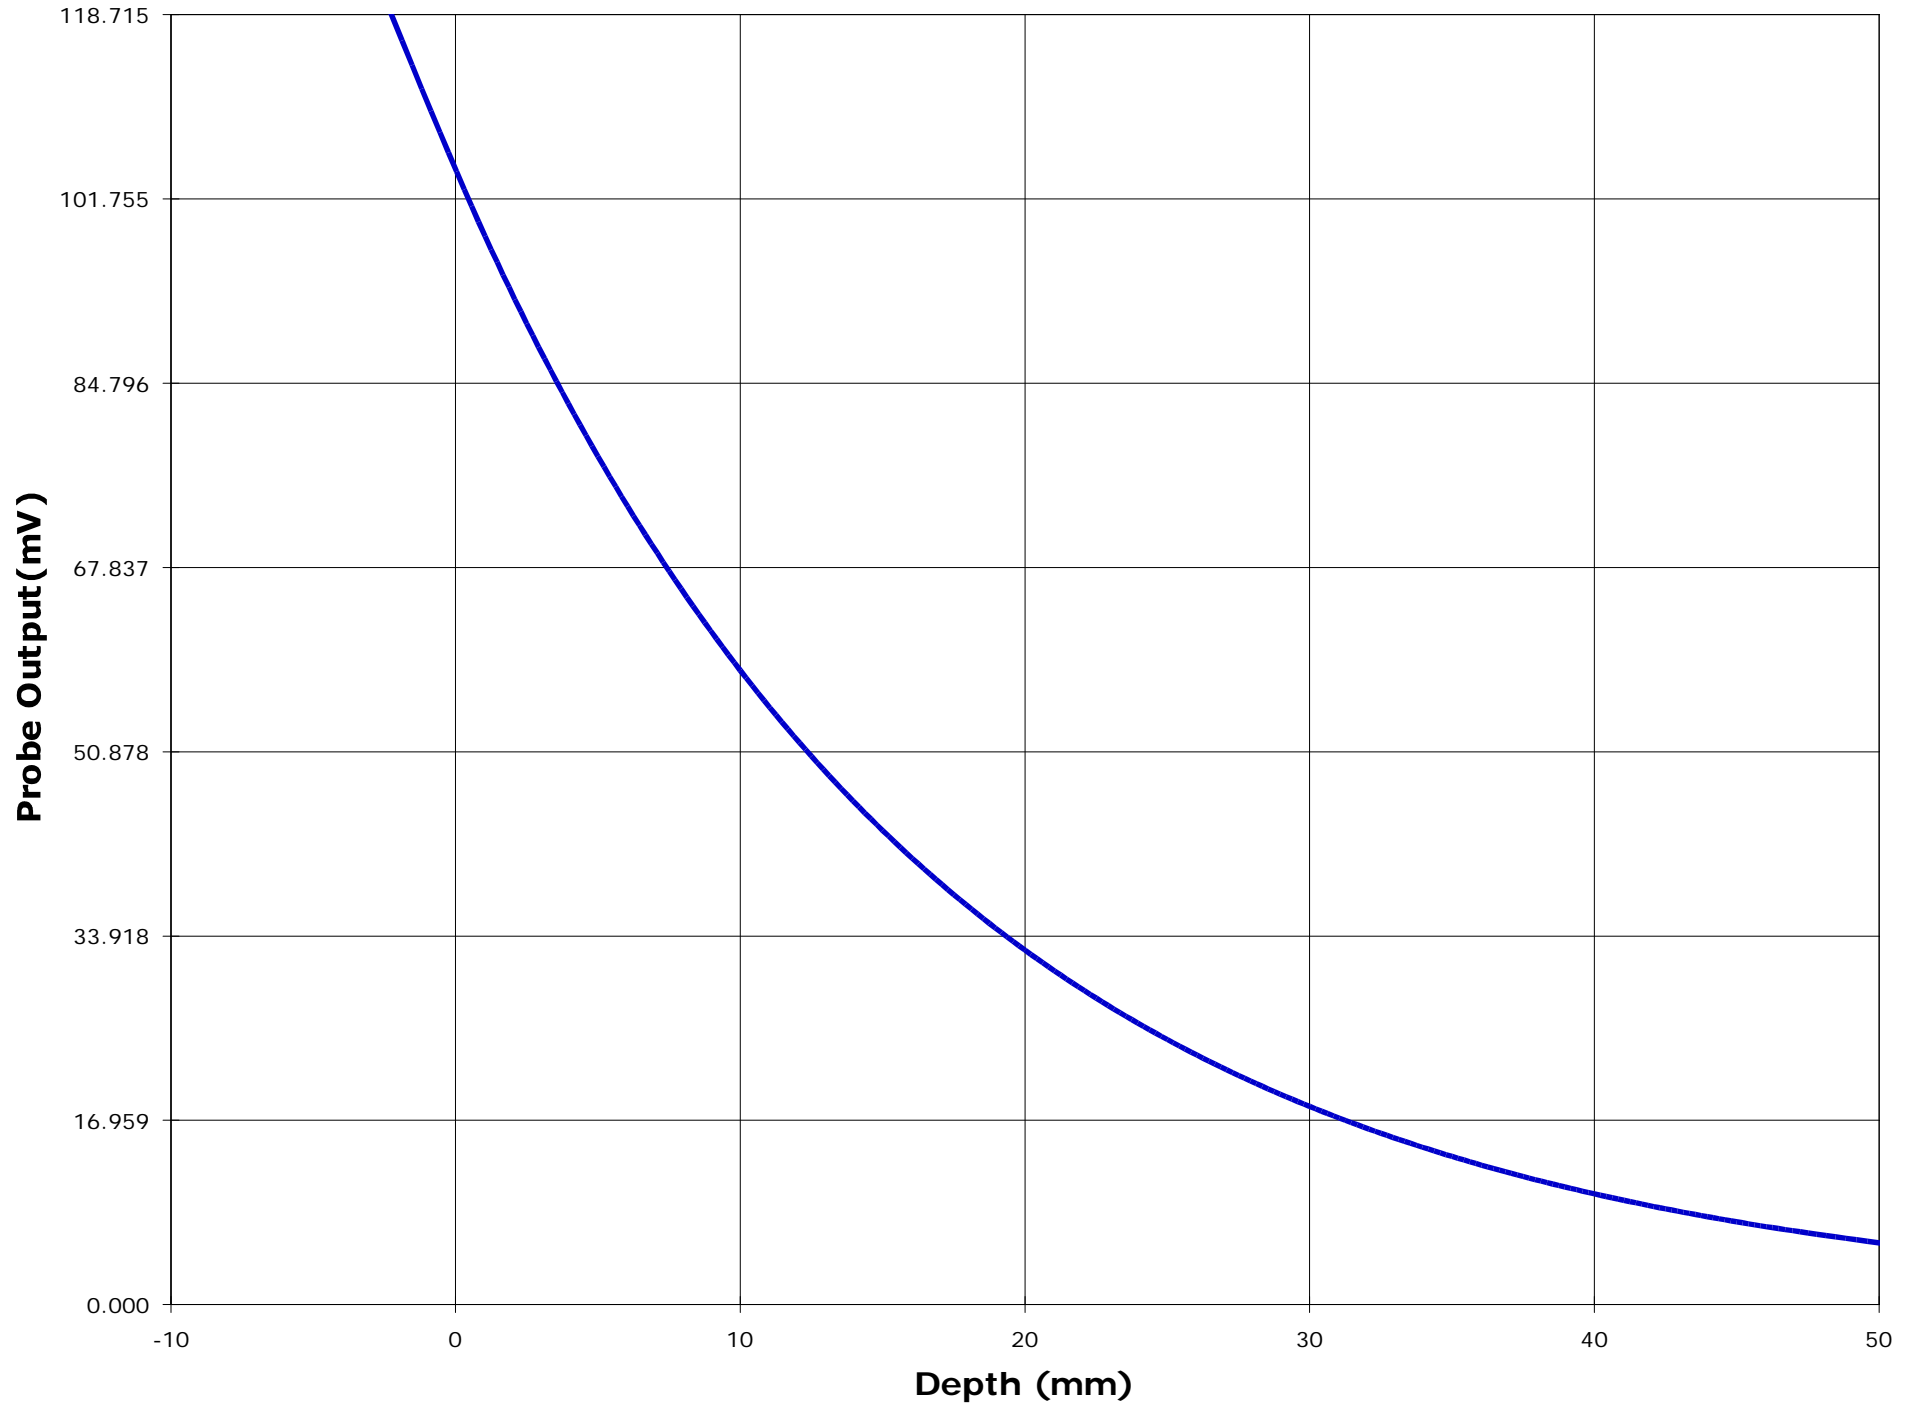

Test Information

Date : 11/10/00  
Time : 5:28:55 PM

Product : UHF Transceiver  
Manufacturer : ICOM Incorporated  
Model Number : IC-F40GT-2  
Serial Number : 0002  
FCC ID Number : AFJ IC-F40G-2

Test : SAR  
Frequency (MHz) : 489.95 W  
Nominal Output Power (W) : 4.0  
Antenna Type : Monopole  
Signal : CW

Phantom : Head - Front  
Simulated Tissue : Brain

Dielectric Constant : 58.1  
Conductivity : 0.82

Probe : ETR\_225\_1\_999  
Probe Offset (mm) : 2.250  
Sensor Factor (mV) : 10.8  
Conversion Factor : 0.316  
Calibrated Date : 10/7/99

Antenna Position : FIX  
Measured Power (W) : 4.01  
(conducted)  
Cable Insertion Loss (dB) : 0.1  
Compensated Power (W) : 4.103

Amplifier Setting :

Channel 1 : 0.0070      Channel 2 : 0.0067      Channel 3 : 0.0081



Location of Maximum Field :



X = 5                      Y = 80


Measured Values (mV) :


102.903    100.251    94.804    83.915    74.805    67.343  
61.476    56.605    52.235    48.203    44.496


Peak Voltage (mV) : 109.290      1 Cm Voltage (mV) : 60.493      SAR (W/Kg) : 2.338

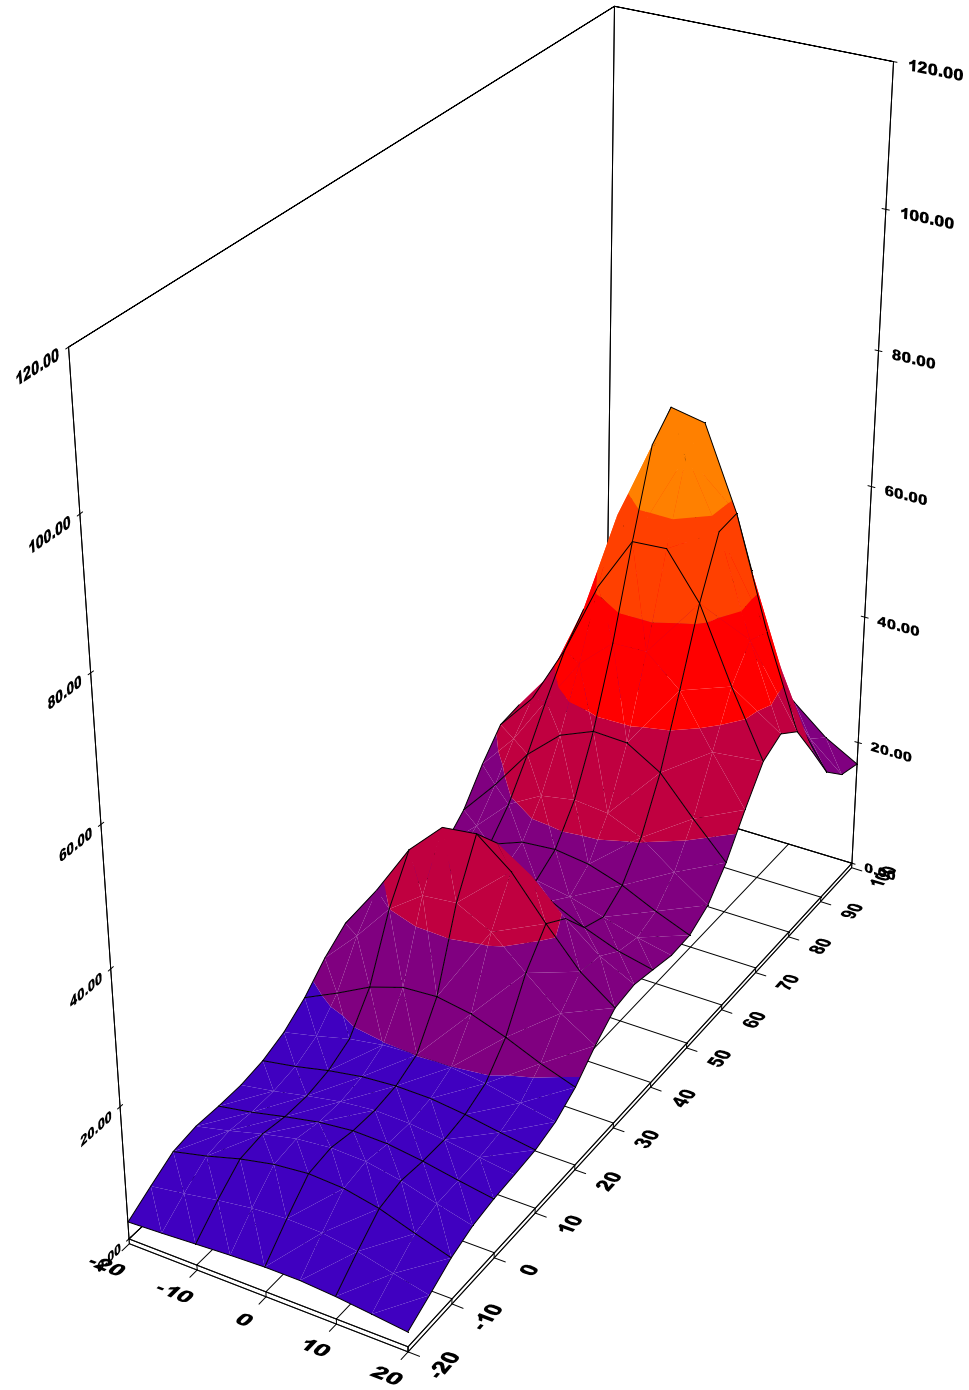


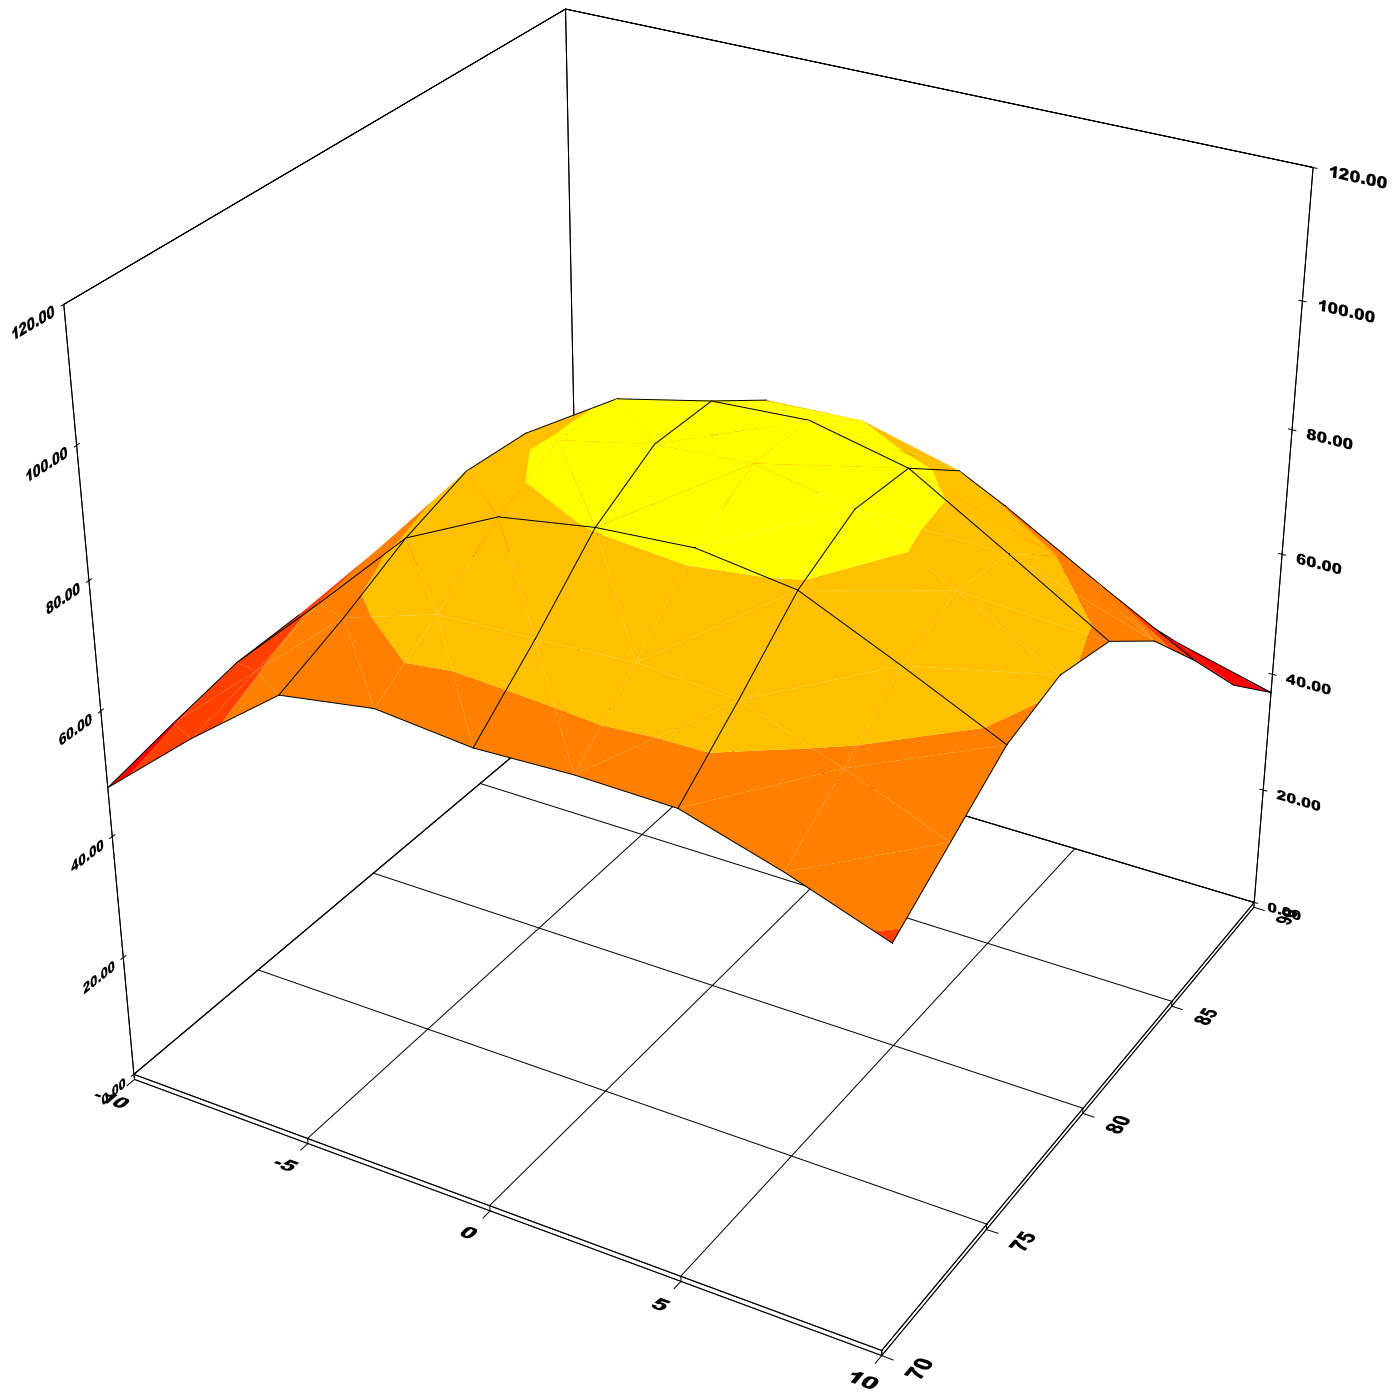

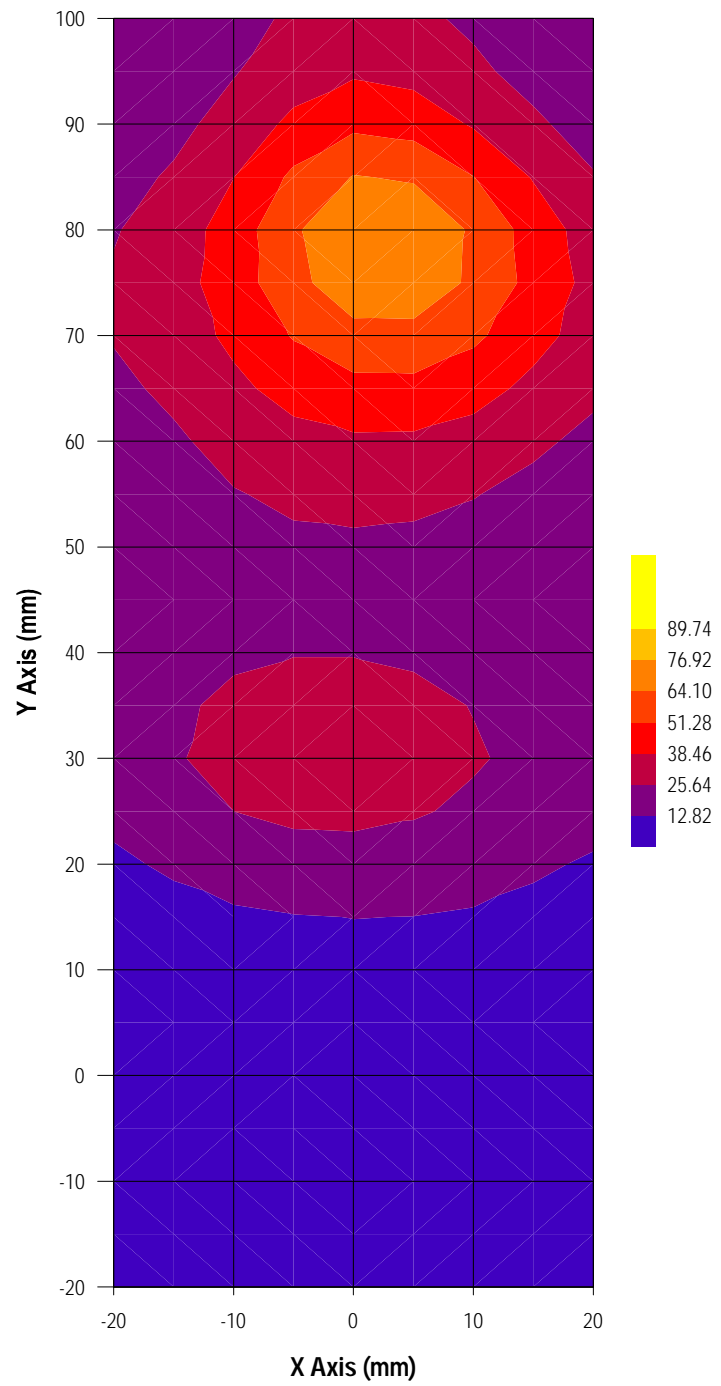

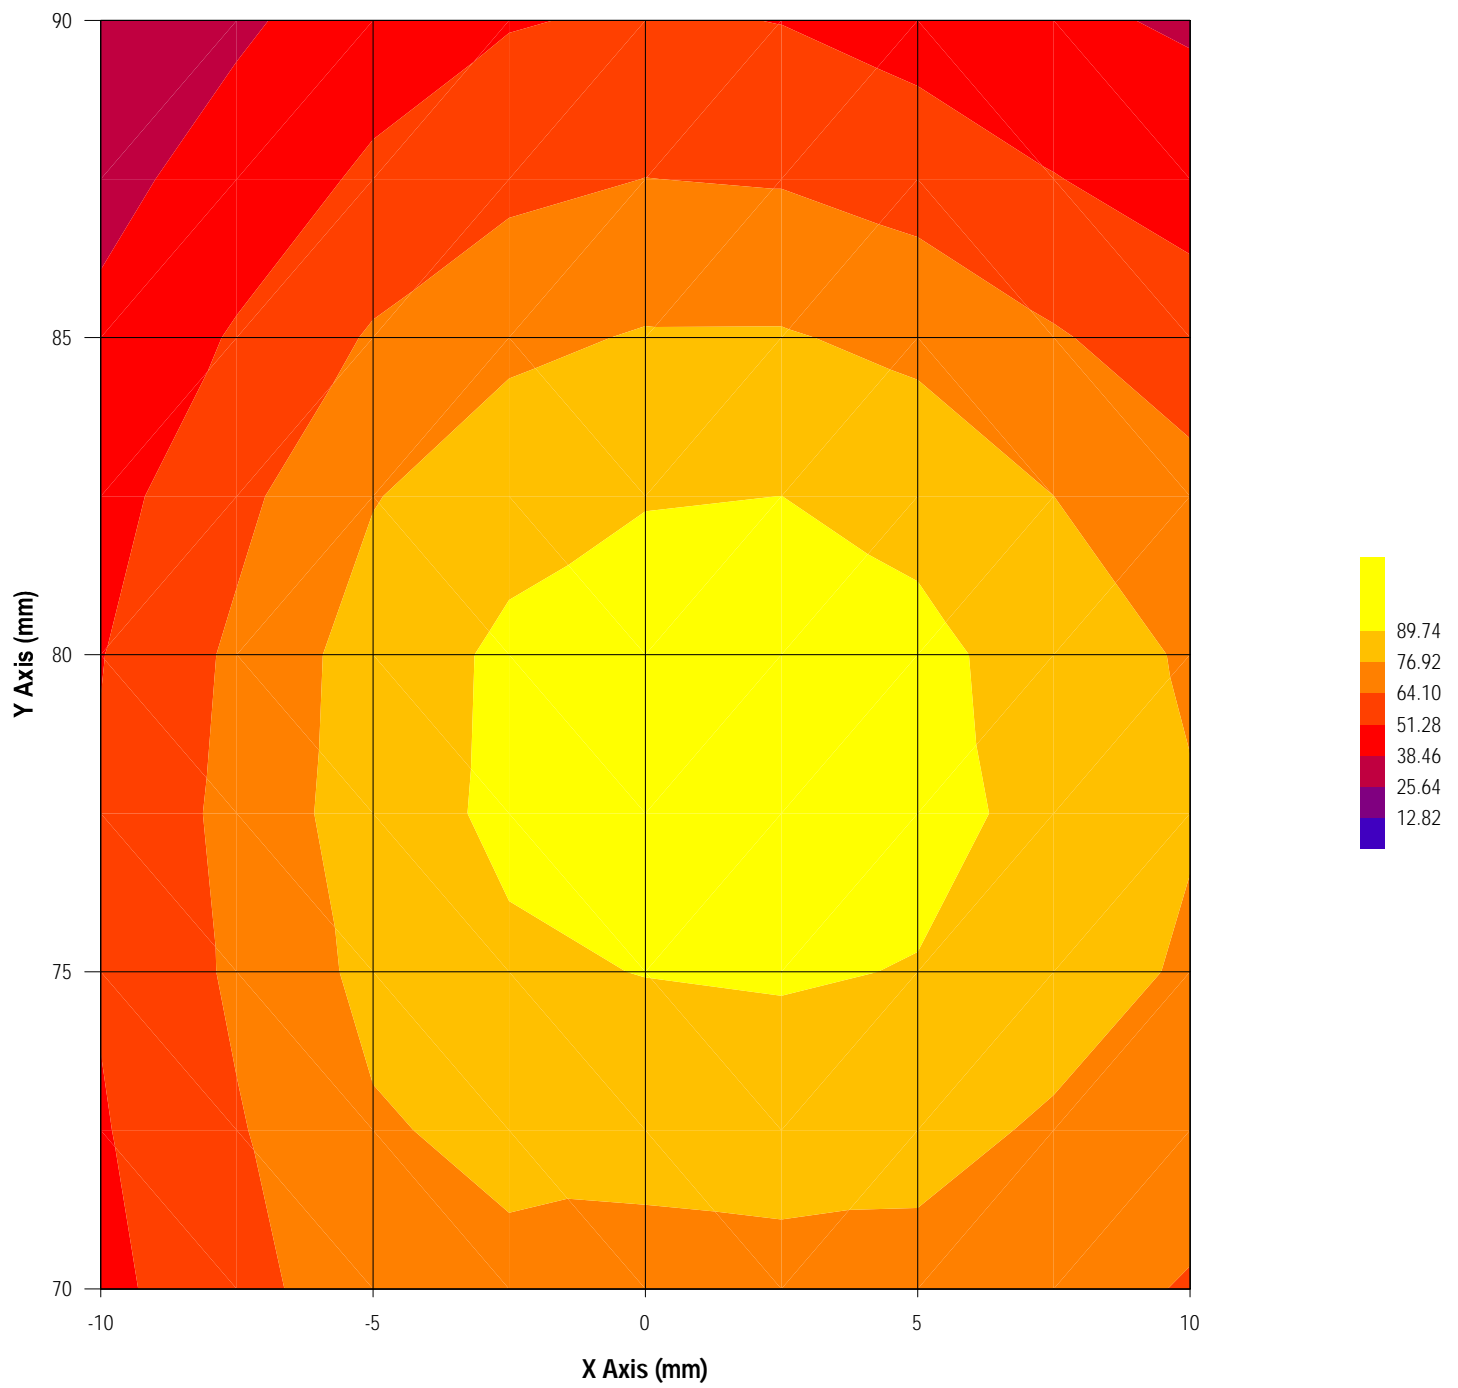

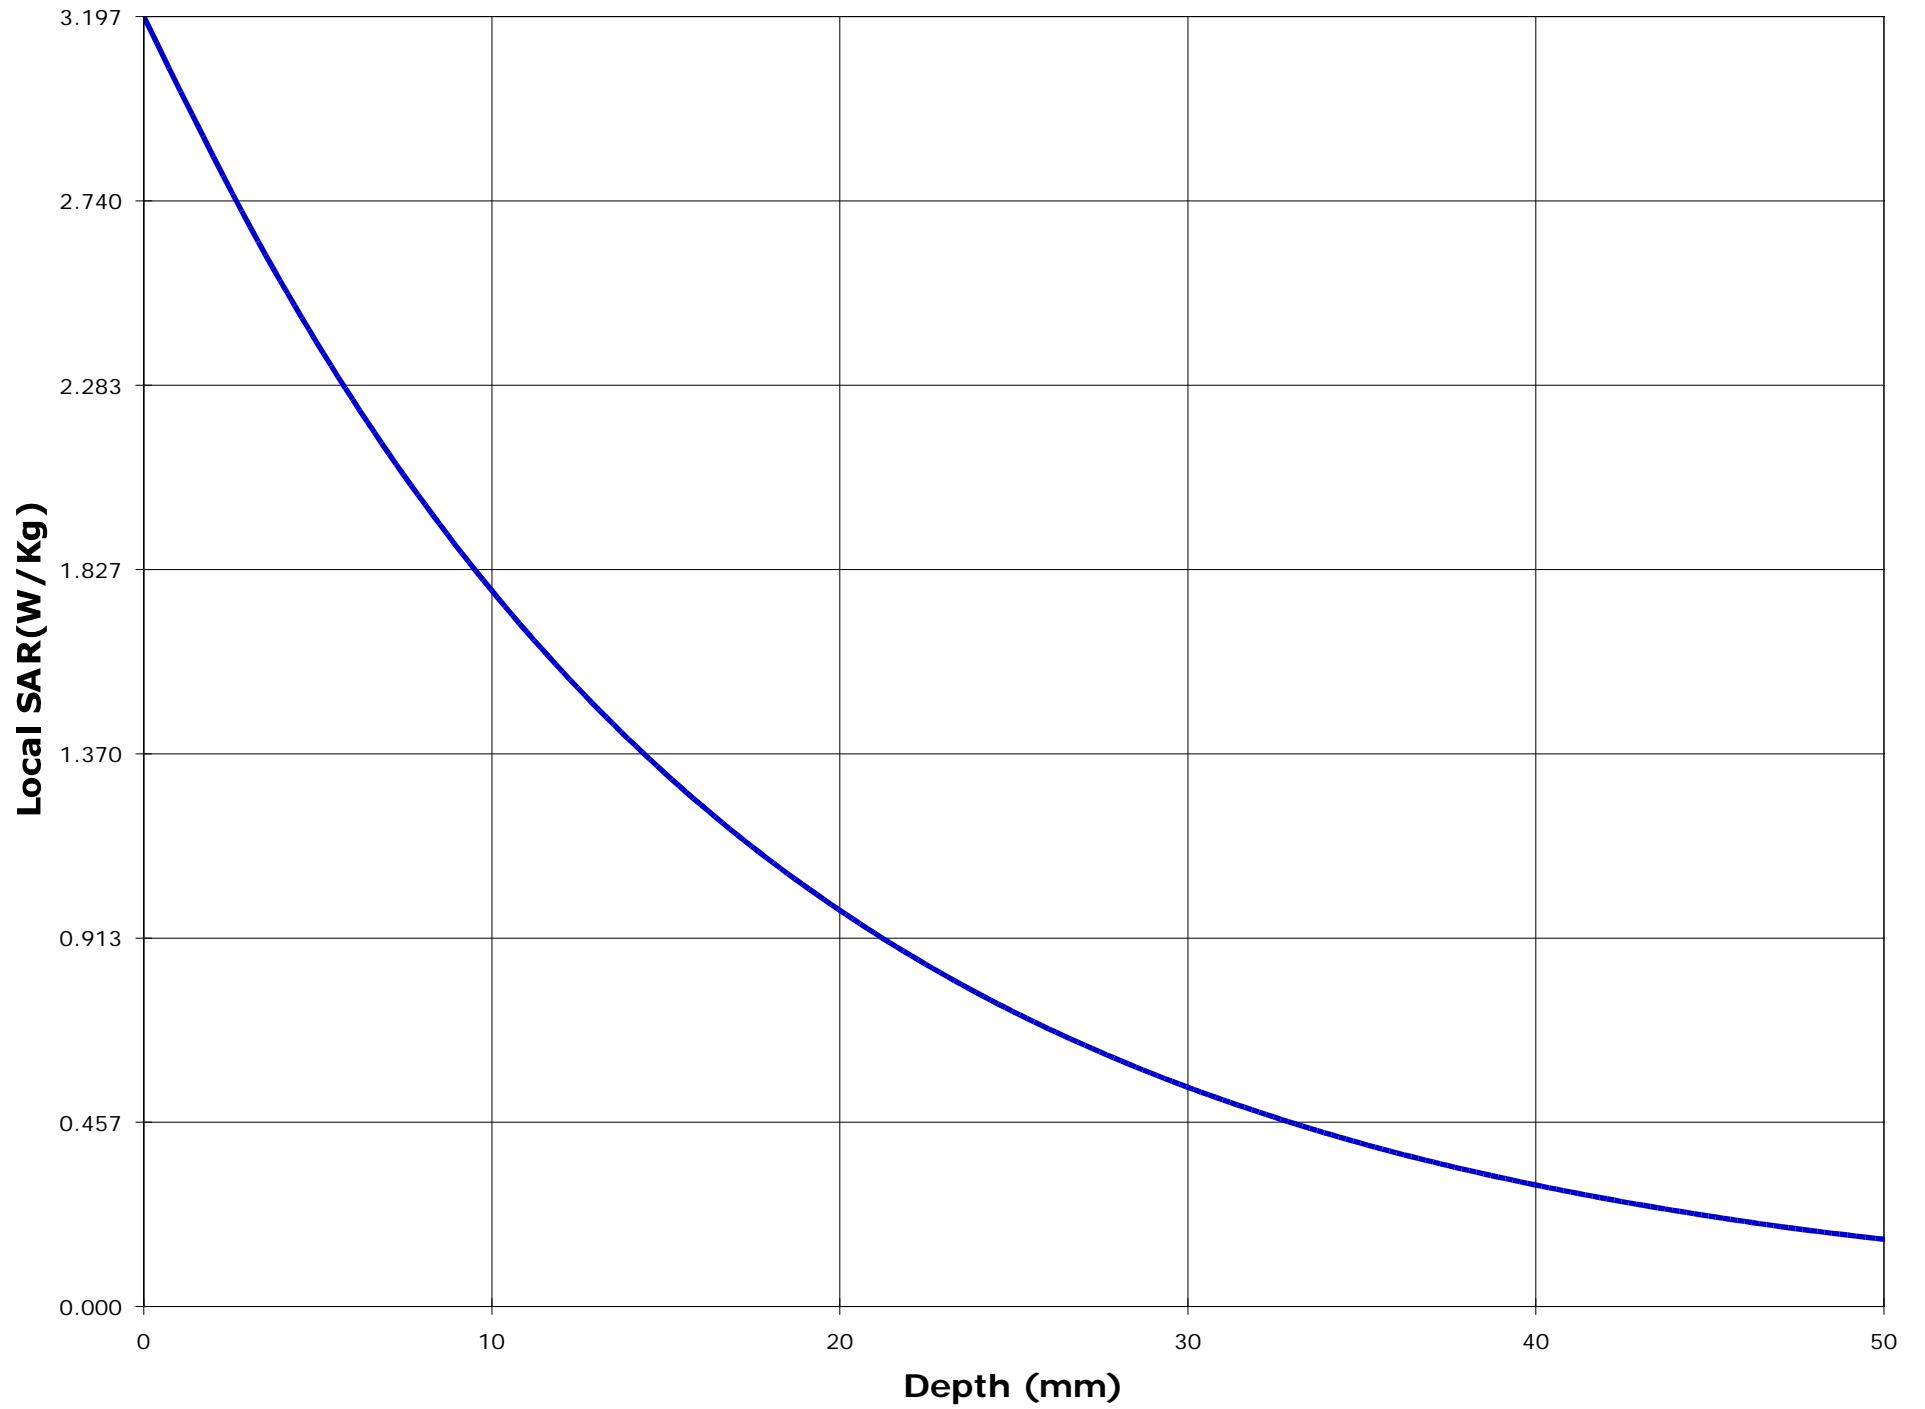

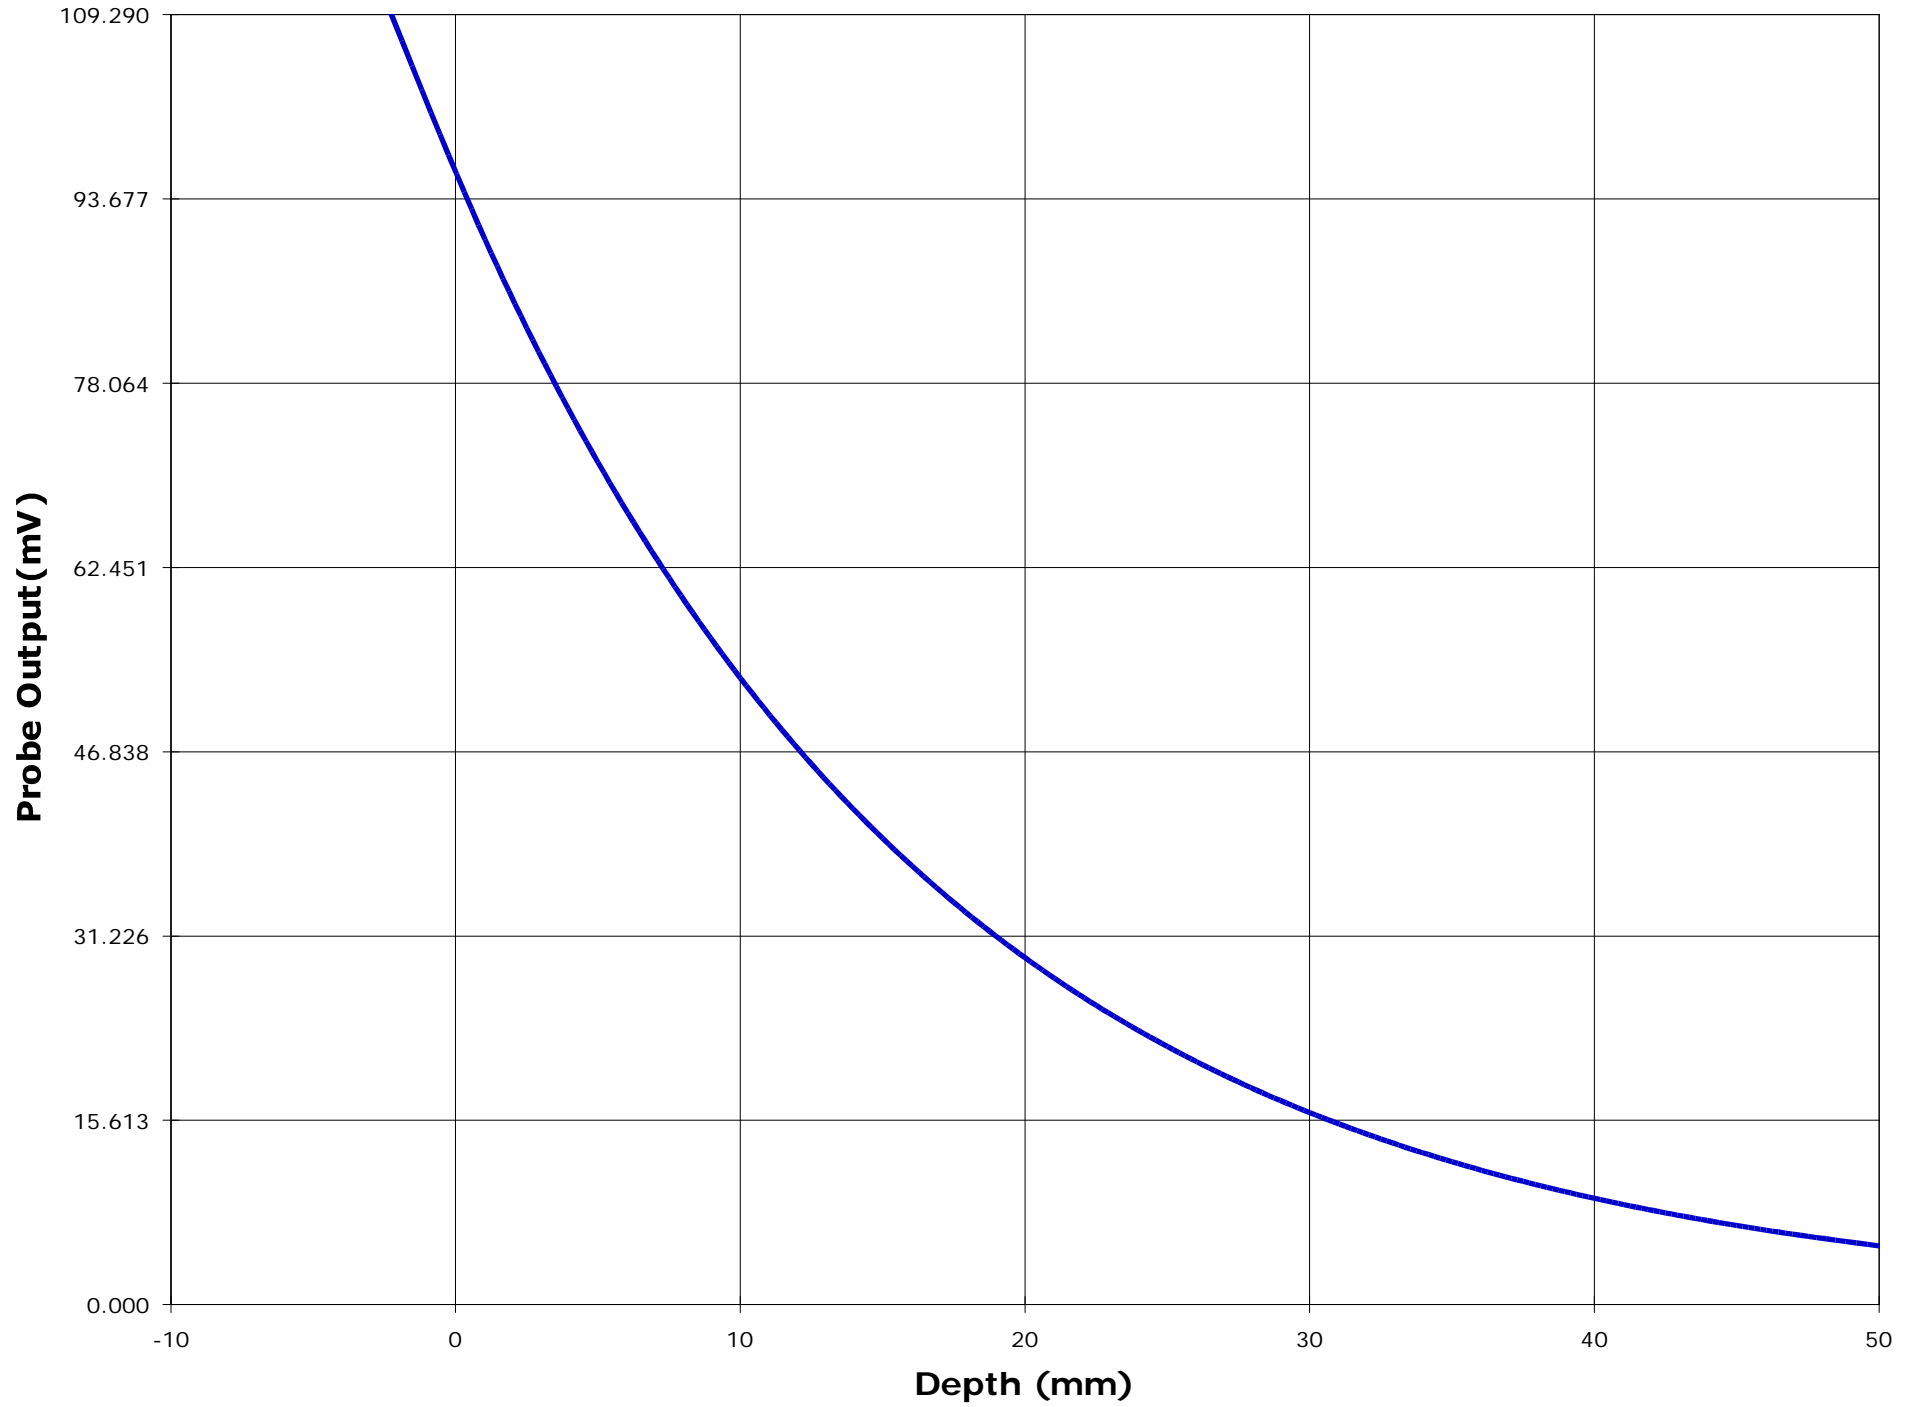



Test Information

Date : 11/10/00  
Time : 6:01:33 PM

Product : UHF Transceiver  
Manufacturer : ICOM Incorporated  
Model Number : IC-F40GT-2  
Serial Number : 0002  
FCC ID Number : AFJ IC-F40G-2

Test : SAR  
Frequency (MHz) : 450.05 N  
Nominal Output Power (W) : 4.0  
Antenna Type : Monopole  
Signal : CW

Phantom : Head - Front  
Simulated Tissue : Brain

Dielectric Constant : 58.1  
Conductivity : 0.82

Probe : ETR\_225\_1\_999  
Probe Offset (mm) : 2.250  
Sensor Factor (mV) : 10.8  
Conversion Factor : 0.316  
Calibrated Date : 10/7/99

Antenna Position : FIX  
Measured Power (W) : 3.93  
(conducted)  
Cable Insertion Loss (dB) : 0.1  
Compensated Power (W) : 4.022

Amplifier Setting :

Channel 1 : 0.0070      Channel 2 : 0.0067      Channel 3 : 0.0081



Location of Maximum Field :



X = 5                      Y = 80


Measured Values (mV) :


107.603    105.395    98.644    88.916    78.343    70.653  
64.252    58.999    54.439    50.366    46.648


Peak Voltage (mV) : 112.465      1 Cm Voltage (mV) : 64.110      SAR (W/Kg) : 2.490

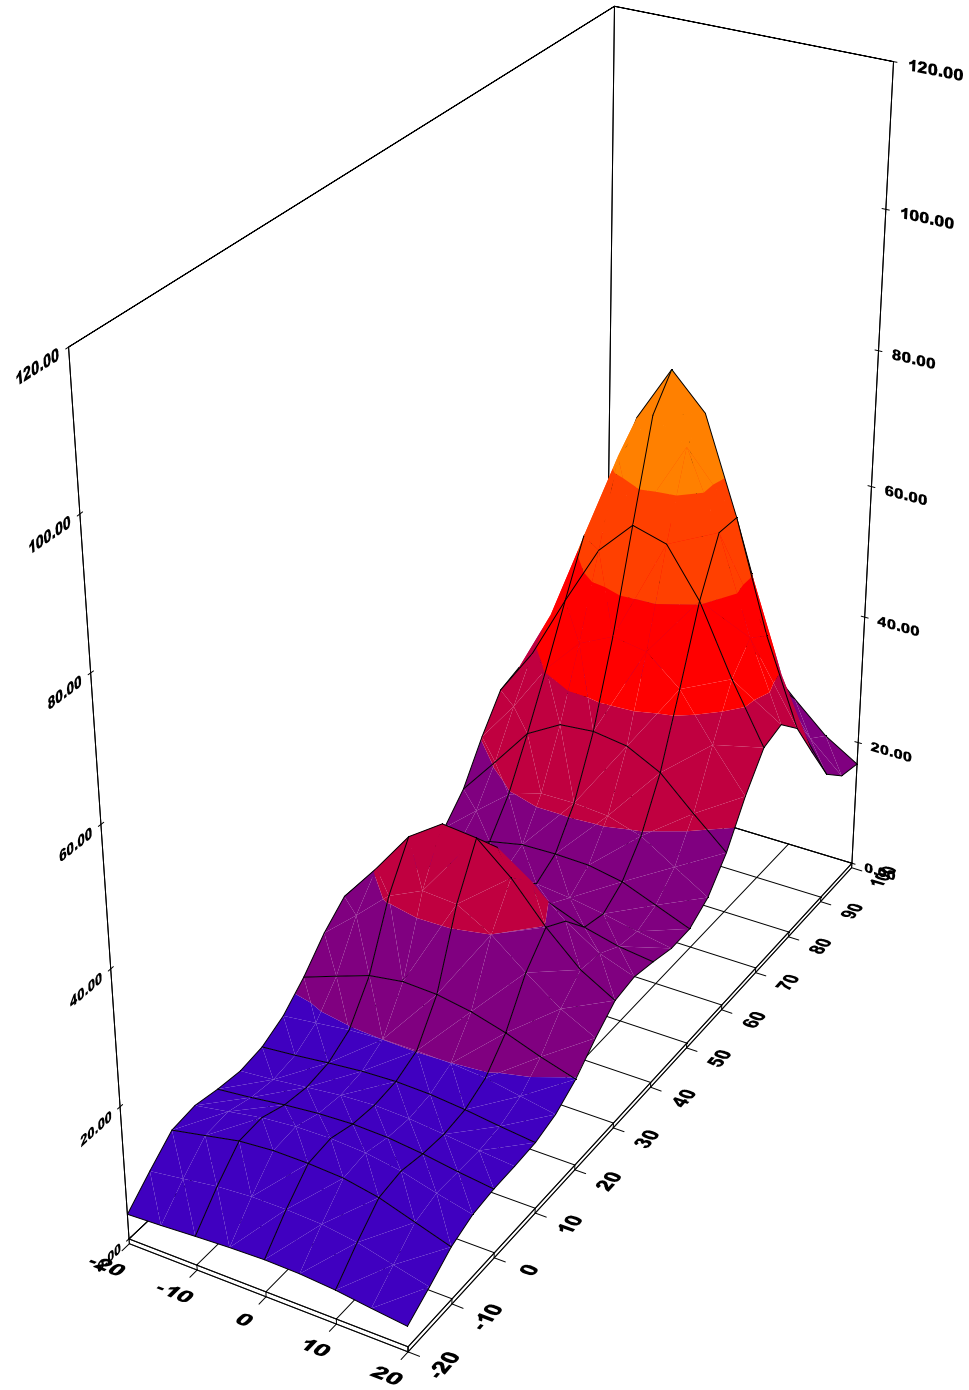


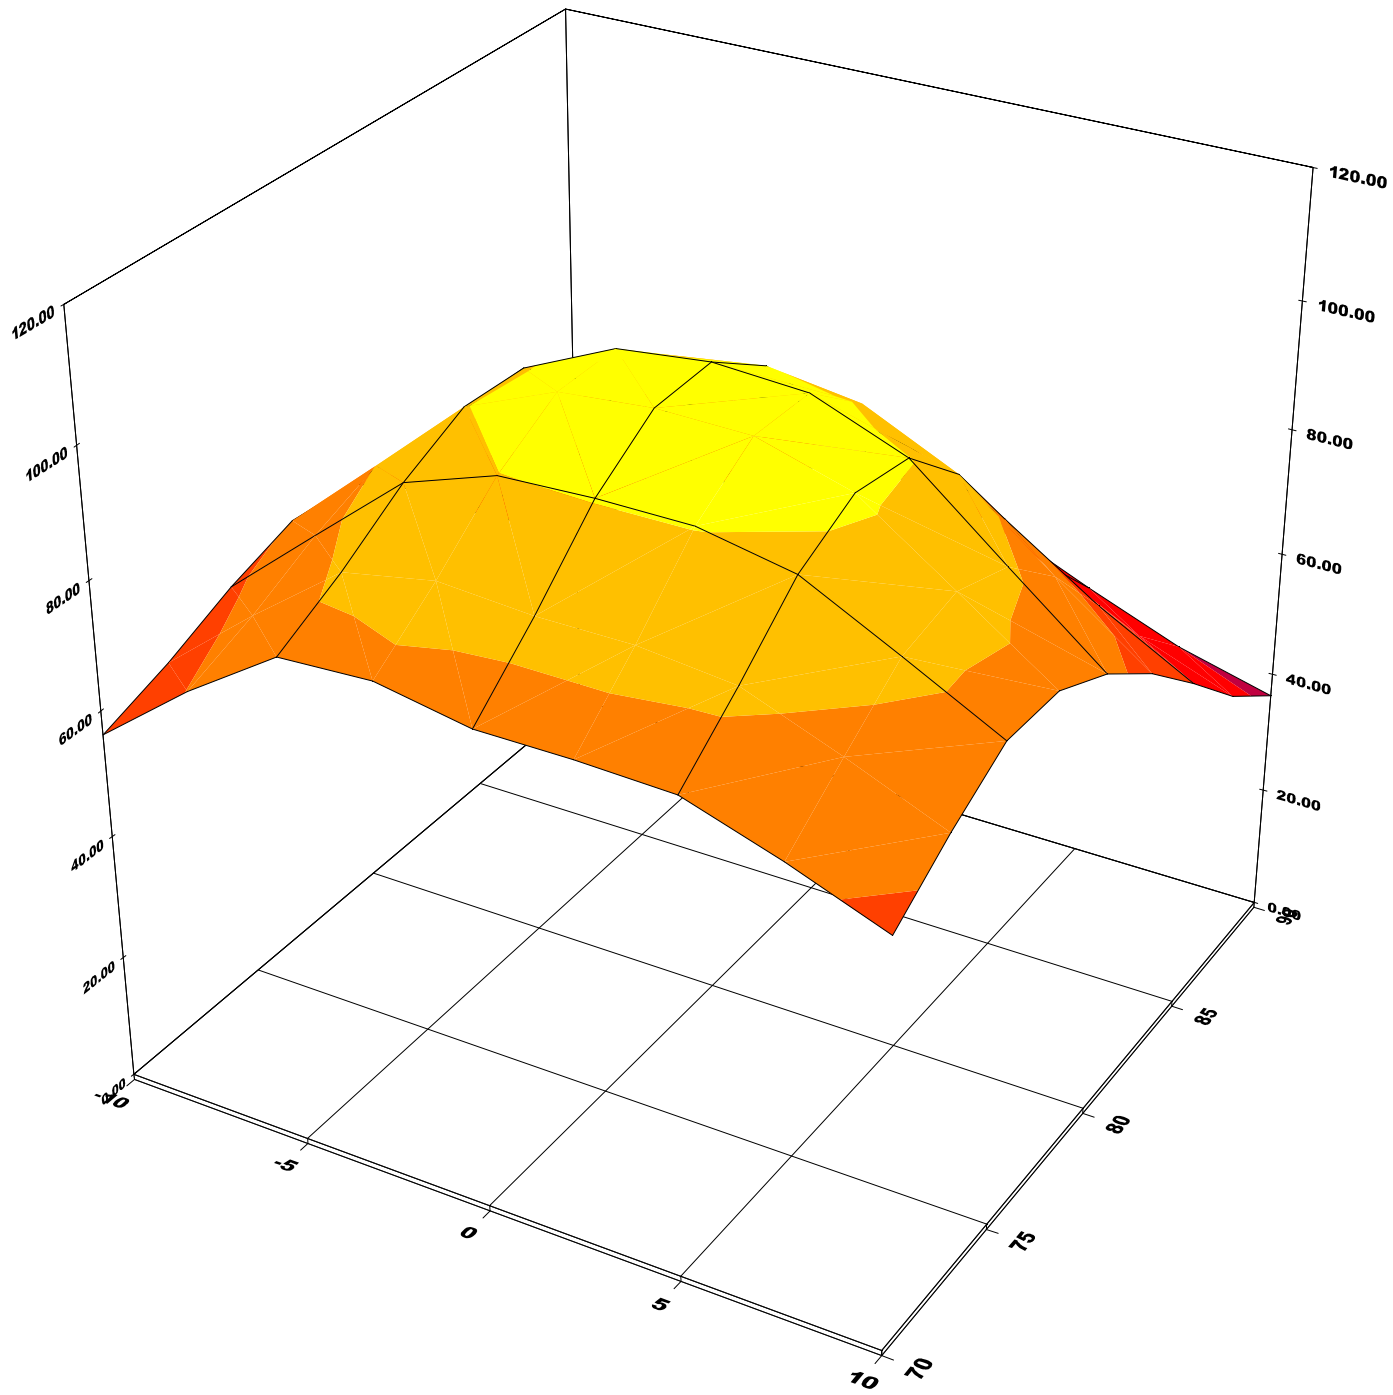

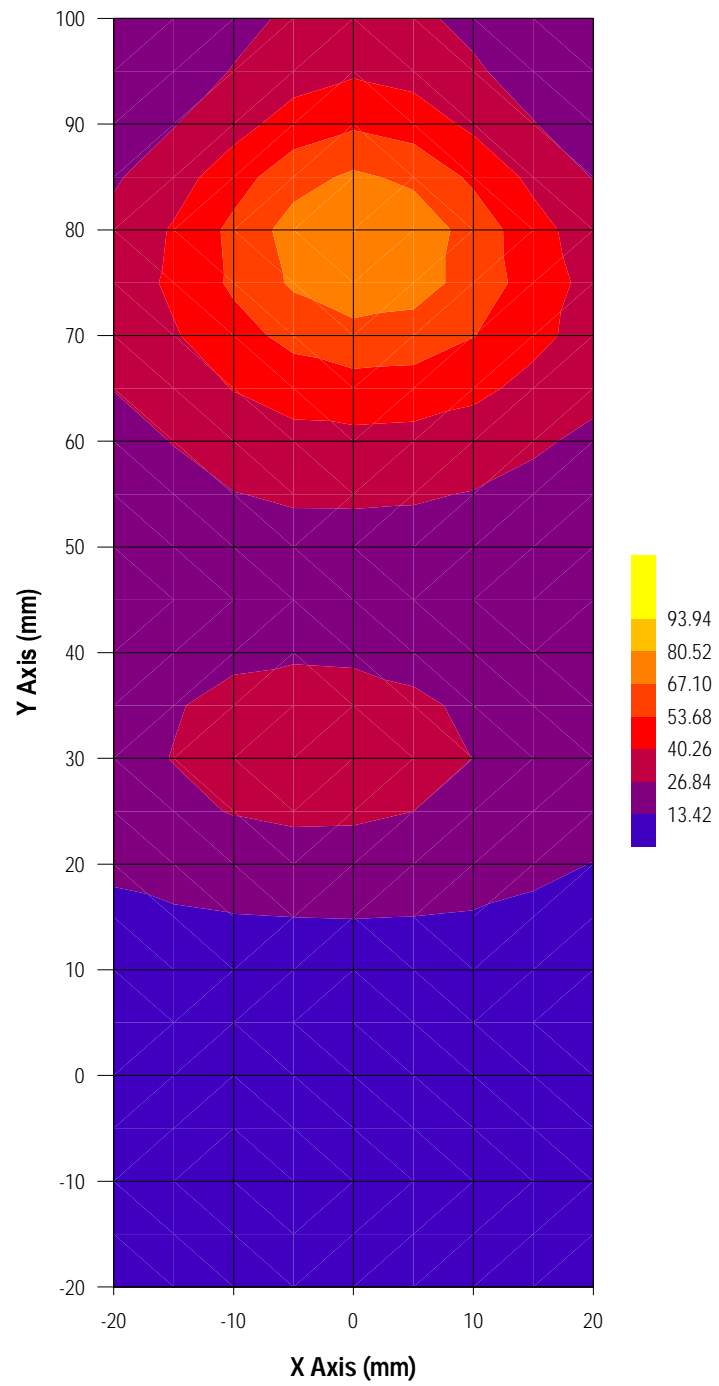

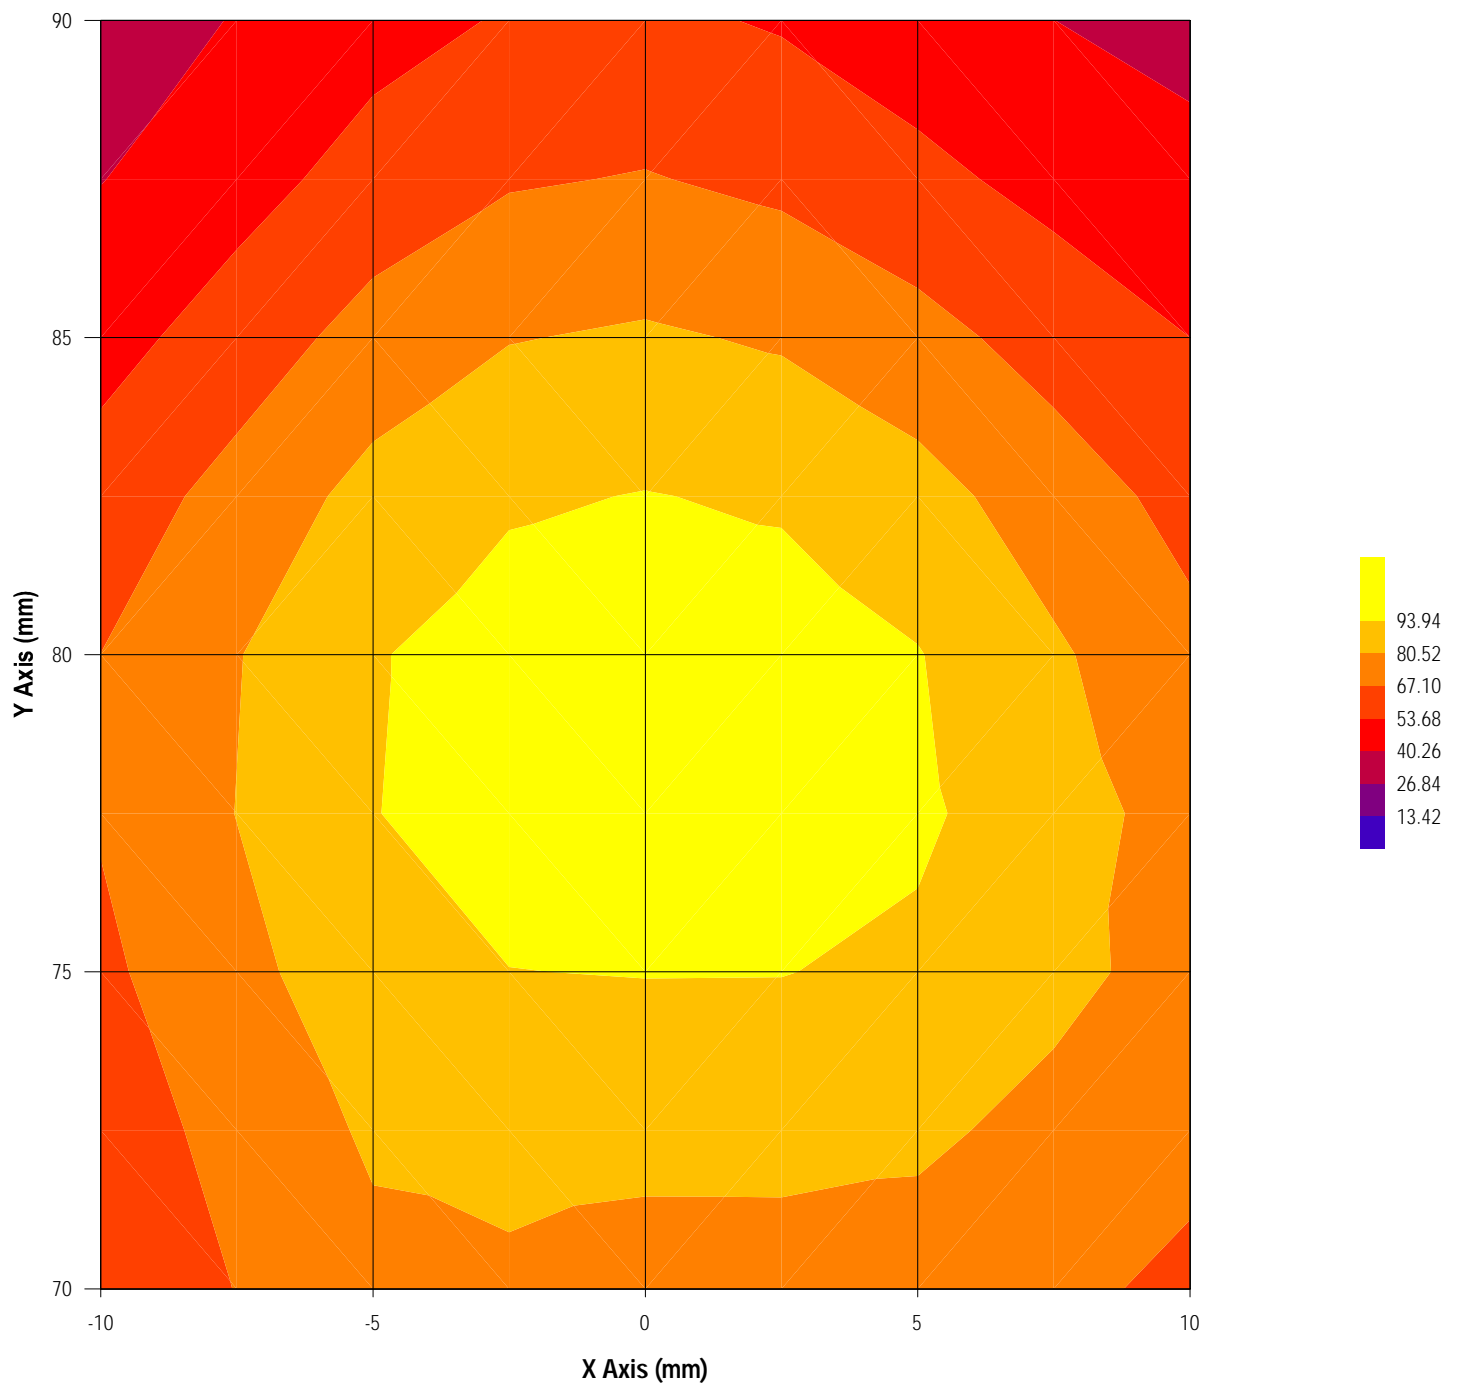

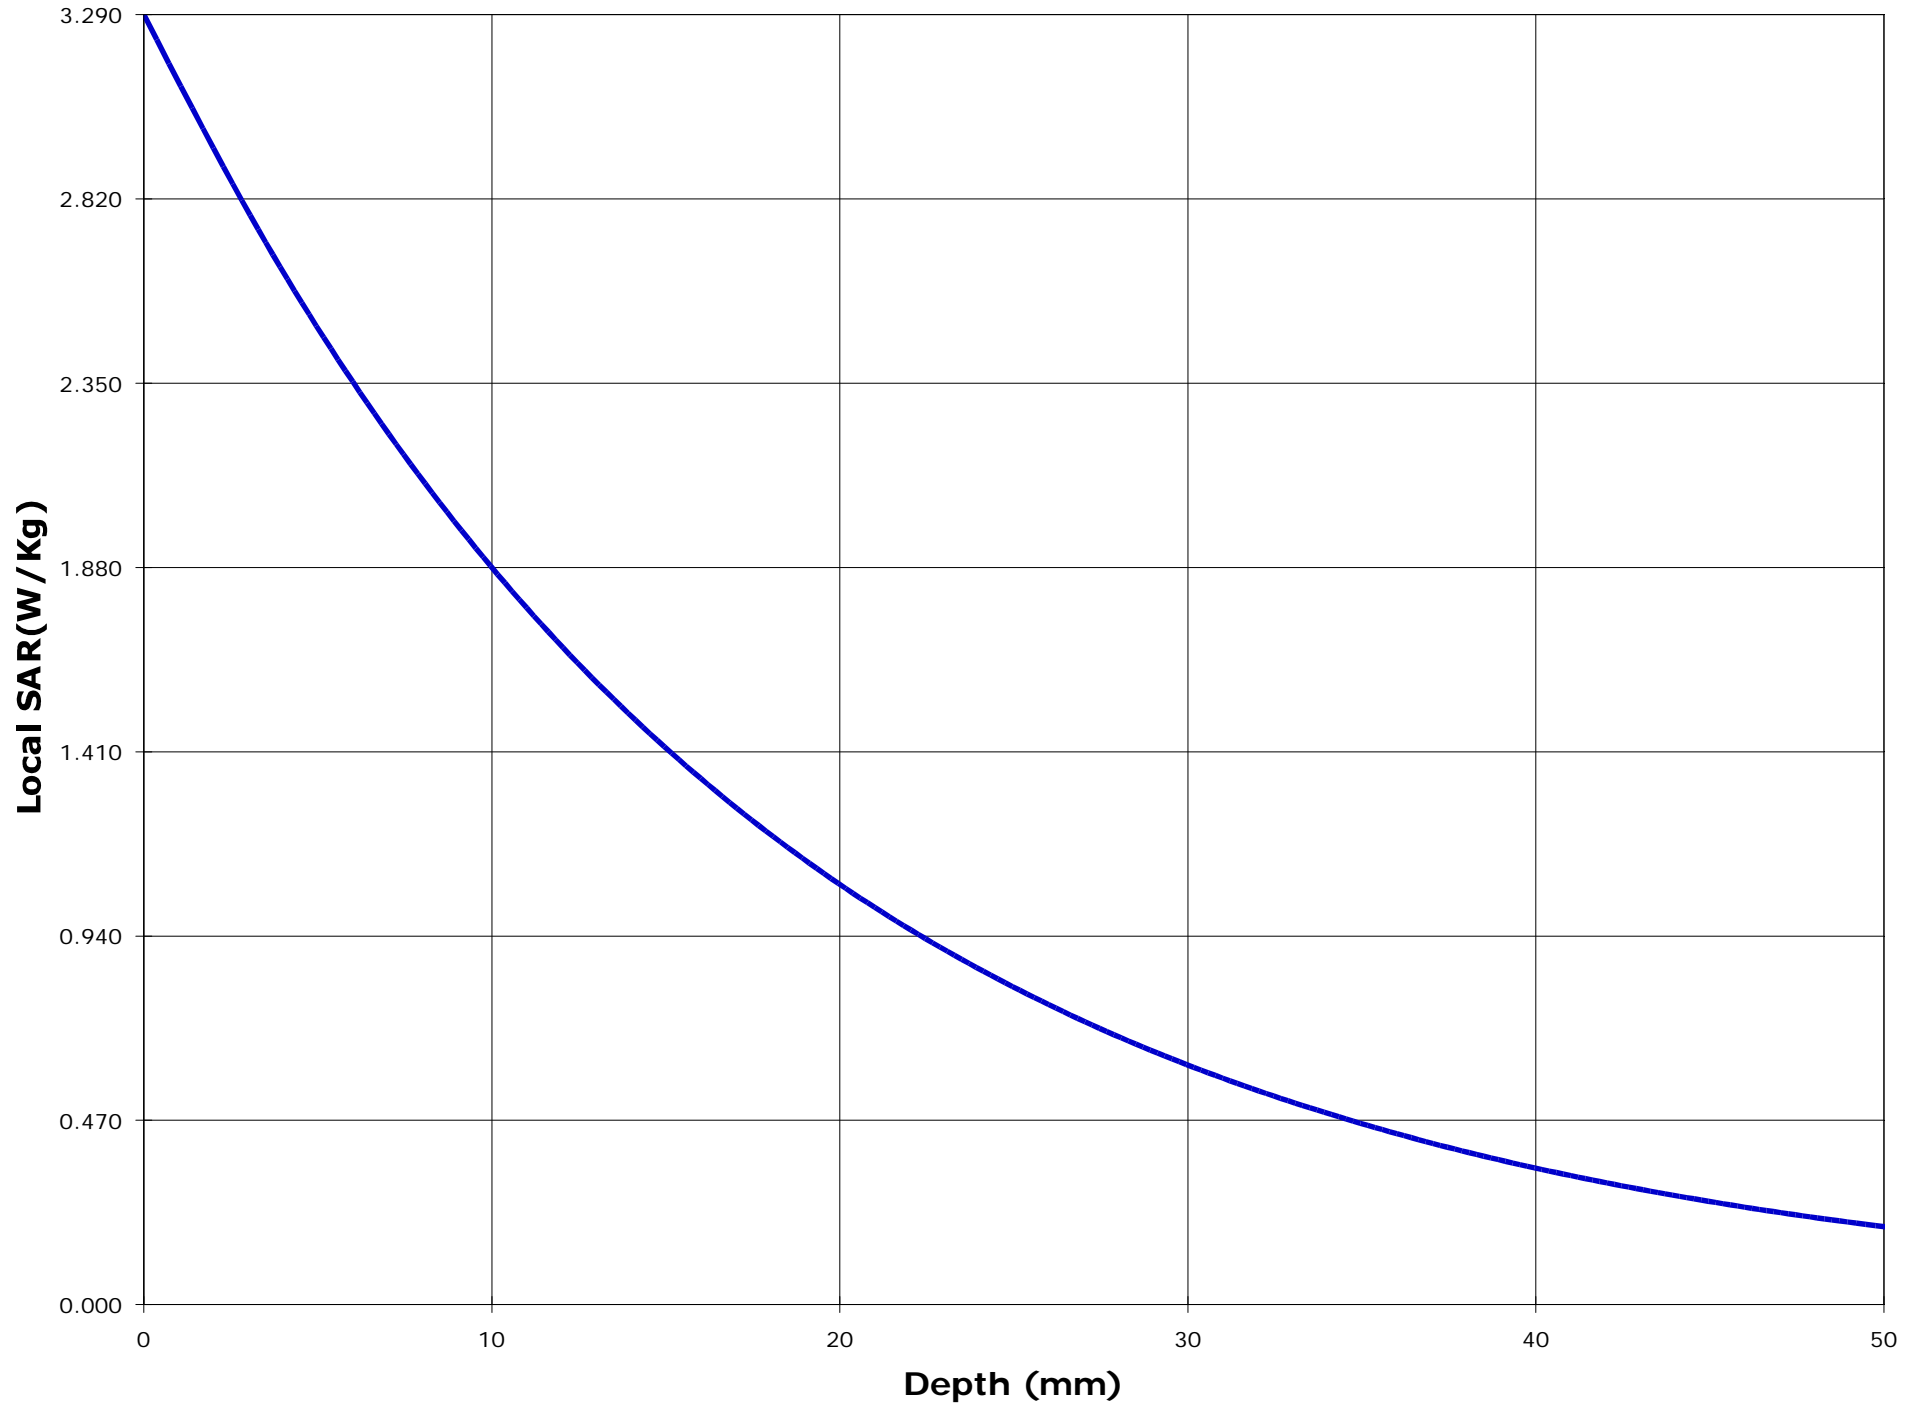

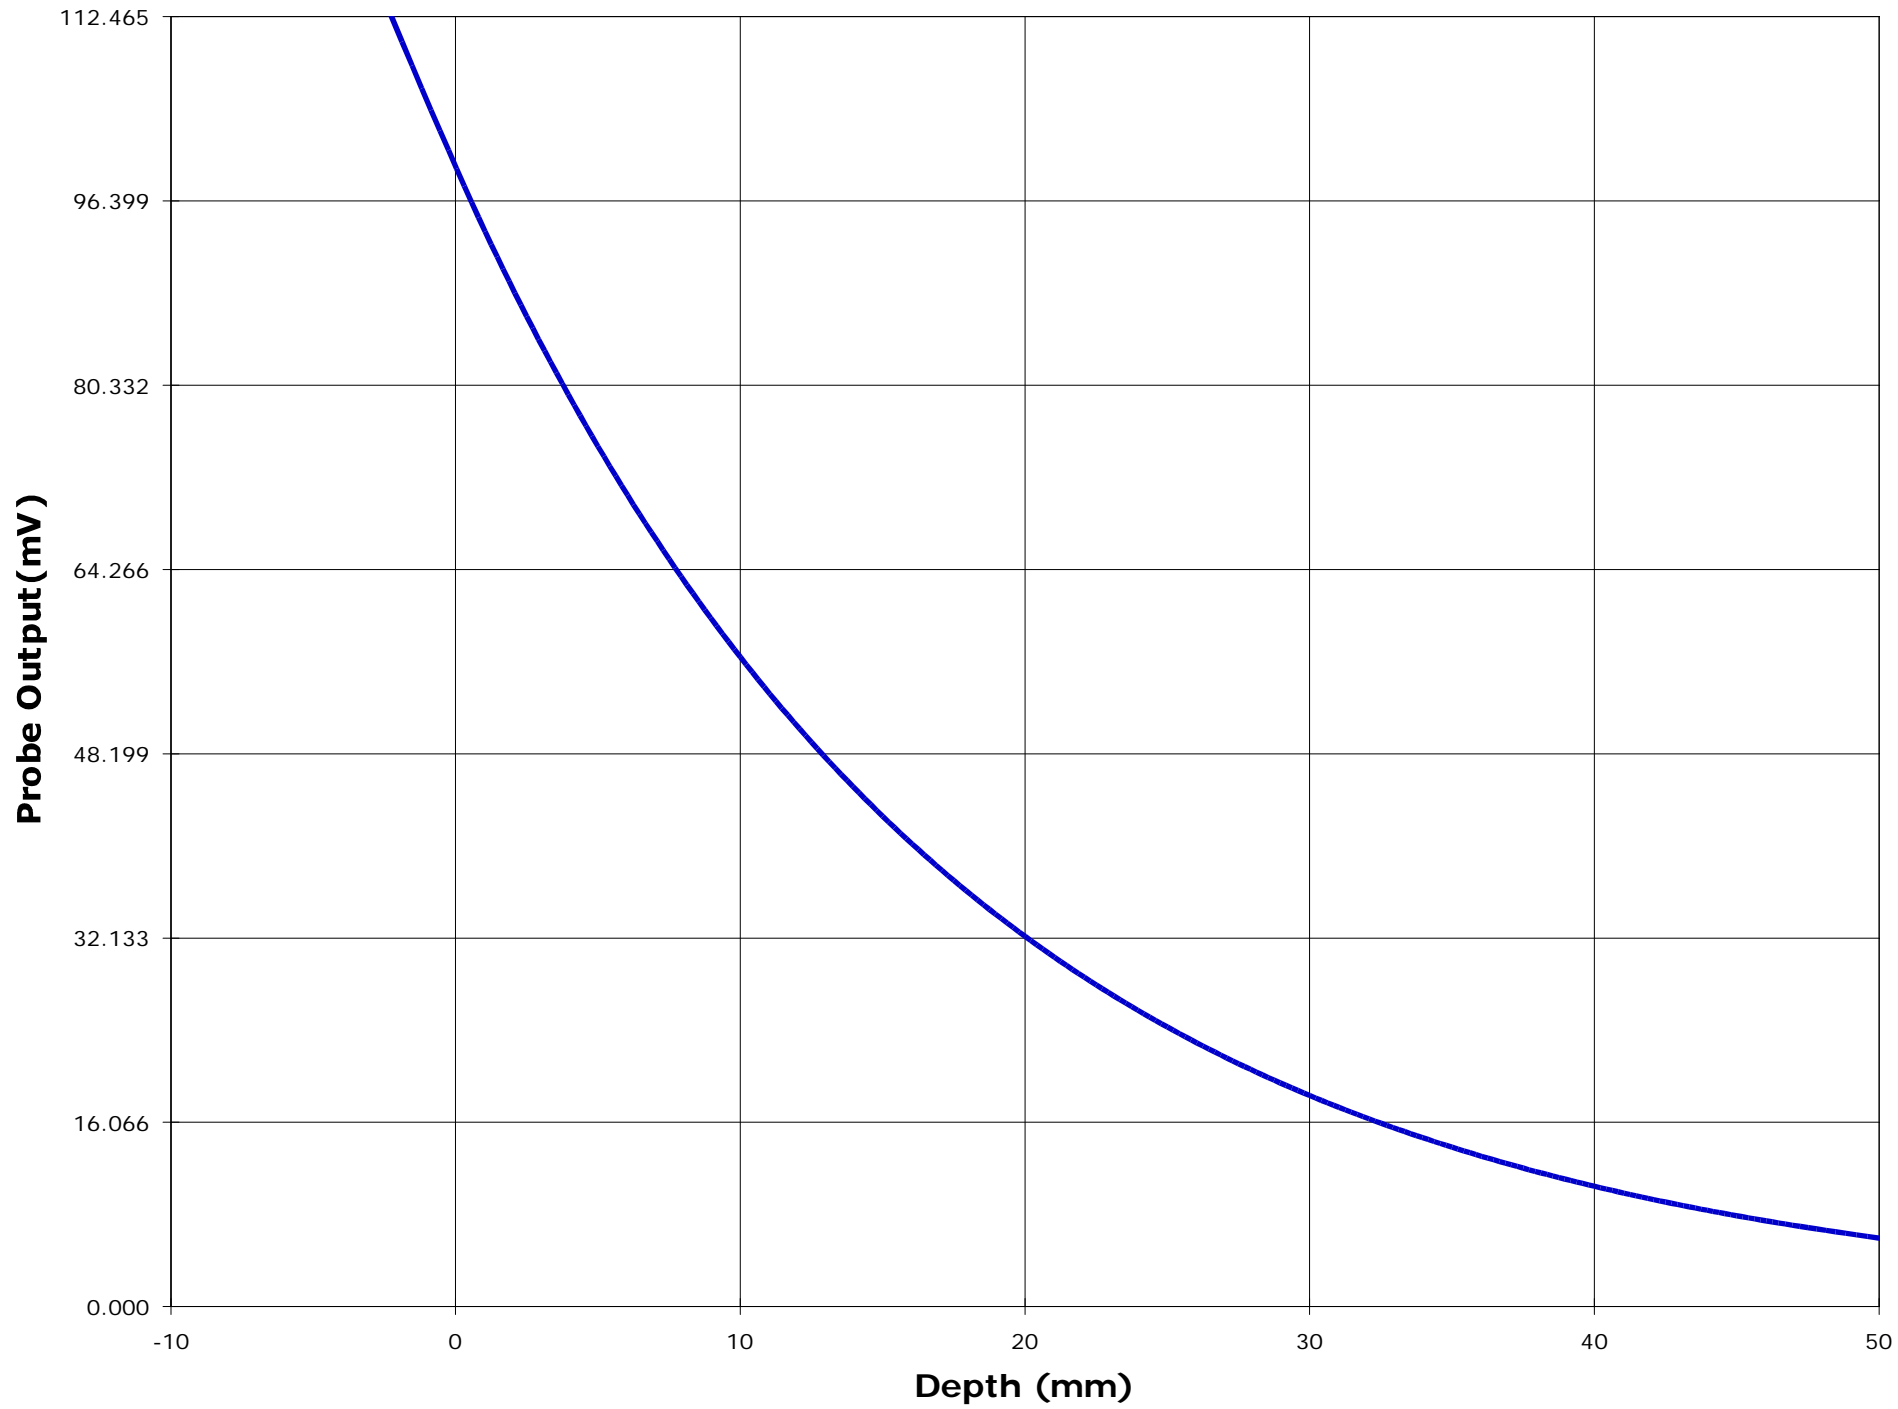

Test Information

Date : 11/10/00  
Time : 6:21:49 PM

<u>Product</u>	: UHF Transceiver	<u>Test</u>	: SAR
<u>Manufacturer</u>	: ICOM Incorporated	<u>Frequency (MHz)</u>	: 470.05 N
<u>Model Number</u>	: IC-F40GT-2	<u>Nominal Output Power (W)</u>	: 4.0
<u>Serial Number</u>	: 0002	<u>Antenna Type</u>	: Monopole
<u>FCC ID Number</u>	: AFJ IC-F40G-2	<u>Signal</u>	: CW

<u>Phantom</u>	: Head - Front	<u>Dielectric Constant</u>	: 58.1
<u>Simulated Tissue</u>	: Brain	<u>Conductivity</u>	: 0.82

<u>Probe</u>	: ETR_225_1_999	<u>Antenna Position</u>	: FIX
<u>Probe Offset (mm)</u>	: 2.250	<u>Measured Power (W)</u>	: 3.96
<u>Sensor Factor (mV)</u>	: 10.8	(conducted)	
<u>Conversion Factor</u>	: 0.316	<u>Cable Insertion Loss (dB)</u>	: 0.1
<u>Calibrated Date</u>	: 10/7/99	<u>Compensated Power (W)</u>	: 4.052

Amplifier Setting :

Channel 1 : 0.0070	Channel 2 : 0.0067	Channel 3 : 0.0081
--------------------	--------------------	--------------------

Location of Maximum Field :



X = 0                      Y = 80



Measured Values (mV) :


100.915	101.748	97.680	87.435	78.088	70.672
64.861	59.085	54.841	50.544	46.990	


<u>Peak Voltage (mV)</u>	: 111.899	<u>1 Cm Voltage (mV)</u>	: 62.306	<u>SAR (W/Kg)</u>	: 2.310
--------------------------	-----------	--------------------------	----------	-------------------	---------




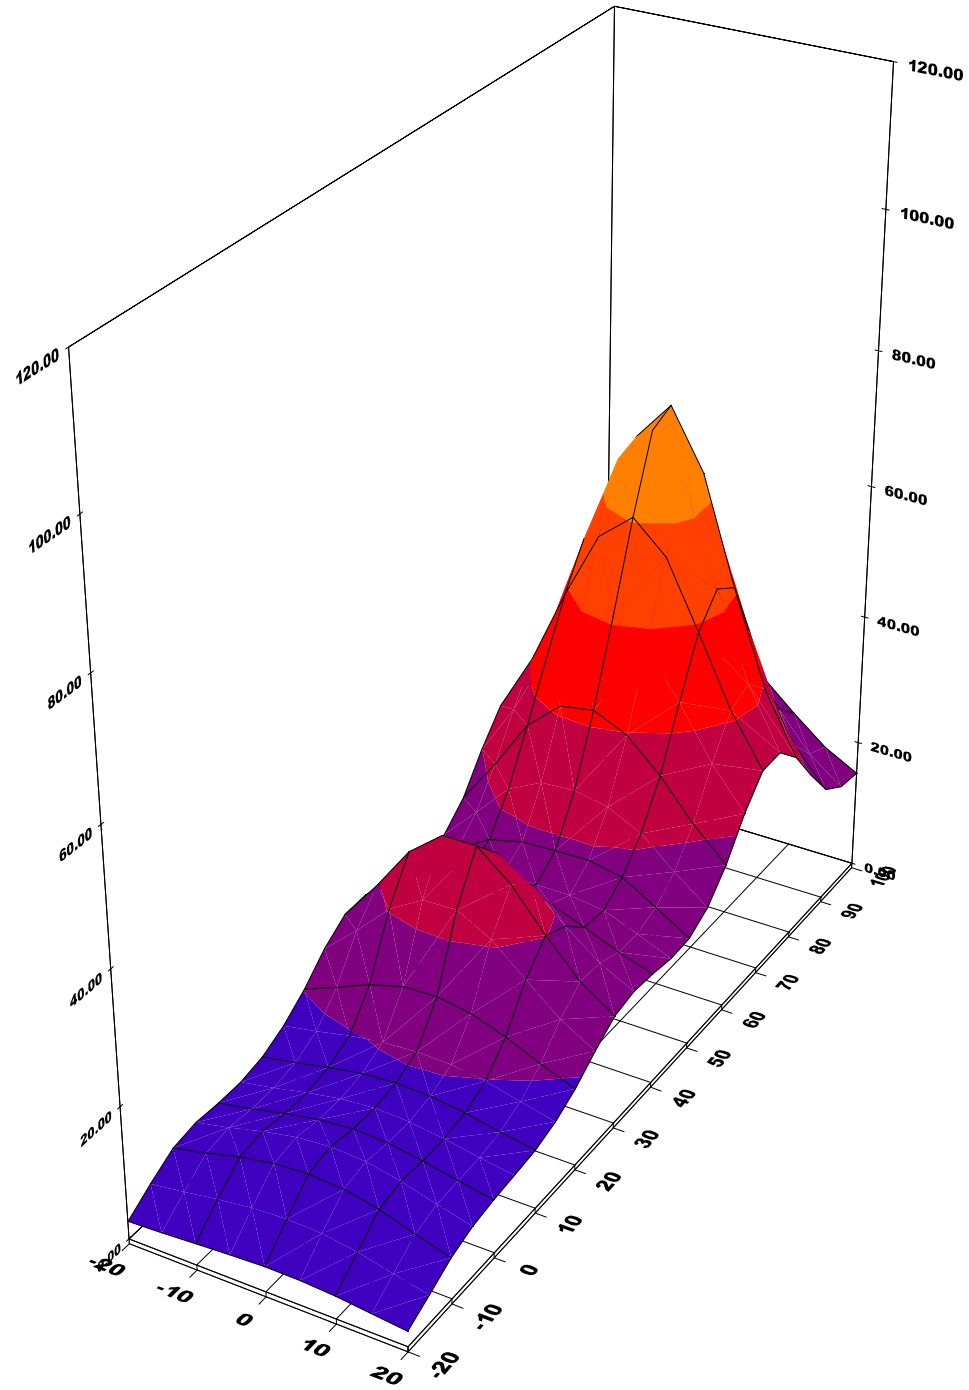


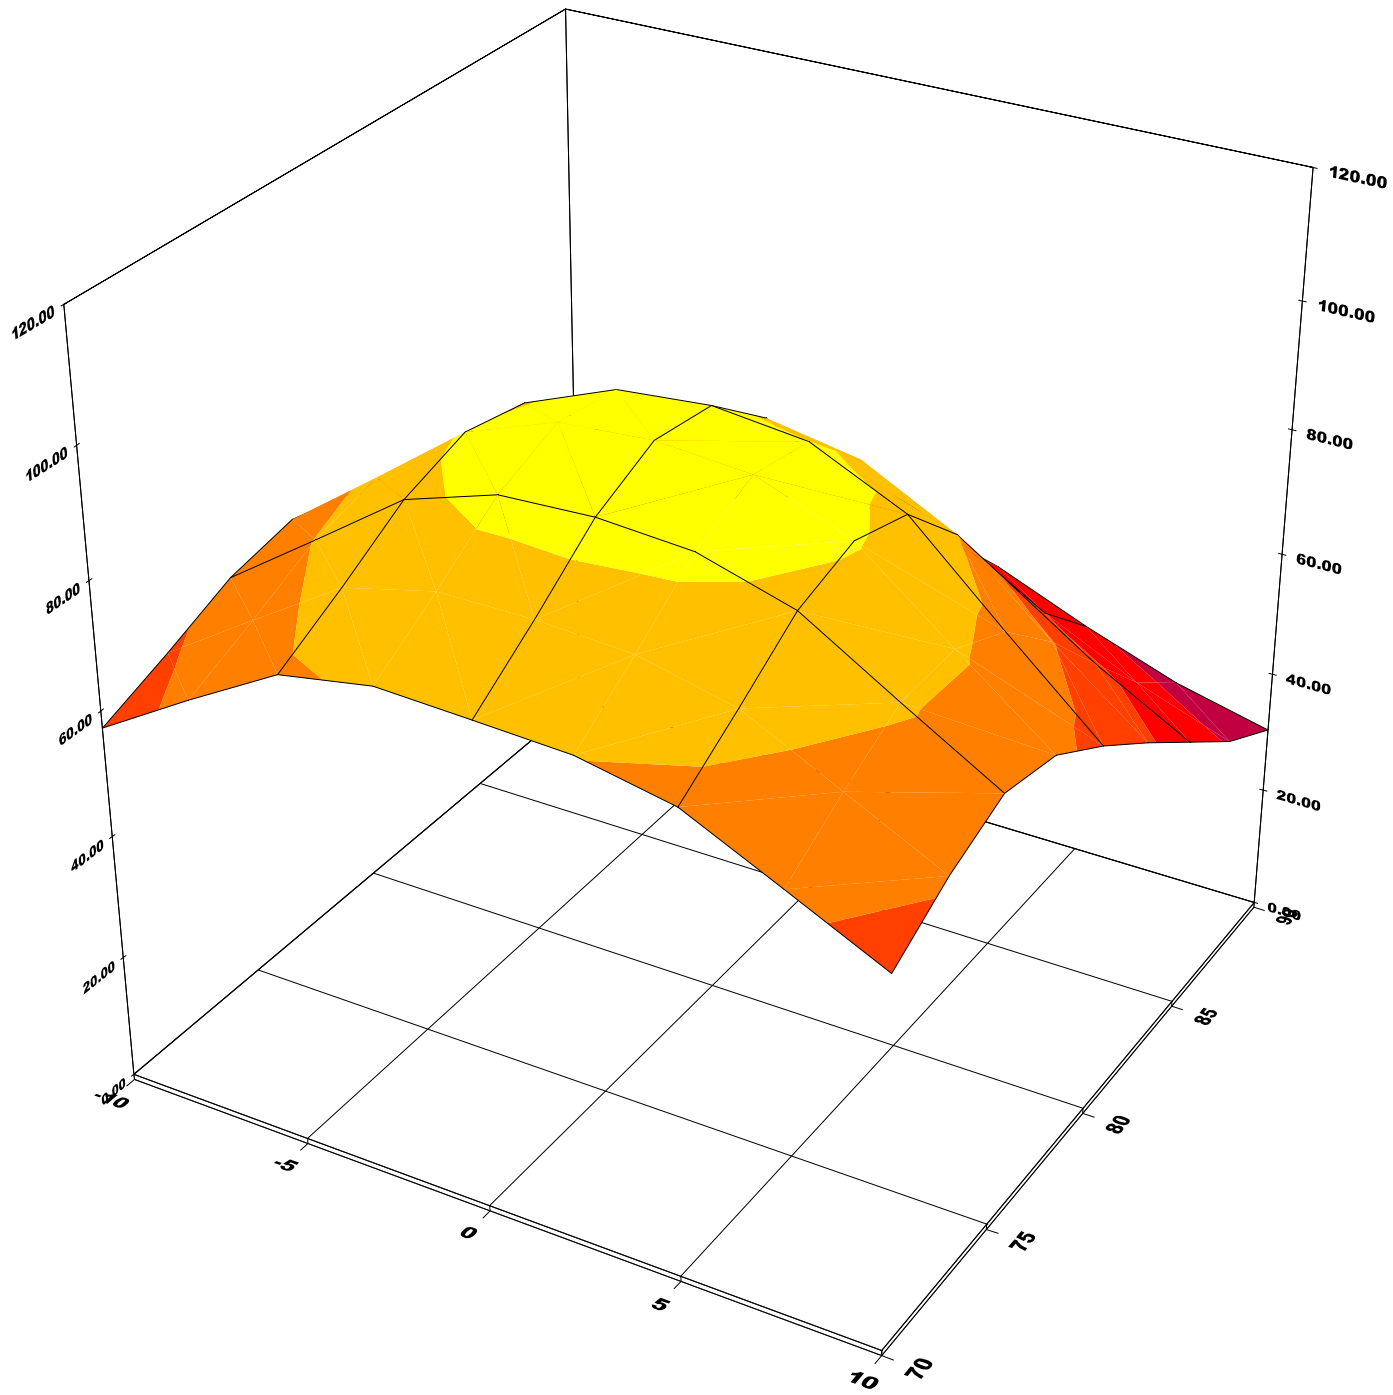

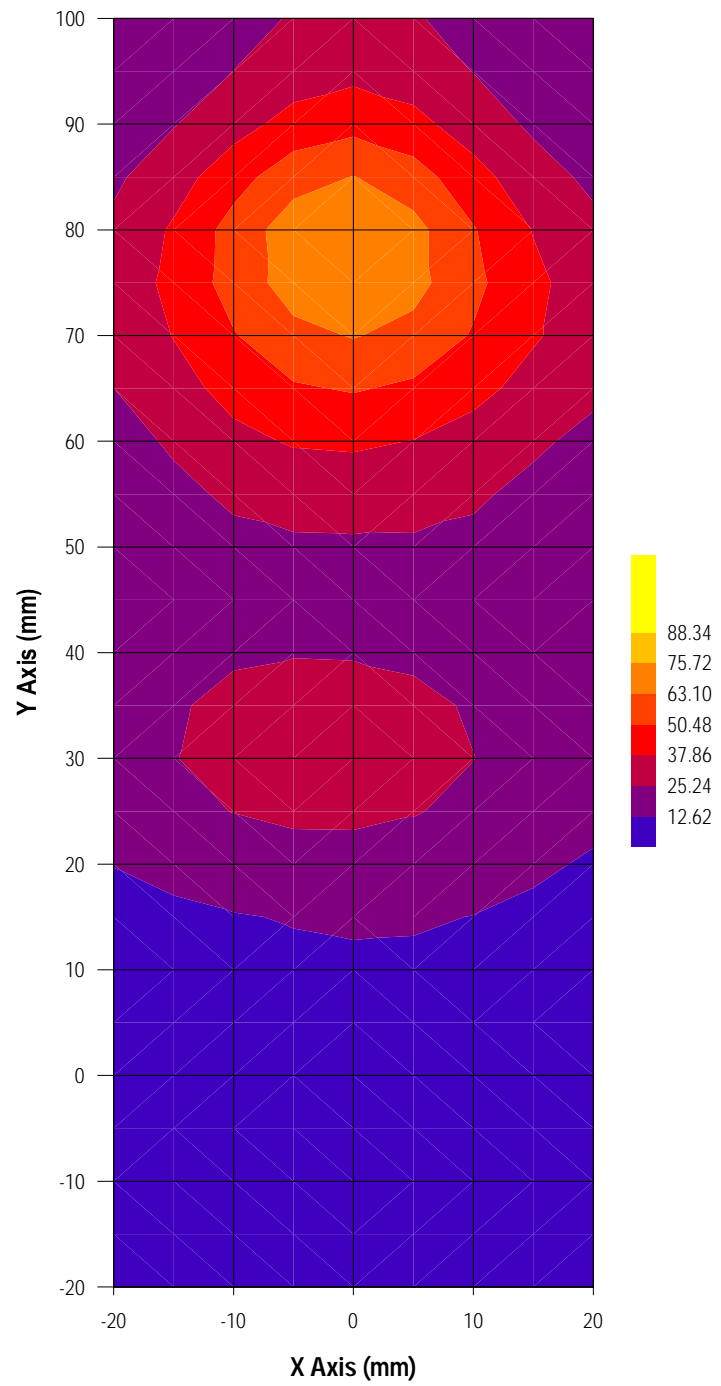

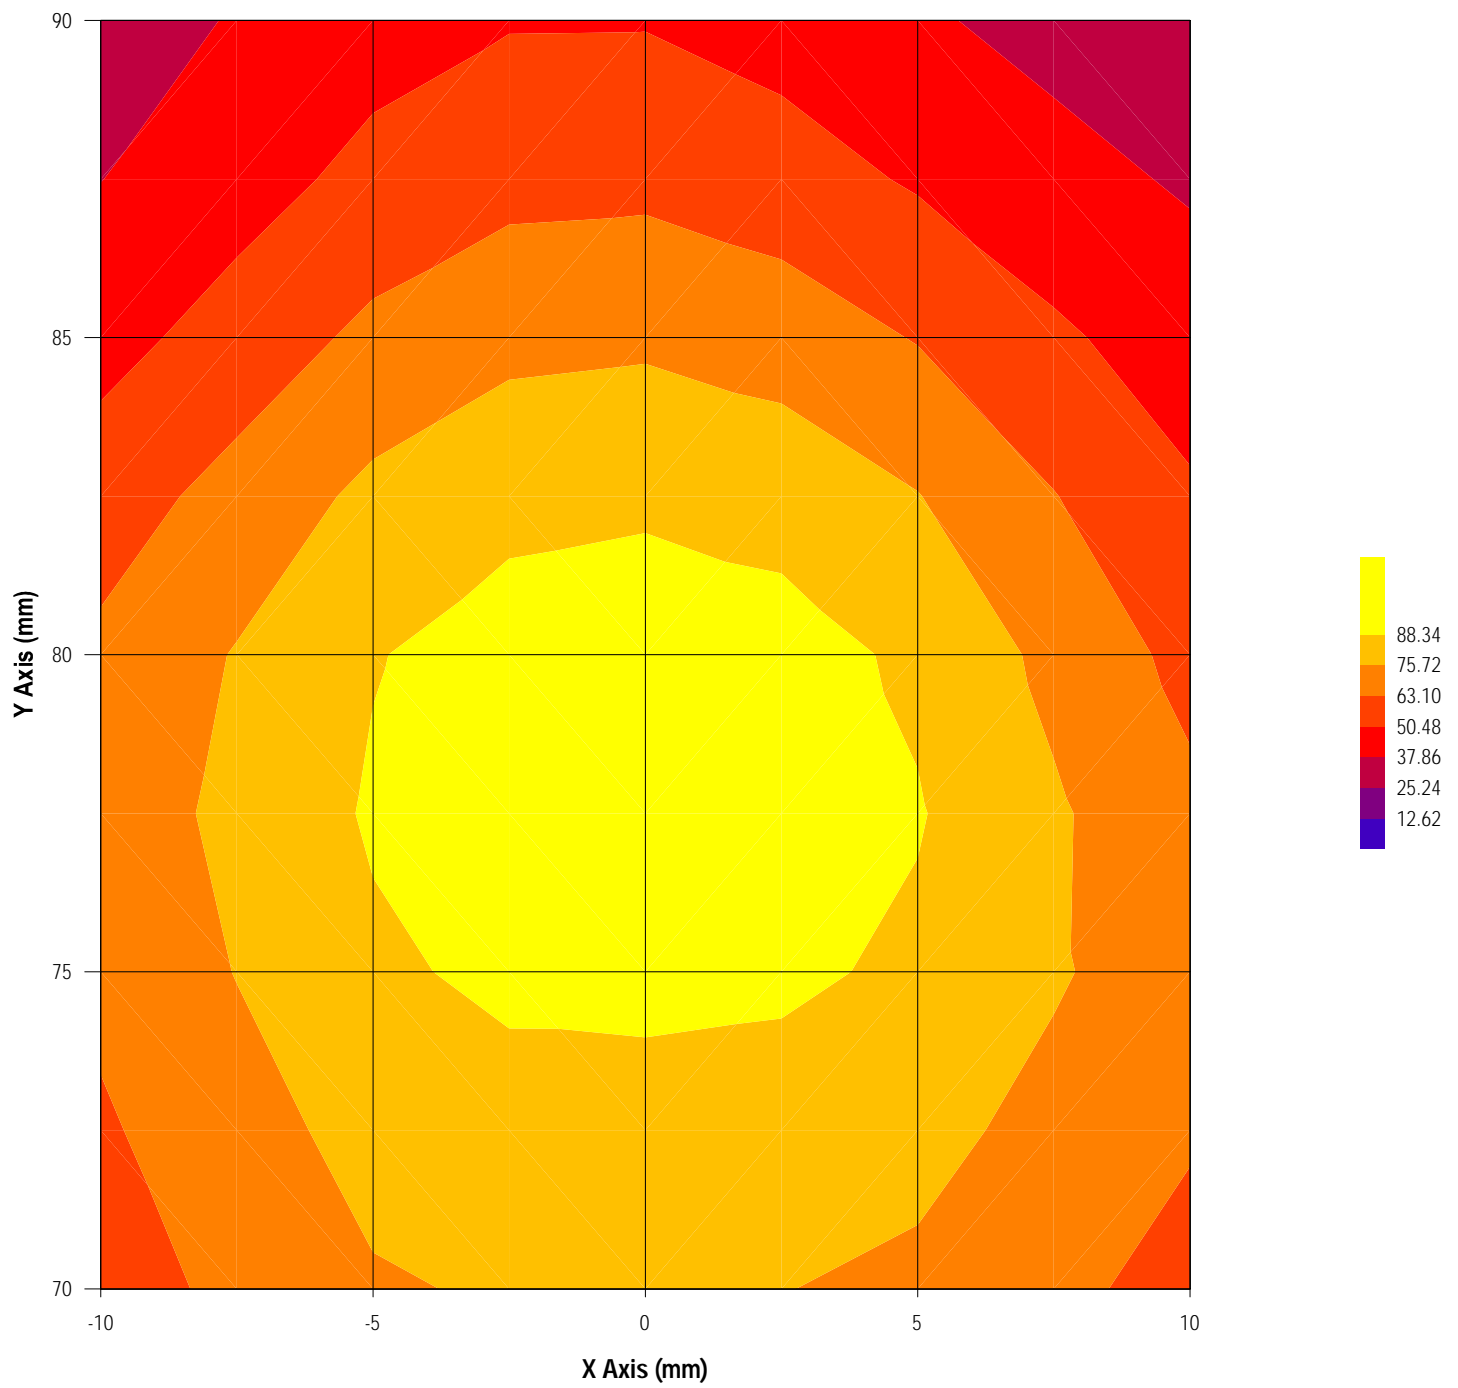

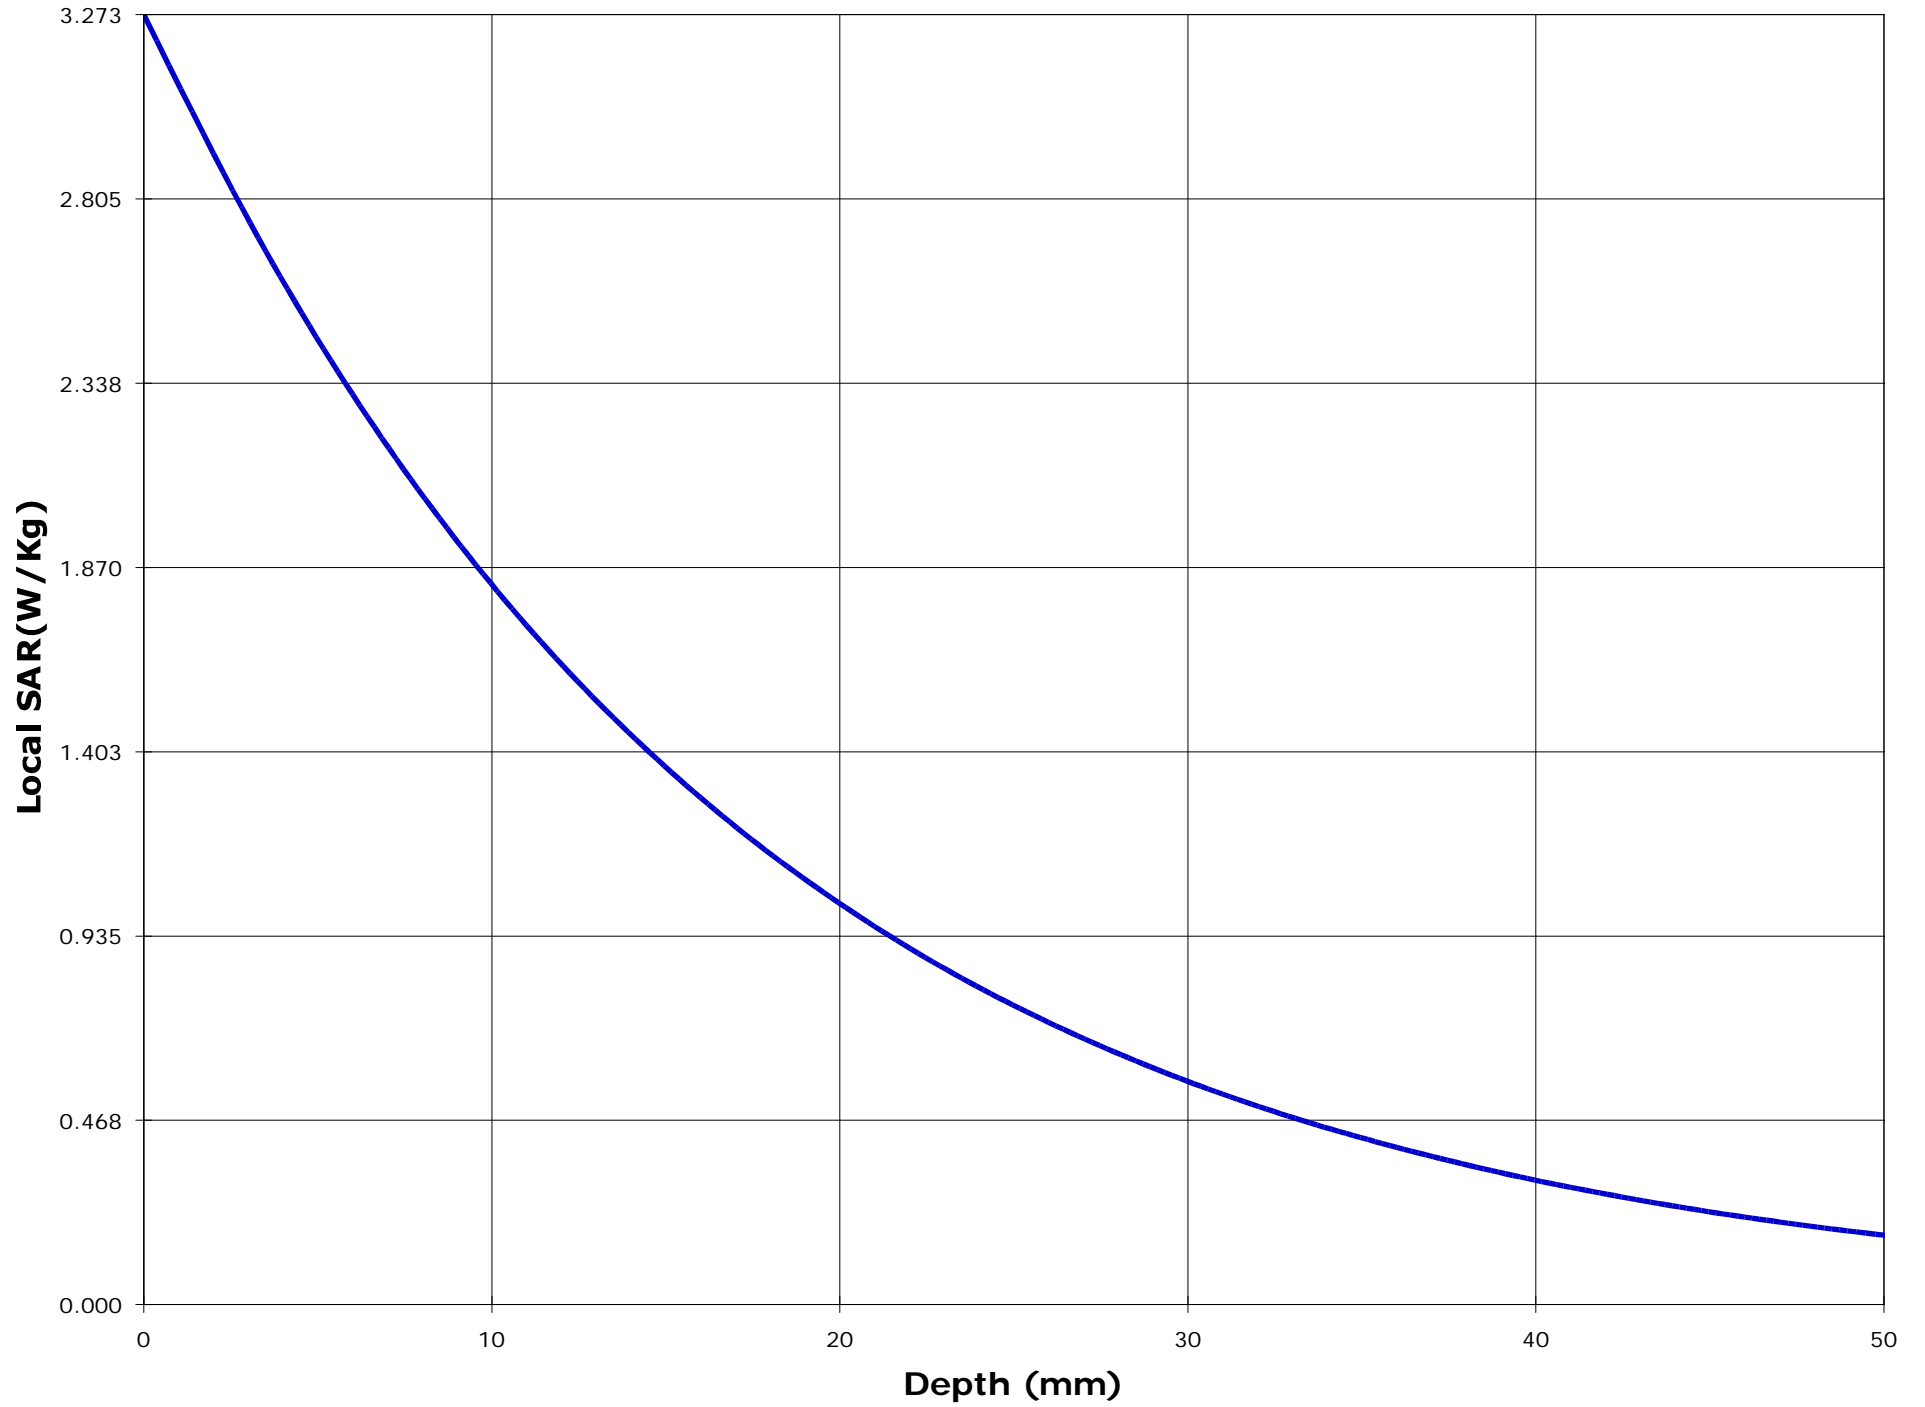

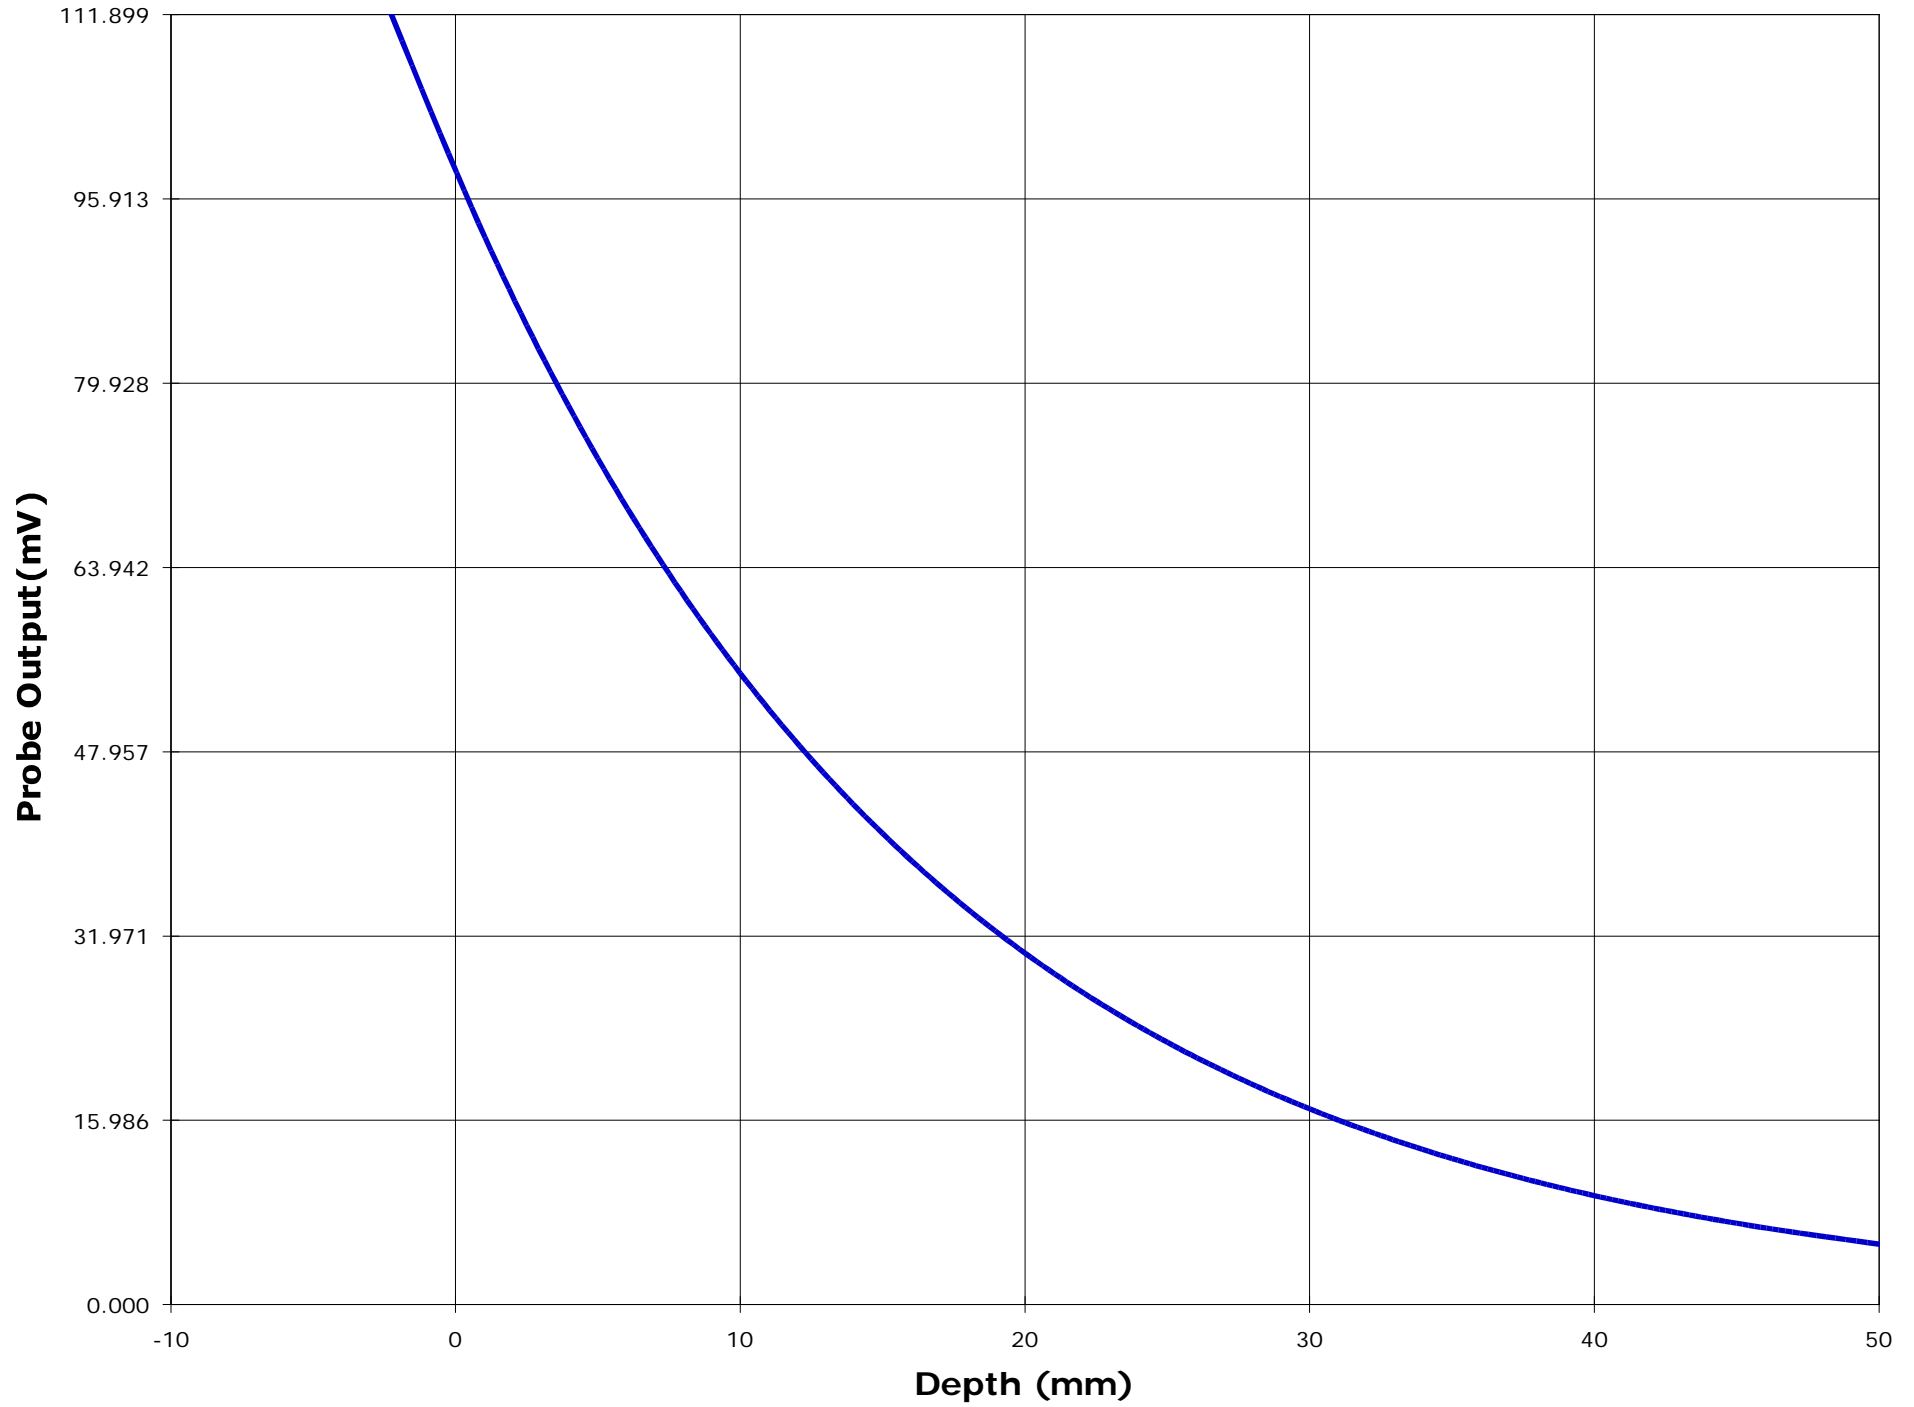

Test Information

Date : 11/10/00  
Time : 7:04:43 PM

Product : UHF Transceiver  
Manufacturer : ICOM Incorporated  
Model Number : IC-F40GT-2  
Serial Number : 0002  
FCC ID Number : AFJ IC-F40G-2

Test : SAR  
Frequency (MHz) : 489.95 N  
Nominal Output Power (W) : 4.0  
Antenna Type : Monopole  
Signal : CW

Phantom : Head - Front  
Simulated Tissue : Brain

Dielectric Constant : 58.1  
Conductivity : 0.82

Probe : ETR\_225\_1\_999  
Probe Offset (mm) : 2.250  
Sensor Factor (mV) : 10.8  
Conversion Factor : 0.316  
Calibrated Date : 10/7/99

Antenna Position : FIX  
Measured Power (W) : 3.94  
(conducted)  
Cable Insertion Loss (dB) : 0.1  
Compensated Power (W) : 4.032

Amplifier Setting :

Channel 1 : 0.0070      Channel 2 : 0.0067      Channel 3 : 0.0081



Location of Maximum Field :

X = 0                      Y = 80



Measured Values (mV) :


98.955      98.728      92.080      81.168      72.451      65.899  
60.459      55.553      51.135      47.787      44.367


Peak Voltage (mV) : 106.250      1 Cm Voltage (mV) : 58.969      SAR (W/Kg) : 2.225

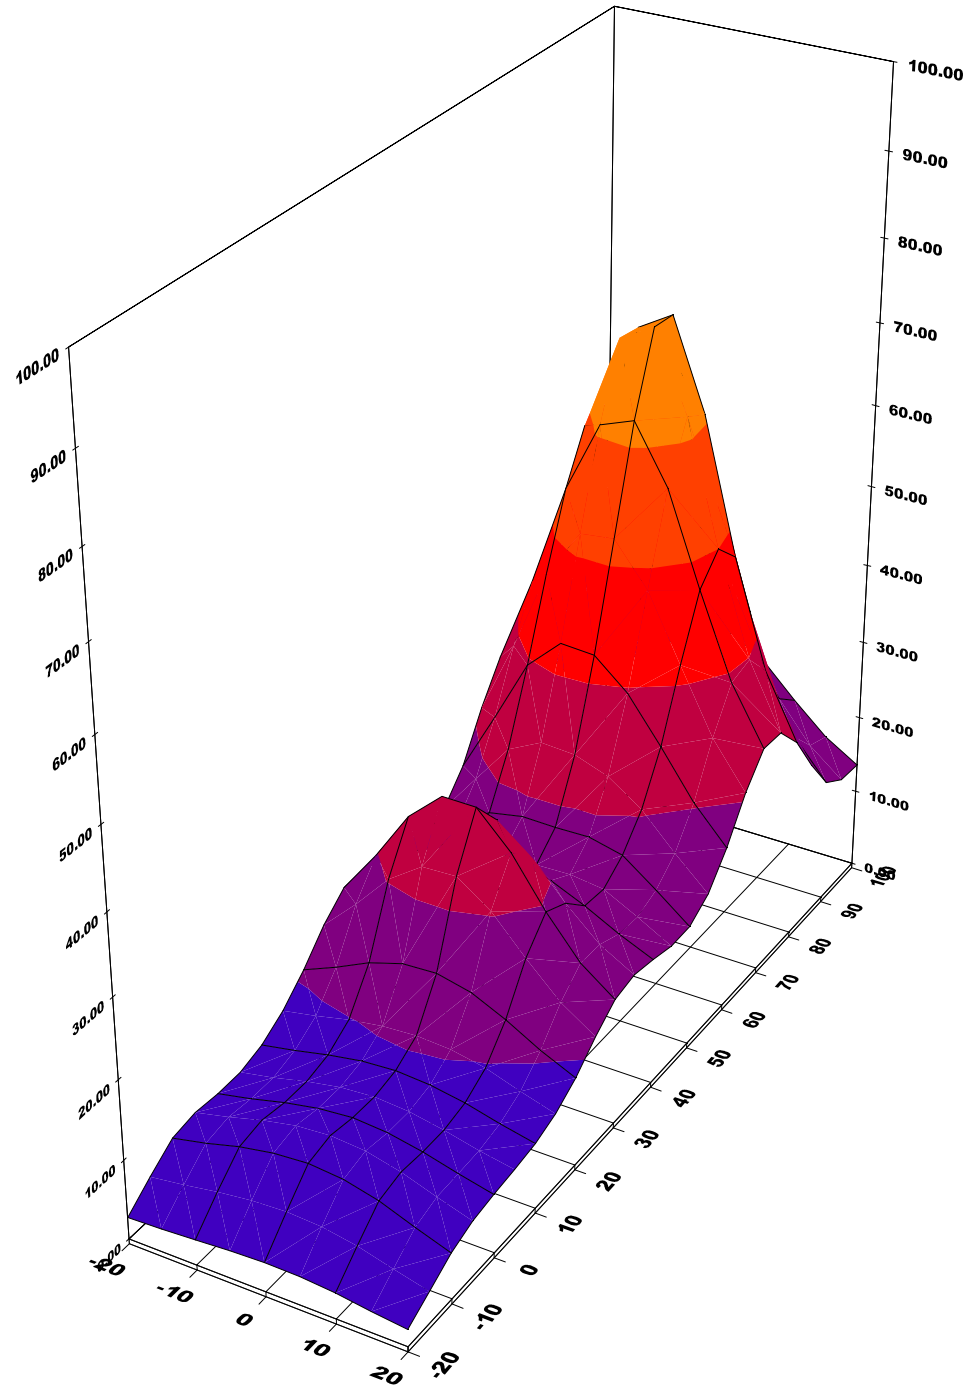





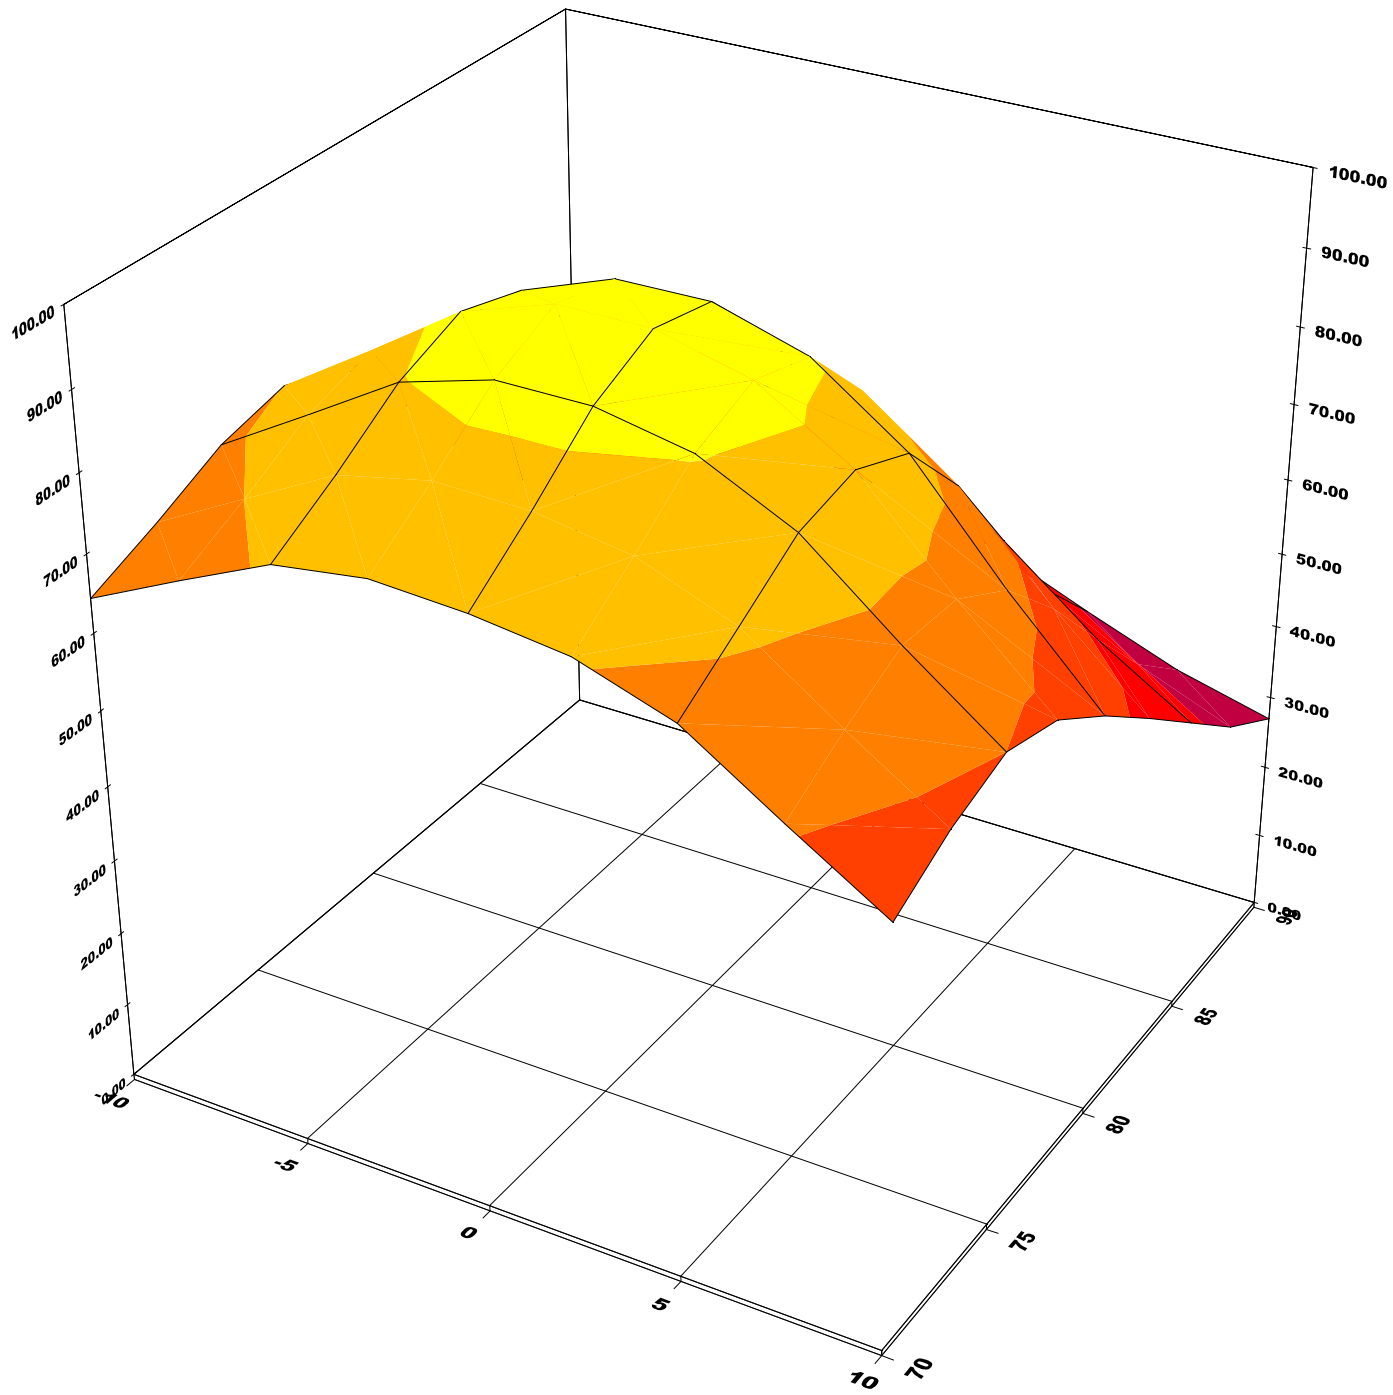

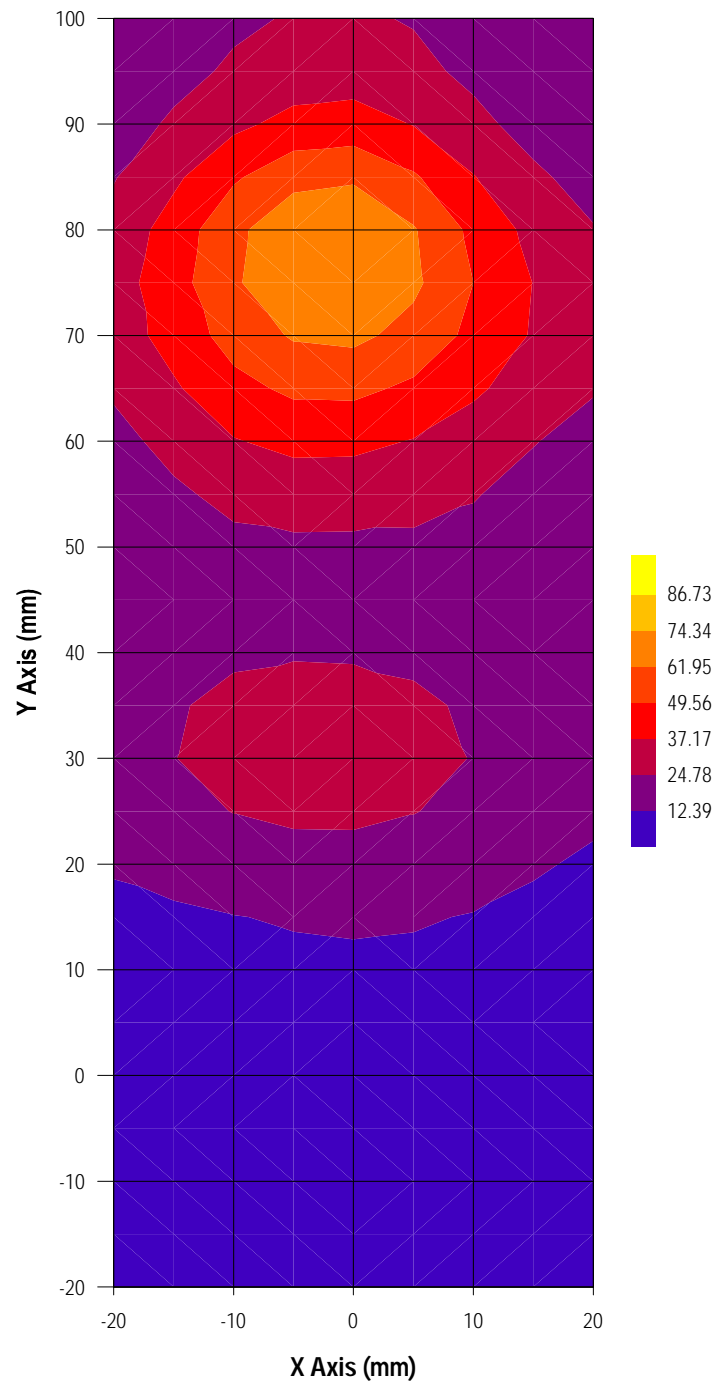

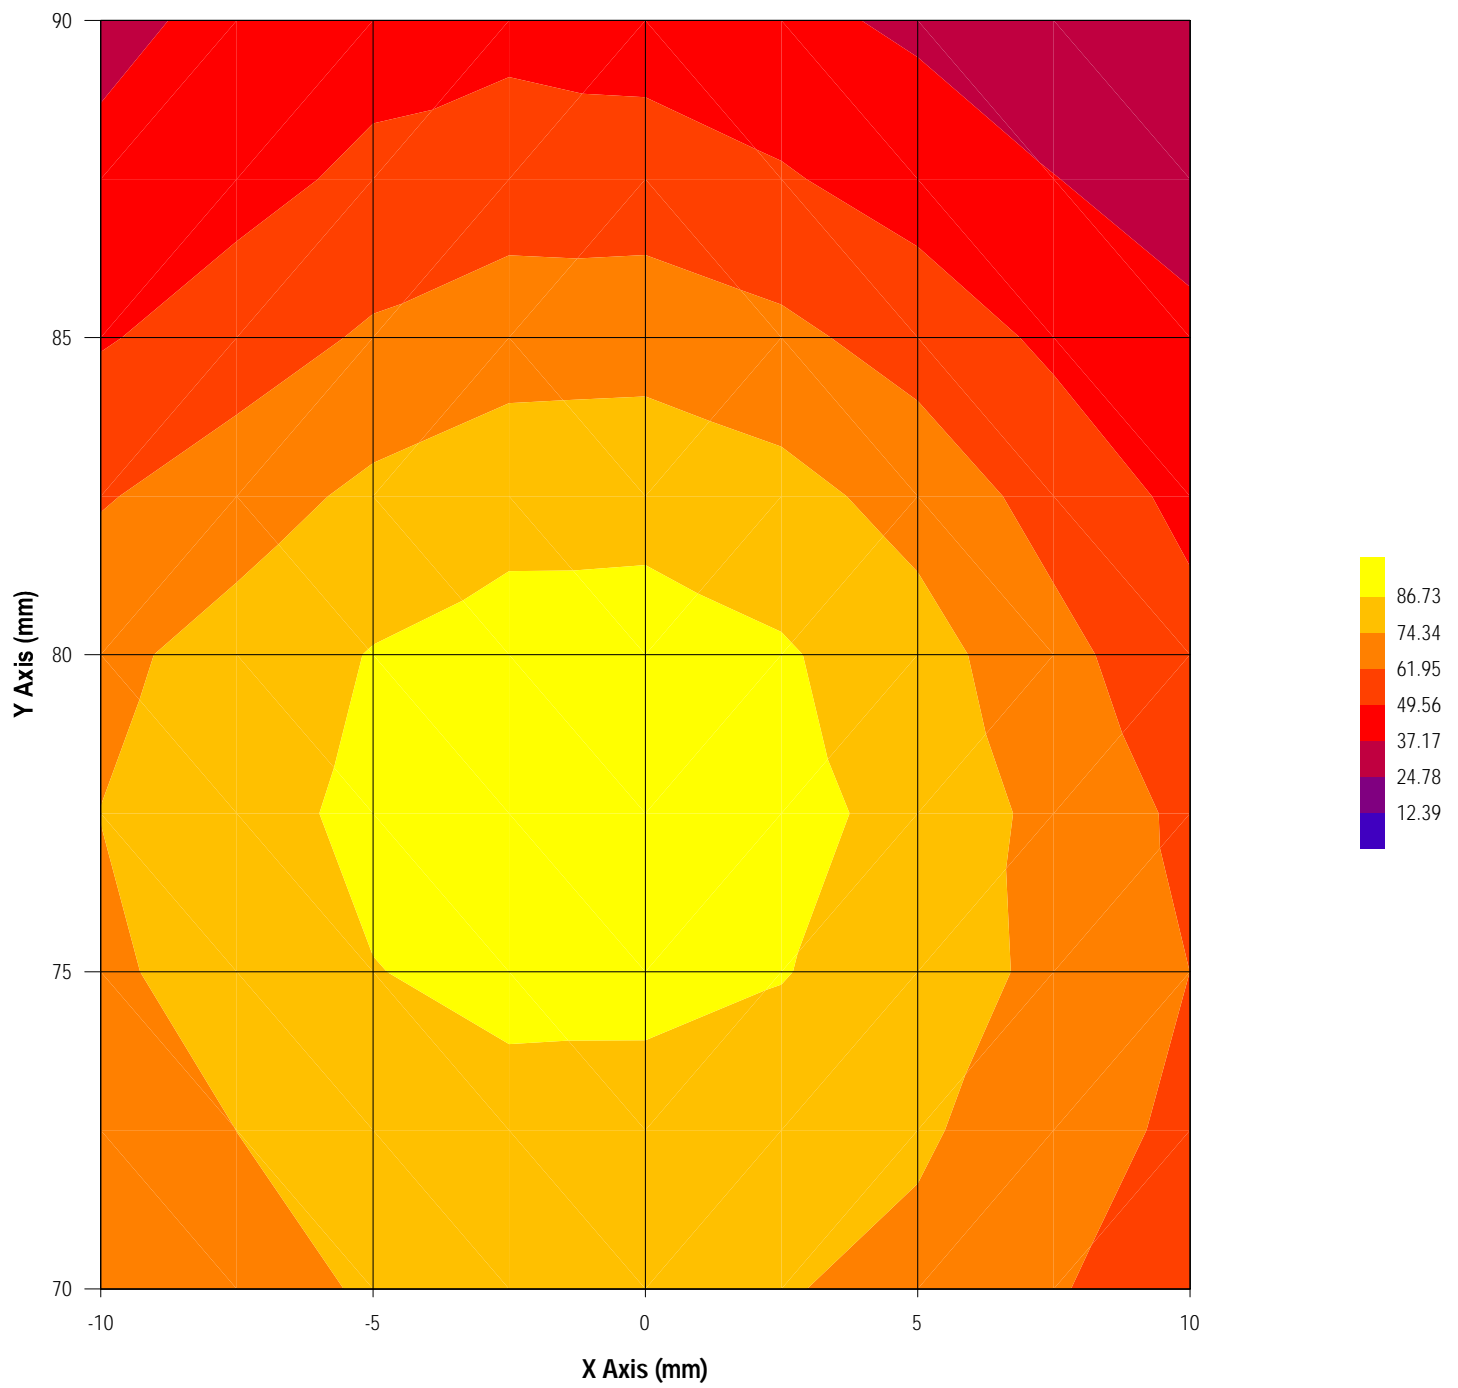

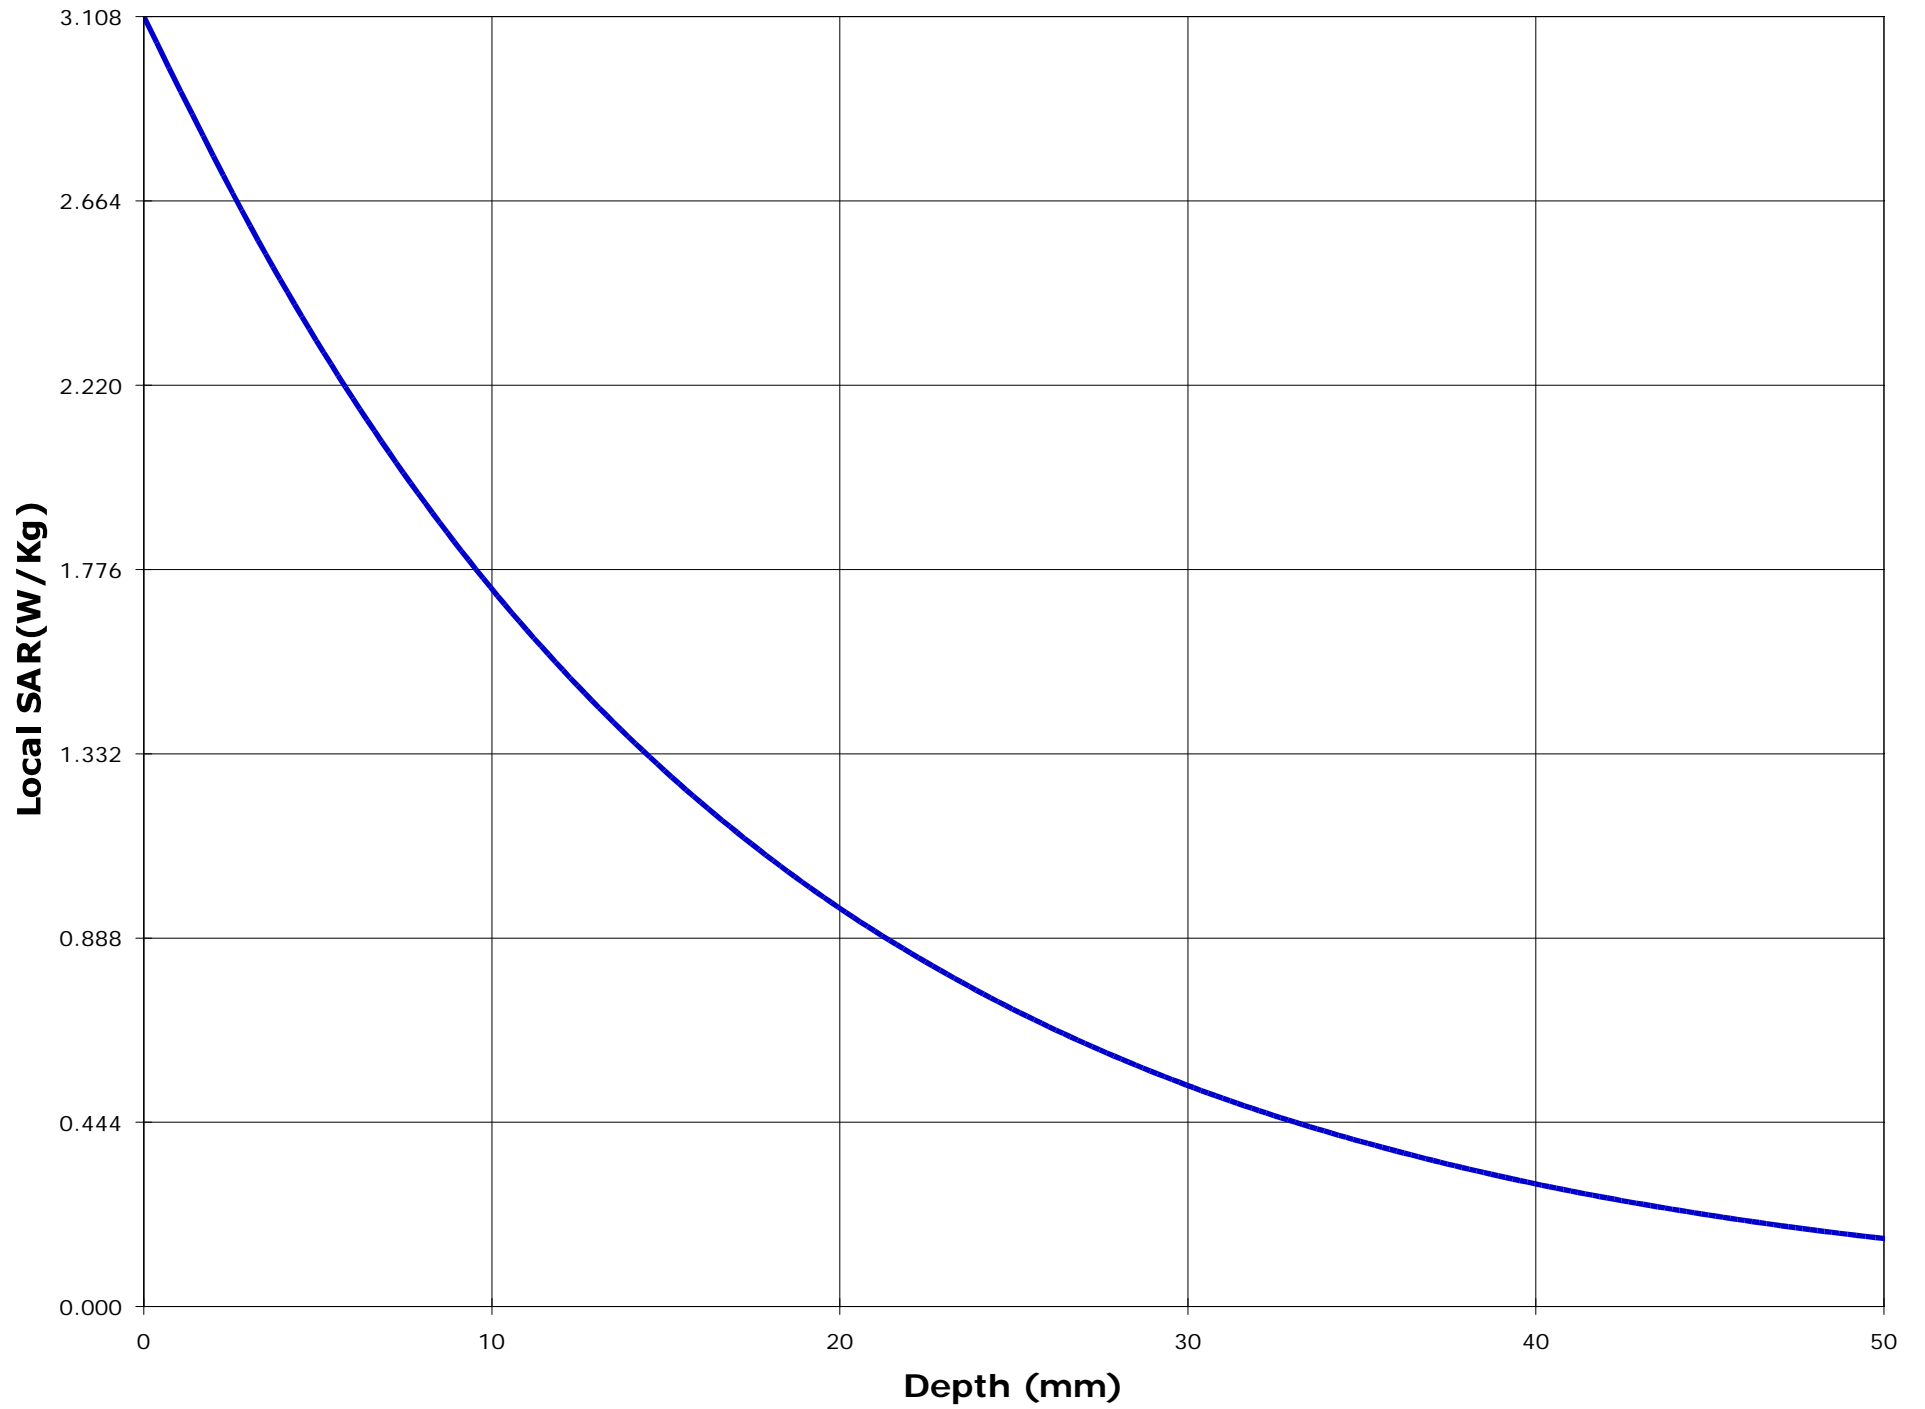

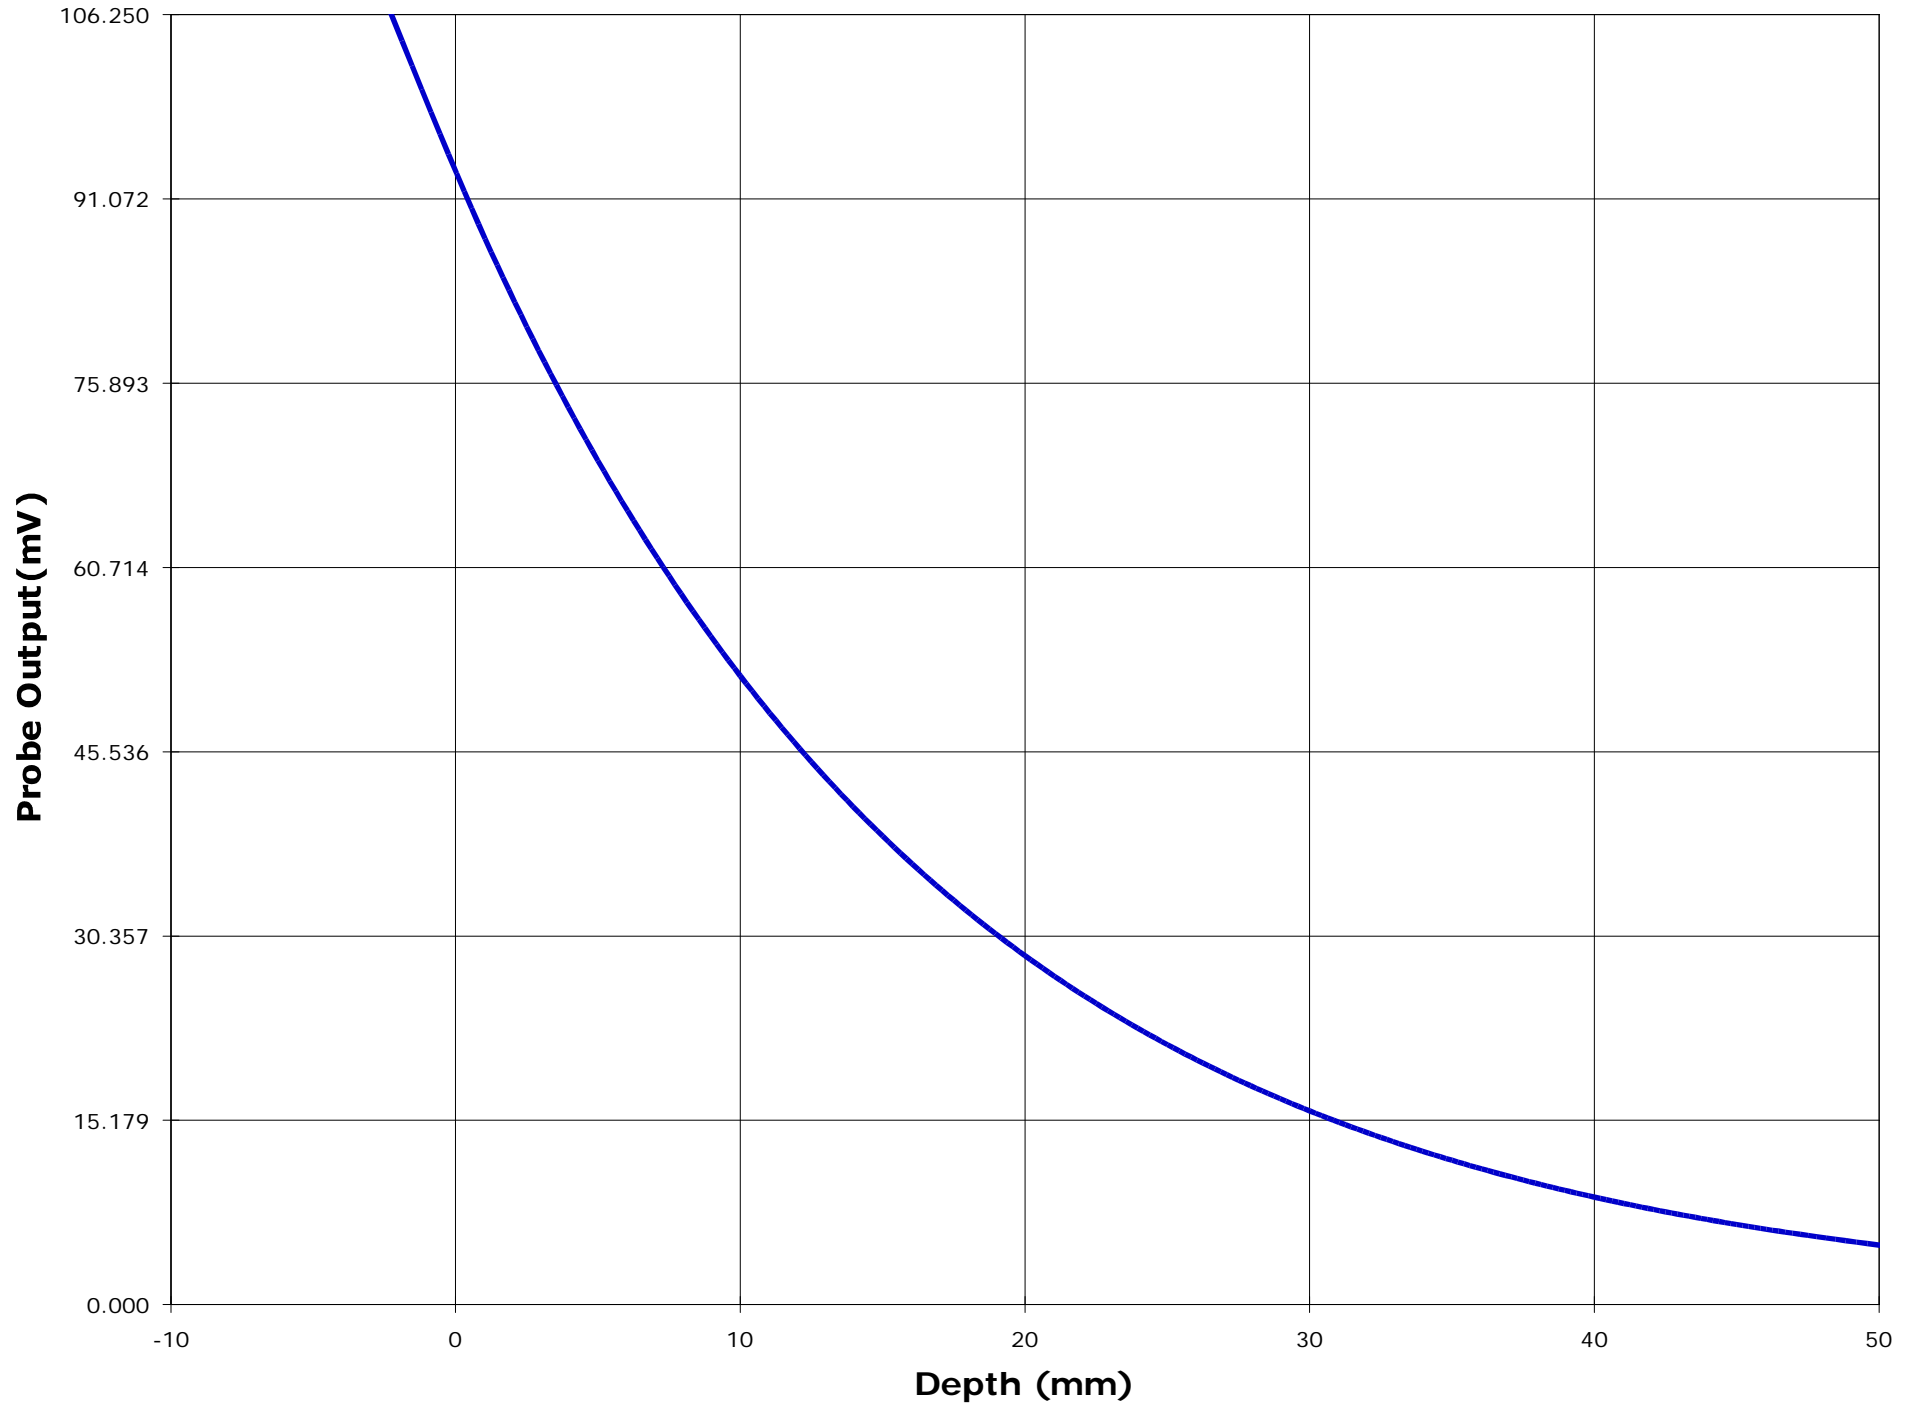

## **ANNEX C: Tissue Calibration**

---

### **ULTRATECH GROUP OF LABS**

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [yhk.ultratech@sympatico.ca](mailto:yhk.ultratech@sympatico.ca), Website: <http://www.ultratech-labs.com>

**File #: ICOM-017-SAR**

**November 20, 2000**

- Assessed by ITI (UK) Competent Body, NVLAP (USA) Accreditation Body & ACA/AUSTEL (Australia), VCCI (Japan)
- Accredited by Industry Canada (Canada) under ACC-LAB (Europe/Canada MRA and APEC/Canada MRA)
- Recognized/Listed by FCC (USA)
- *All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)*

Name: Jay

Date: 11/6/00

Frequency: 470 MHz

Mixture: Muscle

Room Temp.: 25 °C


# of Points: 11

Point Dist: 1 cm

Point	Amplitude	Phase
1	-23.10	149.60
2	-24.70	105.70
3	-26.50	60.20
4	-28.20	15.80
5	-30.00	-29.90
6	-31.60	-72.50
7	-33.30	-117.40
8	-35.00	-162.00
9	-36.80	152.90
10	-38.40	109.40
11	-40.10	65.50

Composition		
	weight	% in weight
Tap Water	34,452.0 g	51.16 %
DI Water	0.0 g	0.00 %
Sugar	31,500.0 g	46.78 %
Alcohol	0.0 g	0.00 %
Salt	1,000.0 g	1.49 %
HEC	350.0 g	0.52 %
Bactericide	35.0 g	0.05 %
	0.0 g	0.00 %
	0.0 g	0.00 %
	0.0 g	0.00 %

Results:		Target	Low Limit	High Limit	% Off Target
D. Const:	<b>58.1</b>	<b>57.5</b>	54.619847	60.369305	<b>1.03</b>
Conductivity:	<b>0.82</b>	<b>0.84</b>	0.7939122	0.8774819	<b>-1.74</b>

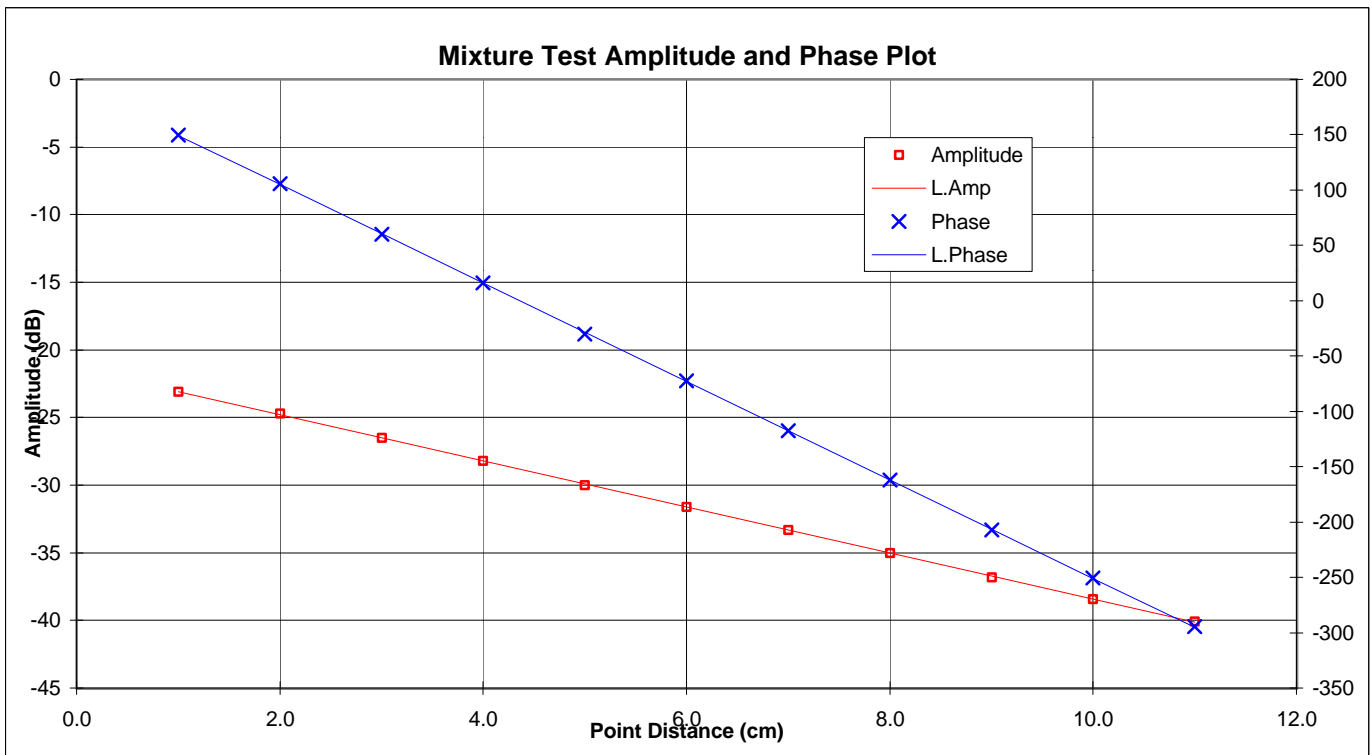

Name: **Jay**

Date: **11/3/00**

Frequency: **470** MHz

Mixture: **Brain**

Room Temp.: **25** °C

# of Points: **11**

Point Dist: **1** cm

Point	Amplitude	Phase
1	-26.70	-173.40
2	-28.30	144.90
3	-29.50	103.90
4	-30.90	62.30
5	-32.40	20.60
6	-33.80	-20.60
7	-35.30	-61.90
8	-36.80	-102.90
9	-38.30	-143.20
10	-39.70	175.90
11	-41.20	134.10

Composition		
	weight	% in weight
Tap Water	23,903.0 g	43.40 %
DI Water	0.0 g	0.00 %
Sugar	30,327.0 g	55.06 %
Alcohol	0.0 g	0.00 %
Salt	770.0 g	1.40 %
HEC	55.0 g	0.10 %
Bactericide	25.0 g	0.05 %
	0.0 g	0.00 %
	0.0 g	0.00 %
	0.0 g	0.00 %

Results:		Target	Low Limit	High Limit	% Off Target
D. Const:	<b>50.4</b>	<b>48.8</b>	46.325648	51.202032	<b>3.45</b>
Conductivity:	<b>0.65</b>	<b>0.62</b>	0.5851886	0.6467874	<b>4.85</b>

