


99% OCCUPIED BANDWIDTH



ICOM AMERICA INC.
UHF TRANSCEIVER, MODEL: IC-F620-1
Channel: 1, Tx Freq: 400.0500 MHz, Output Power: 4.4 dBm, Channel Spacing: 12.5 kHz
Modulation: FM Modulation with 2.5 kHz Sine Wave signal, Freq. Dev: 2.5 kHz
99 % OBW

Date: April 17, 2002
Tested by: Hung Trinh
PLOT # 1

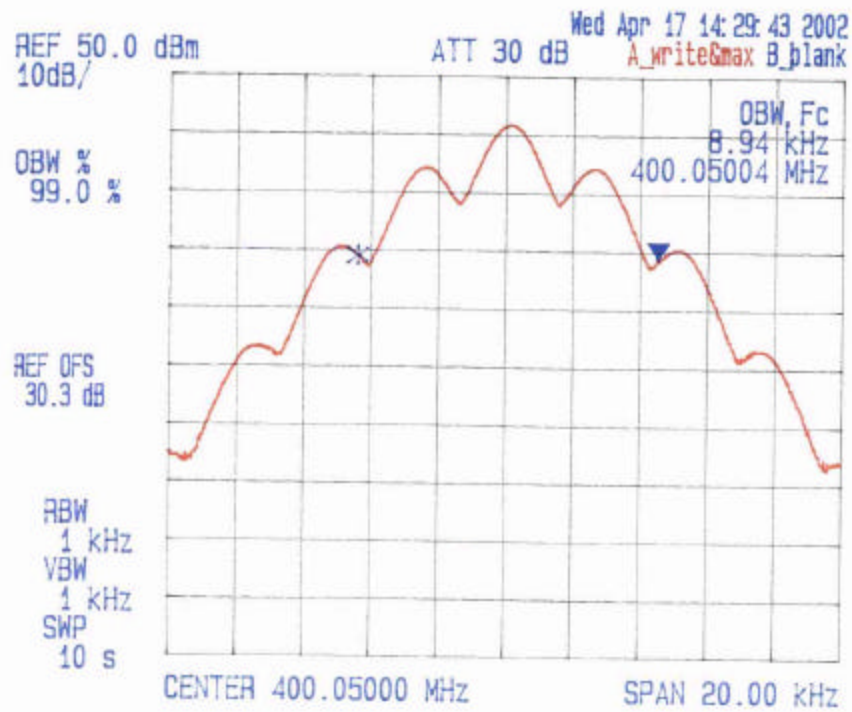


99% OCCUPIED BANDWIDTH




ICOM AMERICA INC.
UHF TRANSCEIVER, MODEL: IC-F620-1
Channel: 2, Tx Freq: 415.050 MHz, Output Power: 1.0 W, Channel Spacing: 12.5 kHz
Modulation: FM Modulation with 2.5 kHz Sine Wave signal, Freq. Dev: 2.5 kHz
99 % OBW

Date: April 17, 2002
Tested by: Hung Trinh

PLOT # 2

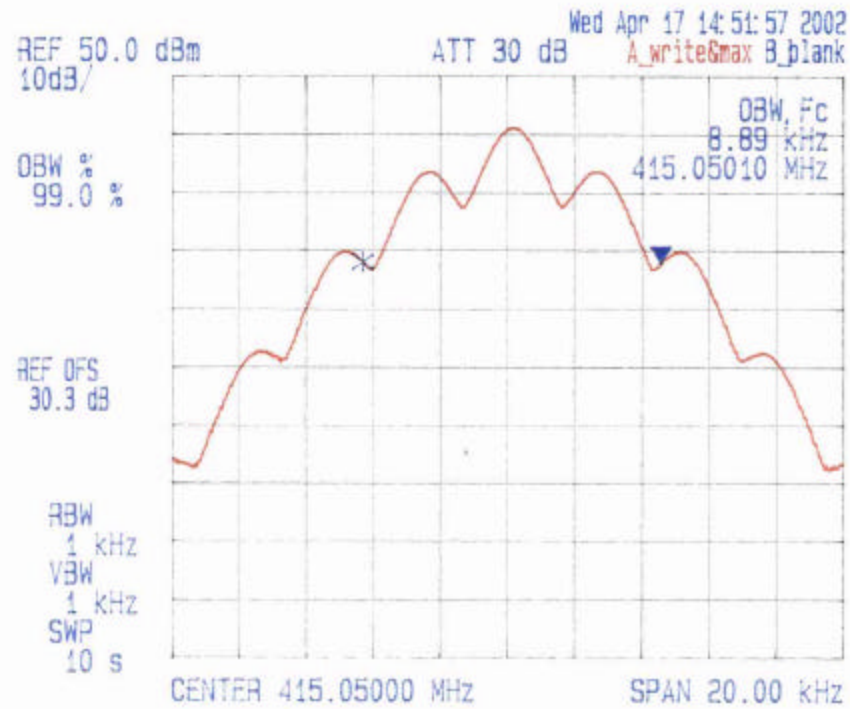

99% OCCUPIED BANDWIDTH

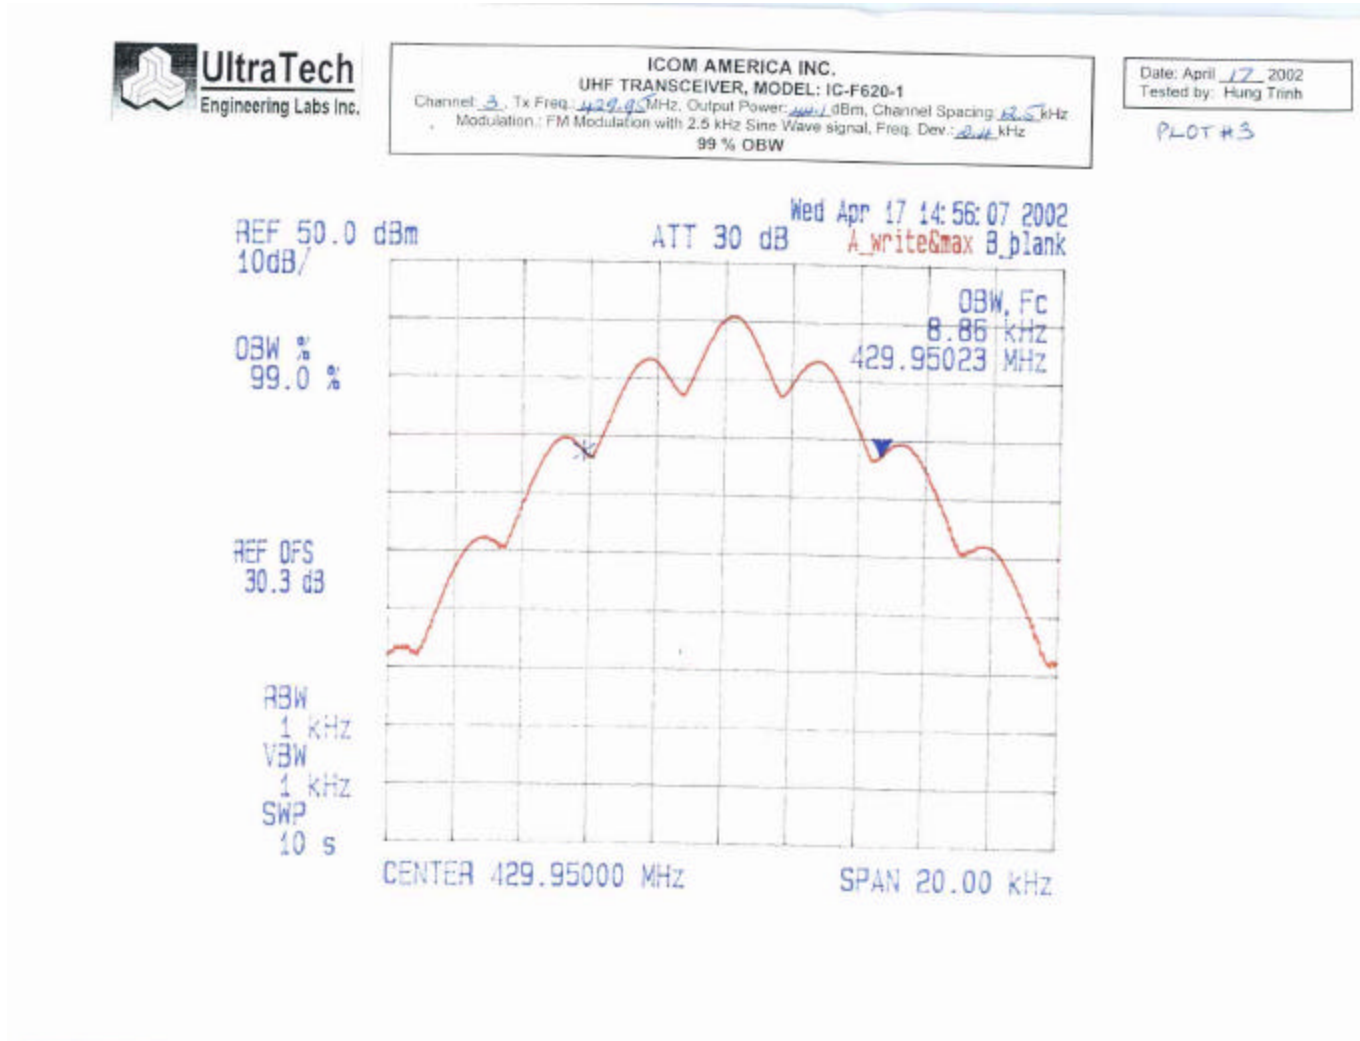


99% OCCUPIED BANDWIDTH




ICOM AMERICA INC.
UHF TRANSCEIVER, MODEL: IC-F620-1
Channel: 400.050 MHz, Tx Freq: 400.050 MHz, Output Power: 4.00 W, Channel Spacing: 12.5 kHz
Modulation: FM Modulation with 2.5 kHz Sine Wave signal, Freq. Dev: 2.5 kHz
99 % OBW

Date: April 17, 2002
Tested by: Hung Trinh

PLOT # 4

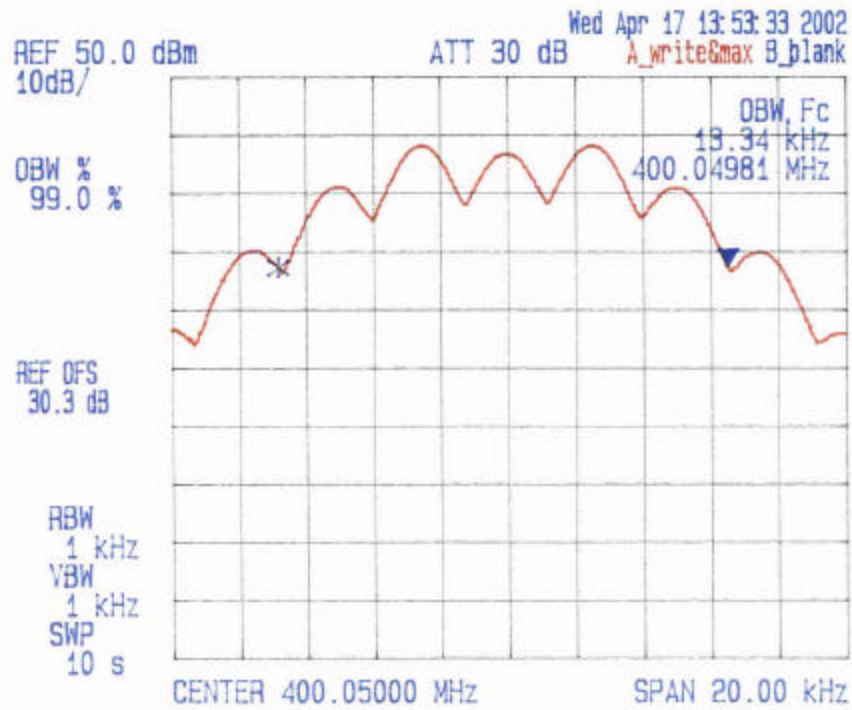

99% OCCUPIED BANDWIDTH

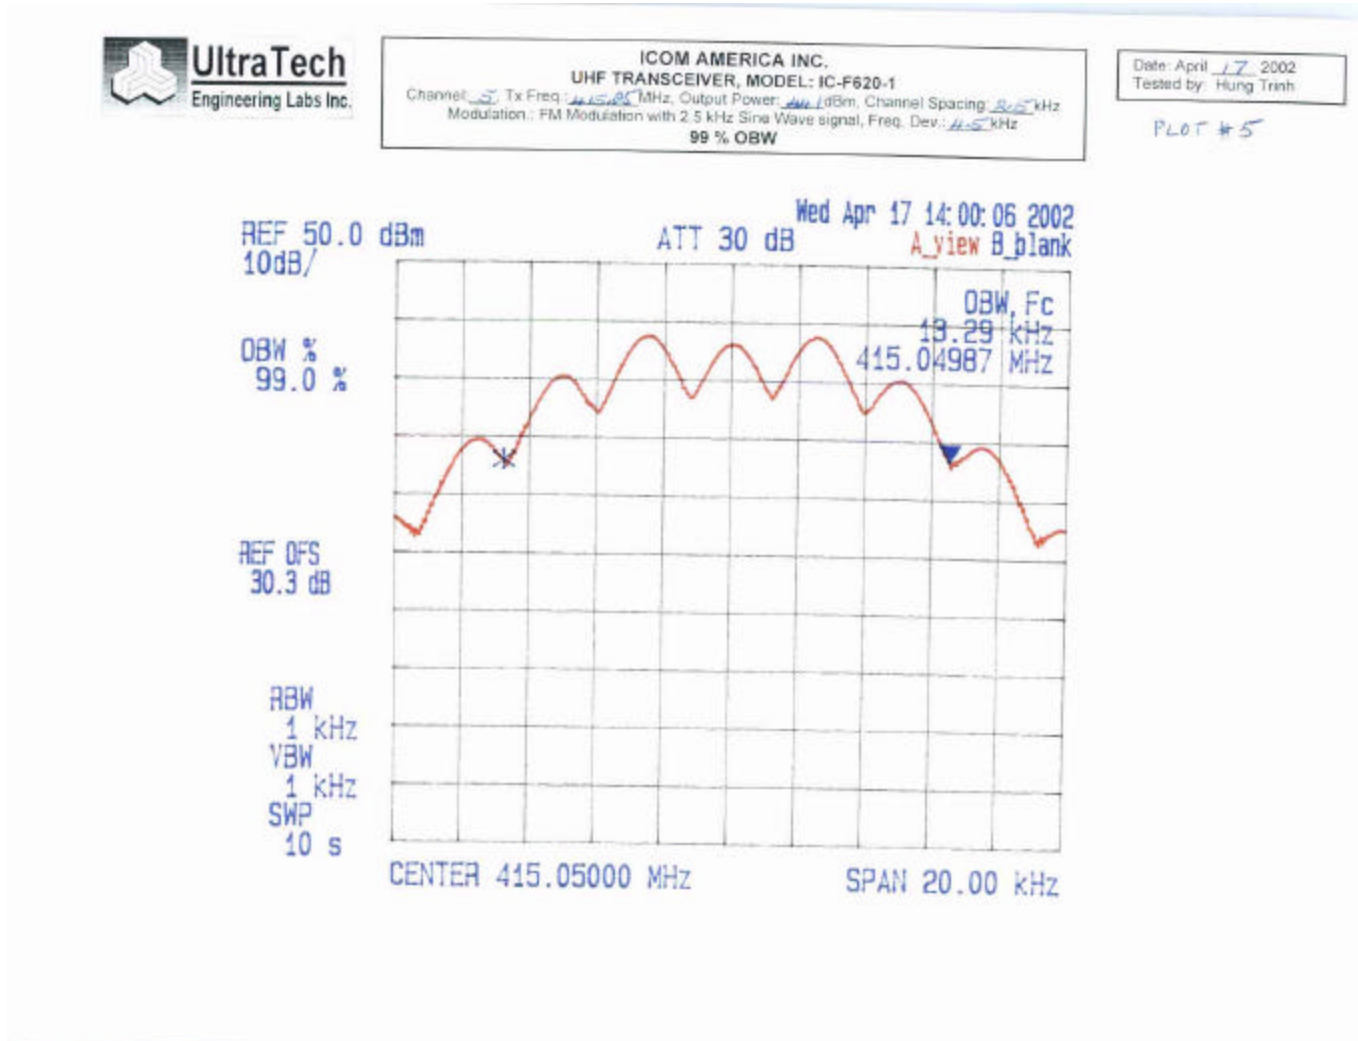

99% OCCUPIED BANDWIDTH



ICOM AMERICA INC.
UHF TRANSCEIVER, MODEL: IC-F620-1
Channel: 2, Tx Freq: 429.950 MHz, Output Power: 1.00 dBm, Channel Spacing: 2.5 kHz
Modulation: FM Modulation with 2.5 kHz Sine Wave signal, Freq. Dev: 4.5 kHz
99 % OBW

Date: April 17 2002
Tested by: Hung Trinh

PLOT # 6

