



Engineering and Testing for EMC and Safety Compliance

## TYPE CERTIFICATION REPORT

ICOM Incorporated  
1-6-19 Kamikurazukuri  
Hirano-ku  
Osaka, Japan 547

**MODEL: MR-570R**

**FCC ID: AFJMR-570R**

*May 29, 2001*

STANDARDS REFERENCED FOR THIS REPORT	
PART 2: 1999	FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS
PART 80: 1998	STATIONS IN THE MARITIME SERVICES
PART 90: 1998	PRIVATE LAND MOBILE RADIO SERVICES
ANSIC63.4-1992	STANDARD FORMAT MEASUREMENT/TECHNICAL REPORT PERSONAL COMPUTER AND PERIPHERALS
ANSI/TIA/EIA603- 1992	LAND MOBILE FM OR PM COMMUNICATIONS EQUIPMENT MEASUREMENT AND PERFORMANCE STANDARDS
ANSI/TIA/EIA 603-1-1998	ADDENDUM TO ANSI/TIA/EIA 603-1992
RSP-100	RADIO EQUIPMENT CERTIFICATION PROCEDURE

FCC Rules Parts	Frequency Range	Output Power (W)	Freq. Tolerance	Emission Designator
80 and 90	9380-9440 MHz	4000	9301.64- 9513.64 MHz	55M0P0N
Industry Canada Standard	Frequency Range	Output Power (W)	Freq. Tolerance	Emission Designator
RSP-100	9380-9440 MHz	4000	9301.64- 9513.64 MHz	55M0P0N

### REPORT PREPARED BY:

EMI Technician: **Desmond A. Fraser**  
Administrative Writer: **Melissa Carter**

*Document Number: 2001092*

*No part of this report may be reproduced without the full written approval of Rhein Tech Laboratories, Inc.*

360 Herndon Parkway, Suite 1400  
Herndon, VA 20170  
Phone: 703-689-0368; Fax: 703-689-2056; Metro: 703-471-6441



## TABLE OF CONTENTS

<b>1</b>	<b>GENERAL INFORMATION .....</b>	<b>4</b>
1.1	TEST FACILITY .....	4
1.2	RELATED SUBMITTAL(S)/GRANT(S) .....	4
<b>2</b>	<b>CONFORMANCE STATEMENT .....</b>	<b>5</b>
<b>3</b>	<b>TESTED SYSTEM DETAILS .....</b>	<b>6</b>
<b>4</b>	<b>FCC RULES AND REGULATIONS PART 2 §2.1046 (A): RF OUTPUT POWER.....</b>	<b>7</b>
4.1	TEST PROCEDURE .....	7
4.2	TEST DATA .....	7
<b>5</b>	<b>FCC RULES AND REGULATIONS PART 2 §2.1047 (C) (1): MODULATION CHARACTERISTICS</b>	<b>7</b>
5.1	TEST PROCEDURE .....	7
5.2	TEST EQUIPMENT .....	7
5.3	TEST DATA .....	8
<b>6</b>	<b>FCC RULES AND REGULATIONS PART 2 §2.1049 (C) (1): OCCUPIED BANDWIDTH .....</b>	<b>12</b>
6.1	TEST PROCEDURE .....	12
6.2	TEST EQUIPMENT .....	12
6.3	TEST DATA .....	12
<b>7</b>	<b>FCC RULES AND REGULATIONS PART 2 §2.1051 (A): SPURIOUS EMISSIONS AT THE</b>	<b>18</b>
<b>ANTENNA TERMINAL .....</b>		
7.1	TEST PROCEDURE .....	18
7.2	TEST DATA .....	18
<b>8</b>	<b>FCC RULES AND REGULATIONS PART 2 §2.1053 (A): FIELD STRENGTH OF SPURIOUS</b>	<b>19</b>
<b>RADIATION .....</b>		
8.1	TEST PROCEDURE .....	19
8.1.1	Test Equipment .....	19
8.1.2	Test Data .....	20
<b>9</b>	<b>FCC RULES AND REGULATION PART 2 §2.1055: FREQUENCY STABILITY .....</b>	<b>21</b>
9.1	TEST PROCEDURE .....	21
9.1.1	FCC § 80.209(b) .....	21
9.2	TEST EQUIPMENT .....	22
9.3	TEST DATA .....	23



## TABLE OF FIGURES

FIGURE 1:	CONFIGURATION OF TESTED SYSTEM.....	6
-----------	-------------------------------------	---

## TABLE OF TABLES

TABLE 1:	COMPONENTS USED IN TEST CONFIGURATION .....	6
TABLE 2:	PART 2 §2.1053 (A): FIELD STRENGTH OF SPURIOUS RADIATION .....	20
TABLE 3:	FREQUENCY STABILITY/TEMPERATURE VARIATION 0.11 $\mu$ S PULSE LENGTH .....	23
TABLE 4:	FREQUENCY STABILITY/TEMPERATURE VARIATION 0.91 $\mu$ S PULSE LENGTH .....	23
TABLE 5:	FREQUENCY STABILITY/VOLTAGE VARIATION 0.11 $\mu$ S PULSE LENGTH .....	24
TABLE 6:	FREQUENCY STABILITY/VOLTAGE VARIATION 0.91 $\mu$ S PULSE LENGTH .....	24

## TABLE OF PLOTS

PLOT 1:	PULSE LENGTH (0.11 MICROSECONDS) .....	8
PLOT 2:	PULSE LENGTH (0.29 MICROSECONDS) .....	9
PLOT 3:	PULSE LENGTH (0.36 MICROSECONDS) .....	10
PLOT 4:	PULSE LENGTH (0.91 MICROSECONDS) .....	11
PLOT 5:	BANDWIDTH (0.11 MICROSECONDS PULSE LENGTH) .....	12
PLOT 6:	BANDWIDTH (0.29 MICROSECONDS PULSE LENGTH) .....	13
PLOT 7:	BANDWIDTH (0.36 MICROSECONDS PULSE LENGTH) .....	14
PLOT 8:	BANDWIDTH (0.36 MICROSECONDS PULSE LENGTH) .....	15
PLOT 9:	MAGNETRON CONTROL PULSE 0.1 $\mu$ S.....	16
PLOT 10:	MAGNETRON CONTROL PULSE 0.26 $\mu$ S .....	16
PLOT 11:	MAGNETRON CONTROL PULSE 0.36 $\mu$ S .....	17
PLOT 12:	MAGNETRON CONTROL PULSE 0.91 $\mu$ S .....	17
PLOT 13:	FREQUENCY STABILITY TEST SETUP .....	22

## TABLE OF APPENDIX

APPENDIX A:	LABEL INFORMATION .....	25
APPENDIX B:	PRODUCT DESCRIPTION.....	27
APPENDIX C:	SCHEMATICS .....	31
APPENDIX D:	USER'S MANUAL .....	42
APPENDIX E:	BILL OF MATERIALS (PARTS LIST) .....	43
APPENDIX F:	TEST CONFIGURATION PHOTOGRAPHS .....	76
APPENDIX G:	INTERNAL PHOTOGRAPHS .....	77
APPENDIX H:	EXTERNAL PHOTOGRAPHS .....	83



360 Herndon Parkway  
Suite 1400  
Herndon, VA 20170  
<http://www.rheintech.com>

## 1 GENERAL INFORMATION

The following Report of a Type Certification is prepared on behalf of **ICOM, Inc.** in accordance with the Federal Communications Commissions and Industry Canada Rules and Regulations. The Equipment Under Test (EUT) was the **MR-570R; FCC ID: AFJMR-570R**. The test results reported in this document relate only to the item that was tested.

All measurements contained in this application were conducted in accordance with FCC Rules and Regulations CFR 47 and ANSI C63.4 Methods of Measurement of Radio Noise Emissions, 1992. The instrumentation utilized for the measurements conforms to the ANSI C63.4 standard for EMI and Field Strength Instrumentation. Calibration checks are performed regularly on the instruments, and all accessories including high pass filter, coaxial attenuator, preamplifier and cables.

### 1.1 TEST FACILITY

The open area test site and conducted measurement facility used to collect the radiated data is located on the parking lot of Rhein Tech Laboratories, Inc. 360 Herndon Parkway, Suite 1400, Herndon, Virginia 20170. This site has been fully described in a report dated March 3, 1994, submitted to and approved by the Federal Communication Commission to perform AC line conducted and radiated emissions testing (ANSI C63.4 1992).

### 1.2 RELATED SUBMITTAL(S)/GRANT(S)

This is an original application report.



360 Herndon Parkway  
Suite 1400  
Herndon, VA 20170  
<http://www.rheintech.com>

## 2 CONFORMANCE STATEMENT

STANDARDS REFERENCED FOR THIS REPORT	
PART 2: 1999	FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS
PART 80: 1998	STATIONS IN THE MARITIME SERVICES
PART 90: 1998	PRIVATE LAND MOBILE RADIO SERVICES
ANSIC63.4-1992	STANDARD FORMAT MEASUREMENT/TECHNICAL REPORT PERSONAL COMPUTER AND PERIPHERALS
ANSI/TIA/EIA603- 1992	LAND MOBILE FM OR PM COMMUNICATIONS EQUIPMENT MEASUREMENT AND PERFORMANCE STANDARDS
ANSI/TIA/EIA 603-1-1998	ADDENDUM TO ANSI/TIA/EIA 603-1992
RSP-100	RADIO EQUIPMENT CERTIFICATION PROCEDURE

FCC Rules Parts	Frequency Range	Output Power (W)	Freq. Tolerance Range	Emission Designator
80 and 90	9380-9440 MHz	4000	9301.64- 9513.64 MHz	55M0P0N
Industry Canada Standard	Frequency Range	Output Power (W)	Freq. Tolerance	Emission Designator
RSP-100	9380-9440 MHz	4000	9301.64- 9513.64 MHz	55M0P0N

We, the undersigned, hereby declare that the equipment tested and referenced in this report conforms to the identified standard(s) as described in this attached test record. No modifications were made to the equipment during testing in order to achieve compliance with these standards.


Furthermore, there was no deviation from, additions to or exclusions from the above mentioned standards Certification methodology.

Signature:

Date: May 29, 2001

Typed/Printed Name: Desmond A. Fraser

Position: President  
(NVLAP Signatory)



Accredited by the National Voluntary Accreditation Program for the specific scope of accreditation under Lab Code 200061-0.

**Note:** This report may not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government.




### 3 TESTED SYSTEM DETAILS

Listed below are the identifiers and descriptions of all equipment, cables, and internal devices used with the EUT for this test, as applicable.

**TABLE 1: COMPONENTS USED IN TEST CONFIGURATION**

FIGURE ITEM #	PART	MANUFACTURER	MODEL	SERIAL NUMBER	FCC ID	CABLE DESCRIPTION	RTL BAR CODE
1	DC POWER SUPPLY	ALINCO	DM-330MV	0001638		UNSHIELDED	901124
2	DISPLAY UNIT	ICOM	EX-2473	K35		SHIELDED	13108
3	MAGNETRON	ICOM	MAF1421B	N/A			N/A
4	NARDO	DIRECTIVITY COUPLER	1080	N/A			901151
5	HP	WAVE GUIDE ADAPTER	X281A	N/A			90114
6	ICOM	RADAR UNIT	MR-570R	K35K1288	AFJMR-570R		N/A
7	HP	CRYSTAL DETECTOR	423B	N/A			901147

**FIGURE 1: CONFIGURATION OF TESTED SYSTEM**

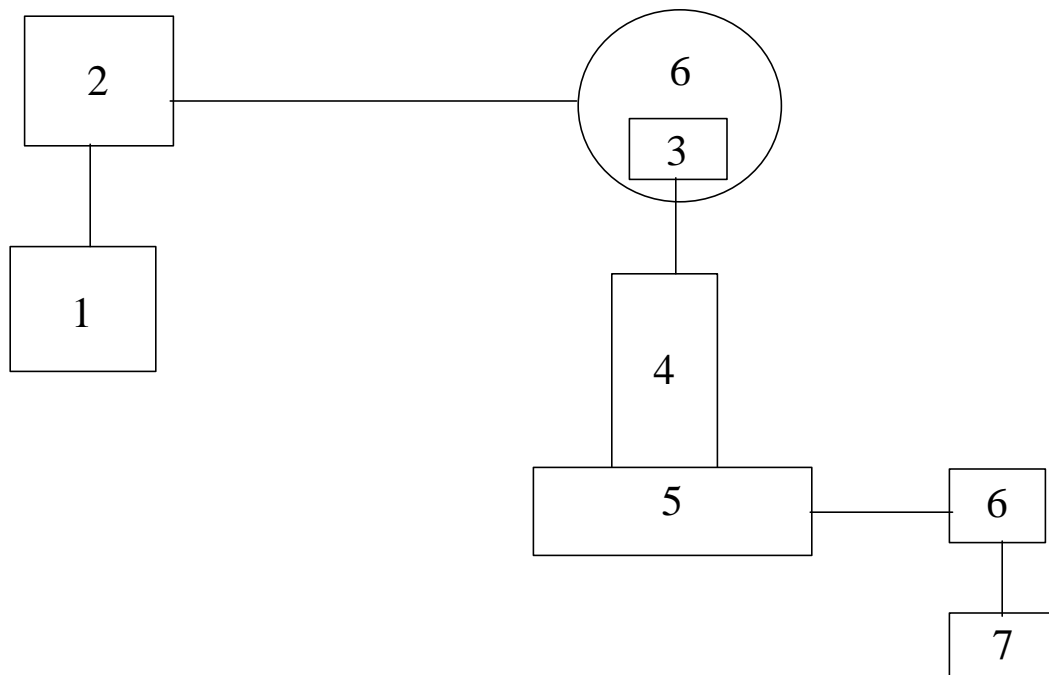



## 4 FCC RULES AND REGULATIONS PART 2 §2.1046 (A): RF OUTPUT POWER

### 4.1 TEST PROCEDURE

The MR-570R RADAR transmitter output into a dummy load was measured with an NARDA directional coupler, a HP pad, and an HP 437B power meter with HP8481B thermocouple sensor. The power meter was corrected for the directional coupler attenuation, attenuating pad, and sensor calibration.

### 4.2 TEST DATA

PULSE SETTING	PULSE LENGTH μSEC	PRF	Av POWER (dBm)	Av POWER (μW)	CORRECTION FACTOR (dB)	Av POWER (W)	PEAK POWER (KW)
SHORT	0.11	2183	-10.7	85	43	1.6	6.66
MEDIUM SHORT	0.29	2183	-6.5	223	43	4.45	7.03
MEDIUM LONG	0.36	2183	-4.8	331	43	6.6	8.40
LONG	0.91	2183	-5.0	316	43	6.3	9.55

**Note:**

Duty cycle = PRF x Pulse Length

Peak Power = Av Power / Duty Cycle

## 5 FCC RULES AND REGULATIONS PART 2 §2.1047 (C) (1): MODULATION CHARACTERISTICS

The MR-570R magnetron pulse input was measured with a Tektronix TDS 560 digital oscilloscope and a high voltage probe. The oscilloscope display for each pulse width of 0.11, 0.29, 0.36, and 0.91 microseconds respectively are included.

Occupied bandwidth for nominal pulse widths of 0.11, 0.29, 0.36, and 0.91 microseconds are included respectively. These plots were made with an HP 8564E spectrum analyzer and an HP 7550 plotter.

### 5.1 TEST PROCEDURE

ANSI/TIA/EIA-603-1992, section 2.2.11

Device with digital modulation: operation to its maximum extent


### 5.2 TEST EQUIPMENT

Spectrum Analyzer      HP8564E      s/n 3943A01719



360 Herndon Parkway  
Suite 1400  
Herndon, VA 20170  
<http://www.rheintech.com>


### 5.3 TEST DATA

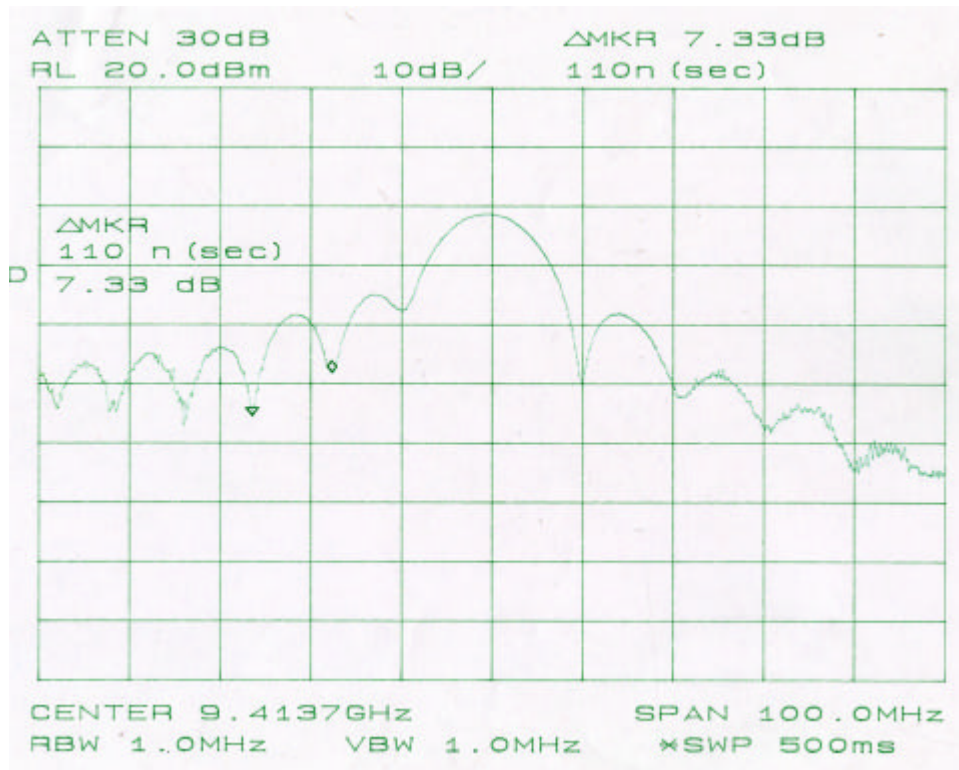

PLOT 1: PULSE LENGTH (0.11 MICROSECONDS)




360 Herndon Parkway  
Suite 1400  
Herndon, VA 20170  
<http://www.rheintech.com>

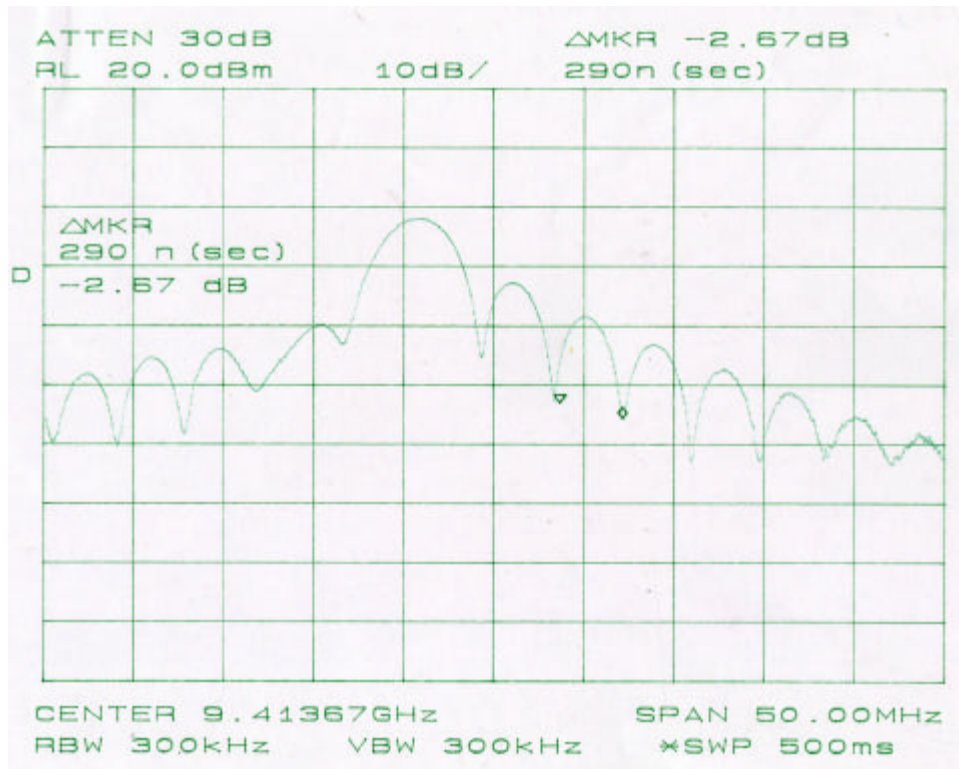

**PLOT 2: PULSE LENGTH (0.29 MICROSECONDS)**




360 Herndon Parkway  
Suite 1400  
Herndon, VA 20170  
<http://www.rheintech.com>

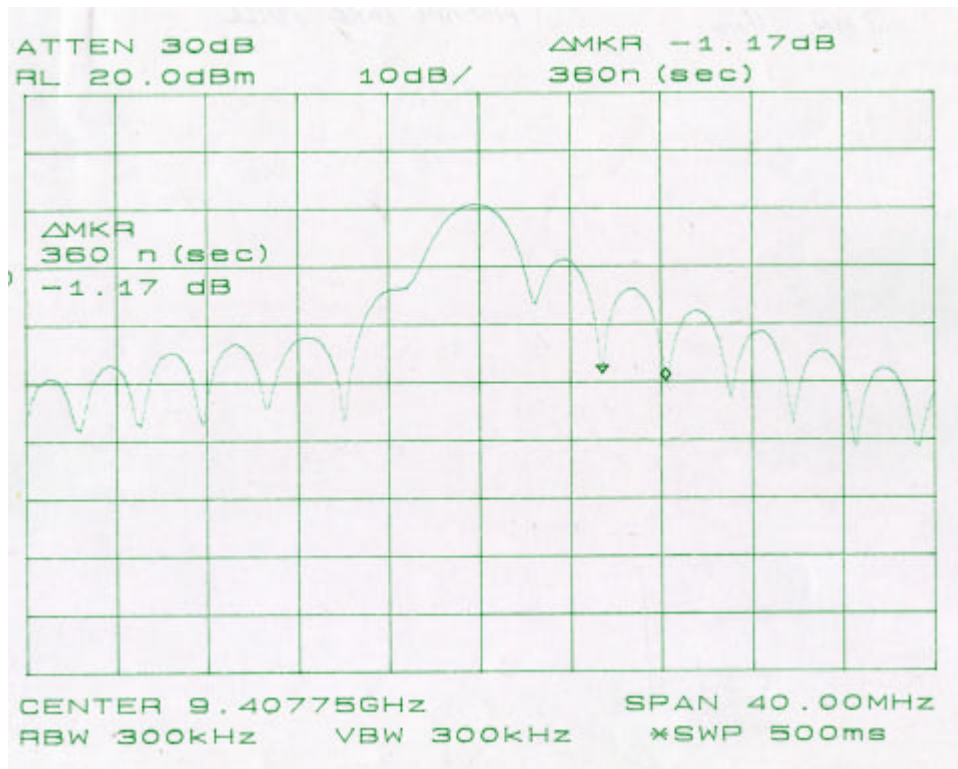

**PLOT 3 PULSE LENGTH (0.36 MICROSECONDS)**



360 Herndon Parkway  
Suite 1400  
Herndon, VA 20170  
<http://www.rheintech.com>

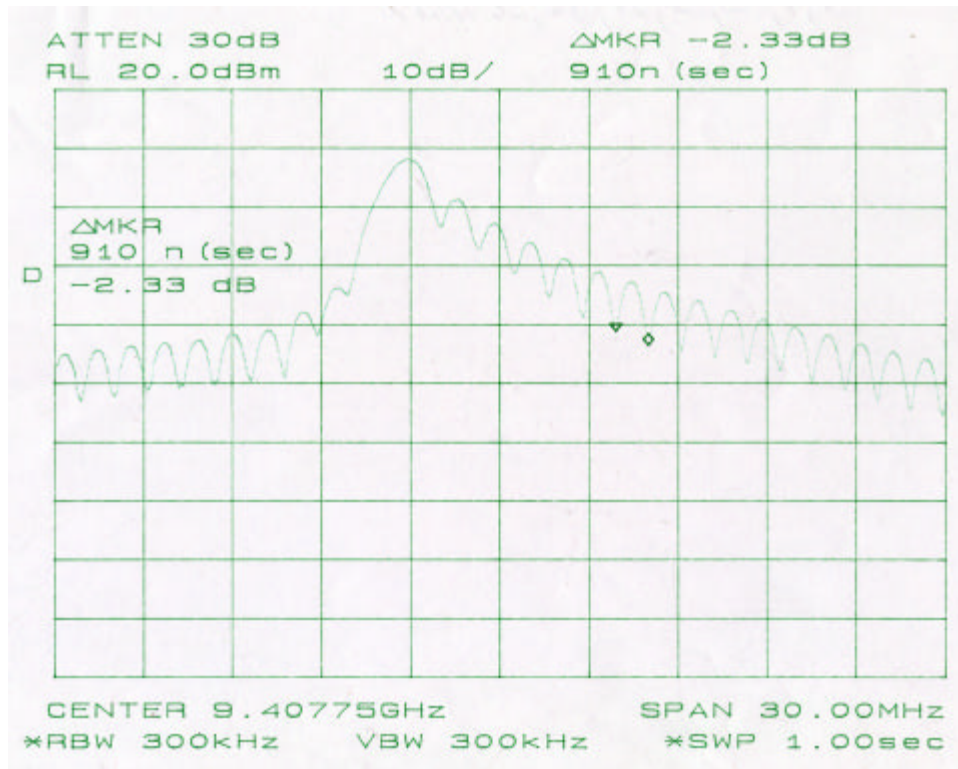

**PLOT 4: PULSE LENGTH (0.91 MICROSECONDS)**



360 Herndon Parkway  
Suite 1400  
Herndon, VA 20170  
<http://www.rheintech.com>

## 6 FCC RULES AND REGULATIONS PART 2 §2.1049 (C) (1): OCCUPIED BANDWIDTH

OCCUPIED BANDWIDTH (99% POWER BANDWIDTH) - COMPLIANCE WITH THE FCC RULES.


### 6.1 TEST PROCEDURE

ANSI/TIA/EIA-603-1992, section 2.2.11

### 6.2 TEST EQUIPMENT

Spectrum Analyzer HP8564E s/n 3943A01719


### 6.3 TEST DATA

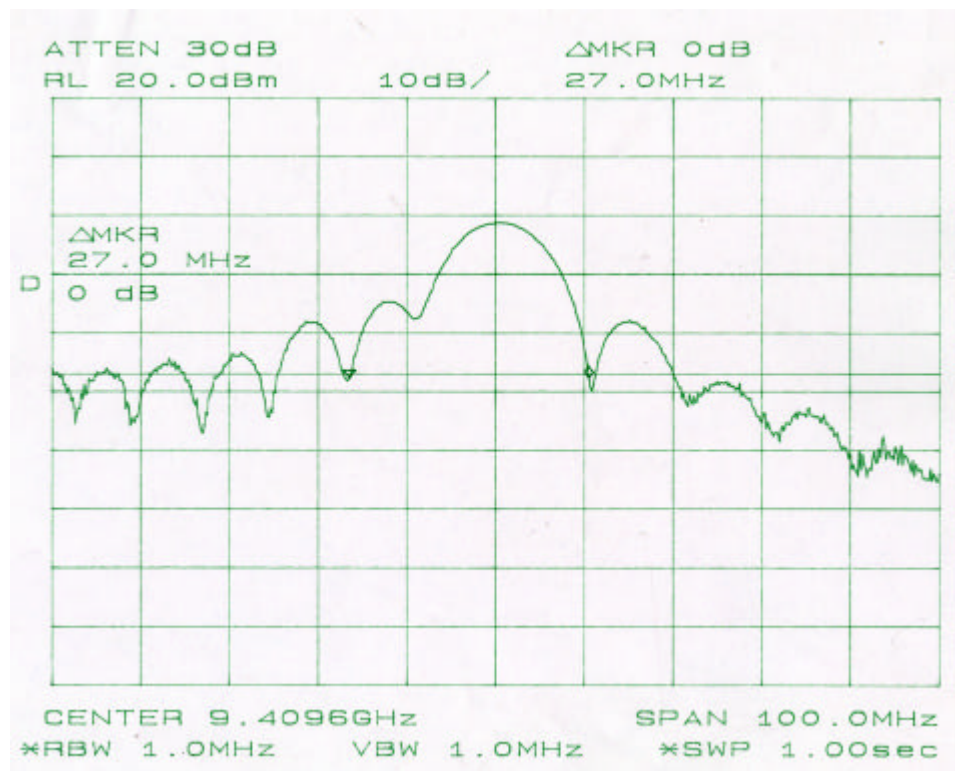

PLOT 5: BANDWIDTH (0.11 MICROSECONDS PULSE LENGTH)




360 Herndon Parkway  
Suite 1400  
Herndon, VA 20170  
<http://www.rheintech.com>

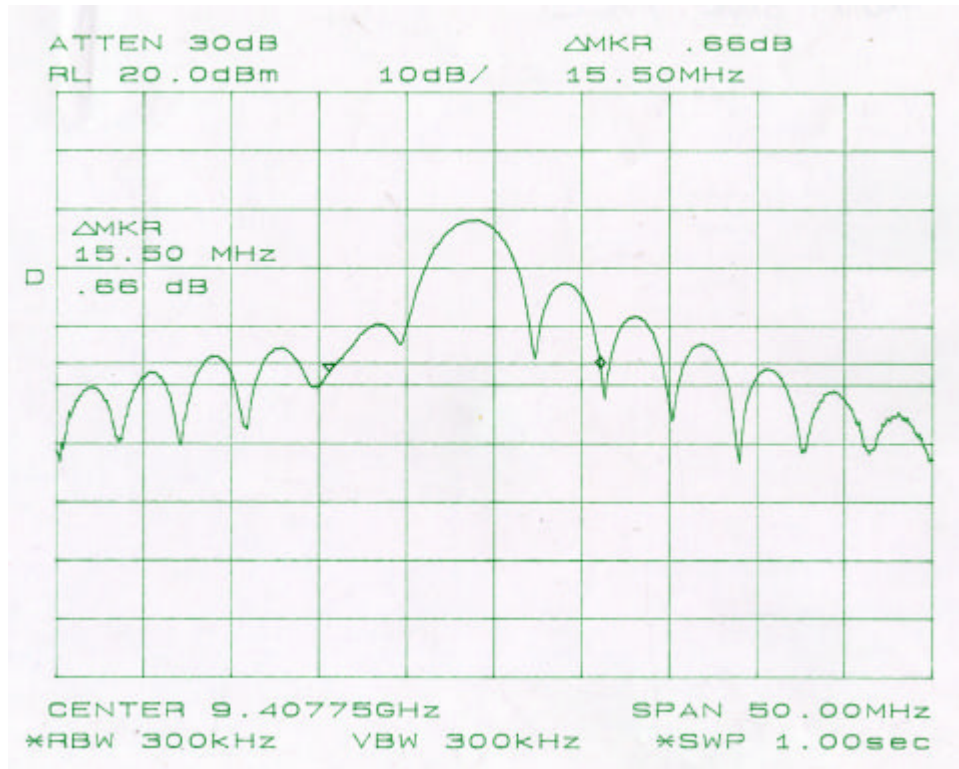

**PLOT 6: BANDWIDTH (0.29 MICROSECONDS PULSE LENGTH)**




360 Herndon Parkway  
Suite 1400  
Herndon, VA 20170  
<http://www.rheintech.com>

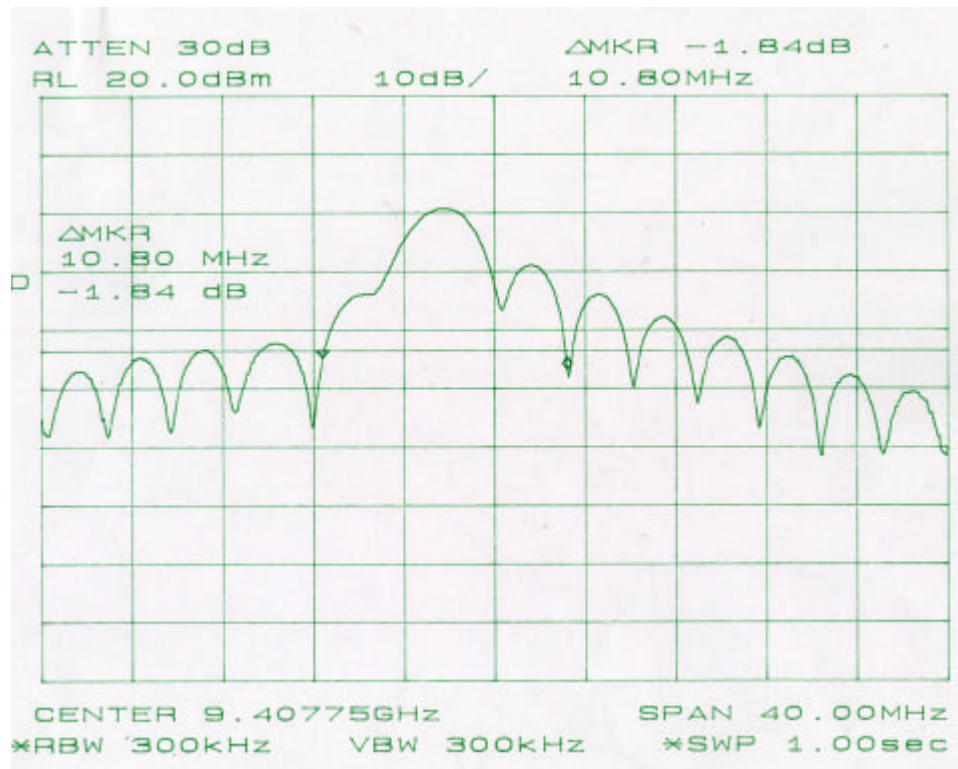

**PLOT 7: BANDWIDTH (0.36 MICROSECONDS PULSE LENGTH)**




360 Herndon Parkway  
Suite 1400  
Herndon, VA 20170  
<http://www.rheintech.com>

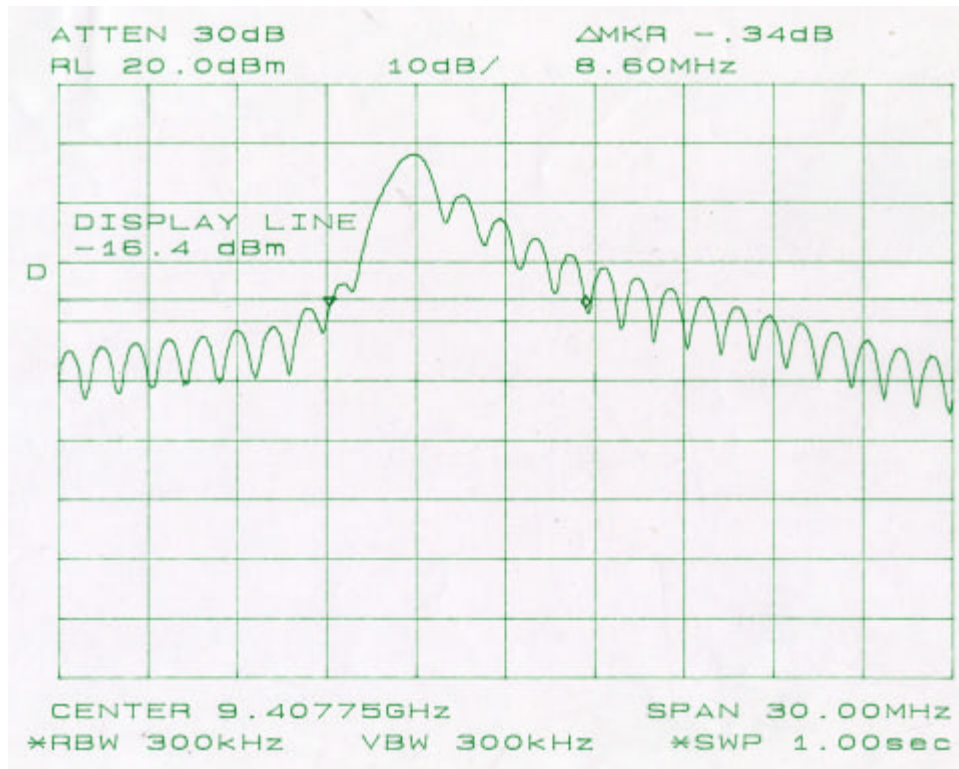

**PLOT 8: BANDWIDTH (0.36 MICROSECONDS PULSE LENGTH)**




RTL 0.125 Nautical Miles  
14:31:32 Jun 06, 2001

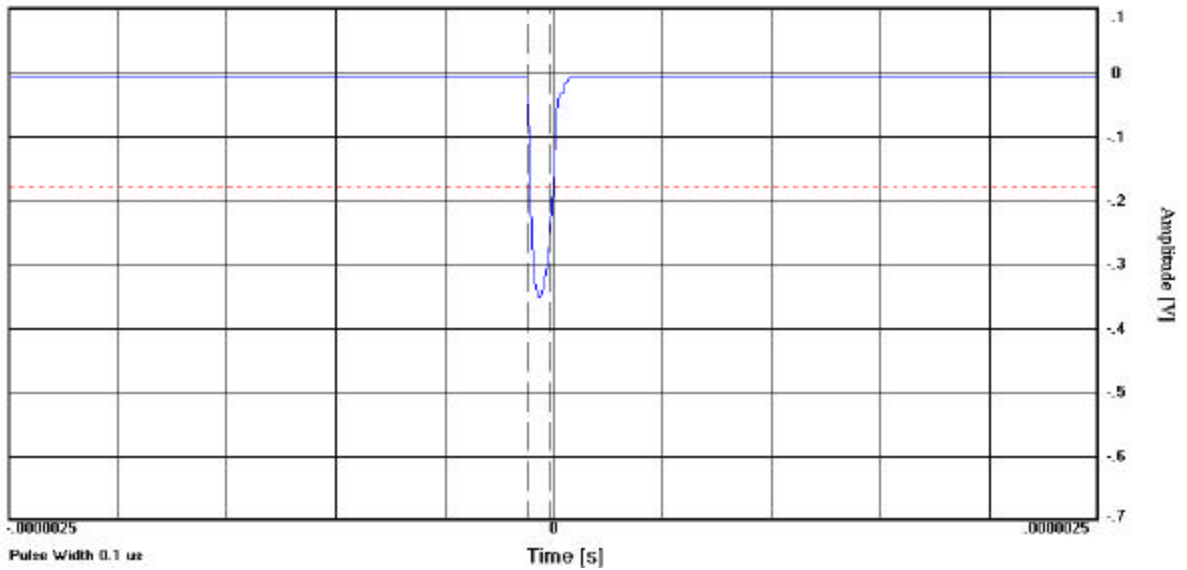

**PLOT 9: MAGNETRON CONTROL PULSE 0.1µS**

RTL 1.5 Nautical Miles  
14:28:40 Jun 06, 2001

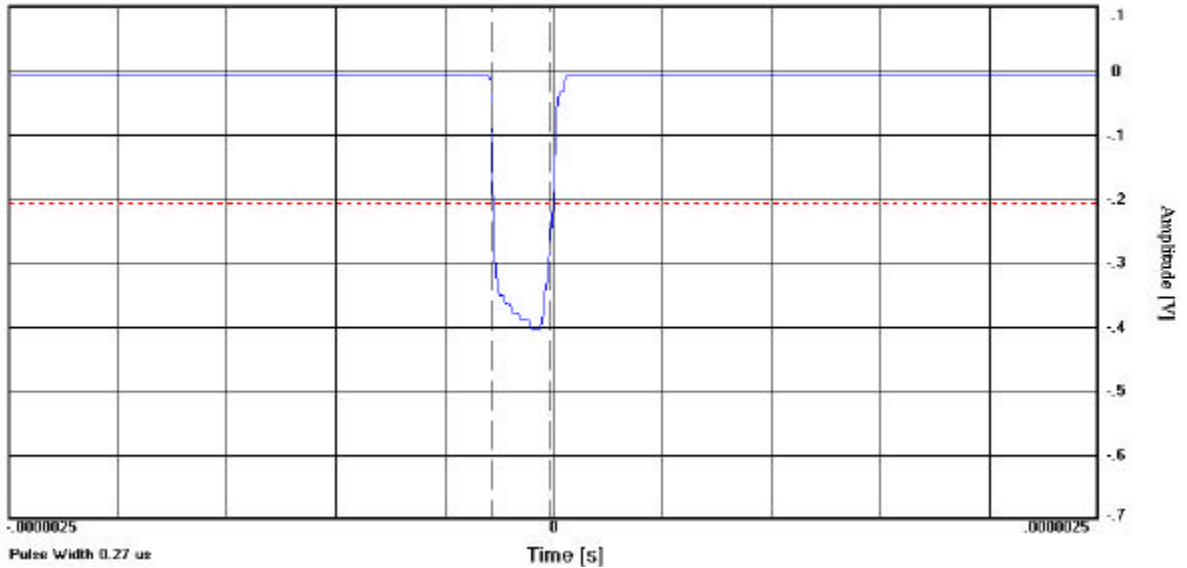


**PLOT 10: MAGNETRON CONTROL PULSE 0.26µS**




360 Herndon Parkway  
Suite 1400  
Herndon, VA 20170  
<http://www.rheintech.com>

RTL 3 Nautical Miles  
14:26:43 Jun 06, 2001

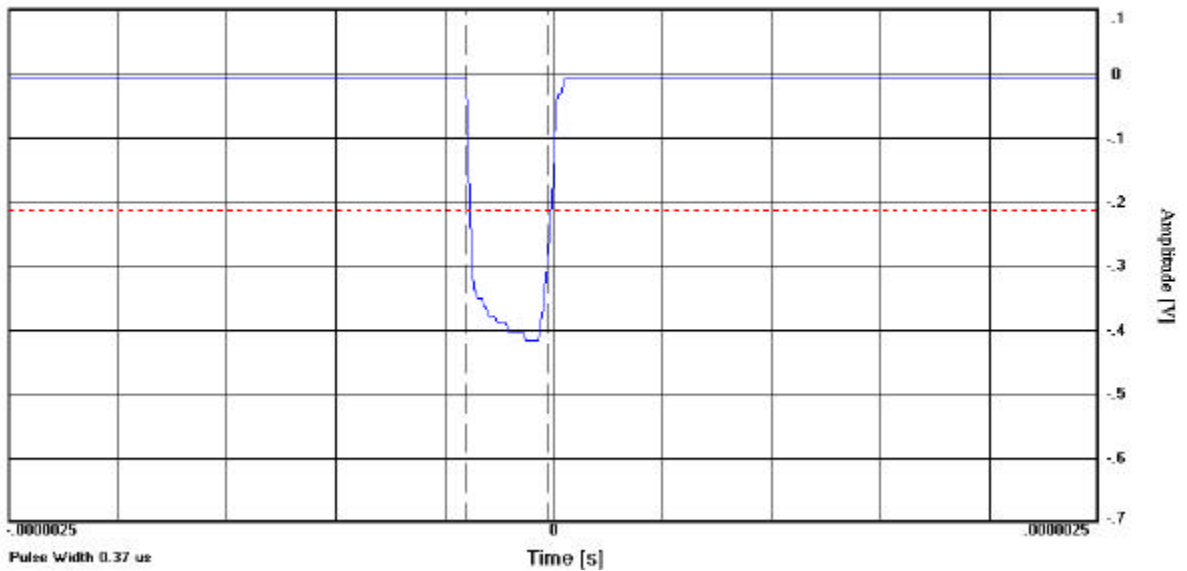

PLOT 11: MAGNETRON CONTROL PULSE 0.36 $\mu$ S

RTL 6 Nautical Miles  
14:26:55 Jun 06, 2001

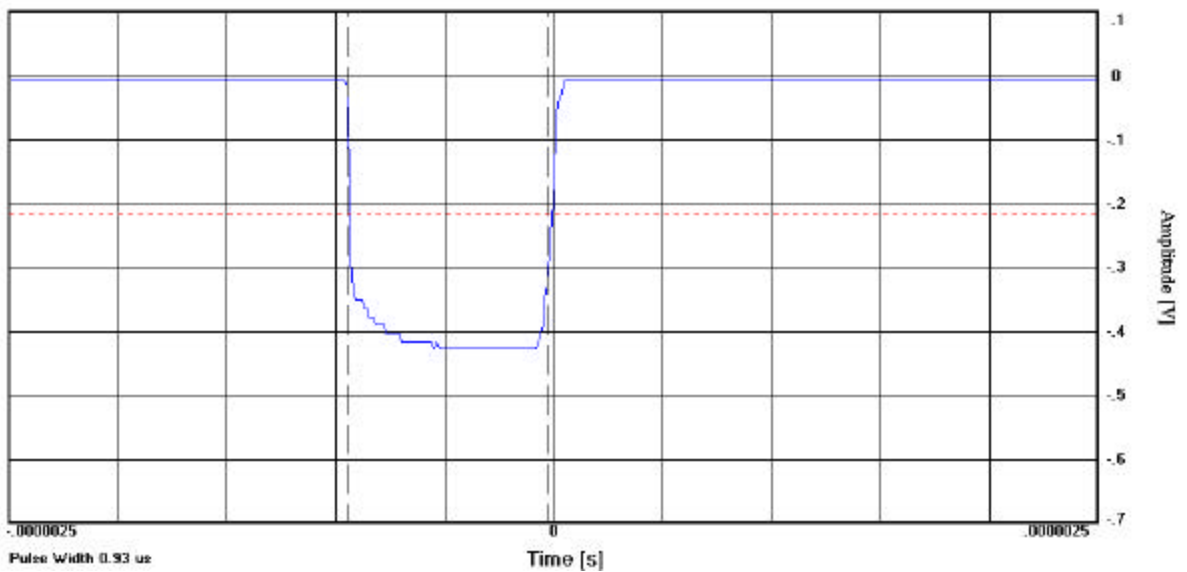

PLOT 12: MAGNETRON CONTROL PULSE 0.91 $\mu$ S



## 7 FCC RULES AND REGULATIONS PART 2 §2.1051 (A): SPURIOUS EMISSIONS AT THE ANTENNA TERMINAL

### 7.1 TEST PROCEDURE

The MR-570R RADAR transmitter was tested for spurious emissions while the equipment was modulated with nominal pulse widths of 0.11, 0.29, 0.36, and 0.91 microseconds. Measurements were made with an HP 8546E Spectrum Analyzer coupled to the transmitter output waveguide through a directional coupler. During the tests, the MDR-570R was terminated in a 50 Ohm dummy X-band load. The supply voltage was maintained at 24VDC through out the test. Spurious emissions were measured from 9KHz to 40GHz. Emissions that were between the required attenuation and the noise floor of the spectrum Analyzer were recorded.

### 7.2 TEST DATA

	dBC FOR EACH NOMINAL PULSE WIDTH			
	0.11 $\mu$ s	0.29 $\mu$ s	0.36 $\mu$ s	0.91 $\mu$ s
FREQUENCY 9KHz TO 40 GHz	NF	NF	NF	NF
AVERAGE POWER (W)	1.6	4.45	6.6	6.3
REQUIRED ATTENUATION 43 + 10LOGP (dB)	45.0	49.5	51.2	51.0

NF=Noise Floor (There were no signals observed above the Analyzer noise floors). The Spectrum analyzer settings were RBW/VBW = 100 kHz. The data below reflects the analyzer noise floor.

9KHz – 2 GHz = -96dBm	10GHz – 15GHz = -88dBm	30GHz – 35GHz = -67dBm
2GHz – 5 GHz = -89dBm	15GHz – 20GHz = -86dBm	35GHz – 40GHz = -66dBm
5GHz – 10 GHz = -88dBm	20GHz – 25GHz = -76dBm	



## 8 FCC RULES AND REGULATIONS PART 2 §2.1053 (A): FIELD STRENGTH OF SPURIOUS RADIATION

### 8.1 TEST PROCEDURE

#### Substitution Method: ERP:

The EUT was setup at an antenna to EUT distance of 3 meters on an open area test site with the transmitter connected to the dummy load. The EUT was placed on a nonconductive turntable approximately 0.8 meters above the ground plane.

The physical arrangement of the EUT and associated cabling was varied in order to determine the effect on the EUT's emissions in amplitude, direction and frequency. At each frequency, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters in order to determine the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarizations.

The worst-case, maximum radiated emission was recorded and used as reference for the ERP measurement.

The EUT was then replaced by a  $\frac{1}{2}$ wave dipole antenna and polarized in accordance with the EUT's antenna polarization. The  $\frac{1}{2}$ wave dipole antenna was connected to a RF signal generator with a coaxial cable.

The search antenna height, and search antenna polarity was set to levels that produced the maximum reading obtained in step 3. The signal generator was adjusted to a level that produced the radiated emission level obtained in step 3.

The signal generator level was recorded and corrected by the power loss in the cable between the generator and the antenna and further corrected for the gain of the substitution antenna used relative to an ideal  $\frac{1}{2}$ wave dipole antenna. The signal generator corrected level is the ERP level

#### CALCULATION METHOD: EIRP

$$P_{Watt} = \frac{E_{v/m}^2 \times d_m^2}{30}$$

#### 8.1.1 TEST EQUIPMENT

Amplifier:	HP8449B	s/n 3008A00505
Spectrum analyzer:	HP8564E	s/n 3943A01719
Antenna	BiLog Chase 6112L, EMCO Horn 2-4 GHz, EMCO horn 4-8 GHz,	
EMCO horn 8 – 12 GHz		
RF Signal Generator	HP8648C	s/n 3537A01741
Synthesized Sweeper	HP83752A	s/n 3610A00846



360 Herndon Parkway  
Suite 1400  
Herndon, VA 20170  
<http://www.rheintech.com>

## 8.1.2 TEST DATA

There were no spurious emissions observed.

**TABLE 2: PART 2 §2.1053 (A): FIELD STRENGTH OF SPURIOUS RADIATION**

Frequency (M Hz)	Emission Level* (dBuV)	Site Factor (dB/m)	Emission Level (dBuV/m)	Calculated ERP (mW)	Calculated EIRP (mW)	Comments

\*Measurement accuracy is +/- 1.5 dB



## 9 FCC RULES AND REGULATION PART 2 §2.1055: FREQUENCY STABILITY

### 9.1 TEST PROCEDURE

ANSI/TIA/EIA-603-1992, section 2.2.2

The carrier frequency stability is the ability of the transmitter to maintain an assigned carrier frequency.

The EUT was evaluated over the temperature range -30°C to +50°C.

The temperature was initially set to -30°C and a 2-hour period was observed for stabilization of the EUT. The frequency stability was measured within one minute after application of primary power to the transmitter. The temperature was raised at intervals of 10 degrees centigrade through the range. A ½ an hour period was observed to stabilize the EUT at each measurement step and the frequency stability was measured within one minute after application of primary power to the transmitter. Additionally, the power supply voltage of the EUT was varied from 85% to 115% of the nominal 24VDC voltage.

#### 9.1.1 FCC § 80.209(b)

The frequency at which maximum emission occurs must be within the authorized bandwidth and must not be closer than  $1.5/T$  MHz to the upper and lower limits of the authorized bandwidth, where T is the pulse duration in microseconds.

1) Center frequency ( $f_0$ ):  
Authorized bandwidth (AUBW): 9300 MHz to 9500 MHz

Upper limit of authorized band =  $9500 - 1.5/T$   
Lower limit of authorized band =  $9300 + 1.5/T$


FREQUENCY TOLERANCE		
PULSE WIDTH (μSEC)	LOWER LIMITS (MHz)	UPPER LIMITS (MHz)
0.11	9313.64	9513.64
0.29	9305.17	9505.17
0.36	9304.15	9504.17
0.91	9301.65	9501.64

**Note:**

From examining the frequency data from variation of frequency with voltage and variation of frequency with temperature results pages, it can be seen that the transmitter is within the calculated specification.



360 Herndon Parkway  
Suite 1400  
Herndon, VA 20170  
<http://www.rheintech.com>

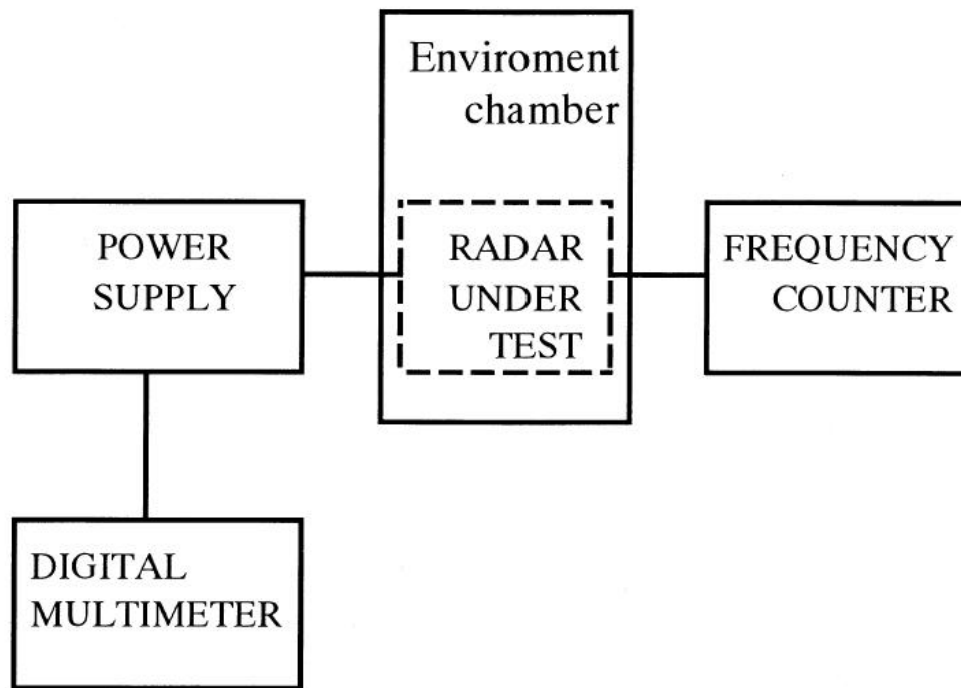

### **PLOT 13: FREQUENCY STABILITY TEST SETUP**

The worst-case test data are shown in tables below.

#### **9.2 TEST EQUIPMENT**

Temperature Chamber Tenney TH65 s/n 11380

Frequency Counter HP8901A (Frequency Mode) s/n 2545A04102



### 9.3 TEST DATA

**TABLE 3: FREQUENCY STABILITY/TEMPERATURE VARIATION 0.11 $\mu$ S PULSE LENGTH**

TEMPERATURE °C	MEASURED FREQUENCY MHZ
-20	9428.6
-10	9424.2
0	9422.5
10	9421.0
20	9419.4
30	9417.9
40	9415.9
50	9414.2

**TABLE 4 FREQUENCY STABILITY/TEMPERATURE VARIATION 0.91 $\mu$ S PULSE LENGTH**

TEMPERATURE °C	MEASURED FREQUENCY MHZ
-20	9424.3
-10	9420.6
0	9419.4
10	9417.3
20	9414.7
30	9414.5
40	9412.8
50	9411.1



**TABLE 5      FREQUENCY STABILITY/VOLTAGE VARIATION 0.11 $\mu$ S PULSE LENGTH**

<b>% OF NOMINAL VOLTS</b>	<b>VOLTS (dc)</b>	<b>MEASURED FREQUENCY</b>
100%10.2	10.2	9419.4
85% of 24.0	20.4	9419.4
115% Of 24.0	27.6	9419.4
100%42.0	42.0	9419.4

**TABLE 6      FREQUENCY STABILITY/VOLTAGE VARIATION 0.91 $\mu$ S PULSE LENGTH**

<b>% OF NOMINAL VOLTS</b>	<b>VOLTS (dc)</b>	<b>MEASURED FREQUENCY</b>
100%10.2	10.2	9414.6
85% of 24.0	20.4	9414.6
115% Of 24.0	27.6	9414.6
100%42.0	42.0	9414.6

The EUT can operate from 10.2 VDC to 42 VDC. Therefore the testing was performed at %85 and %115 of the nominal voltage including at the lowest and the highest operating voltages 10.2 VDC and 42 VDC.