

FCC PART 15B

MEASUREMENT AND TEST REPORT

FOR

SMOOTH YIELD CORPORATION LIMITED

ROOM1602, 16/F, KOWLOONBUILDING, 555NATHANROAD, MONGKOK,

KOWLOON, HONGKON

FCC ID: AFYET-UN677

Report Concerns: Original Report	Equipment Type: USB wireless lan card
Model:	<u>ET-UN677</u>
Report No.:	<u>STR11128411I-2</u>
Test Date:	<u>2011-12-29 to 2012-01-08</u>
Issue Date:	<u>2012-01-14</u>
Tested By:	<u>Susan Su / Engineer</u> <i>Susan Su</i>
Reviewed By:	<u>Lahm Peng / EMC Manager</u> <i>Lahm peng</i>
Approved & Authorized By:	<u>Jandy so / PSQ Manager</u> <i>Jandyso</i>
Prepared By:	
SEM.Test Compliance Service Co., Ltd 3/F, Jinbao Commerce Building, Xin'an Fanshen Road, Bao'an District, Shenzhen, P.R.C. (518101) Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn	

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by SEM.Test Compliance Service Co., Ltd.

TABLE OF CONTENTS

1. GENERAL INFORMATION	3
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
1.2 TEST STANDARDS	3
1.3 TEST METHODOLOGY	3
1.4 TEST FACILITY	4
1.5 EUT EXERCISE SOFTWARE	4
1.6 ACCESSORIES EQUIPMENT LIST AND DETAILS	4
1.7 EUT CABLE LIST AND DETAILS	4
2. SUMMARY OF TEST RESULTS	5
3. §15.107 (A)- CONDUCTED EMISSION	6
3.1 MEASUREMENT UNCERTAINTY	6
3.2 TEST EQUIPMENT LIST AND DETAILS	6
3.3 TEST PROCEDURE	6
3.4 BASIC TEST SETUP BLOCK DIAGRAM	6
3.5 ENVIRONMENTAL CONDITIONS	7
3.6 TEST RECEIVER SETUP	7
3.7 SUMMARY OF TEST RESULTS/PLOTS	7
3.8 CONDUCTED EMISSIONS TEST DATA	7
4. §15.109(A)- RADIATED EMISSION	10
4.1 MEASUREMENT UNCERTAINTY	10
4.2 TEST EQUIPMENT LIST AND DETAILS	10
4.3 TEST PROCEDURE	10
4.4 TEST RECEIVER SETUP	11
4.5 CORRECTED AMPLITUDE & MARGIN CALCULATION	11
4.6 ENVIRONMENTAL CONDITIONS	11
4.7 SUMMARY OF TEST RESULTS/PLOTS	11

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: SMOOTH YIELD CORPORATION LIMITED
 Address of applicant: ROOM1602, 16/F, KOWLOONBUILDING,
 555NATHANROAD, MONGKOK, KOWLOON,
 HONGKONG

Manufacturer: Shenzhen Bilian Electronic Limited
 Address of manufacturer: No 268, Fuqian Rd, Jutang Community, Guanlan Town,
 Baoan District, Shenzhen, 518110, Prc

General Description of E.U.T

Items	Description
EUT Description:	USB wireless lan card
Trade Name:	/
Model No.:	ET-UN677
Add Model:	BL-LW06-1R1
Rated Voltage:	DC 5V
Rated Current:	/
For more information refer to the circuit diagram form and the user's manual.	

The test data is gathered from a production sample, provided by the manufacturer. The others models listed in the report have different appearance only of ET-UN677 without circuit and electronic construction changed, declared by the manufacturer.

1.2 Test Standards

The following report is prepared on behalf of the SMOOTH YIELD CORPORATION LIMITED in accordance with Part 2, Subpart J, and Part 15, Subparts A and B of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 15.107, and 15.109 rules.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which results in lowering the emission/immunity, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

The equipment under test (EUT) was configured to measure its highest possible susceptibility against the tested phenomena. The test modes were adapted accordingly in reference to the Operating Instructions.

1.4 Test Facility

- **FCC – Registration No.: 994117**

SEM.Test Compliance Services Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files and the Registration is 994117.

- **Industry Canada (IC) Registration No.: 7673A**

The 3m Semi-anechoic chamber of SEM.Test Compliance Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 7673A.

- **CNAS Registration No.: L4062**

Shenzhen SEM.Test Electronics Service Co., Ltd. is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L4062. All measurement facilities used to collect the measurement data are located at 3/F, Jinbao Commerce Building, Xin'an Fanshen Road, Bao'an District, Shenzhen, P.R.C (518101)

1.5 EUT Exercise Software

The EUT exercise program used during radiated and conducted testing was designed to exercise the system components. The test software, provided by the customer, is started while the EUT is on to simulate the normal work. under the Windows XP terminal.

1.6 Accessories Equipment List and Details

Description	Manufacturer	Model	Serial Number
ASUS	Notebook	X50R	74N0AS297138

1.7 EUT Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
/	/	/	/

2. SUMMARY OF TEST RESULTS

Description of Test	Result
§15.107 (a) Conducted Emission	Compliant
§15.109(a) Radiated Emission	Compliant

3. §15.107 (a)- CONDUCTED EMISSION

3.1 Measurement Uncertainty

Base on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement is ± 2.88 dB.

3.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2011-12-20	2012-12-19
L.I.S.N	Schwarz beck	NSLK8126	8126-224	2011-12-20	2012-12-19
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2011-12-20	2012-12-19


3.3 Test Procedure

The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC Part 15.107 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

3.4 Basic Test Setup Block Diagram

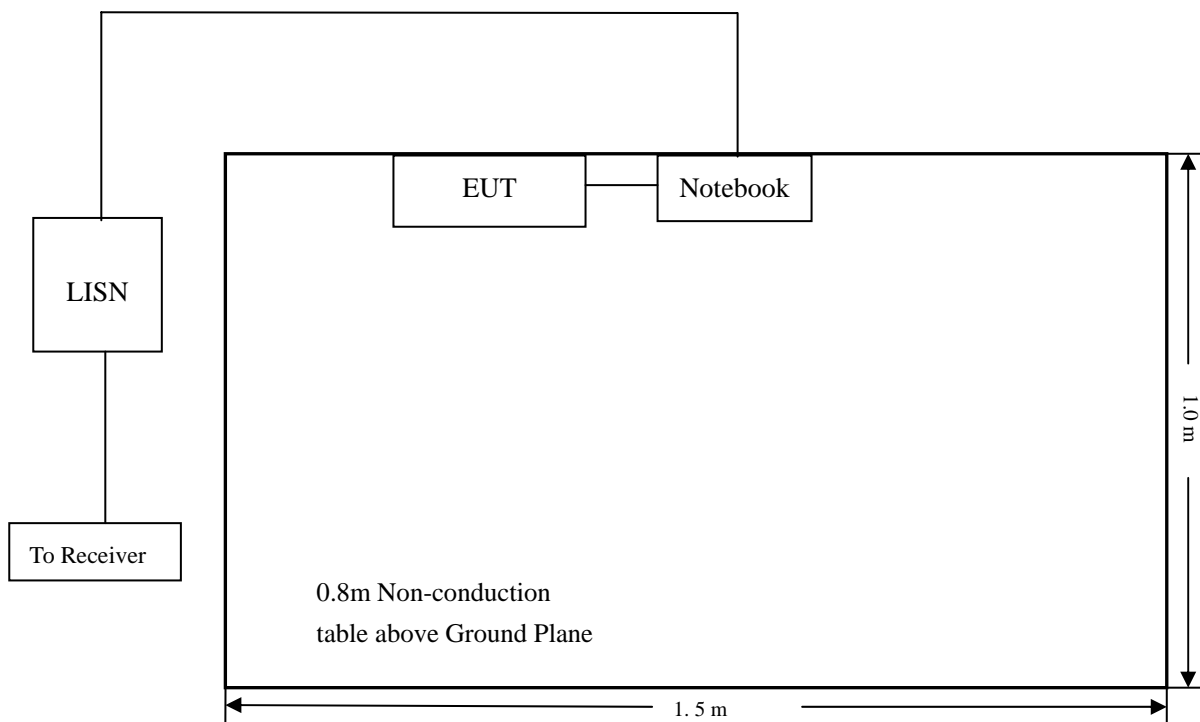

3.5 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52%
ATM Pressure:	1012 mbar

3.6 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency 150 kHz
 Stop Frequency..... 30 MHz
 Sweep Speed Auto
 IF Bandwidth..... 10 kHz
 Quasi-Peak Adapter Bandwidth 9 kHz
 Quasi-Peak Adapter Mode Normal

3.7 Summary of Test Results/Plots

According to the data in section 3.8, the EUT complied with the FCC Part 15B Conducted margin for a Class B device, with the *worst* margin reading of:

-4.80 dB μ V at 0.226 MHz in the Line, Average detector, 0.15-30MHz

3.8 Conducted Emissions Test Data

Plot of Conducted Emissions Test Data

Conducted Disturbance

EUT: USB wireless lan card

M/N: ET-UN677

Operating Condition: Transmitting


Test Specification: N

Comment: AC 120V/60Hz; USB 5V



RBW 9 kHz
MT 5 ms

Att 10 dB AUTO

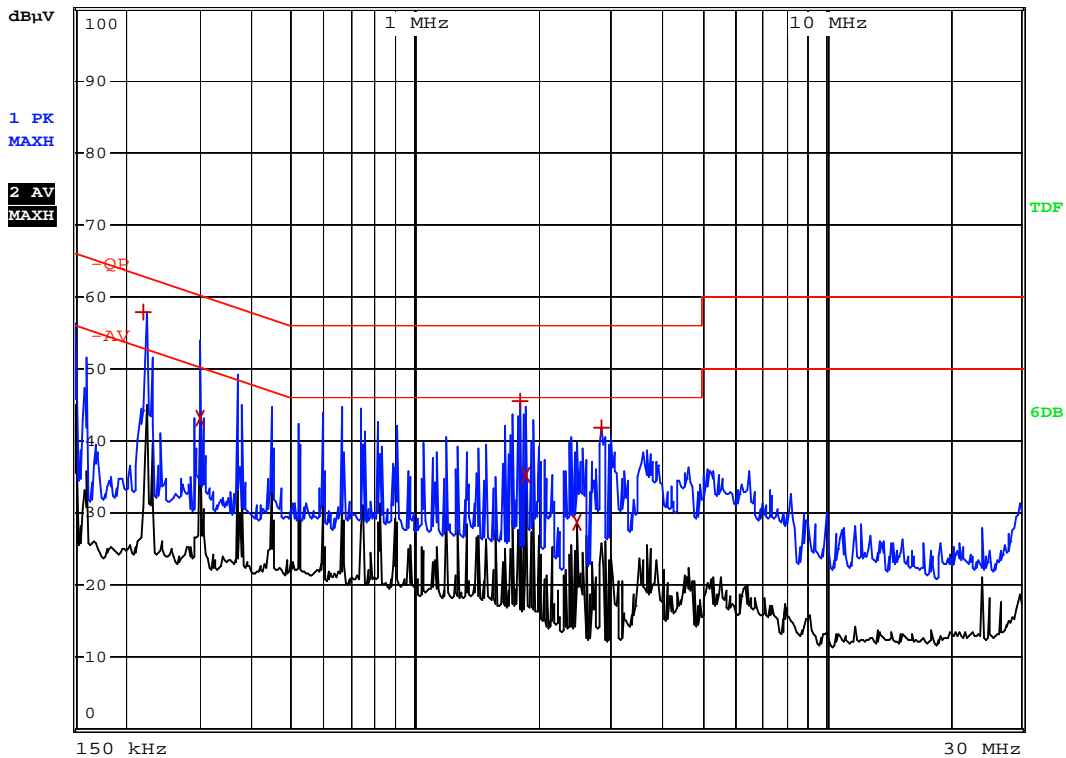

EDIT PEAK LIST (Prescan Results)			
Trace1:		-QP	
Trace2:		-AV	
Trace3:		---	
TRACE	FREQUENCY	LEVEL dBµV	DELTA LIMIT dB
1 Max Peak	222 kHz	57.87	-4.87
2 Average	298 kHz	43.05	-7.24
1 Max Peak	1.798 MHz	45.64	-10.35
2 Average	1.87 MHz	35.26	-10.73
2 Average	2.47 MHz	28.66	-17.33
1 Max Peak	2.85 MHz	41.91	-14.08

Plot of Conducted Emissions Test Data

Conducted Disturbance

EUT: USB wireless lan card

M/N: ET-UN677

Operating Condition: Transmitting


Test Specification: L

Comment: AC 120V/60Hz; USB 5V



RBW 9 kHz
MT 5 ms

Att 10 dB AUTO

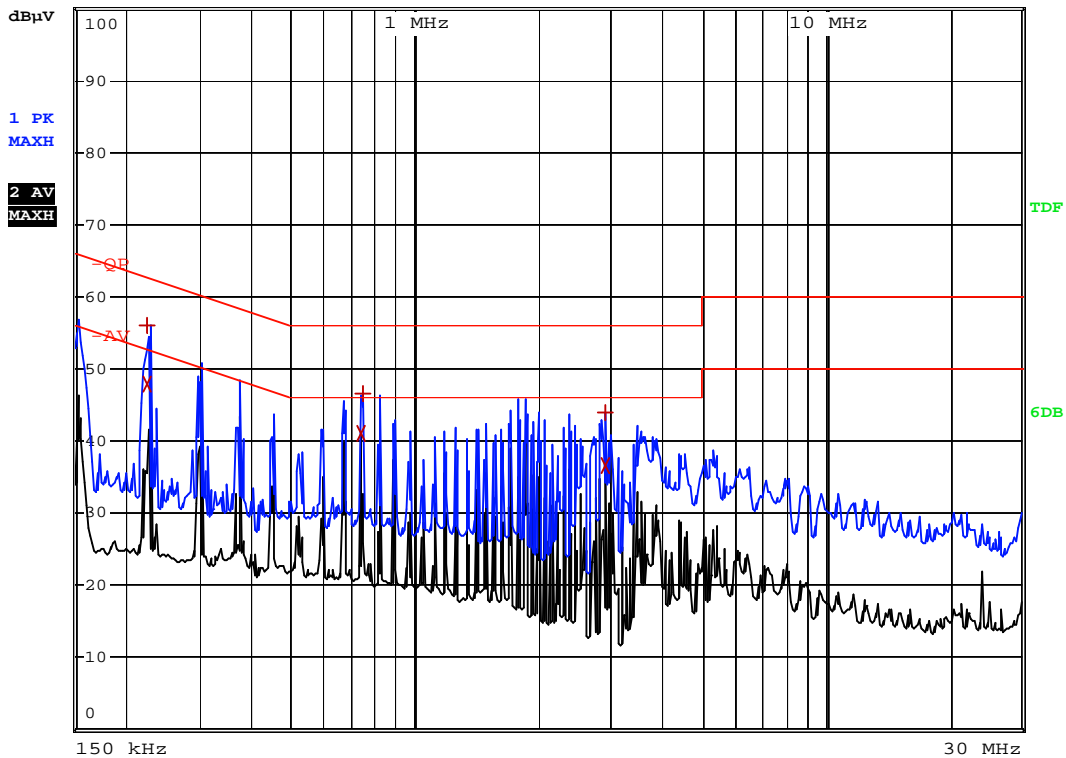

EDIT PEAK LIST (Prescan Results)				
Trace1:		-QP		
Trace2:		-AV		
Trace3:		---		
TRACE		FREQUENCY	LEVEL dBµV	DELTA LIMIT dB
1	Max Peak	226 kHz	56.00	-6.58
2	Average	226 kHz	47.78	-4.80
2	Average	742 kHz	41.17	-4.82
1	Max Peak	750 kHz	46.68	-9.31
2	Average	2.898 MHz	36.58	-9.41
1	Max Peak	2.902 MHz	43.93	-12.06

4. §15.109(a)- RADIATED EMISSION

4.1 Measurement Uncertainty

Base on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any radiation emissions measurement is ± 5.10 dB.

4.2 Test Equipment List and Details


Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	R&S	FSP	836079/035	2011-12-20	2012-12-19
EMI Test Receiver	R&S	ESVB	825471/005	2011-12-20	2012-12-19
Positioning Controller	C&C	CC-C-1F	N/A	2011-12-20	2012-12-19
RF Switch	EM	EMSW18	SW060023	2011-12-20	2012-12-19
Pre-amplifier	Agilent	8447F	3113A06717	2011-12-20	2012-12-19
Pre-amplifier	Compliance Direction	PAP-0118	24002	2011-12-20	2012-12-19
Trilog Broadband Antenna	SCHWARZBECK	VULB9163	9163-333	2011-01-09	2012-01-08
Horn Antenna	ETS	3117	00086197	2011-01-09	2012-01-08

4.3 Test Procedure

The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC Part 15.205 and FCC Part 15.109 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

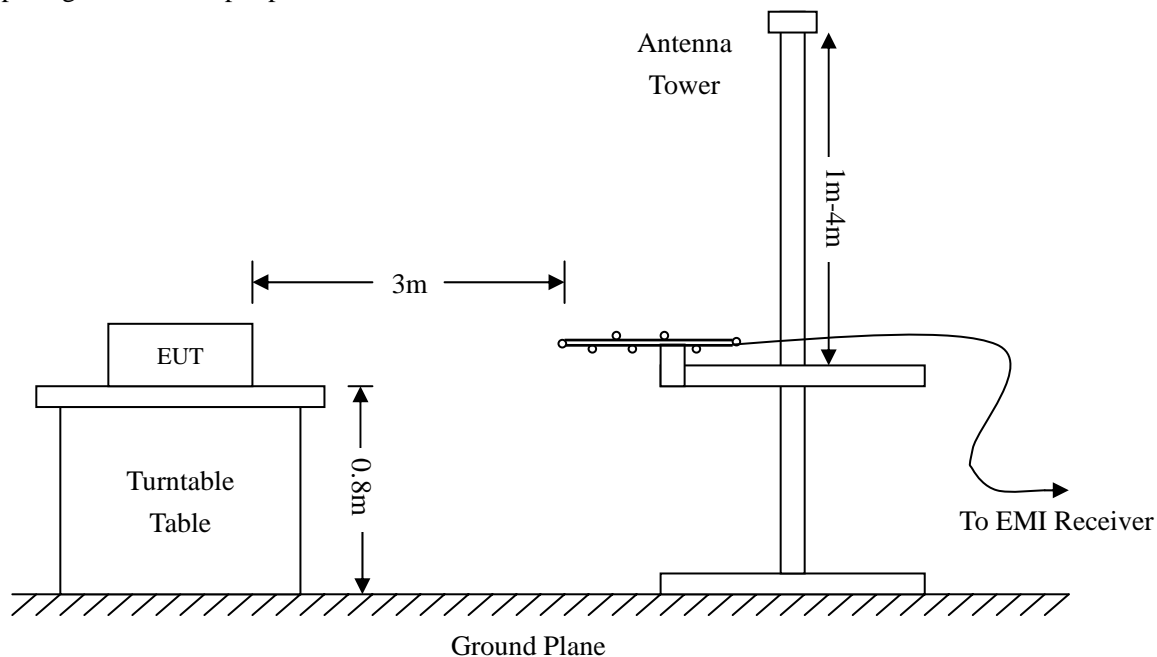

4.4 Test Receiver Setup

During the radiated emission test, the test receiver was set with the following configurations:

Start Frequency 30 MHz
 Stop Frequency..... 1000 MHz
 Sweep Speed Auto
 IF Bandwidth..... 100 kHz
 Quasi-Peak Adapter Bandwidth 120 kHz
 Quasi-Peak Adapter Mode Normal

4.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} - \text{Corr. Factor}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of $-6\text{dB}\mu\text{V}$ means the emission is $6\text{dB}\mu\text{V}$ below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15B Limit}$$

4.6 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

4.7 Summary of Test Results/Plots

According to the data, the EUT complied with the FCC Part 15B Class B standards, and had the worst margin of:

-4.13 dB μ V at 689.5644 MHz in the Horizontal polarization, 30 MHz to 1 GHz, 3Meters

Plot of Radiation Emissions Test Data

Radiated Disturbance

EUT: USB wireless lan card


M/N: ET-UN677

Operating Condition: Running with Program

Test Specification: Horizontal & Vertical


Comment: AC 120V/60Hz; USB 5V

Horizontal

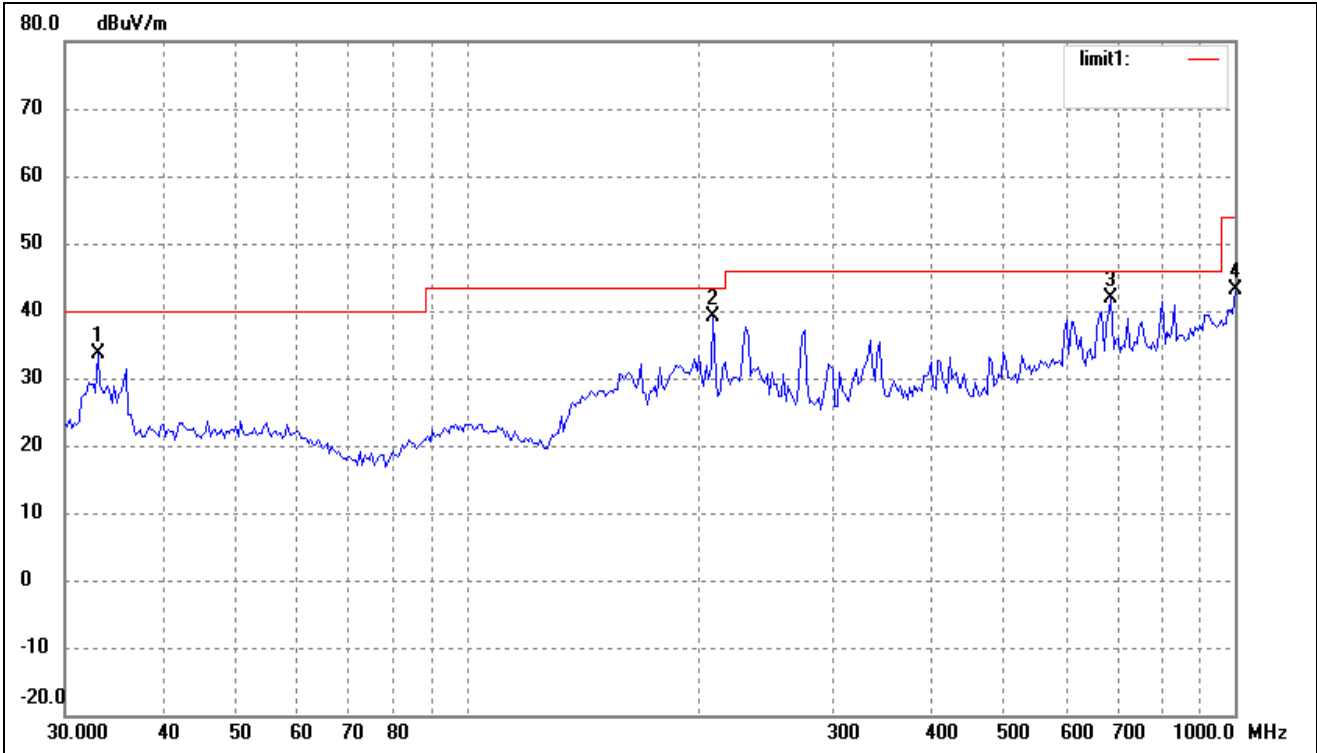

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	33.0950	26.87	6.77	33.64	40.00	-6.36	206	100	peak
2	209.3129	32.29	6.91	39.20	43.50	-4.30	74	100	peak
3	689.5644	24.46	17.41	41.87	46.00	-4.13	120	100	peak
4	1000.0000	20.50	22.74	43.24	54.00	-10.76	311	100	peak

Vertical

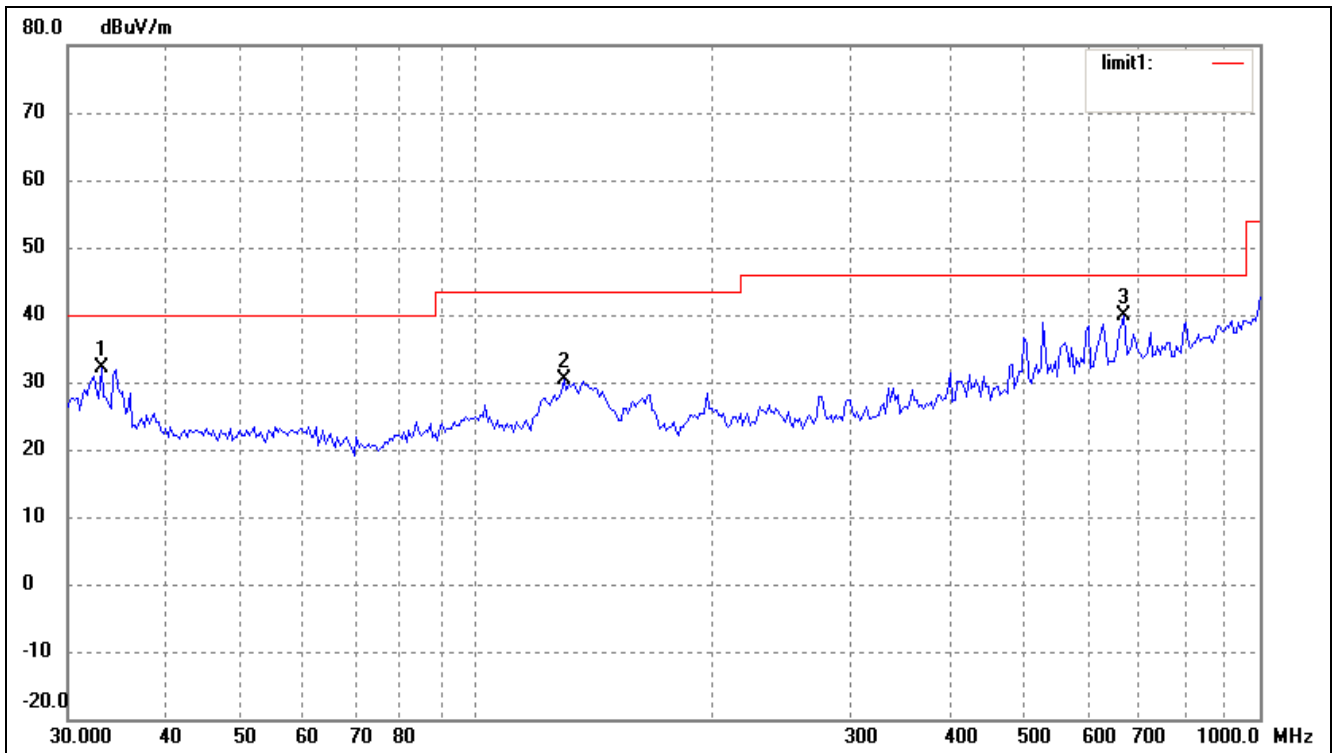

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	33.0950	25.37	6.77	32.14	40.00	-7.86	255	100	peak
2	129.0146	25.76	4.70	30.46	43.50	-13.04	147	100	peak
3	670.4893	22.61	17.26	39.87	46.00	-6.13	30	100	peak

***** END OF REPORT *****