

Conducted test results

No.1-7878-24-01-05_TR1-A201-R1

June 06, 2024

Test Standard(s)

NA - NI

FCC 15.247 - NI

FCC 15.247, ISSED RSS247 - NI

This document is electronically signed and valid without handwritten signature.
Public keys for verification of the electronic signatures can be requested at the testing laboratory.

Authorized

Andreas Curette

Testing Manager
Radio Labs

Table of Content

NA # Peak output power 3MHz/3MHz ~ BT LE 1 Msps	3
FCC 15.247 # Peak psd DTS ~ BT LE 1 Msps	9
FCC 15.247 # Peak psd DTS ~ BT LE 1 Msps	12
FCC 15.247 # Peak psd DTS ~ BT LE 1 Msps	15
FCC 15.247 # Peak psd DTS ~ BT LE 2 Msps	18
FCC 15.247 # Peak psd DTS ~ BT LE 2 Msps	21
FCC 15.247 # Peak psd DTS ~ BT LE 2 Msps	24
FCC 15.247 # Bandwidth 6dB DTS ~ BT LE 1 Msps	27
FCC 15.247 # Bandwidth 6dB DTS ~ BT LE 1 Msps	30
FCC 15.247 # Bandwidth 6dB DTS ~ BT LE 1 Msps	33
FCC 15.247 # Bandwidth 6dB DTS ~ BT LE 2 Msps	36
FCC 15.247 # Bandwidth 6dB DTS ~ BT LE 2 Msps	39
FCC 15.247 # Bandwidth 6dB DTS ~ BT LE 2 Msps	42
FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ BT LE 1 Msps	45
FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ BT LE 1 Msps	50
FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ BT LE 1 Msps	55
FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ BT LE 2 Msps	60
FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ BT LE 2 Msps	65
FCC 15.247, ISSED RSS247 # Bandwidth 99PCT and 20dB ~ BT LE 2 Msps	70
FCC 15.247 # Maximum peak conducted output power DTS ~ BT LE 1 Msps	75
FCC 15.247 # Maximum peak conducted output power DTS ~ BT LE 1 Msps	79
FCC 15.247 # Maximum peak conducted output power DTS ~ BT LE 1 Msps	83
FCC 15.247 # Maximum peak conducted output power DTS ~ BT LE 2 Msps	87
FCC 15.247 # Maximum peak conducted output power DTS ~ BT LE 2 Msps	91
FCC 15.247 # Maximum peak conducted output power DTS ~ BT LE 2 Msps	95
FCC 15.247 # TX spurious conducted 20dBc ~ BT LE 1 Msps	99
FCC 15.247 # TX spurious conducted 20dBc ~ BT LE 1 Msps	103
FCC 15.247 # TX spurious conducted 20dBc ~ BT LE 1 Msps	107
FCC 15.247 # TX spurious conducted 20dBc ~ BT LE 2 Msps	111
FCC 15.247 # TX spurious conducted 20dBc ~ BT LE 2 Msps	115
FCC 15.247 # TX spurious conducted 20dBc ~ BT LE 2 Msps	119

NA # Peak output power 3MHz/3MHz ~ BT LE 1 Msps

References

TC start	22.05.2024 13:30:54
Ambit temp [°C] humidity [rel%]	25.9 39
System version	5.0.5.0
Standard Version	NA NI
Method	
Description	Peak OP 3MHz/3MHz - BT LE 1 Msps
Information	

EUT Common Settings BT Low Energy

Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
1 Mbps supported	True TXpayload 255 RXpayload 255
2 Mbps supported	True TXpayload 255 RXpayload 255
Longrange S8 supported	True TXpayload 255 RXpayload 255
Longrange S2 supported	True TXpayload 255 RXpayload 255
Signaling Settings	USB_RS232 HCI 7 115200 None S1 None On
Signaling RF Settings	RF1com 0 0 On
User Interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	BT LE 1 Msps
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2480
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1
Full path type	EUT_SA_GEN_SIG

Test Parameter

Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2402 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	8.20	dBm	INFO
Ref. frequency	---	---	2402.400	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	18.20 9.26 25
Start [MHz] Stop [MHz]	2399.500 2404.500
RBW [MHz] VBW [MHz]	3.000000 3.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 10 1001 SWE

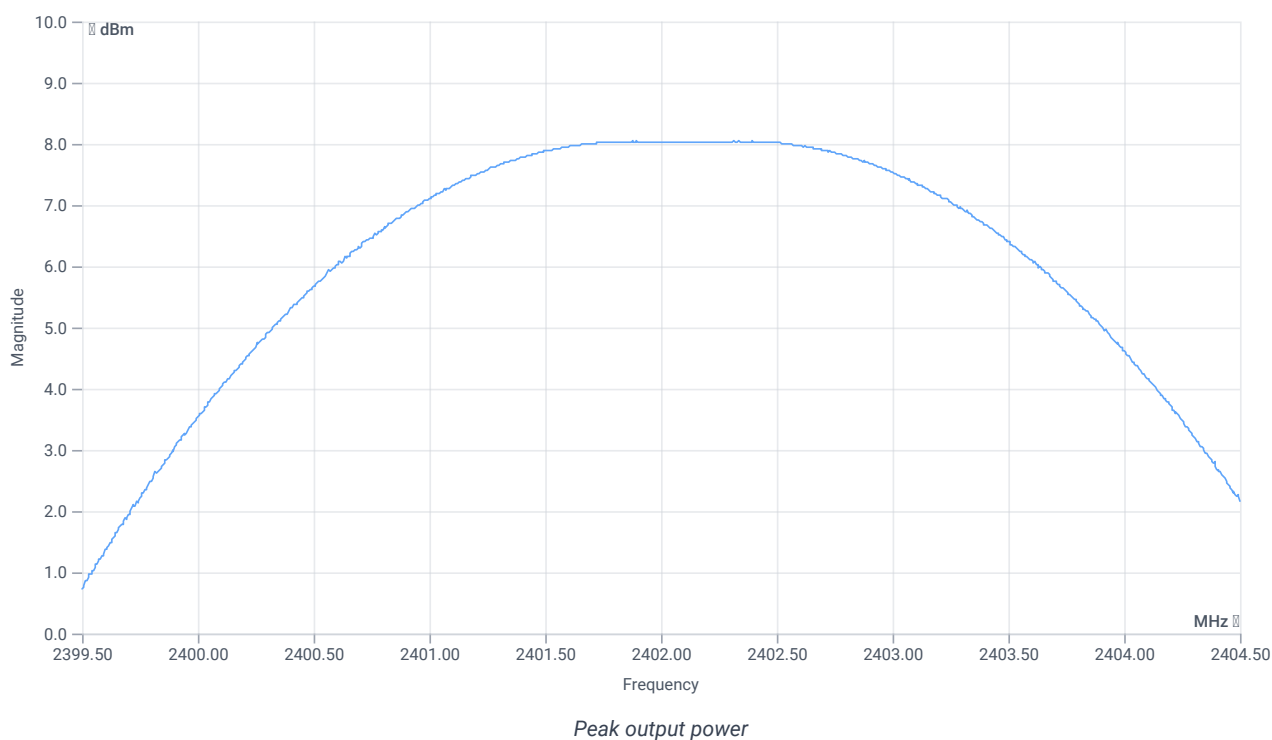

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	---	---	8.04	dBm	INFO
Peak power	---	---	6.367955	mW	INFO
Frequency at peak	---	---	2402.335	MHz	INFO


Test at TX 2440 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	8.05	dBm	INFO
Ref. frequency	---	---	2440.400	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	18.05 9.3 25
Start [MHz] Stop [MHz]	2437.500 2442.500
RBW [MHz] VBW [MHz]	3.000000 3.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 10 1001 SWE

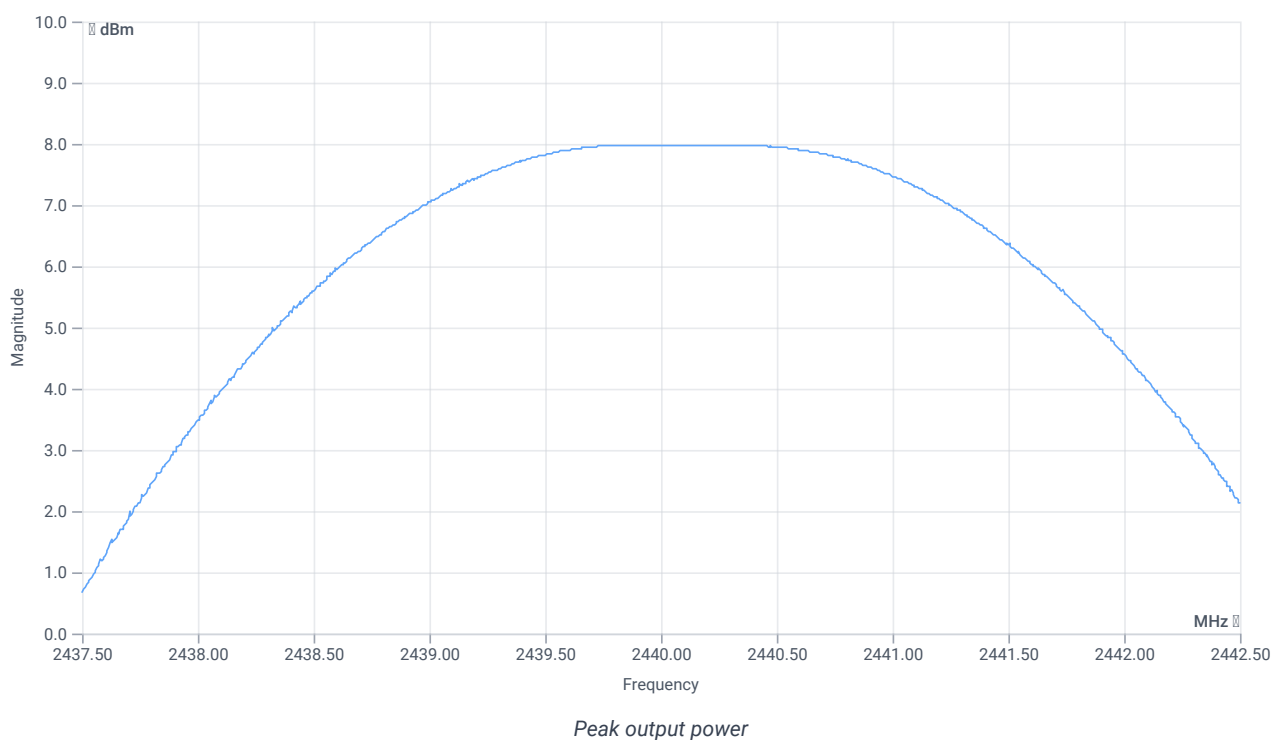

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	---	---	7.98	dBm	INFO
Peak power	---	---	6.280584	mW	INFO
Frequency at peak	---	---	2439.86	MHz	INFO


Test at TX 2480 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	6.94	dBm	INFO
Ref. frequency	---	---	2480.400	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	16.94 9.4 25
Start [MHz] Stop [MHz]	2477.500 2482.500
RBW [MHz] VBW [MHz]	3.000000 3.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 10 1001 SWE

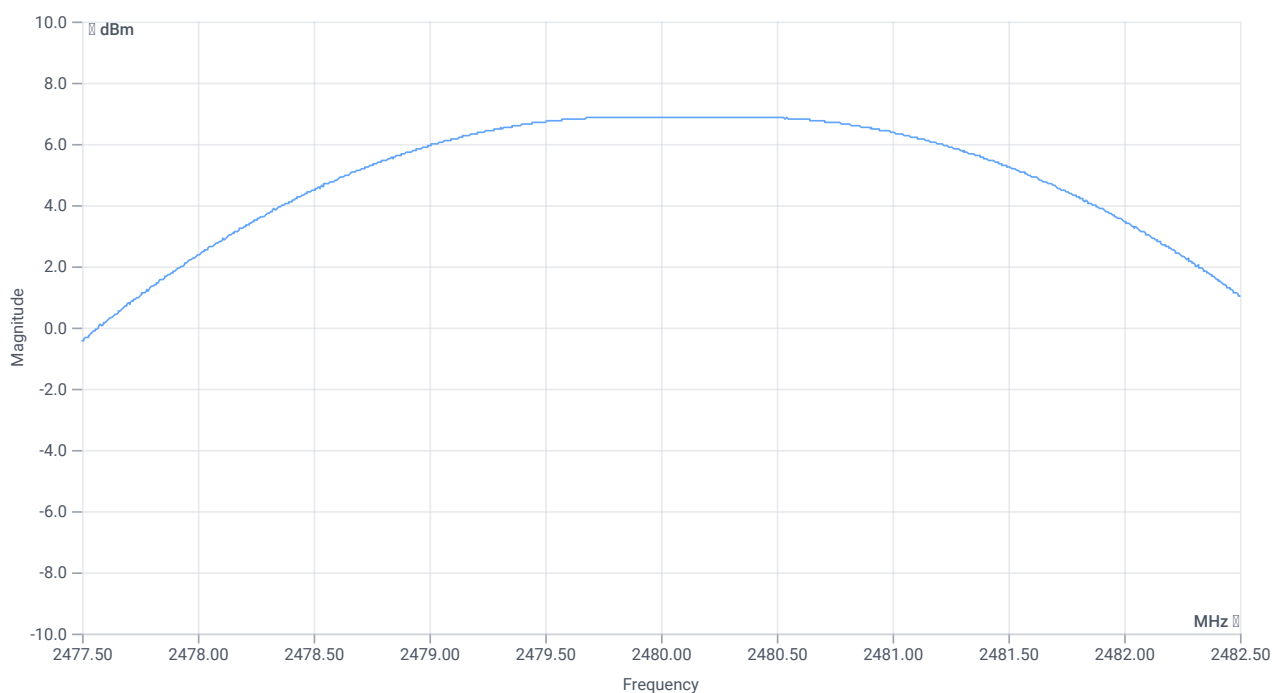

Peak output power

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	---	---	6.89	dBm	INFO
Peak power	---	---	4.886524	mW	INFO
Frequency at peak	---	---	2479.89	MHz	INFO

Verdict

PASS

FCC 15.247 # Peak psd DTS ~ BT LE 1 Msps

References

TC start	24.05.2024 12:27:38
Ambit temp [°C] humidity [rel%]	26.8 40
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Description	FCC 15.247 Peak psd DTS - BT LE 1 Msps
Information	

EUT Common Settings BT Low Energy

Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
1 Mbps supported	True TXpayload 255 RXpayload 255
2 Mbps supported	True TXpayload 255 RXpayload 255
Longrange S8 supported	True TXpayload 255 RXpayload 255
Longrange S2 supported	True TXpayload 255 RXpayload 255
Signaling Settings	None HCI 7 115200 None S1 None On
Signaling RF Settings	RF1com 0 0 On
User Interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	BT LE 1 Msps
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1

Test Parameter

Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2402 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	4.76	dBm	INFO
Ref. frequency	---	---	2402.400	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	9.76 9.26 20
Start [MHz] Stop [MHz]	2401.250 2402.750
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 20 1001 SWE

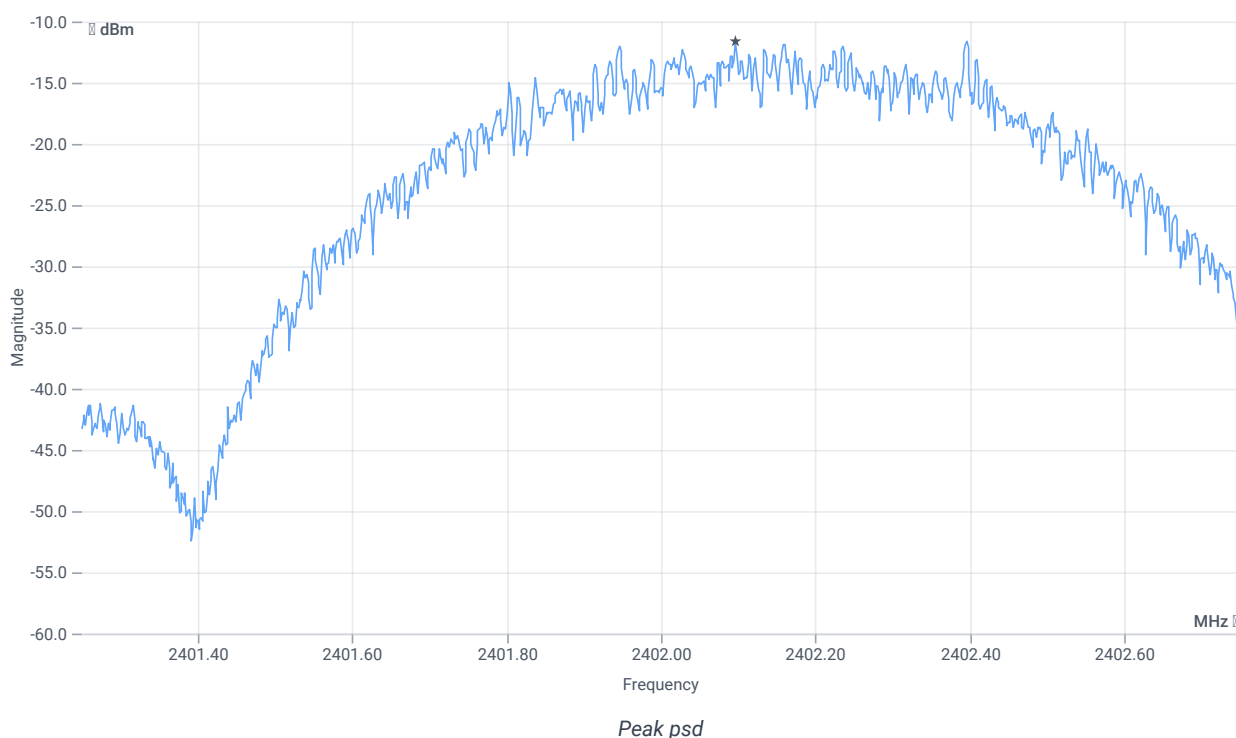

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak psd	---	8	-11.61	dBm/3KHz	PASS

Verdict

PASS

FCC 15.247 # Peak psd DTS ~ BT LE 1 Msps

References

TC start	24.05.2024 12:52:00
Ambit temp [°C] humidity [rel%]	26.8 43
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Description	FCC 15.247 Peak psd DTS - BT LE 1 Msps
Information	

EUT Common Settings BT Low Energy

Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
1 Mbps supported	True TXpayload 255 RXpayload 255
2 Mbps supported	True TXpayload 255 RXpayload 255
Longrange S8 supported	True TXpayload 255 RXpayload 255
Longrange S2 supported	True TXpayload 255 RXpayload 255
Signaling Settings	None HCI 7 115200 None S1 None On
Signaling RF Settings	RF1com 0 0 On
User Interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	BT LE 1 Msps
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1

Test Parameter

Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2440 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	4.66	dBm	INFO
Ref. frequency	---	---	2440.400	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	9.66 9.3 20
Start [MHz] Stop [MHz]	2439.250 2440.750
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 20 1001 SWE

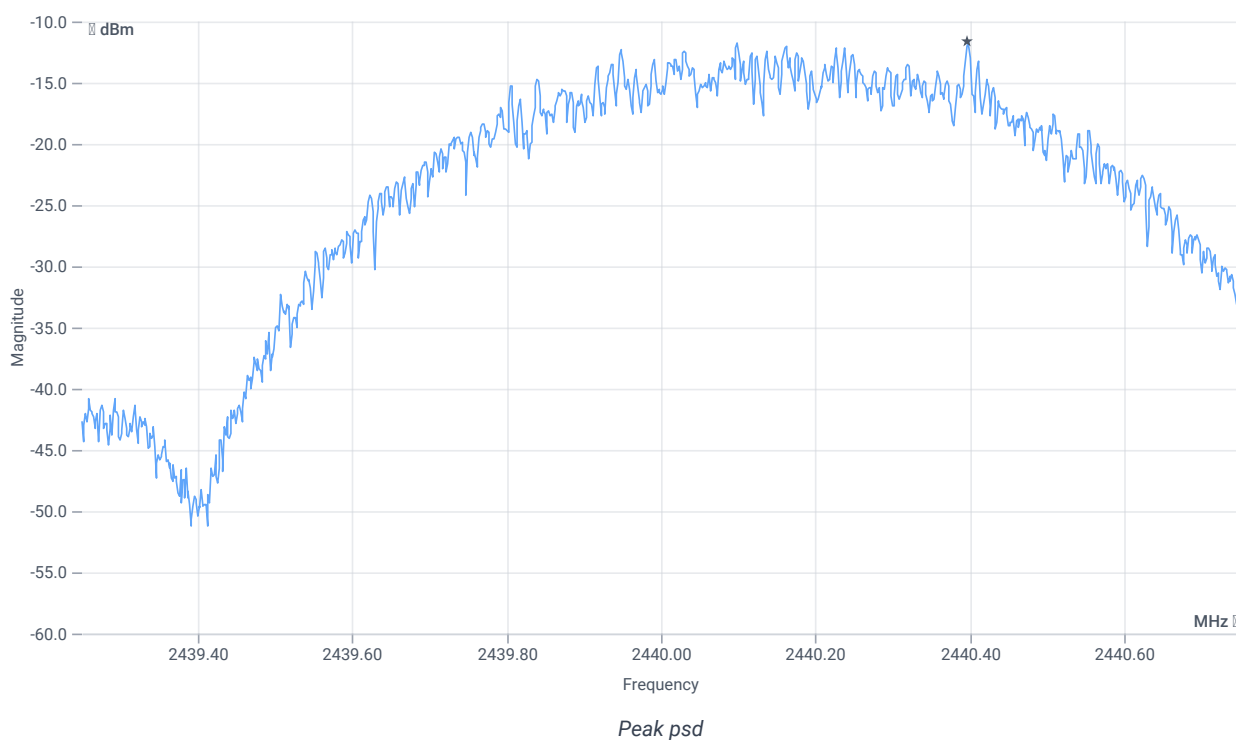

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak psd	---	8	-11.65	dBm/3KHz	PASS

Verdict

PASS

FCC 15.247 # Peak psd DTS ~ BT LE 1 Msps

References

TC start	24.05.2024 13:10:32
Ambit temp [°C] humidity [rel%]	25.8 38
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Description	FCC 15.247 Peak psd DTS - BT LE 1 Msps
Information	

EUT Common Settings BT Low Energy

Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
1 Mbps supported	True TXpayload 255 RXpayload 255
2 Mbps supported	True TXpayload 255 RXpayload 255
Longrange S8 supported	True TXpayload 255 RXpayload 255
Longrange S2 supported	True TXpayload 255 RXpayload 255
Signaling Settings	None HCI 7 115200 None S1 None On
Signaling RF Settings	RF1com 0 0 On
User Interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	BT LE 1 Msps
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2480
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1

Test Parameter

Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2480 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	3.38	dBm	INFO
Ref. frequency	---	---	2480.400	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	8.38 9.4 15
Start [MHz] Stop [MHz]	2479.250 2480.750
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 20 1001 SWE

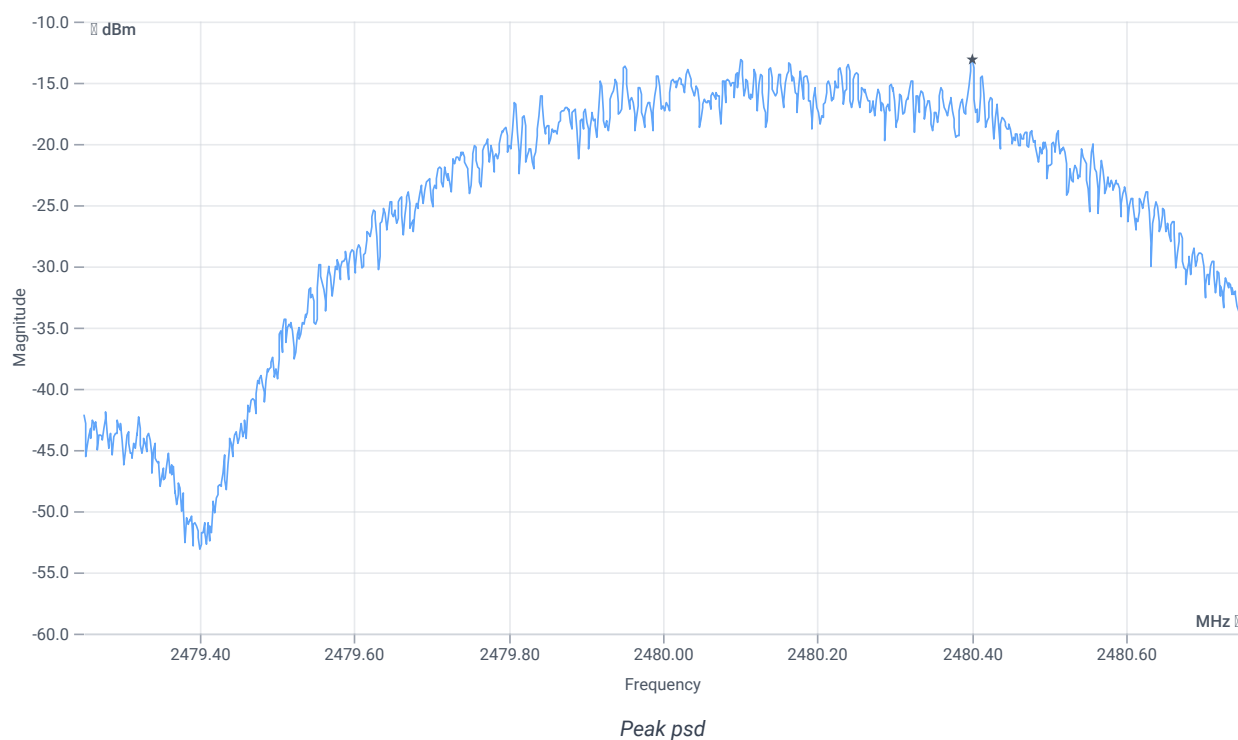

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak psd	---	8	-13.07	dBm/3KHz	PASS

Verdict

PASS

FCC 15.247 # Peak psd DTS ~ BT LE 2 Msps

References

TC start	24.05.2024 13:28:54
Ambit temp [°C] humidity [rel%]	25.9 46
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Description	FCC 15.247 Peak psd DTS - BT LE 2 Msps
Information	

EUT Common Settings BT Low Energy

Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
1 Mbps supported	True TXpayload 255 RXpayload 255
2 Mbps supported	True TXpayload 255 RXpayload 255
Longrange S8 supported	True TXpayload 255 RXpayload 255
Longrange S2 supported	True TXpayload 255 RXpayload 255
Signaling Settings	None HCI 7 115200 None S1 None On
Signaling RF Settings	RF1com 0 0 On
User Interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	BT LE 2 Msps
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2404
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2478
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1

Test Parameter

Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2404 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	4.81	dBm	INFO
Ref. frequency	---	---	2404.700	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	9.81 9.26 20
Start [MHz] Stop [MHz]	2402.275 2405.725
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 20 1001 SWE

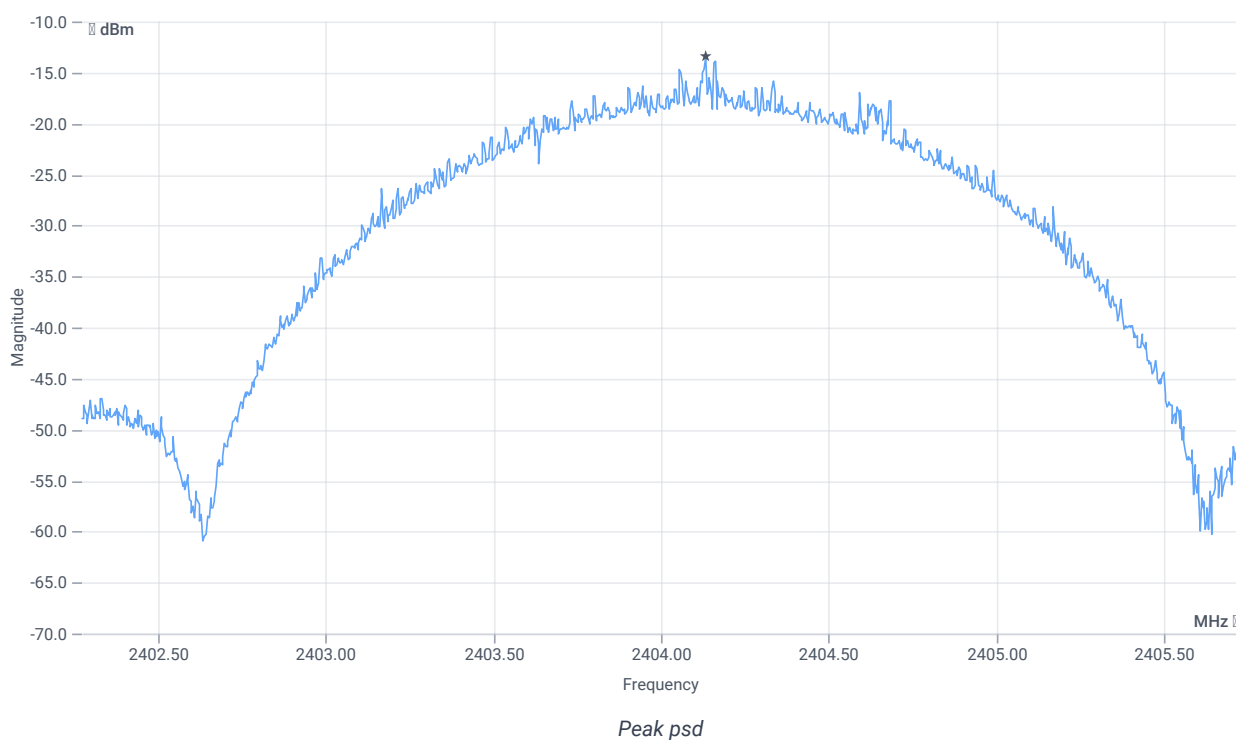

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak psd	---	8	-13.47	dBm/3KHz	PASS

Verdict

PASS

FCC 15.247 # Peak psd DTS ~ BT LE 2 Msps

References

TC start	24.05.2024 13:48:33
Ambit temp [°C] humidity [rel%]	26.7 44
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Description	FCC 15.247 Peak psd DTS - BT LE 2 Msps
Information	

EUT Common Settings BT Low Energy

Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
1 Mbps supported	True TXpayload 255 RXpayload 255
2 Mbps supported	True TXpayload 255 RXpayload 255
Longrange S8 supported	True TXpayload 255 RXpayload 255
Longrange S2 supported	True TXpayload 255 RXpayload 255
Signaling Settings	None HCI 7 115200 None S1 None On
Signaling RF Settings	RF1com 0 0 On
User Interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	BT LE 2 Msps
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2404
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2478
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1

Test Parameter

Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2440 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	4.69	dBm	INFO
Ref. frequency	---	---	2440.600	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	9.69 9.3 20
Start [MHz] Stop [MHz]	2438.275 2441.725
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 20 1001 SWE

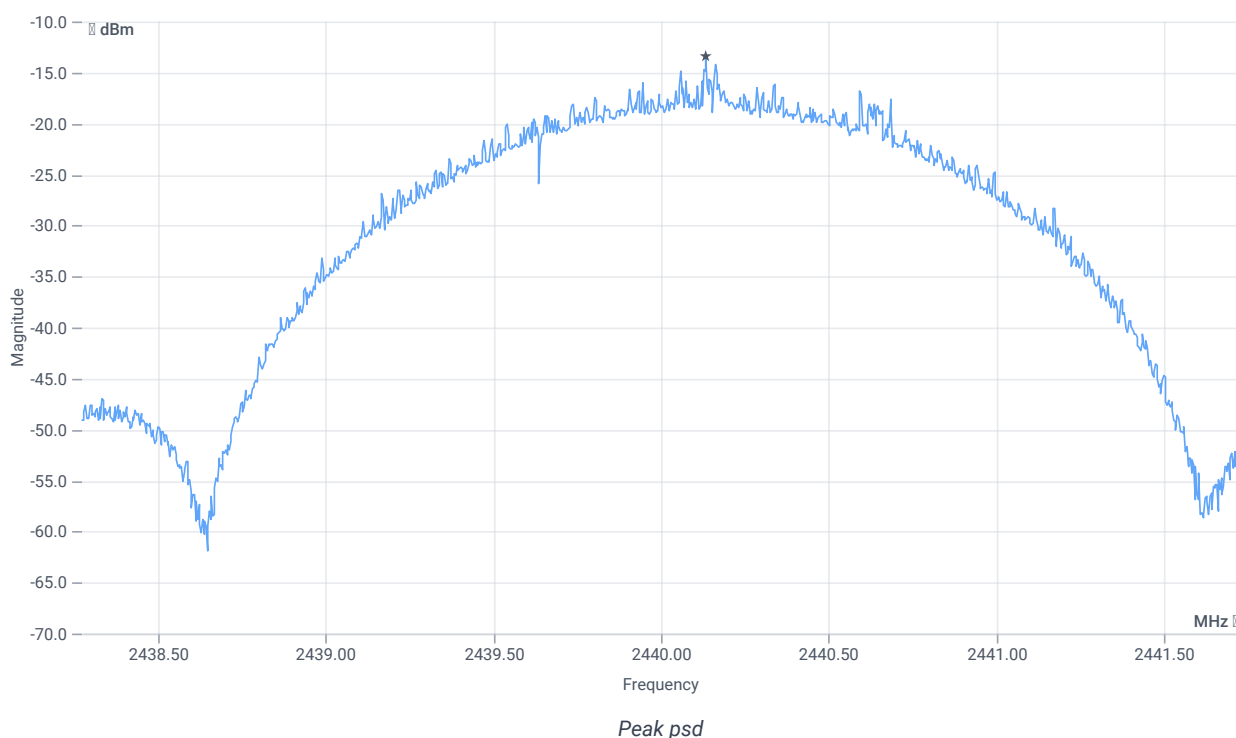

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak psd	---	8	-13.48	dBm/3KHz	PASS

Verdict

PASS

FCC 15.247 # Peak psd DTS ~ BT LE 2 Msps

References

TC start	24.05.2024 14:04:45
Ambit temp [°C] humidity [rel%]	26.8 42
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Description	FCC 15.247 Peak psd DTS - BT LE 2 Msps
Information	

EUT Common Settings BT Low Energy

Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
1 Mbps supported	True TXpayload 255 RXpayload 255
2 Mbps supported	True TXpayload 255 RXpayload 255
Longrange S8 supported	True TXpayload 255 RXpayload 255
Longrange S2 supported	True TXpayload 255 RXpayload 255
Signaling Settings	None HCI 7 115200 None S1 None On
Signaling RF Settings	RF1com 0 0 On
User Interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	BT LE 2 Msps
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2404
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2478
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1

Test Parameter

Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2478 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	3.46	dBm	INFO
Ref. frequency	---	---	2478.700	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	8.46 9.39 15
Start [MHz] Stop [MHz]	2476.275 2479.725
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 20 1001 SWE

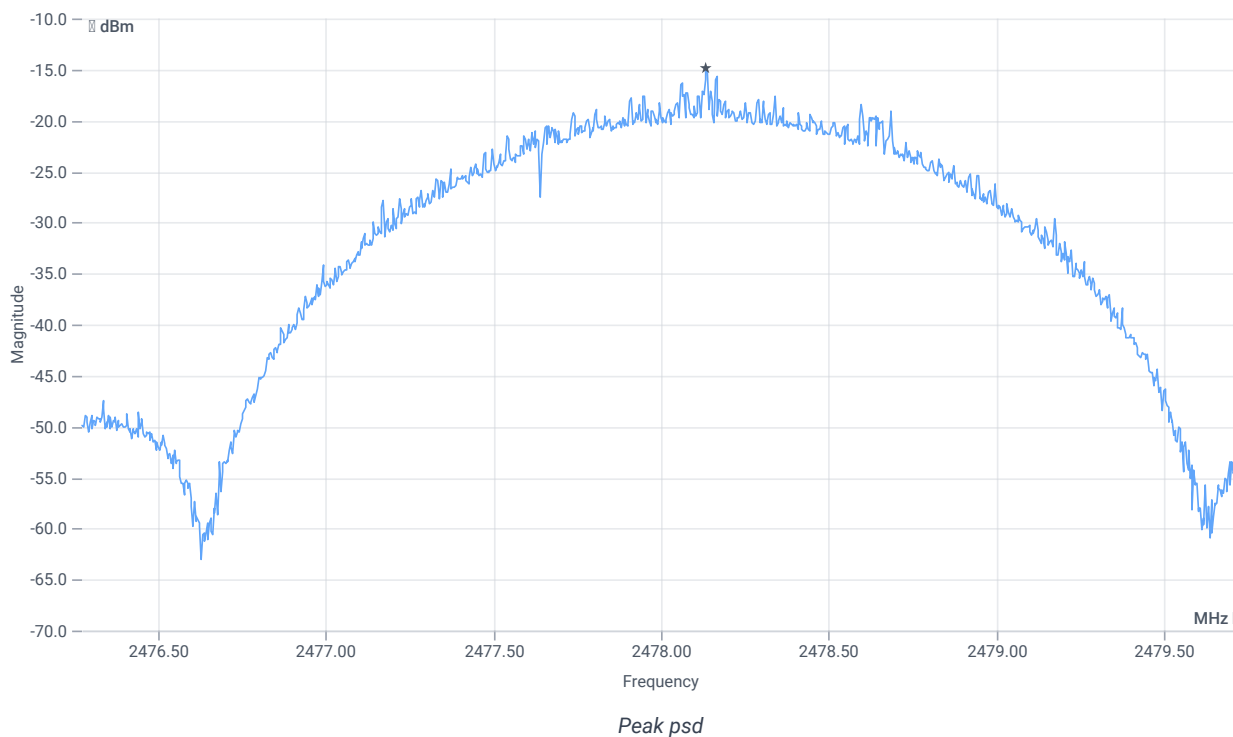

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak psd	---	8	-14.93	dBm/3KHz	PASS

Verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ BT LE 1 Msps

References

TC start	24.05.2024 12:27:07
Ambit temp [°C] humidity [rel%]	26.9 41
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Bandwidth 6dB DTS - BT LE 1 Msps
Information	

EUT Common Settings BT Low Energy

Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
1 Mbps supported	True TXpayload 255 RXpayload 255
2 Mbps supported	True TXpayload 255 RXpayload 255
Longrange S8 supported	True TXpayload 255 RXpayload 255
Longrange S2 supported	True TXpayload 255 RXpayload 255
Signaling Settings	None HCI 7 115200 None S1 None On
Signaling RF Settings	RF1com 0 0 On
User Interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	BT LE 1 Msps
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1
Full path type	EUT_SA_GEN_SIG

Test Parameter

Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2402 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	4.75	dBm	INFO
Ref. frequency	---	---	2402.400	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	9.75 9.26 20
Start [MHz] Stop [MHz]	2401.000 2403.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

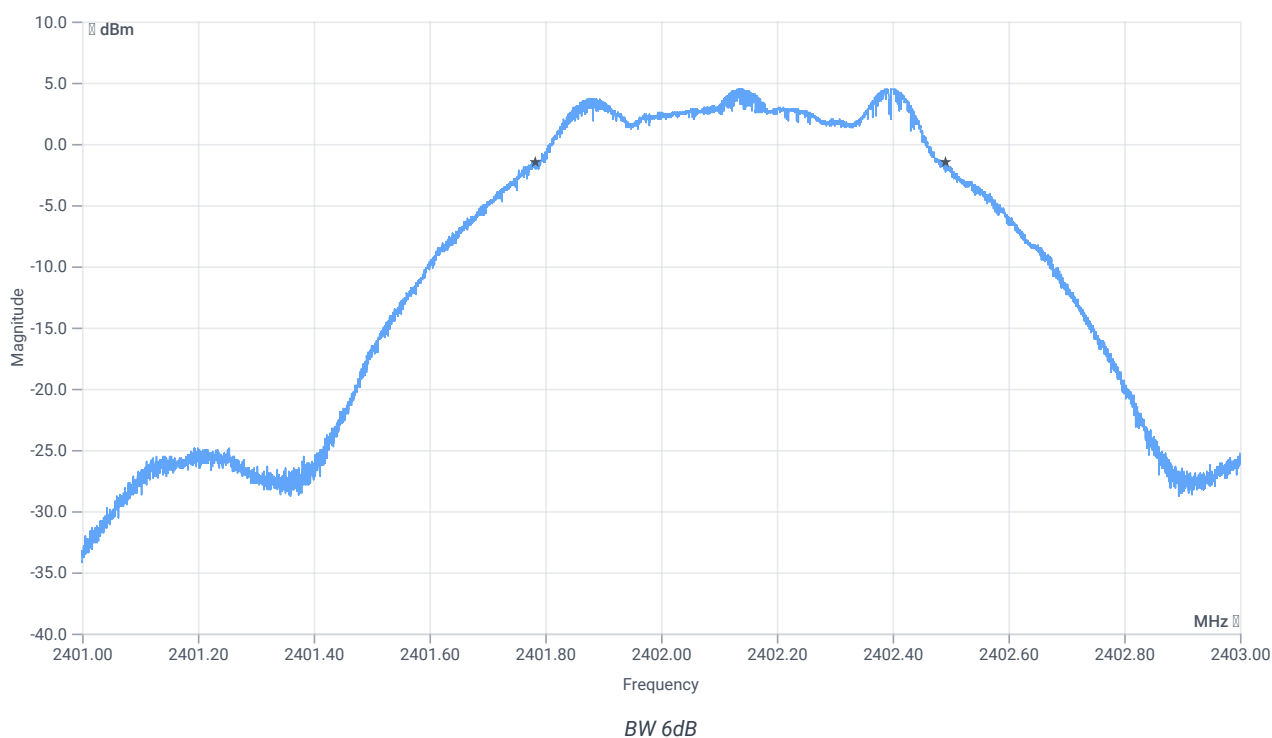

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS bandwidth (6dB)	500	---	707	kHz	PASS

Verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ BT LE 1 Msps

References

TC start	24.05.2024 12:51:29
Ambit temp [°C] humidity [rel%]	26.8 43
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Bandwidth 6dB DTS - BT LE 1 Msps
Information	

EUT Common Settings BT Low Energy

Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
1 Mbps supported	True TXpayload 255 RXpayload 255
2 Mbps supported	True TXpayload 255 RXpayload 255
Longrange S8 supported	True TXpayload 255 RXpayload 255
Longrange S2 supported	True TXpayload 255 RXpayload 255
Signaling Settings	None HCI 7 115200 None S1 None On
Signaling RF Settings	RF1com 0 0 On
User Interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	BT LE 1 Msps
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1
Full path type	EUT_SA_GEN_SIG

Test Parameter

Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2440 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	4.68	dBm	INFO
Ref. frequency	---	---	2440.400	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	9.69 9.3 20
Start [MHz] Stop [MHz]	2439.000 2441.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

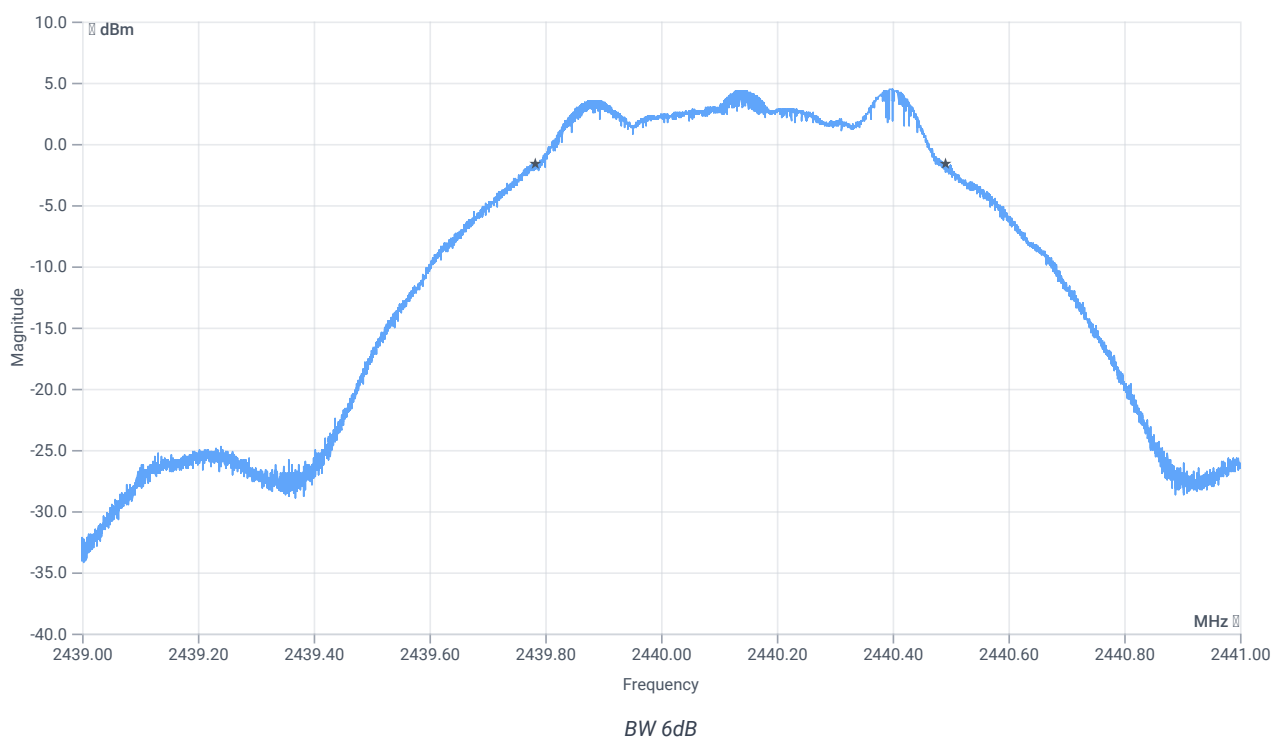

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS bandwidth (6dB)	500	---	708	kHz	PASS

Verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ BT LE 1 Msps

References

TC start	24.05.2024 13:10:00
Ambit temp [°C] humidity [rel%]	25.9 38
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Bandwidth 6dB DTS - BT LE 1 Msps
Information	

EUT Common Settings BT Low Energy

Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
1 Mbps supported	True TXpayload 255 RXpayload 255
2 Mbps supported	True TXpayload 255 RXpayload 255
Longrange S8 supported	True TXpayload 255 RXpayload 255
Longrange S2 supported	True TXpayload 255 RXpayload 255
Signaling Settings	None HCI 7 115200 None S1 None On
Signaling RF Settings	RF1com 0 0 On
User Interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	BT LE 1 Msps
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2480
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1
Full path type	EUT_SA_GEN_SIG

Test Parameter

Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2480 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	3.39	dBm	INFO
Ref. frequency	---	---	2480.400	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	8.39 9.4 15
Start [MHz] Stop [MHz]	2479.000 2481.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

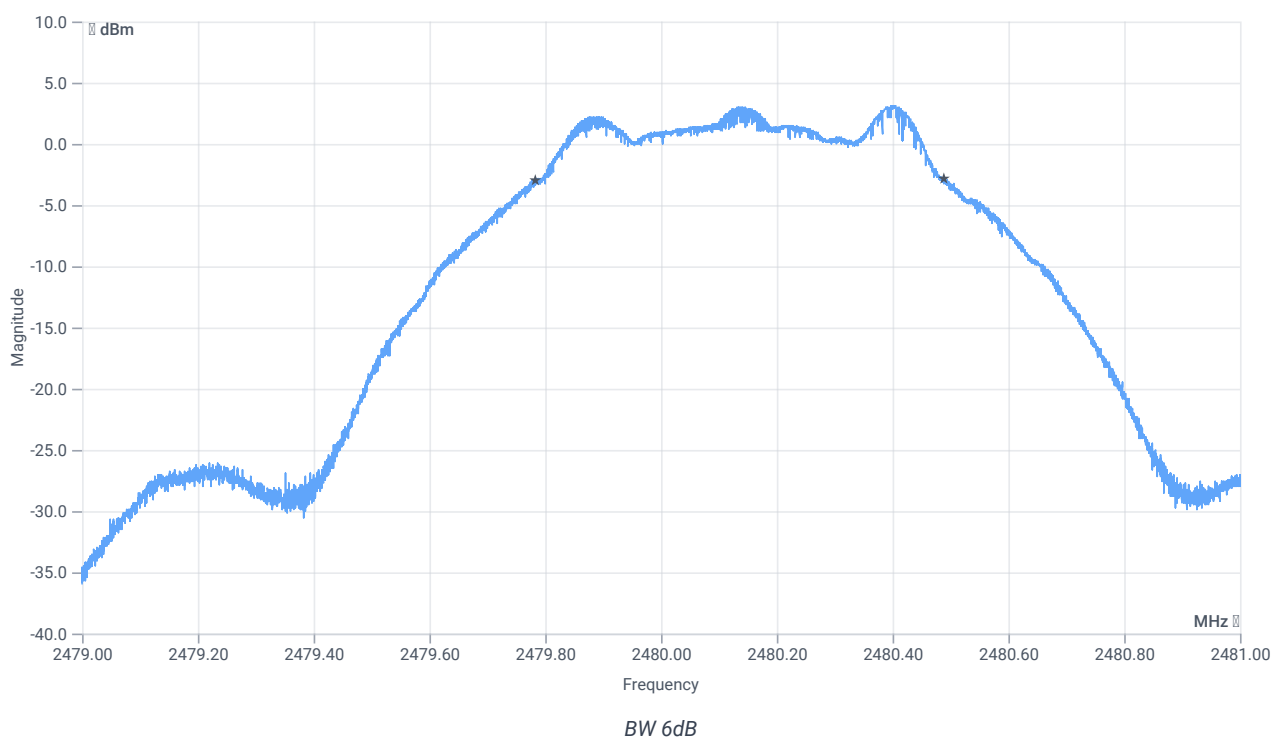

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS bandwidth (6dB)	500	---	708	kHz	PASS

Verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ BT LE 2 Msps

References

TC start	24.05.2024 13:28:22
Ambit temp [°C] humidity [rel%]	25.8 46
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Bandwidth 6dB DTS - BT LE 2 Msps
Information	

EUT Common Settings BT Low Energy

Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
1 Mbps supported	True TXpayload 255 RXpayload 255
2 Mbps supported	True TXpayload 255 RXpayload 255
Longrange S8 supported	True TXpayload 255 RXpayload 255
Longrange S2 supported	True TXpayload 255 RXpayload 255
Signaling Settings	None HCI 7 115200 None S1 None On
Signaling RF Settings	RF1com 0 0 On
User Interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	BT LE 2 Msps
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2404
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2478
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1
Full path type	EUT_SA_GEN_SIG

Test Parameter

Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2404 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	4.82	dBm	INFO
Ref. frequency	---	---	2404.600	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	9.82 9.26 20
Start [MHz] Stop [MHz]	2401.700 2406.300
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

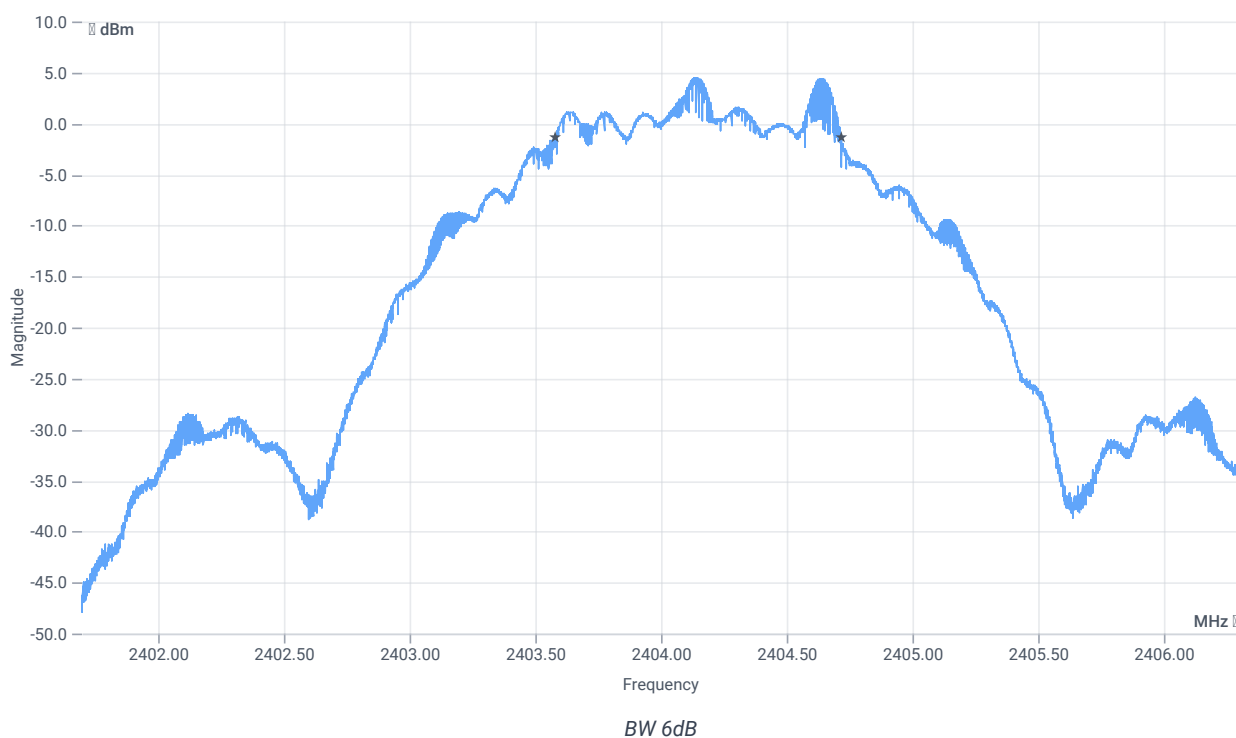

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS bandwidth (6dB)	500	---	1139	kHz	PASS

Verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ BT LE 2 Msps

References

TC start	24.05.2024 13:48:01
Ambit temp [°C] humidity [rel%]	26.7 44
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Bandwidth 6dB DTS - BT LE 2 Msps
Information	

EUT Common Settings BT Low Energy

Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
1 Mbps supported	True TXpayload 255 RXpayload 255
2 Mbps supported	True TXpayload 255 RXpayload 255
Longrange S8 supported	True TXpayload 255 RXpayload 255
Longrange S2 supported	True TXpayload 255 RXpayload 255
Signaling Settings	None HCI 7 115200 None S1 None On
Signaling RF Settings	RF1com 0 0 On
User Interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	BT LE 2 Msps
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2404
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2478
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1
Full path type	EUT_SA_GEN_SIG

Test Parameter

Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2440 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	4.69	dBm	INFO
Ref. frequency	---	---	2440.600	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	9.69 9.3 20
Start [MHz] Stop [MHz]	2437.700 2442.300
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

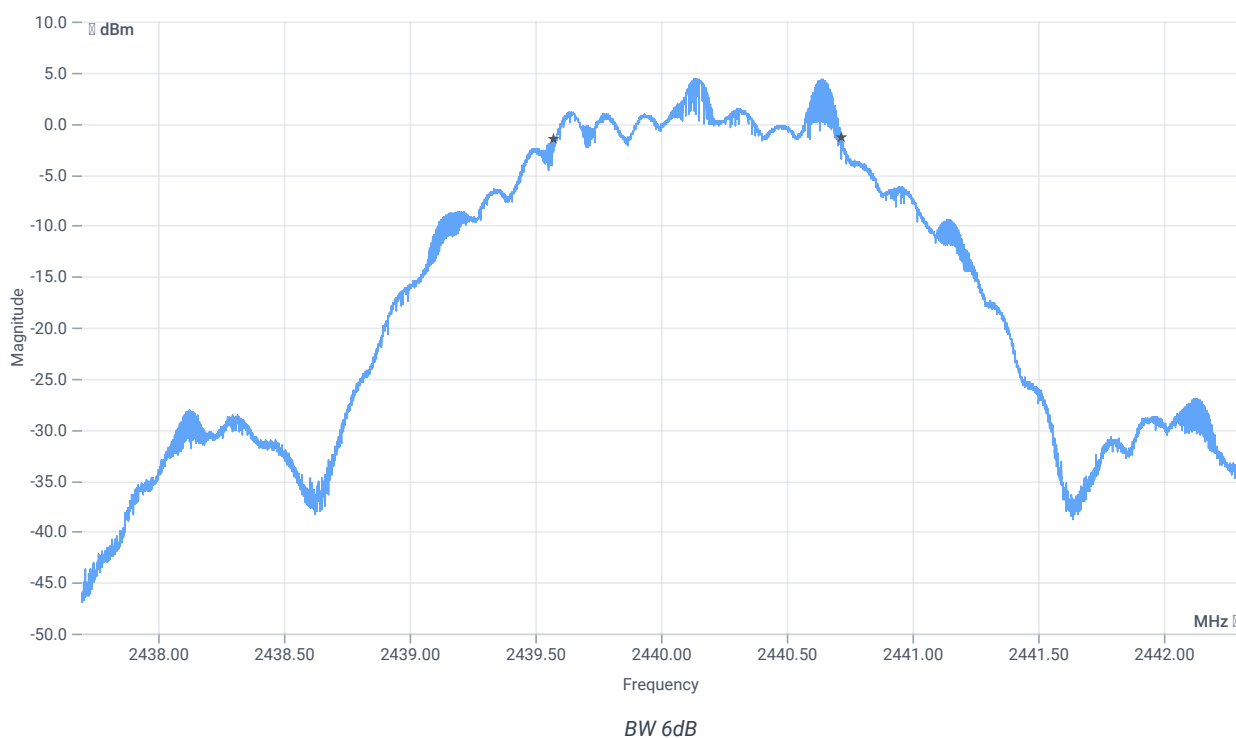

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS bandwidth (6dB)	500	---	1142	kHz	PASS

Verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ BT LE 2 Msps

References

TC start	24.05.2024 14:04:13
Ambit temp [°C] humidity [rel%]	26.8 42
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Bandwidth 6dB DTS - BT LE 2 Msps
Information	

EUT Common Settings BT Low Energy

Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
1 Mbps supported	True TXpayload 255 RXpayload 255
2 Mbps supported	True TXpayload 255 RXpayload 255
Longrange S8 supported	True TXpayload 255 RXpayload 255
Longrange S2 supported	True TXpayload 255 RXpayload 255
Signaling Settings	None HCI 7 115200 None S1 None On
Signaling RF Settings	RF1com 0 0 On
User Interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	BT LE 2 Msps
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2404
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2478
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1
Full path type	EUT_SA_GEN_SIG

Test Parameter

Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2478 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	3.42	dBm	INFO
Ref. frequency	---	---	2478.600	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	8.42 9.39 15
Start [MHz] Stop [MHz]	2475.700 2480.300
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

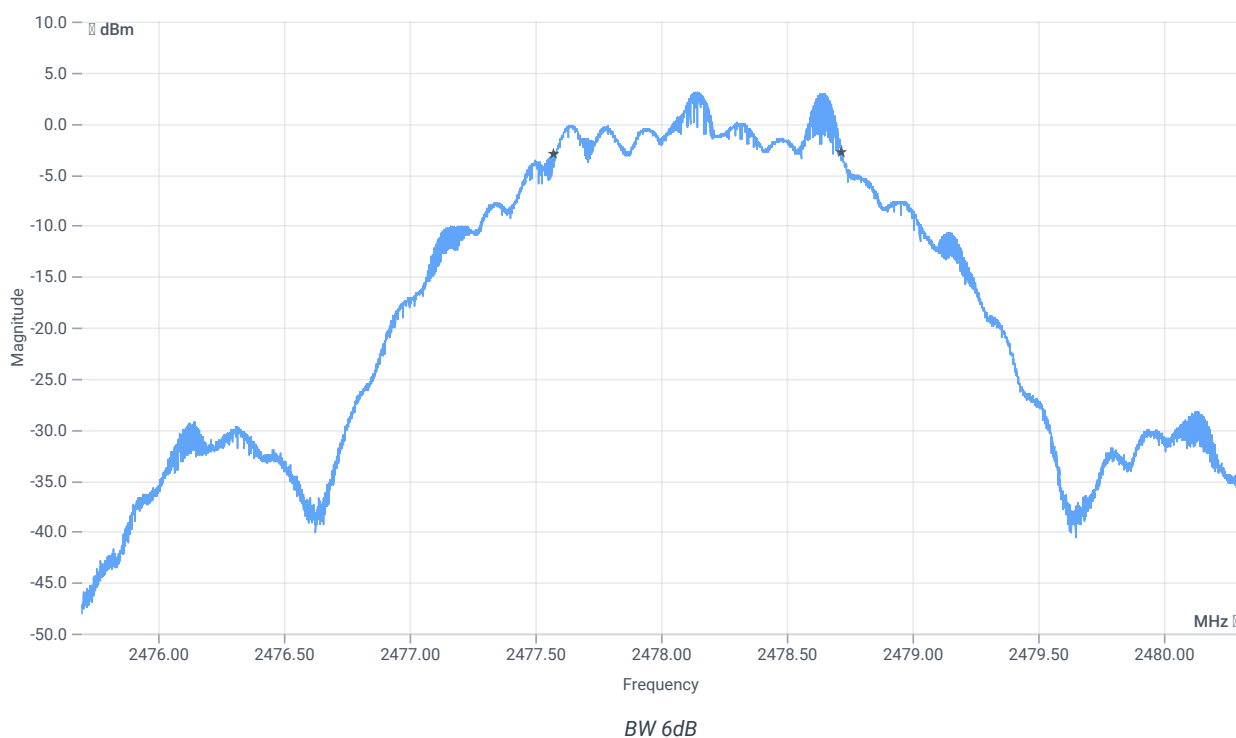

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS bandwidth (6dB)	500	---	1147	kHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ BT LE 1 Msps

References

TC start	24.05.2024 12:28:19
Ambit temp [°C] humidity [rel%]	26.8 40
System version	5.0.5.0
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - BT LE 1 Msps
Information	

EUT Common Settings BT Low Energy

Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
1 Mbps supported	True TXpayload 255 RXpayload 255
2 Mbps supported	True TXpayload 255 RXpayload 255
Longrange S8 supported	True TXpayload 255 RXpayload 255
Longrange S2 supported	True TXpayload 255 RXpayload 255
Signaling Settings	None HCI 7 115200 None S1 None On
Signaling RF Settings	RF1com 0 0 On
User Interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	BT LE 1 Msps
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1

Test Parameter

Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2402 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	4.73	dBm	INFO
Ref. frequency	---	---	2402.400	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	9.73 9.26 20
Start [MHz] Stop [MHz]	2401.000 2403.000
RBW [MHz] VBW [MHz]	0.020000 0.100000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

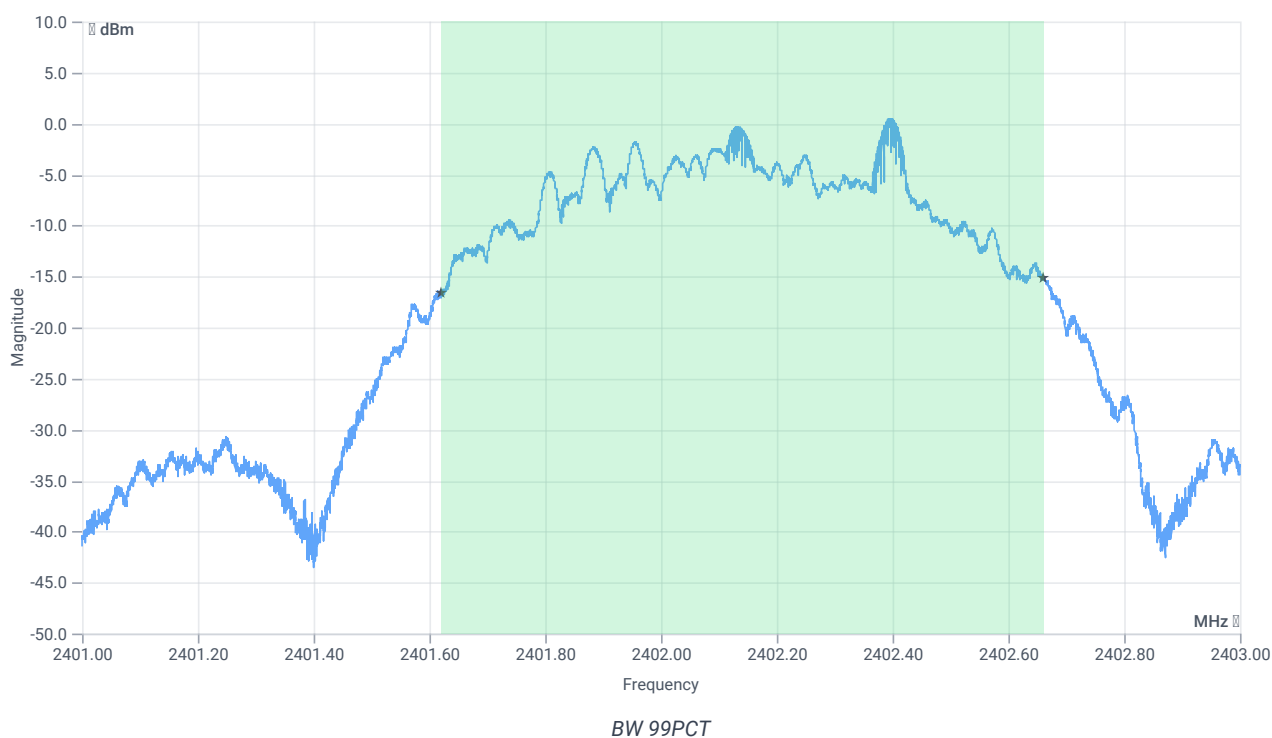


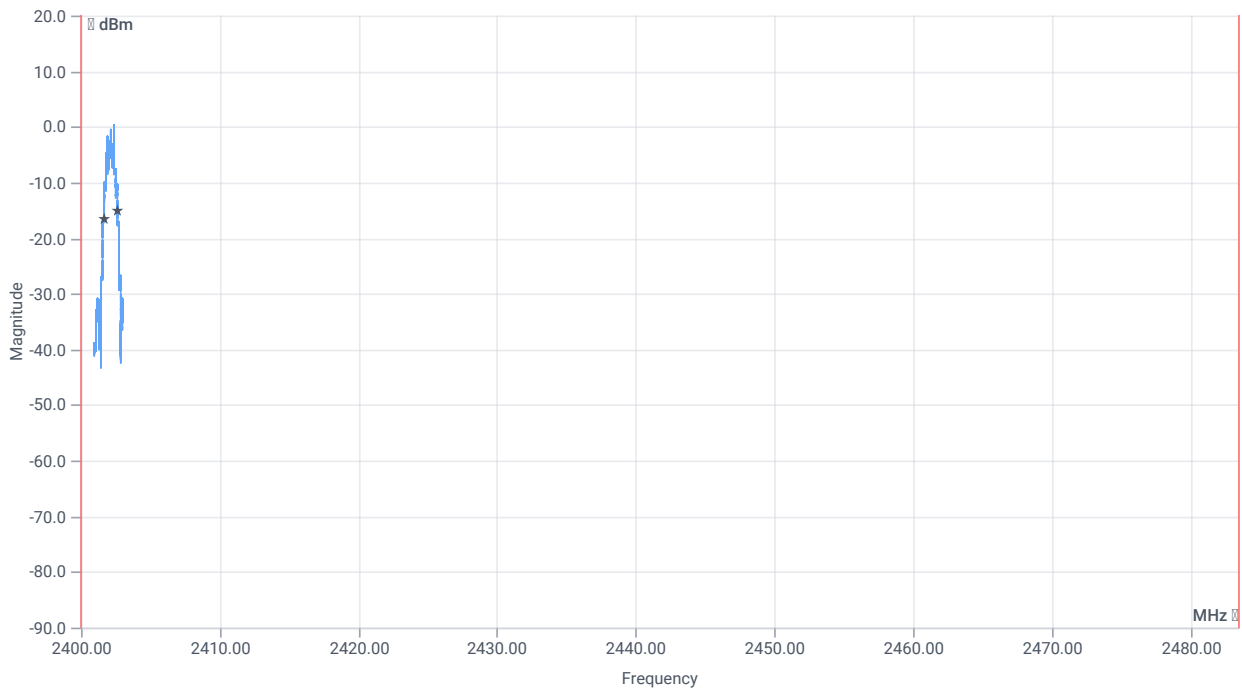


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	1040.000	kHz	INFO
T1 99%	2400.000000	---	2401.6208	MHz	PASS
T2 99%	---	2483.500000	2402.6611	MHz	PASS

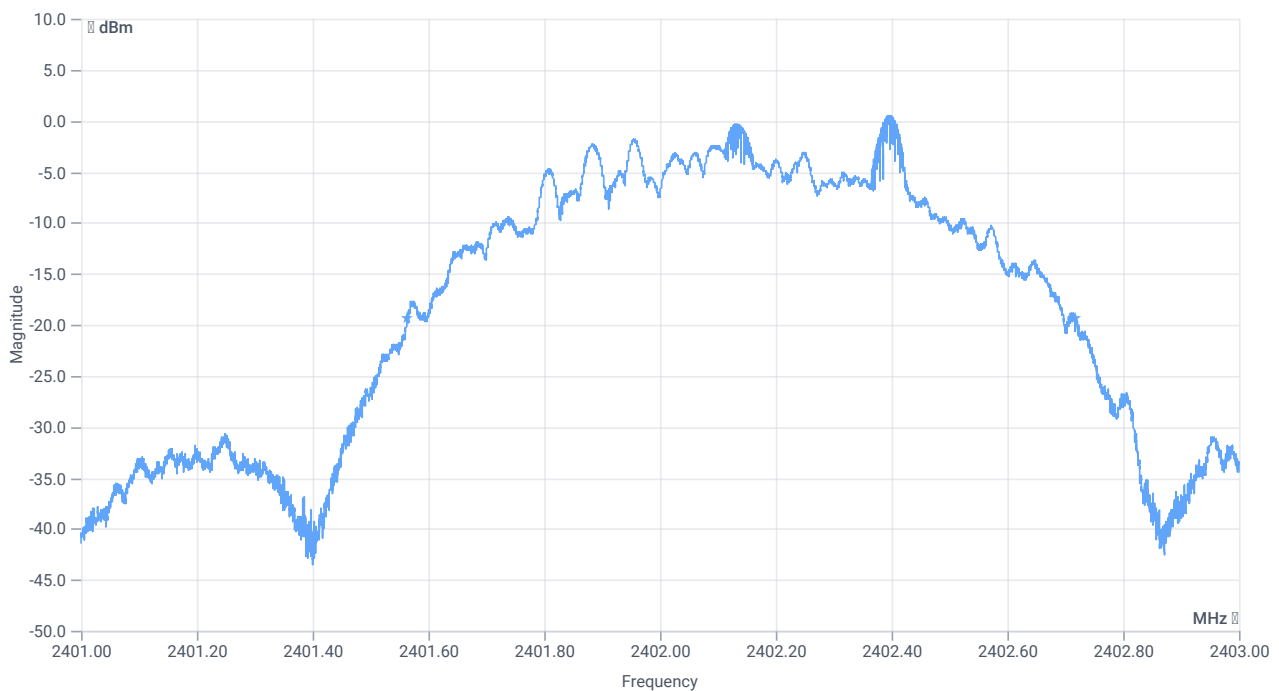

BW 20dB

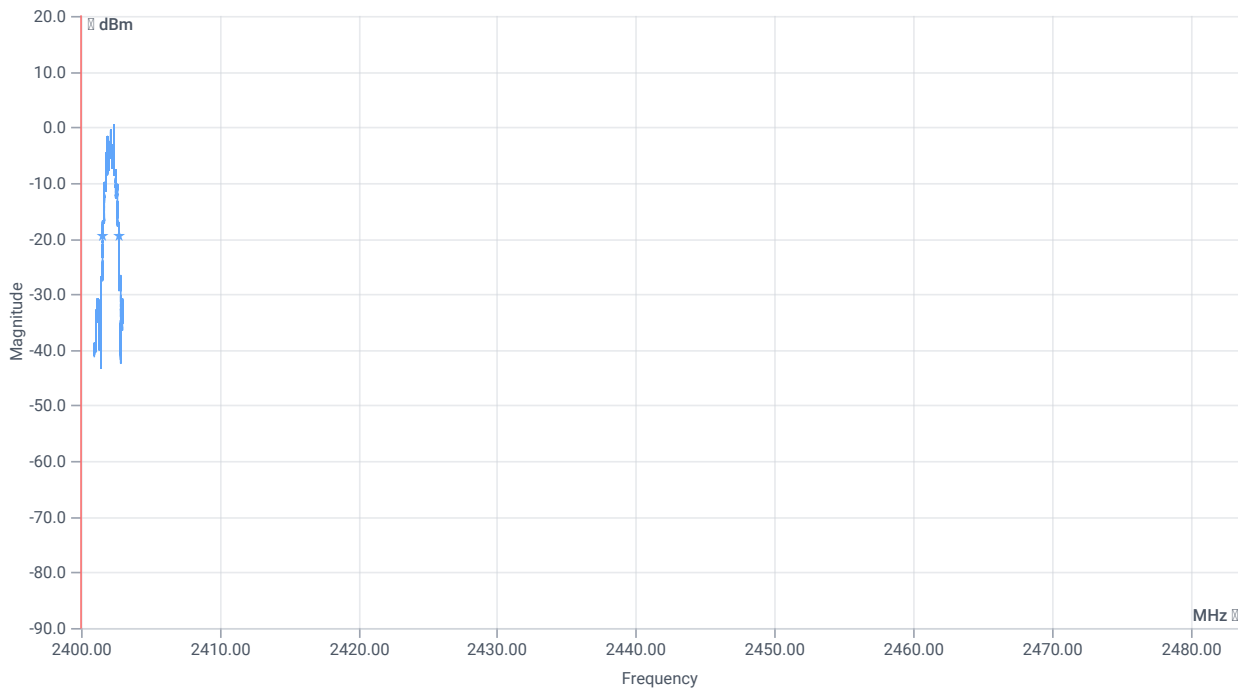

BW within band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	1155	kHz	INFO
T1 20dB	2400.000000	---	2401.5628	MHz	PASS
T2 20dB	---	2483.500000	2402.7176	MHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ BT LE 1 Msps

References

TC start	24.05.2024 12:52:44
Ambit temp [°C] humidity [rel%]	26.9 43
System version	5.0.5.0
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - BT LE 1 Msps
Information	

EUT Common Settings BT Low Energy

Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
1 Mbps supported	True TXpayload 255 RXpayload 255
2 Mbps supported	True TXpayload 255 RXpayload 255
Longrange S8 supported	True TXpayload 255 RXpayload 255
Longrange S2 supported	True TXpayload 255 RXpayload 255
Signaling Settings	None HCI 7 115200 None S1 None On
Signaling RF Settings	RF1com 0 0 On
User Interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	BT LE 1 Msps
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1

Test Parameter

Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2440 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	4.67	dBm	INFO
Ref. frequency	---	---	2440.400	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	9.67 9.3 20
Start [MHz] Stop [MHz]	2439.000 2441.000
RBW [MHz] VBW [MHz]	0.020000 0.100000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

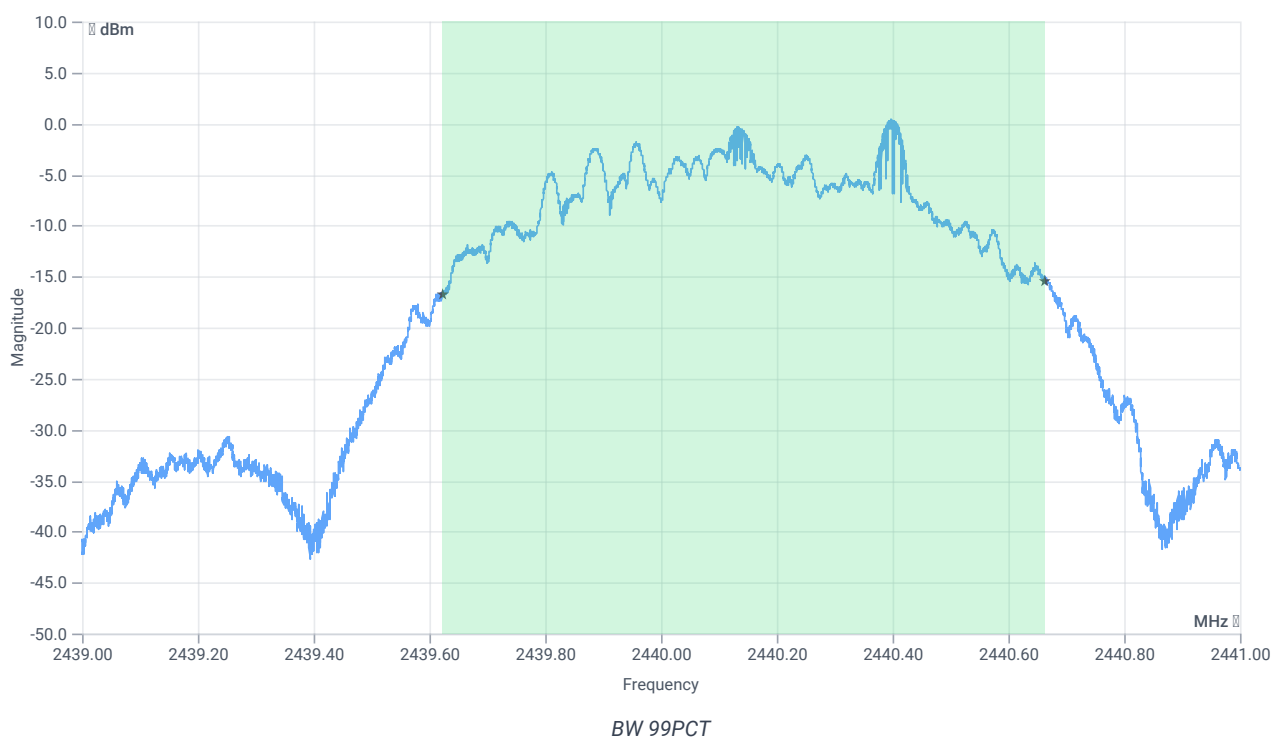


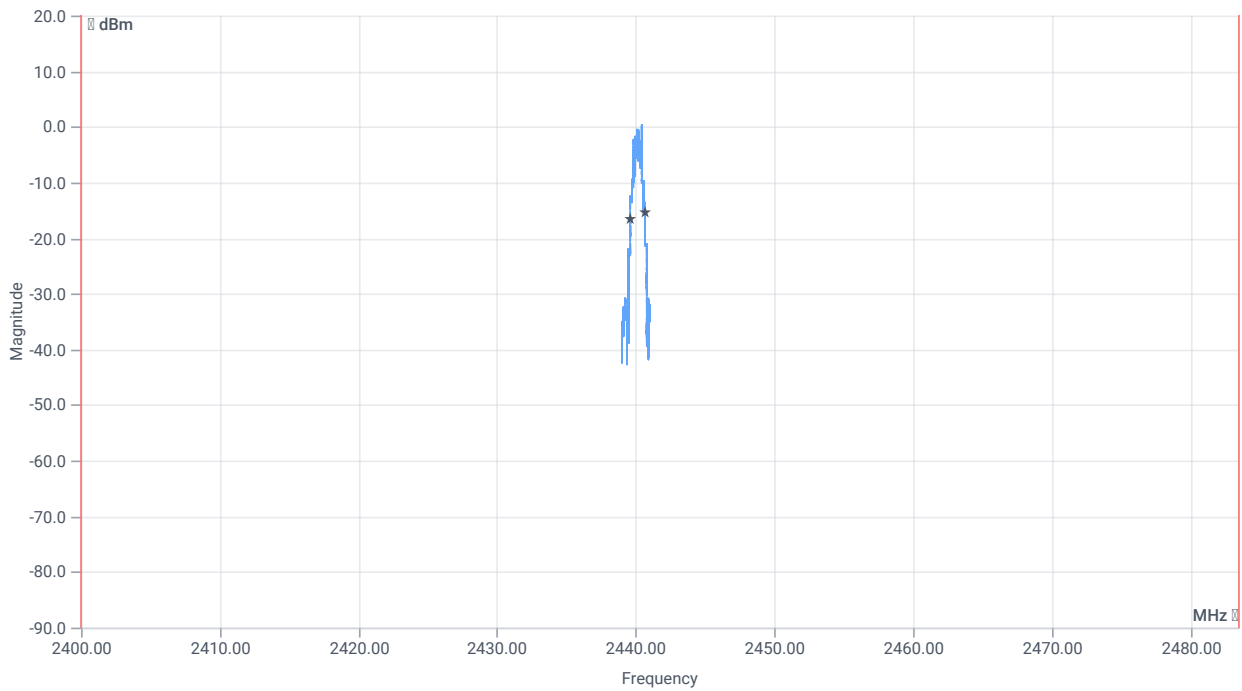


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	1042.000	kHz	INFO
T1 99%	2400.000000	---	2439.6222	MHz	PASS
T2 99%	---	2483.500000	2440.6641	MHz	PASS

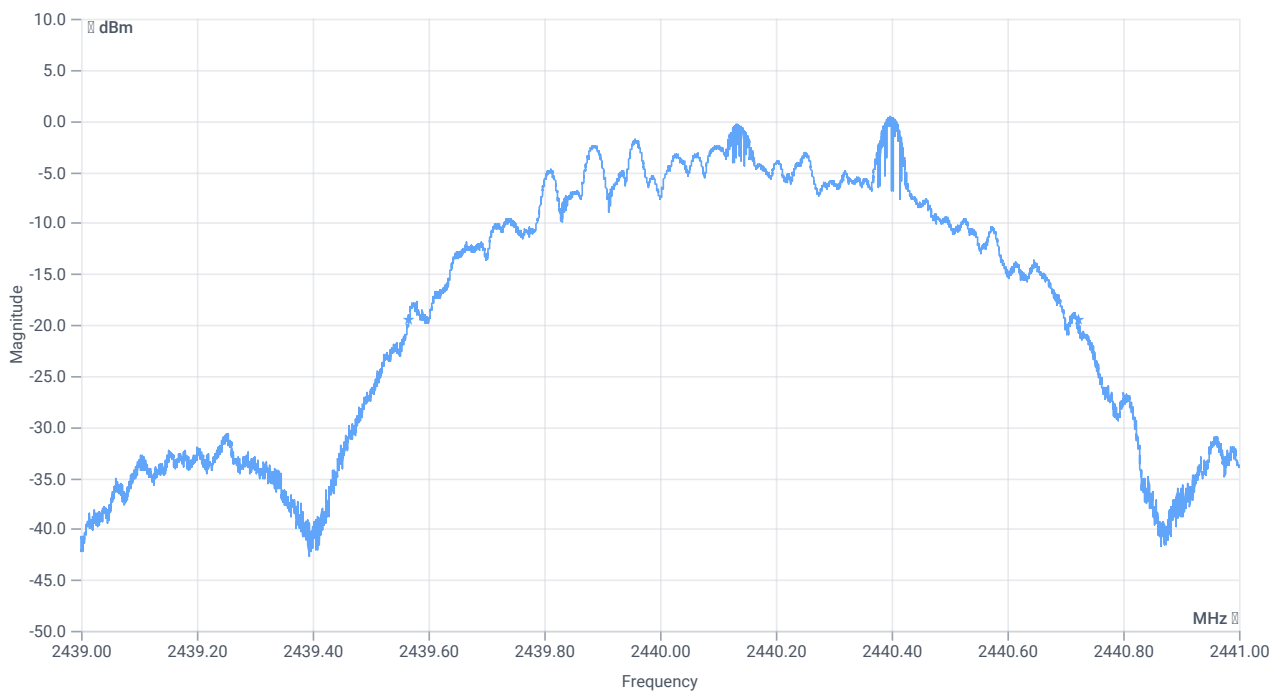

BW 20dB

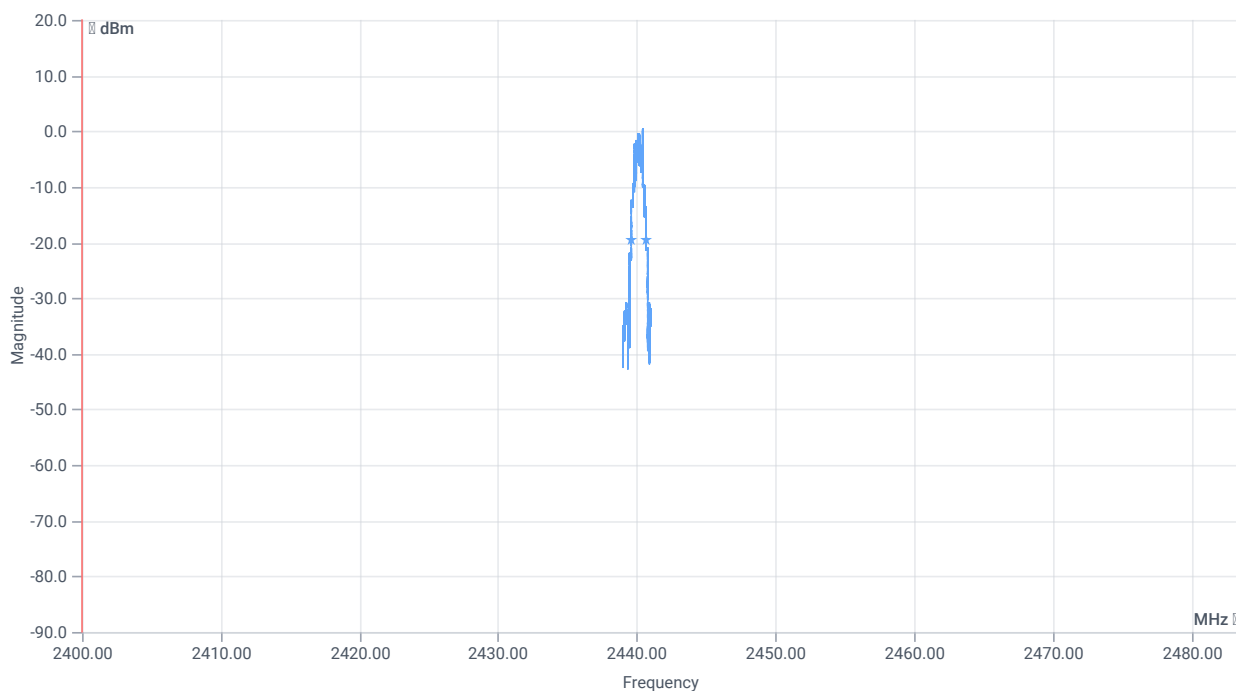

BW within band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	1158	kHz	INFO
T1 20dB	2400.000000	---	2439.5648	MHz	PASS
T2 20dB	---	2483.500000	2440.7232	MHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ BT LE 1 Msps

References

TC start	24.05.2024 13:11:15
Ambit temp [°C] humidity [rel%]	25.8 38
System version	5.0.5.0
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - BT LE 1 Msps
Information	

EUT Common Settings BT Low Energy

Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
1 Mbps supported	True TXpayload 255 RXpayload 255
2 Mbps supported	True TXpayload 255 RXpayload 255
Longrange S8 supported	True TXpayload 255 RXpayload 255
Longrange S2 supported	True TXpayload 255 RXpayload 255
Signaling Settings	None HCI 7 115200 None S1 None On
Signaling RF Settings	RF1com 0 0 On
User Interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	BT LE 1 Msps
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2480
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1

Test Parameter

Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2480 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	3.40	dBm	INFO
Ref. frequency	---	---	2480.400	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	8.40 9.4 15
Start [MHz] Stop [MHz]	2479.000 2481.000
RBW [MHz] VBW [MHz]	0.020000 0.100000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

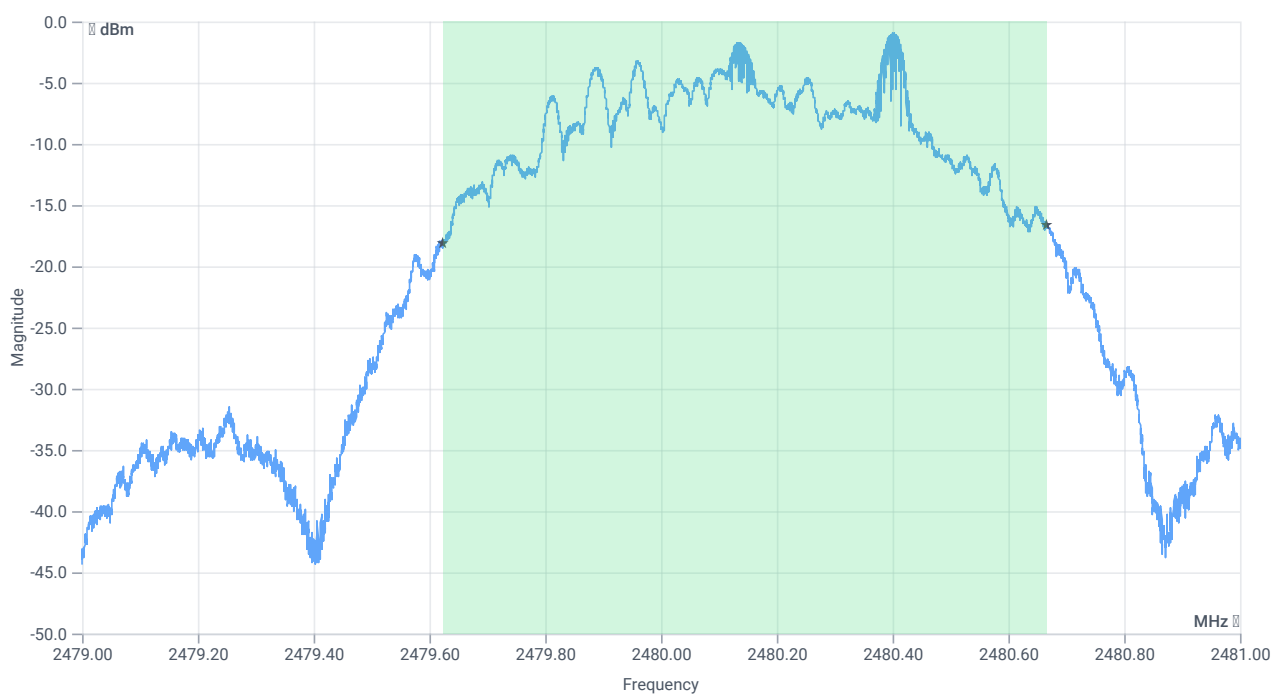


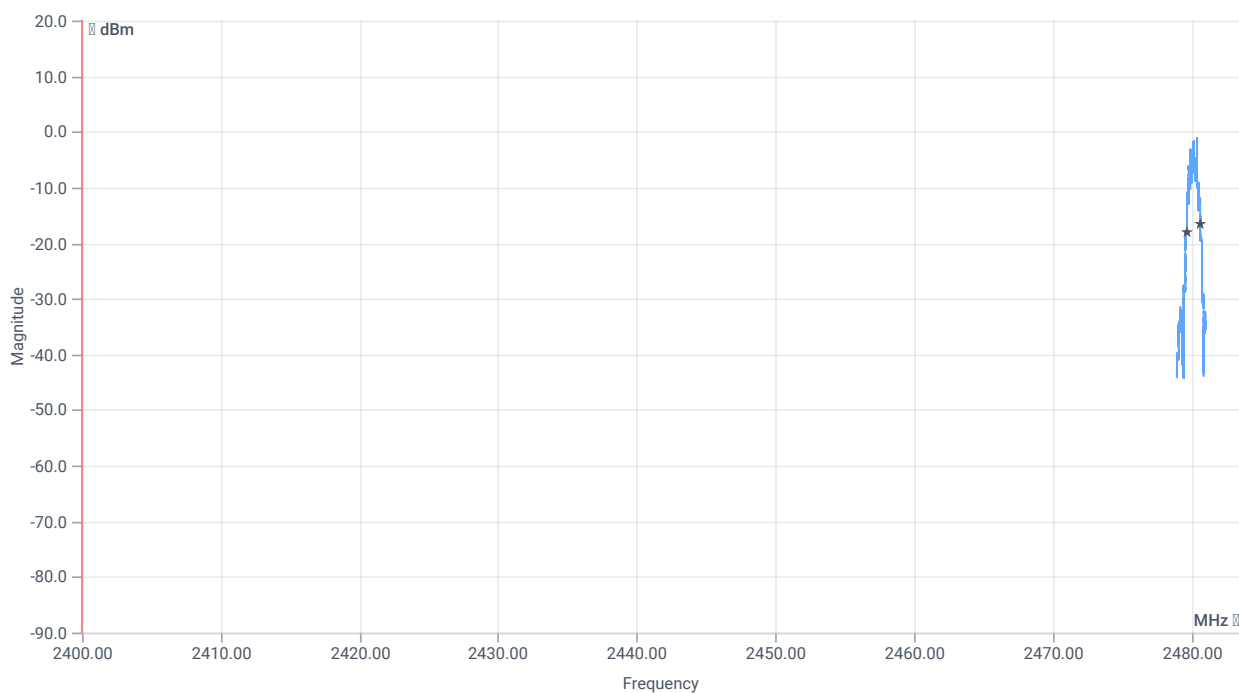


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	1043.000	kHz	INFO
T1 99%	2400.000000	---	2479.6238	MHz	PASS
T2 99%	---	2483.500000	2480.6665	MHz	PASS

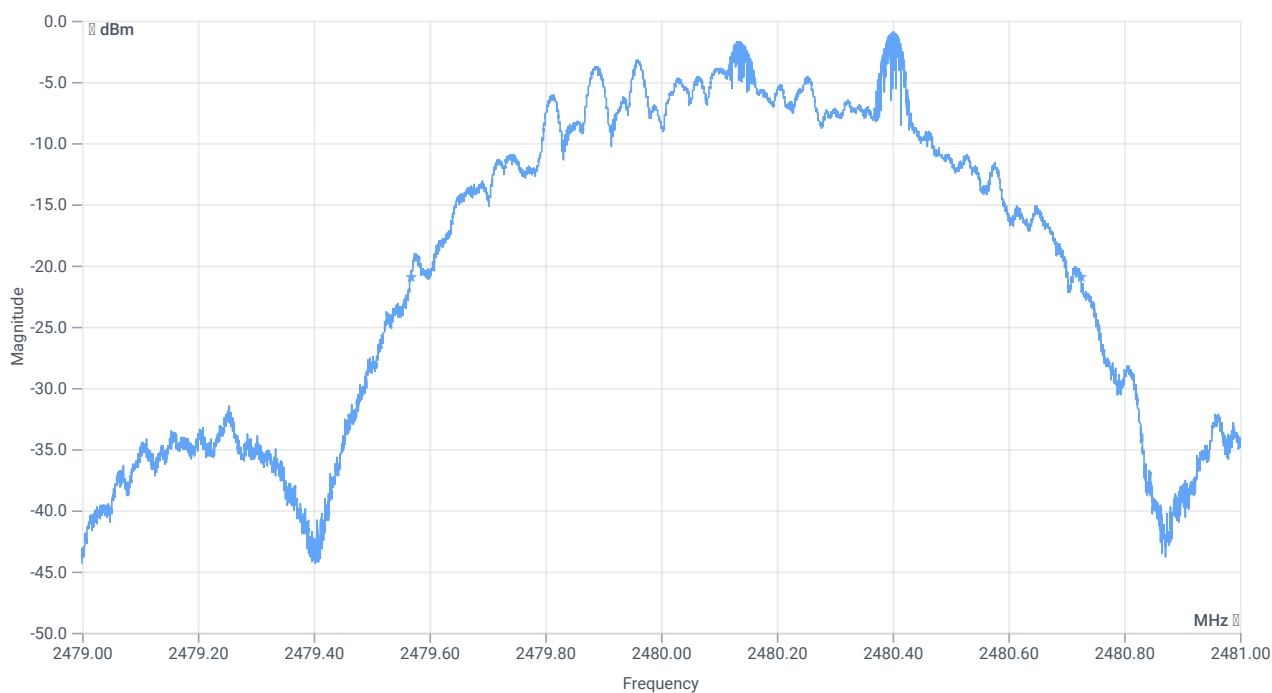

BW 20dB

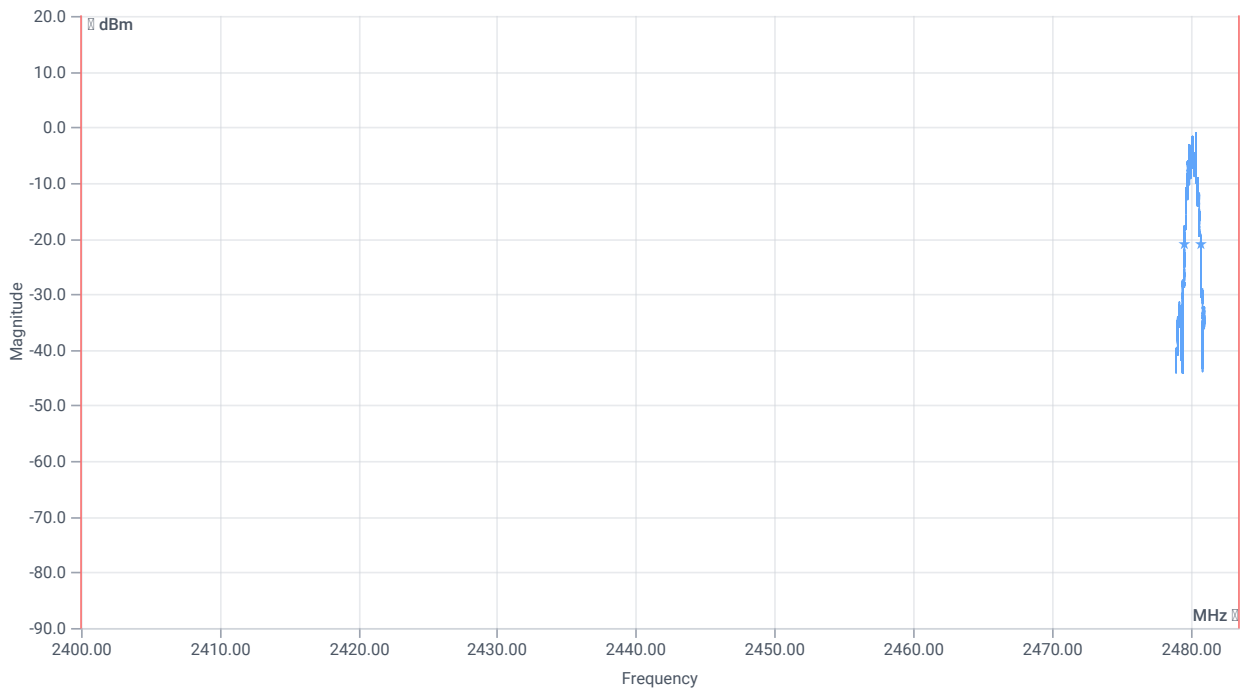

BW within band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	1159	kHz	INFO
T1 20dB	2400.000000	---	2479.5674	MHz	PASS
T2 20dB	---	2483.500000	2480.7260	MHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ BT LE 2 Msps

References

TC start	24.05.2024 13:29:37
Ambit temp [°C] humidity [rel%]	25.9 47
System version	5.0.5.0
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - BT LE 2 Msps
Information	

EUT Common Settings BT Low Energy

Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
1 Mbps supported	True TXpayload 255 RXpayload 255
2 Mbps supported	True TXpayload 255 RXpayload 255
Longrange S8 supported	True TXpayload 255 RXpayload 255
Longrange S2 supported	True TXpayload 255 RXpayload 255
Signaling Settings	None HCI 7 115200 None S1 None On
Signaling RF Settings	RF1com 0 0 On
User Interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	BT LE 2 Msps
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2404
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2478
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1

Test Parameter

Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2404 MHz

RESULT: Reference power cond.


DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	4.82	dBm	INFO
Ref. frequency	---	---	2404.600	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	9.82 9.26 20
Start [MHz] Stop [MHz]	2401.700 2406.300
RBW [MHz] VBW [MHz]	0.050000 0.200000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

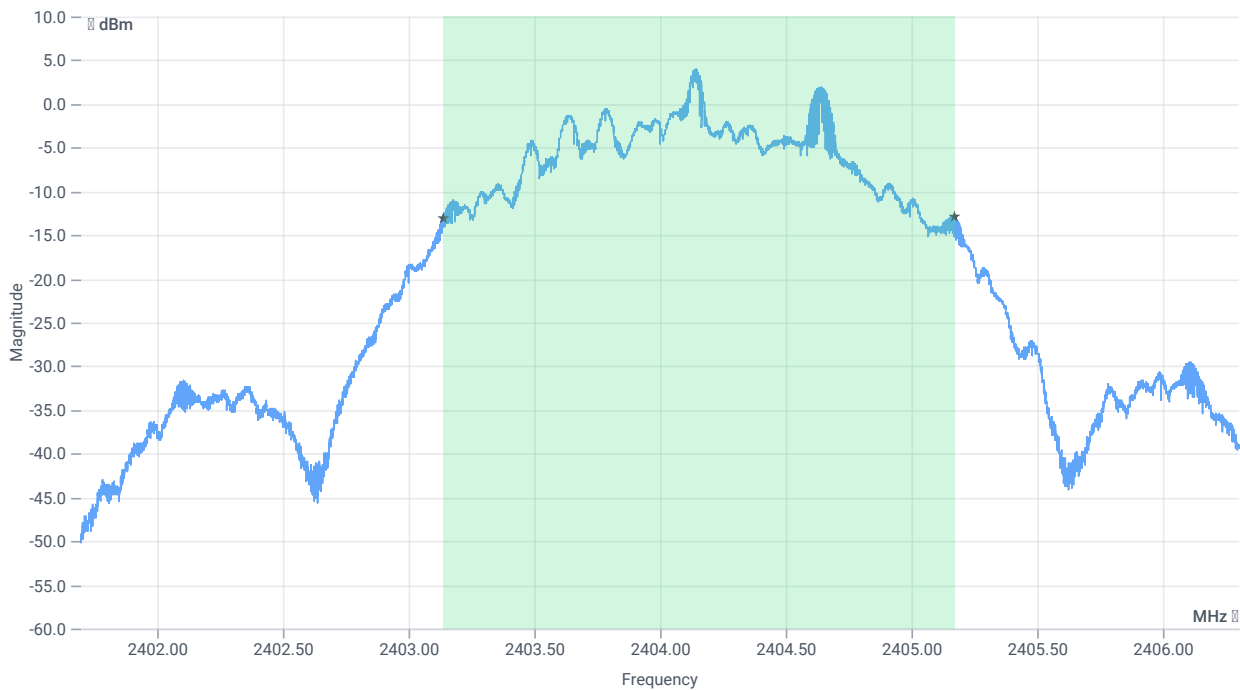


BW 99PCT

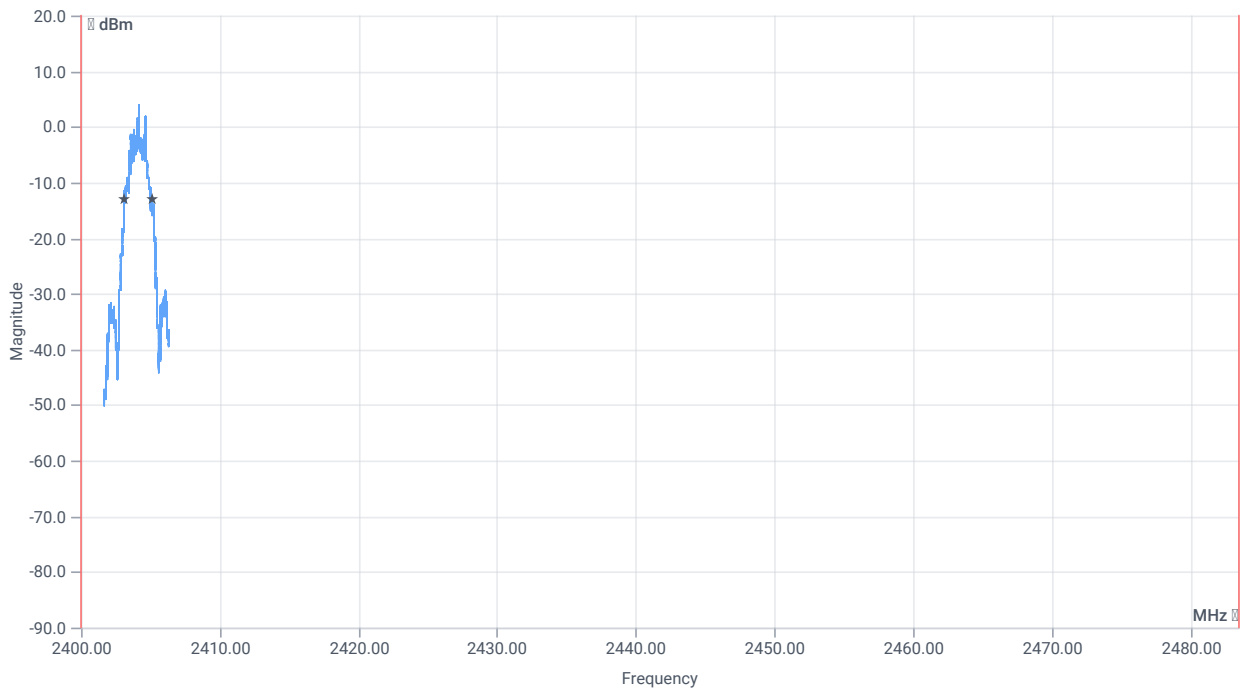


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	2032.000	kHz	INFO
T1 99%	2400.000000	---	2403.1362	MHz	PASS
T2 99%	---	2483.500000	2405.1683	MHz	PASS

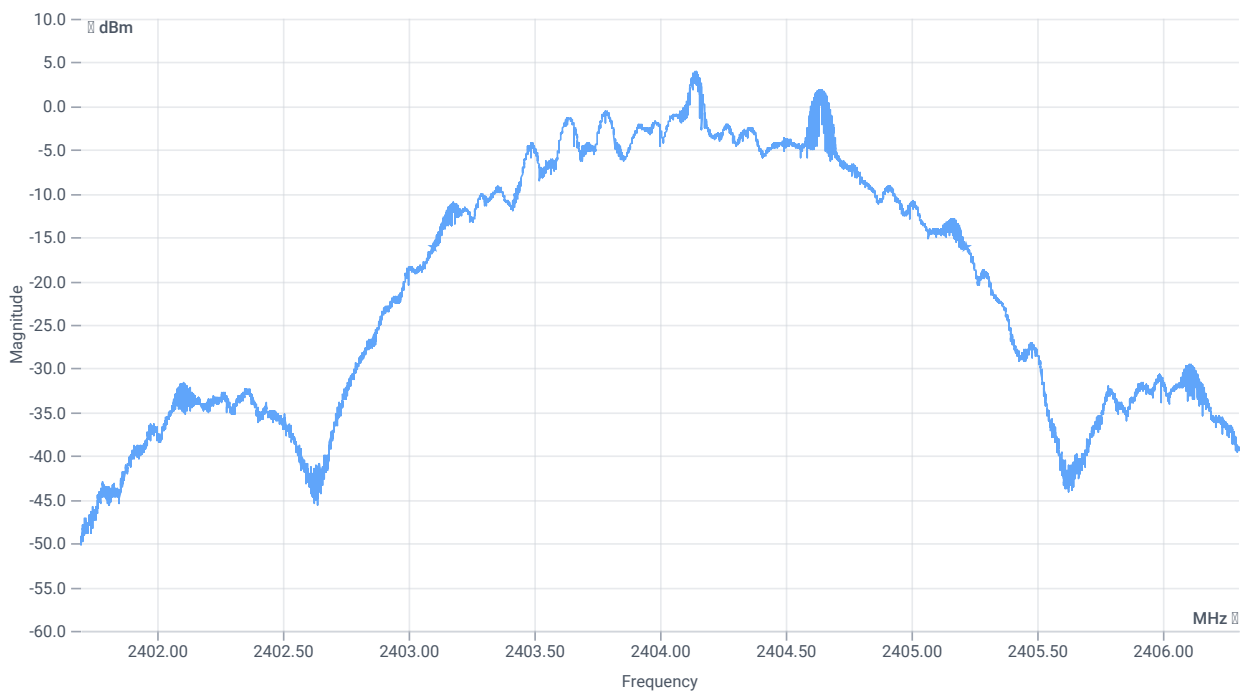

BW 20dB

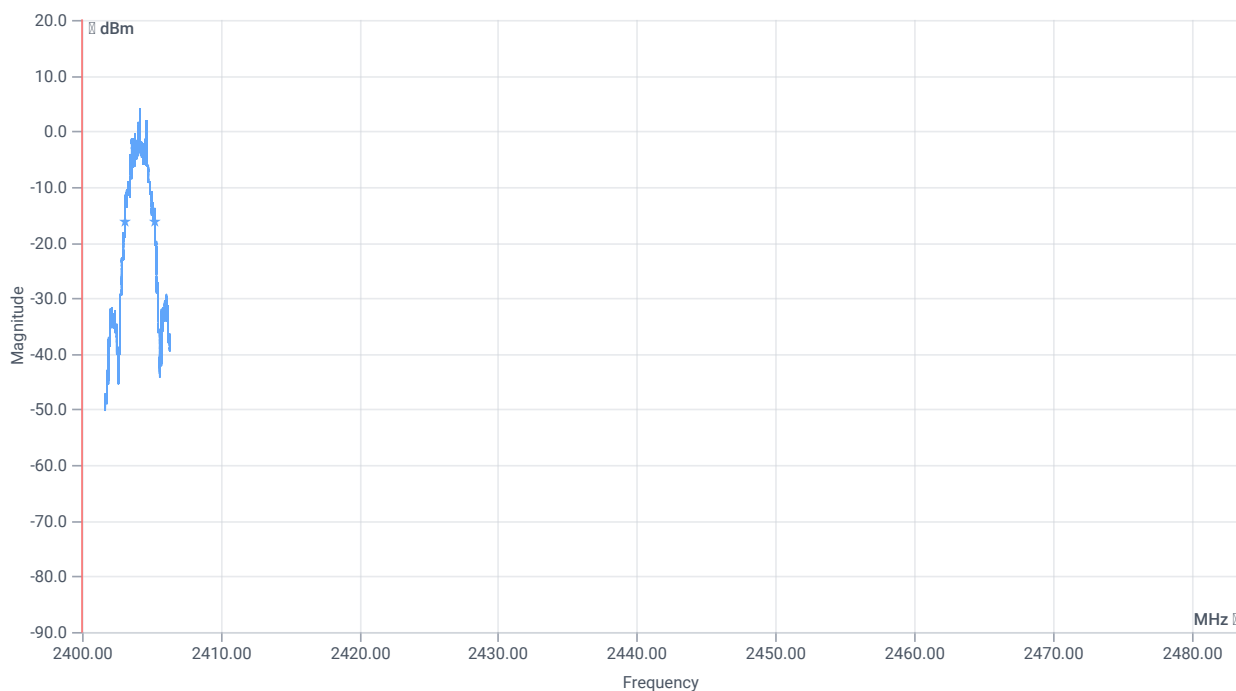

BW within band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	2119	kHz	INFO
T1 20dB	2400.000000	---	2403.0984	MHz	PASS
T2 20dB	---	2483.500000	2405.2176	MHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ BT LE 2 Msps

References

TC start	24.05.2024 13:49:16
Ambit temp [°C] humidity [rel%]	26.7 44
System version	5.0.5.0
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - BT LE 2 Msps
Information	

EUT Common Settings BT Low Energy

Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
1 Mbps supported	True TXpayload 255 RXpayload 255
2 Mbps supported	True TXpayload 255 RXpayload 255
Longrange S8 supported	True TXpayload 255 RXpayload 255
Longrange S2 supported	True TXpayload 255 RXpayload 255
Signaling Settings	None HCI 7 115200 None S1 None On
Signaling RF Settings	RF1com 0 0 On
User Interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	BT LE 2 Msps
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2404
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2478
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1

Test Parameter

Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2440 MHz

RESULT: Reference power cond.


DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	4.74	dBm	INFO
Ref. frequency	---	---	2440.600	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	9.74 9.3 20
Start [MHz] Stop [MHz]	2437.700 2442.300
RBW [MHz] VBW [MHz]	0.050000 0.200000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

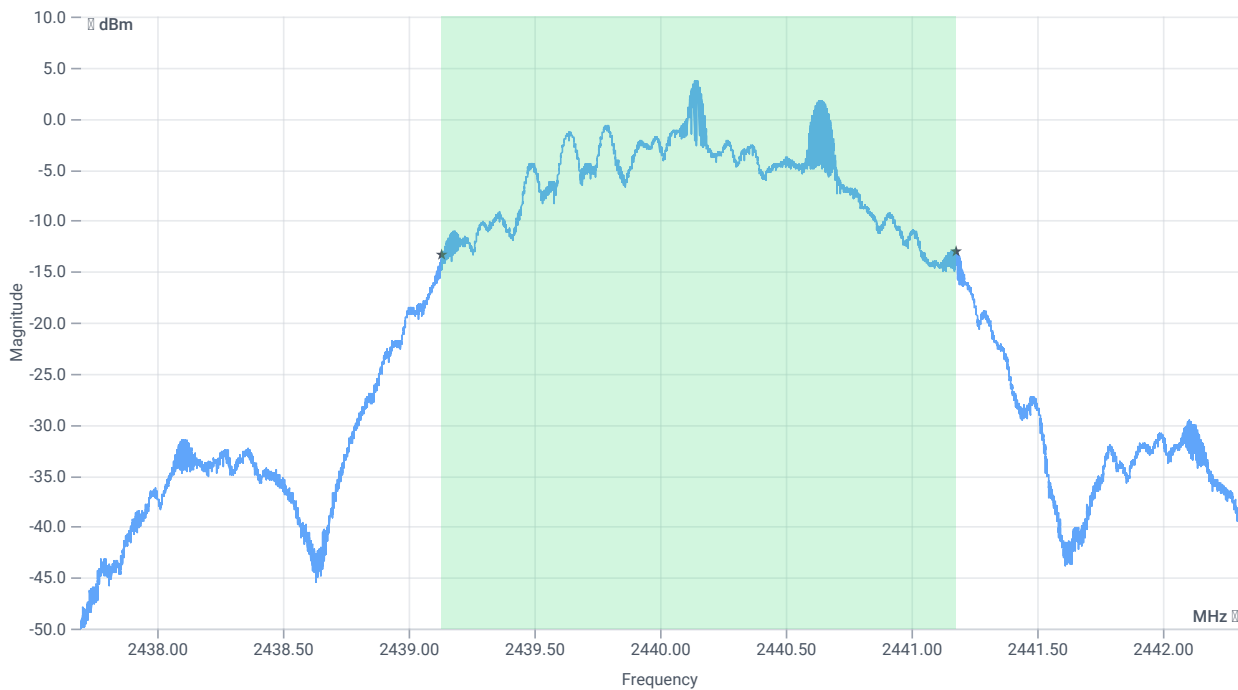


BW 99PCT

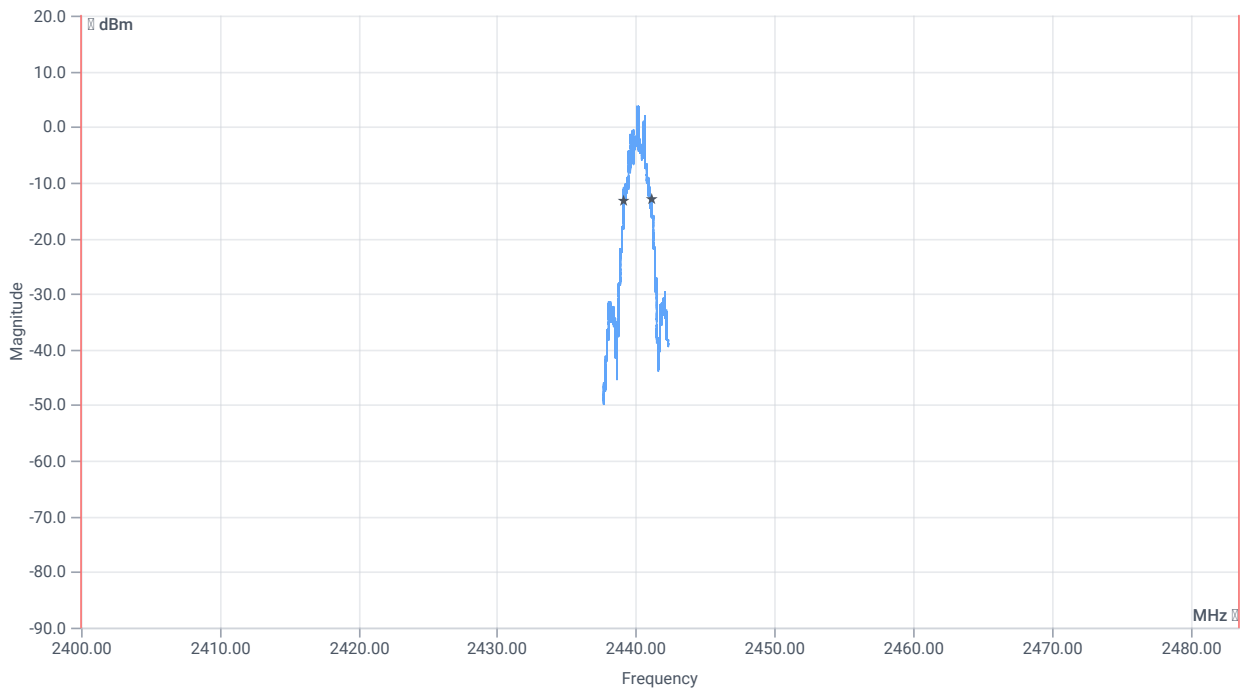


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	2038.000	kHz	INFO
T1 99%	2400.000000	---	2439.1353	MHz	PASS
T2 99%	---	2483.500000	2441.1733	MHz	PASS

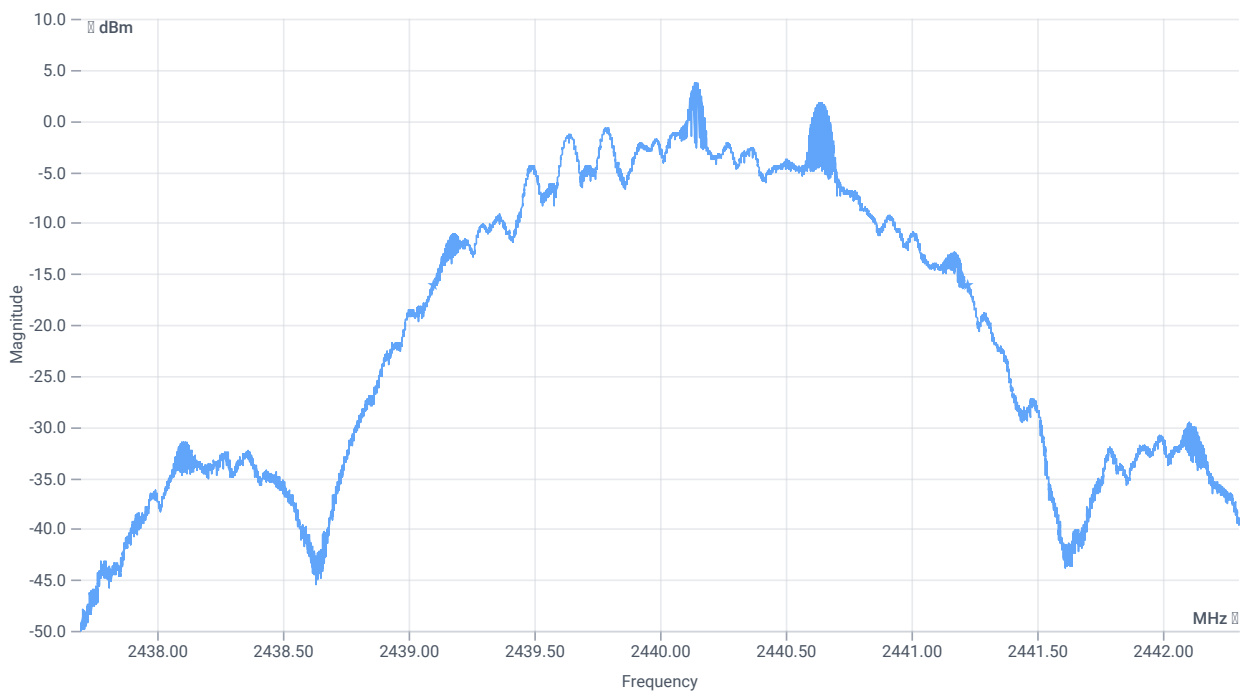

BW 20dB

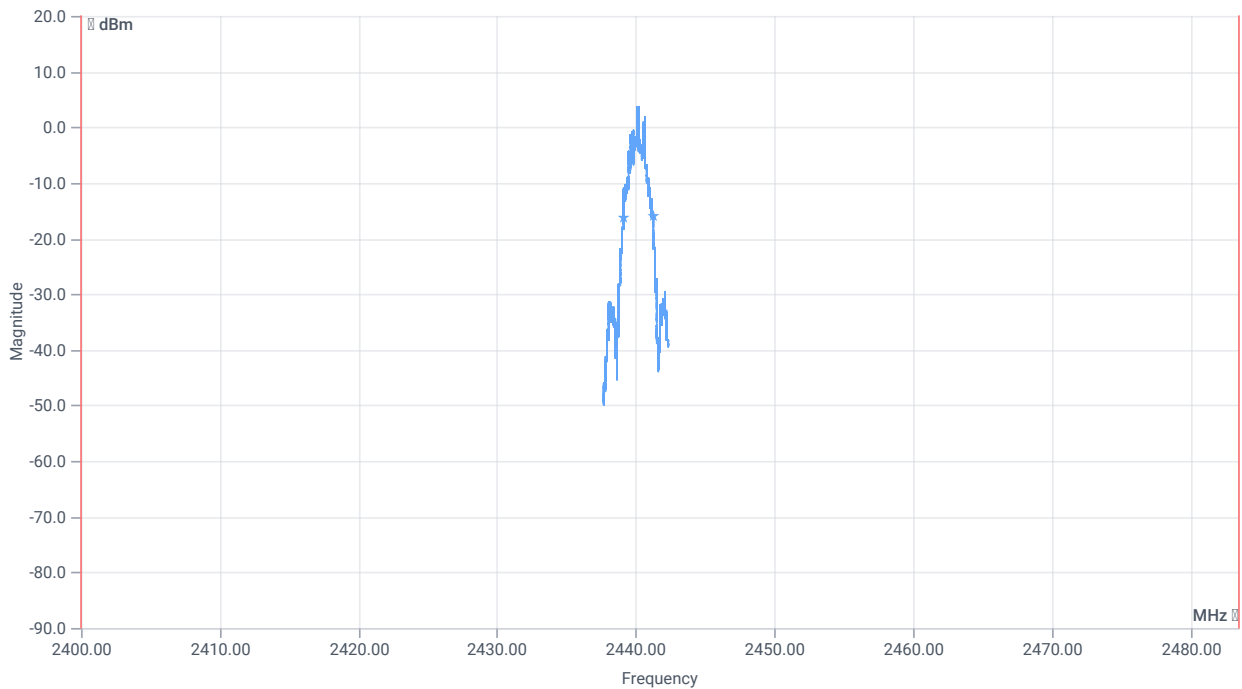

BW within band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	2120	kHz	INFO
T1 20dB	2400.000000	---	2439.1012	MHz	PASS
T2 20dB	---	2483.500000	2441.2208	MHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ BT LE 2 Msps

References

TC start	24.05.2024 14:05:28
Ambit temp [°C] humidity [rel%]	26.8 42
System version	5.0.5.0
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - BT LE 2 Msps
Information	

EUT Common Settings BT Low Energy

Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
1 Mbps supported	True TXpayload 255 RXpayload 255
2 Mbps supported	True TXpayload 255 RXpayload 255
Longrange S8 supported	True TXpayload 255 RXpayload 255
Longrange S2 supported	True TXpayload 255 RXpayload 255
Signaling Settings	None HCI 7 115200 None S1 None On
Signaling RF Settings	RF1com 0 0 On
User Interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	BT LE 2 Msps
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2404
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2478
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1

Test Parameter

Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2478 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	3.40	dBm	INFO
Ref. frequency	---	---	2478.600	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	8.40 9.39 15
Start [MHz] Stop [MHz]	2475.700 2480.300
RBW [MHz] VBW [MHz]	0.050000 0.200000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

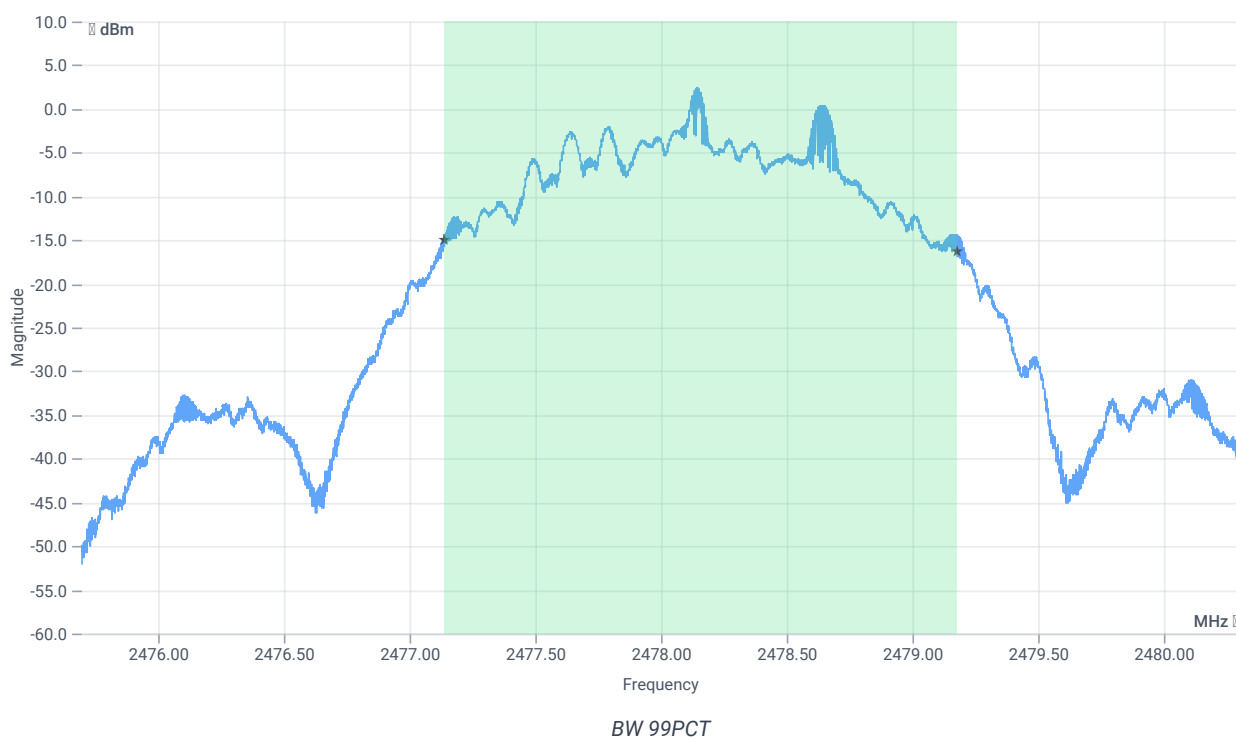


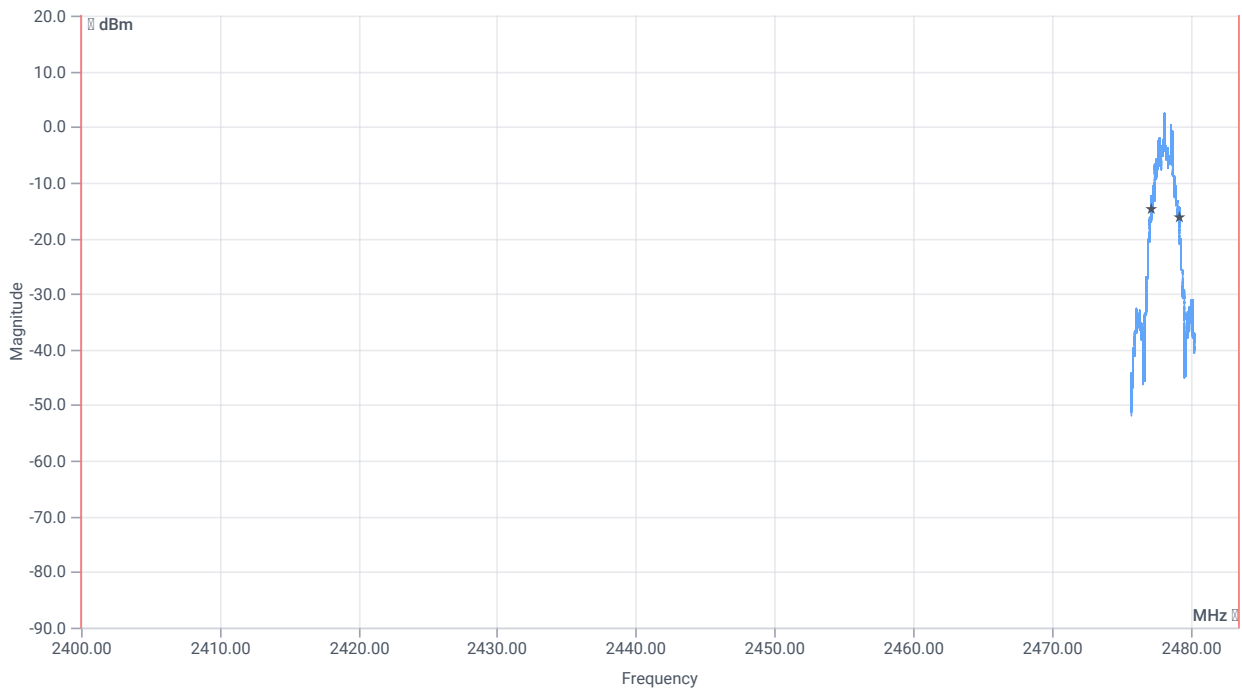


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	2038.000	kHz	INFO
T1 99%	2400.000000	---	2477.1362	MHz	PASS
T2 99%	---	2483.500000	2479.1743	MHz	PASS

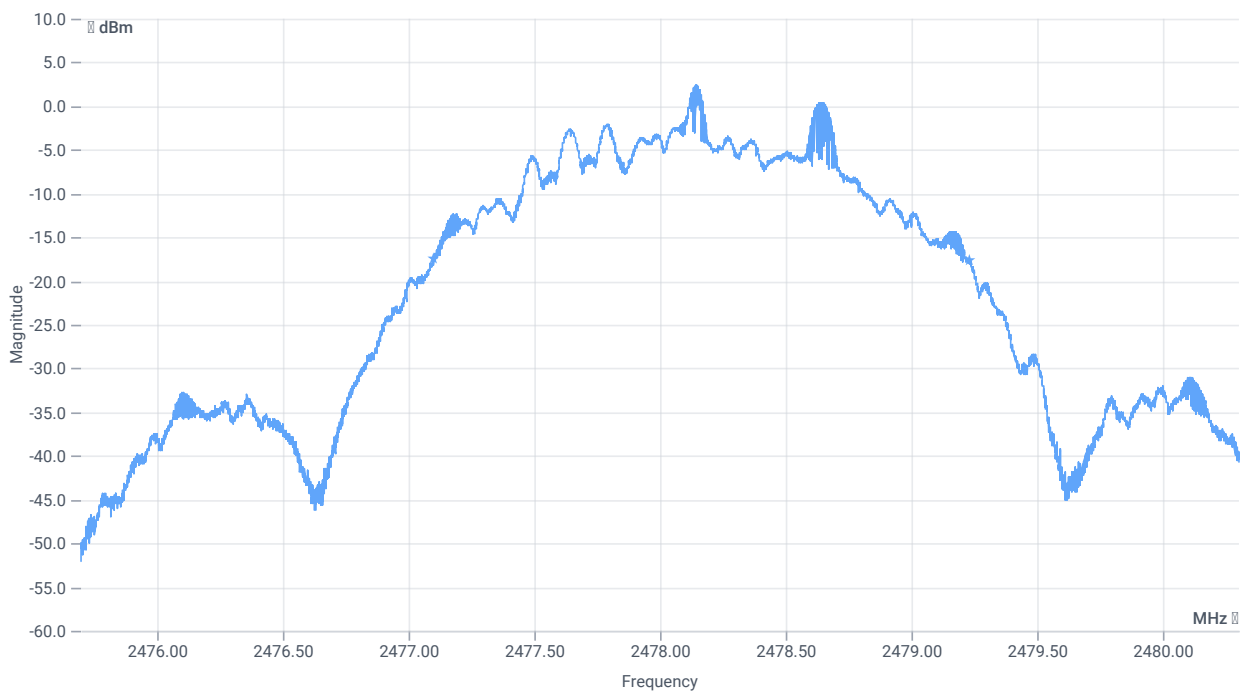

BW 20dB

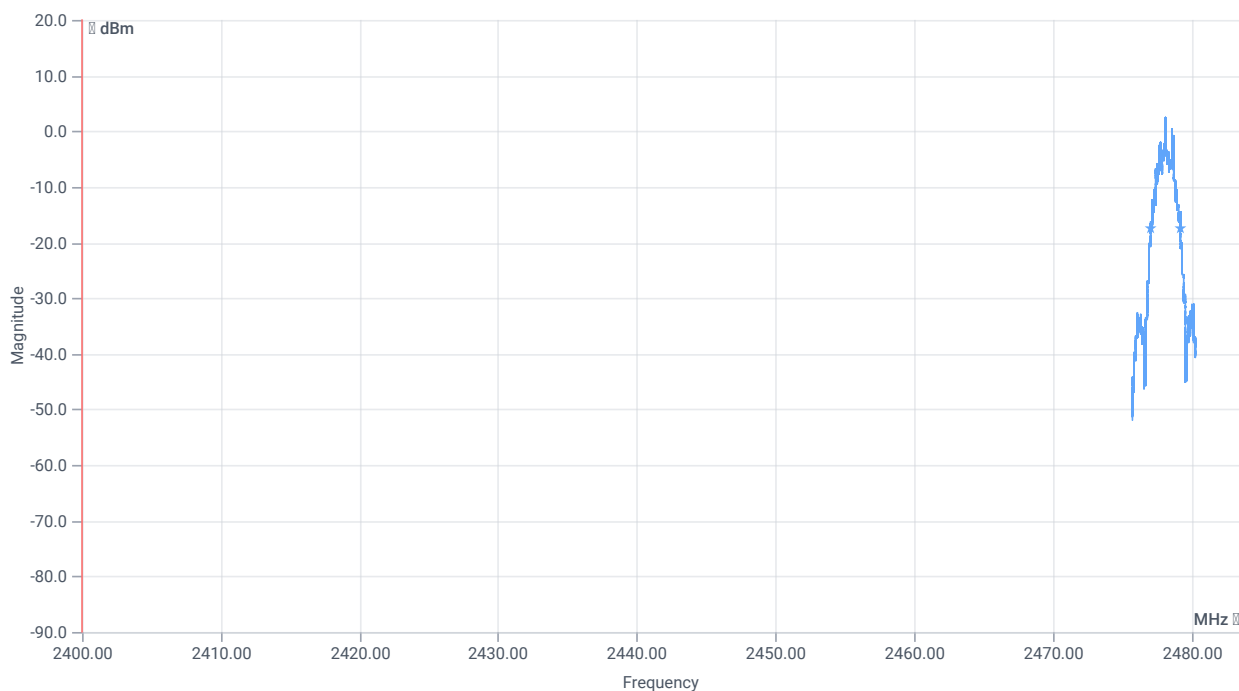

BW within band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	2129	kHz	INFO
T1 20dB	2400.000000	---	2477.1007	MHz	PASS
T2 20dB	---	2483.500000	2479.2296	MHz	PASS

Verdict

PASS

FCC 15.247 # Maximum peak conducted output power DTS ~ BT LE 1 Msps

References

TC start	24.05.2024 12:26:20
Ambit temp [°C] humidity [rel%]	26.9 41
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.1 RBW ≥ DTS Bandwidth
Description	FCC 15.247 Maximum Peak Output Power Conducted DTS - BT LE 1 Msps
Information	

EUT Common Settings BT Low Energy

Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
1 Mbps supported	True TXpayload 255 RXpayload 255
2 Mbps supported	True TXpayload 255 RXpayload 255
Longrange S8 supported	True TXpayload 255 RXpayload 255
Longrange S2 supported	True TXpayload 255 RXpayload 255
Signaling Settings	None HCI 7 115200 None S1 None On
Signaling RF Settings	RF1com 0 0 On
User Interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	BT LE 1 Msps
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto control enabled power supply Climatic Box	No No

Test Parameter

Additional path loss [dB]	1
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 2402 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	4.73	dBm	INFO
Ref. frequency	---	---	2402.400	MHz	INFO

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	9.73 9.26 20
Start [MHz] Stop [MHz]	2401.000 2403.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

DTS bandwidth

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS bandwidth (6dB)	---	---	707	kHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.73 9.26 25
Start [MHz] Stop [MHz]	2401.000 2403.000
RBW [MHz] VBW [MHz]	1.000000 5.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 1001 SWE

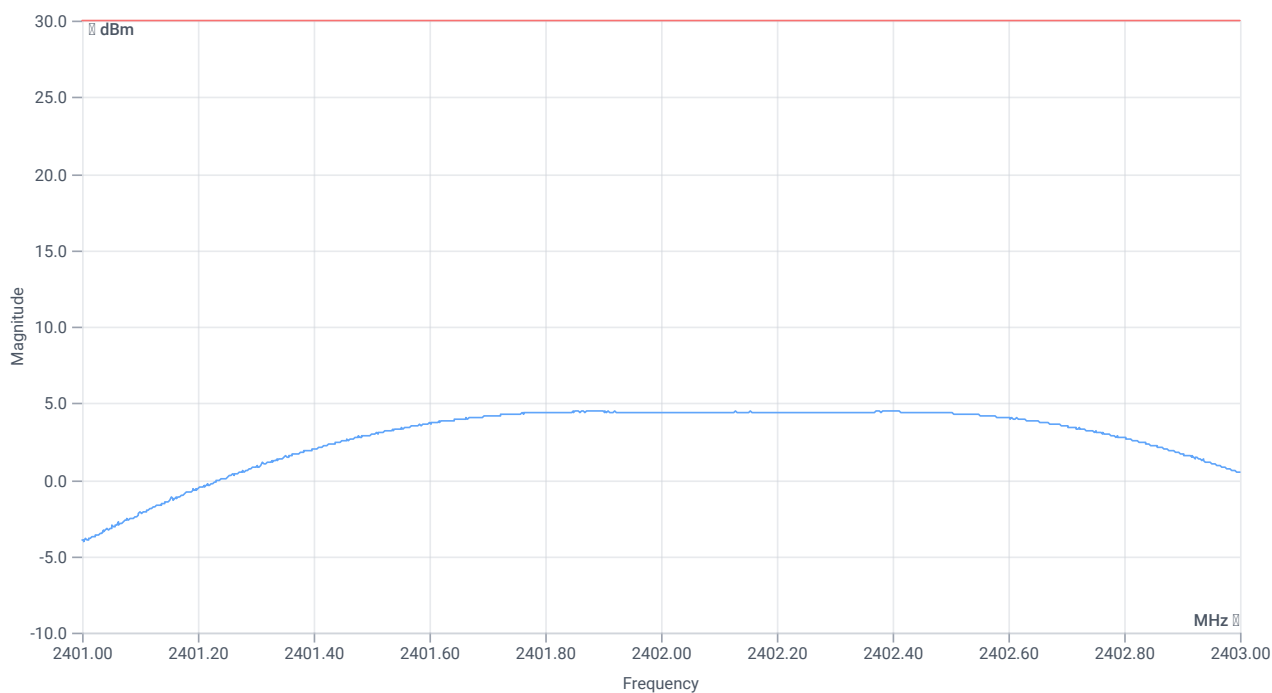

Peak output power

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	---	30.00	4.45	dBm	PASS
Peak power	---	1000	2.786121	mW	PASS
Frequency at peak	---	---	2401.88	MHz	INFO

Verdict

PASS

FCC 15.247 # Maximum peak conducted output power DTS ~ BT LE 1 Msps

References

TC start	24.05.2024 12:50:45
Ambit temp [°C] humidity [rel%]	26.7 43
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.1 RBW ≥ DTS Bandwidth
Description	FCC 15.247 Maximum Peak Output Power Conducted DTS - BT LE 1 Msps
Information	

EUT Common Settings BT Low Energy

Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
1 Mbps supported	True TXpayload 255 RXpayload 255
2 Mbps supported	True TXpayload 255 RXpayload 255
Longrange S8 supported	True TXpayload 255 RXpayload 255
Longrange S2 supported	True TXpayload 255 RXpayload 255
Signaling Settings	None HCI 7 115200 None S1 None On
Signaling RF Settings	RF1com 0 0 On
User Interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	BT LE 1 Msps
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto control enabled power supply Climatic Box	No No

Test Parameter

Additional path loss [dB]	1
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 2440 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	4.67	dBm	INFO
Ref. frequency	---	---	2440.400	MHz	INFO

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	9.67 9.3 20
Start [MHz] Stop [MHz]	2439.000 2441.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

DTS bandwidth

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS bandwidth (6dB)	---	---	697	kHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.67 9.3 25
Start [MHz] Stop [MHz]	2439.000 2441.000
RBW [MHz] VBW [MHz]	1.000000 5.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 1001 SWE

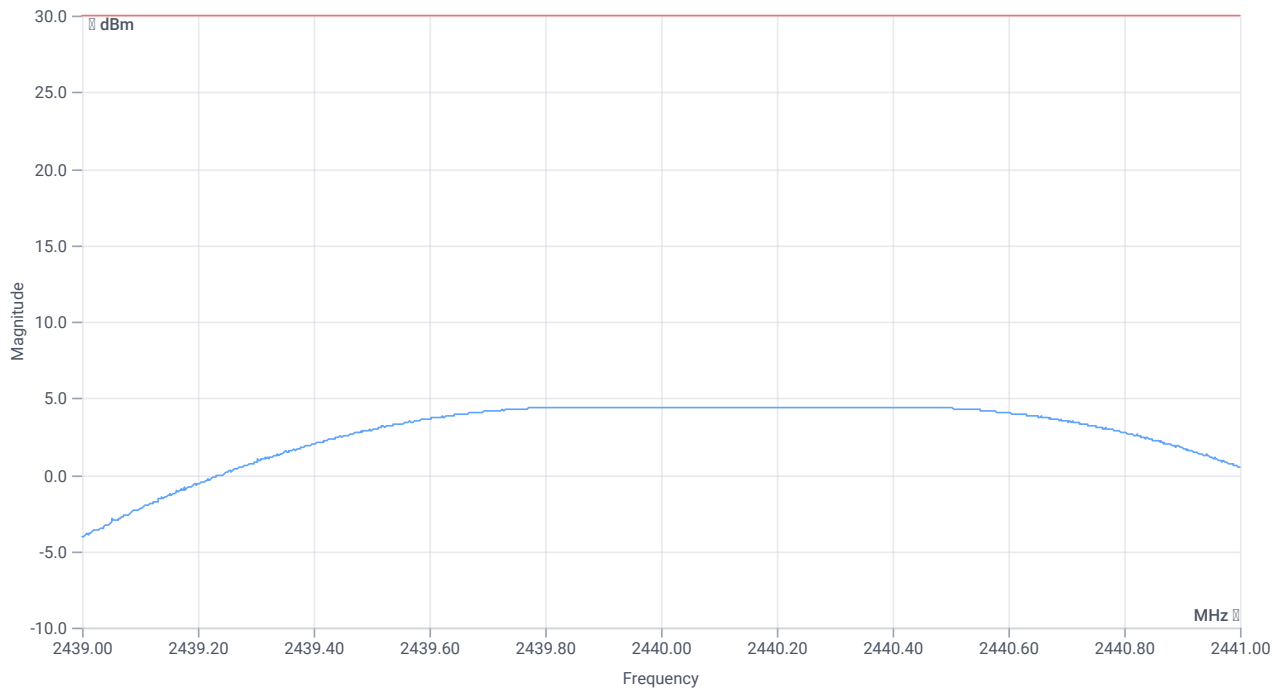

Peak output power

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	---	30.00	4.43	dBm	PASS
Peak power	---	1000	2.77332	mW	PASS
Frequency at peak	---	---	2439.88	MHz	INFO

Verdict

PASS

FCC 15.247 # Maximum peak conducted output power DTS ~ BT LE 1 Msps

References

TC start	24.05.2024 13:09:16
Ambit temp [°C] humidity [rel%]	25.9 38
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.1 RBW ≥ DTS Bandwidth
Description	FCC 15.247 Maximum Peak Output Power Conducted DTS - BT LE 1 Msps
Information	

EUT Common Settings BT Low Energy

Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
1 Mbps supported	True TXpayload 255 RXpayload 255
2 Mbps supported	True TXpayload 255 RXpayload 255
Longrange S8 supported	True TXpayload 255 RXpayload 255
Longrange S2 supported	True TXpayload 255 RXpayload 255
Signaling Settings	None HCI 7 115200 None S1 None On
Signaling RF Settings	RF1com 0 0 On
User Interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	BT LE 1 Msps
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2480
Auto control enabled power supply Climatic Box	No No

Test Parameter

Additional path loss [dB]	1
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MPSIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 2480 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	3.38	dBm	INFO
Ref. frequency	---	---	2480.400	MHz	INFO

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	8.38 9.4 15
Start [MHz] Stop [MHz]	2479.000 2481.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

DTS bandwidth

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS bandwidth (6dB)	---	---	701	kHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	13.38 9.4 20
Start [MHz] Stop [MHz]	2479.000 2481.000
RBW [MHz] VBW [MHz]	1.000000 5.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 1001 SWE

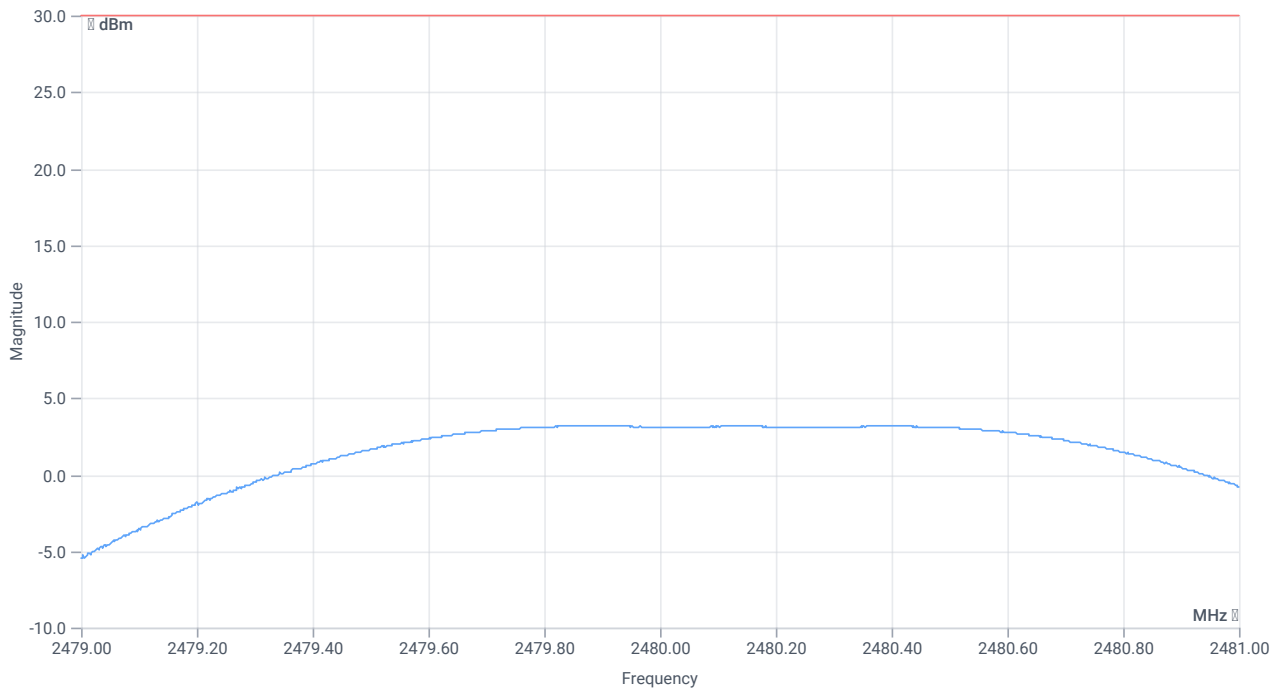

Peak output power

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	---	30.00	3.17	dBm	PASS
Peak power	---	1000	2.074914	mW	PASS
Frequency at peak	---	---	2479.886	MHz	INFO

Verdict

PASS

FCC 15.247 # Maximum peak conducted output power DTS ~ BT LE 2 Msps

References

TC start	24.05.2024 13:27:38
Ambit temp [°C] humidity [rel%]	25.8 46
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.1 RBW ≥ DTS Bandwidth
Description	FCC 15.247 Maximum Peak Output Power Conducted DTS - BT LE 2 Msps
Information	

EUT Common Settings BT Low Energy

Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
1 Mbps supported	True TXpayload 255 RXpayload 255
2 Mbps supported	True TXpayload 255 RXpayload 255
Longrange S8 supported	True TXpayload 255 RXpayload 255
Longrange S2 supported	True TXpayload 255 RXpayload 255
Signaling Settings	None HCI 7 115200 None S1 None On
Signaling RF Settings	RF1com 0 0 On
User Interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	BT LE 2 Msps
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2404
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2478
Auto control enabled power supply Climatic Box	No No

Test Parameter

Additional path loss [dB]	1
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 2404 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	4.83	dBm	INFO
Ref. frequency	---	---	2404.600	MHz	INFO

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	9.83 9.26 20
Start [MHz] Stop [MHz]	2401.700 2406.300
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

DTS bandwidth

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS bandwidth (6dB)	---	---	1138	kHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.83 9.26 25
Start [MHz] Stop [MHz]	2401.700 2406.300
RBW [MHz] VBW [MHz]	2.000000 5.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 1001 SWE

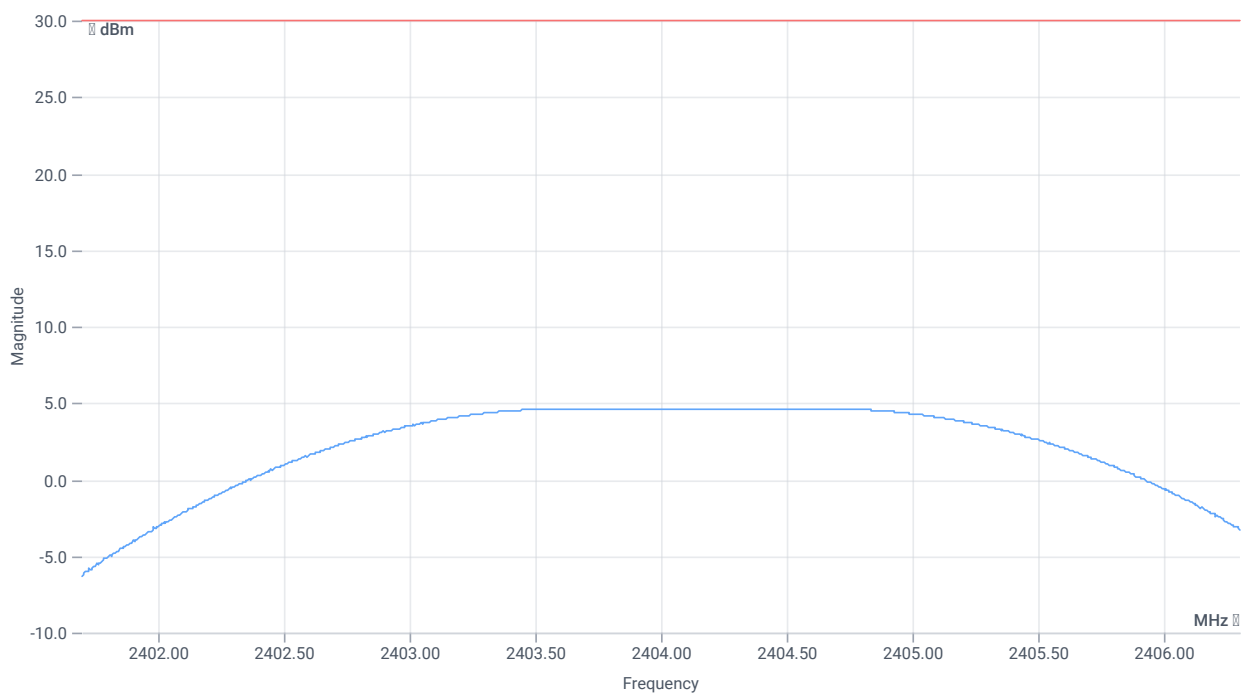

Peak output power

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	---	30.00	4.65	dBm	PASS
Peak power	---	1000	2.917427	mW	PASS
Frequency at peak	---	---	2403.669	MHz	INFO

Verdict

PASS

FCC 15.247 # Maximum peak conducted output power DTS ~ BT LE 2 Msps

References

TC start	24.05.2024 13:47:17
Ambit temp [°C] humidity [rel%]	26.6 44
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.1 RBW ≥ DTS Bandwidth
Description	FCC 15.247 Maximum Peak Output Power Conducted DTS - BT LE 2 Msps
Information	

EUT Common Settings BT Low Energy

Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
1 Mbps supported	True TXpayload 255 RXpayload 255
2 Mbps supported	True TXpayload 255 RXpayload 255
Longrange S8 supported	True TXpayload 255 RXpayload 255
Longrange S2 supported	True TXpayload 255 RXpayload 255
Signaling Settings	None HCI 7 115200 None S1 None On
Signaling RF Settings	RF1com 0 0 On
User Interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	BT LE 2 Msps
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2404
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2478
Auto control enabled power supply Climatic Box	No No

Test Parameter

Additional path loss [dB]	1
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 2440 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	4.69	dBm	INFO
Ref. frequency	---	---	2440.700	MHz	INFO

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	9.69 9.3 20
Start [MHz] Stop [MHz]	2437.700 2442.300
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

DTS bandwidth

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS bandwidth (6dB)	---	---	1154	kHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.69 9.3 25
Start [MHz] Stop [MHz]	2437.700 2442.300
RBW [MHz] VBW [MHz]	2.000000 5.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 1001 SWE

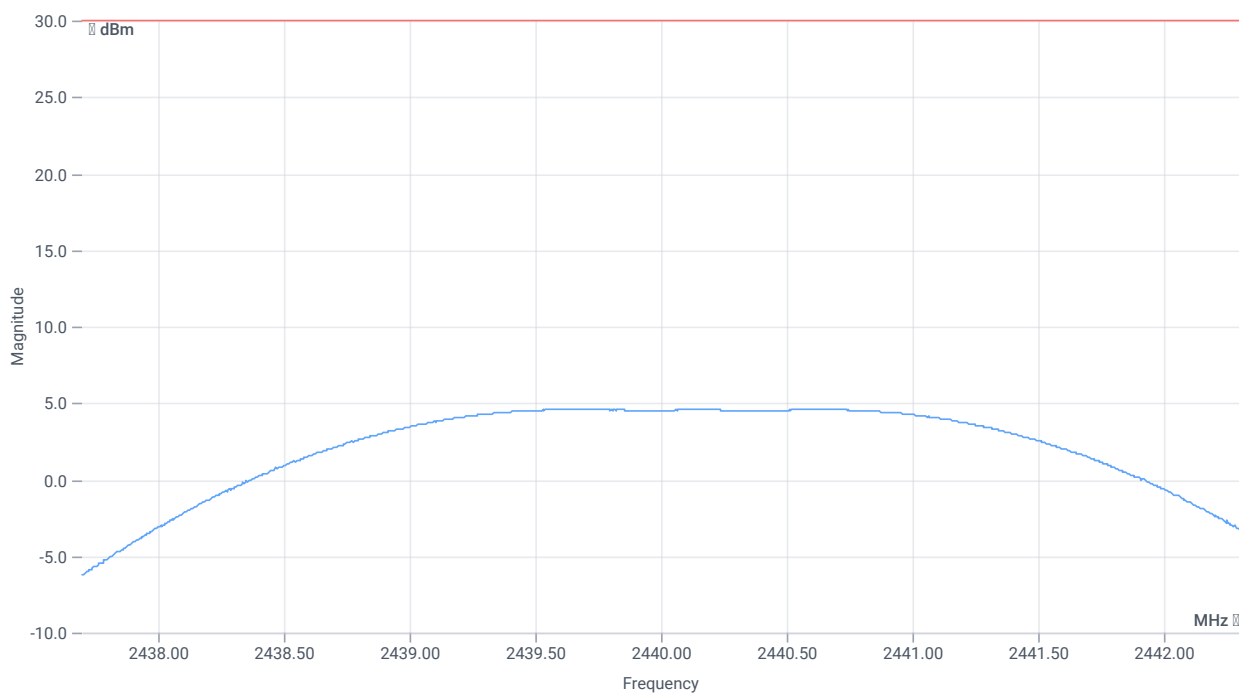

Peak output power

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	---	30.00	4.58	dBm	PASS
Peak power	---	1000	2.870781	mW	PASS
Frequency at peak	---	---	2439.674	MHz	INFO

Verdict

PASS

FCC 15.247 # Maximum peak conducted output power DTS ~ BT LE 2 Msps

References

TC start	24.05.2024 14:03:29
Ambit temp [°C] humidity [rel%]	26.8 43
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.1 RBW ≥ DTS Bandwidth
Description	FCC 15.247 Maximum Peak Output Power Conducted DTS - BT LE 2 Msps
Information	

EUT Common Settings BT Low Energy

Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
1 Mbps supported	True TXpayload 255 RXpayload 255
2 Mbps supported	True TXpayload 255 RXpayload 255
Longrange S8 supported	True TXpayload 255 RXpayload 255
Longrange S2 supported	True TXpayload 255 RXpayload 255
Signaling Settings	None HCI 7 115200 None S1 None On
Signaling RF Settings	RF1com 0 0 On
User Interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	BT LE 2 Msps
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2404
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2478
Auto control enabled power supply Climatic Box	No No

Test Parameter

Additional path loss [dB]	1
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 2478 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	3.42	dBm	INFO
Ref. frequency	---	---	2478.700	MHz	INFO

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	8.42 9.39 15
Start [MHz] Stop [MHz]	2475.700 2480.300
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

DTS bandwidth

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS bandwidth (6dB)	---	---	1147	kHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	13.42 9.39 20
Start [MHz] Stop [MHz]	2475.700 2480.300
RBW [MHz] VBW [MHz]	2.000000 5.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 1001 SWE

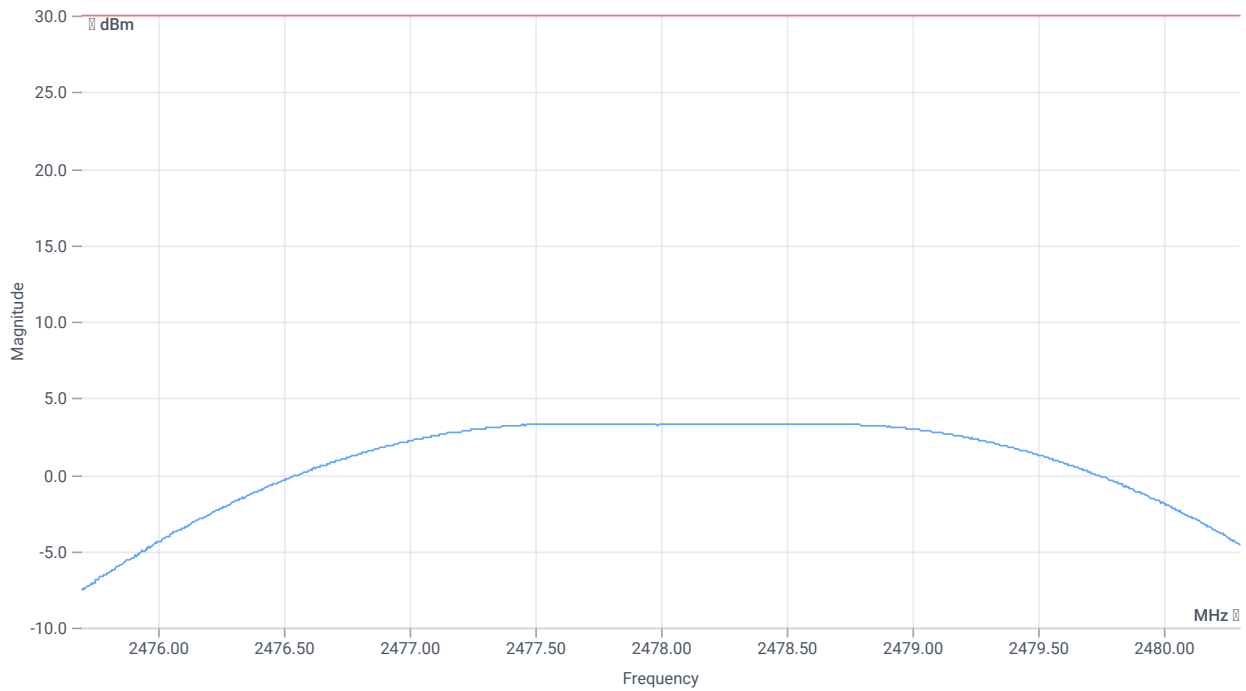

Peak output power

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	---	30.00	3.33	dBm	PASS
Peak power	---	1000	2.152782	mW	PASS
Frequency at peak	---	---	2477.664	MHz	INFO

Verdict

PASS

FCC 15.247 # TX spurious conducted 20dBc ~ BT LE 1 Msps

References

TC start	24.05.2024 12:28:59
Ambit temp [°C] humidity [rel%]	26.8 40
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable
Description	FCC 15.247 TX Emissions Conducted DTS - BT LE 1 Msps
Information	

EUT Common Settings BT Low Energy

Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
1 Mbps supported	True TXpayload 255 RXpayload 255
2 Mbps supported	True TXpayload 255 RXpayload 255
Longrange S8 supported	True TXpayload 255 RXpayload 255
Longrange S2 supported	True TXpayload 255 RXpayload 255
Signaling Settings	None HCI 7 115200 None S1 None On
Signaling RF Settings	RF1com 0 0 On
User Interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	BT LE 1 Msps
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1


Test Parameter

Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 2402 MHz

RESULT: Reference power cond.


DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	4.75	dBm	INFO
Ref. frequency	---	---	2402.400	MHz	INFO

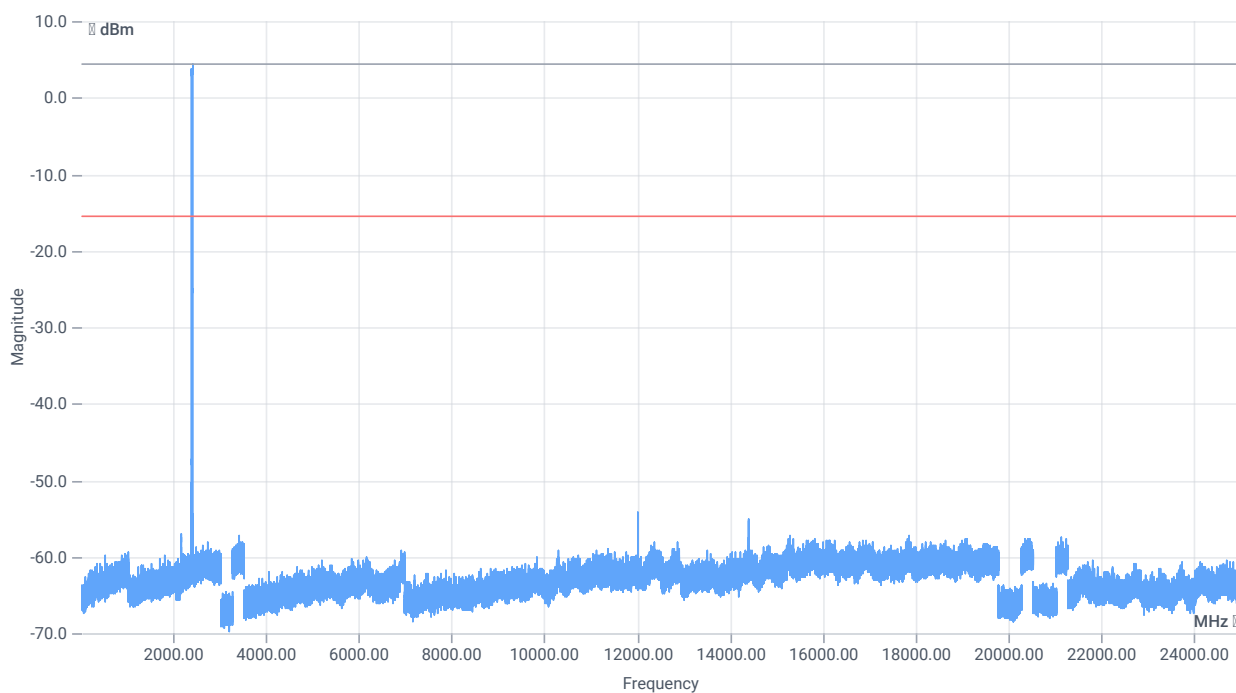

TX emissions

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	4.75 16.22 5
Start [MHz] Stop [MHz]	24780.000 25000.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	200 25 1501 SWE

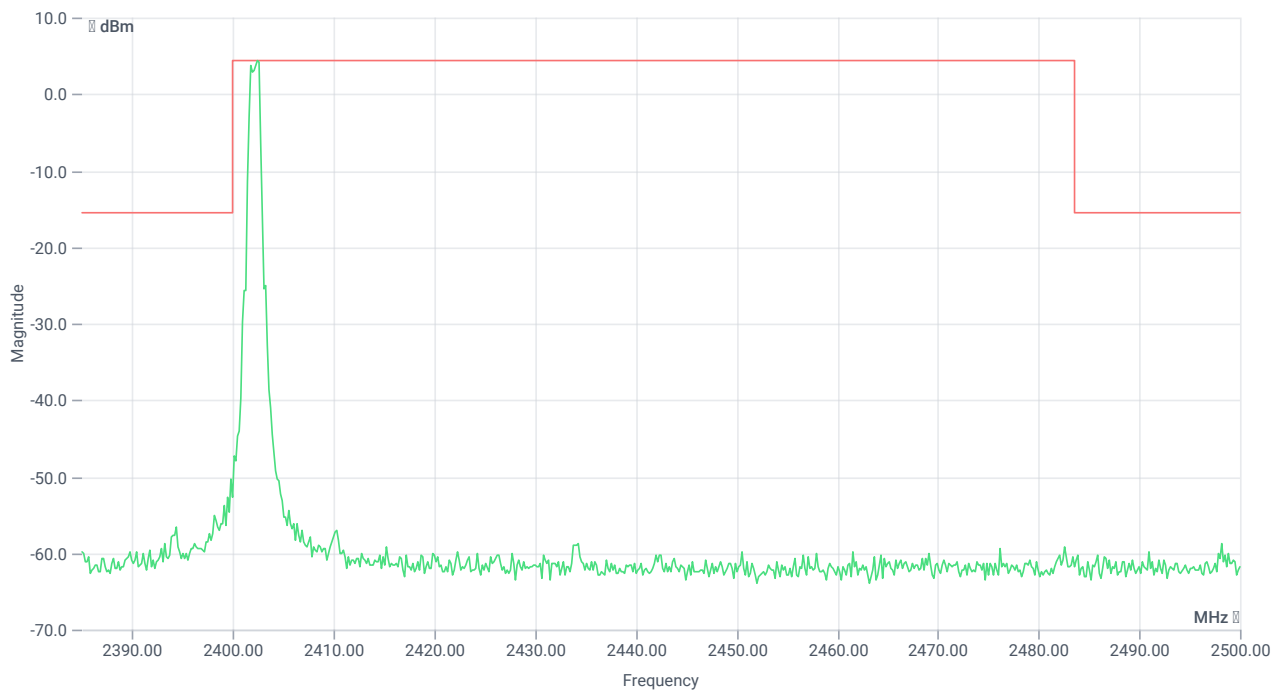

TX emissions band zoomed

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Reference @ 2402.33 MHz	---	---	4.43	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 2399.833 MHz	0	---	34.82	dB	INFO

Verdict

PASS

FCC 15.247 # TX spurious conducted 20dBc ~ BT LE 1 Msps

References

TC start	24.05.2024 12:53:22
Ambit temp [°C] humidity [rel%]	26.9 43
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable
Description	FCC 15.247 TX Emissions Conducted DTS - BT LE 1 Msps
Information	

EUT Common Settings BT Low Energy

Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
1 Mbps supported	True TXpayload 255 RXpayload 255
2 Mbps supported	True TXpayload 255 RXpayload 255
Longrange S8 supported	True TXpayload 255 RXpayload 255
Longrange S2 supported	True TXpayload 255 RXpayload 255
Signaling Settings	None HCI 7 115200 None S1 None On
Signaling RF Settings	RF1com 0 0 On
User Interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	BT LE 1 Msps
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1


Test Parameter

Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 2440 MHz

RESULT: Reference power cond.


DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	4.68	dBm	INFO
Ref. frequency	---	---	2440.400	MHz	INFO

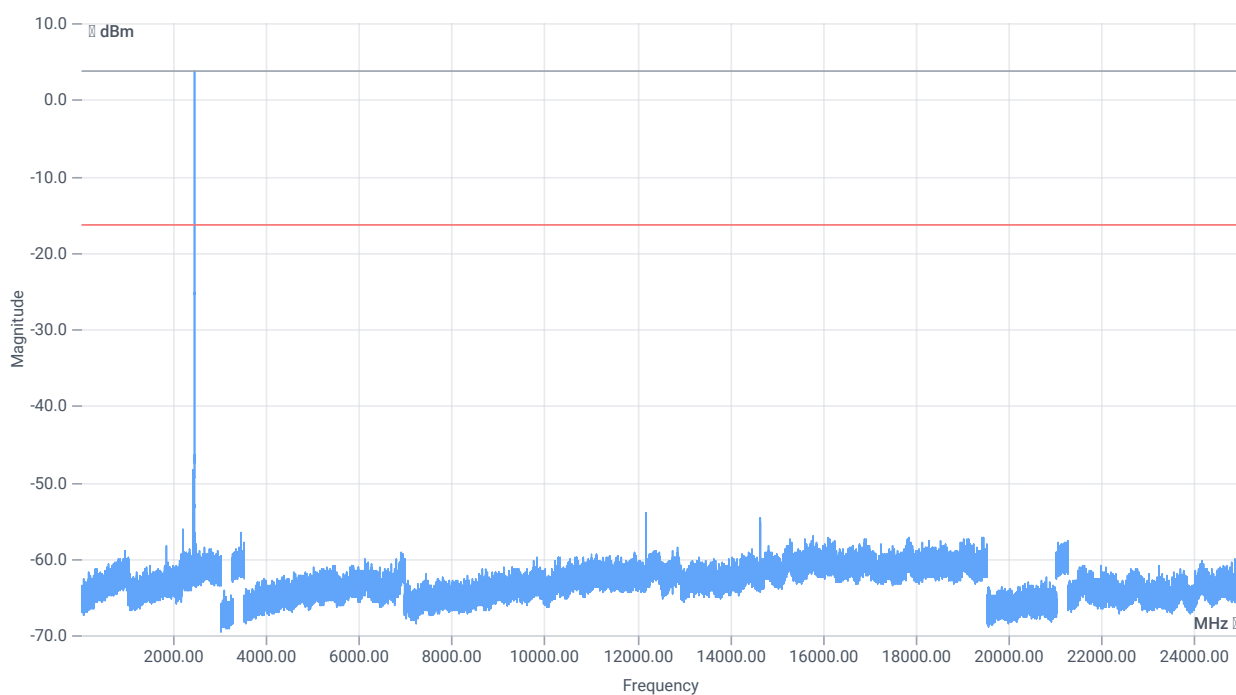

TX emissions

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	4.68 16.22 5
Start [MHz] Stop [MHz]	24780.000 25000.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	200 25 1501 SWE

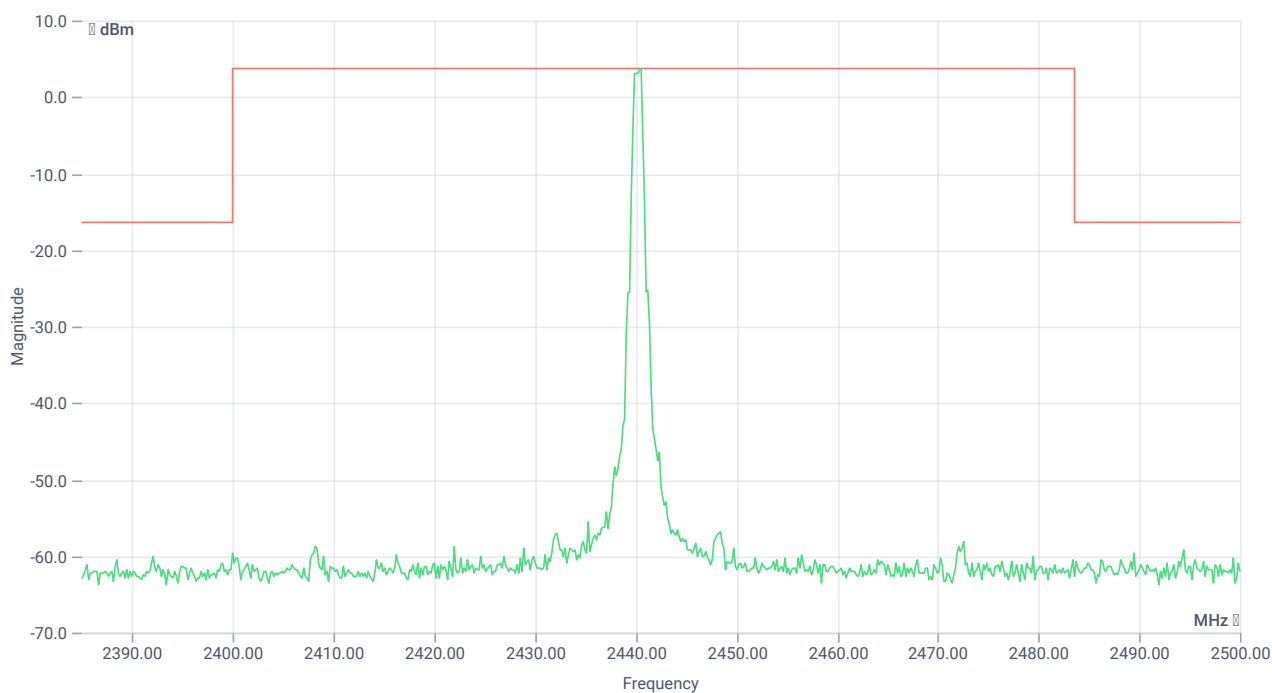

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Reference @ 2440.50 MHz	---	---	3.69	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 12202 MHz	0	---	37.77	dB	INFO

Verdict

PASS

FCC 15.247 # TX spurious conducted 20dBc ~ BT LE 1 Msps

References

TC start	24.05.2024 13:11:53
Ambit temp [°C] humidity [rel%]	25.8 38
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable
Description	FCC 15.247 TX Emissions Conducted DTS - BT LE 1 Msps
Information	

EUT Common Settings BT Low Energy

Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
1 Mbps supported	True TXpayload 255 RXpayload 255
2 Mbps supported	True TXpayload 255 RXpayload 255
Longrange S8 supported	True TXpayload 255 RXpayload 255
Longrange S2 supported	True TXpayload 255 RXpayload 255
Signaling Settings	None HCI 7 115200 None S1 None On
Signaling RF Settings	RF1com 0 0 On
User Interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetekom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	BT LE 1 Msps
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2480
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1


Test Parameter

Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 2480 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	3.40	dBm	INFO
Ref. frequency	---	---	2480.400	MHz	INFO

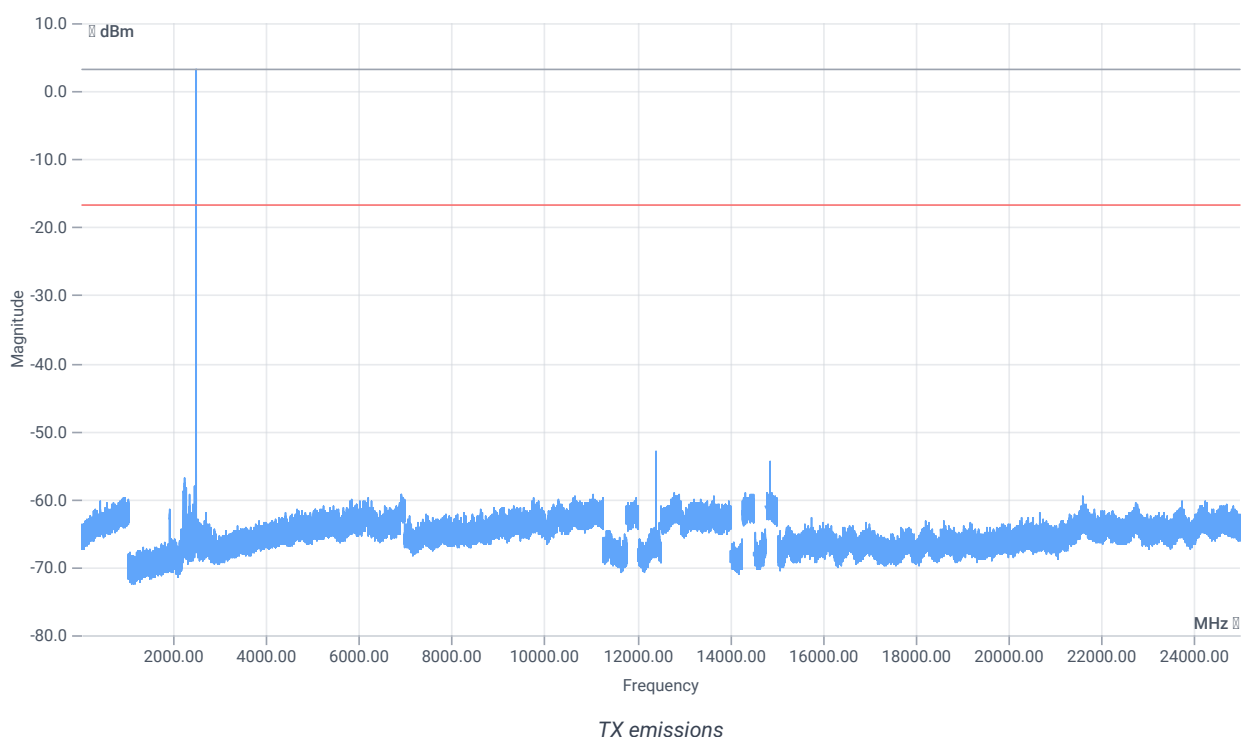

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	3.40 16.22 5
Start [MHz] Stop [MHz]	24780.000 25000.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	200 25 1501 SWE

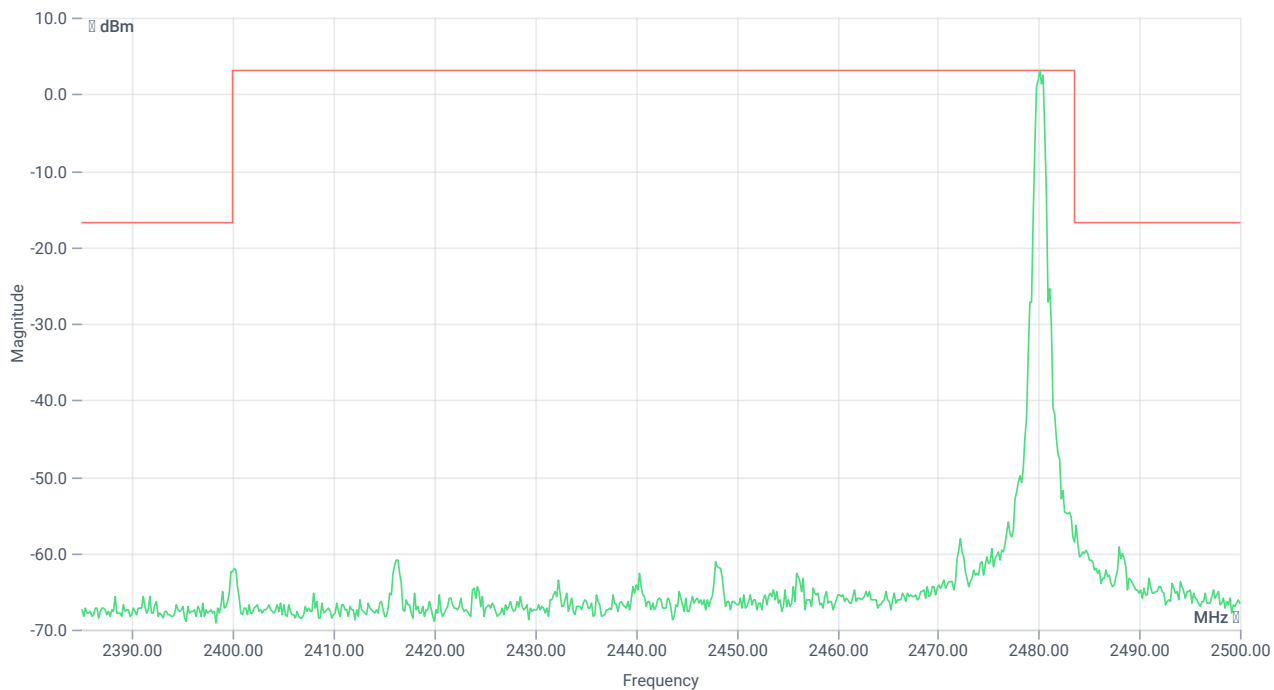

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Reference @ 2480.17 MHz	---	---	3.16	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 12400.667 MHz	0	---	36.13	dB	INFO

Verdict

PASS

FCC 15.247 # TX spurious conducted 20dBc ~ BT LE 2 Msps

References

TC start	24.05.2024 13:30:15
Ambit temp [°C] humidity [rel%]	25.9 47
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable
Description	FCC 15.247 TX Emissions Conducted DTS - BT LE 2 Msps
Information	

EUT Common Settings BT Low Energy

Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
1 Mbps supported	True TXpayload 255 RXpayload 255
2 Mbps supported	True TXpayload 255 RXpayload 255
Longrange S8 supported	True TXpayload 255 RXpayload 255
Longrange S2 supported	True TXpayload 255 RXpayload 255
Signaling Settings	None HCI 7 115200 None S1 None On
Signaling RF Settings	RF1com 0 0 On
User Interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	BT LE 2 Msps
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2404
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2478
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1


Test Parameter

Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 2404 MHz

RESULT: Reference power cond.


DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	4.79	dBm	INFO
Ref. frequency	---	---	2404.700	MHz	INFO

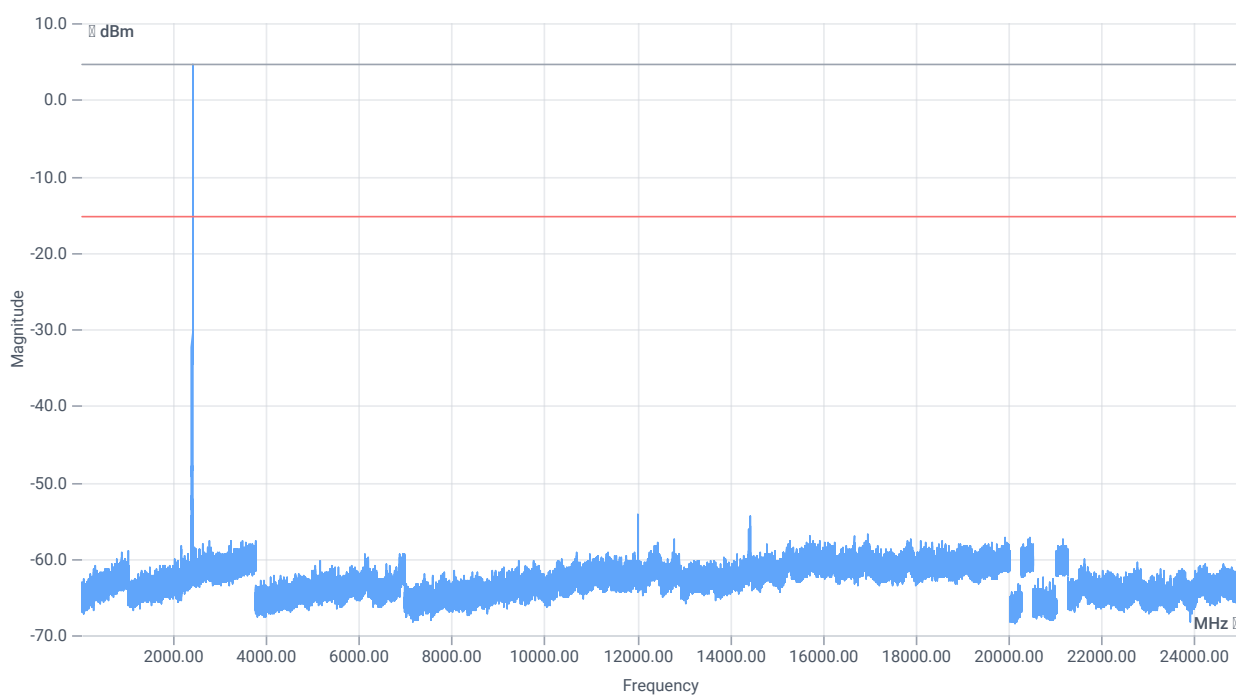

TX emissions

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	4.79 16.22 5
Start [MHz] Stop [MHz]	24780.000 25000.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	200 25 1501 SWE

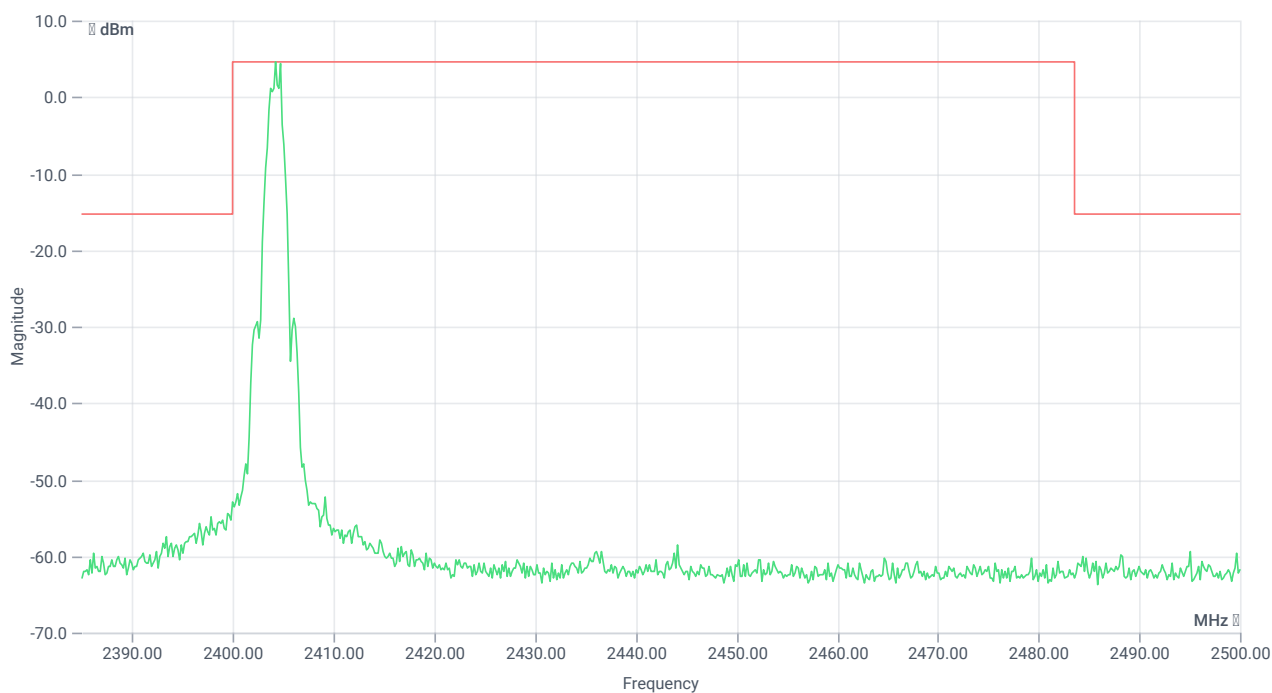

TX emissions band zoomed

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Reference @ 2404.17 MHz	---	---	4.61	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 12020.667 MHz	0	---	38.8	dB	INFO

Verdict

PASS

FCC 15.247 # TX spurious conducted 20dBc ~ BT LE 2 Msps

References

TC start	24.05.2024 13:49:54
Ambit temp [°C] humidity [rel%]	26.6 44
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable
Description	FCC 15.247 TX Emissions Conducted DTS - BT LE 2 Msps
Information	

EUT Common Settings BT Low Energy

Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
1 Mbps supported	True TXpayload 255 RXpayload 255
2 Mbps supported	True TXpayload 255 RXpayload 255
Longrange S8 supported	True TXpayload 255 RXpayload 255
Longrange S2 supported	True TXpayload 255 RXpayload 255
Signaling Settings	None HCI 7 115200 None S1 None On
Signaling RF Settings	RF1com 0 0 On
User Interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	BT LE 2 Msps
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2404
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2478
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1


Test Parameter

Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 2440 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	4.71	dBm	INFO
Ref. frequency	---	---	2440.700	MHz	INFO

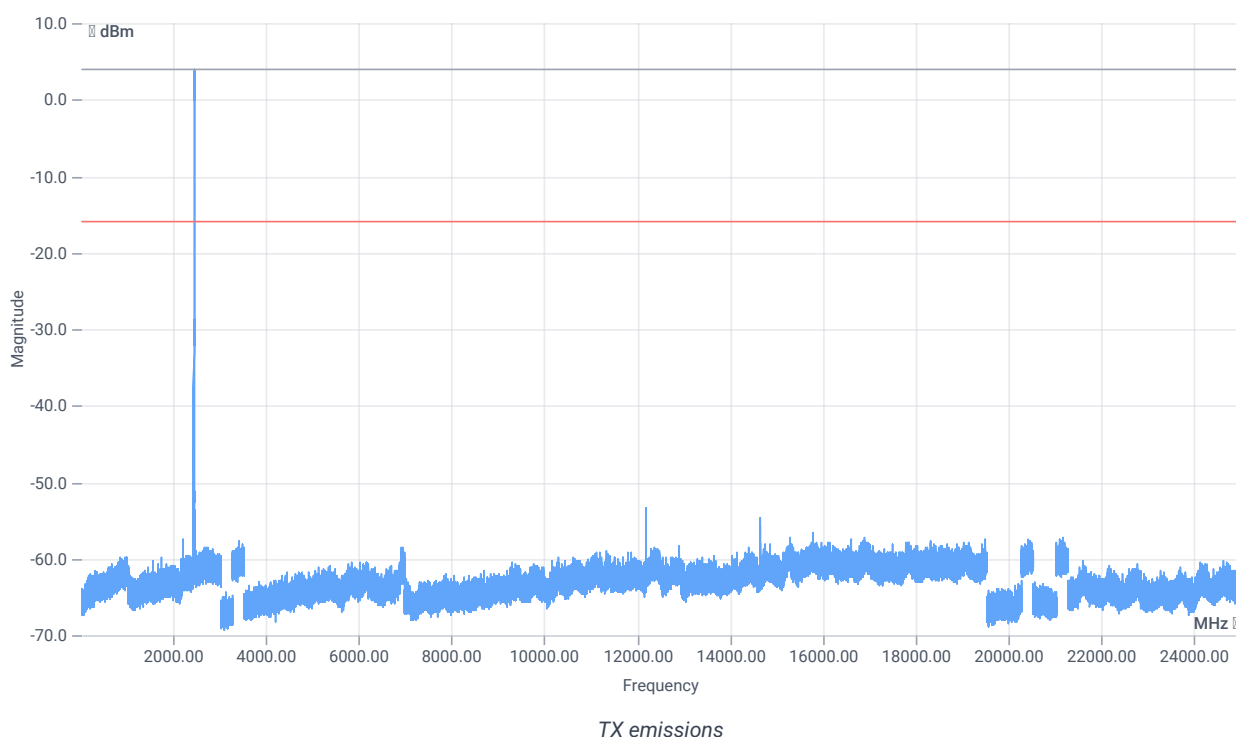

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	4.71 16.22 5
Start [MHz] Stop [MHz]	24780.000 25000.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	200 25 1501 SWE

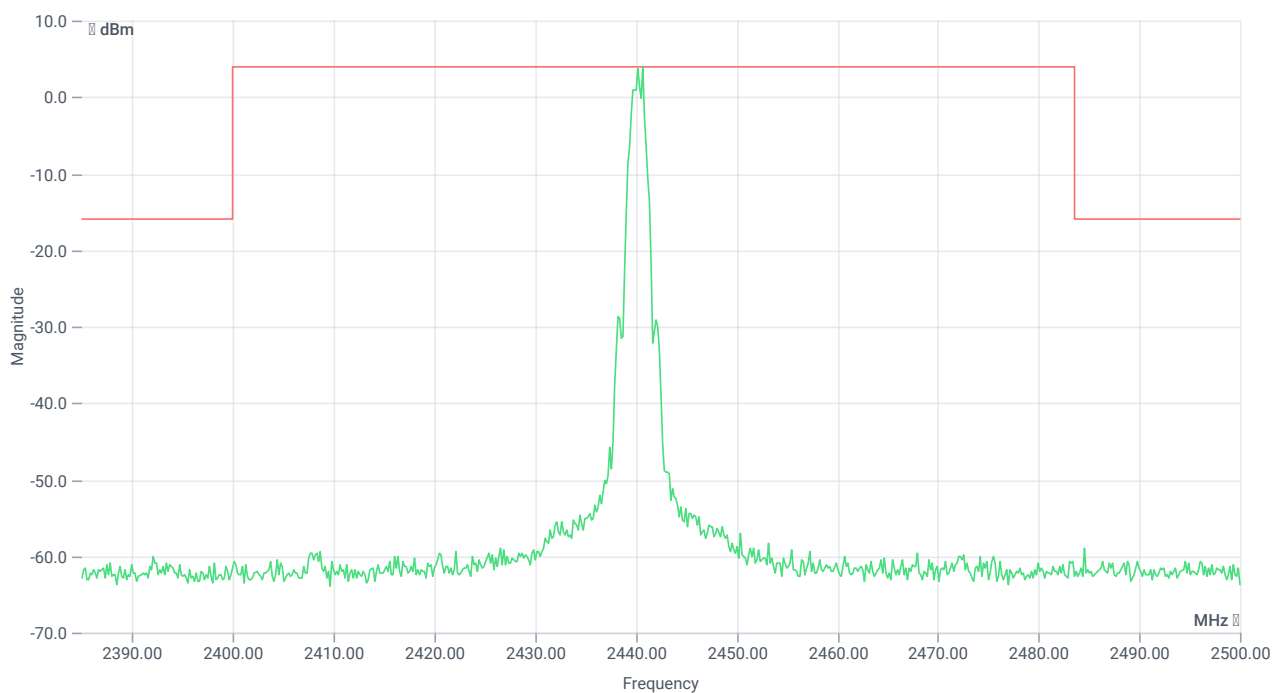

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Reference @ 2440.67 MHz	---	---	4.05	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 12200.667 MHz	0	---	37.48	dB	INFO

Verdict

PASS

FCC 15.247 # TX spurious conducted 20dBc ~ BT LE 2 Msps

References

TC start	24.05.2024 14:06:06
Ambit temp [°C] humidity [rel%]	26.8 42
System version	5.0.5.0
Standard Version	FCC 15.247 NI
Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable
Description	FCC 15.247 TX Emissions Conducted DTS - BT LE 2 Msps
Information	

EUT Common Settings BT Low Energy

Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
1 Mbps supported	True TXpayload 255 RXpayload 255
2 Mbps supported	True TXpayload 255 RXpayload 255
Longrange S8 supported	True TXpayload 255 RXpayload 255
Longrange S2 supported	True TXpayload 255 RXpayload 255
Signaling Settings	None HCI 7 115200 None S1 None On
Signaling RF Settings	RF1com 0 0 On
User Interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	BT LE 2 Msps
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2404
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2478
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	1


Test Parameter

Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 2478 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	3.43	dBm	INFO
Ref. frequency	---	---	2478.600	MHz	INFO

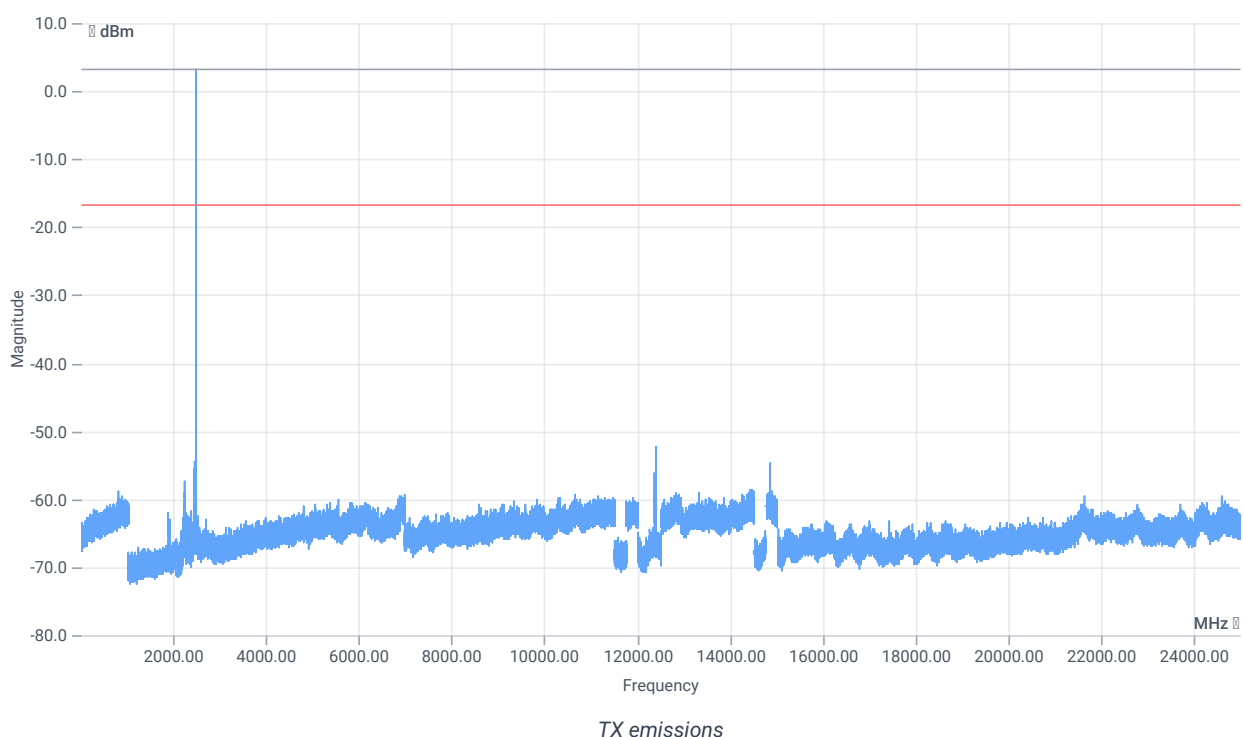

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	3.43 16.22 5
Start [MHz] Stop [MHz]	24780.000 25000.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	200 25 1501 SWE

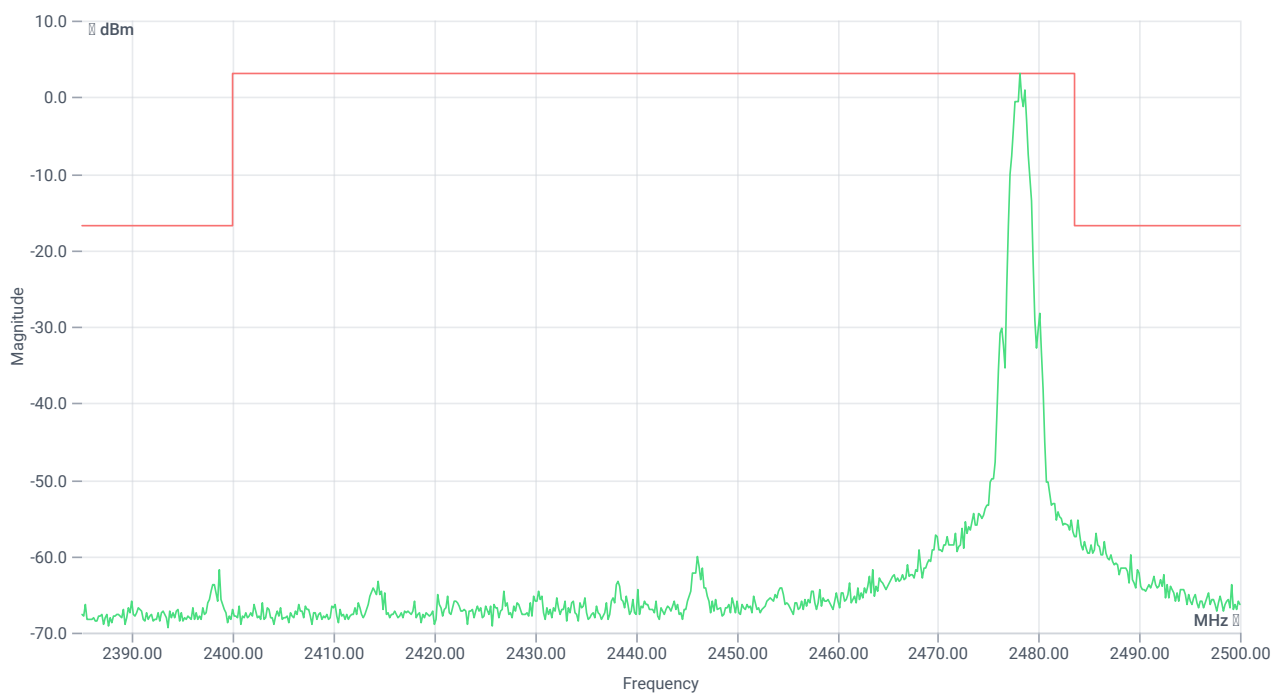

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Reference @ 2478.17 MHz	---	---	3.14	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 30 MHz	0	---	-135.31	dB	INFO

Verdict

PASS

- END OF DOCUMENT -