


モデル	:	限度値	:	ITE; VCCI Class B
シリアル番号	:	備考1	:	
オペレータ	:	備考2	:	
AC電源	:	備考3	:	
温度、湿度	:	備考4	:	

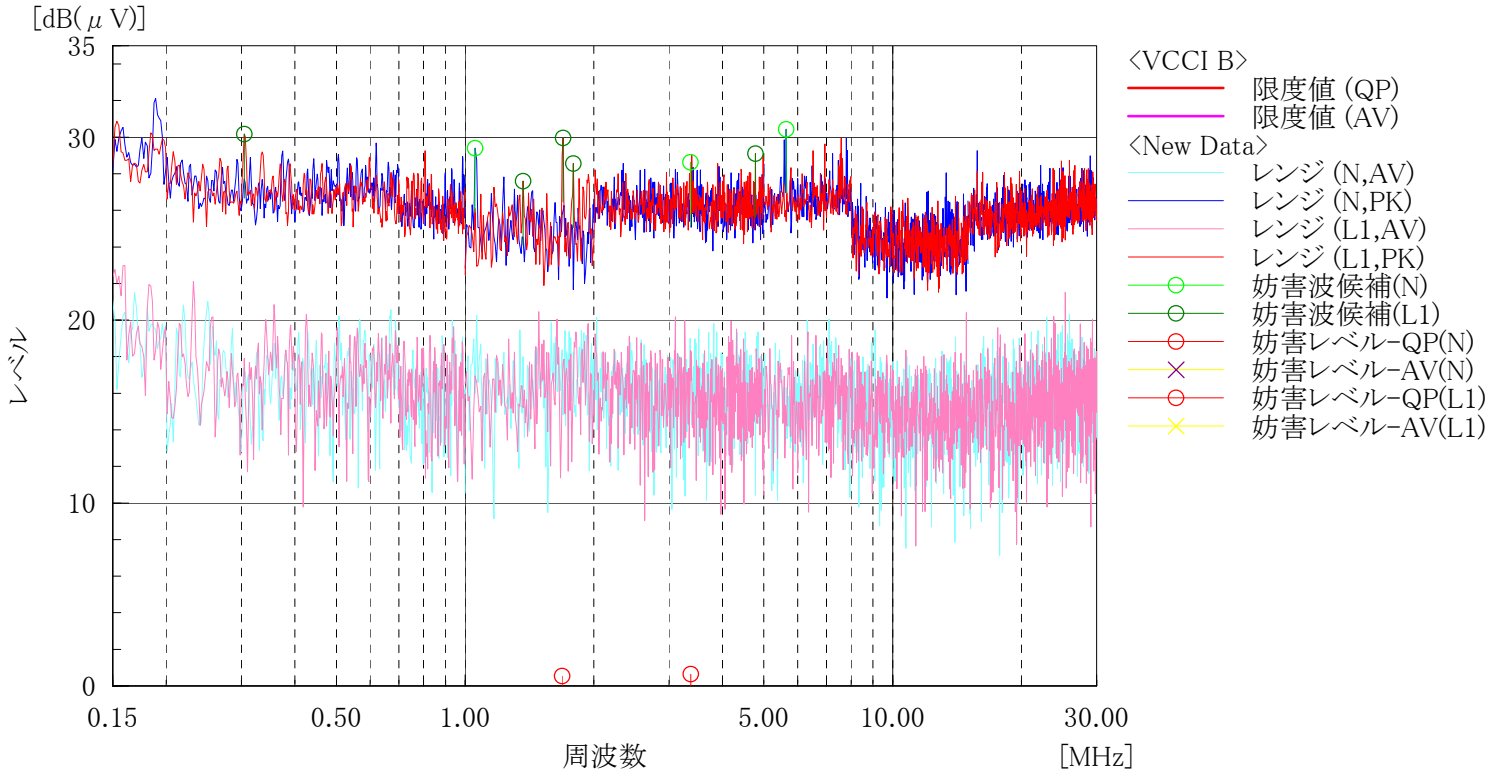

Spectrum Selection

--- N Phase ---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB]	Result PK [dB(μV)]	Limit QP [dB(μV)]	Limit AV [dB(μV)]	Margin QP [dB]	Margin AV [dB]
1	1.056	9.1	20.3	29.4	56.0	46.0	26.6	16.6
2	3.368	8.4	20.2	28.6	56.0	46.0	27.4	17.4
3	5.640	10.2	20.2	30.4	60.0	50.0	29.6	19.6

--- L1 Phase ---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB]	Result PK [dB(μV)]	Limit QP [dB(μV)]	Limit AV [dB(μV)]	Margin QP [dB]	Margin AV [dB]
1	0.3047	9.9	20.3	30.2	60.1	50.1	29.9	19.9
2	1.368	7.4	20.2	27.6	56.0	46.0	28.4	18.4
3	1.696	9.8	20.2	30.0	56.0	46.0	26.0	16.0
4	1.792	8.4	20.2	28.6	56.0	46.0	27.4	17.4
5	4.776	8.9	20.2	29.1	56.0	46.0	26.9	16.9