


モデル	:		限度値	:	ITE; VCCI Class B
シリアル番号	:		備考1	:	
オペレータ	:		備考2	:	
AC電源	:	AC100V 50Hz	備考3	:	
温度、湿度	:		備考4	:	

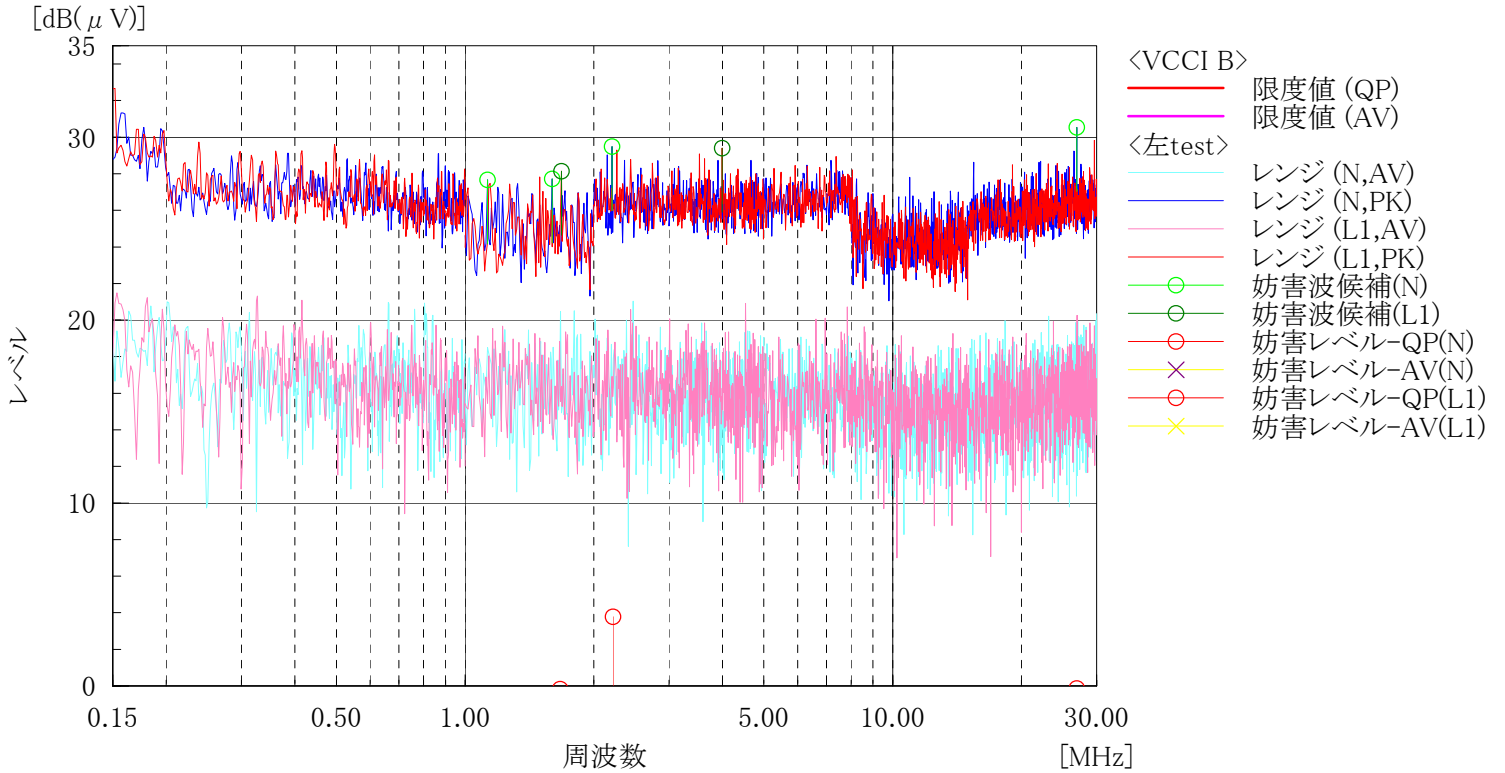

Spectrum Selection

--- N Phase ---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB]	Result PK [dB(μV)]	Limit QP [dB(μV)]	Limit AV [dB(μV)]	Margin QP [dB]	Margin AV [dB]
1	1.128	7.4	20.3	27.7	56.0	46.0	28.3	18.3
2	1.600	7.5	20.2	27.7	56.0	46.0	28.3	18.3
3	2.208	9.3	20.2	29.5	56.0	46.0	26.5	16.5
4	26.940	9.8	20.7	30.5	60.0	50.0	29.5	19.5

--- L1 Phase ---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB]	Result PK [dB(μV)]	Limit QP [dB(μV)]	Limit AV [dB(μV)]	Margin QP [dB]	Margin AV [dB]
1	1.680	7.9	20.2	28.1	56.0	46.0	27.9	17.9
2	3.992	9.2	20.2	29.4	56.0	46.0	26.6	16.6