



Underwriters  
Laboratories UL Japan, Inc.

FCC ID : AJDK022  
Test report No. : 29DE0121-YK-02-A  
Page : 1 of 77  
Issued date : January 5, 2009

## RADIO TEST REPORT

**Test Report No. : 29DE0121-YK-02-A**

**Applicant : PIONEER CORPORATION**

**Type of Equipment : CD Receiver**

**Model No. : DEH-P710BT**

**FCC ID : AJDK022**

**Test regulation : FCC Part15 Subpart C: 2008**

**Test result : Complied**

1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the limits of the above regulation.
4. The test results in this test report are traceable to the national or international standards.

**Date of test: December 3, 6, 8 and 19, 2008**

**Tested by:** W. Kojima J. Arai  
Wataru Kojima & Tatsuya Arai

M. Hosaka  
Makoto Hosaka

**Approved by:** T. Imamura  
Toyokazu Imamura  
Engineer of Yamakita EMC Lab.

---

**UL Japan, Inc.**

**YAMAKITA EMC LAB.**

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011 Facsimile: +81 465 77 2112

MF060b (18.06.07)

<b>Table of Contents</b>	<b>Page</b>
<b>1 Applicant information</b>	<b>3</b>
<b>2 Equipment under test (E.U.T.)</b>	<b>3</b>
<b>3 Test specification, procedures and results</b>	<b>4</b>
<b>4 System test configuration</b>	<b>6</b>
<b>5 Carrier frequency separation</b>	<b>9</b>
<b>6 20dB bandwidth &amp; Occupied bandwidth (99%)</b>	<b>9</b>
<b>7 Number of hopping frequency</b>	<b>9</b>
<b>8 Dwell time</b>	<b>9</b>
<b>9 Maximum peak output power</b>	<b>9</b>
<b>10 Out of band emissions (Antenna port conducted)</b>	<b>9</b>
<b>11 Out of band emissions (Radiated)</b>	<b>10</b>
<b><u>Contents of Appendixes</u></b>	<b>11</b>
<b>APPENDIX 1: Photographs of test setup</b>	<b>12</b>
<b>APPENDIX 2: Test data</b>	<b>13</b>
<b>APPENDIX 3: Test instruments</b>	<b>77</b>

## 1 Applicant information

Company Name : PIONEER CORPORATION  
Address : 25-1 Nishi-machi, Yamada-aza, Kawagoe-shi, Saitama, 350-8555, JAPAN  
Telephone Number : +81 49 228 8016  
Facsimile Number : +81 49 228 6497  
Contact Person : Takahiro Yano

## 2 Equipment under test (E.U.T.)

### 2.1 Identification of E.U.T.

Type of Equipment : CD Receiver  
Model No. : DEH-P710BT  
Serial No. : Refer to 4.2 in this report.  
Rating : DC13.2V  
Country of Mass-production : Thailand and Portugal  
Receipt Date of Sample : December 2, 2008  
Condition of EUT : Production prototype  
(Not for Sale: This sample is equivalent to mass-produced items.)  
Modification of EUT : No modification by the test lab.

### 2.2 Product description

Model: DEH-P710BT (referred to as the EUT in this report) is a CD Receiver.

The difference between the EUT and its derived models:

DEH-P710BT: Volume knob color: BLACK

DEH-P7100BT: Volume knob color: SILVER

Equipment type : Transceiver  
Frequency of operation : 2402-2480MHz  
Clock frequency : System microcomputer: 20MHz, Grill microcomputer: 16MHz  
CD Mecha microcomputer: 16.93MHz, 48MHz  
FM/AM tuner: 39.9MHz (1st IF: 10.7MHz, 2nd IF: 700kHz)  
Bluetooth module: 26MHz, DC-DC converter: 370.4 / 434.8kHz  
Bandwidth & channel spacing : 79MHz & 1MHz  
Type of modulation : FHSS  
Antenna model & type : Surface mountable dielectric chip antenna (made by Mitsubishi material):  
ACD1403-244ST1M  
Antenna gain with cable loss : +1.6dBi  
Antenna connector type : U.FL (20279 type (manufactured by I-PEX))  
ITU code : F1D, G1D  
Operation temperature range : -10 to +60 deg.C.

FCC Part15.31 (e)

The equipment provides the Bluetooth transmitter with stable power supply (DC 3.3 V), therefore, the equipment complies power supply regulation.

FCC Part15.203 Antenna requirement

The equipment and its antenna comply with this requirement since this antenna is built in the equipment and it cannot be replaced by end users.

---

**UL Japan, Inc.**

**YAMAKITA EMC LAB.**

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011 Facsimile: +81 465 77 2112

MF060b (18.06.07)

### 3 Test specification, procedures and results

#### 3.1 Test specification

Test specification : FCC Part15 Subpart C: 2008, final revised on May 19, 2008  
 Title : FCC 47CFR Part15 Radio Frequency Device, Subpart C Intentional Radiators  
 Section 15.207 Conducted limits  
 Section 15.209 Radiated emission limits, general requirements  
 Section 15.247 Operation within the bands 902-928MHz, 2400-2483.5MHz,  
 and 5725-5850MHz

The EUT complies with FCC Part15 Subpart B: 2008, final revised on May 19, 2008. The test has been performed by the customer.

#### 3.2 Procedures & results

Item	Test Procedure	Specification	Remarks	Deviation	Worst Margin	Results
Conducted emission	ANSI C63.4:2003 7. AC powerline conducted emission measurements	FCC Section 15.207	-	N/A *1)	N/A	N/A
Carrier frequency separation	FCC Public Notice DA 00-705 & ANSI C63.4:2003 13. Measurement of intentional radiators	FCC Section 15.247 (a)(1)	Conducted	N/A	*See data.	Complied
20dB bandwidth	FCC Public Notice DA 00-705 & ANSI C63.4:2003 13. Measurement of intentional radiators	FCC Section 15.247 (a)(1)	Conducted	N/A		Complied
Number of hopping frequency	FCC Public Notice DA 00-705 & ANSI C63.4:2003 13. Measurement of intentional radiators	FCC Section 15.247 (a)(1)(iii)	Conducted	N/A		Complied
Dwell time	FCC Public Notice DA 00-705 & ANSI C63.4:2003 13. Measurement of intentional radiators	FCC Section 15.247 (a)(1)(iii)	Conducted	N/A		Complied
Maximum peak output power	FCC Public Notice DA 00-705 & ANSI C63.4:2003 13. Measurement of intentional radiators	FCC Section 15.247 (b)(1)	Conducted	N/A		Complied
Band edge compliance & Spurious emission	FCC Public Notice DA 00-705 & ANSI C63.4:2003 13. Measurement of intentional radiators	FCC Section 15.247 (d) Section 15.209	Conducted/ Radiated	N/A	6.5dB (QP, Horizontal, Tx 2480MHz) 288.03MHz, DH5 & 288.02MHz, 3DH5	Complied

Note: UL Japan's EMI Work Procedures No.QPM05 and QPM15.

\*1) The test is not applicable since the EUT has no AC mains.

**UL Japan, Inc.**

**YAMAKITA EMC LAB.**

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011 Facsimile: +81 465 77 2112

MF060b (18.06.07)

### 3.3 Addition to standard

Item	Test Procedure	Specification	Remarks	Worst Margin	Results
Occupied Bandwidth (99%)	ANSI C63.4:2003 13. Measurement of intentional radiators RSS-Gen 4.6.1	RSS-Gen 4.6.1	Conducted	-	Complied

\* Other than above, no addition, exclusion nor deviation has been made from the standard.

### 3.4 Uncertainty

The following uncertainties have been calculated to provide a confidence level of 95% using a coverage factor k=2.

	No.1 open site (±)	No.2 open site (±)	No.1 anechoic chamber (±)
<b>Radiated emission (3m)</b>			
30-300MHz	4.5 dB	4.4 dB	4.5 dB
300-1000MHz	4.3 dB	4.3 dB	4.3 dB
1GHz<	5.7 dB	5.7 dB	5.7 dB

The data listed in this test report has enough margin, more than site margin.

Antenna port conducted test	(±)
Below 1GHz	0.4dB
1GHz and above	0.7dB

### 3.5 Test location

UL Japan, Inc. Yamakita EMC Lab.

907, Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken 258-0124 JAPAN

Telephone number : +81 465 77 1011

Facsimile number : +81 465 77 2112

NVLAP Lab. code : 200441-0

No. 1 test site has been fully described in a report submitted to FCC office, and accepted on July 23, 2008 (Registration No.: 95486).

IC Registration No. : 2973B-1

No. 2 test site has been fully described in a report submitted to FCC office, and accepted on February 27, 2008 (Registration No.: 466226).

IC Registration No. : 2973B-3

No. 1 anechoic chamber has been fully described in a report submitted to FCC office, and accepted on October 22, 2008 (Registration No.: 95967).

IC Registration No. : 2973B-2

Test room	Width x Depth x Height (m)	Test room	Width x Depth x Height (m)
No.1 shielded room	8.0 x 5.0 x 2.5	No.1	10.0 x 7.5 x 5.7
No.2 shielded room	5.0 x 4.0 x 2.5	Semi-anechoic chamber	
No.3 shielded room	4.0 x 5.0 x 2.7		

Open test site	Maximum measurement distance
No.1 open test site	30m
No.2 open test site	10m

**UL Japan, Inc.**

**YAMAKITA EMC LAB.**

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011 Facsimile: +81 465 77 2112

MF060b (18.06.07)

## 4 System test configuration

### 4.1 Operating mode

The system was configured in typical fashion (as a customer would normally use it) for testing.


Test item	Operating mode	Tested frequency
Carrier frequency separation	Transmitting Hopping ON (DH5/3DH5)/Inquiry, Payload: PRBS9	-
20dB bandwidth	Transmitting Hopping OFF (DH5/3DH5)/Inquiry, Payload: PRBS9	2402MHz, 2441MHz, 2480MHz
Number of hopping frequency	Transmitting Hopping ON (DH5/3DH5)/Inquiry, Payload: PRBS9	-
Dwell time	Transmitting (Hopping ON) -DH1, -DH3, -DH5 -3DH1, -3DH3, -3DH5 -Inquiry	-
Maximum peak output power	Transmitting Hopping OFF (DH5/3DH5)/Inquiry, Payload: PRBS9 -DH5 -2DH5 -3DH5	2402MHz, 2441MHz, 2480MHz
Band edge compliance & Spurious emission (Conducted) (Radiated)	Transmitting (DH5/3DH5), Payload: PRBS9 -Hopping ON/Inquiry -Hopping OFF Transmitting (DH5/3DH5), Payload: PRBS9	Band edge compliance: 2402MHz, 2480MHz Spurious emission: 2402MHz, 2441MHz, 2480MHz
99% occupied bandwidth	Transmitting (DH5/3DH5), Payload: PRBS9 -Hopping ON -Hopping OFF	2402MHz, 2441MHz, 2480MHz

\*As a result of preliminary test, the formal test was performed with the above modes, which had the maximum payload (except Dwell time test)

\*Remarks: Test was not performed at AFH mode, because the decrease of number of channel (min: 20ch) at AFH mode does not influence on the output power and bandwidth of the EUT.

However, the limit level 125mW of AFH mode was used for the test.

#### 4.2 Configuration and peripherals

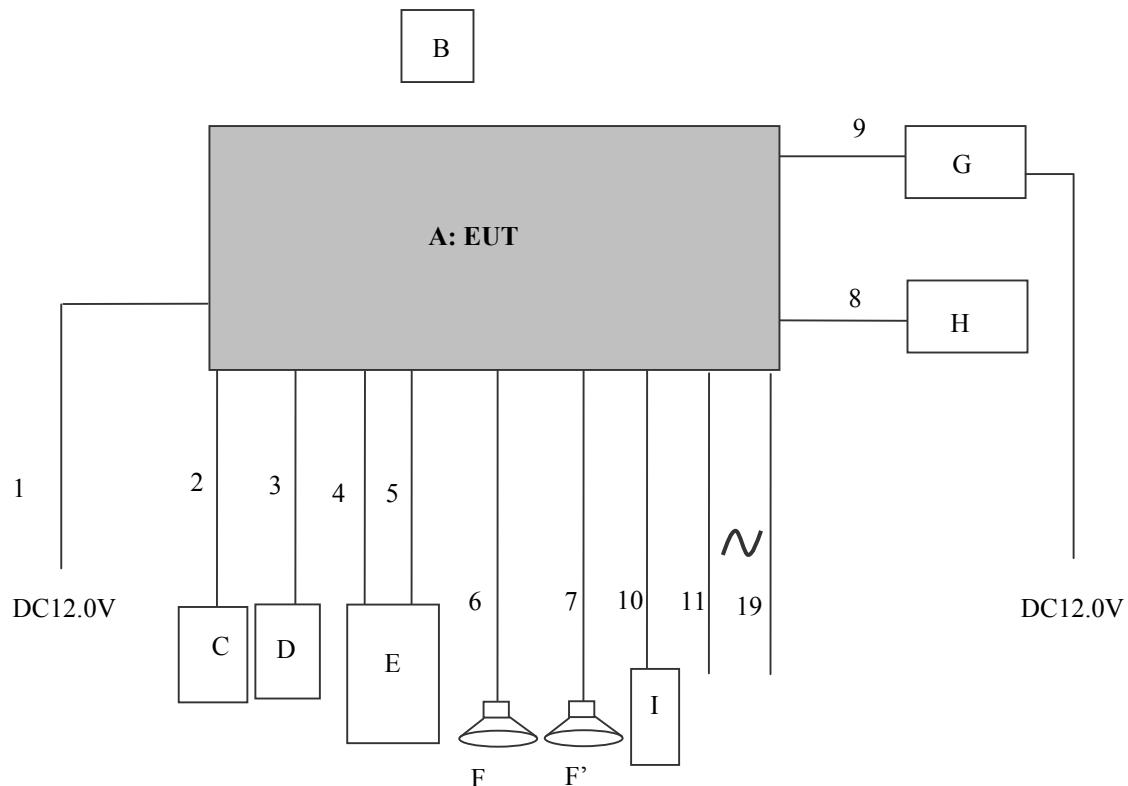

#### Description of EUT and support equipment

No.	Item	Model number	Serial number	Manufacturer	Remarks
A	CD Receiver	DEH-P710BT	*2)	Pioneer	EUT
B	Remote controller	0F020034	-	Pioneer	-
C	Wired remote controller	CD-MR70	DBSA000049US	Pioneer	-
D	CD Changer	CDX-P1270	DATM42307JP	Pioneer	-
E	Front speaker dummy load	RHA250N	-	-	-
F	Rear Speaker	TS-X350	PBO100047	Pioneer	-
F'			PBO100048		
G	Power amplifier	GM-3200T	FGPG004298EW	Pioneer	-
H	Hands-free microphone	0F020056	-	Pioneer	-
I	USB flash memory	POCKETBIT 1GB	-	SONY	-

\*1) DC power supply (Model No.: PAN35-10A) was used for DC 12V input.

\*2) Radiated emission: 5774021, Other test: 5773995

**List of cables used \*2)**

No.	Name	Length (m)	Shield		Remark
			Cable	Connector	
1	DC cable	1.0	Unshielded	Unshielded	16pin connector
2	Wired remote controller cable	4.0	Shielded	Shielded	-
3	IP-BUS Cable	6.0	Shielded	Shielded	-
4	Front speaker cable Left	6.0	Unshielded	Unshielded	16pin connector
5	Front speaker cable Right	6.0	Unshielded	Unshielded	16pin connector
6	Rear speaker cable Left	20.0	Unshielded	Unshielded	16pin connector
7	Rear speaker cable Right	20.0	Unshielded	Unshielded	16pin connector
8	Hands-free microphone	4.0	Shielded	Unshielded	-
9	Audio out subwoofer cable (RCA)	3.0	Unshielded	Unshielded	L/R
10	USB cable	1.6	Shielded	Shielded	-
11	USB cable	1.6	Shielded	Shielded	-
12	Audio out front cable (RCA)	3.0	Shielded	Unshielded	L/R
13	Audio out rear cable (RCA)	3.0	Shielded	Unshielded	L/R
14	AUX in cable (stereo audio mini )	3.0	Shielded	Unshielded	-
15	System remote cable	0.2	Unshielded	Unshielded	16pin connector
16	Auto antenna cable	0.2	Unshielded	Unshielded	16pin connector
17	Mute cable	0.2	Unshielded	Unshielded	16pin connector
18	Illumination cable	0.2	Unshielded	Unshielded	16pin connector
19	Antenna cable	0.1	Shielded	Shielded	-

\*2) All cables used for the measurement are exclusive use or marketed.

**UL Japan, Inc.**

**YAMAKITA EMC LAB.**

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011 Facsimile: +81 465 77 2112

MF060b (18.06.07)

## 5 Carrier frequency separation

### Test procedure

The carrier frequency separation was measured with a spectrum analyzer connected to the antenna port.

Summary of the test results: Pass

Date: December 3 and 19, 2008

Test engineer : Tatsuya Arai and Makoto Hosaka

## 6 20dB bandwidth & Occupied bandwidth (99%)

### Test procedure

The bandwidth was measured with a spectrum analyzer connected to the antenna port.

The channel separation in Hopping mode and Inquiry mode was separated by 25kHz and 2/3 of the 20dB bandwidth.

Summary of the test results: Pass

Date: December 3 and 19, 2008

Test engineer : Tatsuya Arai and Makoto Hosaka

## 7 Number of hopping frequency

### Test procedure

The Number of Hopping Frequency was measured with a spectrum analyzer connected to the antenna port.

Summary of the test results: Pass

Date: December 3 and 19, 2008

Test engineer : Tatsuya Arai and Makoto Hosaka

## 8 Dwell time

### Test procedure

The Dwell time was measured with a spectrum analyzer connected to the antenna port.

Summary of the test results: Pass

Date: December 19, 2008

Test engineer : Makoto Hosaka

## 9 Maximum peak output power

### Test procedure

The Maximum Peak Output Power was measured with a power meter connected to the antenna port.

Summary of the test results: Pass

Date: December 3, 2008

Test engineer : Tatsuya Arai

## 10 Out of band emissions (Antenna port conducted)

### Test procedure

The Out of Band Emissions was measured with a spectrum analyzer connected to the antenna port.

In any 100kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator confirmed 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on a conducted measurement.

Summary of the test results: Pass

Date: December 3 and 19, 2008

Test engineer : Tatsuya Arai and Makoto Hosaka

---

**UL Japan, Inc.**

**YAMAKITA EMC LAB.**

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011

Facsimile: +81 465 77 2112

MF060b (18.06.07)

## 11 Out of band emissions (Radiated)

### 11.1 Operating environment

The test was carried out in No.1 anechoic chamber.

### 11.2 Test configuration

EUT was placed on a urethane platform of nominal size, 0.5m by 1.0m, raised 80cm above the conducting ground plane to prevent the reflection influence. The configuration was set in accordance with ANSI C63.4: 2003. Photographs of the set up are shown in Appendix 1.

### 11.3 Test conditions

Frequency range : 30MHz - 26GHz  
Test distance : 3m

### 11.4 Test procedure

The Radiated Electric Field Strength intensity has been measured with a ground plane and at a distance of 3m. The measuring antenna height was varied between 1 and 4m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity. The measurements were performed for both vertical and horizontal antenna polarization. Measurements were performed with QP, PK, and AV detector.

The radiated emission measurements were made with the following detector function of the test receiver.

Frequency	Below 1GHz	Above 1GHz
Instrument used	Test Receiver	Spectrum Analyzer
Detector IF Bandwidth	QP: BW 120kHz	PK: RBW: 1MHz/VBW: 1MHz AV *1): RBW: 1MHz/VBW: See data
Measuring antenna	Biconical (30-300MHz) Logperiodic (300MHz-1GHz)	Horn

\*1) When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

The EUT was tested in the direction normally used.

### 11.5 Band edge

Band edge level at 2390MHz, 2400MHz and 2483.5MHz is below the limits of FCC 15.209. Refer to the data of radiated emission.

### 11.6 Results

Summary of the test results : Pass  
No noise was detected above the 5<sup>th</sup> order harmonics.

Date: December 6 and 8, 2008

Test engineer : Tatsuya Arai and Wataru Kojima

**UL Japan, Inc.**

**YAMAKITA EMC LAB.**

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011 Facsimile: +81 465 77 2112

MF060b (18.06.07)

### **APPENDIX 1: Photographs of test setup**

Page 12 : Radiated emission

### **APPENDIX 2: Test data**

Page 13 : Carrier frequency separation

Page 14 - 16 : 20dB bandwidth

Page 17 - 21 : Number of hopping frequency

Page 22 - 35 : Dwell time

Page 36 : Maximum peak output power

Page 37 - 54 : Out of band emissions (Antenna port conducted)

Page 55 - 72 : Out of band emissions (Radiated)

Page 73 : Duty cycle

Page 74 - 76 : Occupied bandwidth

### **APPENDIX 3: Test instruments**

Page 77 : Test instruments

---

***UL Japan, Inc.***

***YAMAKITA EMC LAB.***

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011 Facsimile: +81 465 77 2112

MF060b (18.06.07)