



Underwriters  
Laboratories

FCC ID : AJDK030  
Test report No. : 30CE0127-YK-01-A  
Page : 1 of 50  
Issued date : December 22, 2009  
Revised date : January 18, 2010

## RADIO TEST REPORT

**Test Report No.: 30CE0127-YK-01-A**

**Applicant : PIONEER CORPORATION**

**Type of Equipment : CD Receiver**

**Model No. : DEH-P6200BT**

**FCC ID : AJDK030**

**Test regulation : FCC Part15 Subpart C: 2009**

**Test result : Complied**

1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the limits of the above regulation.
4. The test results in this test report are traceable to the national or international standards.

**Date of test: November 27, 2009**

**Tested by:** M. Nakatake  
Minoru Nakatake

&

Y. Owaki  
Yasumasa Owaki

**Approved by:** T. Imamura  
Toyokazu Imamura  
Manager of Yamakita EMC lab.

---

**UL Japan, Inc.**

**Yamakita EMC Lab.**

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011

Facsimile: +81 465 77 2112

<b>Table of Contents</b>	<b>Page</b>
<b>1 Applicant information</b>	<b>3</b>
<b>2 Equipment under test (E.U.T.)</b>	<b>3</b>
<b>3 Test specification, procedures and results</b>	<b>5</b>
<b>4 System test configuration</b>	<b>7</b>
<b>5 Carrier frequency separation</b>	<b>9</b>
<b>6 20dB bandwidth &amp; Occupied bandwidth (99%)</b>	<b>9</b>
<b>7 Number of hopping frequency</b>	<b>9</b>
<b>8 Dwell time</b>	<b>9</b>
<b>9 Maximum peak output power</b>	<b>9</b>
<b>10 Out of band emissions (Antenna port conducted)</b>	<b>9</b>
<b>11 Out of band emissions (Radiated)</b>	<b>10</b>
<b><u>Contents of Appendixes</u></b>	<b>11</b>
<b>APPENDIX 1: Photographs of test setup</b>	<b>12</b>
<b>APPENDIX 2: Test data</b>	<b>13</b>
<b>APPENDIX 3: Test instruments</b>	<b>50</b>

## 1 Applicant information

Company Name : PIONEER CORPORATION  
Address : 25-1 Nishi-machi, Yamada-aza, Kawagoe-shi, Saitama, 350-8555, JAPAN  
Telephone Number : +81 49 228 6415  
Facsimile Number : +81 49 228 6493  
Contact Person : Makoto Kaieda

## 2 Equipment under test (E.U.T.)

### 2.1 Identification of E.U.T.

Type of Equipment : CD Receiver  
Model No. : DEH-P6200BT  
Serial No. : Refer to 4.2 in this report.  
Rating : DC14.4V  
Country of Mass-production : China  
Condition of EUT : Production prototype  
(Not for Sale: This sample is equivalent to mass-produced items.)  
Modification of EUT : No modification by the test lab.  
Receipt Date of Sample : November 26, 2009

### 2.2 Product description

Model: DEH-P6200BT (referred to as the EUT in this report) is a CD Receiver.

Clock frequency:

System micro computer: 20MHz, Grill micro computer: 10MHz  
Media micro computer: 16.93MHz, 48.0MHz, CD mechanism: 16.93MHz  
Tuner: 39.9MHz (1st IF: 10.7MHz, 2nd IF: 700kHz)  
Bluetooth module: 26MHz, DC-DC CONVERTER: 370.3/434.7kHz

Equipment type : Transceiver  
Frequency of operation : 2402-2480MHz  
Bandwidth & channel spacing : 79MHz & 1MHz  
Type of modulation : FHSS  
Antenna type : Pattern  
Antenna gain with cable loss : -0.3dBi  
Antenna connector type : Micro coaxial (I-PEX: 20279 type)  
ITU code : F1D  
Operation temperature range : -10 to +60 deg.C.

---

**UL Japan, Inc.**

**Yamakita EMC Lab.**

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011

Facsimile: +81 465 77 2112

The difference between the EUT and its derived models:

Comparison item	DEH-6250BT	DEH-P6200BT
IP-BUS	None	Attached
RCA	1P/O	3P/O
FM frequency range & Step	87.5 to 108 MHz 50 or 100 kHz step	87.9 to 107.9 MHz 200 kHz step
AM frequency range & Step	531 to 1602 kHz (9kHz) 530 to 1640 kHz (10kHz) 9 or 10 kHz step	530 to 1710 kHz (10kHz) 10 kHz step
DISP OFF mode	OK	None
Remote control	CARD REMOTE (E)	Optional
LCD color	PURE BLUE	WHITE
Illumination color	PURE BLUE	RED

FCC Part15.31 (e)

The equipment provides the Bluetooth transmitter with stable power supply (DC 3.3 V), therefore, the equipment complies power supply regulation.

FCC Part15.203 Antenna requirement

The equipment and its antenna comply with this requirement since this antenna is built in the equipment and it cannot be replaced by end users.

---

**UL Japan, Inc.**

**Yamakita EMC Lab.**

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011

Facsimile: +81 465 77 2112

### 3 Test specification, procedures and results

#### 3.1 Test specification

Test specification : FCC Part 15 Subpart C: 2009, final revised on December 2, 2009  
 Title : FCC 47CFR Part15 Radio Frequency Device Subpart C Intentional Radiators  
 Section 15.207 Conducted limits  
 Section 15.209 Radiated emission limits, general requirements  
 Section 15.247 Operation within the bands 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz

The EUT complies with FCC Part 15 Subpart B: 2009, final revised on December 2, 2009. The test has been performed by the customer.

#### 3.2 Procedures & Results

Item	Test Procedure	Specification	Remarks	Deviation	Worst Margin	Results
Conducted emission	ANSI C63.4:2003 7. AC powerline conducted emission measurements	FCC Section 15.207	-	N/A *1)	N/A	N/A
Carrier frequency separation	FCC Public Notice DA 00-705 & ANSI C63.4:2003 13. Measurement of intentional radiators	FCC Section15.247 (a)(1)	Conducted	N/A		Complied
20dB bandwidth	FCC Public Notice DA 00-705 & ANSI C63.4:2003 13. Measurement of intentional radiators	FCC Section15.247 (a)(1)	Conducted	N/A		Complied
Number of hopping frequency	FCC Public Notice DA 00-705 & ANSI C63.4:2003 13. Measurement of intentional radiators	FCC Section15.247 (a)(1)(iii)	Conducted	N/A	*See data.	Complied
Dwell time	FCC Public Notice DA 00-705 & ANSI C63.4:2003 13. Measurement of intentional radiators	FCC Section15.247 (a)(1)(iii)	Conducted	N/A		Complied
Maximum peak output power	FCC Public Notice DA 00-705 & ANSI C63.4:2003 13. Measurement of intentional radiators	FCC Section15.247 (b)(1)	Conducted	N/A		Complied
Band edge compliance & Spurious emission	FCC Public Notice DA 00-705 & ANSI C63.4:2003 13. Measurement of intentional radiators	FCC Section15.247 (d) Section15.209	Conducted/ Radiated	N/A	5.7dB (12400MHz, Horizontal, AV Tx 2480MHz)	Complied
Note: UL Japan's EMI Work Procedures No.QPM05 and QPM15. *1) The test is not applicable since the EUT has no AC mains.						

**UL Japan, Inc.**

**Yamakita EMC Lab.**

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011

Facsimile: +81 465 77 2112

### 3.3 Addition to standard

Item	Test Procedure	Specification	Remarks	Worst Margin	Results
Occupied bandwidth (99%)	ANSI C63.4:2003 13. Measurement of intentional radiators RSS-Gen 4.6.1	RSS-Gen 4.6.1	Conducted	-	Complied

\* Other than above, no addition, exclusion nor deviation has been made from the standard.

### 3.4 Uncertainty

The following uncertainties have been calculated to provide a confidence level of 95% using a coverage factor k=2.

	No.1 open site (±)	No.2 open site (±)	No.1 anechoic chamber (±)
<b>Radiated emission (3m)</b>			
<30MHz	2.4 dB	2.4 dB	2.7 dB
30-300MHz	4.3 dB	4.3 dB	4.6 dB
300-1000MHz	4.3 dB	4.3 dB	4.5 dB
1GHz<	5.7 dB	5.8 dB	5.7 dB

The data listed in this test report has enough margin, more than site margin.

<b>Antenna port conducted test</b>	(±)
Below 1GHz	0.4dB
1GHz and above	0.7dB

### 3.5 Test location

UL Japan, Inc. Yamakita EMC Lab.

907, Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken 258-0124 JAPAN

Telephone number : +81 465 77 1011

Facsimile number : +81 465 77 2112

JAB Accreditation No. : RTL02610

No. 1 test site has been fully described in a report submitted to FCC office, and accepted on July 23, 2008 (Registration No.: 95486).

IC Registration No. : 2973B-1

No. 2 test site has been fully described in a report submitted to FCC office, and accepted on February 27, 2008 (Registration No.: 466226).

IC Registration No. : 2973B-3

No. 1 anechoic chamber has been fully described in a report submitted to FCC office, and accepted on October 22, 2008 (Registration No.: 95967).

IC Registration No. : 2973B-2

Test room	Width x Depth x Height (m)	Test room	Width x Depth x Height (m)
No.1 shielded room	8.0 x 5.0 x 2.5	No.1	10.0 x 7.5 x 5.7
No.2 shielded room	5.0 x 4.0 x 2.5	Semi-anechoic chamber	
No.3 shielded room	4.0 x 5.0 x 2.7		

Open test site	Maximum measurement distance
No.1 open test site	30m
No.2 open test site	10m

## UL Japan, Inc.

## Yamakita EMC Lab.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011

Facsimile: +81 465 77 2112

## 4 System test configuration

### 4.1 Justification


The system was configured in typical fashion (as a customer would normally use it) for testing.

Test item	Operating mode	Tested frequency
Carrier frequency separation	Transmitting Hopping ON/Inquiry, Payload: PRBS9	-
20dB bandwidth & Maximum peak output power	Transmitting Hopping OFF/Inquiry, Payload: PRBS9	2402MHz, 2441MHz, 2480MHz
Number of hopping frequency	Transmitting Hopping ON/Inquiry, Payload: PRBS9	-
Dwell time	Transmitting (Hopping ON) -DH1 -DH3 -DH5	-
	-Inquiry	
	Transmitting (DH5), Payload: PRBS9 -Hopping ON/Inquiry -Hopping OFF	Spurious emission: 2402MHz, 2441MHz, 2480MHz Band edge compliance: 2402MHz, 2480MHz
	Transmitting (DH5), Payload: PRBS9	
99% occupied bandwidth	Transmitting (DH5), Payload: PRBS9 -Hopping ON -Hopping OFF	2402MHz, 2441MHz, 2480MHz

\* As a result of preliminary test, the formal test was performed with the above modes, which had the maximum payload (except Dwell time test)

\*\* AFH function is not used in the EUT.

### 4.2 Configuration and peripherals

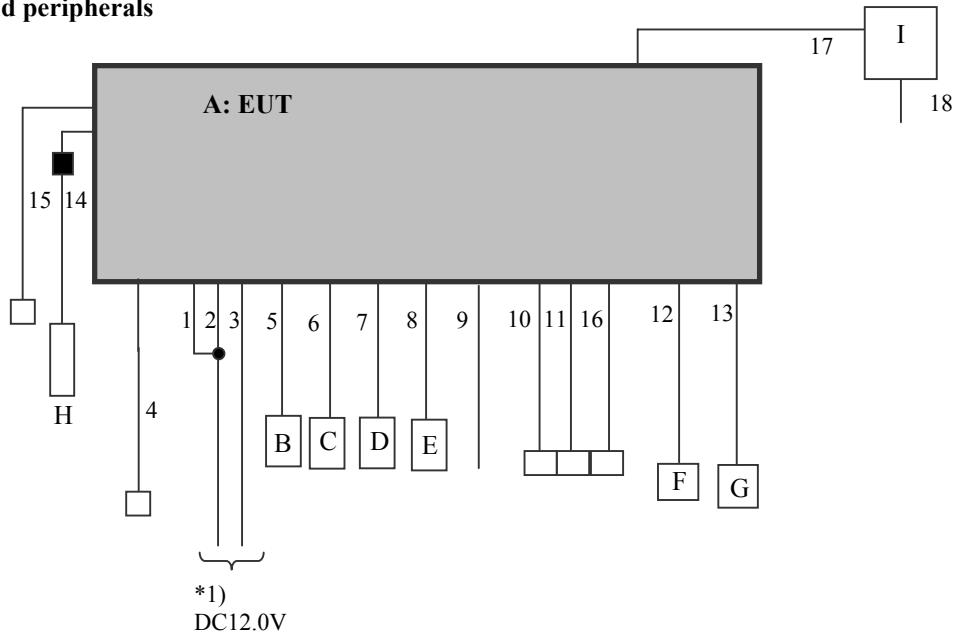

\* Test data was taken under worse case conditions.

**UL Japan, Inc.**

**Yamakita EMC Lab.**

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011

Facsimile: +81 465 77 2112

**Description of EUT and support equipment**

No.	Item	Model number	Serial number	Manufacturer	Remarks
A	CD Receiver	DEH-P6200BT	*2)	PIONEER	EUT
B	Speaker	TS-X350	-	PIONEER	-
C	Speaker	TS-X350	-	PIONEER	-
D	Dummy speaker load	RHA100N	-	-	-
E	Dummy speaker load	RHA100N	-	-	-
F	Hands free Microphone	-	-	PIONEER	-
G	Wired Remote controller	RM-X2S	-	PIONEER	-
H	USB memory	D33021	-	SONY	-
I	Hide-Away unit	XDV-P6	FAMD000017UC	PIONEER	-

\*1) DC power supply (Model No.: PAN35-10A) was used for DC 12.0V input.

\*2) Radiated emission: TPGE000004UC, Other test: TPGE000002UC

**List of cables used \*3)**

No.	Name	Length (m)	Shield		Remark
			Cable	Connector	
1	Accessory cable	0.15 + 2.5	Unshielded	Unshielded	-
2	Battery cable	0.15 + 2.5	Unshielded	Unshielded	-
3	Ground cable	0.15 + 2.5	Unshielded	Unshielded	-
4	Coaxial cable (Antenna)	0.20	Shielded	Shielded	Terminated
5	Speaker cable (Front L)	0.15 + 4.8	Unshielded	Unshielded	-
6	Speaker cable (Front R)	0.15 + 4.8	Unshielded	Unshielded	-
7	Speaker cable (Rear L)	0.15 + 4.8	Unshielded	Unshielded	-
8	Speaker cable (Rear R)	0.15 + 3.8	Unshielded	Unshielded	-
9	System Remote control cable	0.15	Unshielded	Unshielded	-
10	RCA cable (Front Output)	3.0	Unshielded	Unshielded	Terminated
11	RCA cable (Subwoofer Output)	3.0	Unshielded	Unshielded	Terminated
12	MIC cable	3.5	Unshielded	Unshielded	-
13	Wired Remote cable	1.7	Unshielded	Unshielded	
14	USB cable	0.5	Shielded	Unshielded	-
15	Stereo audio mini cable	1.4	Unshielded	Unshielded	Terminated
16	RCA cable (Rear Output)	3.0	Unshielded	Unshielded	Terminated
17	IP BUS cable	2.9	Unshielded	Unshielded	-
18	AV-BUS cable	0.1	Unshielded	Unshielded	-

\*3) All cables used for the measurement are exclusive use or marketed.

**UL Japan, Inc.**

**Yamakita EMC Lab.**

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011

Facsimile: +81 465 77 2112

## 5 Carrier frequency separation

### Test procedure

The carrier frequency separation was measured with a spectrum analyzer connected to the antenna port.

Summary of the test results: Pass

## 6 20dB bandwidth & Occupied bandwidth (99%)

### Test procedure

The bandwidth was measured with a spectrum analyzer connected to the antenna port.

The channel separation in Hopping mode and Inquiry mode was separated by 25kHz and 2/3 of the 20dB bandwidth.

Summary of the test results: Pass

## 7 Number of hopping frequency

### Test procedure

The Number of Hopping Frequency was measured with a spectrum analyzer connected to the antenna port.

Summary of the test results: Pass

## 8 Dwell time

### Test procedure

The Dwell time was measured with a spectrum analyzer connected to the antenna port.

Summary of the test results: Pass

## 9 Maximum peak output power

### Test procedure

The Maximum Peak Output Power was measured with a power meter connected to the antenna port.

Summary of the test results: Pass

## 10 Out of band emissions (Antenna port conducted)

### Test procedure

The Out of Band Emissions was measured with a spectrum analyzer connected to the antenna port.

In any 100kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator confirmed 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on a conducted measurement.

Summary of the test results: Pass

---

**UL Japan, Inc.**

**Yamakita EMC Lab.**

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011

Facsimile: +81 465 77 2112

## 11 Out of band emissions (Radiated)

### 11.1 Operating environment

The test was carried out in No.1 anechoic chamber.

### 11.2 Test configuration

EUT was placed on a urethane platform of nominal size, 0.9m by 1.8m, raised 80cm above the conducting ground plane to prevent the reflection influence. The configuration was set in accordance with ANSI C63.4: 2003. Photographs of the set up are shown in Appendix 1.

### 11.3 Test conditions

Frequency range : 30MHz - 26GHz  
Test distance : 3m

### 11.4 Test procedure

The Radiated Electric Field Strength intensity has been measured with a ground plane and at a distance of 3m. The measuring antenna height was varied between 1 and 4m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity.

The measurements were performed for both vertical and horizontal antenna polarization.  
Measurements were performed with QP, PK, and AV detector.

The radiated emission measurements were made with the following detector function of the test receiver.

Frequency	Below 1GHz	Above 1GHz
Instrument used	Test Receiver	Spectrum Analyzer
Detector IF Bandwidth	QP: BW 120kHz	PK: RBW: 1MHz/VBW: 1MHz, AV*1): RBW: 1MHz/VBW: See data
Measuring antenna	Biconical (30-300MHz) Logperiodic (300MHz-1GHz)	Horn

\*1) When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

The EUT was tested in the direction normally used.

### 11.5 Band edge

Band edge level at 2390MHz, 2400MHz and 2483.5MHz is below the limits of FCC 15.209. Refer to the data.

### 11.6 Results

Summary of the test results : Pass \*No noise was detected above the 5<sup>th</sup> order harmonics.

---

**UL Japan, Inc.**

**Yamakita EMC Lab.**

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011  
Facsimile: +81 465 77 2112

### **APPENDIX 1: Photographs of test setup**

Page 12 : Radiated emission

### **APPENDIX 2: Test data**

Page 13 : Carrier frequency separation

Page 14 - 15 : 20dB bandwidth

Page 16 - 18 : Number of hopping frequency

Page 19 - 26 : Dwell time

Page 27 : Maximum peak output power

Page 28 - 37 : Out of band emissions (Antenna Port Conducted)

Page 38 - 46 : Out of band emissions (Radiated)

Page 47 : Duty cycle

Page 48 - 49 : Occupied bandwidth

### **APPENDIX 3: Test instruments**

Page 50 : Test instruments

---

**UL Japan, Inc.**

**Yamakita EMC Lab.**

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011

Facsimile: +81 465 77 2112