

Company: PIONEER CORPORATION
Kind of Equipment: CD Receiver
Serial No.: TPGE000002UC


Report No.: 30CE0127-YK-01-A
Model No.: DEH-P6200BT
Power: DC 12.0V

Channel Separation (Regulation: FCC 15.247(a)(1))


UL Japan, Inc. Yamakita EMC lab. No.2 shielded room
Date: 2009.11.27
Temp./Humid.: 24 deg. C. / 44 %
Engineer: Minoru Nakatake
Test mode: Transmitting

Limit: ≥ 20dB Bandwidth (Power: No greater than 1W)

1. Hopping, DH5: 1.008MHz (20dB Bandwidth: 932.5kHz)

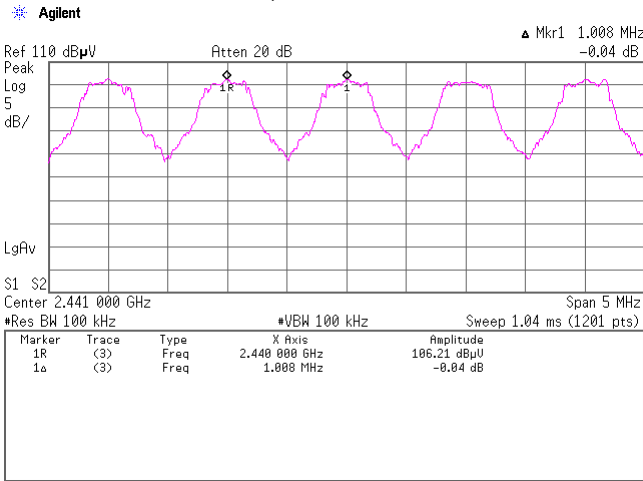

2. Inquiry: 2.004MHz (20dB Bandwidth: 820.0kHz)

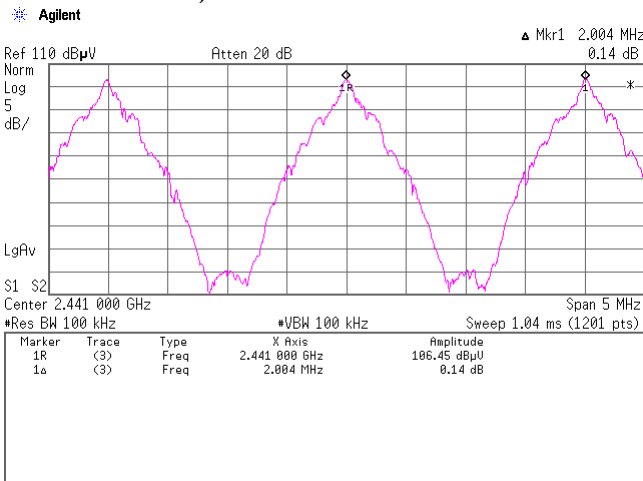

20dB Bandwidth (Regulation: FCC 15.247(a)(1))

UL Japan, Inc. Yamakita EMC lab.

Date:

Temp./Humid.:

Engineer:

Test mode:

No.2 shielded room

2009.11.27


24 deg. C. / 44 %

Minoru Nakatake


Transmitting

[Hopping off, DHS]


1. ch : 2402MHz/20dB Bandwidth:932.5kHz

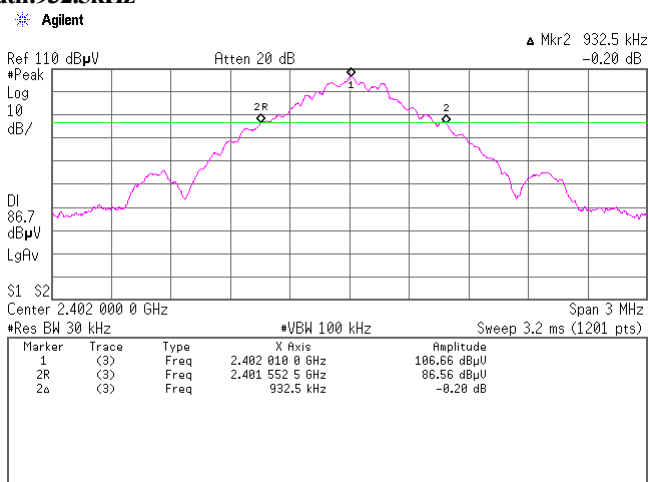

2. ch : 2441MHz/20dB Bandwidth:932.5kHz

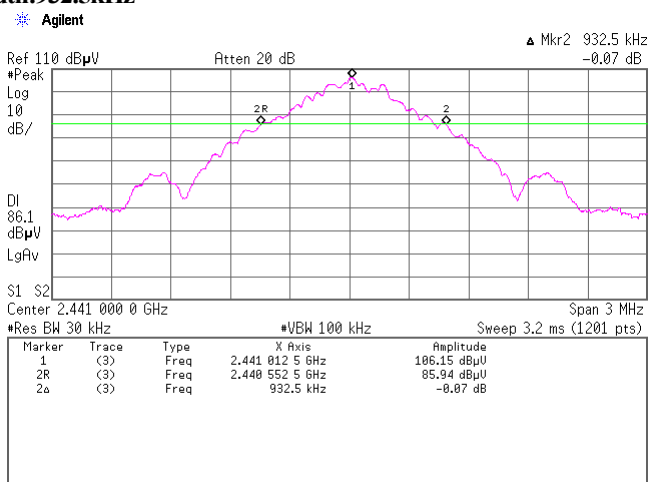


3. ch : 2480MHz/20dB Bandwidth:930.0kHz

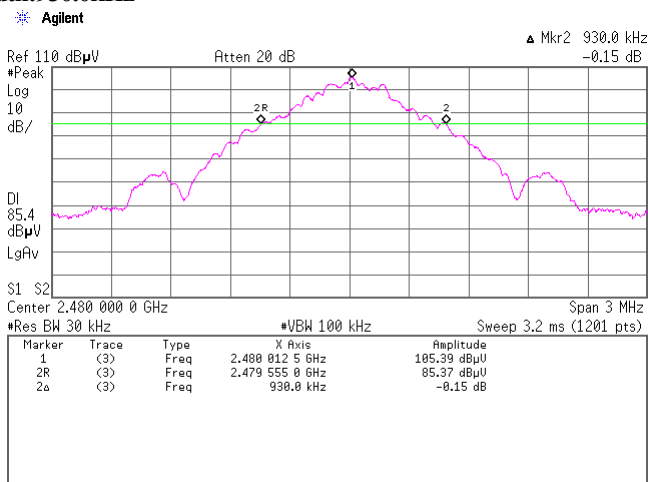

[Inquiry]

4. Inquiry/20dB Bandwidth:820.0kHz

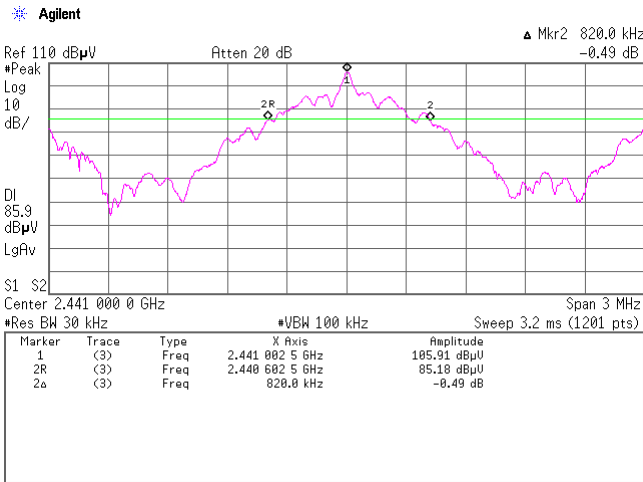


Channel Utilization (Regulation: FCC 15.247(a)(1)(iii))


UL Japan, Inc. Yamakita EMC lab. No.2 shielded room
Date: 2009.11.27
Temp./Humid.: 24 deg. C. / 44 %
Engineer: Minoru Nakatake
Test mode: Transmitting

Hopping, DH5: 79ch


1.

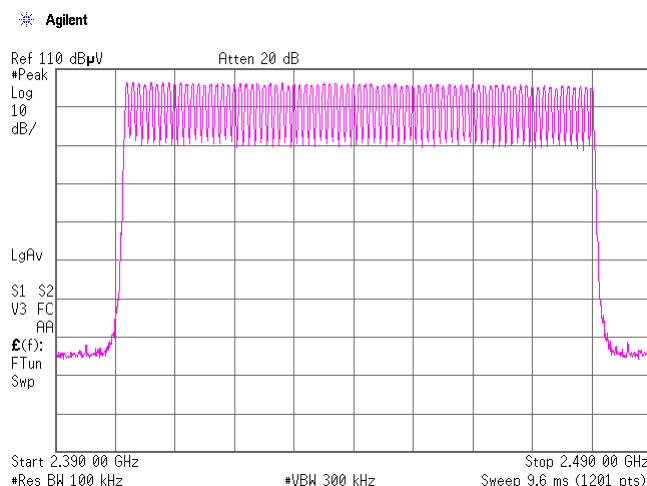


2.

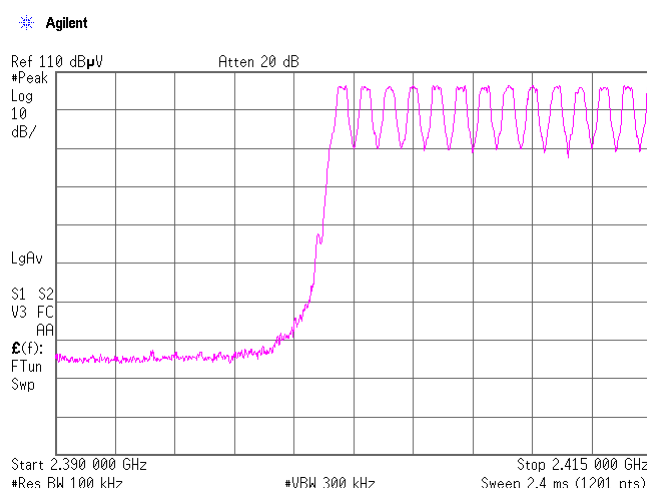


3.

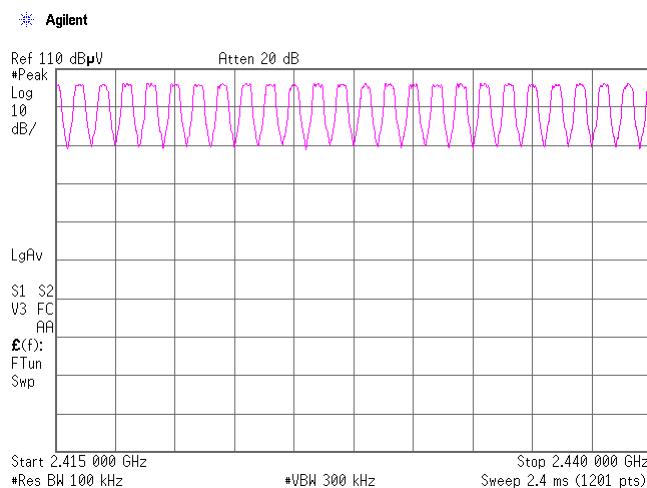


4.

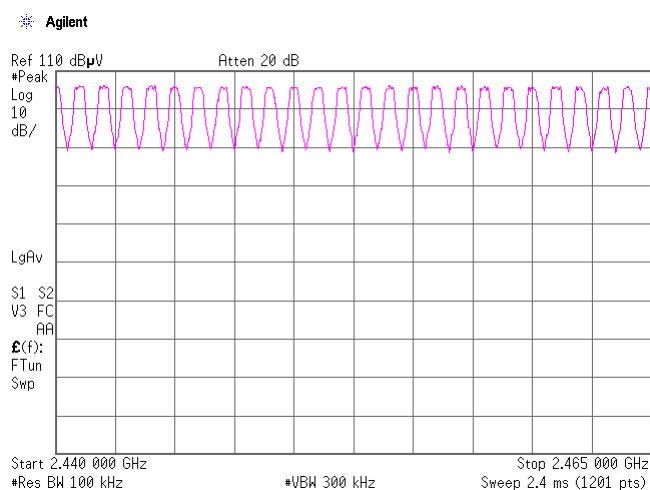

5.

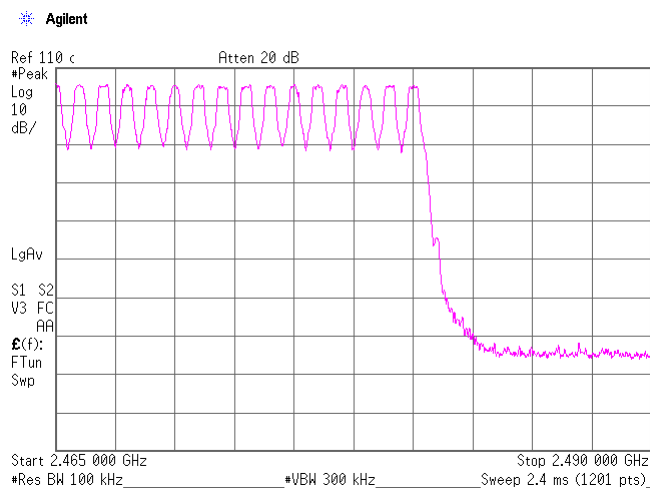

1. Inquiry: 32ch

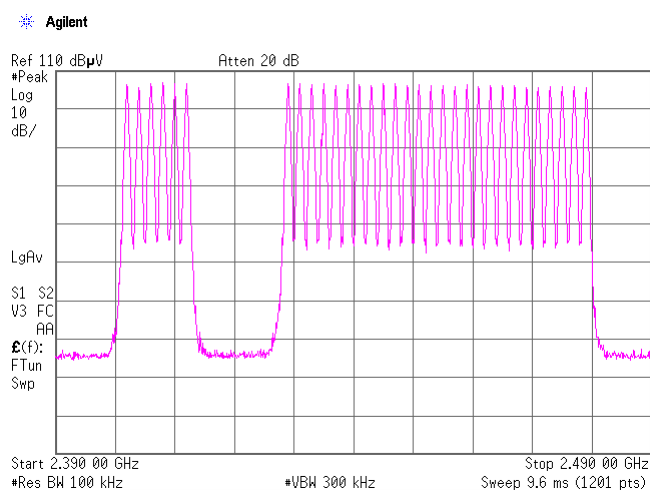

Company: PIONEER CORPORATION
Kind of Equipment: CD Receiver
Serial No.: TPGE000002UC

Report No.: 30CE0127-YK-01-A
Model No.: DEH-P6200BT
Power: DC 12.0V

Dwell Time (Regulation: FCC 15.247(a)(1)(iii))

UL Japan, Inc. Yamakita EMC lab.

No.2 Shielded room

Date:

2009.11.27

Temp./Humid.:

24 deg. C. / 44 %

Engineer:

Minoru Nakatake


Test mode:

Transmitting

Hopping (DH1):


Count 1

Agilent

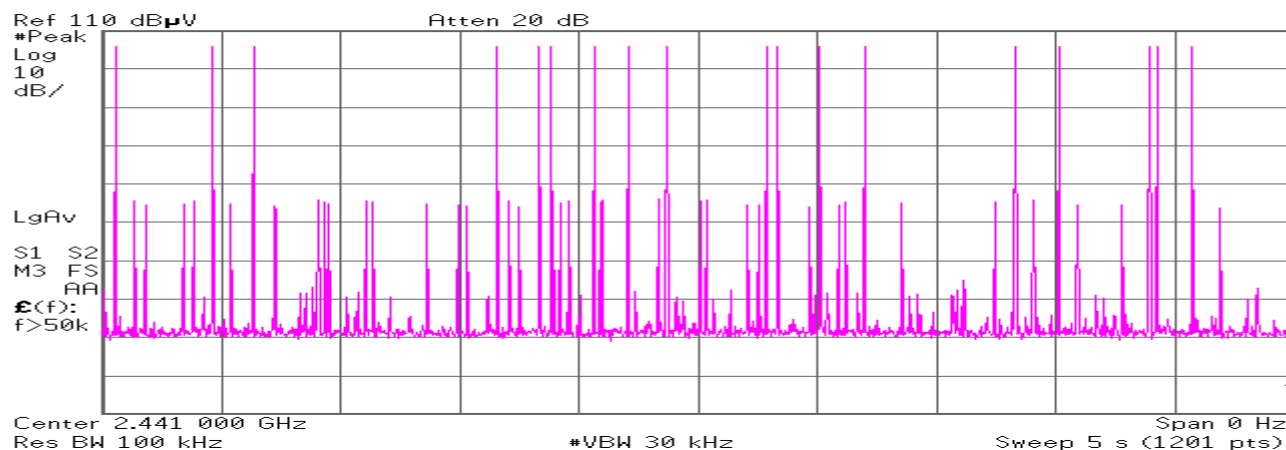


Count 2

Agilent

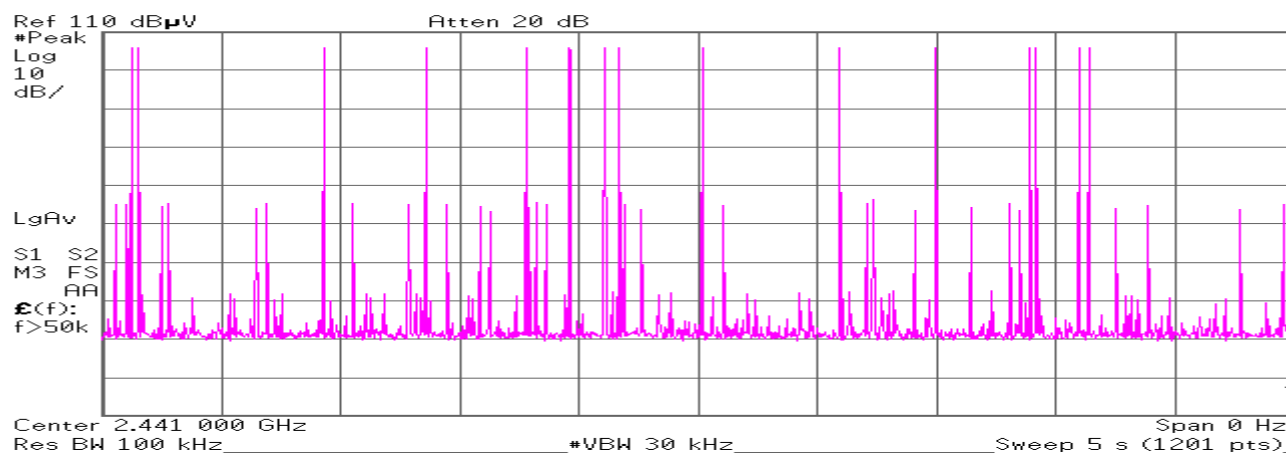


Count 3


Agilent

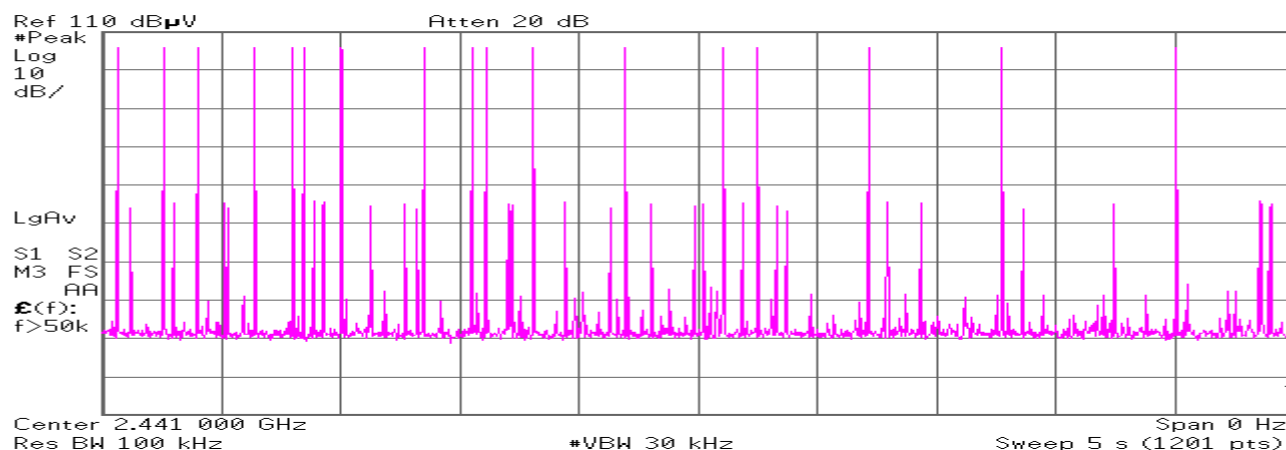

Count4

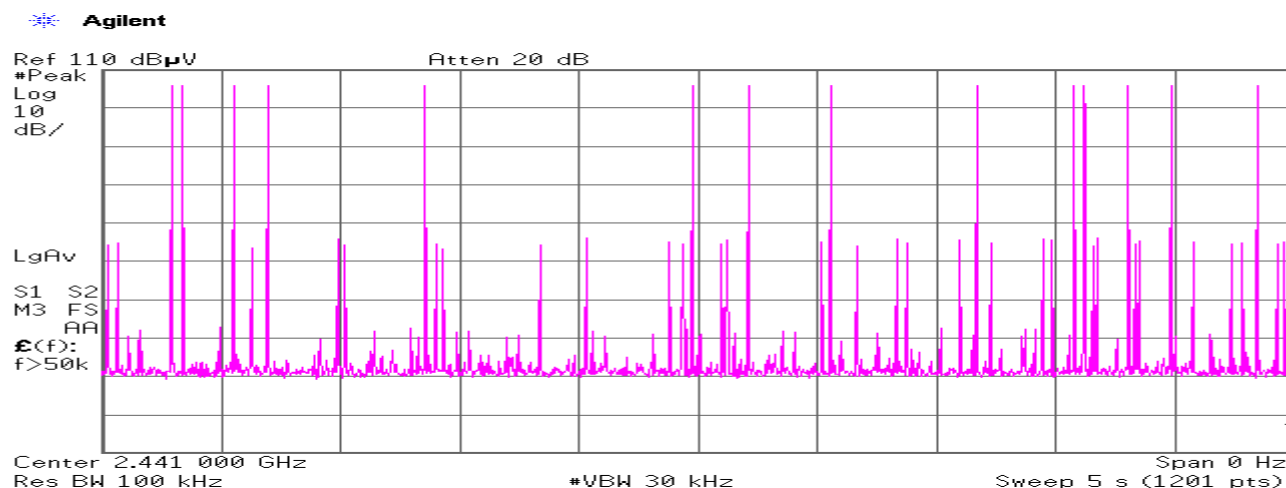

Count5

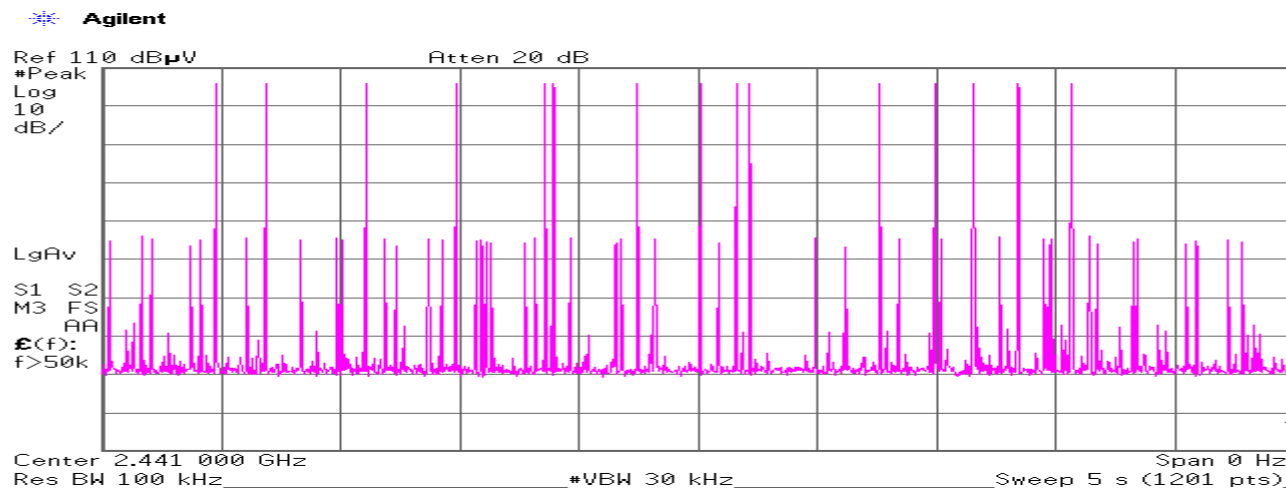

Duty cycle(Hopping DH1)



Average times of rising in 5 sec. of sweep = $(18 + 15 + 17 + 14 + 15) / 5 = 15.8$

Average times of rising in 1 sec. = $15.8 / 5s = 3.16$

Average times of rising in 0.4x = $0.4 * 79ch * 3.16 = 99.86$

Dwell time = $99.86 * 0.400 = 39.94 [ms]$


Limit : Dwell Time < 0.4[s]

Company: PIONEER CORPORATION
Kind of Equipment: CD Receiver
Serial No.: TPGE000002UC


Report No.: 30CE0127-YK-01-A
Model No.: DEH-P6200BT
Power: DC 12.0V

Hopping (DH3):


Count 1

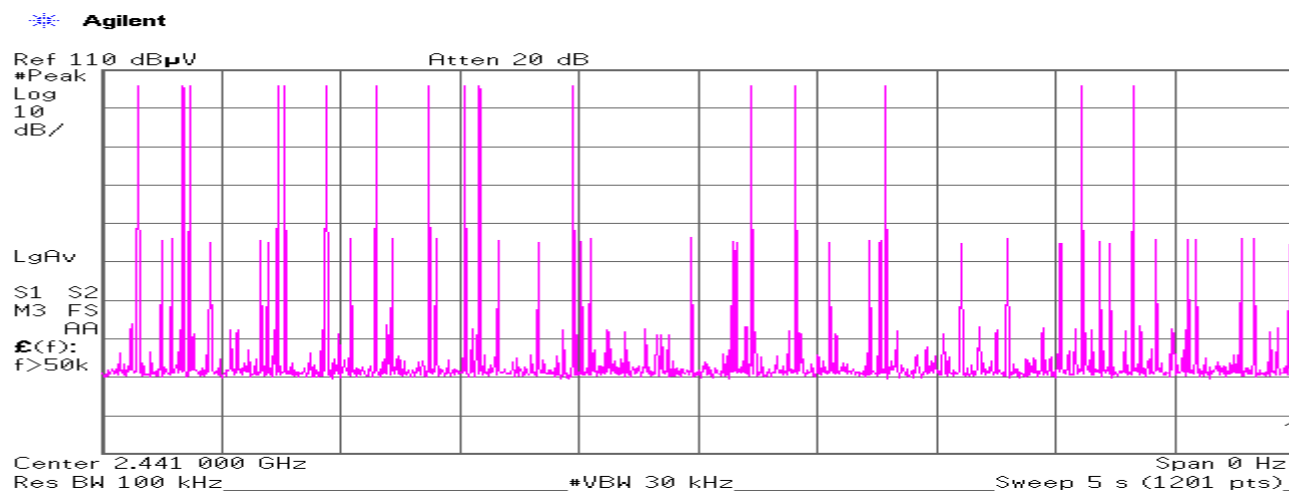


Count 2

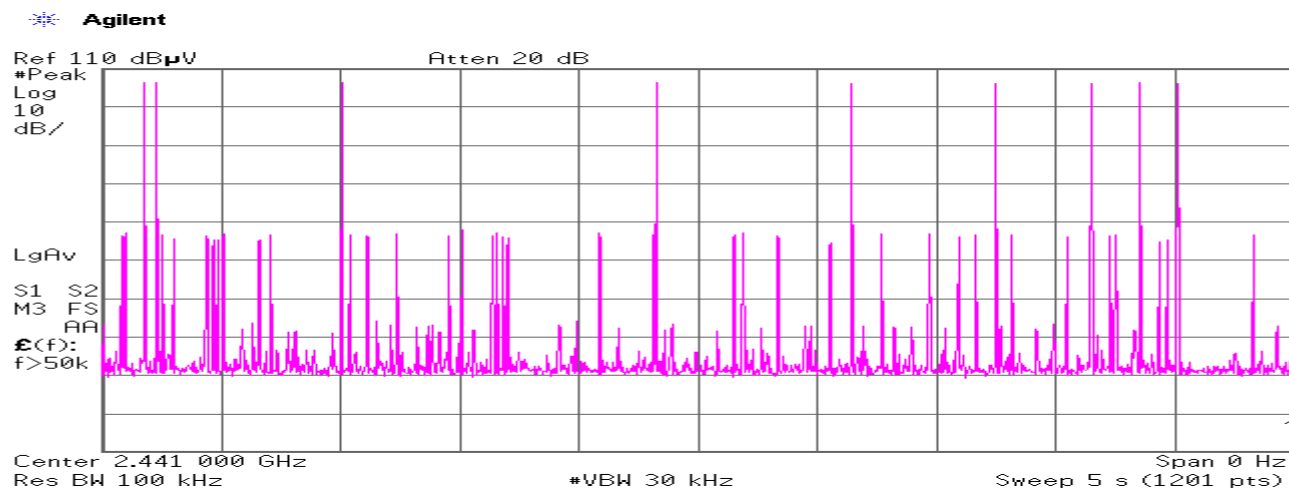


Count 3

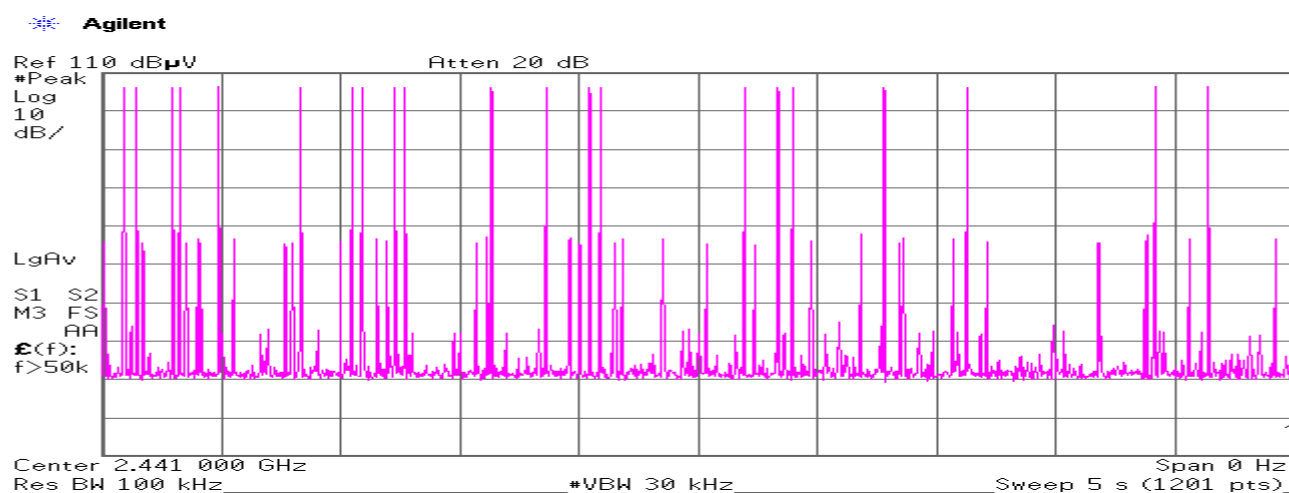


Count4

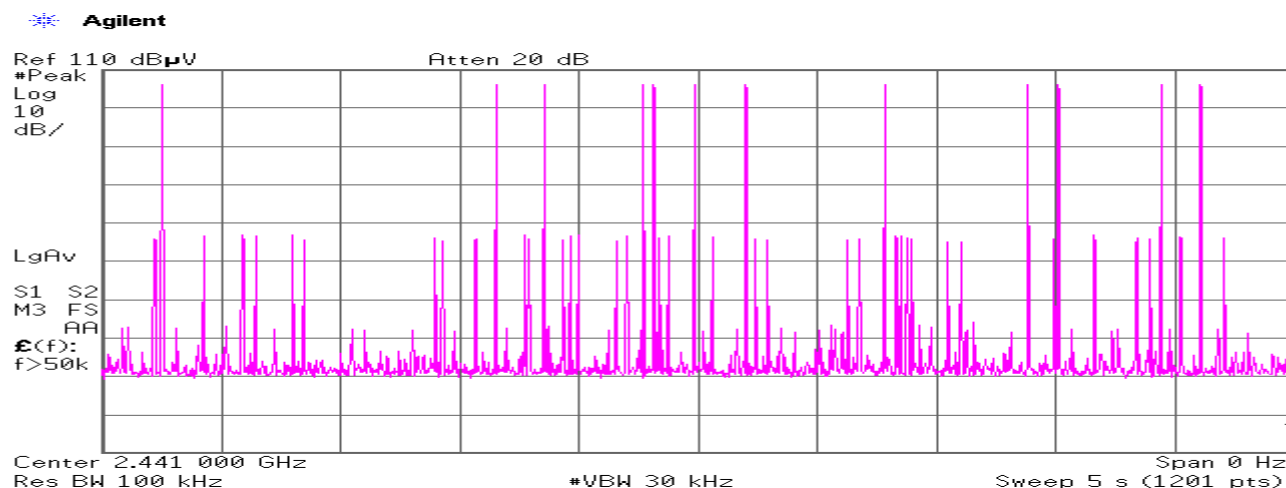

Count5

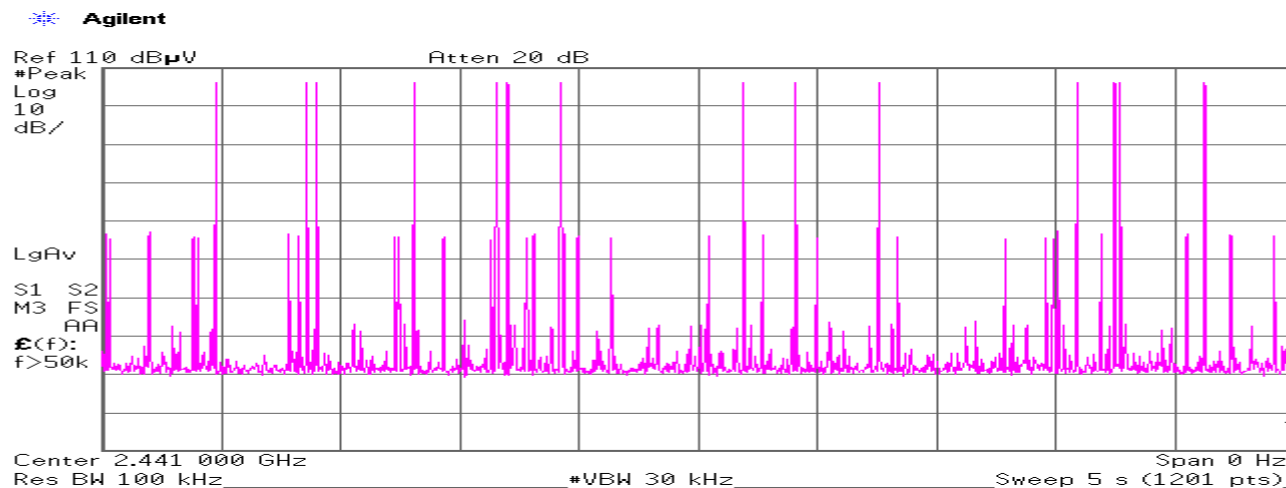

Duty cycle(Hopping DH3)

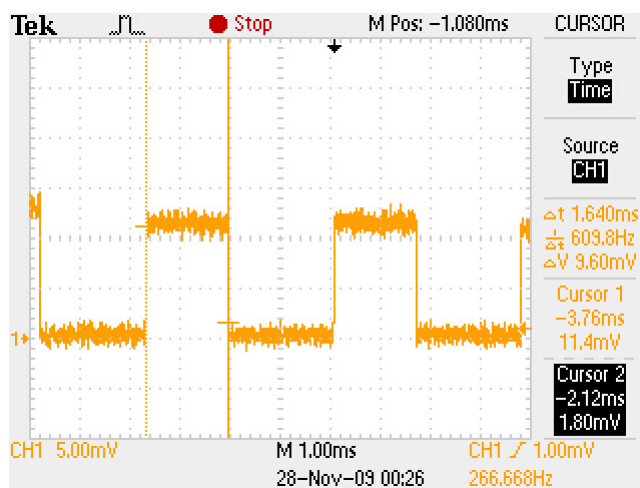

Average times of rising in 5 sec. of sweep = $(16 + 9 + 22 + 12 + 14) / 5 = 14.6$

Average times of rising in 1 sec. = $14.6 / 5s = 2.92$

Average times of rising in 0.4x = $0.4 * 79ch * 2.92 = 92.27$

Dwell time = $92.27 * 1.64 = 151.33 [ms]$


Limit : Dwell Time < 0.4[s]

Company: PIONEER CORPORATION
Kind of Equipment: CD Receiver
Serial No.: TPGE000002UC


Report No.: 30CE0127-YK-01-A
Model No.: DEH-P6200BT
Power: DC 12.0V

Hopping (DHS):


Count 1

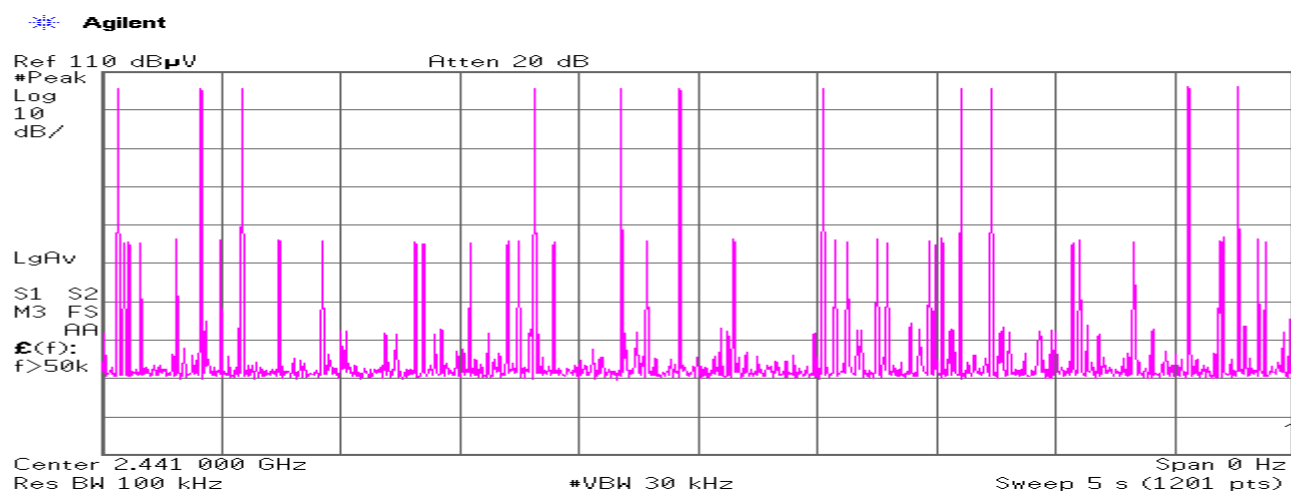


Count 2

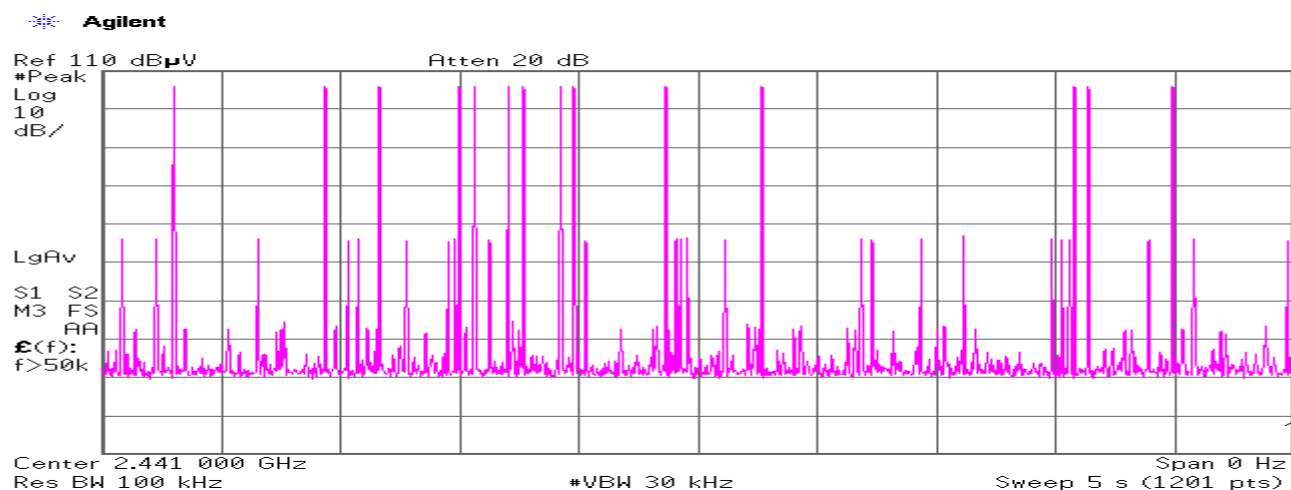


Count 3

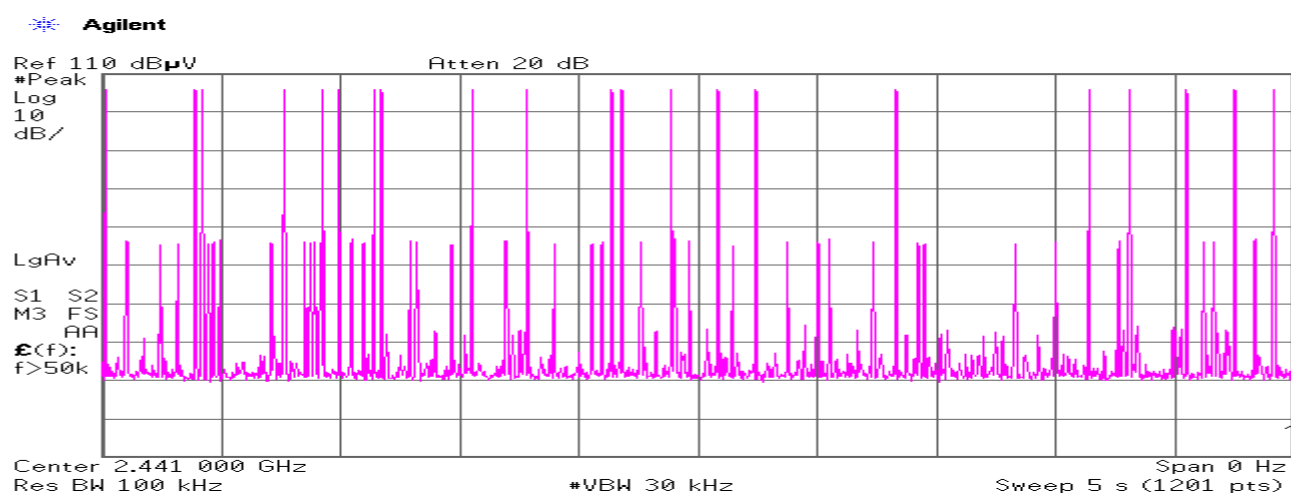


Count4

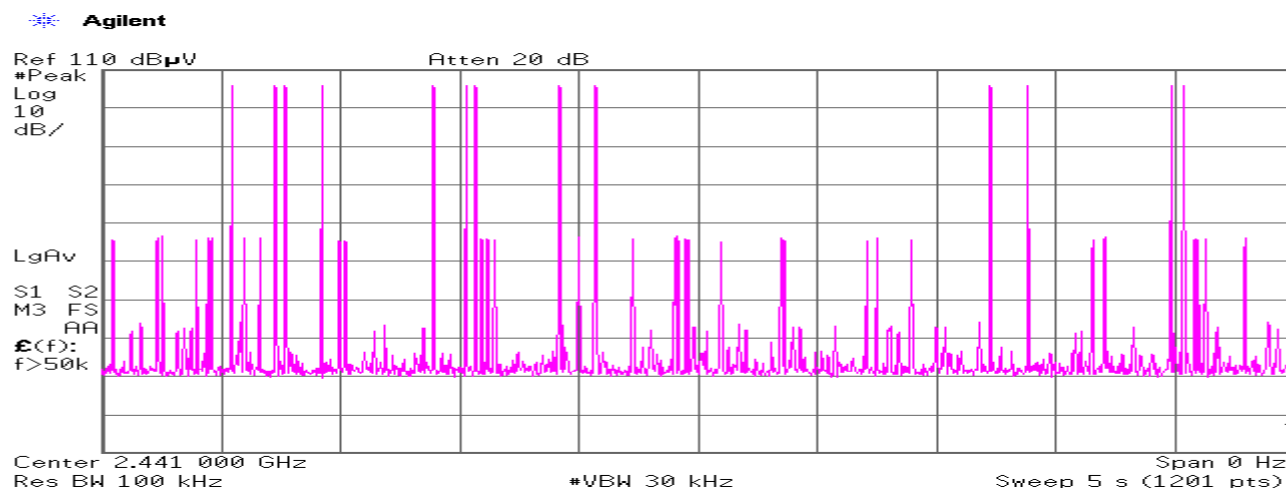

Count5

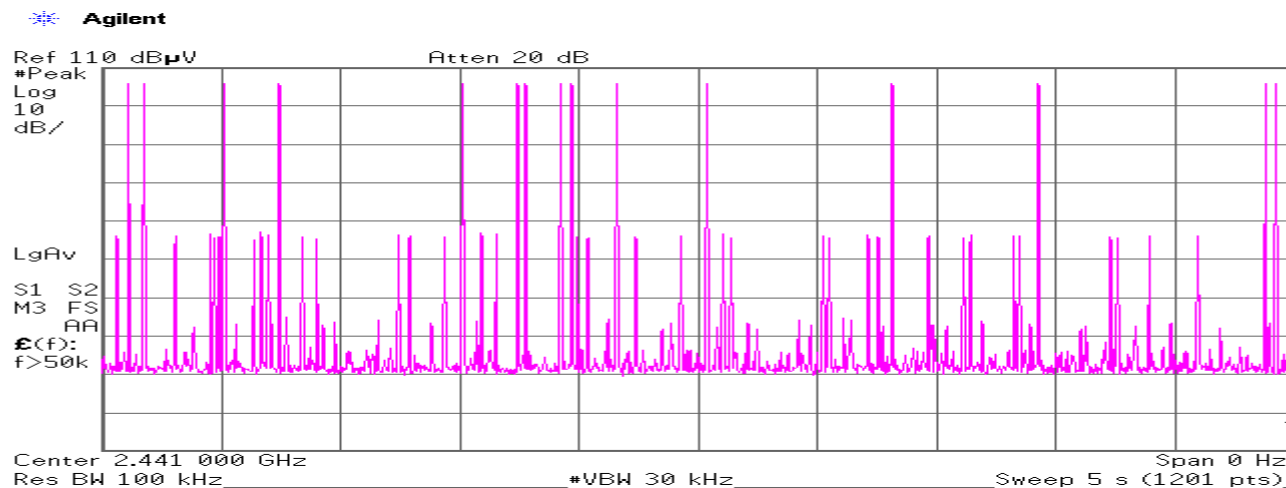

Duty cycle(Hopping DH5)

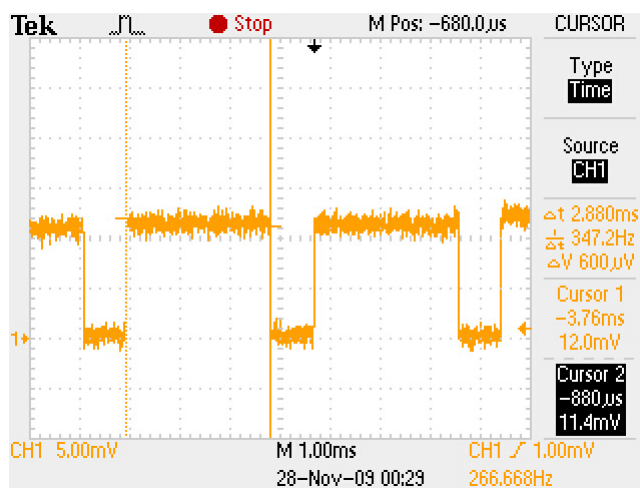

Average times of rising in 5 sec. of sweep = $(11 + 14 + 21 + 13 + 15) / 5 = 14.8$

Average times of rising in 1 sec. = $14.8 / 5s = 2.96$

Average times of rising in 0.4x = $0.4 * 79ch * 2.96 = 93.54$

Dwell time = $93.54 * 2.88 = 269.38$ [ms]

Limit : Dwell Time < 0.4[s]

Company: PIONEER CORPORATION
Kind of Equipment: CD Receiver
Serial No.: TPGE000002UC

Report No.: 30CE0127-YK-01-A
Model No.: DEH-P6200BT
Power: DC 12.0V


Inquiry:
Count 1




Count 2




Count 3

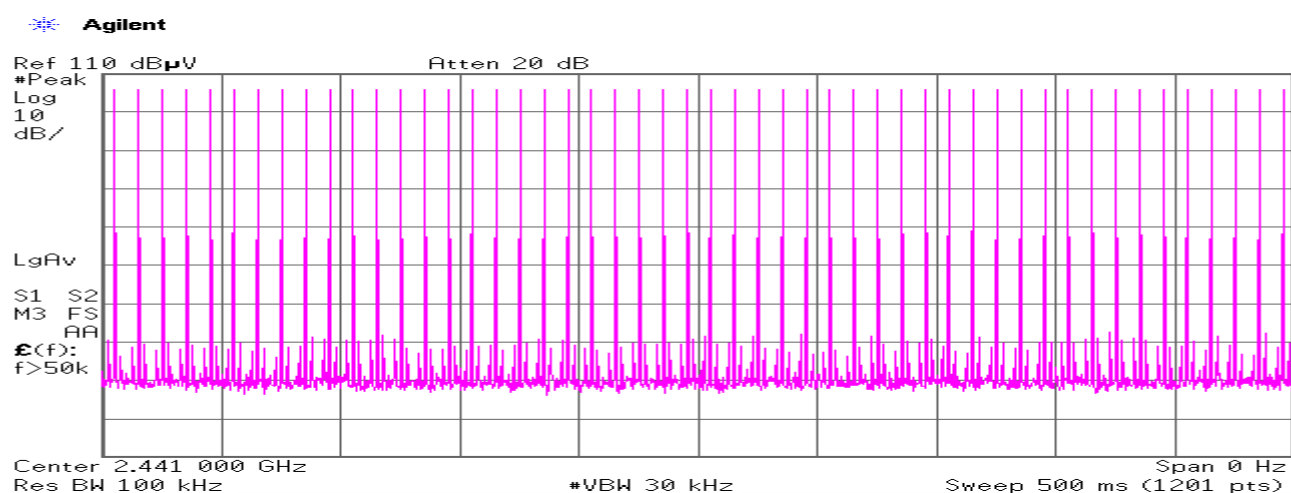


Count4

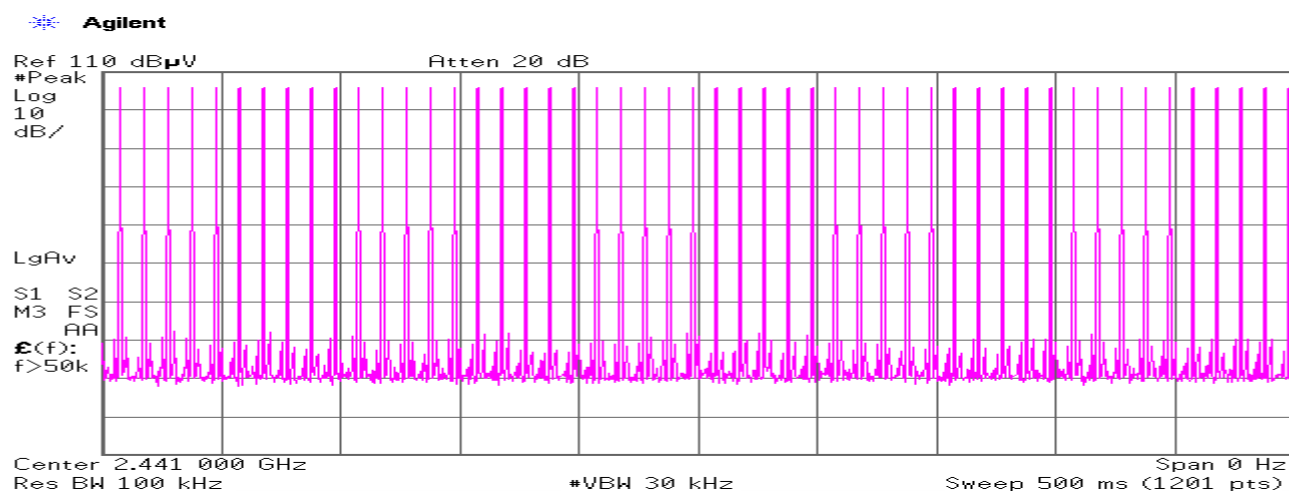

Count5

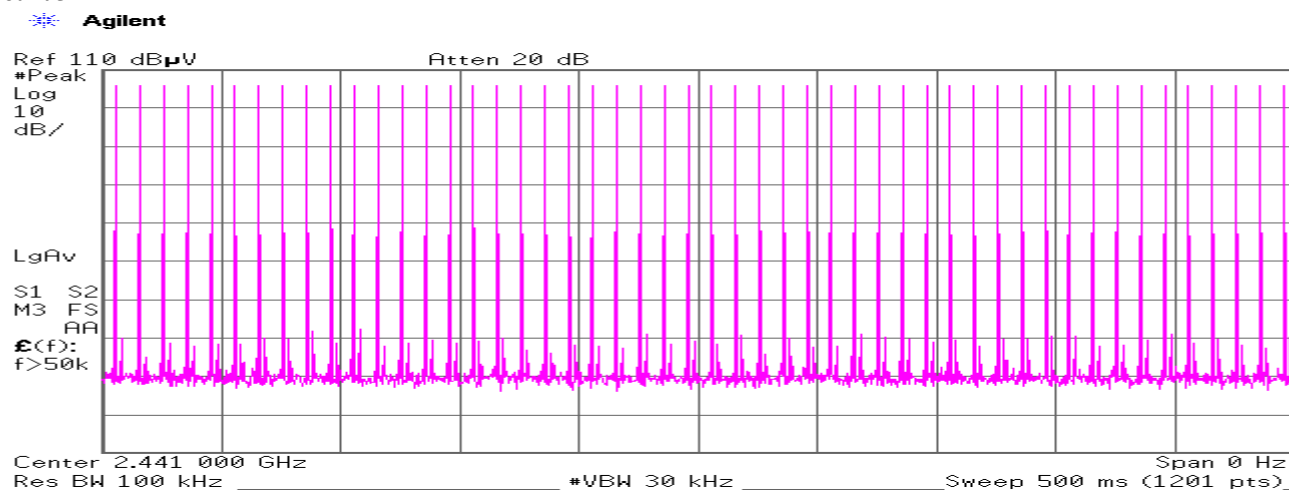

Duty cycle(Inquiry)

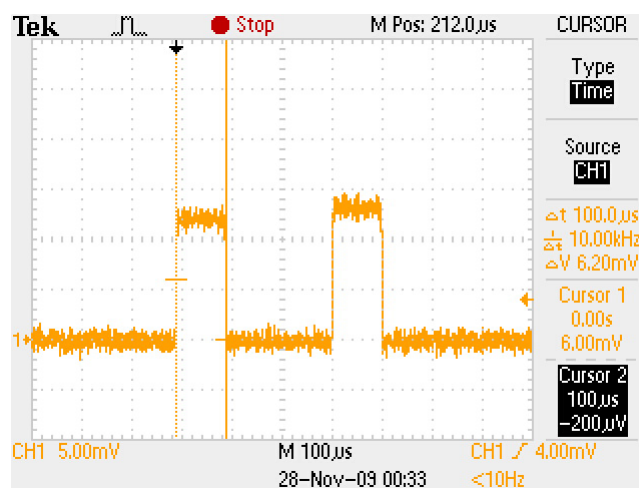

Average times of rising in 0.5 sec. of sweep = $(50 + 50 + 50 + 50 + 50) / 5 = 50.0$

Average times of rising in 1 sec. = $50.0 / 0.5s = 100.0$

Average times of rising in 0.4x = $0.4 * 32ch * 100.0 = 1280.0$

Dwell time = $1280.0 * 0.100 = 128.0$ [ms]

Limit : Dwell Time < 0.4[s]

Company: PIONEER CORPORATION
 Kind of Equipment: CD Receiver
 Serial No.: TPGE000002UC

Report No.: 30CE0127-YK-01-A
 Model No.: DEH-P6200BT
 Power: DC 12.0V

Maximum Peak Conducted Output Power (Regulation: FCC 15.247(b)(1))

UL Japan, Inc Yamakita EMC lab.
 No.2 Shielded Room

DATE: 2009.11.27
 TEMP./HUMID.: 24deg.C/44%
 TEST MODE: Transmitting

ENGINEER: Minoru Nakatake

DH5

CH	FREQ [GHz]	P/M Reading [dBm]	Cable Loss [dB]	Results [dBm]	Limit (1W) [dBm]	MARGIN [dB]
Low	2402.00	-0.50	1.18	0.68	30.00	29.32
Mid	2441.00	-0.95	1.21	0.26	30.00	29.74
High	2480.00	-1.36	1.27	-0.09	30.00	30.09
Inquiry	-	-0.64	1.21	0.57	30.00	29.43

Limit: 1W=30dBm

P/M: Power Meter

CABLE LOSS:Customer's cable + KCC-D20

Out of Band Emission (Antenna Terminal Conducted) (Regulation: FCC 15.247(d))

UL Japan, Inc. Yamakita EMC lab.
Date:
Temp./Humid.:
Engineer:
Test mode:

No.2

shielded room

2009.11.27

24 deg. C. / 44 %


Minoru Nakatake

Transmitting


[Transmitting DH5]

Ch:2402MHz


1.

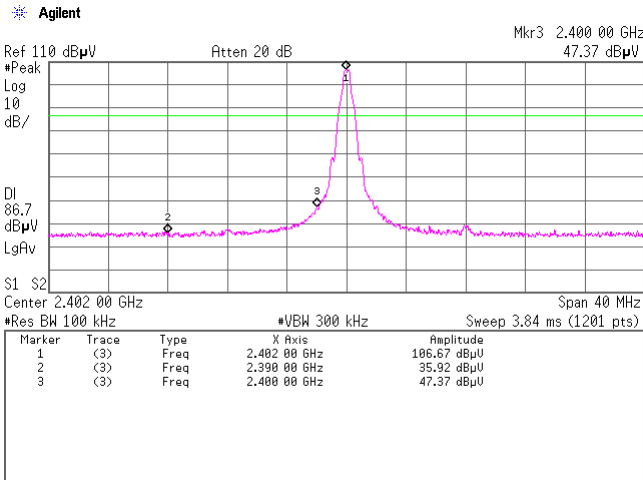

2.

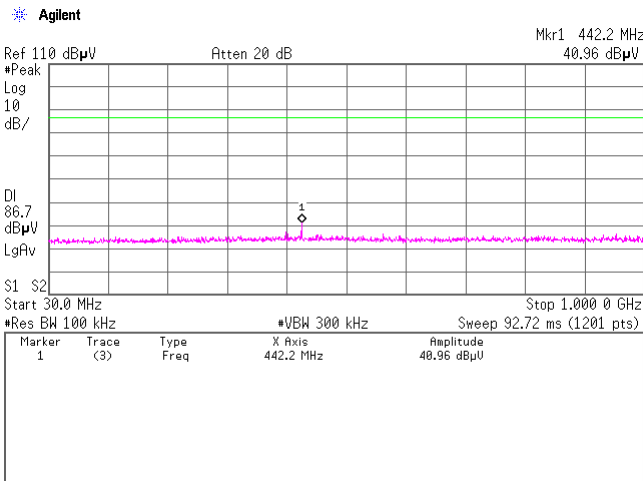


3.

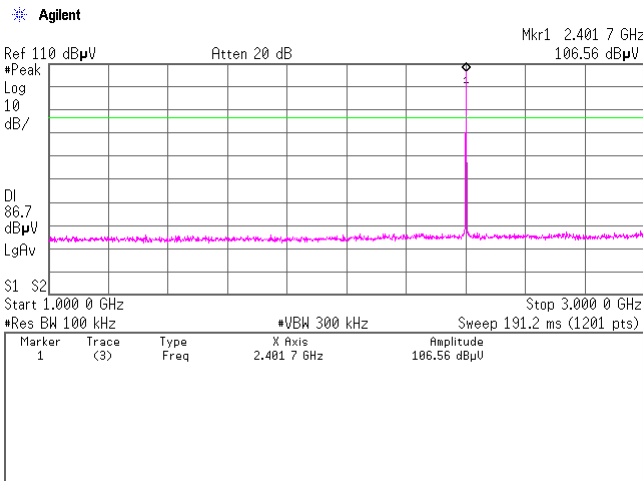


[Transmitting DHS]
Ch:2402MHz


4.

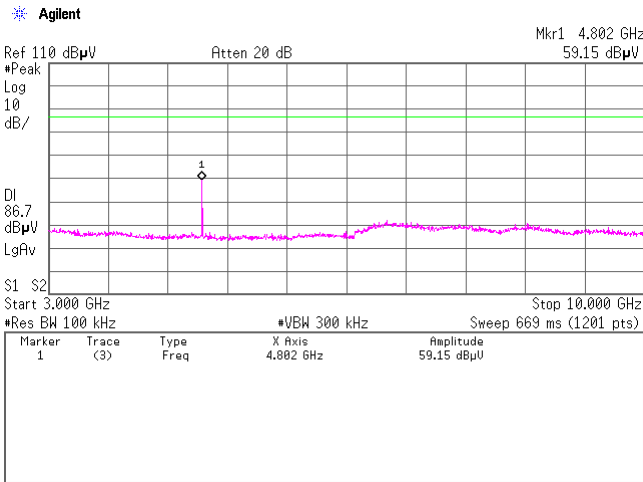

5.

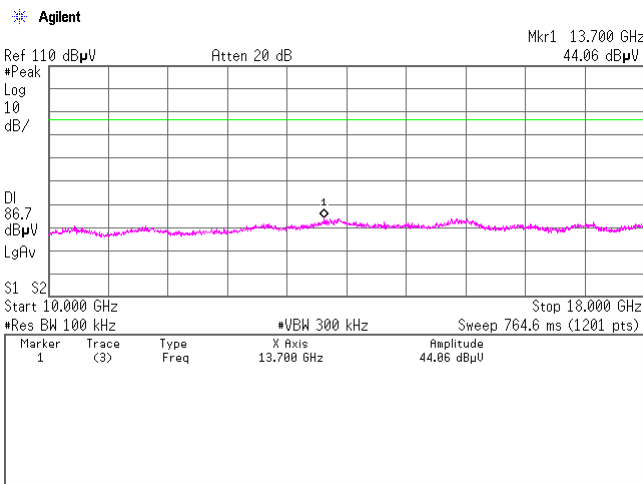


6.

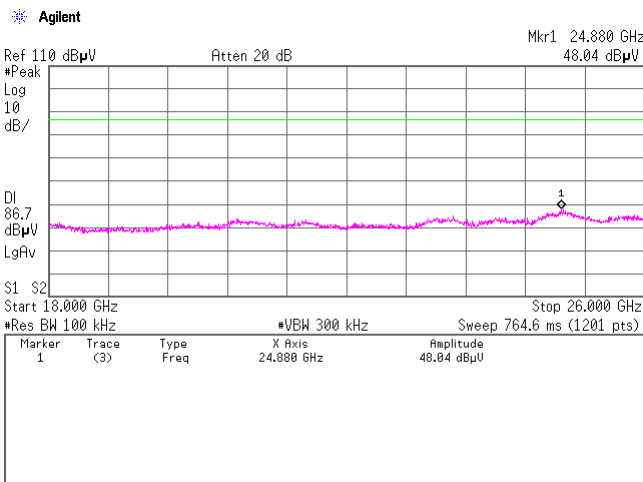


[Transmitting DHS]
Ch:2441MHz


1.

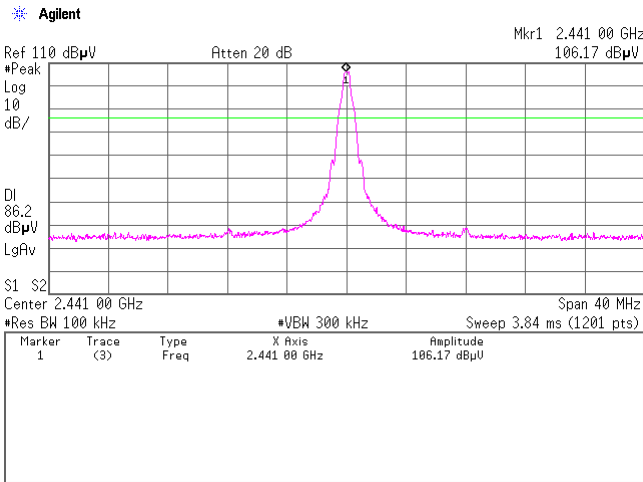

2.

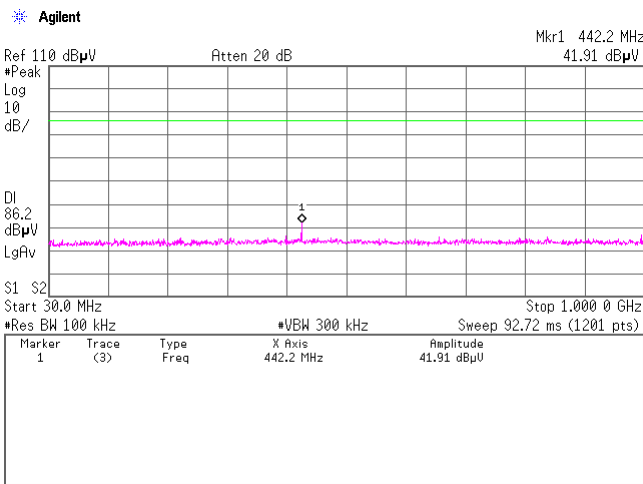

3.

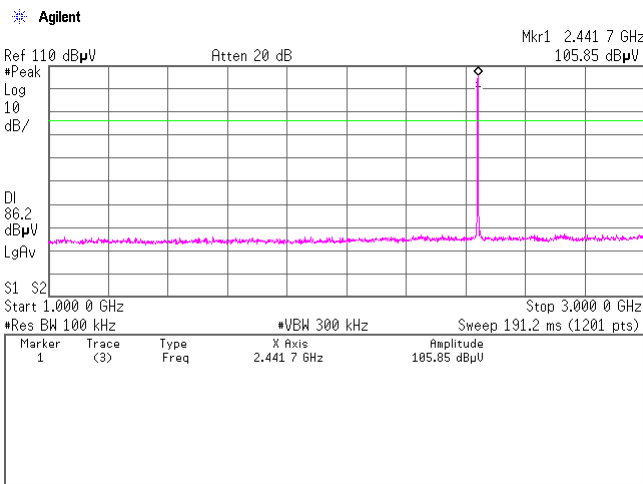

Company:
Kind of Equipment:
Serial No.:


PIONEER CORPORATION
CD Receiver
TPGE000002UC

Report No.:
Model No.:
Power:


30CE0127-YK-01-A
DEH-P6200BT
DC 12.0V

[Transmitting DHS]
Ch:2441MHz


4.

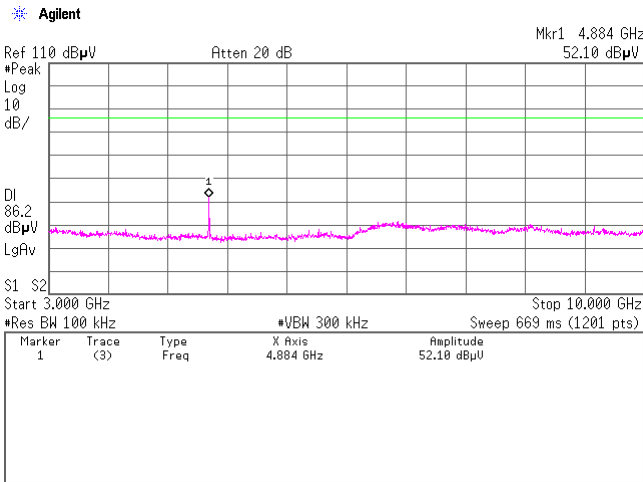

5.

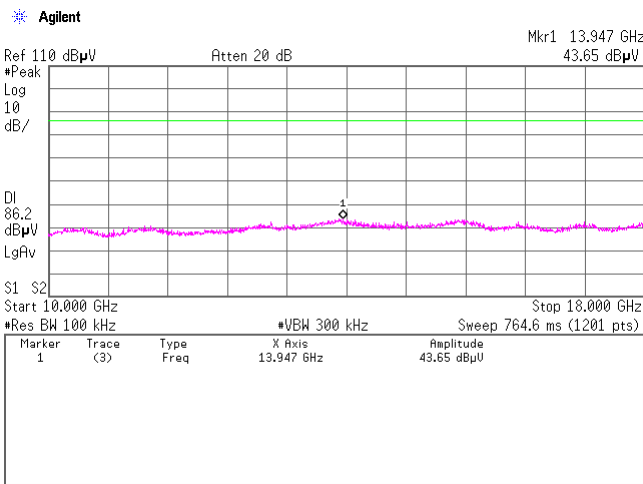


6.

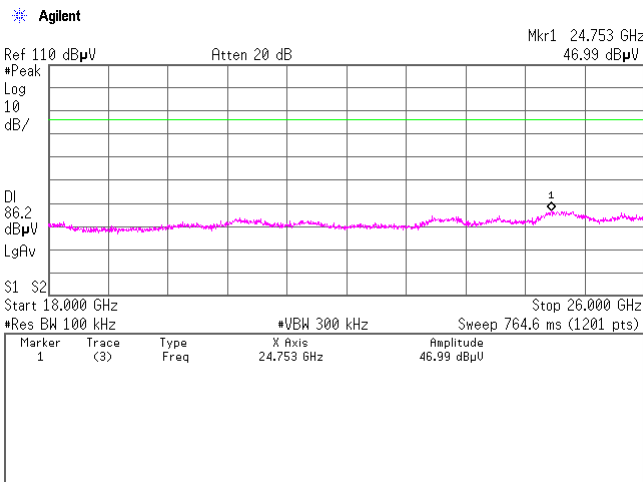


[Transmitting DHS]
Ch:2480MHz


1.

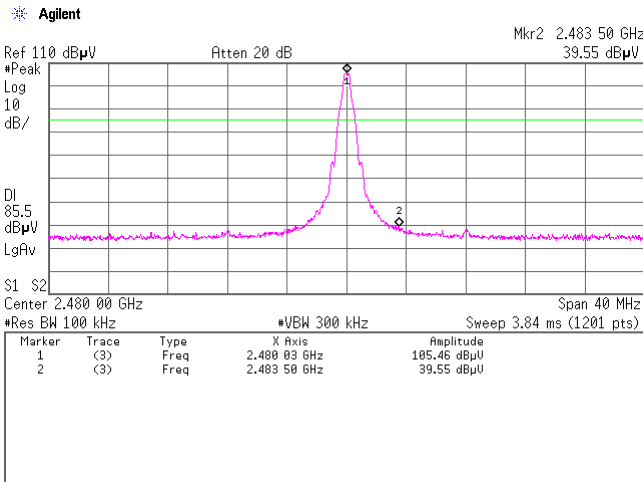

2.

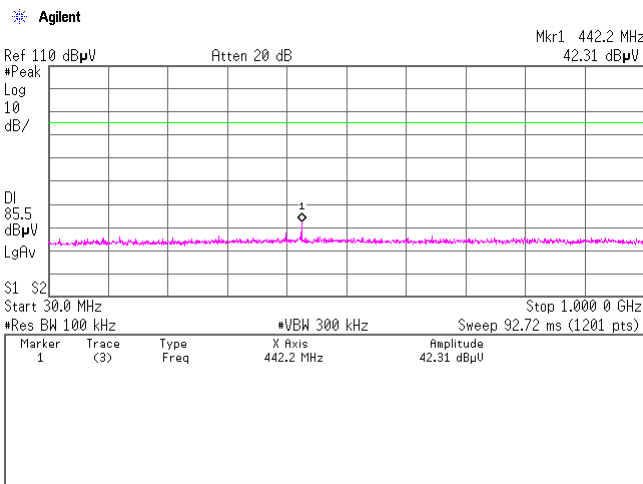

3.

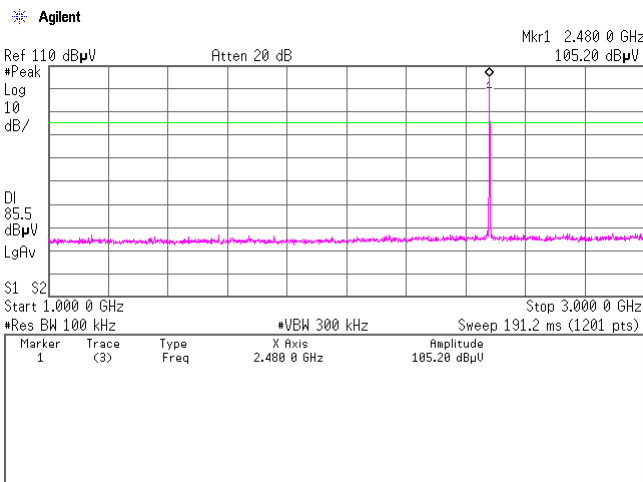

Company:
Kind of Equipment:
Serial No.:


PIONEER CORPORATION
CD Receiver
TPGE000002UC

Report No.:
Model No.:
Power:


30CE0127-YK-01-A
DEH-P6200BT
DC 12.0V

[Transmitting DHS]
Ch:2480MHz


4.

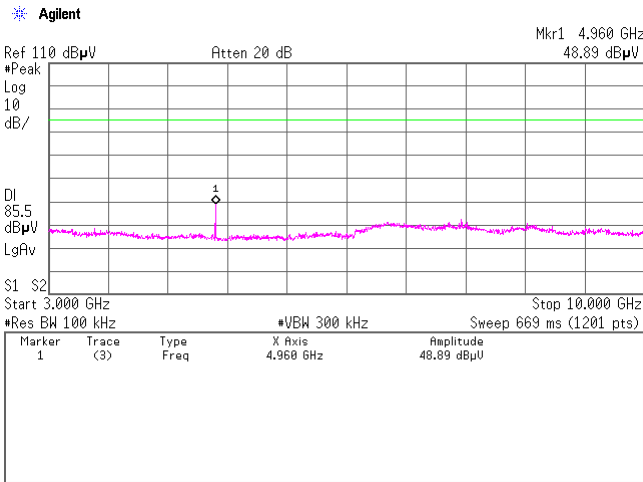

5.

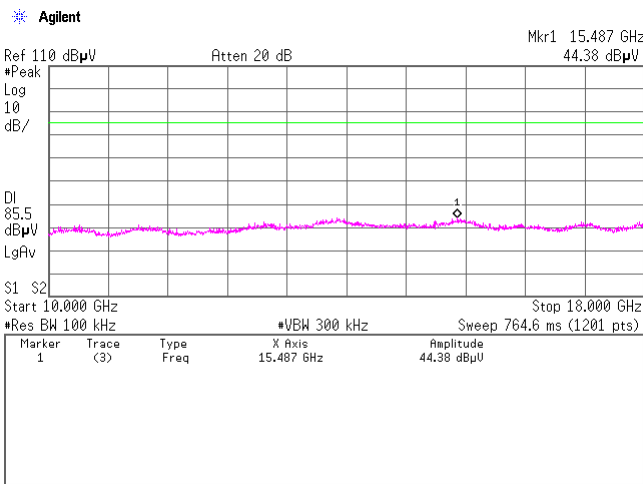


6.

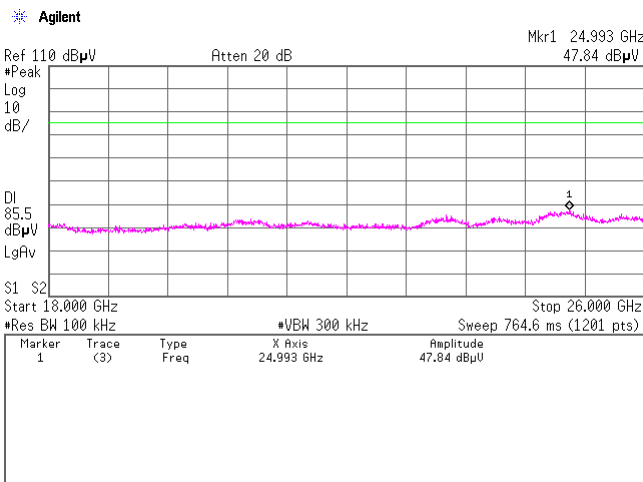


[Transmitting DHS]
Hopping


1.

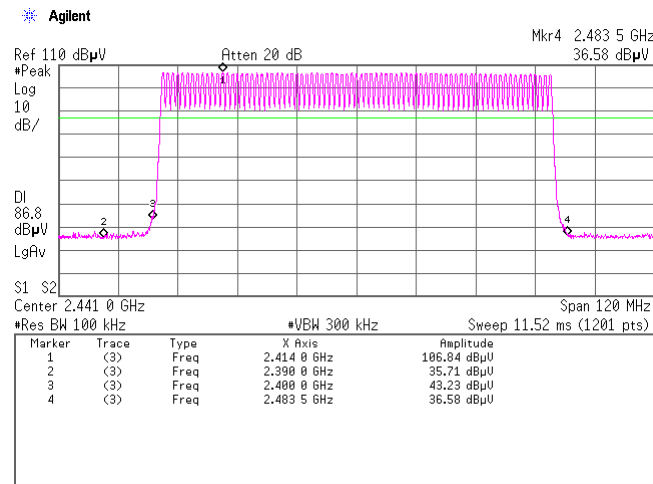

2.

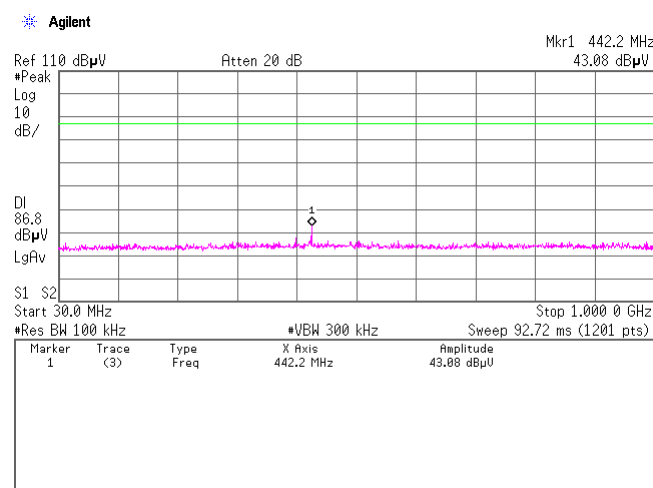

3.

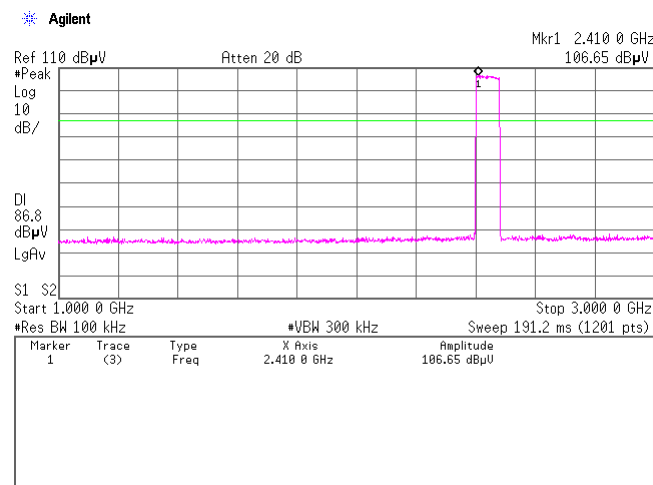

Company:
Kind of Equipment:
Serial No.:


PIONEER CORPORATION
CD Receiver
TPGE000002UC

Report No.:
Model No.:
Power:


30CE0127-YK-01-A
DEH-P6200BT
DC 12.0V

[Transmitting DHS]
Hopping


4.

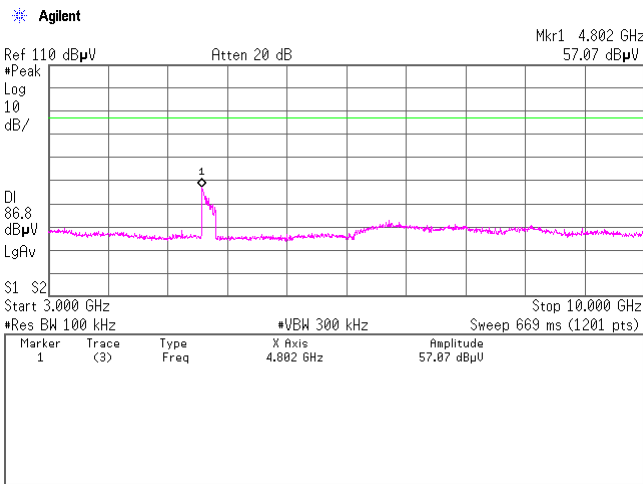

5.

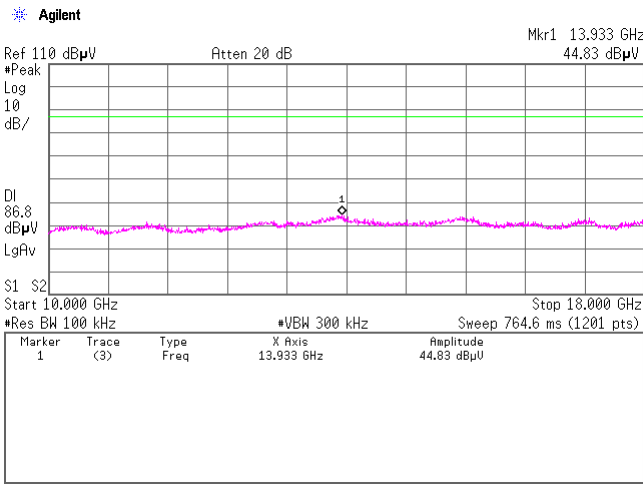


6.

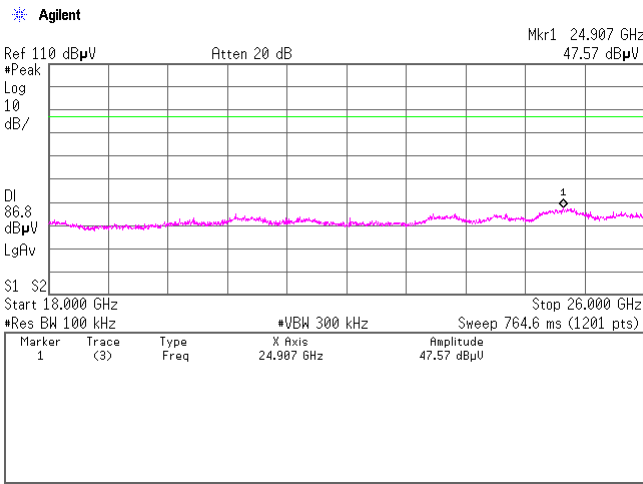


[Transmitting]
Inquiry


1.

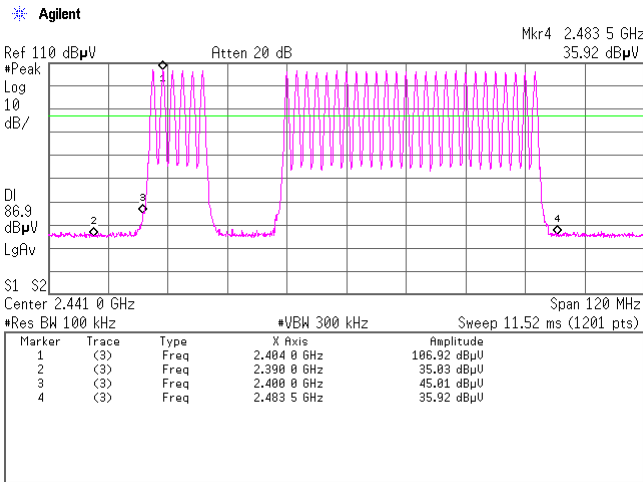




2.

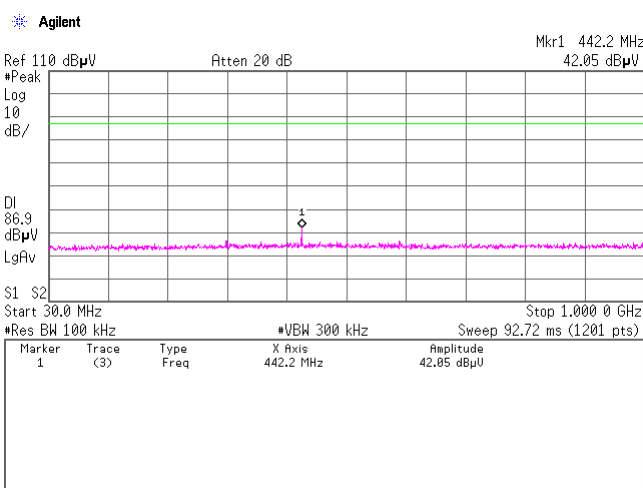

3.

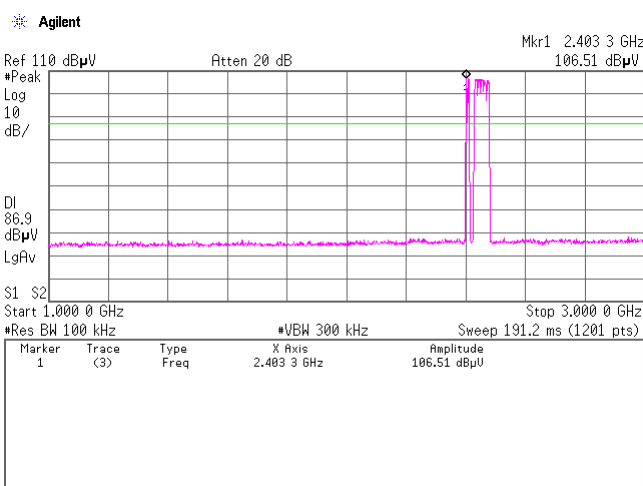

[Transmitting]
Inquiry

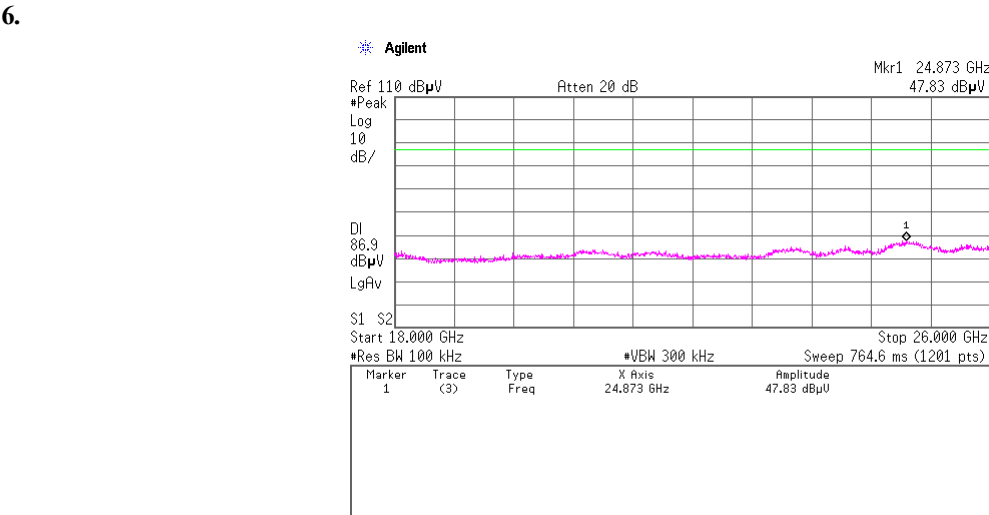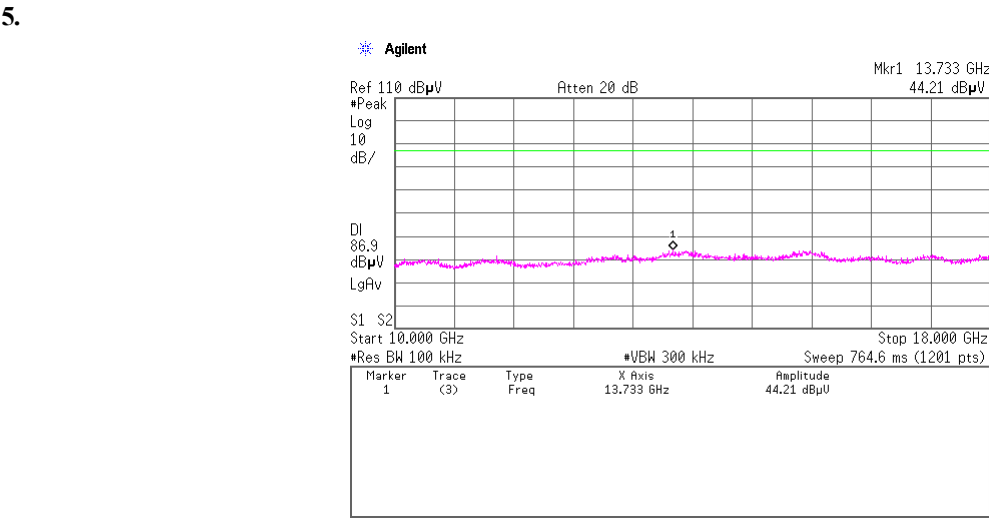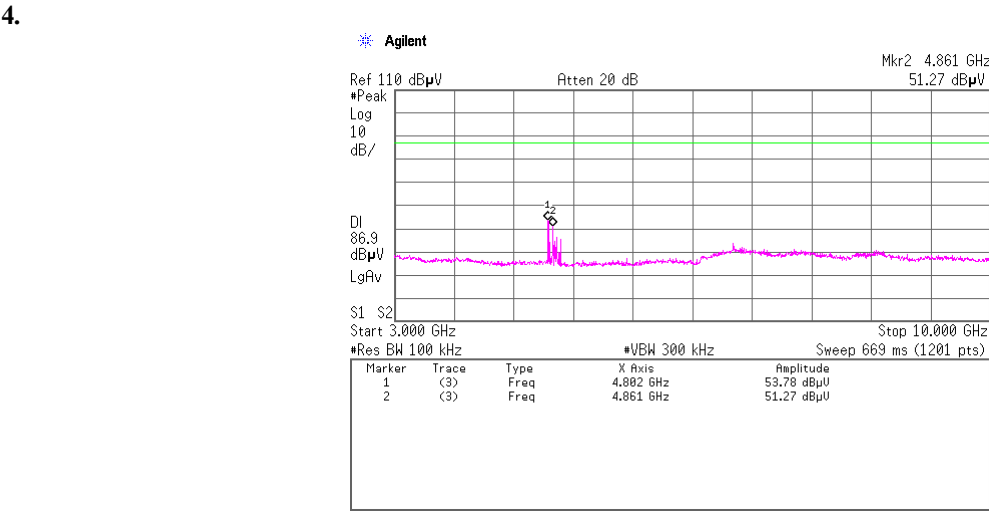

Data of Radiated Disturbance Test

UL Japan, Inc.

YAMAKITA No.1 Semi-anechoic chamber

Report No. : 30CE0127-YK-01-A

Applicant	: PIONEER CORPORATION		
Kind of Equipment	: CD Receiver		
Model No.	: DEH-P6200BT		
Serial No.	: TPGE000004UC		
Power	: DC12V		
Mode	: Transmitting (2402MHz)		
Remarks	: -		
Date	: 11/27/2009		
Test Distance	: 3 m		
Temperature	: 20 °C	Engineer	: Yasumasa Owaki
Humidity	: 49 %		
Regulation	: FCC Part15C § 15.209		

No.	FREQ. [MHz]	ANT TYPE	READING		ANT FACTOR [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	ATTEN. [dB]	RESULT		LIMITS [dB μ V/m]	MARGIN	
			HOR [dB μ V]	VER [dB μ V]					HOR [dB μ V/m]	VER [dB μ V/m]		HOR [dB]	VER [dB]
1.	200.40	BB	34.2	32.8	16.7	28.0	3.2	6.0	32.1	30.7	43.5	11.4	12.8
2.	240.04	BB	36.4	28.5	17.5	27.7	3.5	6.0	35.7	27.8	46.0	10.3	18.2
3.	311.66	BB	40.8	36.2	14.7	27.6	4.2	3.0	35.1	30.5	46.0	10.9	15.5
4.	368.14	BB	38.8	29.6	16.2	28.1	4.7	3.0	34.6	25.4	46.0	11.4	20.6

CALCULATION: READING + ANT.FACTOR + CABLE LOSS - AMP.GAIN + ATTEN.

Except for the above table : adequate margin data below the limits.

■ANT:KBA-03(<300MHz)/KLA-03 ■AMP:KAF-05 ■RECEIVER:KTR-04

** : enough margin compared to another polarized wave data.

Data of Radiated Disturbance Test

UL Japan, Inc.

YAMAKITA No.1 Semi-anechoic chamber

Report No. : 30CE0127-YK-01-A

Applicant	: PIONEER CORPORATION		
Kind of Equipment	: CD Receiver		
Model No.	: DEH-P6200BT		
Serial No.	: TPGE000004UC		
Power	: DC12V		
Mode	: Transmitting (2441MHz)		
Remarks	: -		
Date	: 11/27/2009		
Test Distance	: 3 m		
Temperature	: 20 °C	Engineer	: Yasumasa Owaki
Humidity	: 49 %		
Regulation	: FCC Part15C § 15.209		

No.	FREQ. [MHz]	ANT TYPE	READING		ANT FACTOR [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	ATTEN. [dB]	RESULT		LIMITS [dB μ V/m]	MARGIN	
			HOR [dB μ V]	VER [dB μ V]					HOR [dB μ V/m]	VER [dB μ V/m]		HOR [dB]	VER [dB]
1.	200.40	BB	34.4	32.5	16.7	28.0	3.2	6.0	32.3	30.4	43.5	11.2	13.1
2.	240.04	BB	36.5	29.2	17.5	27.7	3.5	6.0	35.8	28.5	46.0	10.2	17.5
3.	311.66	BB	40.9	36.1	14.7	27.6	4.2	3.0	35.2	30.4	46.0	10.8	15.6
4.	368.14	BB	38.4	28.9	16.2	28.1	4.7	3.0	34.2	24.7	46.0	11.8	21.3

CALCULATION: READING + ANT.FACTOR + CABLE LOSS - AMP.GAIN + ATTEN.

Except for the above table : adequate margin data below the limits.

■ANT:KBA-03(<300MHz)/KLA-03 ■AMP:KAF-05 ■RECEIVER:KTR-04

** : enough margin compared to another polarized wave data.

Data of Radiated Disturbance Test

UL Japan, Inc.

YAMAKITA No.1 Semi-anechoic chamber

Report No. : 30CE0127-YK-01-A

Applicant	: PIONEER CORPORATION		
Kind of Equipment	: CD Receiver		
Model No.	: DEH-P6200BT		
Serial No.	: TPGE000004UC		
Power	: DC12V		
Mode	: Transmitting (2480MHz)		
Remarks	: -		
Date	: 11/27/2009		
Test Distance	: 3 m		
Temperature	: 20 °C	Engineer	: Yasumasa Owaki
Humidity	: 49 %		
Regulation	: FCC Part15C § 15.209		

No.	FREQ. [MHz]	ANT TYPE	READING		ANT FACTOR [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	ATTEN. [dB]	RESULT		LIMITS [dB μ V/m]	MARGIN	
			HOR [dB μ V]	VER [dB μ V]					HOR [dB μ V/m]	VER [dB μ V/m]		HOR [dB]	VER [dB]
1.	200.40	BB	34.3	32.6	16.7	28.0	3.2	6.0	32.2	30.5	43.5	11.3	13.0
2.	240.04	BB	36.3	29.0	17.5	27.7	3.5	6.0	35.6	28.3	46.0	10.4	17.7
3.	311.66	BB	40.8	35.7	14.7	27.6	4.2	3.0	35.1	30.0	46.0	10.9	16.0
4.	368.14	BB	38.2	29.2	16.2	28.1	4.7	3.0	34.0	25.0	46.0	12.0	21.0

CALCULATION: READING + ANT.FACTOR + CABLE LOSS - AMP.GAIN + ATTEN.

Except for the above table : adequate margin data below the limits.

■ANT:KBA-03(<300MHz)/KLA-03 ■AMP:KAF-05 ■RECEIVER:KTR-04

** : enough margin compared to another polarized wave data.

Data of Radiated Disturbance Test

UL Japan, Inc.

YAMAKITA No.1 Semi-anechoic chamber

Report No. : 30CE0127-YK-01-A

Applicant	: PIONEER CORPORATION		
Kind of Equipment	: CD Receiver		
Model No.	: DEH-P6200BT		
Serial No.	: TPGE000004UC		
Power	: DC12V		
Mode	: Transmitting (2402MHz)		
Remarks	: PK:RBW=1MHz, VBW=1MHz		
Date	: 11/27/2009		
Test Distance	: 3 m		
Temperature	: 20 °C	Engineer	: Yasumasa Owaki
Humidity	: 49 %		
Regulation	: FCC Part15C § 15.209(PK Detection)		

No.	FREQ. [MHz]	ANT TYPE	READING		ANT FACTOR [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	ATTEN. [dB]	RESULT		LIMITS [dB μ V/m]	MARGIN	
			HOR [dB μ V]	VER [dB μ V]					HOR [dB μ V/m]	VER [dB μ V/m]		HOR [dB]	VER [dB]
1.	1920.09	BB	45.4	44.6	27.5	36.6	6.6	0.0	42.9	42.1	74.0	31.1	31.9
2.	2390.00	BB	42.2	41.5	28.0	36.5	7.2	0.0	40.9	40.2	74.0	33.1	33.8
3.	2400.00	BB	44.2	46.0	28.0	36.5	7.2	0.0	42.9	44.7	74.0	31.1	29.3
4.	4804.00	BB	44.5	44.8	32.2	36.2	8.4	0.0	48.9	49.2	74.0	25.1	24.8
5.	7206.00	BB	43.7	43.7	36.6	36.2	9.0	0.0	53.1	53.1	74.0	20.9	20.9
6.	9608.00	BB	43.3	42.9	38.8	36.3	10.0	0.0	55.8	55.4	74.0	18.2	18.6
7.	12010.00	BB	43.4	43.0	38.7	35.6	10.7	0.0	57.2	56.8	74.0	16.8	17.2

CALCULATION: READING + ANT.FACTOR + CABLE LOSS - AMP.GAIN + ATTEN.

Except for the above table : adequate margin data below the limits.

■ANT:KHA-02(<18GHz)/KHA-04■CABLE:KCC-D13/D16■AMP:KAF-02■RECEIVER:KSA-08

** : enough margin compared to another polarized wave data.

Data of Radiated Disturbance Test

UL Japan, Inc.

YAMAKITA No.1 Semi-anechoic chamber

Report No. : 30CE0127-YK-01-A

Applicant : PIONEER CORPORATION
 Kind of Equipment : CD Receiver
 Model No. : DEH-P6200BT
 Serial No. : TPGE000004UC
 Power : DC12V
 Mode : Transmitting (2402MHz)
 Remarks : AV:RBW=1MHz, VBW=300Hz (No. 1:10Hz) *1)
 Date : 11/27/2009
 Test Distance : 3 m
 Temperature : 20 °C
 Humidity : 49 %
 Regulation : FCC Part15C § 15.209(AV Detection)

Engineer : Yasumasa Owaki

No.	FREQ. [MHz]	ANT TYPE	READING		ANT FACTOR [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	ATTEN. [dB]	RESULT		LIMITS [dB μ V/m]	MARGIN	
			HOR [dB μ V]	VER [dB μ V]					HOR [dB μ V/m]	VER [dB μ V/m]		HOR [dB]	VER [dB]
1.	1920.09	BB	35.6	34.1	27.5	36.6	6.6	0.0	33.1	31.6	54.0	20.9	22.4
2.	2390.00	BB	33.8	33.6	28.0	36.5	7.2	0.0	32.5	32.3	54.0	21.5	21.7
3.	2400.00	BB	34.8	38.5	28.0	36.5	7.2	0.0	33.5	37.2	54.0	20.5	16.8
4.	4804.00	BB	35.9	35.5	32.2	36.2	8.4	0.0	40.3	39.9	54.0	13.7	14.1
5.	7206.00	BB	33.6	33.1	36.6	36.2	9.0	0.0	43.0	42.5	54.0	11.0	11.5
6.	9608.00	BB	33.0	32.8	38.8	36.3	10.0	0.0	45.5	45.3	54.0	8.5	8.7
7.	12010.00	BB	33.4	33.5	38.7	35.6	10.7	0.0	47.2	47.3	54.0	6.8	6.7

CALCULATION: READING + ANT.FACTOR + CABLE LOSS - AMP.GAIN + ATTEN.

Except for the above table : adequate margin data below the limits.

■ANT:KHA-02(<18GHz)/KHA-04■CABLE:KCC-D13/D16■AMP:KAF-02■RECEIVER:KSA-08

** : enough margin compared to another polarized wave data.

*1) This noise is not pulse emission, therefore measurement was performed with 10Hz VBW according to DA00-705.

Data of Radiated Disturbance Test

UL Japan, Inc.

YAMAKITA No.1 Semi-anechoic chamber

Report No. : 30CE0127-YK-01-A

Applicant	: PIONEER CORPORATION	
Kind of Equipment	: CD Receiver	
Model No.	: DEH-P6200BT	
Serial No.	: TPGE000004UC	
Power	: DC12V	
Mode	: Transmitting (2441MHz)	
Remarks	: PK:RBW=1MHz, VBW=1MHz	
Date	: 11/27/2009	
Test Distance	: 3 m	
Temperature	: 20 °C	Engineer : Yasumasa Owaki
Humidity	: 49 %	
Regulation	: FCC Part15C § 15.209(PK Detection)	

No.	FREQ. [MHz]	ANT TYPE	READING		ANT FACTOR [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	ATTEN. [dB]	RESULT		LIMITS [dB μ V/m]	MARGIN	
			HOR [dB μ V]	VER [dB μ V]					HOR [dB μ V/m]	VER [dB μ V/m]		HOR [dB]	VER [dB]
1.	1920.08	BB	44.7	44.1	27.5	36.6	6.6	0.0	42.2	41.6	74.0	31.8	32.4
2.	4882.00	BB	43.2	44.5	32.2	36.1	8.4	0.0	47.7	49.0	74.0	26.3	25.0
3.	7323.00	BB	44.6	44.3	36.9	36.3	9.0	0.0	54.2	53.9	74.0	19.8	20.1
4.	9764.00	BB	43.6	43.6	38.9	36.2	10.1	0.0	56.4	56.4	74.0	17.6	17.6
5.	12205.00	BB	43.1	44.0	39.0	35.2	10.7	0.0	57.6	58.5	74.0	16.4	15.5

CALCULATION: READING + ANT.FACTOR + CABLE LOSS - AMP.GAIN + ATTEN.

Except for the above table : adequate margin data below the limits.

■ANT:KHA-02(<18GHz)/KHA-04 ■CABLE:KCC-D13/D16 ■AMP:KAF-02 ■RECEIVER:KSA-08

** : enough margin compared to another polarized wave data.

Data of Radiated Disturbance Test

UL Japan, Inc.

YAMAKITA No.1 Semi-anechoic chamber

Report No. : 30CE0127-YK-01-A

Applicant : PIONEER CORPORATION
 Kind of Equipment : CD Receiver
 Model No. : DEH-P6200BT
 Serial No. : TPGE000004UC
 Power : DC12V
 Mode : Transmitting (2441MHz)
 Remarks : AV:RBW=1MHz, VBW=300Hz (No. 1:10Hz) *1)
 Date : 11/27/2009
 Test Distance : 3 m
 Temperature : 20 °C Engineer : Yasumasa Owaki
 Humidity : 49 %
 Regulation : FCC Part15C § 15.209(AV Detection)

No.	FREQ. [MHz]	ANT TYPE	READING		ANT FACTOR [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	ATTEN. [dB]	RESULT		LIMITS [dB μ V/m]	MARGIN	
			HOR [dB μ V]	VER [dB μ V]					HOR [dB μ V/m]	VER [dB μ V/m]		HOR [dB]	VER [dB]
1.	1920.08	BB	34.9	34.0	27.5	36.6	6.6	0.0	32.4	31.5	54.0	21.6	22.5
2.	4882.00	BB	32.9	34.9	32.2	36.1	8.4	0.0	37.4	39.4	54.0	16.6	14.6
3.	7323.00	BB	33.4	33.4	36.9	36.3	9.0	0.0	43.0	43.0	54.0	11.0	11.0
4.	9764.00	BB	33.2	33.2	38.9	36.2	10.1	0.0	46.0	46.0	54.0	8.0	8.0
5.	12205.00	BB	32.9	33.3	39.0	35.2	10.7	0.0	47.4	47.8	54.0	6.6	6.2

CALCULATION: READING + ANT.FACTOR + CABLE LOSS - AMP.GAIN + ATTEN.

Except for the above table : adequate margin data below the limits.

■ANT:KHA-02(<18GHz)/KHA-04 ■CABLE:KCC-D13/D16 ■AMP:KAF-02 ■RECEIVER:KSA-08

** : enough margin compared to another polarized wave data.

*1) This noise is not pulse emission, therefore measurement was performed with 10Hz VBW according to DA00-705.

Data of Radiated Disturbance Test

UL Japan, Inc.

YAMAKITA No.1 Semi-anechoic chamber

Report No. : 30CE0127-YK-01-A

Applicant	: PIONEER CORPORATION		
Kind of Equipment	: CD Receiver		
Model No.	: DEH-P6200BT		
Serial No.	: TPGE000004UC		
Power	: DC12V		
Mode	: Transmitting (2480MHz)		
Remarks	: PK:RBW=1MHz, VBW=1MHz		
Date	: 11/27/2009		
Test Distance	: 3 m		
Temperature	: 20 °C	Engineer	: Yasumasa Owaki
Humidity	: 49 %		
Regulation	: FCC Part15C § 15.209(PK Detection)		

No.	FREQ. [MHz]	ANT TYPE	READING		ANT FACTOR [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	ATTEN. [dB]	RESULT		LIMITS [dB μ V/m]	MARGIN	
			HOR [dB μ V]	VER [dB μ V]					HOR [dB μ V/m]	VER [dB μ V/m]		HOR [dB]	VER [dB]
1.	1920.08	BB	44.6	44.7	27.5	36.6	6.6	0.0	42.1	42.2	74.0	31.9	31.8
2.	2483.50	BB	42.6	42.3	28.0	36.5	7.3	0.0	41.4	41.1	74.0	32.6	32.9
3.	4960.00	BB	43.3	44.5	32.3	36.1	8.5	0.0	48.0	49.2	74.0	26.0	24.8
4.	7440.00	BB	43.8	44.0	37.2	36.3	9.0	0.0	53.7	53.9	74.0	20.3	20.1
5.	9920.00	BB	44.1	44.9	39.1	36.2	10.1	0.0	57.1	57.9	74.0	16.9	16.1
6.	12400.00	BB	44.2	44.0	39.3	34.9	10.7	0.0	59.3	59.1	74.0	14.7	14.9

CALCULATION: READING + ANT.FACTOR + CABLE LOSS - AMP.GAIN + ATTEN.

Except for the above table : adequate margin data below the limits.

■ANT:KHA-02(<18GHz)/KHA-04 ■CABLE:KCC-D13/D16 ■AMP:KAF-02 ■RECEIVER:KSA-08

** : enough margin compared to another polarized wave data.

Data of Radiated Disturbance Test

UL Japan, Inc.

YAMAKITA No.1 Semi-anechoic chamber

Report No. : 30CE0127-YK-01-A

Applicant : PIONEER CORPORATION
 Kind of Equipment : CD Receiver
 Model No. : DEH-P6200BT
 Serial No. : TPGE000004UC
 Power : DC12V
 Mode : Transmitting (2480MHz)
 Remarks : AV:RBW=1MHz, VBW=300Hz (No. 1:10Hz) *1)
 Date : 11/27/2009
 Test Distance : 3 m
 Temperature : 20 °C Engineer : Yasumasa Owaki
 Humidity : 49 %
 Regulation : FCC Part15C § 15.209(AV Detection)

No.	FREQ. [MHz]	ANT TYPE	READING		ANT FACTOR [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	ATTEN. [dB]	RESULT		LIMITS [dB μ V/m]	MARGIN	
			HOR [dB μ V]	VER [dB μ V]					HOR [dB μ V/m]	VER [dB μ V/m]		HOR [dB]	VER [dB]
1.	1920.08	BB	34.3	33.8	27.5	36.6	6.6	0.0	31.8	31.3	54.0	22.2	22.7
2.	2483.50	BB	33.4	33.8	28.0	36.5	7.3	0.0	32.2	32.6	54.0	21.8	21.4
3.	4960.00	BB	32.8	34.4	32.3	36.1	8.5	0.0	37.5	39.1	54.0	16.5	14.9
4.	7440.00	BB	33.2	33.3	37.2	36.3	9.0	0.0	43.1	43.2	54.0	10.9	10.8
5.	9920.00	BB	33.4	33.4	39.1	36.2	10.1	0.0	46.4	46.4	54.0	7.6	7.6
6.	12400.00	BB	33.2	33.1	39.3	34.9	10.7	0.0	48.3	48.2	54.0	5.7	5.8

CALCULATION: READING + ANT.FACTOR + CABLE LOSS - AMP.GAIN + ATTEN.

Except for the above table : adequate margin data below the limits.

■ANT:KHA-02(<18GHz)/KHA-04 ■CABLE:KCC-D13/D16 ■AMP:KAF-02 ■RECEIVER:KSA-08

** : enough margin compared to another polarized wave data.

*1) This noise is not pulse emission, therefore measurement was performed with 10Hz VBW according to DA00-705.

Duty Cycle

UL Japan, Inc. Yamakita EMC lab.

Date:

Temp./Humid.:

Engineer:

Test mode:

No.2 shielded room


2009.11.27

24 deg. C. / 44 %

Minoru Nakatake

Transmitting

[DH5]

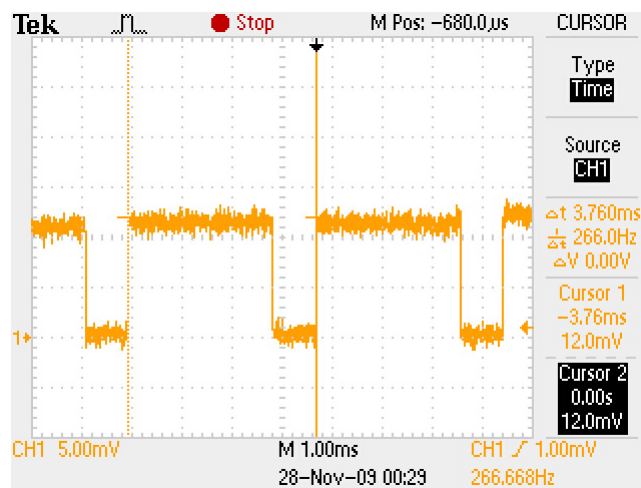

Duty Cycle: 3.76ms

AV Detector VBW: $1000 / 3.76\text{ms} = 265.96\text{Hz} \rightarrow 300\text{Hz}$

- * All the measured noise was pulse emission.
- * Duty cycle was within 100msec.


This purpose of the Duty Cycle calculation measures the pulse timing that we ensure Spectrum Analyzer can detect the pulse emission correctly. Therefore, if the pulse train can happen by 50msec(20Hz) or less, the average value measurement by setting the repetition frequency is done more correctly than VBW=10Hz that DA 00-705 accepts for AV detect. For instance, if pulse cycle is every 10msec, we set VBW = 100Hz(=1000/10) in order not to overlook a pulse unexpectedly.

Occupied Bandwidth (99%) (Regulation: RSS-Gen 4.6.1)


UL Japan, Inc. Yamakita EMC lab.
Date:
Temp./Humid.:
Engineer:
Test mode:

No.2 shielded room
2009.11.27
24 deg. C. / 44 %
Minoru Nakatake
Transmitting


[Hopping off, DHS]
1. ch : 2402MHz/Occupied Bandwidth:865.3kHz

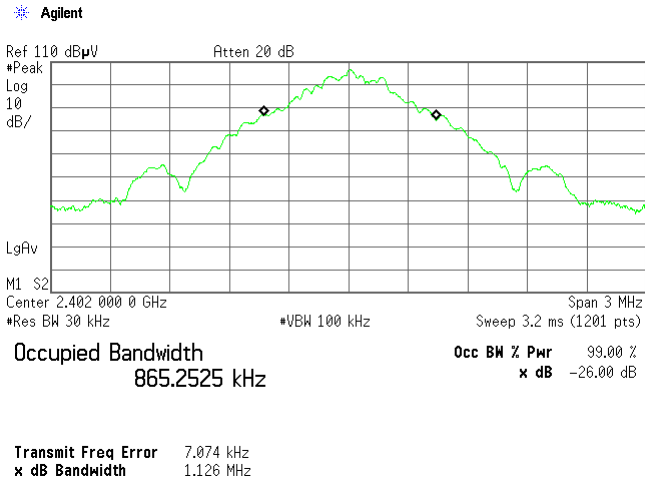


2. ch : 2441MHz/Occupied Bandwidth:861.9kHz

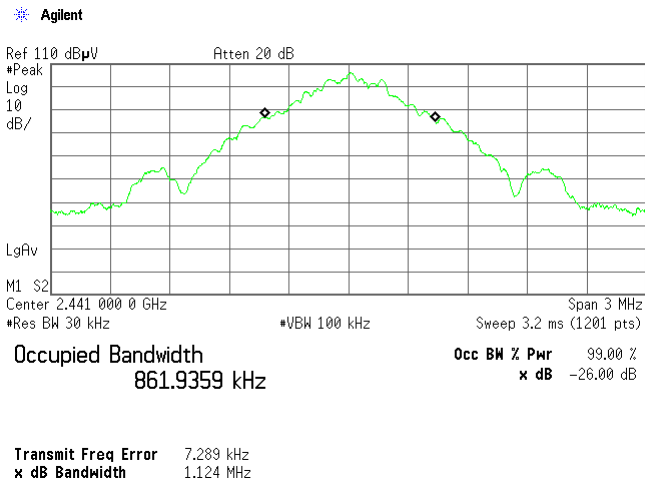

3. ch : 2480MHz/Occupied Bandwidth:861.7kHz

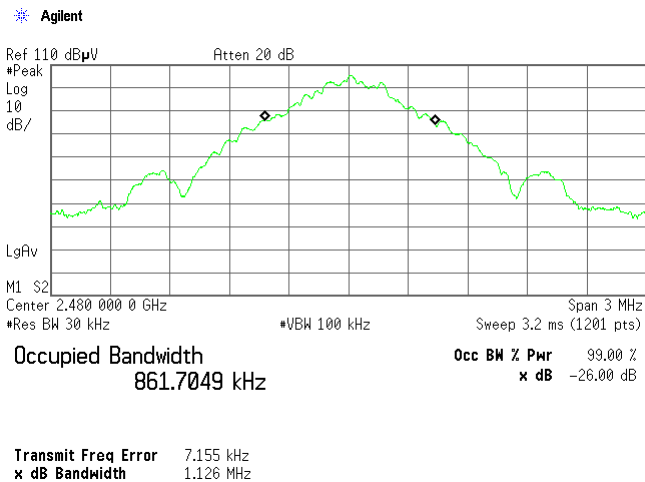

4. Hopping, DH5/Occupied Bandwidth:78.6MHz

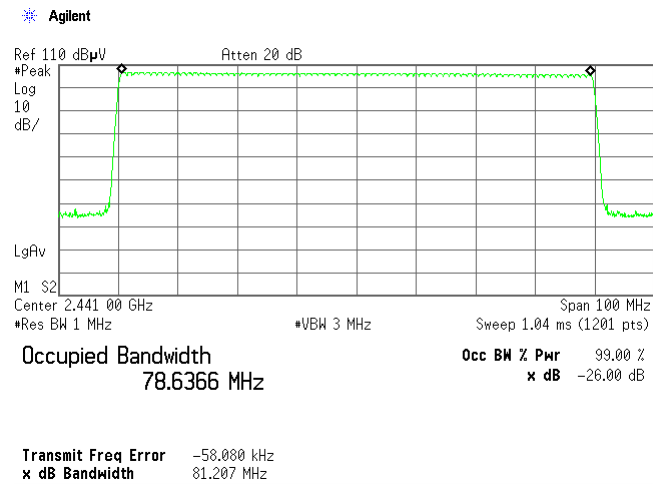

APPENDIX 3 Test Instruments

EMI test equipment

Control No.	Instrument	Manufacturer	Model No	Serial No	Test Item	Calibration Date * Interval(month)
CUST-YA-RE	Radiated emission(software)	UL Japan	RE(Ver.2.0)	-	RE	-
KAEC-01(NSA)	Anechoic Chamber	JSE	Semi 3m	1	RE	2009/08/20 * 12
KAF-05	Pre Amplifier	Agilent	8447D	2944A10150	RE	2009/03/27 * 12
KAT6-01	Attenuator	INMET	18N-6dB	-	RE	2009/03/10 * 12
KBA-03	Biconical Antenna	Schwarzbeck	BBA9106	1926	RE	2008/12/28 * 12
KLA-03	Logperiodic Antenna	Schwarzbeck	USLP9143	170	RE	2008/12/28 * 12
KCC-30/31/32 /34/37/KRM-0 3	Coaxial Cable/RF Relay Matrix	Fujikura/Suhner/TSJ	5D-2W/S04272B/ RFM-E421	-/01055	RE	2009/10/27 * 12
KSA-04	Spectrum Analyzer	Advantest	R3271A	95060087	RE	2009/09/15 * 12
KAF-02	Pre Amplifier	Hewlett Packard	8449B	3008A01268	RE	2009/04/24 * 12
KAT3-08	Attenuator	JFW IND. INC.	50HF-003N	-	RE	2009/08/18 * 12
KCC-D13/D16	Coaxial cable	Suhner/INSULATED WIRE INC	SUCOFLEX104/KP S-1501-200-KPS	200723/4 /04202005	RE	2009/04/27 * 12
KHA-02	Horn Antenna	Schwarzbeck	BBHA9120D	230	RE	2009/04/24 * 12
KHA-04	Horn Antenna	EMCO	3160-09	1278	RE	2009/04/24 * 12
KPM-08	Power meter	Anritsu	ML2495A	6K00003356	AT 5	2009/10/30 * 12
KPSS-04	Power sensor	Anritsu	MA2411B	012088	AT 5	2009/10/30 * 12
KSA-08	Spectrum Analyzer	Agilent	E4446A	MY46180525	RE/AT 1,2,3,4,6,7	2009/01/22 * 12
KCC-D20	Coaxial Cable	SUHNER	SUCOFLEX102	31110/2	AT 1,2,3,4,6,7	2009/07/30 * 12
KOSC-01	Oscilloscope	Tektronix	TDS-2022B	C050588	AT 7	2009/05/20 * 12
KOS-07	Humidity Indicator	Custom	CTH-190	K-07	AT all	2009/07/29 * 12
KOS-02	Humidity Indicator	Custom	CTH-190	K-02	RE	2009/07/23 * 12
KJM-07	Measure	KOMELON	KMC-36	-	RE	-
KDT-01	Coaxial Crystal Detector	Agilent	8473C	1822A05320	AT 7	Pre Check
KTR-04	Test Receiver	Rohde & Schwarz	ESVS10	825475/006	RE	2009/03/03 * 12

The expiration date of the calibration is the end of the expired month .

As for some calibrations performed after the tested dates , those test equipment have been controlled by means of an unbroken chains of calibrations .

All equipment is calibrated with traceable calibrations . Each calibration is traceable to the national or international standards .

Test Item :

RE: Out of Band Emission (Radiated)

AT: Antenna terminal conducted test

1: Carrier Frequency Separation

2: 20dB Bandwidth

3: Number of Hopping Frequency

4: Dwell time

5: Maximum Peak Output Power

6: Out of Band Emission (Conducted)

7: Duty cycle