



RADIO TEST REPORT

Test Report No.: 33CE0386-SH-01-A

Applicant : PIONEER CORPORATION
Type of Equipment : Car Audio with Bluetooth
Model No. : CVH-2338
FCC ID : AJDK068
Test regulation : FCC Part15 Subpart C: 2012
Test result : Complied

1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the limits of the above regulation.
4. The test results in this test report are traceable to the national or international standards.
5. This test report must not be used by the customer to claim product certification, approval, or endorsement by any agency of the Federal Government.
6. The opinions and the interpretations to the result of the description in this report are outside scopes where UL Japan has been accredited.

Date of test: November 5 to 9, 2012

Tested by:

Tatsuya Arai
Engineer of WiSE Japan,
UL Verification Service

Approved by :

Toyokazu Imamura
Leader of WiSE Japan,
UL Verification Service

- The testing in which "Non-accreditation" is displayed is outside the accreditation scopes in UL Japan.
 There is no testing item of "Non-accreditation".



UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

13-EM-F0429

Contents

| | <u>Page</u> |
|--|--------------------|
| SECTION 1: Customer information | 4 |
| SECTION 2: Equipment under test (E.U.T.) | 4 |
| SECTION 3: Test specification, procedures & results | 6 |
| SECTION 4: Operation of E.U.T. during testing..... | 9 |
| SECTION 5: Carrier frequency separation | 13 |
| SECTION 6: 20dB bandwidth & Occupied bandwidth (99%)..... | 13 |
| SECTION 7: Number of hopping frequency | 13 |
| SECTION 8: Dwell time | 13 |
| SECTION 9: Maximum peak output power..... | 13 |
| SECTION 10: Spurious emissions (Antenna port conducted)..... | 13 |
| SECTION 11: Radiated emission | 14 |
| Contents of APPENDIXES..... | 16 |
| APPENDIX 1: Data of radio tests..... | 17 |
| APPENDIX 2: Test instruments | 50 |
| APPENDIX 3: Photographs of test setup..... | 51 |

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

SECTION 1: Customer information

Company Name : PIONEER CORPORATION
Brand name : Pioneer
Address : 25-1 Aza-Nishi-machi, Yamada, Kawagoe-shi, Saitama, 350-8555, JAPAN
Telephone Number : +81-49-228-6415
Facsimile Number : +81-49-228-6493
Contact Person : Makoto Kaieda

SECTION 2: Equipment under test (E.U.T.)**2.1 Identification of E.U.T.**

Type of Equipment : Car Audio with Bluetooth
Model No. : CVH-2338
Serial No. : See Section 4.
Rating : DC 13.2V
Country of Mass-production : Japan
Condition of EUT : Engineering prototype
(Not for Sale: This sample is equivalent to mass-produced items.)
Modification of EUT : No modification by the test lab.
Receipt Date of Sample : November 2, 2012

2.2 Product description

Model: CVH-2338 (referred to as the EUT in this report) is a Car Audio with Bluetooth.

Radio specification:

Equipment type : Transceiver
Frequency of operation : 2402-2480MHz
Bandwidth & channel spacing : 79MHz & 1MHz
Clock Frequency : 26MHz
Type of modulation : GFSK, $\pi/4$ DQPSK, 8DPSK
Antenna type : inverted F type
Antenna gain with cable loss : +0.02dBi (max)
Antenna connector type : U.FL-LP-066
Operation temperature range : -20 to +65 deg.C.

FCC 15.31 (e)

The equipment provides the Bluetooth transmitter with stable power supply (DC3.3V). Therefore, the equipment complies with the requirement.

FCC 15.203

The equipment and its antenna comply with this requirement since this antenna is built in the equipment and it cannot be replaced by end users.

UL Japan, Inc.**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

Clock Frequency:

| Item | Reason For Use | Frequency [Hz] |
|-----------|-------------------------------------|----------------|
| Main | SYS uCom | 16M |
| | CAN uCom | 8M |
| | Dirana | 41.6M |
| | VDEC | 32M |
| | Display Controller | 32M |
| | USB HUB | 24M |
| Sub | HERO for HD DATA | 62.4M |
| CORE | E1 int CLK | 533M |
| | E1 MASTER CLK | 33.333M |
| | E1 DOTCLK | 33.23M |
| | E1 USBCLK | 48M |
| | USB2.0 High speed | 240M |
| | DDR ⇄ E1 | 533.33M |
| | LBSC E1 ⇄ NOR FLASH | 66.66M |
| | LBSC E1 ⇄ Secure IC | 66.66M |
| | E1 ⇄ WiFi | 24M |
| | Strage | 48M |
| Main | Dirana ⇄ L-Dice | 0.4M |
| | SYSCOM ⇄ Dirana | 0.375M |
| | SYSCOM ⇄ EEPROM(⇄ GVIF) | 0.1M |
| | SYSCOM ⇄ Display Controller | 0.1M |
| Main/Sub | SYSCOM ⇄ HERO | 0.18M |
| CORE | E1 ⇄ iPod IC | 0.1M |
| CORE/Main | E1 ⇄ WWR | 0.8M |
| Main | SYSCOM ⇄ CAN uCom | 0.667M |
| CORE/Main | XM ⇒ E1 | 0.75M |
| | E1 ⇄ SYSCOM | 0.75M |
| | "E1 ⇄ BT 3Mbps | 1.5M |
| Main | SYSCOM ⇄ Mecha | 0.096M |
| Main/Sub | SYSCOM ⇄ WWR | 0.058M |
| Main/Sub | SYSCOM ⇄ XM | 0.058M |
| Main/Sub | SYSCOM ⇄ XM | 0.019M |
| Sub | XM, , AVC LAN IC | 6M |
| Main | Local CAN | 0.25M |
| - | SYSCOM ⇄ WWR(HD Data) | 0.4M |
| - | SYSCOM ⇄ Timer IC | 0.5M |
| Main | SYSCOM ⇄ KEY SCAN IC | 0.126M |
| Main/Sub | AVC LAN IC ⇄ SYSCOM | 0.009M |
| Main | VDEC ⇒ E1 / E1 ⇒ LCD Display output | 9.597M |
| Main | Display Controller ⇒ E1 | 27M |
| CORE | ADC ⇒ E1 | 1.024M |
| CORE | ADC MCLK | 6.144M |
| CORE | PLL CLK | 27M |
| CORE | 48kFor sounds SSI clock | 24.576M |
| CORE | 44.1kFor sounds SSI clock | 16.934M |
| Main | E1 ⇒ Dirana | 3.072M |
| Main | E1 ⇒ Dirana Interruption sound | 3.072M |
| Main/Sub | WWR ⇒ Dirana Blend | 3.072M |
| Main | Mecha ⇒ Dirana (CD play) | 2.82M |
| Main | DD8 | 0.444M |
| Main | DD9 | 2M |
| CORE | CORE15 | 2.110M |
| CORE | CORE11 | 2.110M |
| TDA panel | LCD CLK (TDA_BASE) | 9.597M |
| TDA panel | LCD backlight | 2M |
| LDA panel | Panel uCom ⇄ KEY SCAN IC | 0.1M |
| LDA panel | Panel uCom | 9.83M |

UL Japan, Inc.**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

SECTION 3: Test specification, procedures & results**3.1 Test specification**

Test specification : Test specification: FCC Part 15 Subpart C: 2012,
final revised on August 13, 2012 and effective September 12, 2012

Title : FCC 47CFR Part15 Radio Frequency Device Subpart C Intentional Radiators
Section 15.207 Conducted limits
Section 15.209 Radiated emission limits, general requirements
Section 15.247 Operation within the bands 902-928MHz, 2400-2483.5MHz,
and 5725-5850MHz

3.2 Procedures & Results

| Item | Test Procedure | Specification | Remarks | Deviation | Worst Margin | Results | |
|--|--|---------------------------|------------------------|------------|--------------|--|----------|
| Conducted emission | ANSI C63.4:2009 7. AC powerline conducted emission measurements | FCC 15.207 | - | N/A *1) | - | N/A | |
| Carrier frequency separation | FCC Public Notice DA 00-705 & ANSI C63.4:2009 13. Measurement of intentional radiators | FCC 15.247 (a)(1) | Conducted | N/A | *See data. | Complied | |
| 20dB bandwidth | FCC Public Notice DA 00-705 & ANSI C63.4:2009 13. Measurement of intentional radiators | FCC 15.247 (a)(1) | Conducted | N/A | | - | |
| Number of hopping frequency | FCC Public Notice DA 00-705 & ANSI C63.4:2009 13. Measurement of intentional radiators | FCC 15.247 (a)(1)(iii) | Conducted | N/A | | Complied | |
| Dwell time | FCC Public Notice DA 00-705 & ANSI C63.4:2009 13. Measurement of intentional radiators | FCC 15.247 (a)(1)(iii) | Conducted | N/A | | Complied | |
| Maximum peak output power | FCC Public Notice DA 00-705 & ANSI C63.4:2009 13. Measurement of intentional radiators | FCC 15.247 (b)(1) | Conducted | N/A | | Complied | |
| Band edge compliance & Spurious emission | FCC Public Notice DA 00-705 & ANSI C63.4:2009 13. Measurement of intentional radiators | FCC 15.247 (d) 15.209 | Conducted/ Radiated | N/A | | 4.3dB Freq.: 816.000MHz Polarization: Horizontal Detection: Quasi Peak Mode: Tx 2441MHz, DH5 | Complied |
| Note: UL Japan's Work Procedures No. 13-EM-W0420 and 13-EM-W0422 | | | | | | | |
| *1) The test is not applicable since the EUT has no AC mains. | | | | | | | |

UL Japan, Inc.**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

3.3 Addition to standard

| Item | Test Procedure | Specification | Remarks | Worst Margin | Results |
|--------------------------|--|---------------|-----------|--------------|---------|
| Occupied Bandwidth (99%) | ANSI C63.4:2009 13. Measurement of intentional radiators, RSS-Gen 4.6.1 | - | Conducted | - | - |

Note: UL Japan's Work Procedures No. 13-EM-W0420 and 13-EM-W0422

* Other than above, no addition, exclusion nor deviation has been made from the standard.

3.4 Uncertainty

The following uncertainties have been calculated to provide a confidence level of 95% using a coverage factor k=2.

| Item | Frequency range | No.1 SAC ^{*1} /SR ^{*2} (±) | No.2 SAC/SR (±) | No.3 SAC/SR (±) |
|---|-----------------|---|--------------------|--------------------|
| Radiated emission (Measurement distance: 3m) | 9kHz-30MHz | 3.7 dB | 3.7 dB | 3.6 dB |
| | 30MHz-300MHz | 4.9 dB | 5.1 dB | 4.9 dB |
| | 300MHz-1GHz | 5.0 dB | 5.2 dB | 4.9 dB |
| | 1GHz-15GHz | 4.8 dB | 4.8 dB | 4.9 dB |
| Radiated emission (Measurement distance: 1m) | 15GHz-18GHz | 5.6 dB | 5.6 dB | 5.6 dB |
| | 18GHz-40GHz | 4.6 dB | 4.3 dB | 4.4 dB |

*1: SAC=Semi-Anechoic Chamber

*2: SR= Shielded Room is applied besides radiated emission

The data listed in this report meets the limits unless the uncertainty is taken into consideration.

Antenna port conducted test

Power measurement uncertainty above 1GHz for this test was: (±) 1.5dB

Spurious emission (Conducted) measurement (below 1GHz) uncertainty for this test was: (±) 1.7dB

Spurious emission (Conducted) measurement (1G-3GHz) uncertainty for this test was: (±) 2.3dB

Spurious emission (Conducted) measurement (3G-18GHz) uncertainty for this test was: (±) 3.0dB

Spurious emission (Conducted) measurement (18G-26.5GHz) uncertainty for this test was: (±) 2.9dB

Bandwidth measurement uncertainty for this test was: (±) 5.4%

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

3.5 Test location

UL Japan, Inc. Shonan EMC Lab.

1-22-3, Megumigaoka, Hiratsuka-shi, Kanagawa-ken 259-1220 JAPAN

Telephone number : +81 463 50 6400

Facsimile number : +81 463 50 6401

JAB Accreditation No. : RTL02610

| | FCC Registration No. | IC Registration No. | Width x Depth x Height (m) | Size of reference ground plane (m) / horizontal conducting plane | Maximum measurement distance |
|--|----------------------|---------------------|----------------------------|--|------------------------------|
| <input type="checkbox"/> No.1 Semi-anechoic chamber | 697847 | 2973D-1 | 20.6 x 11.3 x 7.65 | 20.6 x 11.3 | 10m |
| <input type="checkbox"/> No.2 Semi-anechoic chamber | 697847 | 2973D-2 | 20.6 x 11.3 x 7.65 | 20.6 x 11.3 | 10m |
| <input checked="" type="checkbox"/> No.3 Semi-anechoic chamber | 697847 | 2973D-3 | 12.7 x 7.7 x 5.35 | 12.7 x 7.7 | 5m |
| <input type="checkbox"/> No.4 Semi-anechoic chamber | - | - | 8.1 x 5.1 x 3.55 | 8.1 x 5.1 | - |
| <input type="checkbox"/> No.1 shielded room | - | - | 6.8 x 4.1 x 2.7 | 6.8 x 4.1 | - |
| <input type="checkbox"/> No.2 shielded room | - | - | 6.8 x 4.1 x 2.7 | 6.8 x 4.1 | - |
| <input type="checkbox"/> No.3 shielded room | - | - | 6.3 x 4.7 x 2.7 | 6.3 x 4.7 | - |
| <input type="checkbox"/> No.4 shielded room | - | - | 4.4 x 4.7 x 2.7 | 4.4 x 4.7 | - |
| <input checked="" type="checkbox"/> No.5 shielded room | - | - | 7.8 x 6.4 x 2.7 | 7.8 x 6.4 | - |
| <input type="checkbox"/> No.6 shielded room | - | - | 7.8 x 6.4 x 2.7 | 7.8 x 6.4 | - |

3.6 Test setup, Data of EMI & Test instruments

Refer to APPENDIX 1 to 3.

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

SECTION 4: Operation of E.U.T. during testing

4.1 Operating mode

| Test item | Operating mode | Tested frequency |
|--|--|---|
| Carrier frequency separation | Transmitting Hopping ON (DH5/3DH5), Payload: PRBS9 | - |
| 20dB bandwidth | Transmitting Hopping OFF (DH5/3DH5), Payload: PRBS9 | 2402MHz, 2441MHz, 2480MHz |
| Number of hopping frequency | Transmitting Hopping ON (DH5/3DH5), Payload: PRBS9 | - |
| Dwell time | Transmitting (Hopping ON), Payload: PRBS9 -DH1, -DH3, -DH5 -3DH1, -3DH3, -3DH5 | - |
| Maximum peak output power | Transmitting (Hopping OFF), Payload: PRBS9 -DH5, -2DH5, -3DH5 | 2402MHz, 2441MHz, 2480MHz |
| Band edge compliance & Spurious emission (Conducted) | Transmitting (DH5/3DH5), Payload: PRBS9 -Hopping ON -Hopping OFF | Band edge compliance: 2402MHz, 2480MHz |
| (Radiated) | Transmitting (DH5/3DH5), Payload: PRBS9 | Spurious emission: 2402MHz, 2441MHz, 2480MHz |
| 99% occupied bandwidth | Transmitting (DH5/3DH5), Payload: PRBS9 -Hopping ON -Hopping OFF | 2402MHz, 2441MHz, 2480MHz |

*As a result of preliminary test, the formal test was performed with the above modes, which had the maximum payload (except Dwell time test).

*Remarks: Test was not performed at AFH mode, because the decrease of number of channel (min: 20ch) at AFH mode does not affect the output power and bandwidth of the EUT.

As this device had AFH mode and frequency separation could not meet the requirement of over 20dB BW without 2/3 relaxation, 125mW power limit was applied to it.

*EUT has the power settings by the software as follows;

Power settings: Power target: 0 (dBm)
BDR: Ext.=0, Int.=51
EDR: Ext.=0, Int.=49
Software: BlueTest3.exe Version 2.4

The EUT does not have Inquiry mode.

Justification: The system was configured in typical fashion (as customer would normally use it) for testing.

UL Japan, Inc.


Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

4.2 Configuration of tested system

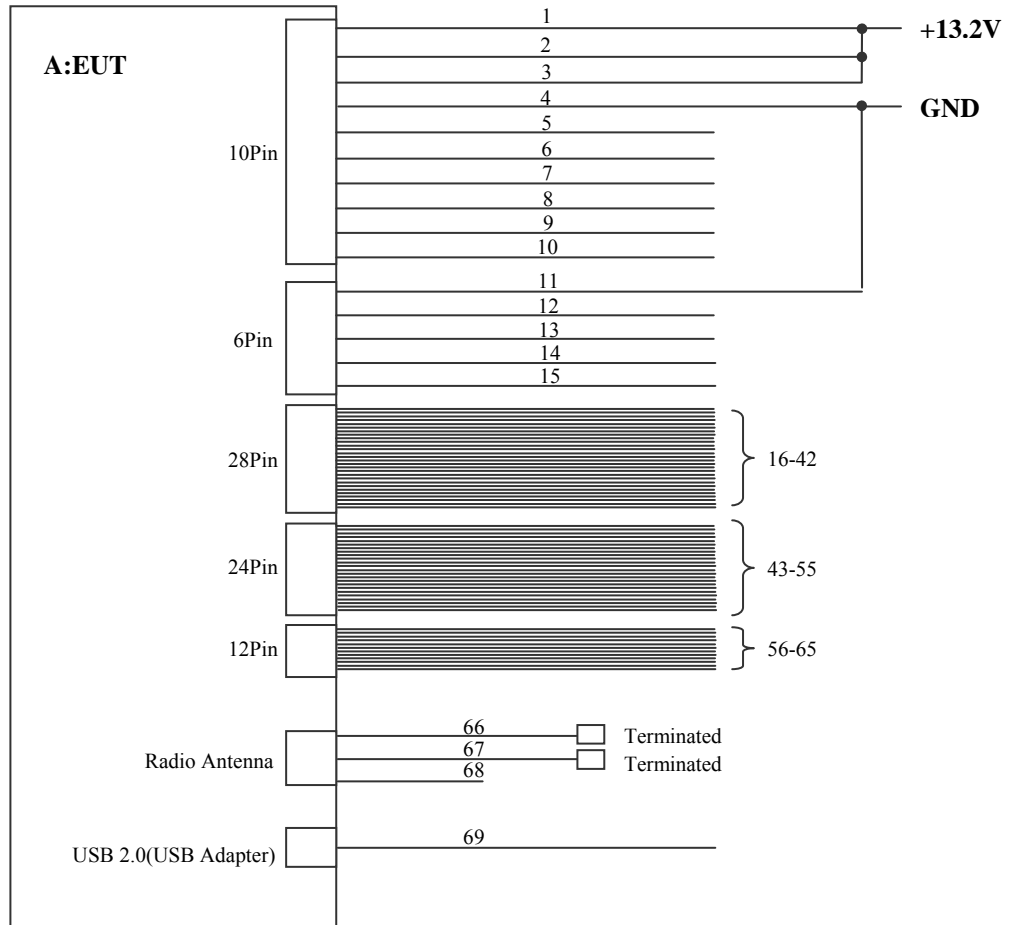

* Test data was taken under worst case conditions.

Description of EUT and support equipment

| No. | Item | Model number | Serial number | Manufacturer | Remarks |
|-----|--------------------------|--------------|---------------|--------------|---------|
| A | Car Audio with Bluetooth | CVH-2338 | *1) | Pioneer | EUT |

*1) Antenna terminal conducted tests: AABB000011UC, Radiated emission tests: AABB000010UC

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

List of cables used (1/2)

| No. | Cable name | Length(m) | Shield | | Remarks | |
|-----|------------|-----------|------------|------------|---|--|
| | | | Cable | Connector | | |
| 1 | ACC | 1.0 +2.0 | Unshielded | Unshielded | Power connector (10Pin) | |
| 2 | +B | 1.0 +2.0 | Unshielded | Unshielded | | |
| 3 | +ILL | 1.0 +2.0 | Unshielded | Unshielded | | |
| 4 | GND | 1.0 +2.0 | Unshielded | Unshielded | | |
| 5 | FL+ | 1.0 +2.9 | Unshielded | Unshielded | | |
| 6 | FL- | 1.0 +2.9 | Unshielded | Unshielded | | |
| 7 | FR+ | 1.0 +2.9 | Unshielded | Unshielded | | |
| 8 | FR- | 1.0 +2.9 | Unshielded | Unshielded | | |
| 9 | TMU | 1.0 | Unshielded | Unshielded | | |
| 10 | AMP | 1.0 | Unshielded | Unshielded | | |
| 11 | -ILL | 1.0 +2.0 | Unshielded | Unshielded | Power connector (6Pin) | |
| 12 | RL+ | 1.0 +2.9 | Unshielded | Unshielded | | |
| 13 | RL- | 1.0 +2.9 | Unshielded | Unshielded | | |
| 14 | RR+ | 1.0 +2.9 | Unshielded | Unshielded | | |
| 15 | RR- | 1.0 +2.9 | Unshielded | Unshielded | | |
| 16 | IG | 1.0 | Unshielded | Unshielded | Steering SW etc.connector (accessory)(28Pin) | |
| 17 | REV | 1.0 | Unshielded | Unshielded | | |
| 18 | ADIM | 1.0 | Shield | Unshielded | | |
| 19 | MACC | 1.0 | Shield | Unshielded | | |
| 20 | MIN+ | 1.0 | Unshielded | Unshielded | | |
| 21 | SNS2 | 1.0 | Shield | Unshielded | | |
| 22 | TX1+ | 1.0 | Unshielded | Unshielded | | |
| 23 | TX1- | 1.0 | Unshielded | Unshielded | | |
| 24 | CANH | 1.0 | Unshielded | Unshielded | | |
| 25 | CANL | 1.0 | Unshielded | Unshielded | | |
| 26 | AGND | 1.0 | Unshielded | Unshielded | | |
| 27 | SG | 1.0 | Unshielded | Unshielded | | |
| 28 | VV+ | 1.0 | Unshielded | Unshielded | | |
| 29 | VV- | 1.0 | Unshielded | Unshielded | | |
| 30 | PKB | 1.0 | Unshielded | Unshielded | | |
| 31 | MUT1 | 1.0 | Unshielded | Unshielded | | |
| 32 | SPD | 1.0 | Unshielded | Unshielded | | |
| 33 | SGND | 1.0 | Unshielded | Unshielded | | |
| 34 | MIN- | 1.0 | Unshielded | Unshielded | | |
| 35 | SW1 | 1.0 | Unshielded | Unshielded | | |
| 36 | SW2 | 1.0 | Unshielded | Unshielded | | |
| 37 | SWG | 1.0 | Unshielded | Unshielded | | |
| 38 | SW3 | 1.0 | Unshielded | Unshielded | | |
| 39 | ADPG | 1.0 | Unshielded | Unshielded | | |
| 40 | VAR+ | 1.0 | Unshielded | Unshielded | | |
| 41 | VAR- | 1.0 | Unshielded | Unshielded | | |
| 42 | VAL+ | 1.0 | Unshielded | Unshielded | | |
| 43 | CNH1 | 1.0 | Unshielded | Unshielded | | Rear camera input connector output(24Pin) |
| 44 | CNL1 | 1.0 | Unshielded | Unshielded | | |
| 45 | TX3+ | 1.0 | Unshielded | Unshielded | | |
| 46 | TX3- | 1.0 | Unshielded | Unshielded | | |
| 47 | CSW+ | 1.0 | Unshielded | Unshielded | | |
| 48 | SW | 1.0 | Unshielded | Unshielded | | |
| 49 | CA+ | 1.0 | Unshielded | Unshielded | | |
| 50 | V+ | 1.0 | Unshielded | Unshielded | | |
| 51 | TX2+ | 1.0 | Unshielded | Unshielded | | |
| 52 | TX2- | 1.0 | Unshielded | Unshielded | | |
| 53 | CGND | 1.0 | Unshielded | Unshielded | | |
| 54 | V- | 1.0 | Unshielded | Unshielded | | |

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

List of cables used (2/2)

| No. | Cable name | Length(m) | Shield | | Remarks |
|-----|----------------------|-----------|------------|------------|-----------------------------|
| | | | Cable | Connector | |
| 55 | CSLD | 1.0 | Unshielded | Unshielded | Simple RSE accessory(12Pin) |
| 56 | CDR+ | 1.0 | Unshielded | Unshielded | |
| 57 | CDR- | 1.0 | Unshielded | Unshielded | |
| 58 | CDL+ | 1.0 | Unshielded | Unshielded | |
| 59 | CDL- | 1.0 | Unshielded | Unshielded | |
| 60 | SLD1 | 1.0 | Unshielded | Unshielded | |
| 61 | MUTE | 1.0 | Unshielded | Unshielded | |
| 62 | TX+ | 1.0 | Unshielded | Unshielded | |
| 63 | TX- | 1.0 | Unshielded | Unshielded | |
| 64 | NTSC | 1.0 | Unshielded | Unshielded | |
| 65 | NTSO | 1.0 | Unshielded | Unshielded | |
| 66 | FM Antenna (SUB) | 0.2 | Unshielded | Unshielded | |
| 67 | FM Antenna (MAIN) | 0.2 | Unshielded | Unshielded | |
| 68 | ANT+ | 0.1 | Unshielded | Unshielded | |
| 69 | USB2.0 (USB Adapter) | 3.0 | Unshielded | Unshielded | |

*All cables used for the measurement are exclusive use or marketed.

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

SECTION 5: Carrier frequency separation

Test procedure

The carrier frequency separation was measured with a spectrum analyzer connected to the antenna port.

Summary of the test results: Pass
Refer to APPENDIX

SECTION 6: 20dB bandwidth & Occupied bandwidth (99%)

Test procedure

The bandwidth was measured with a spectrum analyzer connected to the antenna port.

Summary of the test results: Pass
Refer to APPENDIX

SECTION 7: Number of hopping frequency

Test procedure

The Number of Hopping Frequency was measured with a spectrum analyzer connected to the antenna port.

Summary of the test results: Pass
Refer to APPENDIX

SECTION 8: Dwell time

Test procedure

The Dwell time was measured with a spectrum analyzer connected to the antenna port.

Summary of the test results: Pass
Refer to APPENDIX

SECTION 9: Maximum peak output power

Test procedure

The Maximum Peak Output Power was measured with a power meter connected to the antenna port.

Summary of the test results: Pass
Refer to APPENDIX

SECTION 10: Spurious emissions (Antenna port conducted)

Test procedure

The Out of Band Emissions was measured with a spectrum analyzer connected to the antenna port.

In any 100kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator confirmed 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on a radiated measurement.

In the frequency range below 30MHz, RBW was narrowed to separate the noise contents.

Then, wide-band noise near the limit was checked separately, however the noise was not detected as shown in the chart. (9kHz-150kHz:RBW=200Hz, 150kHz-30MHz:RBW=10kHz)

Summary of the test results: Pass
Refer to APPENDIX

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

SECTION 11: Radiated emission

11.1 Operating environment

Test room : See test data (APPENDIX)
 Temperature : See test data (APPENDIX)
 Humidity : See test data (APPENDIX)

11.2 Test configuration

EUT was placed on a urethane platform of nominal size, 0.5m by 0.5m, raised 0.8m above the conducting ground plane. The rear of EUT was aligned and flushed with rear of tabletop. Photographs of the set up are shown in APPENDIX.

11.3 Test conditions

Frequency range : 30MHz to 25GHz
 EUT position : Table top

11.4 Test procedure

The Radiated Electric Field Strength intensity has been measured on a semi-anechoic chamber with a ground plane and at a distance of 3m (below 15GHz) / 1m (above 15GHz) (Refer to Figure 1). Measurements were performed with quasi-peak, peak and average detector. The measuring antenna height was varied between 1 and 4m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity. The measurements were performed for both vertical and horizontal antenna polarization.

The radiated emission measurements were made with the following detection of the test receiver.

| Frequency | 30 - 1000MHz | 1 - 25GHz | |
|----------------|--------------|-------------------|-------------------|
| Detection Type | Quasi-Peak | Peak | * Average |
| IF Bandwidth | 120kHz | RBW:1MHz/VBW:3MHz | RBW:1MHz/VBW:10Hz |

* When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold. Although 00-705 accepts VBW=10Hz for AV measurements, confirmed that superfluous smoothing was not performed.

The carrier level and noise levels were fixed at angle of 21 deg. based on the product specification.

UL Japan, Inc.


Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

Figure 1. Antenna angle

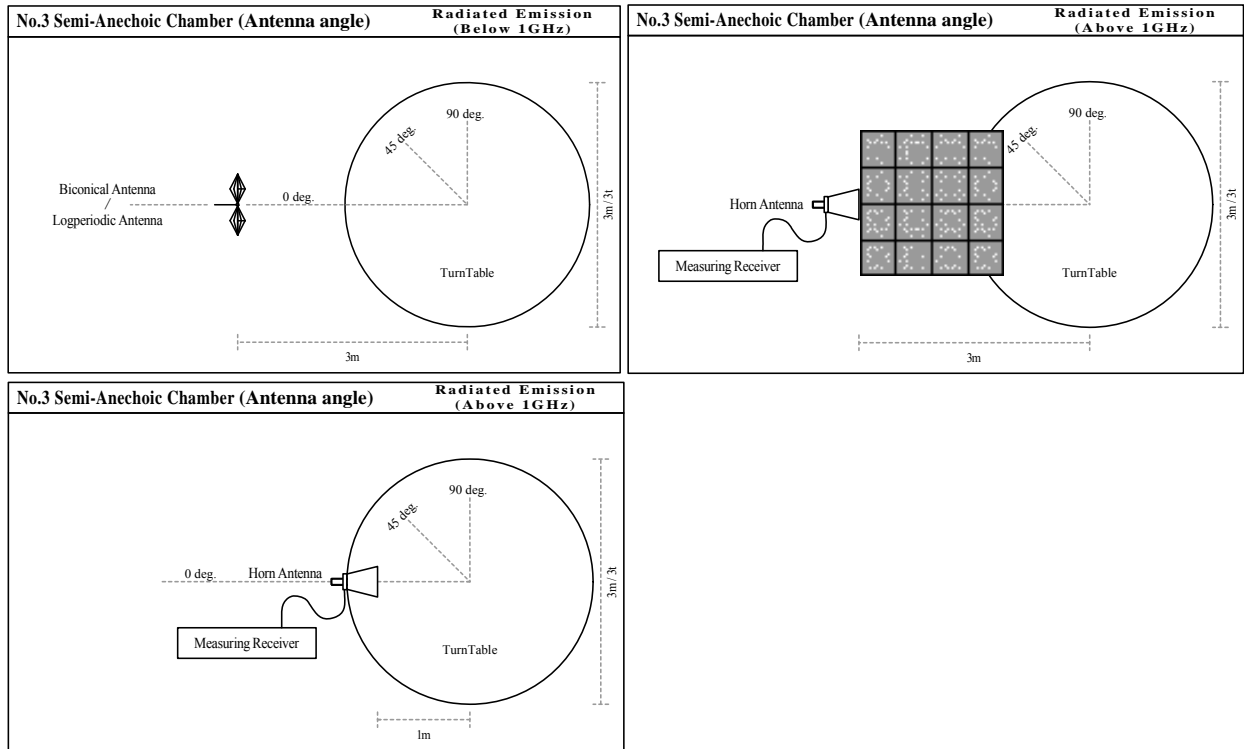

11.5 Band edge

Band edge level is below the limits of FCC 15.209. Refer to the data.

11.6 Results

Summary of the test results : Pass *No noise was detected above the 5th order harmonics.

Refer to APPENDIX

Contents of APPENDIXES

APPENDIX 1: Data of Radio tests

20dB bandwidth and Carrier frequency separation
Number of Hopping Frequency
Dwell time
Maximum peak output power
Radiated emission
Spurious emission (Antenna port conducted)
Occupied Bandwidth

APPENDIX 2: Test instruments

Test instruments

APPENDIX 3: Photographs of test setup

Radiated emission

UL Japan, Inc.

Shonan EMC Lab.

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401