



# RADIO TEST REPORT

**Test Report No. : 10126453S-C**

**Applicant** : PIONEER CORPORATION  
**Type of Equipment** : Pedaling Monitor Sensor  
**Model No.** : SGY-PM910H L  
**FCC ID** : AJDK078  
**Test regulation** : FCC Part15 Subpart C: 2013  
**Test result** : Complied

1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the limits of the above regulation.
4. The test results in this test report are traceable to the national or international standards.
5. This test report must not be used by the customer to claim product certification, approval, or endorsement by any agency of the Federal Government.
6. The opinions and the interpretations to the result of the description in this report are outside scopes where UL Japan has been accredited.

**Date of test:** December 24 to 25, 2013

**Representative test engineer:**

Tatsuya Arai  
Engineer of WiSE Japan,  
UL Verification Service

**Approved by :**

Toyokazu Imamura  
Leader of WiSE Japan,  
UL Verification Service



- The testing in which "Non-accreditation" is displayed is outside the accreditation scopes in UL Japan.  
 There is no testing item of "Non-accreditation".

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

13-EM-F0429



**Contents**

	<b><u>Page</u></b>
<b>SECTION 1: Customer information.....</b>	<b>4</b>
<b>SECTION 2: Equipment under test (E.U.T.).....</b>	<b>4</b>
<b>SECTION 3: Test specification, procedures &amp; results.....</b>	<b>5</b>
<b>SECTION 4: Operation of E.U.T. during testing .....</b>	<b>7</b>
<b>SECTION 5: Radiated emission .....</b>	<b>8</b>
<b>SECTION 6: 20dB bandwidth &amp; Occupied bandwidth (99%) .....</b>	<b>9</b>
<b>Contents of APPENDIXES .....</b>	<b>10</b>
<b>APPENDIX 1: Test data.....</b>	<b>11</b>
<b>APPENDIX 2: Test instruments.....</b>	<b>15</b>
<b>APPENDIX 3: Photographs of test setup .....</b>	<b>16</b>

---

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## **SECTION 1: Customer information**

Company Name : PIONEER CORPORATION  
Brand name : Pioneer  
Address : 25-1 Aza-Nishi-machi, Yamada, Kawagoe-shi, Saitama, 350-8555, JAPAN  
Telephone Number : +81-49-228-6415  
Facsimile Number : +81-49-228-6493  
Contact Person : Yoshihisa Kobayashi

## **SECTION 2: Equipment under test (E.U.T.)**

### **2.1 Identification of E.U.T.**

Type of Equipment : Pedaling Monitor Sensor  
Model No. : SGY-PM910H L  
Serial No. : Refer to 4.2 of this report.  
Rating : DC3.0V  
Receipt Date of Sample : December 24, 2013  
Country of Mass-production : Japan  
Condition of EUT : Production prototype  
(Not for Sale: This sample is equivalent to mass-produced items.)  
Modification of EUT : No modification by the test lab.

### **2.2 Product description**

Model: SGY-PM910H L (referred to as the EUT in this report) is a Pedaling Monitor Sensor.

Clock frequency(ies) in the system : 32.768kHz, 16MHz

### **Radio specification**

Equipment type : Transceiver  
Frequency of operation : 2457MHz  
Type of modulation : GFSK  
Antenna type : Chip  
Antenna connector type : None  
Operation temperature range : -10 to +50 deg.C.  
ITU code : F1D

### **FCC 15.31 (e)**

This EUT provides stable voltage (DC1.8V) constantly to RF transmitter regardless of input voltage. Therefore, this EUT complies with the requirement.

### **FCC 15.203**

It is impossible for end users to replace the antenna, because the antenna is mounted inside of the EUT. Therefore, the equipment complies with the antenna requirement.

---

## **UL Japan, Inc.**

### **Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

### **SECTION 3: Test specification, procedures & results**

#### **3.1 Test specification**

Test specification : FCC Part 15 Subpart C: 2013, final revised on September 30, 2013 and effective October 30, 2013  
Title : FCC 47CFR Part15 Radio Frequency Device Subpart C Intentional Radiators  
Section 15.207 Conducted limits  
Section 15.209 Radiated emission limits, general requirements  
Section 15.249 Operation within the bands 902-928MHz, 2400-2483.5MHz, 5725-5875MHz, and 24.0-24.25GHz

#### **3.2 Procedures & Results**

Item	Test Procedure	Specification	Remarks	Deviation	Worst Margin	Results
Conducted emission	ANSI C63.4:2009 7. AC powerline conducted emission measurements	FCC 15.207	-	N/A *1)	N/A	N/A
20dB bandwidth	ANSI C63.4:2009 13. Measurement of intentional radiators	FCC 15.215	Conducted	N/A	-	Complied
Electric field strength of fundamental emission	ANSI C63.4:2009 13. Measurement of intentional radiators	FCC 15.249 (a)(e), 15.209	Radiated	N/A	24.8dB Detector: Peak Polarization: Horizontal	Complied
Electric field strength of spurious emission	ANSI C63.4:2009 13. Measurement of intentional radiators	FCC 15.205 (a)(b), 15.209, 15.249 (a)(d)(e)	Radiated	N/A	6.1dB (for Average Limit) *3) Freq.: 2400.000 MHz Detector: Peak Polarization: Vertical	Complied
Frequency tolerance	ANSI C63.4:2009 13. Measurement of intentional radiators	FCC 15.249 (b)	-	N/A *2)	N/A	N/A

Note: UL Japan's EMI Work Procedures No.13-EM-W0420 and 13-EM-W0422

\*1) The test is not applicable since the EUT has no AC mains. (The EUT does not perform the radio function during recharging.)

\*2) The test is not required since this EUT does not operate in the restricted bands and the prohibited TV bands.

\*3) The limit for Average detector is applied to the measurement value with Peak detector.

#### **3.3 Addition to standard**

Item	Test Procedure	Specification	Remarks	Worst Margin	Results
Occupied bandwidth (99%)	ANSI C63.4:2009 13. Measurement of intentional radiators, RSS-Gen 4.6.1	-	Conducted	-	Complied

Note: UL Japan's EMI Work Procedures No.13-EM-W0420 and 13-EM-W0422

\* Other than above, no addition, exclusion nor deviation has been made from the standard.

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

### 3.4 Uncertainty

The following uncertainties have been calculated to provide a confidence level of 95% using a coverage factor k=2.

Item	Frequency range	No.1 SAC <sup>*1</sup> /SR <sup>*2</sup> (±)	No.2 SAC/SR (±)	No.3 SAC/SR (±)
Radiated emission (Measurement distance: 3m)	9kHz-30MHz	3.7 dB	3.7 dB	3.6 dB
	30MHz-300MHz	4.8 dB	5.0 dB	4.8 dB
	300MHz-1GHz	5.0 dB	5.0 dB	4.8 dB
	1GHz-18GHz	4.9 dB	4.9 dB	4.9 dB
	18GHz-26.5GHz	5.1 dB	4.3 dB	4.3 dB

\*1: SAC=Semi-Anechoic Chamber

\*2: SR= Shielded Room is applied besides radiated emission

The data listed in this test report has enough margin, more than site margin.

#### Antenna port conducted test

Bandwidth measurement uncertainty for this test was: (±) 5.4%

### 3.5 Test location

UL Japan, Inc. Shonan EMC Lab.

1-22-3, Megumigaoka, Hiratsuka-shi, Kanagawa-ken 259-1220 JAPAN

Telephone number : +81 463 50 6400

Facsimile number : +81 463 50 6401

JAB Accreditation No. : RTL02610

	FCC Registration No.	IC Registration No.	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Maximum measurement distance
<input type="checkbox"/> No.1 Semi-anechoic chamber	697847	2973D-1	20.6 x 11.3 x 7.65	20.6 x 11.3	10m
<input type="checkbox"/> No.2 Semi-anechoic chamber	697847	2973D-2	20.6 x 11.3 x 7.65	20.6 x 11.3	10m
<input checked="" type="checkbox"/> No.3 Semi-anechoic chamber	697847	2973D-3	12.7 x 7.7 x 5.35	12.7 x 7.7	5m
<input type="checkbox"/> No.4 Full-anechoic chamber	-	-	8.1 x 5.1 x 3.55	8.1 x 5.1	-
<input type="checkbox"/> No.1 shielded room	-	-	6.8 x 4.1 x 2.7	6.8 x 4.1	-
<input type="checkbox"/> No.2 shielded room	-	-	6.8 x 4.1 x 2.7	6.8 x 4.1	-
<input checked="" type="checkbox"/> No.3 shielded room	-	-	6.3 x 4.7 x 2.7	6.3 x 4.7	-
<input type="checkbox"/> No.4 shielded room	-	-	4.4 x 4.7 x 2.7	4.4 x 4.7	-
<input type="checkbox"/> No.5 shielded room	-	-	7.8 x 6.4 x 2.7	7.8 x 6.4	-
<input type="checkbox"/> No.6 shielded room	-	-	7.8 x 6.4 x 2.7	7.8 x 6.4	-

### 3.6 Test setup, Data of test & Test instruments

Refer to APPENDIX 1 to 3.

#### **UL Japan, Inc.**

#### **Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## **SECTION 4: Operation of E.U.T. during testing**

### **4.1 Operating mode**


The EUT exercise program used during testing was designed to exercise the various system components in a manner similar to typical use.

Test item	Operating mode	Tested frequency
All items	Transmitting	2457MHz

Firmware: 2013.11.29

**Justification:** The system was configured in typical fashion (as customer would normally use it) for testing.

### **4.2 Configuration and peripherals**



\* Cabling and setup were taken into consideration and test data was taken under worse case conditions.

#### **Description of EUT and support equipment**

No.	Item	Model number	Serial number	Manufacturer	Remarks
A	Pedaling Monitor Sensor	SGY-PM910H L	17*1) 18*2)	Pioneer	EUT

\*1) For bandwidth test

\*2) For radiated emission test

\*A Dip SW for transmit-receive switching was added to EUT during the test, but it does not affect the test results.

---

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## **SECTION 5: Radiated emission**

### **5.1 Operating environment**

Test place : See test data (APPENDIX 1)  
Temperature : See test data (APPENDIX 1)  
Humidity : See test data (APPENDIX 1)

### **5.2 Test configuration**

EUT was placed on a urethane platform of nominal size, 0.5m by 0.5m, raised 0.8m above the conducting ground plane. Photographs of the set up are shown in APPENDIX 3.

### **5.3 Test conditions**

Frequency range : 9kHz to 26GHz  
EUT position : Table top

### **5.4 Test procedure**

The Radiated Electric Field Strength intensity has been measured on a semi-anechoic chamber with a ground plane and at a distance of 3m

<9kHz to 30MHz>

The EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity. The measurements were performed for vertical polarization (antenna angle: 0deg.to 360deg.) and horizontal polarization.

\* FCC 15.31 (f)(2) (9kHz-30MHz)

9kHz – 490kHz [Limit at 3m]= [Limit at 300m]-40log (3[m]/300[m])  
490kHz – 30MHz [Limit at 3m]= [Limit at 30m]-40log (3[m]/30[m])

<30MHz to 26GHz>

The measuring antenna height was varied between 1 and 4m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity. The measurements were performed for both vertical and horizontal antenna polarization.

The radiated emission measurements were made with the following detection of the test receiver and spectrum analyzer.

	9kHz to 90kHz & 110kHz to 150kHz	90kHz to 110kHz	150kHz to 490kHz	490kHz to 30MHz	30MHz to 1GHz	1GHz to 26GHz	
Detector type	PK/AV	QP	PK/AV	QP	QP	PK	AV *1)
IF Bandwidth	200Hz	200Hz	10kHz	9kHz	120kHz	RBW: 1MHz /VBW: 3MHz	-

\*1) Measurement with Average detector was not performed. The limit for Average detector is applied to the measurement value with Peak detector (or used duty factor).

The carrier level and noise levels were confirmed at each position of X, Y and Z axes of EUT to see the position of maximum noise, and the test was made at the position that has the maximum noise.

Worst position:

Antenna polarization	Frequency	Carrier	Spurious		
			9kHz-30MHz	30-1000MHz	1-26GHz
Horizontal		X	X	X	Z
Vertical		X	X	X	Z

**UL Japan, Inc.**

**Shonan EMC Lab.**


1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401




**Figure 1. Direction of the Loop Antenna**

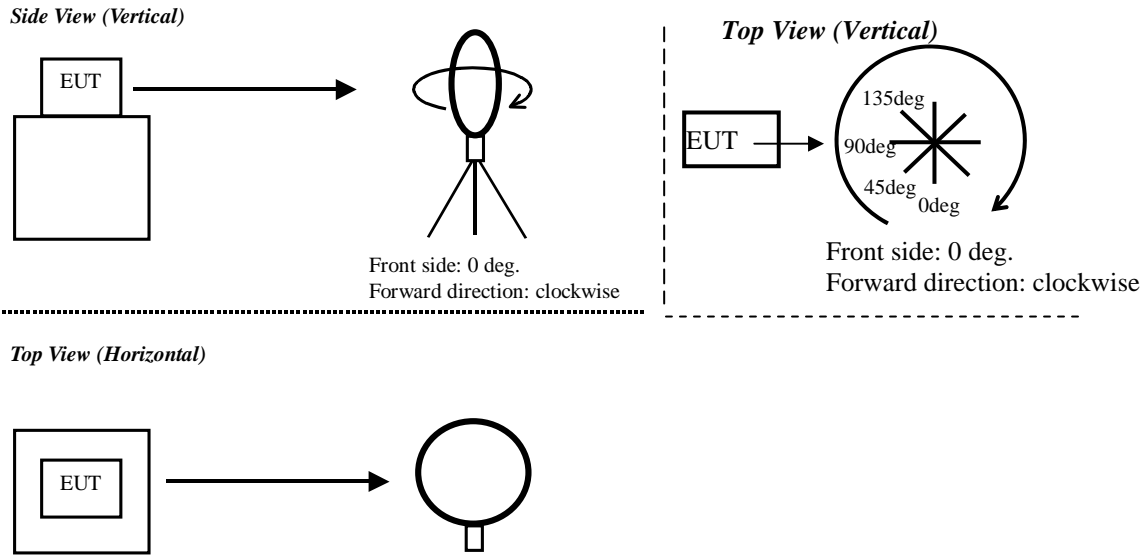

Antenna was not rotated.

**Figure 2. Antenna angle (except Loop antenna)**

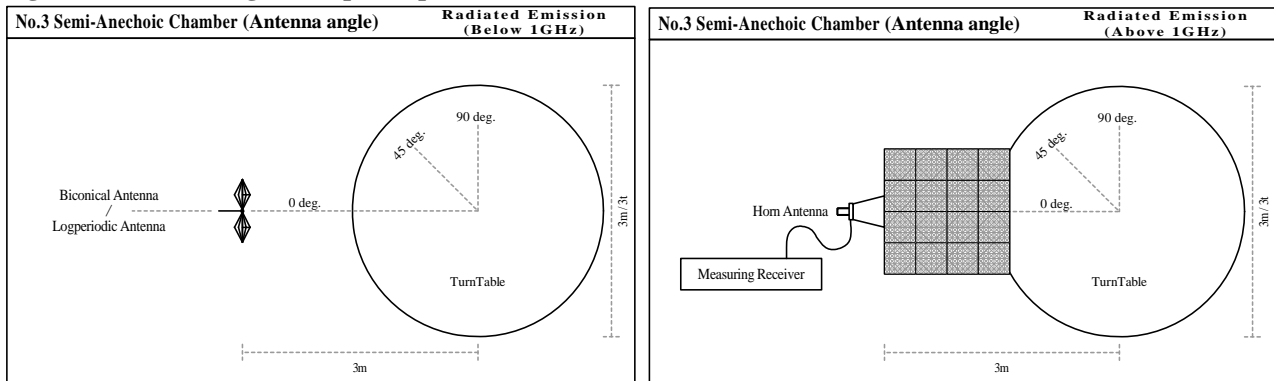

## 5.5 Results

Summary of the test results : Pass  
 \* No noise was detected in the 6th to 10th harmonics and below 30MHz.

Refer to APPENDIX 1

## **SECTION 6: 20dB bandwidth & Occupied bandwidth (99%)**

### 6.1 Test procedure

The bandwidth was measured with a spectrum analyzer connected to the antenna port.

Summary of the test results: Pass

Refer to APPENDIX 1

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

## **Contents of APPENDIXES**

### **APPENDIX 1: Test data**

20dB bandwidth  
Radiated emission  
Duty factor calculation chart  
99% Occupied bandwidth

### **APPENDIX 2: Test instruments**

Test instruments

### **APPENDIX 3: Photographs of test setup**

Radiated emission  
Pre-check of the worst position

---

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa-ken, 259-1220 JAPAN

Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401


## APPENDIX 1: Test data

### 20dB Bandwidth

Company	: PIONEER CORPORATION	UL Japan, Inc.
Equipment	: Pedaling Monitor Sensor	Shonan EMC Lab No.3 Shielded Room
Model	: SGY-PM910H L	Regulation : FCC Part15C Section 15.215
Sample No.	: 17	Test Distance : -
Power	: DC3V	Date : December 25, 2013
Mode	: Transmitting	Temperature : 22deg.C
		Humidity : 31%RH
		Engineer : Tatsuya Arai

	20dB Bandwidth [MHz]
2457MHz	1.186

#### Transmitting 2457MHz

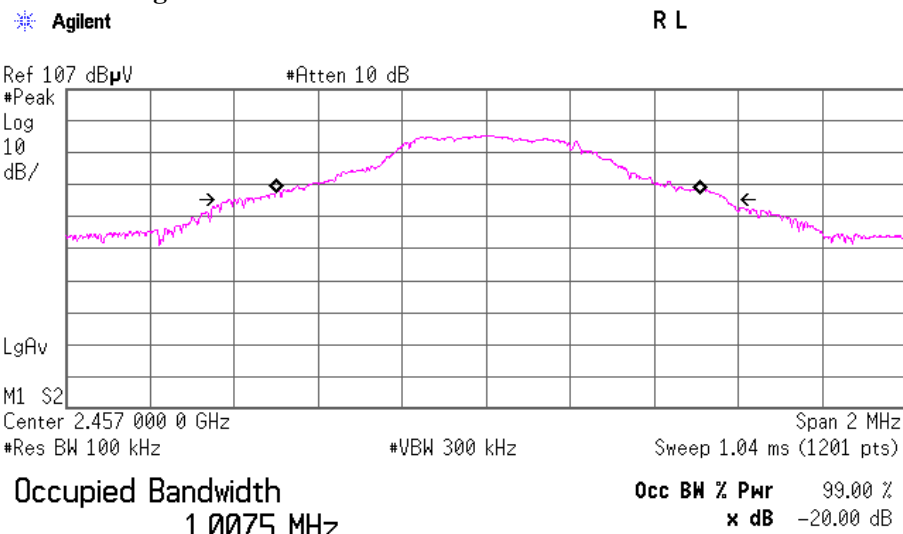

Transmit Freq Error 4.407 kHz  
Occupied Bandwidth 1.186 MHz

## Radiated Emission

Test place            No.3 Semi Anechoic Chamber  
 Date                    December 24, 2013            December 25, 2013  
 Temperature / Humidity 22 deg.C, 31 %RH            25 deg.C, 31 %RH  
 Engineer  
 Mode                    Tx,                    2457 MHz

(\* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg]	Remark
Hori.	160.000	QP	21.0	14.8	7.8	32.1	11.5	43.5	32.0	100	0	
Hori.	320.000	QP	21.0	14.3	8.6	31.9	12.0	46.0	34.0	100	0	
Hori.	2390.000	PK	43.4	26.8	14.7	38.2	46.7	53.9	7.2	100	35	*1
Hori.	2400.000	PK	44.5	26.8	14.7	38.2	47.8	53.9	<b>6.1</b>	100	35	*1
Hori.	2457.000	PK	85.7	26.8	14.8	38.2	89.1	113.9	24.8	100	35	
Hori.	2483.500	PK	44.0	26.9	14.8	38.1	47.6	53.9	6.3	100	35	*1
Hori.	4914.000	PK	57.2	31.6	7.4	37.0	59.2	73.9	14.7	102	352	
Hori.	7371.000	PK	46.4	37.3	8.8	39.4	53.1	73.9	20.8	100	0	
Hori.	9828.000	PK	43.3	38.8	10.0	37.5	54.6	73.9	19.3	100	0	
Hori.	12285.000	PK	44.6	39.6	10.9	38.3	56.8	73.9	17.1	100	0	
Vert.	160.000	QP	21.3	14.8	7.8	32.1	11.8	43.5	31.7	100	0	
Vert.	320.000	QP	20.9	14.3	8.6	31.9	11.9	46.0	34.1	100	0	
Vert.	2390.000	PK	43.7	26.8	14.7	38.2	47.0	53.9	6.9	100	242	*1
Vert.	2400.000	PK	44.0	26.8	14.7	38.2	47.3	53.9	6.6	100	242	*1
Vert.	2457.000	PK	81.9	26.8	14.8	38.2	85.3	113.9	28.6	100	242	
Vert.	2483.500	PK	42.8	26.9	14.8	38.1	46.4	53.9	7.5	100	242	*1
Vert.	4914.000	PK	56.0	31.6	7.4	37.0	58.0	73.9	15.9	100	13	
Vert.	7371.000	PK	47.2	37.3	8.8	39.4	53.9	73.9	20.0	100	0	
Vert.	9828.000	PK	43.6	38.8	10.0	37.5	54.9	73.9	19.0	100	0	
Vert.	12285.000	PK	44.2	39.6	10.9	38.3	56.4	73.9	17.5	100	0	

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18GHz)-Distance factor(above 15GHz)) - Gain(Amplifier)

Distance factor : 15GHz -40GHz : 20log(3.0m/1.0m)= 9.5dB

\*1) The limit for Average detector is applied. (out of band emission)

### Average measurement value with duty factor

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	2457.000	PK	85.7	26.8	14.8	38.2	-56.8	32.3	93.9	61.6	
Hori.	4914.000	PK	57.2	31.6	7.4	37.0	-56.8	2.4	53.9	<b>51.5</b>	
Hori.	7371.000	PK	46.4	37.3	8.8	39.4	-56.8	-3.7	53.9	57.6	
Hori.	9828.000	PK	43.3	38.8	10.0	37.5	-56.8	-2.2	53.9	56.1	
Hori.	12285.000	PK	44.6	39.6	10.9	38.3	-56.8	0.0	53.9	53.9	
Vert.	2457.000	PK	81.9	26.8	14.8	38.2	-56.8	28.5	93.9	65.4	
Vert.	4914.000	PK	56.0	31.6	7.4	37.0	-56.8	1.2	53.9	52.7	
Vert.	7371.000	PK	47.2	37.3	8.8	39.4	-56.8	-2.9	53.9	56.8	
Vert.	9828.000	PK	43.6	38.8	10.0	37.5	-56.8	-1.9	53.9	55.8	
Vert.	12285.000	PK	44.2	39.6	10.9	38.3	-56.8	-0.4	53.9	54.3	

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18GHz)-Distance factor(above 15GHz)) - Gain(Amplifier) + Duty factor

Distance factor : 15GHz -40GHz : 20log(3.0m/1.0m)= 9.5dB

**UL Japan, Inc.**

**Shonan EMC Lab.**

1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN


Telephone : +81 463 50 6400

Facsimile : +81 463 50 6401

Test place           UL Japan, Inc. Shonan EMC Lab.    No.3 Semi Anechoic Chamber  
 Date                 December 24, 2013  
 Temperature / Humidity   22 deg.C, 31 %RH  
 Engineer             Tatsuya Arai

## Duty Factor Calculation chart

Tx 2457MHz

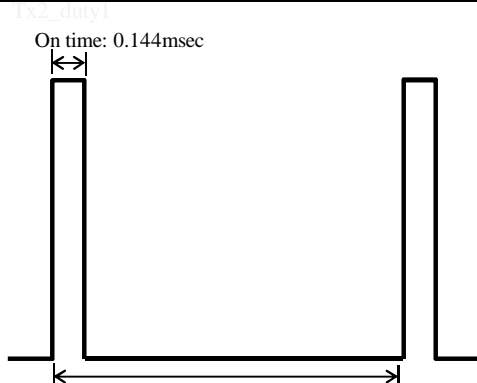Duty Factor Calculation	
<b>Duty Factor: <math>20\log(1/\text{duty cycle}) = 56.8\text{dB}</math></b> <b>duty cycle = <math>0.144 / 100 = 0.00144 (0.144\%)</math></b>	
 <p>On time: 0.144msec</p> <p>One period</p> <p>·Pedaling mode: 167msec</p> <p>·Power meter mode: 250msec</p> <p>* This sample operates in one of two modes above.                  Therefore, worst case of ON time during 100ms is a single.</p>	<p style="color: lightgrey;">Tx2_duty1</p> <p style="color: lightgrey;">Tx2_duty2</p>


**UL Japan, Inc.**  
**Shonan EMC Lab.**  
 1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN  
 Telephone     : +81 463 50 6400  
 Facsimile     : +81 463 50 6401

### 99% Occupied Bandwidth

Company : PIONEER CORPORATION Equipment : Pedaling Monitor Sensor Model : SGY-PM910HL Sample No. : 17 Power : DC3V Mode : Transmitting	UL Japan, Inc. Shonan EMC Lab No.3 Shielded Room Regulation : RSS-Gen Test Distance : - Date : December 25, 2013 Temperature : 22deg.C Humidity : 31%RH Engineer : Tatsuya Arai
-------------------------------------------------------------------------------------------------------------------------------------------------------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

	99% Occupied Bandwidth [kHz]
2457MHz	835.452

#### Transmitting 2457MHz

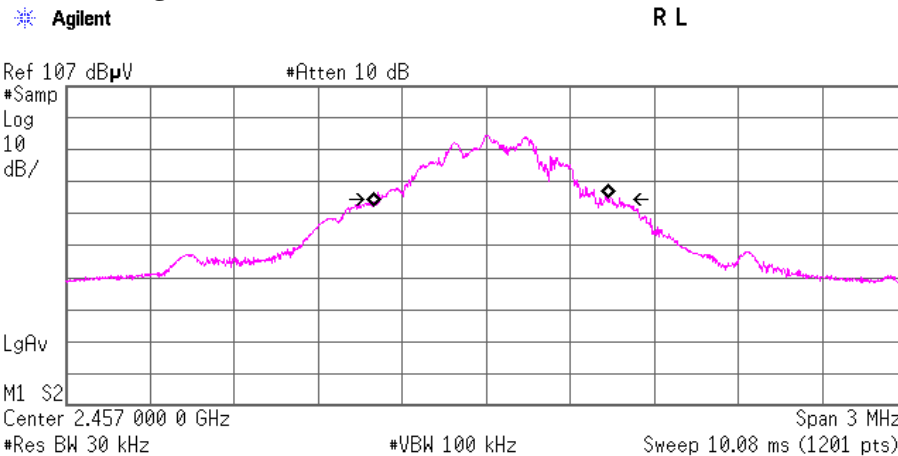

<b>Occupied Bandwidth</b>	<b>Occ BW % Pwr</b> 99.00 %
835.4521 kHz	<b>x dB</b> -20.00 dB

**Transmit Freq Error** 17.852 kHz  
**Occupied Bandwidth** 864.681 kHz\*

**UL Japan, Inc.**  
**Shonan EMC Lab.**  
 1-22-3 Megumigaoka, Hiratsuka-shi, Kanagawa 259-1220 JAPAN  
 Telephone : +81 463 50 6400  
 Facsimile : +81 463 50 6401

**APPENDIX 2**  
**Test Instruments**

**EMI test equipment**

Control No.	Instrument	Manufacturer	Model No	Serial No	Test Item	Calibration Date * Interval(month)
SAEC-03(NSA)	Semi-Anechoic Chamber	TDK	SAEC-03(NSA)	3	RE	2013/07/09 * 12
SAF-05	Pre Amplifier	TOYO Corporation	TPA0118-36	1440490	RE	2013/11/22 * 12
SCC-G03	Coaxial Cable	Suhner	SUCOFLEX 104A	46499/4A	RE	2013/04/11 * 12
SCC-G23	Coaxial Cable	Suhner	SUCOFLEX 104	297342/4	RE	2013/05/22 * 12
SHA-03	Horn Antenna	Schwarzbeck	BBHA9120D	9120D-739	RE	2013/08/19 * 12
SOS-05	Humidity Indicator	A&D	AD-5681	4062518	RE	2013/02/27 * 12
KSA-08	Spectrum Analyzer	Agilent	E4446A	MY46180525	RE/AT	2013/03/04 * 12
SJM-11	Measure	PROMART	SEN1935	-	RE	-
COTS-SEMI-1	EMI Software	TSJ	TEPTO-DV(RE,CE,RFI,MF)	-	RE	-
SAT10-06	Attenuator	Agilent	8493C-010	74865	RE	2013/11/22 * 12
SFL-18	Highpass Filter	MICRO-TRONICS	HPM50111	119	RE	2013/11/22 * 12
SAT10-11	Attenuator	Weinschel Corp.	54A-10	37588	AT	2013/04/09 * 12
SCC-G12	Coaxial Cable	Suhner	SUCOFLEX 102	30790/2	AT	2013/03/16 * 12
SOS-06	Humidity Indicator	A&D	AD-5681	4062118	AT	2013/03/07 * 12
SAF-03	Pre Amplifier	SONOMA	310N	290213	RE	2013/02/12 * 12
SAT6-06	Attenuator	JFW	50HF-006N	-	RE	2013/02/12 * 12
SBA-03	Biconical Antenna	Schwarzbeck	BBA9106	91032666	RE	2013/10/26 * 12
SCC-C1/C2/C3/C4/C5/C10/SRSE-03	Coaxial Cable&RF Selector	Fujikura/Fujikura/Suhner/Suhner/Suhner/Suhner/TOYO	8D2W/12DSFA/141PE/141PE/141PE/141PE/NS4906	-/0901-271(RF Selector)	RE	2013/04/03 * 12
SLA-03	Logperiodic Antenna	Schwarzbeck	UHALP9108A	UHALP 9108-A 0901	RE	2013/10/26 * 12
STR-06	Test Receiver	Rohde & Schwarz	ESCI	101259	RE	2013/02/27 * 12
SLP-02	Loop Antenna	Rohde & Schwarz	HFH2-Z2	100218	RE	2013/11/08 * 12
SAT6-07	Attenuator	JFW	50HF-006N	-	RE	2013/02/12 * 12
SHA-05	Horn Antenna	ETS LINDGREN	3160-09	LM4210	RE	2013/03/14 * 12
SAF-09	Pre Amplifier	TOYO Corporation	HAP18-26W	00000018	RE	2013/03/19 * 12
SCC-G18	Coaxial Cable	Suhner	SUCOFLEX 104A	46292/4A	RE	2013/03/16 * 12

The expiration date of the calibration is the end of the expired month .  
 As for some calibrations performed after the tested dates , those test equipment have been controlled by means of an unbroken chains of calibrations .

All equipment is calibrated with valid calibrations . Each measurement data is traceable to the national or international standards .

Test Item :

RE: Out of Band Emission (Radiated)

AT: Antenna terminal conducted test