



ADIO TEST REPORT

Test Report No. 14581758S-B

Customer	PIONEER CORPORATION
Description of EUT	RDS AV RECEIVER
Model Number of EUT	DMH-WT3800NEX
FCC ID	AJDK122
Test Regulation	FCC Part 15 Subpart C
Test Result	Complied (Refer to SECTION 3)
Issue Date	November 24, 2022
Remarks	Bluetooth (BR / EDR) parts

Representative Test Engineer	Approved By
	
Takahiro Kawakami Engineer	Kazutaka Takeyama Leader
 	
CERTIFICATE 1266.03	
☐ The testing in which "Non-accreditation" is displayed is outside the accreditation scopes in UL Japan, Inc.	
☒ There is no testing item of "Non-accreditation".	

Report Cover Page - Form-ULID-003532 (DCS:13-EM-F0429) Issue# 21.0

ANNOUNCEMENT

- This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
- The results in this report apply only to the sample tested. (Laboratory was not involved in sampling.)
- This sample tested is in compliance with the limits of the above regulation.
- The test results in this test report are traceable to the national or international standards.
- This test report must not be used by the customer to claim product certification, approval, or endorsement by the A2LA accreditation body.
- This test report covers Radio technical requirements.
It does not cover administrative issues such as Manual or non-Radio test related Requirements. (if applicable)
- The all test items in this test report are conducted by UL Japan, Inc. Shonan EMC Lab.
- The opinions and the interpretations to the result of the description in this report are outside scopes where UL Japan, Inc. has been accredited.
- The information provided from the customer for this report is identified in Section 1.
- For test report(s) referred in this report, the latest version (including any revisions) is always referred.

REVISION HISTORY

Original Test Report No.: 14581758S-B

Revision	Test Report No.	Date	Page Revised Contents
- (Original)	14581758S-B	November 24, 2022	-

Reference: Abbreviations (Including words undescribed in this report)

A2LA	The American Association for Laboratory Accreditation	ICES	Interference-Causing Equipment Standard
AC	Alternating Current	IEC	International Electrotechnical Commission
AFH	Adaptive Frequency Hopping	IEEE	Institute of Electrical and Electronics Engineers
AM	Amplitude Modulation	IF	Intermediate Frequency
Amp, AMP	Amplifier	ILAC	International Laboratory Accreditation Conference
ANSI	American National Standards Institute	ISED	Innovation, Science and Economic Development Canada
Ant, ANT	Antenna	ISO	International Organization for Standardization
AP	Access Point	JAB	Japan Accreditation Board
ASK	Amplitude Shift Keying	LAN	Local Area Network
Atten., ATT	Attenuator	LIMS	Laboratory Information Management System
AV	Average	MCS	Modulation and Coding Scheme
BPSK	Binary Phase-Shift Keying	MRA	Mutual Recognition Arrangement
BR	Bluetooth Basic Rate	N/A	Not Applicable
BT	Bluetooth	NIST	National Institute of Standards and Technology
BT LE	Bluetooth Low Energy	NS	No signal detect.
BW	BandWidth	NSA	Normalized Site Attenuation
Cal Int	Calibration Interval	NVLAP	National Voluntary Laboratory Accreditation Program
CCK	Complementary Code Keying	OBW	Occupied Band Width
Ch., CH	Channel	OFDM	Orthogonal Frequency Division Multiplexing
CISPR	Comite International Special des Perturbations Radioelectriques	P/M	Power meter
CW	Continuous Wave	PCB	Printed Circuit Board
DBPSK	Differential BPSK	PER	Packet Error Rate
DC	Direct Current	PHY	Physical Layer
D-factor	Distance factor	PK	Peak
DFS	Dynamic Frequency Selection	PN	Pseudo random Noise
DQPSK	Differential QPSK	PRBS	Pseudo-Random Bit Sequence
DSSS	Direct Sequence Spread Spectrum	PSD	Power Spectral Density
EDR	Enhanced Data Rate	QAM	Quadrature Amplitude Modulation
EIRP, e.i.r.p.	Equivalent Isotropically Radiated Power	QP	Quasi-Peak
EMC	ElectroMagnetic Compatibility	QPSK	Quadri-Phase Shift Keying
EMI	ElectroMagnetic Interference	RBW	Resolution Band Width
EN	European Norm	RDS	Radio Data System
ERP, e.r.p.	Effective Radiated Power	RE	Radio Equipment
EU	European Union	RF	Radio Frequency
EUT	Equipment Under Test	RMS	Root Mean Square
Fac.	Factor	RSS	Radio Standards Specifications
FCC	Federal Communications Commission	Rx	Receiving
FHSS	Frequency Hopping Spread Spectrum	SA, S/A	Spectrum Analyzer
FM	Frequency Modulation	SG	Signal Generator
Freq.	Frequency	SVSWR	Site-Voltage Standing Wave Ratio
FSK	Frequency Shift Keying	TR	Test Receiver
GFSK	Gaussian Frequency-Shift Keying	Tx	Transmitting
GNSS	Global Navigation Satellite System	VBW	Video BandWidth
GPS	Global Positioning System	Vert.	Vertical
Hori.	Horizontal	WLAN	Wireless LAN

CONTENTS	PAGE
SECTION 1: Customer Information	5
SECTION 2: Equipment Under Test (EUT).....	5
SECTION 3: Test Specification, Procedures & Results	7
SECTION 4: Operation of EUT during testing.....	10
SECTION 5: Radiated Spurious Emission	14
SECTION 6: Antenna Terminal Conducted Tests.....	16
APPENDIX 1: Test data	17
20 dB Bandwidth, 99 %Occupied Bandwidth and Carrier Frequency Separation	17
Number of Hopping Frequency	21
Dwell time.....	23
Maximum Peak Output Power.....	26
Radiated Spurious Emission	28
Conducted Spurious Emission	39
Conducted Emission Band Edge compliance	45
APPENDIX 2: Test Instruments.....	47
APPENDIX 3: Photographs of test setup	49
Radiated Spurious Emission	49
Antenna Terminal Conducted Tests.....	50

SECTION 1: Customer Information

Company Name	PIONEER CORPORATION
Address	25-1 Yamada, Kawagoe-shi, Saitama-ken 350-8555, Japan
Telephone Number	+81-49-228-7787
Contact Person	Shigeru Yoshida

The information provided from the customer is as follows;

- Customer, Description of EUT, Model Number of EUT, FCC ID on the cover and other relevant pages
- Operating/Test Mode(s) (Mode(s)) on all the relevant pages
- SECTION 1: Customer Information
- SECTION 2: Equipment Under Test (EUT) other than the Receipt Date and Test Date
- SECTION 4: Operation of EUT during testing

* The laboratory is exempted from liability of any test results affected from the above information in SECTION 2 and 4.

SECTION 2: Equipment Under Test (EUT)

2.1 Identification of EUT

Description	RDS AV RECEIVER
Model Number	DMH-WT3800NEX
Serial Number	Refer to SECTION 4.2
Condition	Production prototype (Not for Sale: This sample is equivalent to mass-produced items.)
Modification	No Modification by the test lab
Receipt Date	July 7, 2022 (Used for Radiated Emission test) July 16, 2022 (Used for Antenna Terminal conducted test)
Test Date	July 15 to September 5, 2022

2.2 Product Description

General Specification

Rating	DC 14.4 V (DC 10.8 V to 15.1 V)
Operating temperature	-10 deg. C to +60 deg. C

Radio Specification

WLAN (IEEE802.11b/11g/11n-20)

Equipment Type	Transceiver
Frequency of Operation	2412 MHz to 2462 MHz
Type of Modulation	DSSS, OFDM
Antenna Gain	-1.40 dBi

WLAN (IEEE802.11a/11n-20/11ac-20/11n-40/11ac-40/11ac-80)

Equipment Type	Transceiver	
Frequency of Operation	20 MHz Band:	5745 MHz
	40 MHz Band:	5755 MHz
	80 MHz Band:	5775 MHz
Type of Modulation	OFDM	
Antenna Gain	0.81 dBi	

Bluetooth (BR / EDR / Low Energy)

Equipment Type	Transceiver
Frequency of Operation	2402 MHz to 2480 MHz
Type of Modulation	FHSS (GFSK, $\pi/4$ DQPSK, 8 DPSK)
Antenna Gain	-1.01 dBi

SECTION 3: Test Specification, Procedures & Results

3.1 Test Specification

Test Specification	FCC Part 15 Subpart C The latest version on the first day of the testing period
Title	FCC 47 CFR Part 15 Radio Frequency Device Subpart C Intentional Radiators Section 15.207 Conducted limits Section 15.247 Operation within the bands 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz

*The customer has declared that the EUT has complies with FCC Part 15 Subpart B as SDoC.

3.2 Procedures and Results

Item	Test Procedure	Specification	Worst Margin	Results	Remarks
Conducted Emission	FCC: ANSI C63.10-2013 6. Standard test methods ----- ISED: RSS-Gen 8.8	FCC: Section 15.207 ----- ISED: RSS-Gen 8.8	-	N/A	*1)
Carrier Frequency Separation	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 ISED: -	FCC: Section15.247(a)(1) ----- ISED: RSS-247 5.1 (b)	See data.	Complied a)	Conducted
20 dB Bandwidth	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 ISED: -	FCC: Section15.247(a)(1) ----- ISED: RSS-247 5.1 (a)		Complied a)	Conducted
Number of Hopping Frequency	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 ISED: -	FCC: Section15.247(a)(1)(iii) ----- ISED: RSS-247 5.1 (d)		Complied b)	Conducted
Dwell time	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 ISED: -	FCC: Section15.247(a)(1)(iii) ----- ISED: RSS-247 5.1 (d)		Complied c)	Conducted
Maximum Peak Output Power	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 ISED: RSS-Gen 6.12	FCC: Section15.247(a)(b)(1) ----- ISED: RSS-247 5.4 (b)		Complied d)	Conducted
Spurious Emission & Band Edge Compliance	FCC: KDB 558074 D01 15.247 Meas Guidance v05r02 ISED: RSS-Gen 6.13	FCC: Section15.247(d) ----- ISED: RSS-247 5.5 RSS-Gen 8.9 RSS-Gen 8.10	2.3 dB 933.007 MHz, QP, Vert. Mode: Tx, Hopping Off, 3DH5 2402 MHz	Complied e) / f)	Conducted/ Radiated (above 30 MHz) *2)
Note: UL Japan, Inc.'s EMI Work Procedures: Work Instructions-ULID-003591 and Work Instructions-ULID-003593. * In case any questions arise about test procedure, ANSI C63.10: 2013 is also referred. *1) The test is not applicable since the EUT does not have AC Mains. *2) Radiated test was selected over 30 MHz based on section 15.247(d). a) Refer to APPENDIX 1 (data of 20 dB Bandwidth, 99 % Occupied Bandwidth and Carrier Frequency Separation) b) Refer to APPENDIX 1 (data of Number of Hopping Frequency) c) Refer to APPENDIX 1 (data of Dwell time) d) Refer to APPENDIX 1 (data of Maximum Peak Output Power) e) Refer to APPENDIX 1 (data of Conducted Spurious Emission) f) Refer to APPENDIX 1 (data of Radiated Spurious Emission)					

FCC Part 15.31 (e)

The EUT provides stable voltage constantly to the wireless transmitter regardless of input voltage. Instead of a new battery, DC power supply was used for the test. That does not affect the test result, therefore the EUT complies with the requirement.

FCC Part 15.203 Antenna requirement

It is impossible for end users to replace the antenna, because the antenna is mounted inside of the EUT. Therefore, the equipment complies with the antenna requirement of Section 15.203.

3.3 Addition to Standard

Item	Test Procedure	Specification	Worst Margin	Results	Remarks
99 % Occupied Bandwidth	ISED: RSS-Gen 6.7	ISED: -	N/A	- a)	Conducted
a) Refer to APPENDIX 1 (data of 20 dB Bandwidth, 99 % Occupied Bandwidth and Carrier Frequency Separation)					

Other than above, no addition, exclusion nor deviation has been made from the standard.

3.4 Uncertainty

Measurement uncertainty is not taken into account when stating conformity with a specified requirement.

Note: When margins obtained from test results are less than the measurement uncertainty, the test results may exceed the limit.

The following uncertainties have been calculated to provide a confidence level of 95 % using a coverage factor $k = 2$.

Item	Frequency range	Uncertainty (+/-)			
		No. 1 SAC / SR	No. 2 SAC / SR	No. 3 SAC / SR	No. 4,5,6,8 SR
Conducted emission (AC Mains) LISN	150 kHz to 30 MHz	2.9 dB	2.9 dB	3.0 dB	2.9 dB
Radiated emission (Measurement distance: 3 m)	9 kHz to 30 MHz	3.2 dB	3.1 dB	3.1 dB	-
	30 MHz to 200 MHz	4.6 dB	4.6 dB	4.6 dB	-
	200 MHz to 1 GHz	6.0 dB	6.1 dB	6.1 dB	-
	1 GHz to 6 GHz	4.7 dB	4.7 dB	4.7 dB	-
	6 GHz to 18 GHz	5.2 dB	5.3 dB	5.3 dB	-
	18 GHz to 40 GHz	5.4 dB	5.5 dB	5.5 dB	-
Radiated emission (Measurement distance: 1 m)	1 GHz to 18 GHz	5.6 dB	5.6 dB	5.6 dB	-
	18 GHz to 40 GHz	5.8 dB	5.8 dB	5.8 dB	-

SAC=Semi-Anechoic Chamber

SR= Shielded Room is applied besides radiated emission

Antenna terminal test	Uncertainty (+/-)
Power Measurement above 1 GHz (Average Detector) SPM-06	1.2 dB
Power Measurement above 1 GHz (Peak Detector) SPM-06	2.0 dB
Power Measurement above 1 GHz (Average Detector) SPM-07	1.2 dB
Power Measurement above 1 GHz (Peak Detector) SPM-07	1.3 dB
Power Measurement above 1 GHz (Average Detector) SPM-13	1.3 dB
Power Measurement above 1 GHz (Peak Detector) SPM-13	1.3 dB
Spurious emission (Conducted) below 1 GHz	0.93 dB
Conducted emissions Power Density Measurement 1 GHz to 3 GHz	0.92 dB
Conducted emissions Power Density Measurement 3 GHz to 18 GHz	2.3 dB
Spurious emission (Conducted) 18 GHz to 26.5 GHz	2.3 dB
Spurious emission (Conducted) 26.5 GHz to 40 GHz	2.3 dB
Bandwidth Measurement	0.012 %
Duty cycle and Time Measurement	0.27 %
Temperature_SCH-01	0.93 deg. C.
Humidity_SCH-01	4.1 %
Temperature_SCH-02	2.0 deg. C.
Humidity_SCH-02	6.6 %
Voltage	0.97 %

3.5 Test Location

UL Japan, Inc. Shonan EMC Lab.

1-22-3, Megumigaoka, Hiratsuka-shi, Kanagawa-ken 259-1220 Japan

Telephone: +81-463-50-6400

A2LA Certificate Number: 1266.03

(FCC test firm registration number: 626366, ISED lab company number: 2973D / CAB identifier: JP0001)

Test site	IC Registration Number	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Maximum measurement distance
No.1 Semi-anechoic chamber	2973D-1	20.6 x 11.3 x 7.65	20.6 x 11.3	10 m
No.2 Semi-anechoic chamber	2973D-2	20.6 x 11.3 x 7.65	20.6 x 11.3	10 m
No.3 Semi-anechoic chamber	2973D-3	12.7 x 7.7 x 5.35	12.7 x 7.7	5 m
No.4 Semi-anechoic chamber	-	8.1 x 5.1 x 3.55	8.1 x 5.1	-
No.1 Shielded room	-	6.8 x 4.1 x 2.7	6.8 x 4.1	-
No.2 Shielded room	-	6.8 x 4.1 x 2.7	6.8 x 4.1	-
No.3 Shielded room	-	6.3 x 4.7 x 2.7	6.3 x 4.7	-
No.4 Shielded room	-	4.4 x 4.7 x 2.7	4.4 x 4.7	-
No.5 Shielded room	-	7.8 x 6.4 x 2.7	7.8 x 6.4	-
No.6 Shielded room	-	7.8 x 6.4 x 2.7	7.8 x 6.4	-
No.8 Shielded room	-	3.45 x 5.5 x 2.4	3.45 x 5.5	-
No.1 Measurement room	-	2.55 x 4.1 x 2.5	-	-

3.6 Test Data, Test Instruments, and Test Set Up

Refer to APPENDIX.

SECTION 4: Operation of EUT during testing

4.1 Operating Mode(s)


Mode	Remarks*
Bluetooth (BT)	BR / EDR, Payload: PRBS9
*EUT has the power settings by the software as follows; Power Setting: Fixed Software: SOC: 0.020300 (Date: 2022.05 24, Storage location: EUT memory) *This setting of software is the worst case. Any conditions under the normal use do not exceed the condition of setting. In addition, end users cannot change the settings of the output power of the product.	

Details of Operating Mode(s)

Test Item	Mode	Hopping	Tested Frequency
Radiated Spurious Emission (Below 1 GHz)	Tx 3DH5 *1)	Off	2402 MHz
Radiated Spurious Emission (Above 1 GHz), Conducted Spurious Emission	Tx DH5 Tx 3DH5	Off	2402 MHz 2441 MHz 2480 MHz
Carrier Frequency Separation	Tx DH5 Tx 3DH5	On	2402 MHz 2441 MHz 2480 MHz
20 dB Bandwidth	Tx DH5 Tx 3DH5	Off	2402 MHz 2441 MHz 2480 MHz
Number of Hopping Frequency	Tx DH5 Tx 3DH5	On	-
Dwell time	Tx DH1, DH3, DH5 Tx 3DH1, 3DH3, 3DH5	On	-
Maximum Peak Output Power	Tx DH5 Tx 2DH5 Tx 3DH5	Off	2402 MHz 2441 MHz 2480 MHz
Band Edge Compliance (Conducted)	Tx DH5 Tx 3DH5	On ----- Off	2402 MHz 2480 MHz
99 % Occupied Bandwidth	Tx DH5 Tx 3DH5	On ----- Off	2402 MHz 2441 MHz 2480 MHz
*As a result of preliminary test, the formal test was performed with the above modes, which had the maximum payload length (except Dwell time test) *2DH mode (2Mb/s EDR: pi/4DQPSK) was excluded for other tests than power measurement by using 3DH mode (3 Mb/s EDR: 8DPSK) as a representative. *It is considered that the non-tested packet type (e.g. inquiry) can be omitted as it is complied with above all the test items based on Bluetooth Core specification. *1) Radiated spurious emissions (Below 1 GHz) were limited to the channel that had the highest power during the antenna terminal test, as preliminary testing indicated that changing the operating frequency had no significant impact on the emissions in those frequency bands.			

4.2 Configuration and Peripherals

[Antenna Terminal Conducted test]

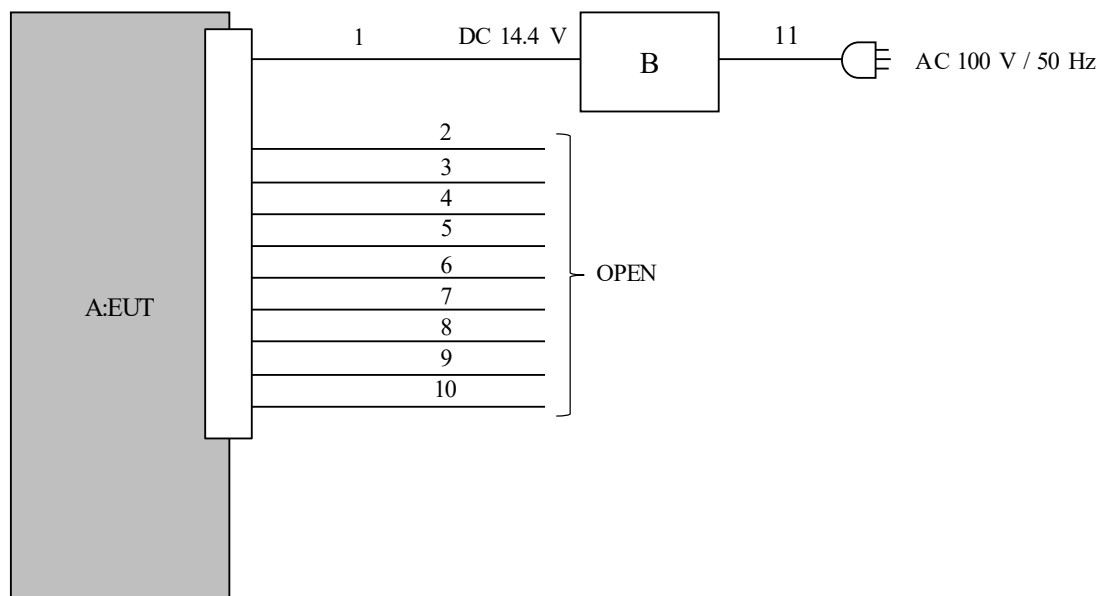


Description of EUT and Support Equipment

No.	Item	Model number	Serial Number	Manufacturer	Remarks
A	RDS AV RECEIVER	DMH-WT3800NEX	BFTM000037UC	PIONEER	EUT
B	Power Supply (DC)	PAN35-10A	ML002085	KIKUSUI	-

List of Cables Used

No.	Name	Length (m)	Shield		Remarks
			Cable	Connector	
1	DC	0.2 + 0.1 + 1.5	Unshielded	Unshielded	-
2	Speaker	0.2	Unshielded	Unshielded	-
3	Speaker	0.2	Unshielded	Unshielded	-
4	Speaker	0.2	Unshielded	Unshielded	-
5	Speaker	0.2	Unshielded	Unshielded	-
6	ILLUMINATION	0.2	Unshielded	Unshielded	-
7	ANTENNA CONTROL	0.2	Unshielded	Unshielded	-
8	REVERSE	2.0	Unshielded	Unshielded	-
9	CARSPEED	2.0	Unshielded	Unshielded	-
10	PARKING BRAKE	2.0	Unshielded	Unshielded	-
11	AC	3.0	Unshielded	Unshielded	-

[Radiated Emission test]

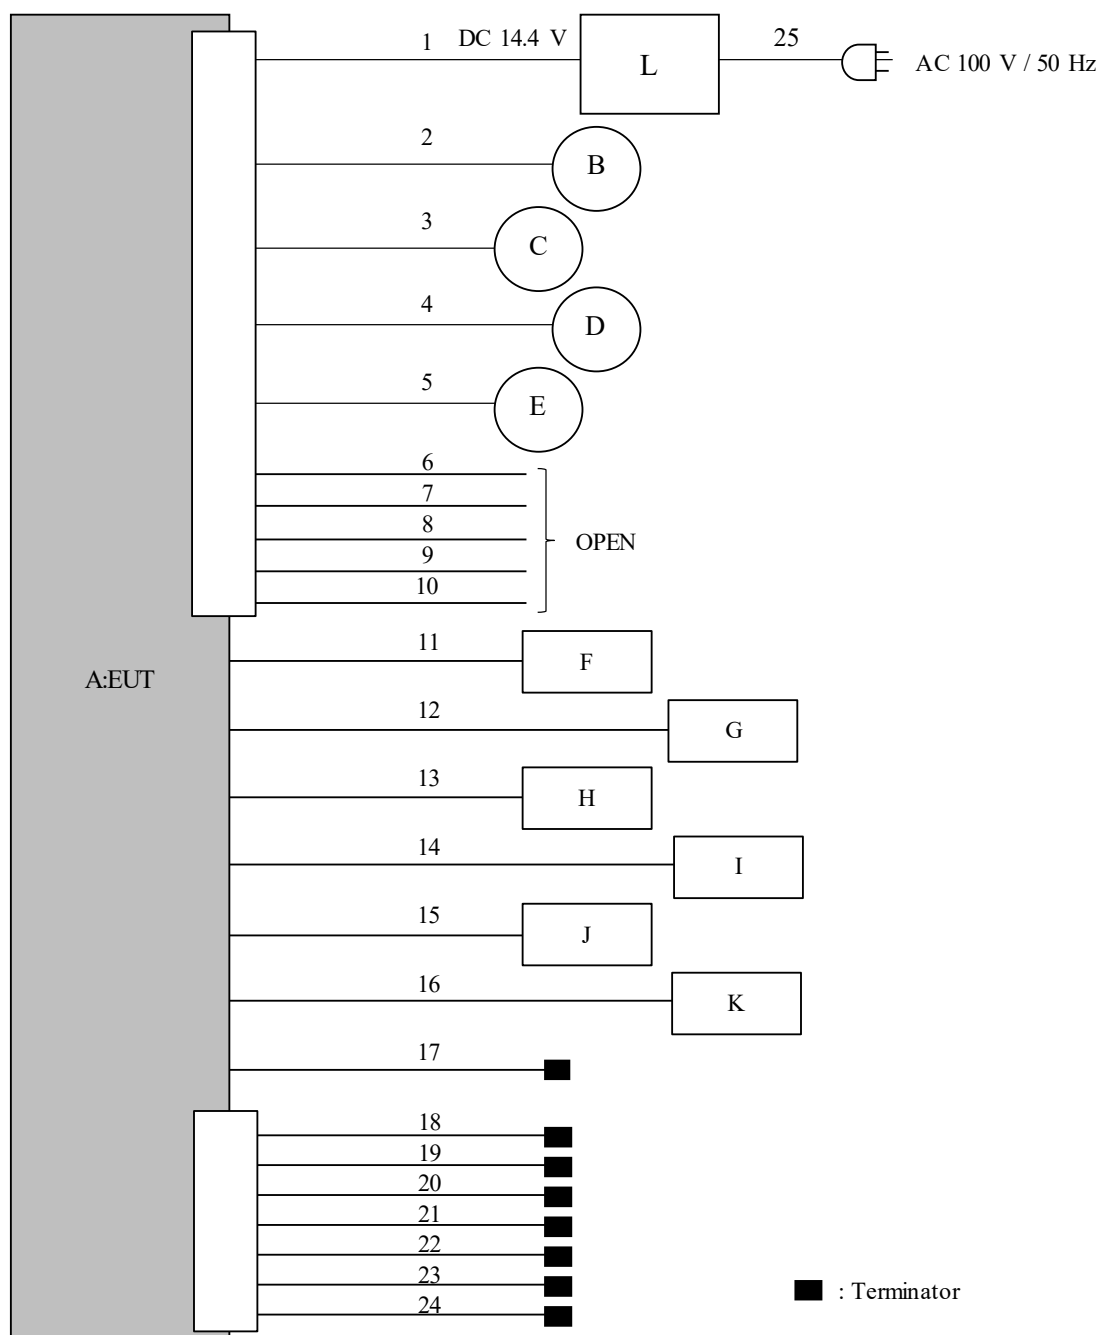

* Cabling and setup(s) were taken into consideration and test data was taken under worse case conditions.

Description of EUT and Support Equipment

No.	Item	Model number	Serial Number	Manufacturer	Remarks
A	RDS AV RECEIVER	DMH-WT3800NEX	BFTM000016UC	PIONEER	EUT
B	Speaker	TS-F1030	V44QAH2	PIONEER	-
C	Speaker	TS-F1030	V44QAH2	PIONEER	-
D	Speaker	TS-F1030	V44QBA1	PIONEER	-
E	Speaker	TS-F1030	V44QBA1	PIONEER	-
F	Steering SW (dummy load)	-	-	-	-
G	Sirius XM	SXV200	ZX8N0442	-	-
H	USB Memory	SDDDC2-064G-G46	-	SanDisk	-
I	Mic	CPM1127	-	ZHEJIANG YUESUI ELECTRON STOCK CO.,LTD.	-
J	GPS	CXF1333	-	MITSUMI ELECTRIC CO., LTD.	-
K	iData Link (dummy load)	-	-	-	-
L	Power Supply (DC)	PAN35-10A	BP002287	KIKUSUI	-

List of Cables Used

No.	Name	Length (m)	Shield		Remarks
			Cable	Connector	
1	DC	3.0	Unshielded	Unshielded	-
2	Speaker (FR)	1.3	Unshielded	Unshielded	-
3	Speaker (FL)	1.3	Unshielded	Unshielded	-
4	Speaker (RR)	1.3	Unshielded	Unshielded	-
5	Speaker (RL)	1.3	Unshielded	Unshielded	-
6	PARKING BRAKE	2.0	Unshielded	Unshielded	-
7	REVERSE	2.0	Unshielded	Unshielded	-
8	CARSPEED	2.0	Unshielded	Unshielded	-
9	Antenna Control	2.0	Unshielded	Unshielded	-
10	Signal	1.1	Unshielded	Unshielded	-
11	Signal	0.9	Unshielded	Unshielded	-
12	Sirius XM	0.6	Shielded	Shielded	-
13	USB	1.4	Shielded	Shielded	-
14	Mic	3.0	Unshielded	Unshielded	-
15	GPS	3.4	Shielded	Shielded	-
16	iData Link	1.0	Unshielded	Unshielded	-
17	FM	2.1	Shielded	Shielded	-
18	Rear Out	1.6	Unshielded	Unshielded	-
19	Front Out	1.6	Unshielded	Unshielded	-
20	Sub Woofer Out	1.6	Unshielded	Unshielded	-
21	Rear View Camera IN	1.7	Unshielded	Unshielded	-
22	Rear Monitor Out	1.7	Unshielded	Unshielded	-
23	AUX IN	1.7	Unshielded	Unshielded	-
24	Mute	1.5	Unshielded	Unshielded	-
25	AC	2.0	Unshielded	Unshielded	-

SECTION 5: Radiated Spurious Emission

Test Procedure

[For below 1 GHz]

EUT was placed on a urethane platform of nominal size, 1.0 m by 2.0 m, raised 0.8 m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with a ground plane.

[For above 1 GHz]

EUT was placed on a urethane platform of nominal size, 0.5 m by 0.5 m, raised 1.5 m above the conducting ground plane.

The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with absorbent materials lined on a ground plane.

The height of the measuring antenna varied between 1 m and 4 m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field strength.

Test antenna was aimed at the EUT for receiving the maximum signal and always kept within the illumination area of the 3 dB beamwidth of the antenna.

The measurements were performed for both vertical and horizontal antenna polarization with the Test Receiver, or the Spectrum Analyzer.

The measurements were made with the following detector function of the test receiver and the Spectrum analyzer (in linear mode).

The test was made with the detector (RBW/VBW) in the following table.

When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

Test Antennas are used as below;

Frequency	30 MHz to 200 MHz	200 MHz to 1 GHz	Above 1 GHz
Antenna Type	Biconical	Logperiodic	Horn

In any 100 kHz bandwidth outside the restricted band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator confirmed 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on a radiated measurement.


20 dBc was applied to the frequency over the limit of FCC 15.209 / Table 4 of RSS-Gen 8.9 (ISED) and outside the restricted band of FCC15.205 / Table 6 of RSS-Gen 8.10 (ISED).

Frequency	Below 1 GHz	Above 1 GHz		20 dBc
Instrument used	Test Receiver	Spectrum Analyzer		Spectrum Analyzer
Detector	QP	PK	AV *1)	PK
IF Bandwidth	BW 120 kHz	RBW: 1 MHz VBW: 3 MHz	RBW: 1 MHz VBW: 1/T (T: burst length, refer to Burst rate confirmation sheet) Detector: Peak	RBW: 100 kHz VBW: 300 kHz

*1) Average Power Measurement was performed based on KDB 558074 D01 15.247 Meas Guidance v05r02.


Figure 2: Test Setup

Below 1 GHz

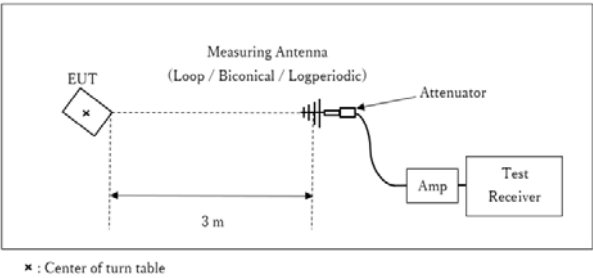

Test Distance: 3 m


1 GHz to 10 GHz

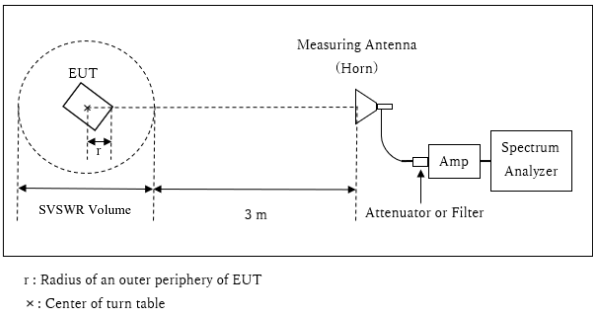

Distance Factor: $20 \times \log(3.86 \text{ m} / 3.0 \text{ m}) = 2.19 \text{ dB}$
* Test Distance: $(3 + \text{SVSWR Volume} / 2) - r = 3.86 \text{ m}$

SVSWR Volume : 2.0 m
(SVSWR Volume has been calibrated based on CISPR 16-1-4.)
 $r = 0.14 \text{ m}$

10 GHz to 26.5 GHz

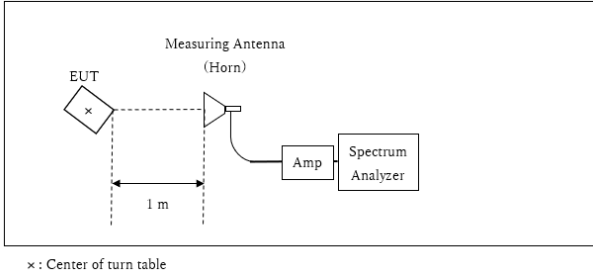

Distance Factor: $20 \times \log(1.0 \text{ m} / 3.0 \text{ m}) = -9.54 \text{ dB}$
*Test Distance: 1 m

The carrier level and noise levels were confirmed at each position of 0 deg. and 40 deg. of EUT to see the position of maximum noise, and the test was made at the position that has the maximum noise.

Antenna polarization	Carrier	Spurious (30 MHz - 1 GHz)	Spurious (1 GHz - 2.8 GHz)	Spurious (2.8 GHz - 10 GHz)	Spurious (10 GHz - 18 GHz)	Spurious (18 GHz - 26.5 GHz)
Horizontal	0 deg.	0 deg.	0 deg.	0 deg.	0 deg.	0 deg.
Vertical	0 deg.	0 deg.	0 deg.	0 deg.	0 deg.	0 deg.

The test results and limit are rounded off to one decimal place, so some differences might be observed.

Measurement Range : 30 MHz to 26.5 GHz
Test Data : APPENDIX
Test Result : Pass

SECTION 6: Antenna Terminal Conducted Tests

Test Procedure

The tests were made with below setting connected to the antenna port.

Test	Span	RBW	VBW	Sweep time	Detector	Trace	Instrument Used
20 dB Bandwidth	3 MHz	30 kHz	100 kHz	Auto	Peak	Max Hold	Spectrum Analyzer
99 % Occupied Bandwidth *1)	Enough width to display emission skirts	1 to 5 % of OBW	Three times of RBW	Auto	Peak	Max Hold	Spectrum Analyzer
Maximum Peak Output Power	-	-	-	Auto	Peak Average *2)	-	Power Meter (Sensor: 160 MHz BW)
Carrier Frequency Separation	3 MHz	100 kHz	300 kHz	Auto	Peak	Max Hold	Spectrum Analyzer
Number of Hopping Frequency	30 MHz	200 kHz	620 kHz	Auto	Peak	Max Hold	Spectrum Analyzer
Dwell Time	Zero Span	100 kHz, 1 MHz	300 kHz, 3 MHz	As necessary capture the entire dwell time per hopping channel	Peak	Clear Write	Spectrum Analyzer
Conducted Spurious Emission *3) *4)	9 kHz to 150 kHz	200 Hz	620 Hz	Auto	Peak	Max Hold	Spectrum Analyzer
	150 kHz to 30 MHz	10 kHz	30 kHz				
	30 MHz to 25 GHz	100 kHz	300 kHz				
Conducted Spurious Emission Band Edge compliance	13 MHz	100 kHz	300 kHz	Auto	Peak	Max Hold	Spectrum Analyzer

*1) Peak hold was applied as Worst-case measurement.

*2) Reference data

*3) In the frequency range below 30MHz, RBW was narrowed to separate the noise contents.

Then, wide-band noise near the limit was checked separately, however the noise was not detected as shown in the chart.

(9 kHz -150 kHz: RBW = 200 Hz, 150 kHz - 30 MHz: RBW = 10 kHz)

*4) The limits in CFR 47, Part 15, Subpart C, paragraph 15.209(a), are identical to those in RSS-Gen section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377 Ohms. For example, the measurement at frequency 9 kHz resulted in a level of 45.5 dBuV/m, which is equivalent to $45.5 - 51.5 = -6.0$ dBuA/m, which has the same margin, 3 dB, to the corresponding RSS-Gen Table 6 limit as it has to 15.209(a) limit.

The test results and limit are rounded off to two decimals place, so some differences might be observed.
The equipment and cables were not used for factor 0 dB of the data sheets.

Test Data : APPENDIX
Test Result : Pass

APPENDIX 1: Test data

20 dB Bandwidth, 99 % Occupied Bandwidth and Carrier Frequency Separation


Test place	Shonan EMC Lab. No.5 Shielded Room
Date	July 19, 2022
Temperature / Humidity	25 deg. C / 47 % RH
Engineer	Shiro Kobayashi
Mode	Tx, Hopping Off, Tx, Hopping On

Mode	Freq. [MHz]	20 dB Bandwidth [MHz]	99 % Occupied Bandwidth [kHz]	Carrier Frequency Separation [MHz]	Limit for Carrier Frequency separation [MHz]
DH5	2402.0	1.012	895.1	1.000	≥ 0.675
DH5	2441.0	1.005	892.3	1.000	≥ 0.670
DH5	2480.0	1.014	896.1	1.000	≥ 0.676
DH5	Hopping On	-	78591.3	-	-
3DH5	2402.0	1.308	1201.0	1.000	≥ 0.872
3DH5	2441.0	1.312	1201.4	1.000	≥ 0.875
3DH5	2480.0	1.311	1198.3	1.000	≥ 0.874
3DH5	Hopping On	-	78707.9	-	-

Limit: Two-thirds of 20 dB Bandwidth or 25 kHz (whichever is greater).

No limit applies to 20 dB Bandwidth.


20 dB Bandwidth and 99 % Occupied Bandwidth

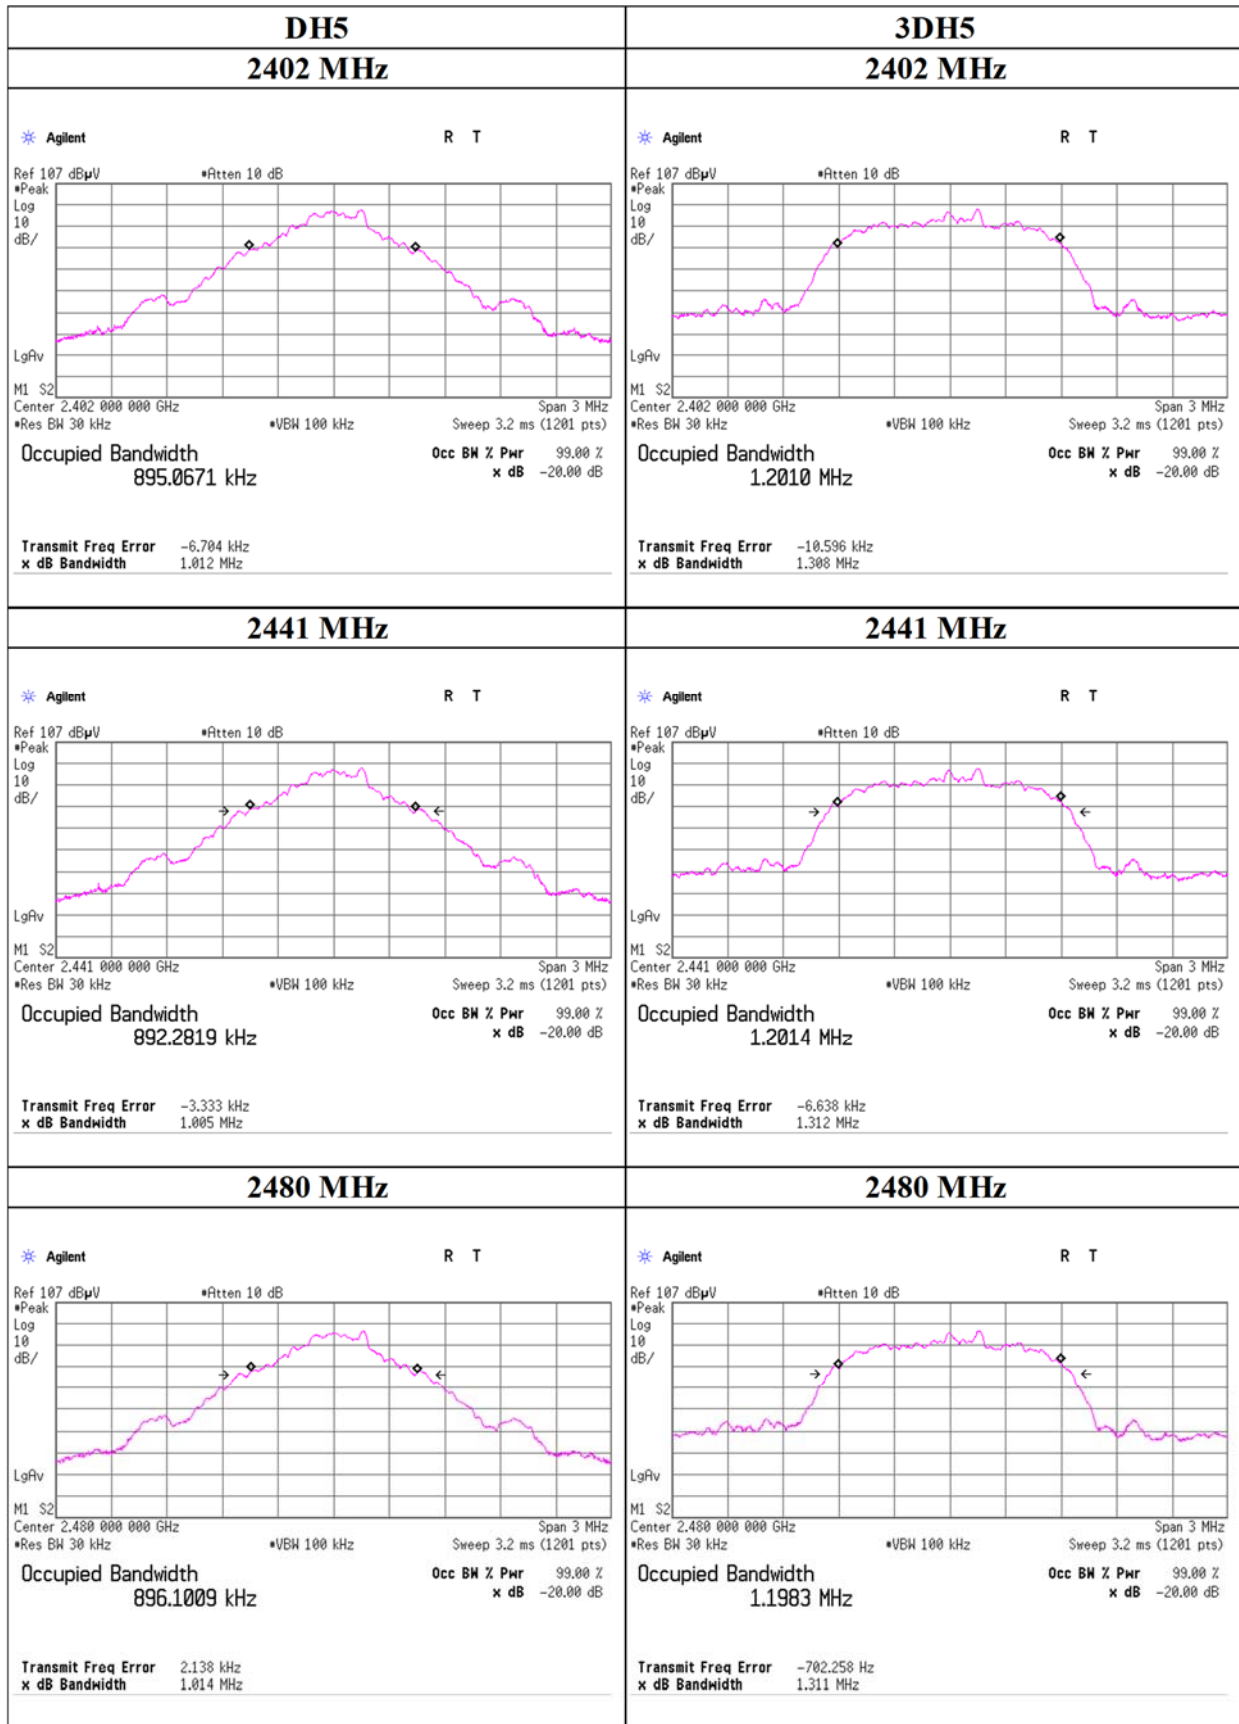

20 dB Bandwidth and 99 % Occupied Bandwidth



Carrier Frequency Separation

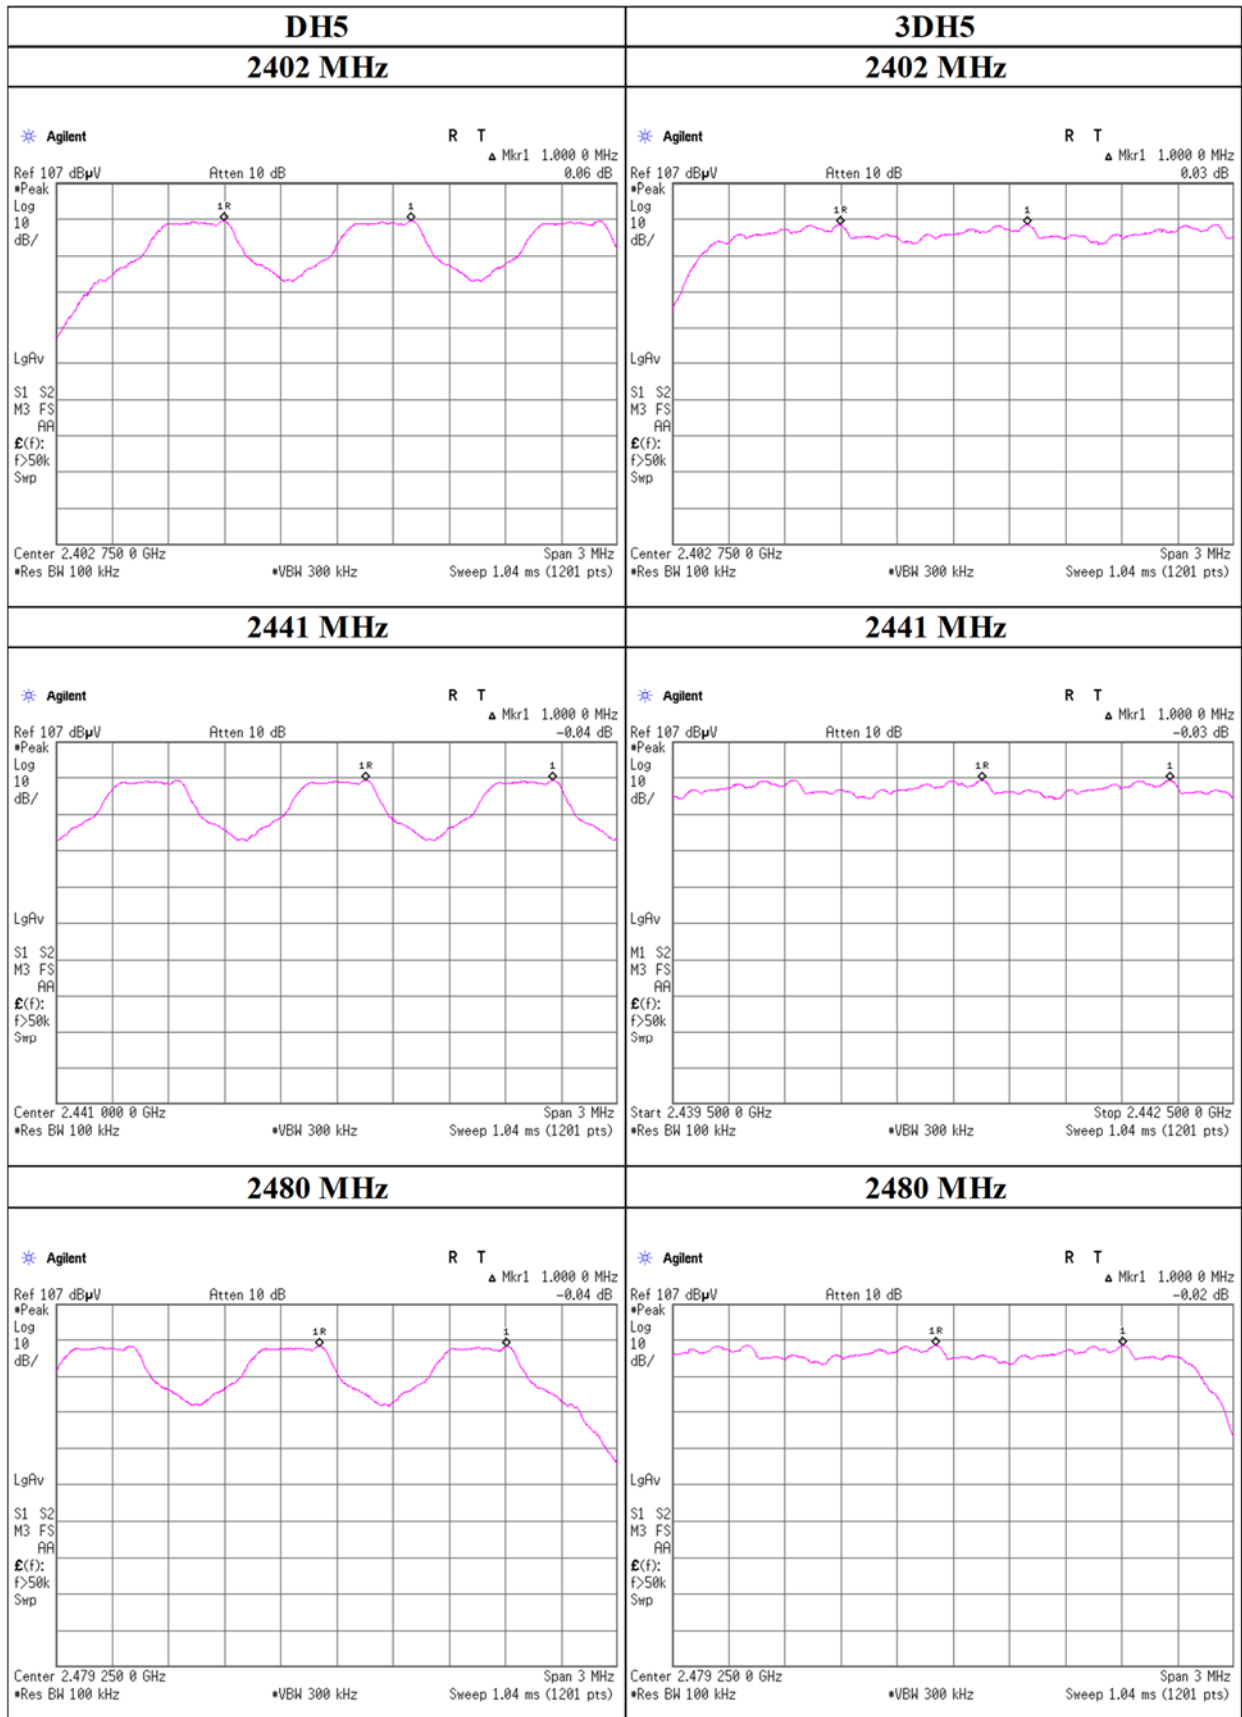


Number of Hopping Frequency

Test place	Shonan EMC Lab. No.5 Shielded Room
Date	July 19, 2022
Temperature / Humidity	25 deg. C / 47 % RH
Engineer	Shiro Kobayashi
Mode	Tx, Hopping On

Mode	Number of channel [channels]	Limit [channels]
DH5	79	≥ 15
3DH5	79	≥ 15

Test was not performed at AFH mode whose number of hopping channel is
20 channels because this Bluetooth radio is in compliance of Bluetooth Specification.

Number of Hopping Frequency

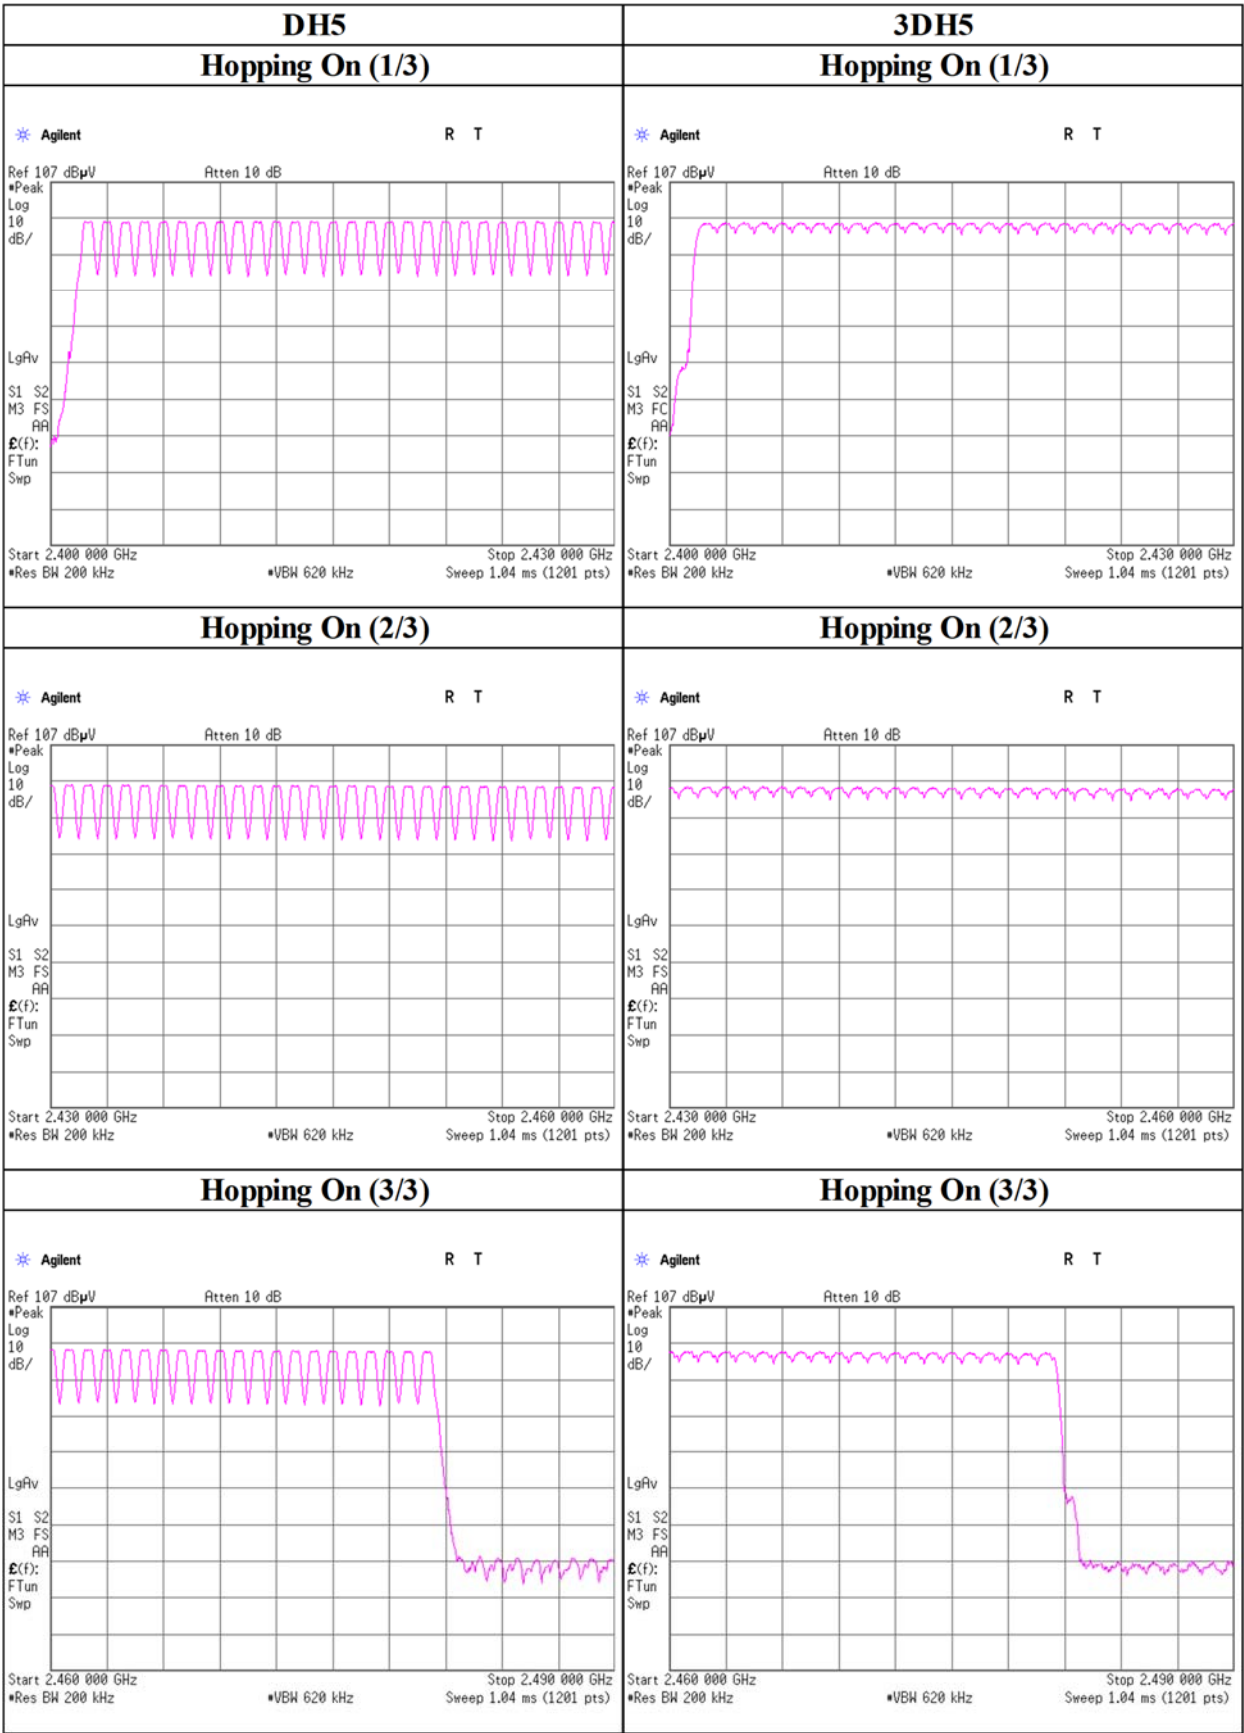

Dwell time

Test place Shonan EMC Lab. No.5 Shielded Room
Date July 19, 2022
Temperature / Humidity 25 deg. C / 47 % RH
Engineer Shiro Kobayashi
Mode Tx, Hopping On

Mode	Number of transmission in a 31.6 (79 Hopping x 0.4)				Length of transmission [ms]	Result [ms]	Limit [ms]
DH1	50.4 times	/	5 s	x 31.6 s = 319 times	0.419	134	400
DH3	27.6 times	/	5 s	x 31.6 s = 175 times	1.678	294	400
DH5	21.2 times	/	5 s	x 31.6 s = 134 times	2.924	392	400
3DH1	50.0 times	/	5 s	x 31.6 s = 316 times	0.425	134	400
3DH3	28.2 times	/	5 s	x 31.6 s = 179 times	1.677	300	400
3DH5	21.0 times	/	5 s	x 31.6 s = 133 times	2.929	390	400

Sample Calculation

Result = Number of transmission x Length of transmission

*Average data of 5 tests.


Mode	Sampling [times]					Average [times]
	1	2	3	4	5	
DH1	50	49	51	50	52	50.4
DH3	28	30	25	29	26	27.6
DH5	22	20	21	22	21	21.2
3DH1	50	51	50	51	48	50
3DH3	30	28	28	28	27	28.2
3DH5	20	21	20	24	20	21

Sample Calculation


Average = Summation (Sampling 1 to 5) / 5

This device complies with the Bluetooth protocol for FHSS operation, employing a pseudo random channel selection and hopping rate to ensure that the occupancy time in $N \times 0.4$ s, where N is the number of channels being used in the hopping sequence ($20 \leq N \leq 79$), is always less than 0.4 s regardless of packet size. This is confirmed in the test report for N = 79.

Dwell time

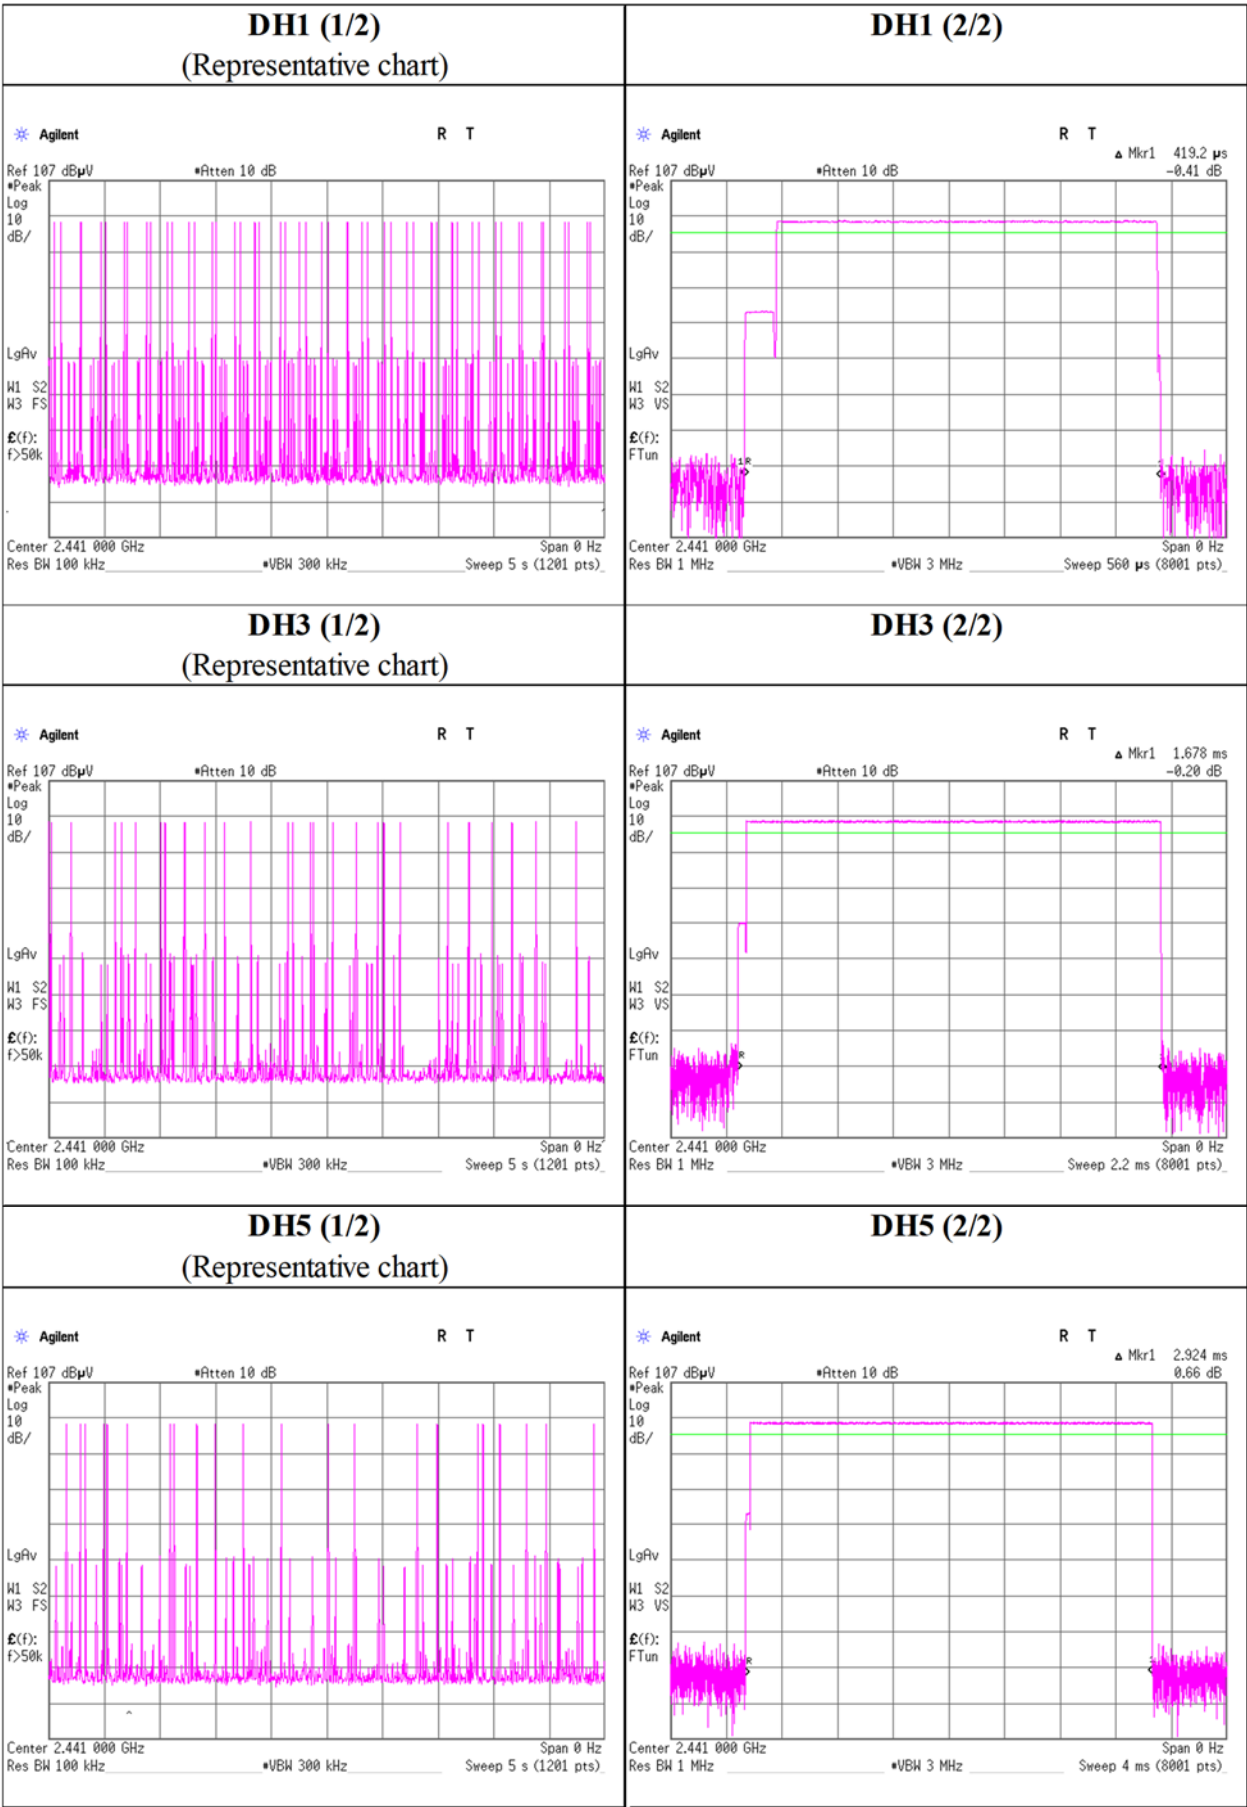

Dwell time

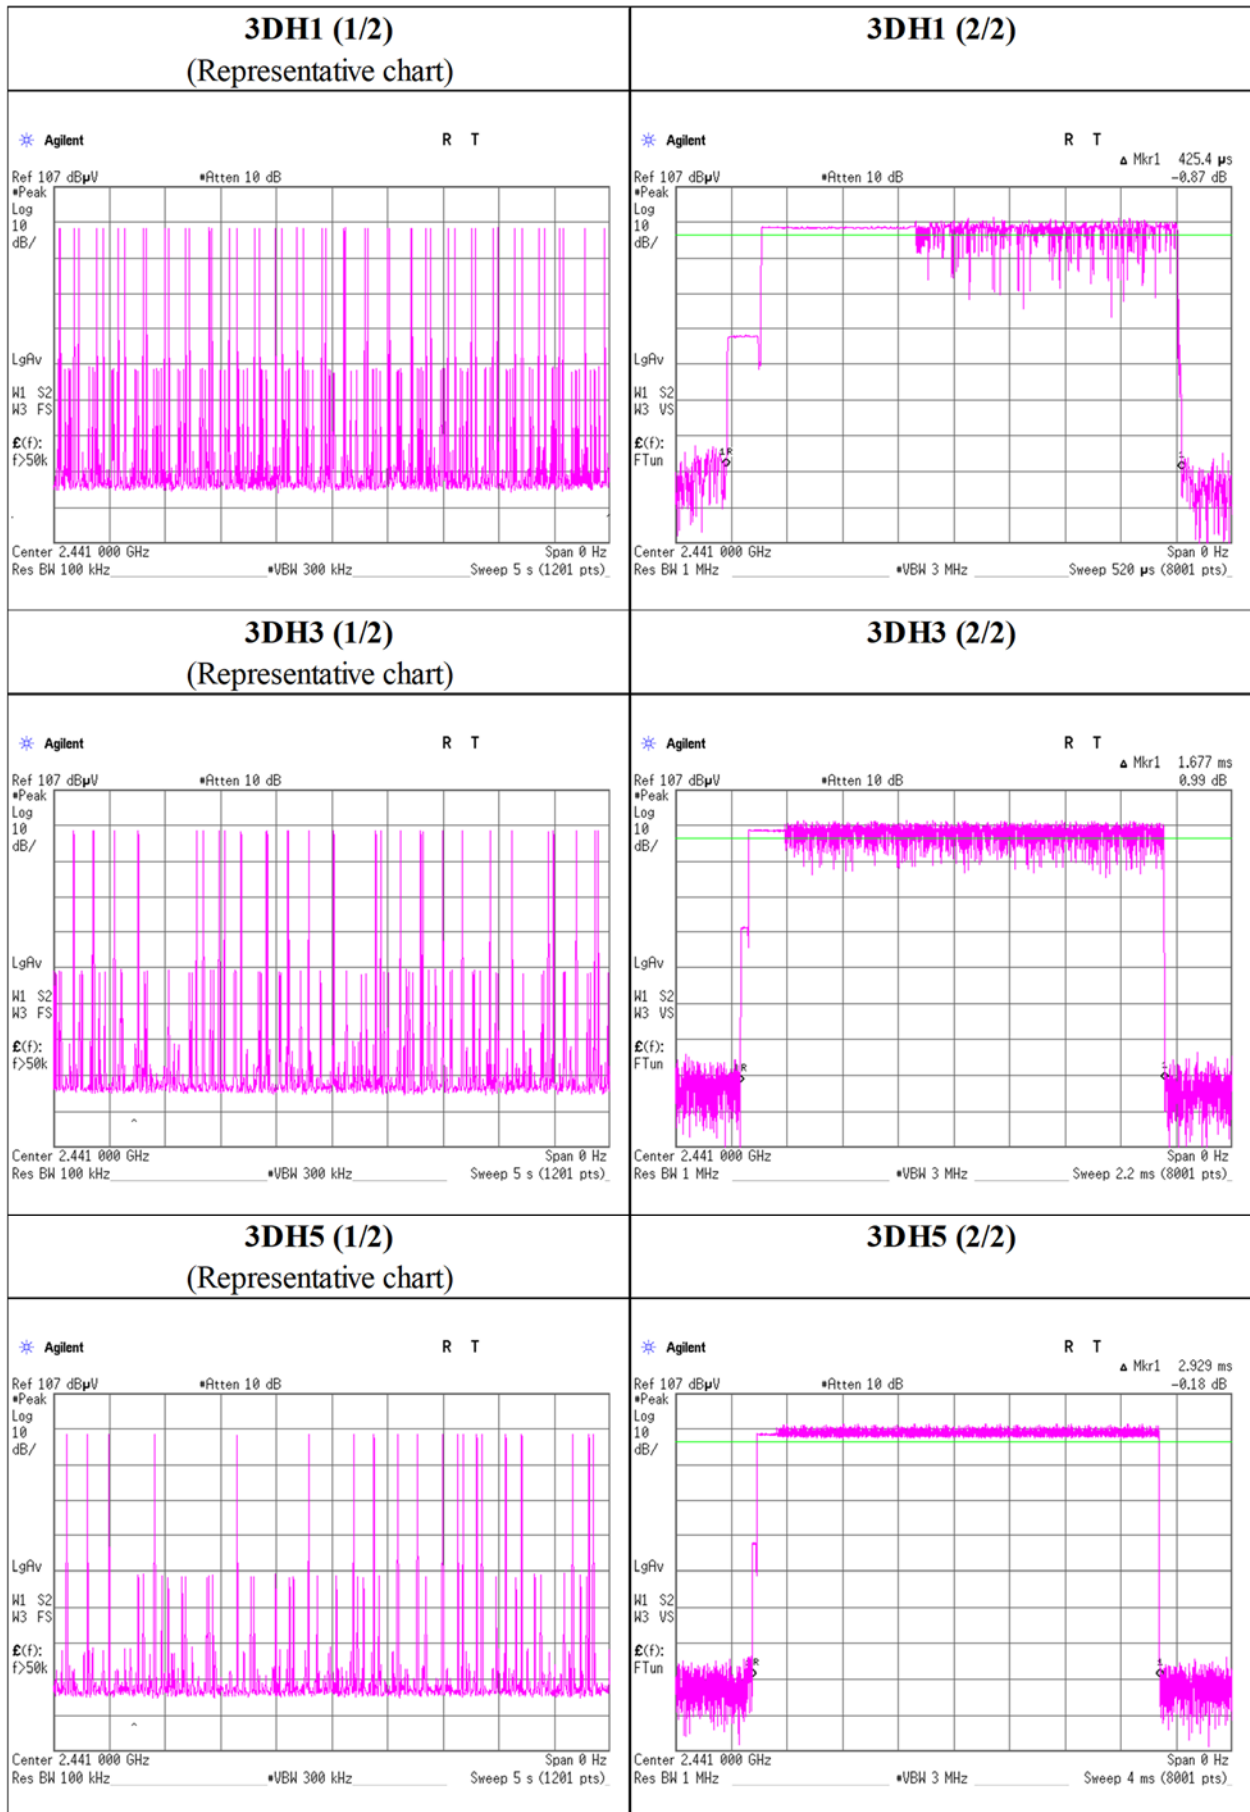

Maximum Peak Output Power

Test place Shonan EMC Lab. No.5 Shielded Room
Date July 16, 2022
Temperature / Humidity 25 deg. C / 51 % RH
Engineer Takahiro Kawakami
Mode Tx, Hopping Off

Maximum peak output power

Mode	Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Conducted Power					e.i.r.p. for RSS-247					
					Result		Limit		Margin [dB]	Antenna Gain [dBi]	Result		Limit		Margin [dB]
					[dBm]	[mW]	[dBm]	[mW]			[dBm]	[mW]	[dBm]	[mW]	
DH5	2402	-11.05	1.85	9.91	0.71	1.18	20.97	125	20.26	-1.01	-0.30	0.93	36.02	4000	36.32
DH5	2441	-11.33	1.86	9.91	0.44	1.11	20.97	125	20.53	-1.01	-0.57	0.88	36.02	4000	36.59
DH5	2480	-12.09	1.87	9.91	-0.31	0.93	20.97	125	21.28	-1.01	-1.32	0.74	36.02	4000	37.34
2DH5	2402	-8.91	1.85	9.91	2.85	1.93	20.97	125	18.12	-1.01	1.84	1.53	36.02	4000	34.18
2DH5	2441	-9.40	1.86	9.91	2.37	1.73	20.97	125	18.60	-1.01	1.36	1.37	36.02	4000	34.66
2DH5	2480	-10.13	1.87	9.91	1.65	1.46	20.97	125	19.32	-1.01	0.64	1.16	36.02	4000	35.38
3DH5	2402	-8.48	1.85	9.91	3.28	2.13	20.97	125	17.69	-1.01	2.27	1.69	36.02	4000	33.75
3DH5	2441	-8.82	1.86	9.91	2.95	1.97	20.97	125	18.02	-1.01	1.94	1.56	36.02	4000	34.08
3DH5	2480	-9.64	1.87	9.91	2.14	1.64	20.97	125	18.83	-1.01	1.13	1.30	36.02	4000	34.89

Sample Calculation:

Result = Reading + Cable Loss (including the cable(s) customer supplied) + Attenuator Loss

e.i.r.p. Result = Conducted Power Result + Antenna Gain

All comparison were carried out on same frequency and measurement factors.

Test was not performed at AFH mode, because the decrease of number of channel (min: 20 ch) at AFH mode does not influence on the output power and bandwidth of the EUT.

As this device had AFH mode and frequency separation could not meet the requirement of over 20 dB BW without 2/3 relaxation, 125 mW power limit was applied to it.

Average power (Reference data for RF Exposure)

Mode	Freq. [MHz]	Reading [dBm]	Cable Loss [dB]	Atten. Loss [dB]	Result (Time average)		Duty factor [dB]	Result (Burst power average)	
					[dBm]	[mW]		[dBm]	[mW]
					[dBm]	[mW]	[dB]	[dBm]	[mW]
DH5	2402	-12.87	1.85	9.91	-1.11	0.77	1.08	-0.03	0.99
DH5	2441	-13.17	1.86	9.91	-1.40	0.72	1.08	-0.32	0.93
DH5	2480	-14.06	1.87	9.91	-2.28	0.59	1.08	-1.20	0.76
2DH5	2402	-12.83	1.85	9.91	-1.07	0.78	1.08	0.01	1.00
2DH5	2441	-13.40	1.86	9.91	-1.63	0.69	1.08	-0.55	0.88
2DH5	2480	-14.22	1.87	9.91	-2.44	0.57	1.08	-1.36	0.73
3DH5	2402	-12.82	1.85	9.91	-1.06	0.78	1.08	0.02	1.00
3DH5	2441	-13.18	1.86	9.91	-1.41	0.72	1.08	-0.33	0.93
3DH5	2480	-14.00	1.87	9.91	-2.22	0.60	1.08	-1.14	0.77

Sample Calculation:

Result (Time average) = Reading + Cable Loss (including the cable(s) customer supplied) + Attenuator Loss


Result (Burst power average) = Result (Time average) + Duty factor

*The equipment and cables were not used for factor 0 dB of the data sheets.


Burst Rate Confirmation

Test place	Shonan EMC Lab. No.5 Shielded Room
Date	July 16, 2022
Temperature / Humidity	25 deg. C / 51 % RH
Engineer	Takahiro Kawakami
Mode	Tx, Hopping Off


DH5

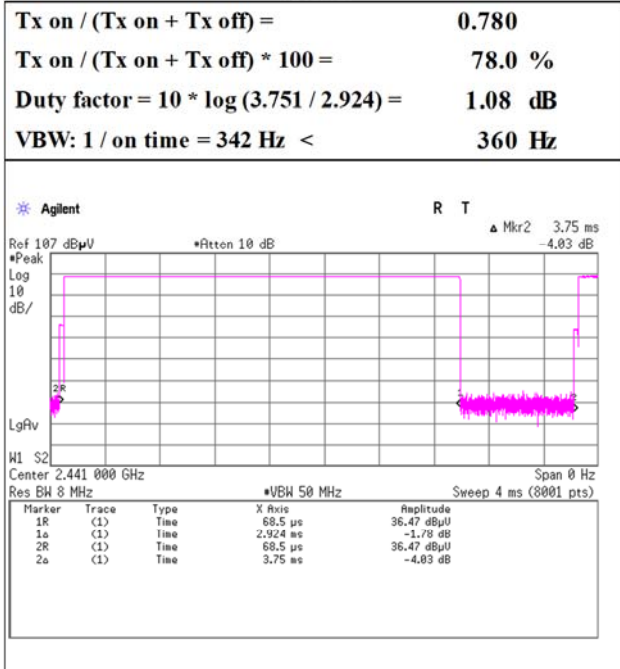

2DH5

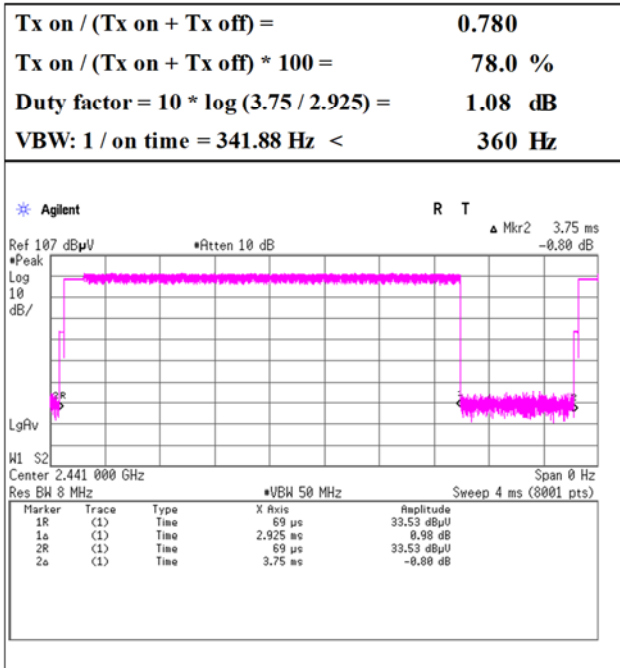

3DH5

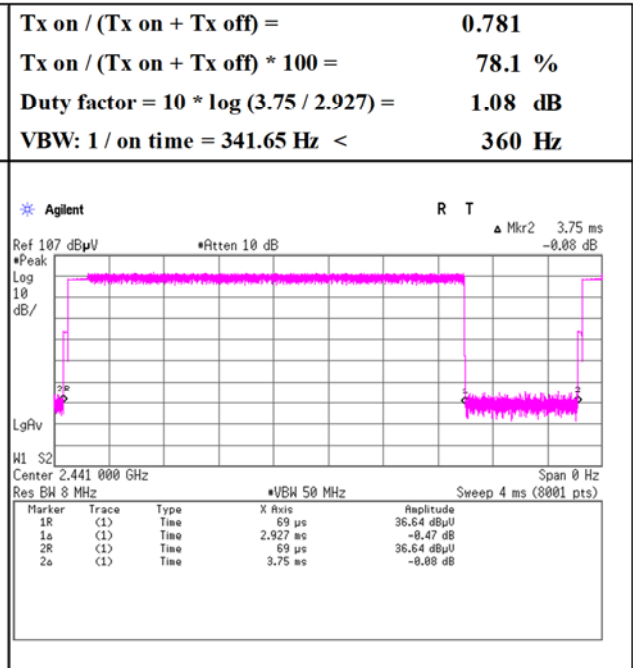

Radiated Spurious Emission

Test place	Shonan EMC Lab.		
Semi Anechoic Chamber	2	3	3
Date	July 15, 2022	July 19, 2022	July 19, 2022
Temperature / Humidity	24 deg.C, 56 %RH	24 deg.C, 48 %RH	25 deg.C, 52 %RH
Engineer	Akihiro Oda	Takahiro Kawakami	Hiromasa Sato
	(1 GHz -2.8 GHz)	(2.8 GHz -18 GHz)	(18 GHz -26.5 GHz)
Mode	Tx, Hopping Off, DH5 2402 MHz		

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg]	Remark
Hori.	2390.000	PK	44.79	28.57	13.51	38.81	2.19	50.25	73.9	23.6	198	241	-
Hori.	3732.061	PK	51.70	29.66	6.68	42.22	2.19	48.01	73.9	25.8	133	206	-
Hori.	4482.710	PK	52.31	30.77	7.06	42.98	2.19	49.35	73.9	24.5	173	133	-
Hori.	4804.000	PK	49.36	31.54	7.25	42.87	2.19	47.47	73.9	26.4	150	0	-
Hori.	7206.000	PK	49.52	37.37	8.88	43.39	2.19	54.57	73.9	19.3	150	0	-
Hori.	9608.000	PK	48.90	38.89	10.17	43.21	2.19	56.94	73.9	16.9	150	0	-
Hori.	2390.000	AV	32.94	28.57	13.51	38.81	2.19	38.40	53.9	15.5	198	241	VBW:360 Hz
Hori.	3732.061	AV	44.48	29.66	6.68	42.22	2.19	40.79	53.9	13.1	133	206	VBW:10 Hz
Hori.	4482.710	AV	44.24	30.77	7.06	42.98	2.19	41.28	53.9	12.6	173	133	VBW:10 Hz
Hori.	4804.000	AV	36.94	31.54	7.25	42.87	2.19	35.05	53.9	18.8	150	0	VBW:360 Hz,Floor noise
Hori.	7206.000	AV	37.14	37.37	8.88	43.39	2.19	42.19	53.9	11.7	150	0	VBW:360 Hz,Floor noise
Hori.	9608.000	AV	36.95	38.89	10.17	43.21	2.19	44.99	53.9	8.9	150	0	VBW:360 Hz,Floor noise
Vert.	2390.000	PK	44.10	28.57	13.51	38.81	2.19	49.56	73.9	24.3	132	207	-
Vert.	3732.054	PK	53.35	29.66	6.68	42.22	2.19	49.66	73.9	24.2	397	183	-
Vert.	4482.293	PK	53.37	30.77	7.06	42.98	2.19	50.41	73.9	23.4	400	180	-
Vert.	4804.000	PK	48.66	31.54	7.25	42.87	2.19	46.77	73.9	27.1	150	0	-
Vert.	7206.000	PK	49.87	37.37	8.88	43.39	2.19	54.92	73.9	18.9	150	0	-
Vert.	9608.000	PK	49.65	38.89	10.17	43.21	2.19	57.69	73.9	16.2	150	0	-
Vert.	2390.000	AV	33.04	28.57	13.51	38.81	2.19	38.50	53.9	15.4	132	207	VBW:360 Hz
Vert.	3732.054	AV	47.30	29.66	6.68	42.22	2.19	43.61	53.9	10.2	397	183	VBW:10 Hz
Vert.	4482.293	AV	43.49	30.77	7.06	42.98	2.19	40.53	53.9	13.3	400	180	VBW:10 Hz
Vert.	4804.000	AV	36.71	31.54	7.25	42.87	2.19	34.82	53.9	19.0	150	0	VBW:360 Hz,Floor noise
Vert.	7206.000	AV	37.10	37.37	8.88	43.39	2.19	42.15	53.9	11.7	150	0	VBW:360 Hz,Floor noise
Vert.	9608.000	AV	36.91	38.89	10.17	43.21	2.19	44.95	53.9	8.9	150	0	VBW:360 Hz,Floor noise

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz : $20\log(3.86\text{ m} / 3.0\text{ m}) = 2.19\text{ dB}$

10 GHz - 40 GHz : $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

*These results have sufficient margin without taking account Duty cycle correction factor.

20 dBc Data Sheet (RBW 100 kHz, VBW 300 kHz)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	2402.000	PK	81.38	28.55	13.52	38.80	2.19	86.84	-	-	Carrier
Hori.	2400.000	PK	35.45	28.55	13.51	38.81	2.19	40.89	66.8	25.9	-
Vert.	2402.000	PK	81.58	28.55	13.52	38.80	2.19	87.04	-	-	Carrier
Vert.	2400.000	PK	36.21	28.55	13.51	38.81	2.19	41.65	67.0	25.3	-



Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz : $20\log(3.86\text{ m} / 3.0\text{ m}) = 2.19\text{ dB}$

10 GHz - 40 GHz : $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

Radiated Spurious Emission (Reference Plot for band-edge)

Test place	Shonan EMC Lab.
Semi Anechoic Chamber	2
Date	July 15, 2022
Temperature / Humidity	24 deg.C, 56 %RH
Engineer	Akihiro Oda
	(1 GHz -2.8 GHz)
Mode	Tx, Hopping Off, DH5 2402 MHz

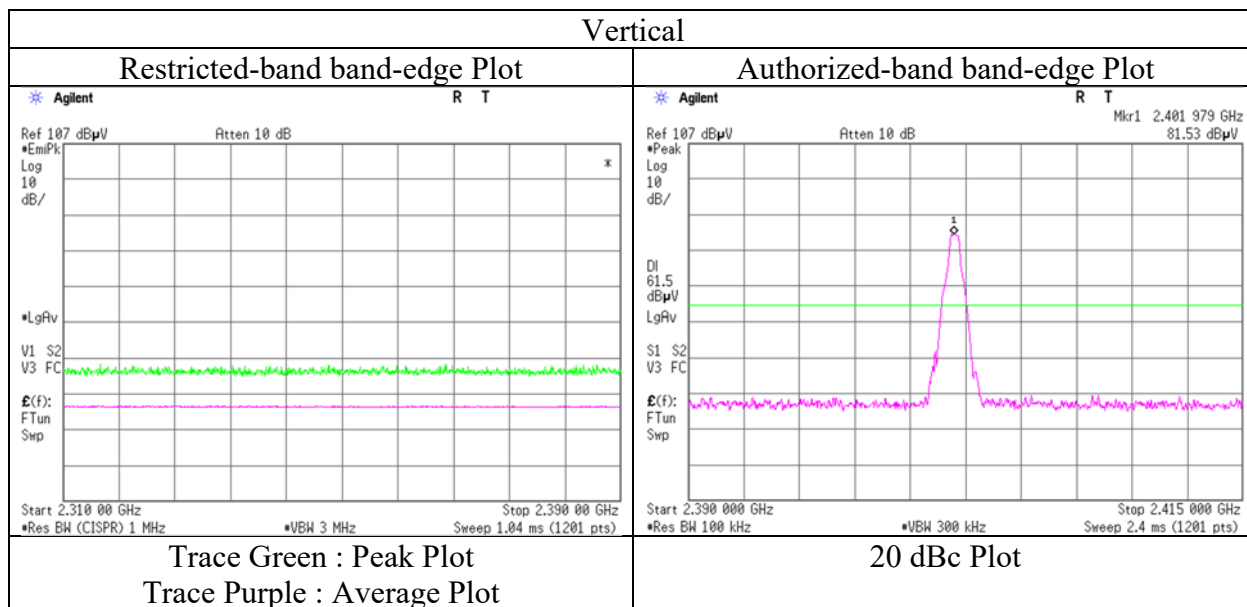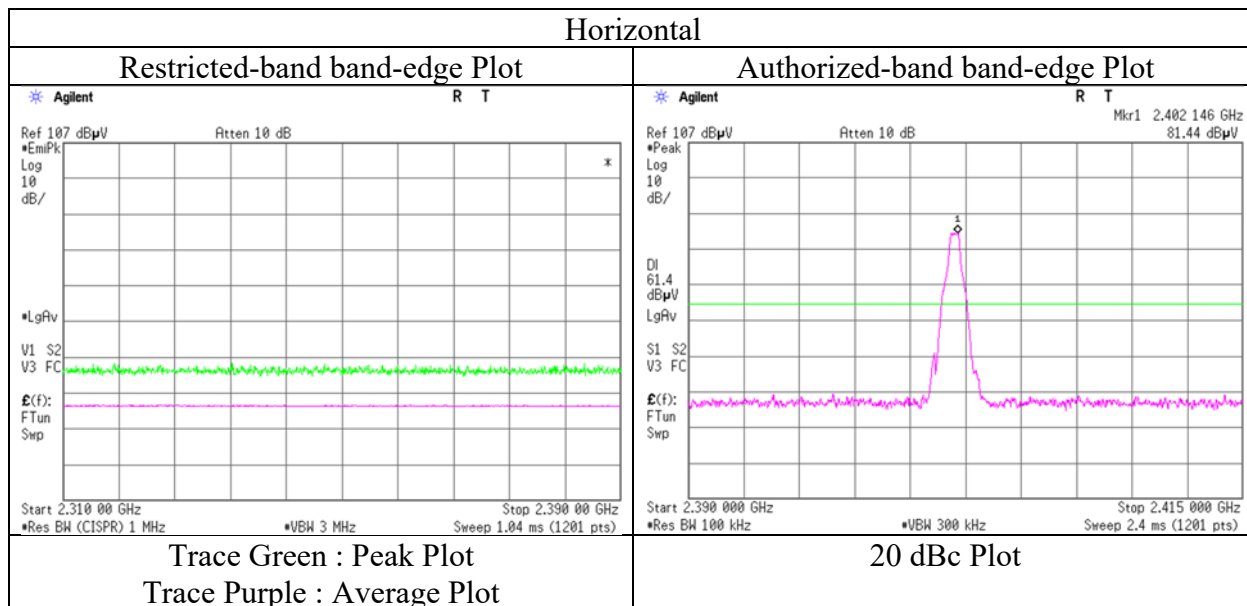

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Shonan EMC Lab.		
Semi Anechoic Chamber	2	3	3
Date	July 15, 2022	July 19, 2022	July 19, 2022
Temperature / Humidity	24 deg.C, 56 %RH	24 deg.C, 48 %RH	25 deg.C, 52 %RH
Engineer	Akihiro Oda	Takahiro Kawakami	Hiromasa Sato
	(1 GHz -2.8 GHz)	(2.8 GHz -18 GHz)	(18 GHz -26.5 GHz)
Mode	Tx, Hopping Off, DH5 2441 MHz		

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg]	Remark
Hori.	3732.048	PK	53.60	29.66	6.68	42.22	2.19	49.91	73.9	23.9	133	206	-
Hori.	4483.376	PK	53.34	30.77	7.06	42.98	2.19	50.38	73.9	23.5	172	134	-
Hori.	4882.000	PK	48.65	31.64	7.29	42.83	2.19	46.94	73.9	26.9	150	0	-
Hori.	7323.000	PK	48.30	37.46	8.96	43.52	2.19	53.39	73.9	20.5	150	0	-
Hori.	9764.000	PK	48.85	39.18	10.24	43.02	2.19	57.44	73.9	16.4	150	0	-
Hori.	3732.048	AV	45.31	29.66	6.68	42.22	2.19	41.62	53.9	12.2	133	206	VBW:10 Hz
Hori.	4483.376	AV	43.29	30.77	7.06	42.98	2.19	40.33	53.9	13.5	172	134	VBW:10 Hz
Hori.	4882.000	AV	36.61	31.64	7.29	42.83	2.19	34.90	53.9	19.0	150	0	VBW:360 Hz,Floor noise
Hori.	7323.000	AV	36.62	37.46	8.96	43.52	2.19	41.71	53.9	12.1	150	0	VBW:360 Hz,Floor noise
Hori.	9764.000	AV	36.34	39.18	10.24	43.02	2.19	44.93	53.9	8.9	150	0	VBW:360 Hz,Floor noise
Vert.	3732.075	PK	53.76	29.66	6.68	42.22	2.19	50.07	73.9	23.8	395	182	-
Vert.	4481.661	PK	53.58	30.76	7.06	42.98	2.19	50.61	73.9	23.2	387	185	-
Vert.	4882.000	PK	49.55	31.64	7.29	42.83	2.19	47.84	73.9	26.0	150	0	-
Vert.	7323.000	PK	49.04	37.46	8.96	43.52	2.19	54.13	73.9	19.7	150	0	-
Vert.	9764.000	PK	47.80	39.18	10.24	43.02	2.19	56.39	73.9	17.5	150	0	-
Vert.	3732.075	AV	47.87	29.66	6.68	42.22	2.19	44.18	53.9	9.7	395	182	VBW:10 Hz
Vert.	4481.661	AV	44.29	30.76	7.06	42.98	2.19	41.32	53.9	12.5	387	185	VBW:10 Hz
Vert.	4882.000	AV	36.51	31.64	7.29	42.83	2.19	34.80	53.9	19.1	150	0	VBW:360 Hz,Floor noise
Vert.	7323.000	AV	36.65	37.46	8.96	43.52	2.19	41.74	53.9	12.1	150	0	VBW:360 Hz,Floor noise
Vert.	9764.000	AV	36.45	39.18	10.24	43.02	2.19	45.04	53.9	8.8	150	0	VBW:360 Hz,Floor noise

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz : $20\log(3.86\text{ m} / 3.0\text{ m}) = 2.19\text{ dB}$ 10 GHz - 40 GHz : $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

*These results have sufficient margin without taking account Duty cycle correction factor.

Radiated Spurious Emission

Test place	Shonan EMC Lab.		
Semi Anechoic Chamber	2	3	3
Date	July 15, 2022	July 19, 2022	July 19, 2022
Temperature / Humidity	24 deg.C, 56 %RH	24 deg.C, 48 %RH	25 deg.C, 52 %RH
Engineer	Akihiro Oda	Takahiro Kawakami	Hiromasa Sato
	(1 GHz -2.8 GHz)	(2.8 GHz -18 GHz)	(18 GHz -26.5 GHz)
Mode	Tx, Hopping Off, DH5 2480 MHz		

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg]	Remark
Hori.	2483.500	PK	44.04	28.44	13.59	38.76	2.19	49.50	73.9	24.4	134	213	-
Hori.	3732.080	PK	52.75	29.66	6.68	42.22	2.19	49.06	73.9	24.8	132	206	-
Hori.	4482.209	PK	53.07	30.77	7.06	42.98	2.19	50.11	73.9	23.7	172	132	-
Hori.	4960.000	PK	47.86	31.81	7.35	42.80	2.19	46.41	73.9	27.4	150	0	-
Hori.	7440.000	PK	47.74	37.61	9.06	43.65	2.19	52.95	73.9	20.9	150	0	-
Hori.	9920.000	PK	47.36	39.03	10.31	42.82	2.19	56.07	73.9	17.8	150	0	-
Hori.	2483.500	AV	33.11	28.44	13.59	38.76	2.19	38.57	53.9	15.3	134	213	VBW:360 Hz
Hori.	3732.080	AV	45.35	29.66	6.68	42.22	2.19	41.66	53.9	12.2	132	206	VBW:10 Hz
Hori.	4482.209	AV	42.97	30.77	7.06	42.98	2.19	40.01	53.9	13.8	172	132	VBW:10 Hz
Hori.	4960.000	AV	36.35	31.81	7.35	42.80	2.19	34.90	53.9	19.0	150	0	VBW:360 Hz,Floor noise
Hori.	7440.000	AV	36.00	37.61	9.06	43.65	2.19	41.21	53.9	12.6	150	0	VBW:360 Hz,Floor noise
Hori.	9920.000	AV	35.44	39.03	10.31	42.82	2.19	44.15	53.9	9.7	150	0	VBW:360 Hz,Floor noise
Vert.	2483.500	PK	44.11	28.44	13.59	38.76	2.19	49.57	73.9	24.3	158	141	-
Vert.	3731.945	PK	54.37	29.66	6.68	42.22	2.19	50.68	73.9	23.2	395	182	-
Vert.	4481.616	PK	53.93	30.76	7.06	42.98	2.19	50.96	73.9	22.9	390	180	-
Vert.	4960.000	PK	48.45	31.81	7.35	42.80	2.19	47.00	73.9	26.9	150	0	-
Vert.	7440.000	PK	47.44	37.61	9.06	43.65	2.19	52.65	73.9	21.2	150	0	-
Vert.	9920.000	PK	47.99	39.03	10.31	42.82	2.19	56.70	73.9	17.2	150	0	-
Vert.	2483.500	AV	33.05	28.44	13.59	38.76	2.19	38.51	53.9	15.3	158	141	VBW:360 Hz
Vert.	3731.945	AV	48.61	29.66	6.68	42.22	2.19	44.92	53.9	8.9	395	182	VBW:10 Hz
Vert.	4481.616	AV	44.22	30.76	7.06	42.98	2.19	41.25	53.9	12.6	390	180	VBW:10 Hz
Vert.	4960.000	AV	36.47	31.81	7.35	42.80	2.19	35.02	53.9	18.8	150	0	VBW:360 Hz,Floor noise
Vert.	7440.000	AV	36.62	37.61	9.06	43.65	2.19	41.83	53.9	12.0	150	0	VBW:360 Hz,Floor noise
Vert.	9920.000	AV	35.56	39.03	10.31	42.82	2.19	44.27	53.9	9.6	150	0	VBW:360 Hz,Floor noise

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor



Distance factor : 1 GHz - 10 GHz : $20\log(3.86\text{ m} / 3.0\text{ m}) = 2.19\text{ dB}$

10 GHz - 40 GHz : $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

*These results have sufficient margin without taking account Duty cycle correction factor.

Radiated Spurious Emission (Reference Plot for band-edge)

Test place	Shonan EMC Lab.
Semi Anechoic Chamber	2
Date	July 15, 2022
Temperature / Humidity	24 deg.C, 56 %RH
Engineer	Akihiro Oda
	(1 GHz -2.8 GHz)
Mode	Tx, Hopping Off, DH5 2480 MHz

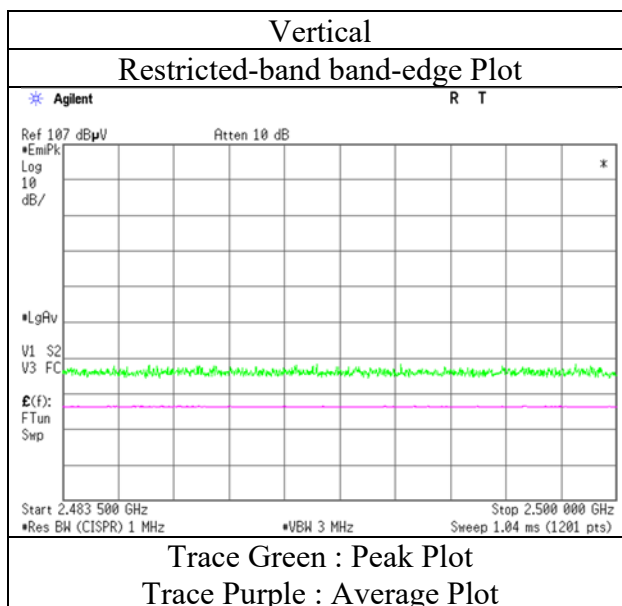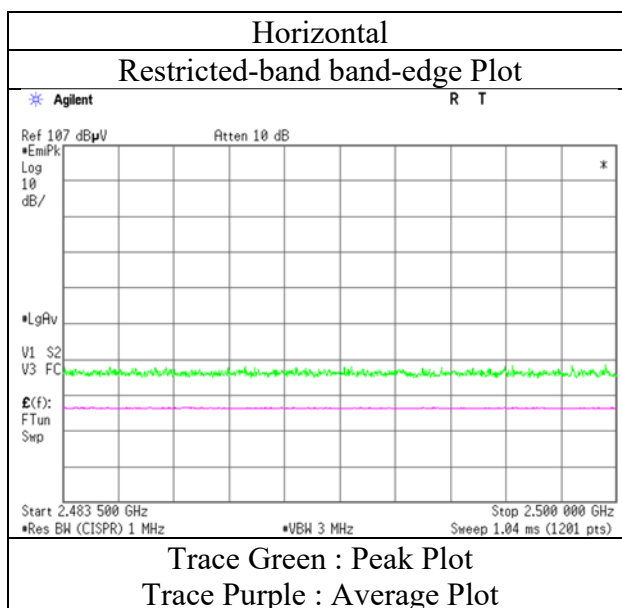

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Shonan EMC Lab.			
Semi Anechoic Chamber	3	2	3	3
Date	September 5, 2022	July 15, 2022	July 19, 2022	July 19, 2022
Temperature / Humidity	24 deg.C, 38 %RH	24 deg.C, 56 %RH	24 deg.C, 48 %RH	25 deg.C, 52 %RH
Engineer	Yosuke Murakami	Akihiro Oda	Takahiro Kawakami	Hiromasa Sato
	(30 MHz -1 GHz)	(1 GHz -2.8 GHz)	(2.8 GHz -18 GHz)	(18 GHz -26.5 GHz)
Mode	Tx, Hopping Off, 3DH5 2402 MHz			

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg]	Remark
Hori.	147.455	QP	44.10	14.70	7.74	32.07	0.00	34.47	43.5	9.0	223	85	-
Hori.	165.887	QP	36.00	15.40	7.87	32.05	0.00	27.22	43.5	16.2	193	279	-
Hori.	933.007	QP	38.00	21.97	11.06	30.77	0.00	40.26	46.0	5.7	109	151	-
Hori.	2390.000	PK	44.74	28.57	13.51	38.81	2.19	50.20	73.9	23.7	168	134	-
Hori.	3732.034	PK	52.31	29.66	6.68	42.22	2.19	48.62	73.9	25.2	131	206	-
Hori.	4482.541	PK	52.62	30.77	7.06	42.98	2.19	49.66	73.9	24.2	172	133	-
Hori.	4804.000	PK	48.93	31.54	7.25	42.87	2.19	47.04	73.9	26.8	150	0	-
Hori.	7206.000	PK	49.90	37.37	8.88	43.39	2.19	54.95	73.9	18.9	150	0	-
Hori.	9608.000	PK	49.09	38.89	10.17	43.21	2.19	57.13	73.9	16.7	150	0	-
Hori.	2390.000	AV	33.00	28.57	13.51	38.81	2.19	38.46	53.9	15.4	168	134	VBW:360 Hz
Hori.	3732.034	AV	45.29	29.66	6.68	42.22	2.19	41.60	53.9	12.3	131	206	VBW:10 Hz
Hori.	4482.541	AV	43.31	30.77	7.06	42.98	2.19	40.35	53.9	13.5	172	133	VBW:10 Hz
Hori.	4804.000	AV	36.60	31.54	7.25	42.87	2.19	34.71	53.9	19.1	150	0	VBW:360 Hz,Floor noise
Hori.	7206.000	AV	37.16	37.37	8.88	43.39	2.19	42.21	53.9	11.6	150	0	VBW:360 Hz,Floor noise
Hori.	9608.000	AV	37.09	38.89	10.17	43.21	2.19	45.13	53.9	8.7	150	0	VBW:360 Hz,Floor noise
Vert.	147.455	QP	36.40	14.70	7.74	32.07	0.00	26.77	43.5	16.7	100	20	-
Vert.	650.005	QP	30.60	19.18	10.09	31.88	0.00	27.99	46.0	18.0	100	172	-
Vert.	675.985	QP	25.70	19.55	10.20	31.86	0.00	23.59	46.0	22.4	100	3	-
Vert.	705.617	QP	30.80	19.93	10.32	31.83	0.00	29.22	46.0	16.7	100	343	-
Vert.	728.061	QP	30.10	20.19	10.39	31.76	0.00	28.92	46.0	17.0	100	355	-
Vert.	933.007	QP	41.40	21.97	11.06	30.77	0.00	43.66	46.0	2.3	100	356	-
Vert.	2390.000	PK	44.05	28.57	13.51	38.81	2.19	49.51	73.9	24.3	140	207	-
Vert.	3732.047	PK	54.09	29.66	6.68	42.22	2.19	50.40	73.9	23.5	396	183	-
Vert.	4482.812	PK	52.84	30.77	7.06	42.98	2.19	49.88	73.9	24.0	393	177	-
Vert.	4804.000	PK	48.75	31.54	7.25	42.87	2.19	46.86	73.9	27.0	150	0	-
Vert.	7206.000	PK	48.38	37.37	8.88	43.39	2.19	53.43	73.9	20.4	150	0	-
Vert.	9608.000	PK	47.94	38.89	10.17	43.21	2.19	55.98	73.9	17.9	150	0	-
Vert.	2390.000	AV	32.88	28.57	13.51	38.81	2.19	38.34	53.9	15.5	140	207	VBW:360 Hz
Vert.	3732.047	AV	48.28	29.66	6.68	42.22	2.19	44.59	53.9	9.3	396	183	VBW:10 Hz
Vert.	4482.812	AV	43.91	30.77	7.06	42.98	2.19	40.95	53.9	12.9	393	177	VBW:10 Hz
Vert.	4804.000	AV	36.60	31.54	7.25	42.87	2.19	34.71	53.9	19.1	150	0	VBW:360 Hz,Floor noise
Vert.	7206.000	AV	36.95	37.37	8.88	43.39	2.19	42.00	53.9	11.9	150	0	VBW:360 Hz,Floor noise
Vert.	9608.000	AV	36.86	38.89	10.17	43.21	2.19	44.90	53.9	9.0	150	0	VBW:360 Hz,Floor noise

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz : $20\log(3.86\text{ m} / 3.0\text{ m}) = 2.19\text{ dB}$ 10 GHz - 40 GHz : $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

*These results have sufficient margin without taking account Duty cycle correction factor.

20 dBc Data Sheet (RBW 100 kHz, VBW 300 kHz)



Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	2402.000	PK	79.13	28.55	13.52	38.80	2.19	84.59	-	-	Carrier
Hori.	2400.000	PK	35.25	28.55	13.51	38.81	2.19	40.69	64.5	23.8	-
Vert.	2402.000	PK	81.36	28.55	13.52	38.80	2.19	86.82	-	-	Carrier
Vert.	2400.000	PK	35.46	28.55	13.51	38.81	2.19	40.90	66.8	25.9	-

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz : $20\log(3.86\text{ m} / 3.0\text{ m}) = 2.19\text{ dB}$ 10 GHz - 40 GHz : $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

Radiated Spurious Emission (Reference Plot for band-edge)

Test place	Shonan EMC Lab.
Semi Anechoic Chamber	2
Date	July 15, 2022
Temperature / Humidity	24 deg.C, 56 %RH
Engineer	Akihiro Oda
	(1 GHz -2.8 GHz)
Mode	Tx, Hopping Off, 3DH5 2402 MHz

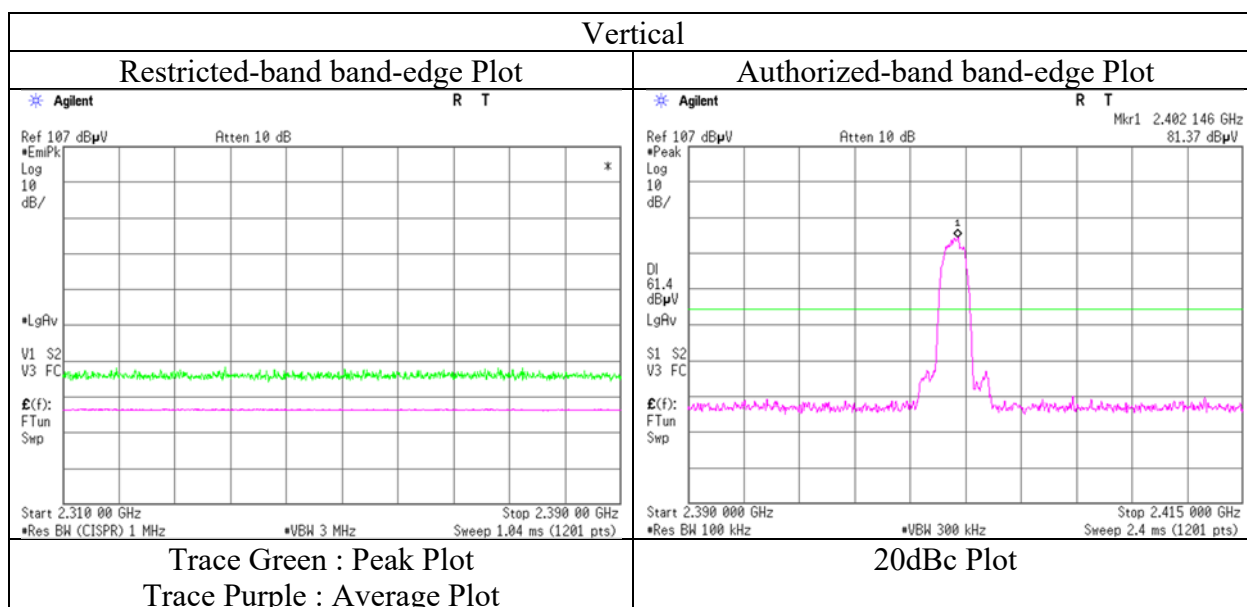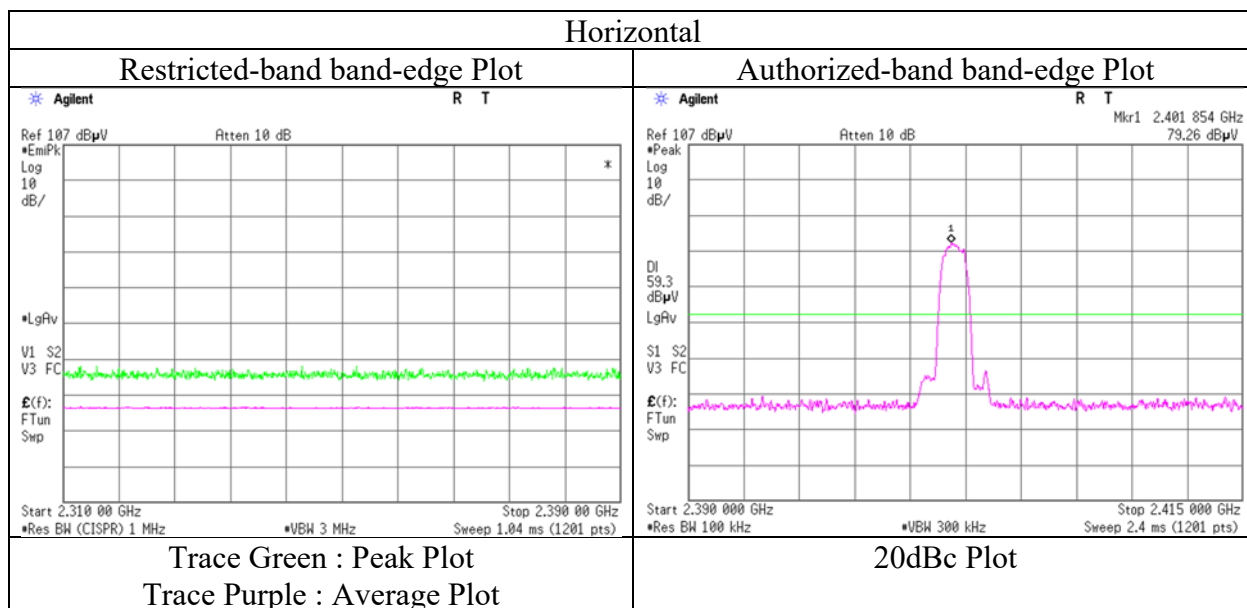

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Shonan EMC Lab.		
Semi Anechoic Chamber	2	3	3
Date	July 15, 2022	July 19, 2022	July 19, 2022
Temperature / Humidity	24 deg.C, 56 %RH	24 deg.C, 48 %RH	25 deg.C, 52 %RH
Engineer	Akihiro Oda	Takahiro Kawakami	Hiromasa Sato
	(1 GHz -2.8 GHz)	(2.8 GHz -18 GHz)	(18 GHz -26.5 GHz)
Mode	Tx, Hopping Off, 3DH5 2441 MHz		

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg]	Remark
Hori.	3732.028	PK	52.61	29.66	6.68	42.22	2.19	48.92	73.9	24.9	131	205	-
Hori.	4482.202	PK	52.72	30.77	7.06	42.98	2.19	49.76	73.9	24.1	174	134	-
Hori.	4882.000	PK	48.44	31.64	7.29	42.83	2.19	46.73	73.9	27.1	150	0	-
Hori.	7323.000	PK	48.76	37.46	8.96	43.52	2.19	53.85	73.9	20.0	150	0	-
Hori.	9764.000	PK	48.81	39.18	10.24	43.02	2.19	57.40	73.9	16.5	150	0	-
Hori.	3732.028	AV	45.12	29.66	6.68	42.22	2.19	41.43	53.9	12.4	131	205	VBW:10 Hz
Hori.	4482.202	AV	42.88	30.77	7.06	42.98	2.19	39.92	53.9	13.9	174	134	VBW:10 Hz
Hori.	4882.000	AV	36.41	31.64	7.29	42.83	2.19	34.70	53.9	19.2	150	0	VBW:360 Hz,Floor noise
Hori.	7323.000	AV	36.54	37.46	8.96	43.52	2.19	41.63	53.9	12.2	150	0	VBW:360 Hz,Floor noise
Hori.	9764.000	AV	36.46	39.18	10.24	43.02	2.19	45.05	53.9	8.8	150	0	VBW:360 Hz,Floor noise
Vert.	3732.038	PK	53.39	29.66	6.68	42.22	2.19	49.70	73.9	24.2	395	174	-
Vert.	4481.103	PK	53.15	30.76	7.06	42.98	2.19	50.18	73.9	23.7	388	176	-
Vert.	4882.000	PK	48.52	31.64	7.29	42.83	2.19	46.81	73.9	27.0	150	0	-
Vert.	7323.000	PK	47.99	37.46	8.96	43.52	2.19	53.08	73.9	20.8	150	0	-
Vert.	9764.000	PK	48.82	39.18	10.24	43.02	2.19	57.41	73.9	16.4	150	0	-
Vert.	3732.038	AV	47.21	29.66	6.68	42.22	2.19	43.52	53.9	10.3	395	174	VBW:10 Hz
Vert.	4481.103	AV	45.07	30.76	7.06	42.98	2.19	42.10	53.9	11.8	388	176	VBW:10 Hz
Vert.	4882.000	AV	36.36	31.64	7.29	42.83	2.19	34.65	53.9	19.2	150	0	VBW:360 Hz,Floor noise
Vert.	7323.000	AV	37.01	37.46	8.96	43.52	2.19	42.10	53.9	11.8	150	0	VBW:360 Hz,Floor noise
Vert.	9764.000	AV	36.47	39.18	10.24	43.02	2.19	45.06	53.9	8.8	150	0	VBW:360 Hz,Floor noise

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor

Distance factor : 1 GHz - 10 GHz : $20\log(3.86\text{ m} / 3.0\text{ m}) = 2.19\text{ dB}$

10 GHz - 40 GHz : $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

*These results have sufficient margin without taking account Duty cycle correction factor.

Radiated Spurious Emission

Test place	Shonan EMC Lab.		
Semi Anechoic Chamber	2	3	3
Date	July 15, 2022	July 19, 2022	July 19, 2022
Temperature / Humidity	24 deg.C, 56 %RH	24 deg.C, 48 %RH	25 deg.C, 52 %RH
Engineer	Akihiro Oda	Takahiro Kawakami	Hiromasa Sato
	(1 GHz -2.8 GHz)	(2.8 GHz -18 GHz)	(18 GHz -26.5 GHz)
Mode	Tx, Hopping Off, 3DH5 2480 MHz		

(* PK: Peak, AV: Average, QP: Quasi-Peak)

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Distance Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [deg]	Remark
Hori.	2483.500	PK	45.00	28.44	13.59	38.76	2.19	50.46	73.9	23.4	132	215	-
Hori.	3732.029	PK	52.67	29.66	6.68	42.22	2.19	48.98	73.9	24.9	131	206	-
Hori.	4481.160	PK	52.39	30.76	7.06	42.98	2.19	49.42	73.9	24.4	171	134	-
Hori.	4960.000	PK	48.30	31.81	7.35	42.80	2.19	46.85	73.9	27.0	150	0	-
Hori.	7440.000	PK	47.63	37.61	9.06	43.65	2.19	52.84	73.9	21.0	150	0	-
Hori.	9920.000	PK	47.11	39.03	10.31	42.82	2.19	55.82	73.9	18.0	150	0	-
Hori.	2483.500	AV	33.06	28.44	13.59	38.76	2.19	38.52	53.9	15.3	132	215	VBW:360 Hz
Hori.	3732.029	AV	44.98	29.66	6.68	42.22	2.19	41.29	53.9	12.6	131	206	VBW:10 Hz
Hori.	4481.160	AV	43.43	30.76	7.06	42.98	2.19	40.46	53.9	13.4	171	134	VBW:10 Hz
Hori.	4960.000	AV	36.43	31.81	7.35	42.80	2.19	34.98	53.9	18.9	150	0	VBW:360 Hz,Floor noise
Hori.	7440.000	AV	36.10	37.61	9.06	43.65	2.19	41.31	53.9	12.5	150	0	VBW:360 Hz,Floor noise
Hori.	9920.000	AV	35.50	39.03	10.31	42.82	2.19	44.21	53.9	9.6	150	0	VBW:360 Hz,Floor noise
Vert.	2483.500	PK	43.77	28.44	13.59	38.76	2.19	49.23	73.9	24.6	109	10	-
Vert.	3732.052	PK	53.89	29.66	6.68	42.22	2.19	50.20	73.9	23.7	392	176	-
Vert.	4482.590	PK	53.10	30.77	7.06	42.98	2.19	50.14	73.9	23.7	381	176	-
Vert.	4960.000	PK	48.14	31.81	7.35	42.80	2.19	46.69	73.9	27.2	150	0	-
Vert.	7440.000	PK	48.72	37.61	9.06	43.65	2.19	53.93	73.9	19.9	150	0	-
Vert.	9920.000	PK	48.81	39.03	10.31	42.82	2.19	57.52	73.9	16.3	150	0	-
Vert.	2483.500	AV	33.67	28.44	13.59	38.76	2.19	39.13	53.9	14.7	109	10	VBW:360 Hz
Vert.	3732.052	AV	47.34	29.66	6.68	42.22	2.19	43.65	53.9	10.2	392	176	VBW:10 Hz
Vert.	4482.590	AV	44.91	30.77	7.06	42.98	2.19	41.95	53.9	11.9	381	176	VBW:10 Hz
Vert.	4960.000	AV	36.44	31.81	7.35	42.80	2.19	34.99	53.9	18.9	150	0	VBW:360 Hz,Floor noise
Vert.	7440.000	AV	36.32	37.61	9.06	43.65	2.19	41.53	53.9	12.3	150	0	VBW:360 Hz,Floor noise
Vert.	9920.000	AV	35.62	39.03	10.31	42.82	2.19	44.33	53.9	9.5	150	0	VBW:360 Hz,Floor noise

Result = Reading + Ant.Fac. + Loss (Cable+(Attenuator or Filter)(below 18 GHz)) - Gain(Amplifier) + Distance factor



Distance factor : 1 GHz - 10 GHz : $20\log(3.86\text{ m} / 3.0\text{ m}) = 2.19\text{ dB}$

10 GHz - 40 GHz : $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.54\text{ dB}$

*These results have sufficient margin without taking account Duty cycle correction factor.

Radiated Spurious Emission (Reference Plot for band-edge)


Test place	Shonan EMC Lab.
Semi Anechoic Chamber	2
Date	July 15, 2022
Temperature / Humidity	24 deg.C, 56 %RH
Engineer	Akihiro Oda
	(1 GHz -2.8 GHz)
Mode	Tx, Hopping Off, 3DH5 2480 MHz

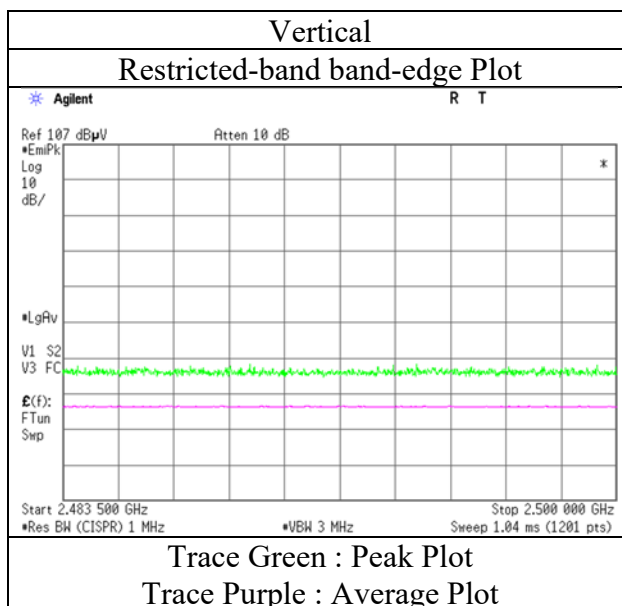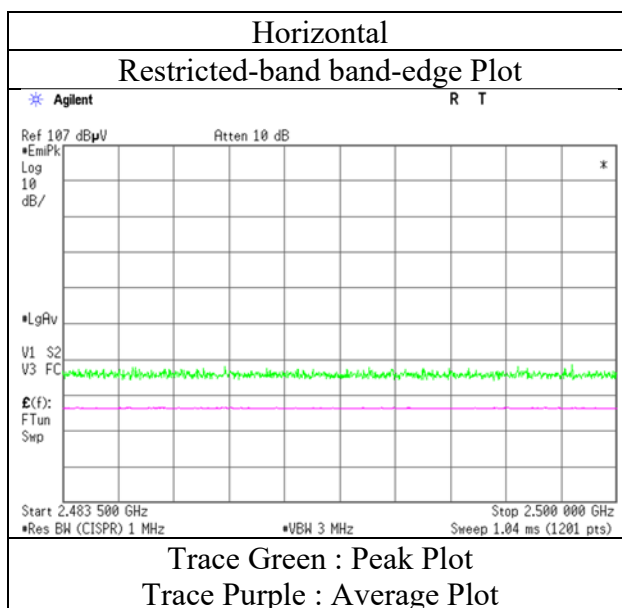

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission (Plot data, Worst case mode for Maximum Peak Output Power)

Test place	Shonan EMC Lab.			
Semi Anechoic Chamber	3	2	3	3
Date	September 5, 2022	July 15, 2022	July 19, 2022	July 19, 2022
Temperature / Humidity	24 deg.C, 38 %RH	24 deg.C, 56 %RH	24 deg.C, 48 %RH	25 deg.C, 52 %RH
Engineer	Yosuke Murakami	Akihiro Oda	Takahiro Kawakami	Hiromasa Sato
	(30 MHz -1 GHz)	(1 GHz -2.8 GHz)	(2.8 GHz -18 GHz)	(18 GHz -26.5 GHz)
Mode	Tx, Hopping Off, 3DH5 2402 MHz			

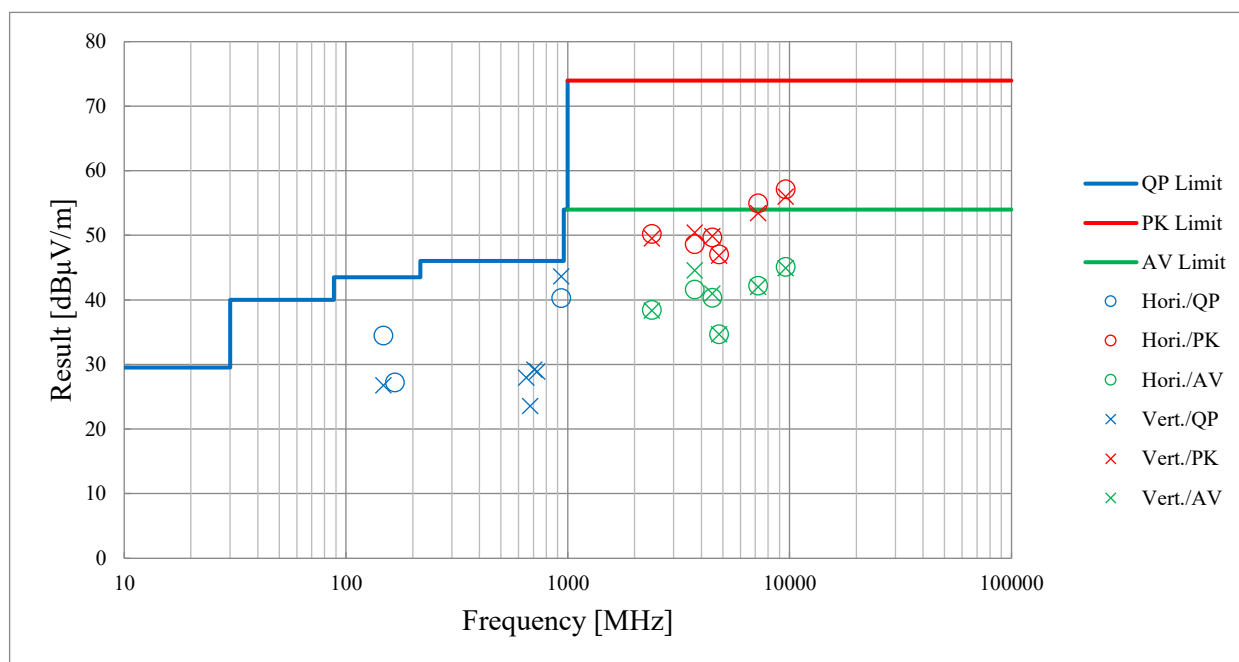


*These plots data contains sufficient number to show the trend of characteristic features for EUT.

Conducted Spurious Emission

Test place
Date
Temperature / Humidity
Engineer
Mode

Shonan EMC Lab. No.5 Shielded Room
July 19, 2022
25 deg. C / 47 % RH
Shiro Kobayashi
Tx, Hopping Off, DH5


2402 MHz

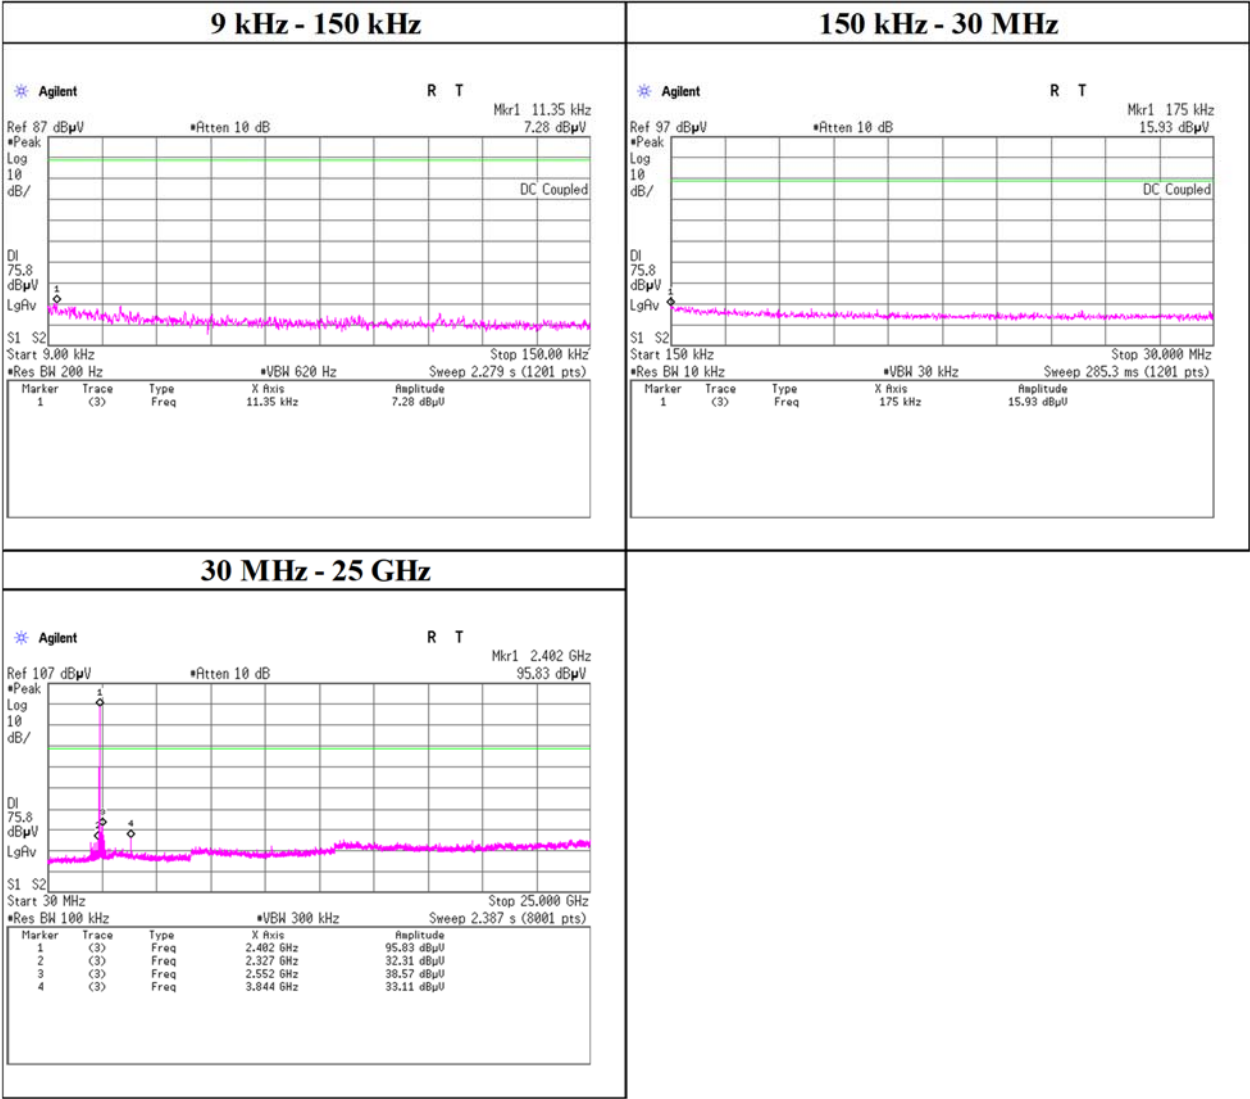

Conducted Spurious Emission

Test place	Shonan EMC Lab. No.5 Shielded Room
Date	July 19, 2022
Temperature / Humidity	25 deg. C / 47 % RH
Engineer	Shiro Kobayashi
Mode	Tx, Hopping Off, DH5

2441 MHz

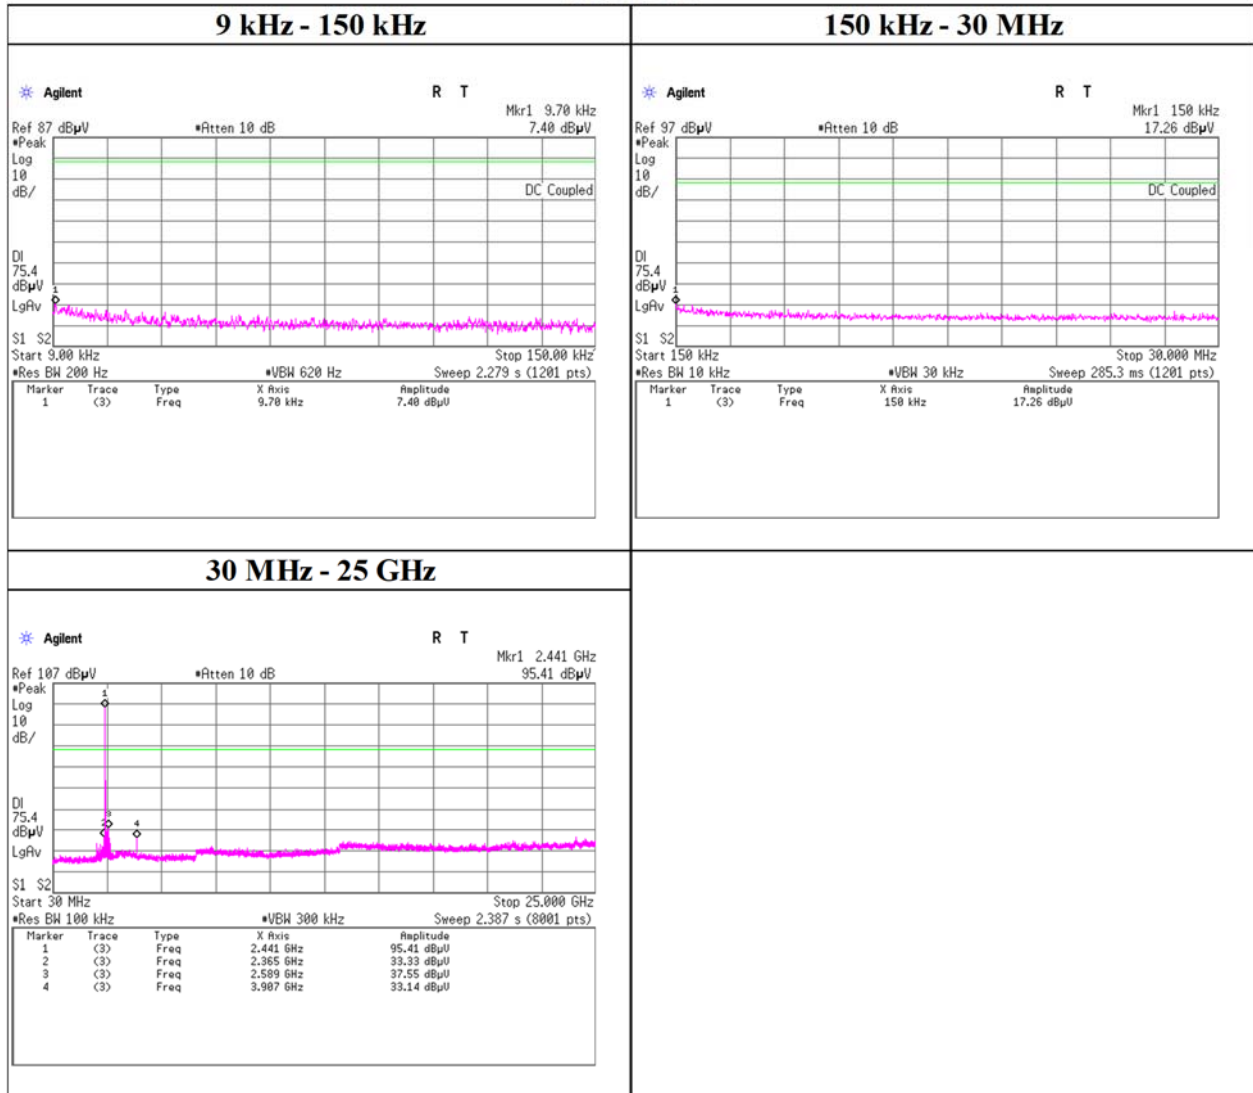

Conducted Spurious Emission

Test place

Shonan EMC Lab. No.5 Shielded Room

Date

July 19, 2022

Temperature / Humidity

25 deg. C / 47 % RH


Engineer

Shiro Kobayashi

Mode

Tx, Hopping Off, DH5


2480 MHz

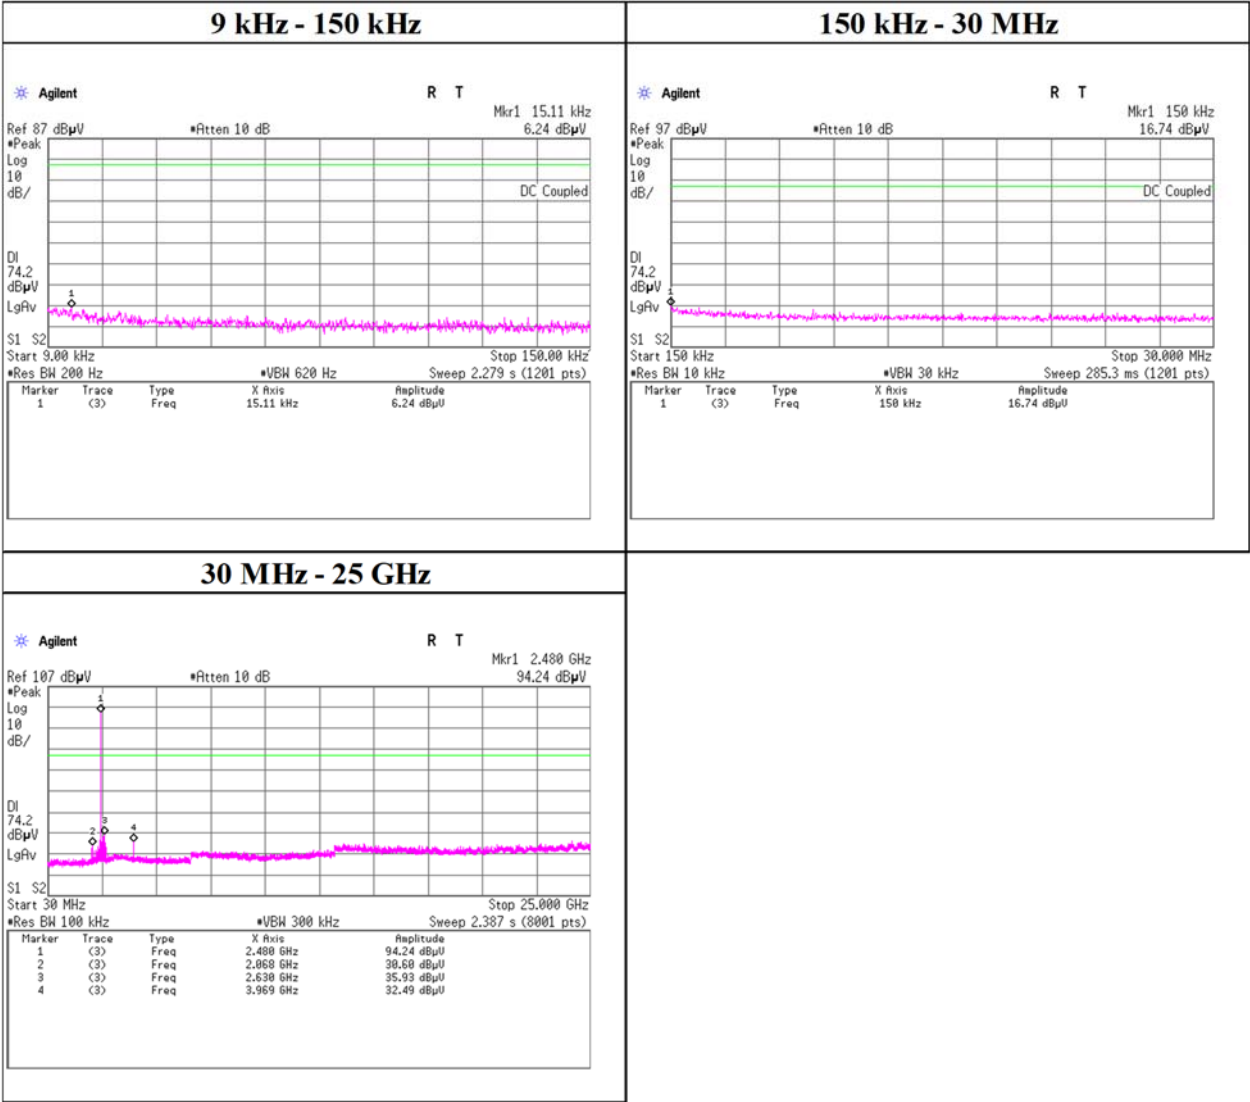

Conducted Spurious Emission

Test place Shonan EMC Lab. No.5 Shielded Room
Date July 19, 2022
Temperature / Humidity 25 deg. C / 47 % RH
Engineer Shiro Kobayashi
Mode Tx, Hopping Off, 3DH5

2402 MHz

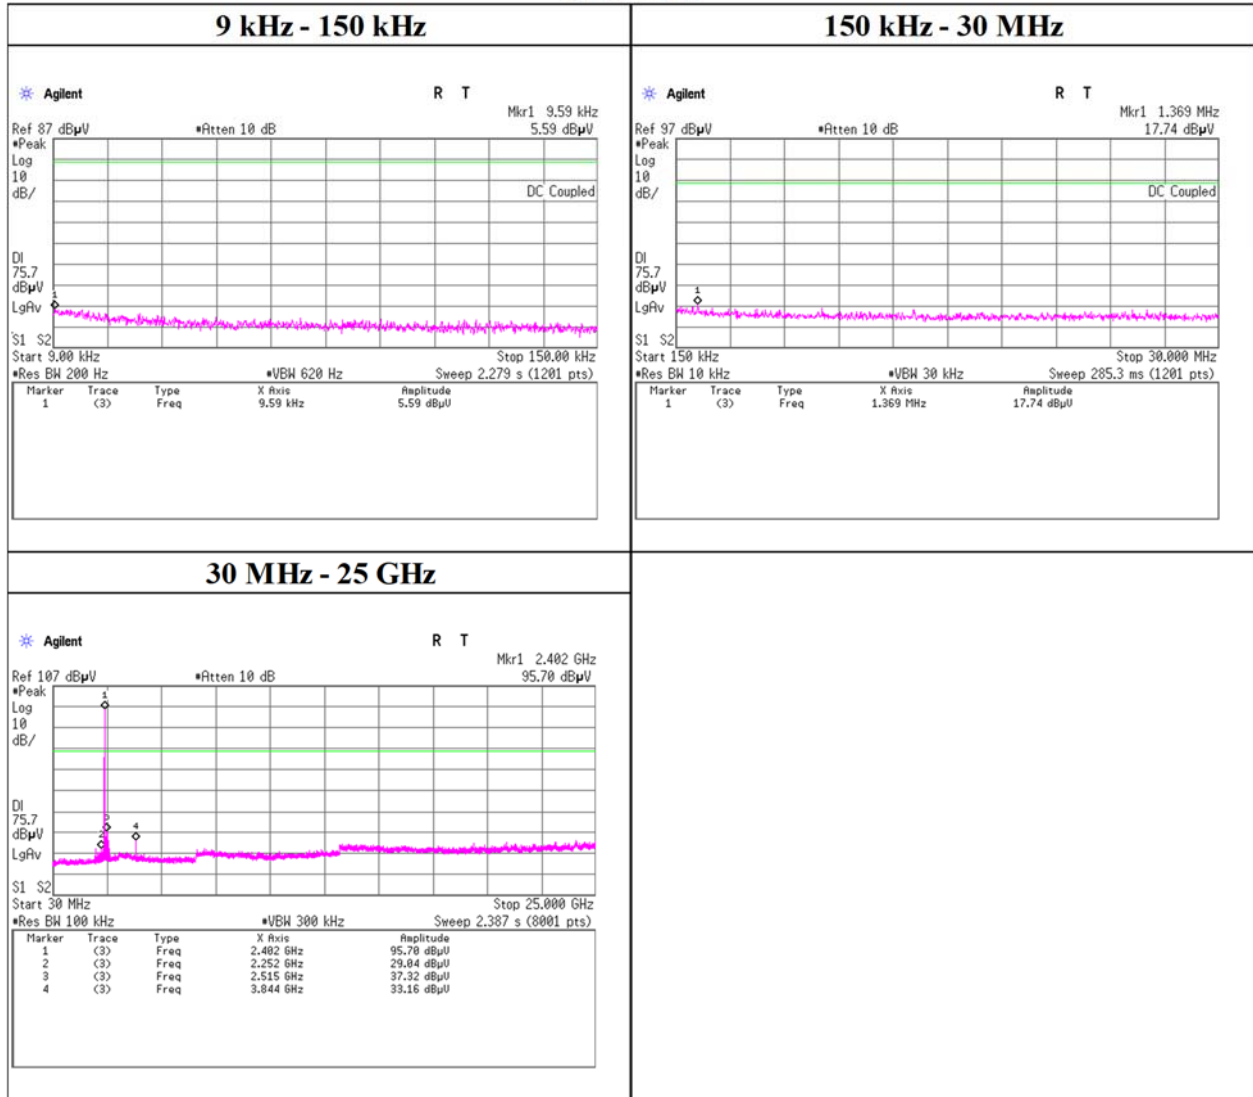

Conducted Spurious Emission

Test place

Shonan EMC Lab. No.5 Shielded Room

Date

July 19, 2022

Temperature / Humidity

25 deg. C / 47 % RH


Engineer

Shiro Kobayashi

Mode

Tx, Hopping Off, 3DH5


2441 MHz

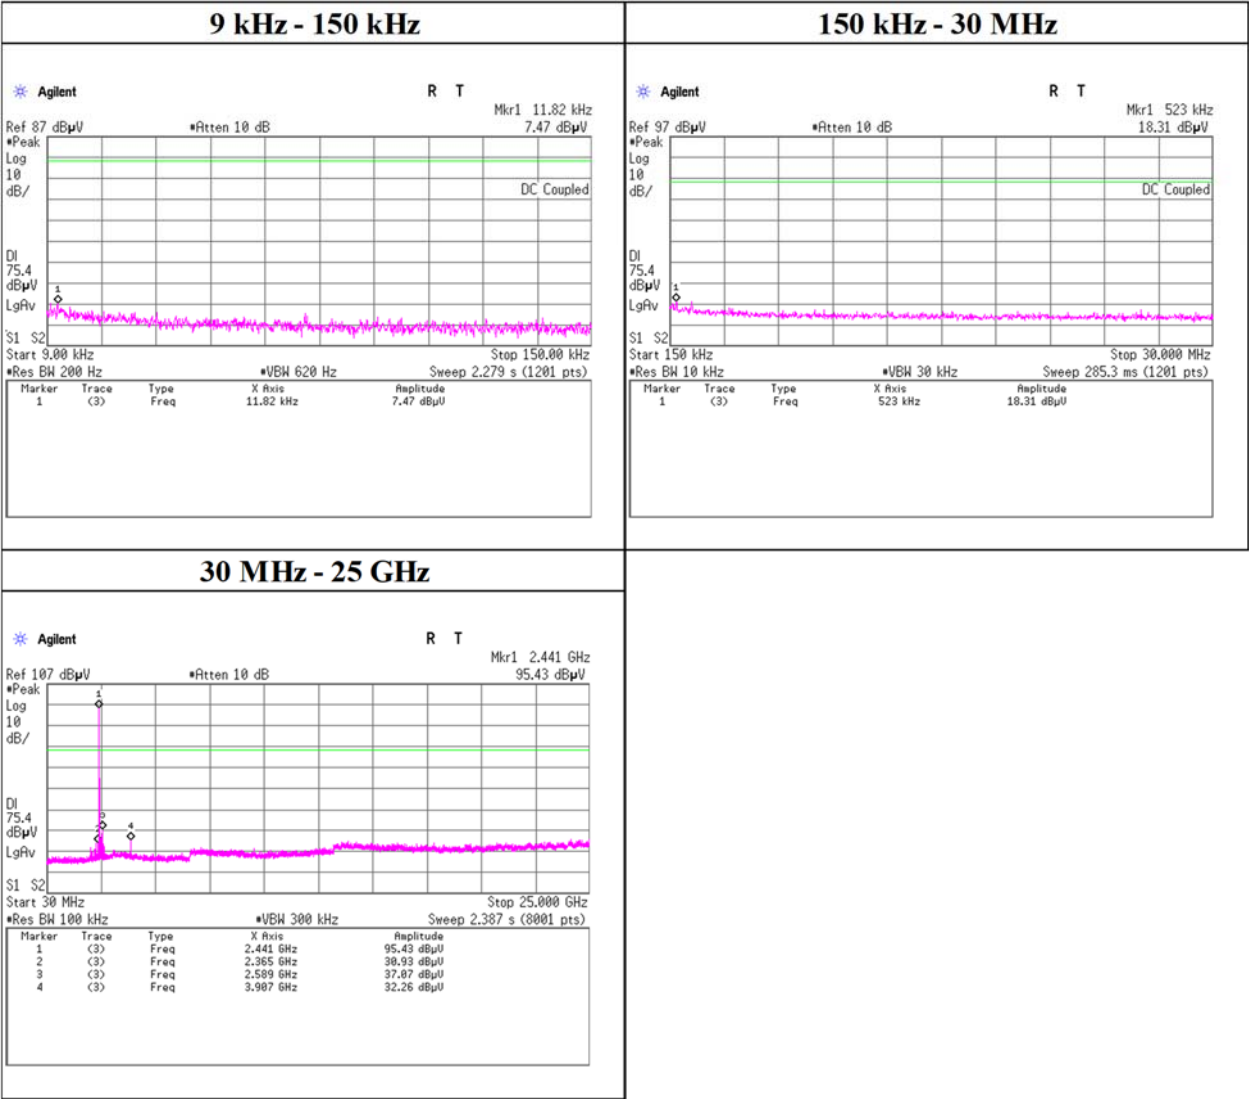

Conducted Spurious Emission



Test place Shonan EMC Lab. No.5 Shielded Room
Date July 19, 2022
Temperature / Humidity 25 deg. C / 47 % RH
Engineer Shiro Kobayashi
Mode Tx, Hopping Off, 3DH5

2480 MHz

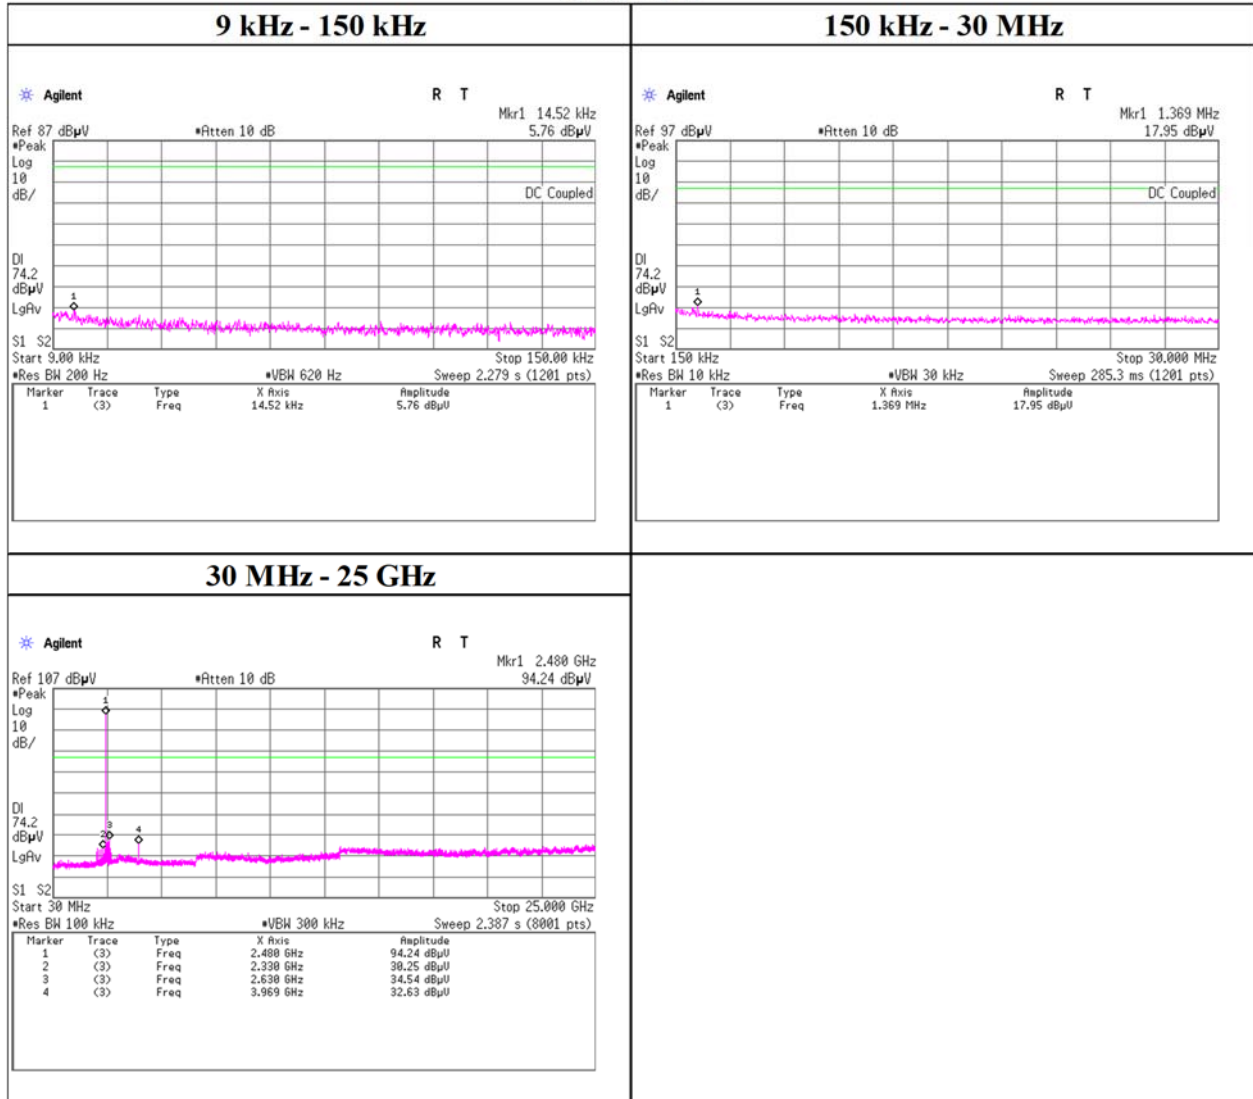



Conducted Emission Band Edge compliance

Test place Shonan EMC Lab. No.5 Shielded Room
Date July 19, 2022
Temperature / Humidity 25 deg. C / 47 % RH
Engineer Shiro Kobayashi
Mode Tx DH5

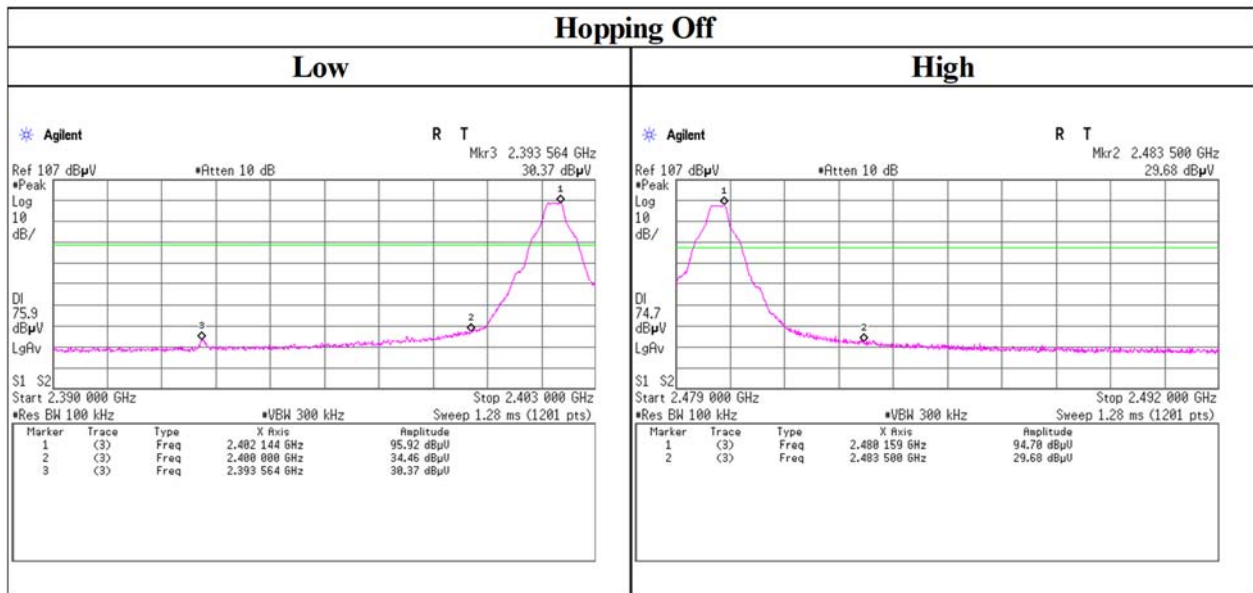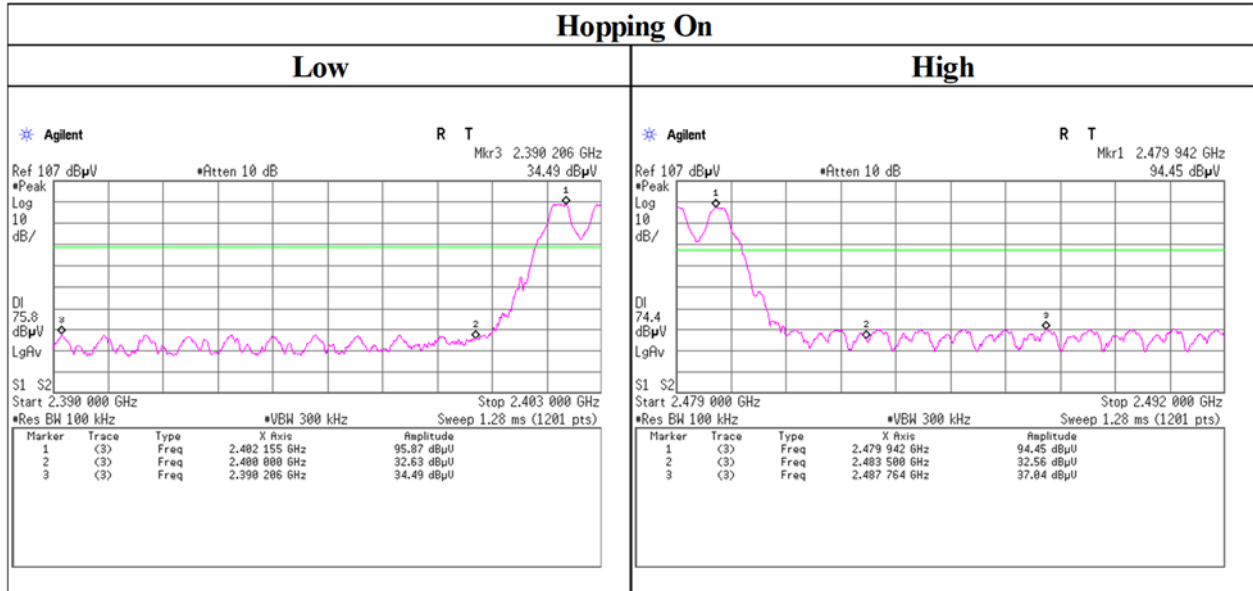

Conducted Emission Band Edge compliance

Test place Shonan EMC Lab. No.5 Shielded Room
Date July 19, 2022
Temperature / Humidity 25 deg. C / 47 % RH
Engineer Shiro Kobayashi
Mode Tx 3DH5

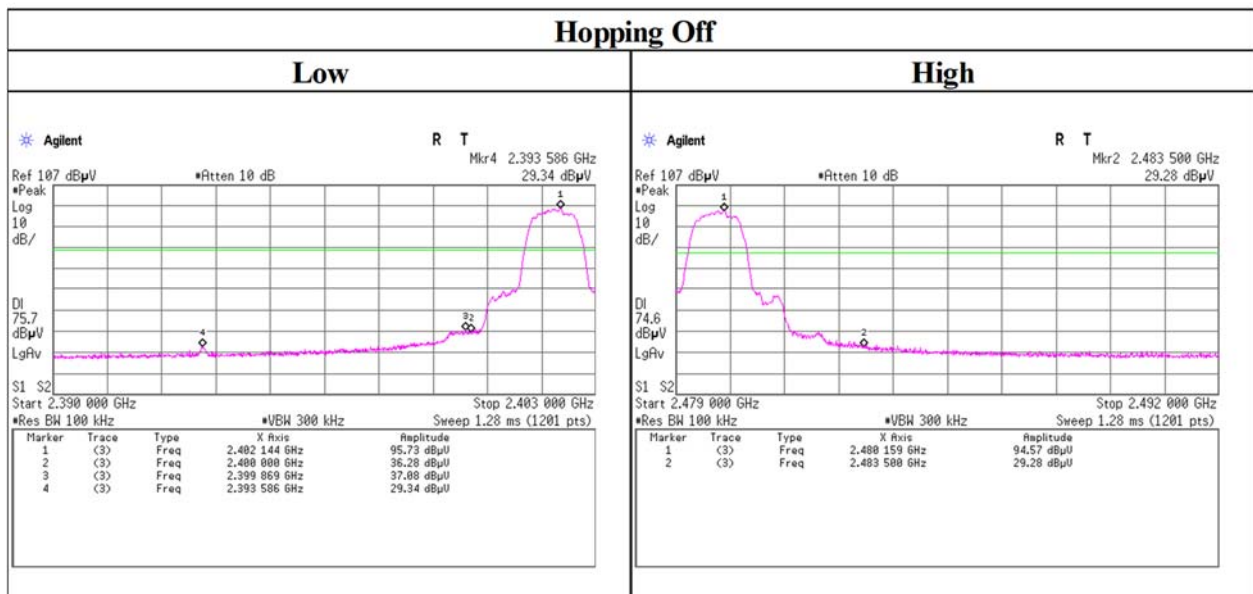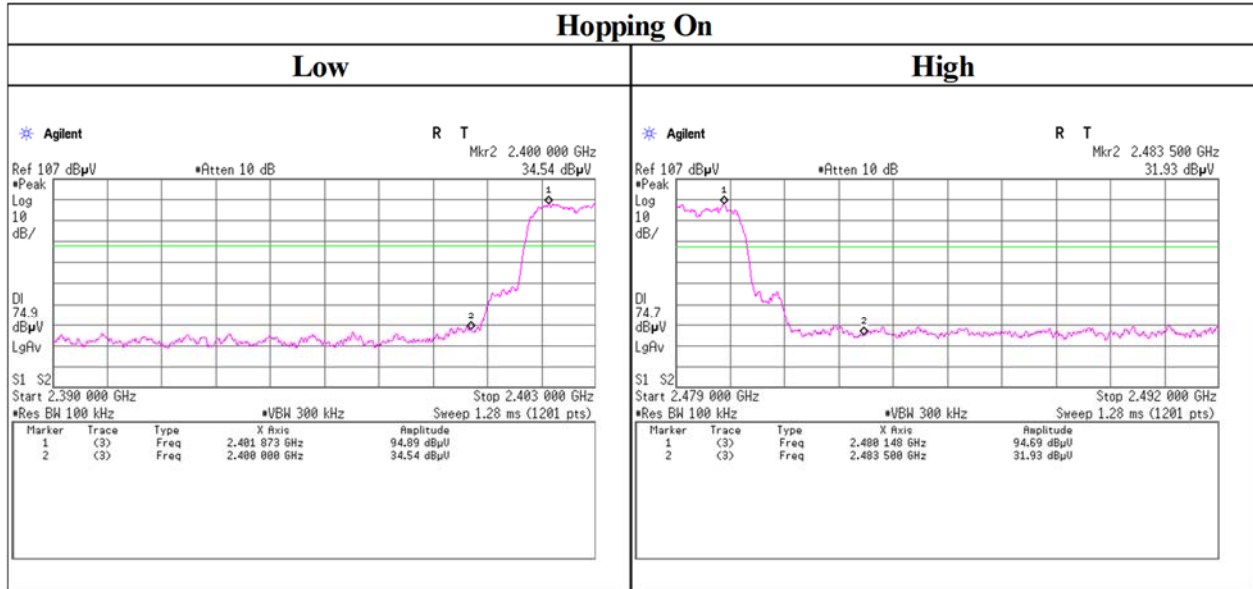

APPENDIX 2: Test Instruments

Test Equipment (1/2)

Test Item	Local ID	LIMS ID	Description	Manufacturer	Model	Serial	Last Calibration Date	Cal Int
AT	KTS-07	145111	Digital Tester	SANWA	PC500	7019232	2021/09/14	12
AT	SAT10-09	145132	Attenuator	Weinschel Corp.	54A-10	W5692	2021/10/05	12
AT	SAT10-12	151609	Attenuator	Weinschel Corp.	54A-10	81601	2022/03/02	12
AT	SCC-G63	196946	Coaxial Cable	Huber+Suhner	SUCOFLEX 102	803411/2	2022/03/01	12
AT	SCC-G67	196949	Coaxial Cable	Huber+Suhner	SUCOFLEX 102	803480/2	2022/03/02	12
AT	SOS-27	191845	Thermo-Hygrometer	CUSTOM. Inc	CTH-201	-	2022/08/08	12
AT	SPM-13	169910	Power Meter	Keysight Technologies Inc	8990B	MY51000448	2022/01/25	12
AT	SPSS-06	169911	Power sensor	Keysight Technologies Inc	N1923A	MY57270004	2022/01/25	12
AT	SRENT-22	202830	Spectrum Analyzer	Keysight Technologies Inc	E4440A	MY48250036	2021/12/01	12
AT	STM-G10	171617	Terminator	Weinschel - API Technologies Corp	M1459A	92420	2022/05/12	12
AT	STM-G8	171615	Terminator	Weinschel - API Technologies Corp	M1459A	88997	2022/05/20	12
AT	STS-05	146212	Digital Hitester	HIOKI E.E. CORPORATION	3805-50	80997828	2021/09/14	12
RE	COTS-SEMI-5	170932	EMI Software	TSJ (Techno Science Japan)	TEPTO-DV3(RE,CE,ME,PE)	-	-	-
RE	KJM-02	146432	Measure	TAJIMA	GL19-55	-	-	-
RE	KSA-08	145089	Spectrum Analyzer	Keysight Technologies Inc	E4446A	MY46180525	2021/10/13	12
RE	SAEC-02 (SVSWR)	145598	Semi-Anechoic Chamber	TDK	SAEC-02(SVSWR)	2	2022/05/16	12
RE	SAEC-03 (NSA)	145565	Semi-Anechoic Chamber	TDK	SAEC-03(NSA)	3	2022/04/15	12
RE	SAEC-03 (SVSWR)	145566	Semi-Anechoic Chamber	TDK	SAEC-03(SVSWR)	3	2022/05/18	12
RE	SAF-03	145126	Pre Amplifier	SONOMA	310N	290213	2022/02/24	12
RE	SAF-05	145128	Pre Amplifier	Toyo Corporation	TPA0118-36	1440490	2022/05/12	12
RE	SAF-06	145005	Pre Amplifier	Toyo Corporation	TPA0118-36	1440491	2022/02/04	12
RE	SAF-08	145007	Pre Amplifier	Toyo Corporation	HAP18-26W	19	2022/03/03	12
RE	SAT10-06	145137	Attenuator	Keysight Technologies Inc	8493C-010	74865	2021/10/05	12
RE	SAT6-13	167094	Attenuator	JFW	50HF-006N	-	2022/02/21	12
RE	SBA-03	145023	Biconical Antenna	Schwarzbeck Mess-Elektronik OHG	BBA9106	91032666	2022/05/14	12

Test Equipment (2/2)

Test Item	Local ID	LIMS ID	Description	Manufacturer	Model	Serial	Last Calibration Date	Cal Int
RE	SCC-C1/C2/C3/C4/C5/C10/SRSE-03	145171	Coaxial Cable&RF Selector	Fujikura/Fujikura/Suhner/Suhner/Suhner/Suhner/TOYO	8D2W/12DSFA/141PE/141PE/141PE/NS4906	-/0901-271 (RF Selector)	2022/04/20	12
RE	SCC-G15	145176	Coaxial Cable	Suhner	SUCOFLEX 102	32703/2	2022/03/03	12
RE	SCC-G40	166491	Coaxial Cable	Junkosha	MWX221-01000NFSNMS/B	1612S005	2022/01/06	12
RE	SCC-G43	156380	Coaxial Cable	Huber+Suhner	SUCOFLEX_104_E	SN MY 13406/4E	2022/05/20	12
RE	SCC-G50	178573	Coaxial Cable	Huber+Suhner	SUCOFLEX_104_E	MY13407/4E	2022/03/03	12
RE	SCC-G51	178572	Coaxial Cable	Huber+Suhner	SUCOFLEX 104	800288 /4A	2022/03/03	12
RE	SCC-G57	179540	Coaxial Cable	Huber+Suhner	SUCOFLEX 102	802815/2	2022/05/12	12
RE	SCC-G58	183047	Coaxial Cable	Huber+Suhner	SUCOFLEX 104	800287/4A	2022/05/20	12
RE	SCC-G70	200010	Coaxial Cable	Huber+Suhner	SUCOFLEX 104	575618/4	2022/07/22	12
RE	SFL-02	145301	Highpass Filter	MICRO-TRONICS	HPM50111	51	2021/10/07	12
RE	SHA-02	145384	Horn Antenna	Schwarzbeck Mess-Elektronik OHG	BBHA9120D	9120D-726	2022/03/10	12
RE	SHA-03	145501	Horn Antenna	Schwarzbeck Mess-Elektronik OHG	BBHA9120D	9120D-739	2022/03/16	12
RE	SHA-04	145512	Horn Antenna	ETS-Lindgren	3160-09	00094868	2022/06/06	12
RE	SHA-10	194685	Horn Antenna	Schwarzbeck Mess-Elektronik OHG	BBHA 9120 C	711	2022/03/16	12
RE	SJM-20	207277	Measuring	ASKUL	-	-	-	-
RE	SLA-07	145529	Logperiodic Antenna	Schwarzbeck Mess-Elektronik OHG	VUSLP9111B	196	2022/05/14	12
RE	SOS-21	191838	Thermo-Hygrometer	CUSTOM. Inc	CTH-201	-	2022/08/08	12
RE	SOS-23	191840	Thermo-Hygrometer	CUSTOM. Inc	CTH-201	-	2022/08/08	12
RE	STR-09	213530	Test Receiver	Rohde & Schwarz	ESW44	103068	2022/01/17	12
RE	STS-02	145793	Digital Hitester	HIOKI E.E. CORPORATION	3805-50	80997819	2022/04/07	12
RE	STS-03	146210	Digital Hitester	HIOKI E.E. CORPORATION	3805-50	80997823	2021/09/14	12

*Hyphens for Last Calibration Date and Cal Int (month) are instruments that Calibration is not required (e.g. software), or instruments checked in advance before use.

The expiration date of the calibration is the end of the expired month.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.

All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.

Test item: RE: Radiated Emission
AT: Antenna Terminal Conducted