

Report No. : FG010618-04A



FCC RADIO TEST REPORT

FCC ID	: AK8-PM1300BV
Equipment	: Communication Device
Brand Name	: SONY
Applicant	: Sony Corporation 1-7-1 Konan, Minato-ku, Tokyo, 108-0075, Japan
Manufacturer	 Sony Network Communications Inc. 4-12-3 Higashi-Shinagawa, Shinagawa-ku, Tokyo, 140-0002, Japan
Standard	: 47 CFR Part 2, 22(H), 27

The product was received on Jan. 17, 2020 and testing was started from Jun. 16, 2020 and completed on Oct. 11, 2020. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA-603-E and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)

Page Number	: 1 of 24
Issued Date	: Oct. 20, 2020
Report Version	: 05



Table of Contents

His	story c	of this test report	3
Su	mmar	y of Test Result	4
1	Gene	eral Description	5
	1.1	Product Feature of Equipment Under Test	5
	1.2	Modification of EUT	5
	1.3	Emission Designator	6
	1.4	Testing Location	7
	1.5	Applicable Standards	8
2	Test	Configuration of Equipment Under Test	9
	2.1	Test Mode	9
	2.2	Connection Diagram of Test System	10
	2.3	Support Unit used in test configuration and system	10
	2.4	Measurement Results Explanation Example	10
	2.5	Frequency List of Low/Middle/High Channels	11
3	Conc	lucted Test Items	12
	3.1	Measuring Instruments	12
	3.2	Conducted Output Power and ERP/EIRP	13
	3.3	Peak-to-Average Ratio	14
	3.4	Occupied Bandwidth	15
	3.5	Conducted Band Edge	16
	3.6	Conducted Spurious Emission	17
	3.7	Frequency Stability	18
4	Radia	ated Test Items	19
	4.1	Measuring Instruments	19
	4.2	Radiated Spurious Emission Measurement	21
5	List o	of Measuring Equipment	22
6	Unce	ertainty of Evaluation	24
Ар	pendi	x A. Test Results of Conducted Test	

Appendix B. Test Results of ERP/EIRP and Radiated Test



History of this test report

Report No.	Version	Description	Issued Date
FG010618-04A	01	Initial issue of report	Sep. 25, 2020
FG010618-04A	02	Revising test data and test description.	Oct. 12, 2020
FG010618-04A	03	Revising list of measuring equipment.	Oct. 14, 2020
FG010618-04A	04	Revising remark description and measuring equipment information.	Oct. 16, 2020
FG010618-04A	05	Revising typo.	Oct. 20, 2020



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
	§2.1046	Conducted Output Power	Reporting only	
3.2	§22.913 (a)(2)	Effective Radiated Power (Band 26)	Deep	-
	§27.50 (d)(4)	Equivalent Isotropic Radiated Power (Band 4)	Pass	
3.3	§27.50 (d)(5)	Peak-to-Average Ratio	Pass	-
3.4	§2.1049	Occupied Bandwidth	Reporting only	-
3.5	§2.1051 §22.917 (a) §27.53 (h)	Conducted Band Edge Measurement (Band 4) (Band 26)	Pass	-
3.6	§2.1051 §22.917 (a) §27.53 (h)	Conducted Spurious Emission (Band 4) (Band 26)	Pass	-
3.7	§2.1055 §22.355 §27.54	Frequency Stability Temperature & Voltage	Pass	-
4.2	§2.1053 §22.917 (a) §27.53 (h)	Radiated Spurious Emission (Band 4) (Band 26)	Pass	Under limit 24.88 dB at 5212.000 MHz

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Wii Chang

Report Producer: Ann Lee

General Description 1

1.1 Product Feature of Equipment Under Test

LTE, Bluetooth, and GNSS.

Product Specification subjective to this standard							
Antenna TypeWWAN: Monopole AntennaBluetooth: PIFA AntennaGPS / Glonass: PIFA Antenna							
	EUT	Information List					
HW Version	Version S/N Perform						
	01.00	824791989	Conducted Measurement				
А	01.00	824880631	ERP Test				
~	02.00	43040100	Radiated Spurious Emission				
	A	Accessory List					
AC Adapter	Model Name S/N : 6218W3	e : UCH20					
USB Cable Model Name : UCB20 S/N : N/A							
Battery	Model Name S/N : N/A	: AHB381936HPC					

Note:

1. Above EUT list used are electrically identical per declared by manufacturer.

S/N : N/A

- 2. Above the accessories list are used to exercise the EUT during test, and the serial number of each type of accessories is listed in each section of this report.
- 3. For other wireless features of this EUT, test report will be issued separately.

1.2 Modification of EUT

No modifications are made to the EUT during all test items.



1.3 Emission Designator

L	TE Band 4		QPSK		16QAM			
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)	
1.4	1710.7~1754.3	1M10G7D	-	0.0194	1M09W7D	-	0.0153	
3	1711.5~1753.5	1M11G7D	-	0.0187	1M11W7D	-	0.0147	
5	1712.5~1752.5	1M11G7D	-	0.0187	1M12W7D	-	0.0198	
10	1715.0~1750.0	1M14G7D	0.0202	0.0190	1M12W7D	-	0.0199	
15	1717.5~1747.5	1M11G7D	-	0.0189	1M14W7D	-	0.0197	
20	1720.0~1745.0	1M12G7D	-	0.0189	1M12W7D	-	0.0198	
Ľ	TE Band 26	QPSK			16QAM			
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum ERP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum ERP(W)	
1.4	824.7~848.3	1M11G7D	-	0.0083	1M10W7D	-	0.0087	
3	825.5~847.5	1M10G7D	-	0.0083	1M11W7D	-	0.0087	
5	826.5~846.5	1M12G7D	-	0.0081	1M11W7D	-	0.0087	
10	829.0~844.0	1M12G7D	0.0025	0.0085	1M12W7D	-	0.0087	
15	831.5~841.5	1M14G7D	-	0.0084	1M11W7D	-	0.0087	



1.4 Testing Location

Test Site	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory					
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978					
Test Site No.	Sporton Site No.					
Test one no.	TH05-HY					
Test Engineer	Benjamin Lin					
Temperature	23~24 ℃					
Relative Humidity	51~55 %					
Test Site	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory					
Test Site Test Site Location						
Test Site Location	Laboratory No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868					
	Laboratory No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855					
Test Site Location	Laboratory No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855 Sporton Site No.					
Test Site Location Test Site No.	Laboratory No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855 Sporton Site No. 03CH12-HY					

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No.: TW1190 and TW0007



1.5 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

• ANSI C63.26-2015

- ANSI C03.20-2013
 ANSI / TIA-603-E
- 47 CFR Part 2, 22(H), 27
- FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- FCC KDB 412172 D01 Determining ERP and EIRP v01r01
- FCC KDB 414788 D01 Radiated Test Site v01r01

Remark:

- 1. All test items were verified and recorded according to the standards and without any deviation during the test.
- 2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.
- 3. The TAF code is not including all the FCC KDB listed without accreditation.

Test Configuration of Equipment Under Test 2

2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168


D01 Power Meas. License Digital Systems v03r01 with maximum output power.

For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane) were recorded in this report.

To at literat	Band	Bandwidth (MHz)				Modulation			RB #			Test Channel				
Test Items	Bano	1.4	3	5	10	15	20	QPSK	16QAM	64QAM	1	Half	Full	L	м	н
Max. Output	4	v	v	v	v	v	v	v	v		v	v	v	v	v	v
Power	26	v	v	v	v	v	-	v	v		v	v	v	v	v	v
Peak-to-Aver	4						v	v	v		v		v	v	v	v
age Ratio	26					v	-	v	v		v		v	v	v	v
26dB and	4	v	v	v	v	v	v	v	v				v	v	v	v
99% Bandwidth	26	v	v	v	v	v	-	v	v				v	v	v	v
Conducted	4	v	v	v	v	v	v	v	v		v		v	v		v
Band Edge	26	v	v	v	v	v	-	v	v		v		v	v		v
Conducted	4	v	v	v	v	v	v	v	v		v			v	v	v
Spurious Emission	26	v	v	v	v	v	-	v	v		v			v	v	v
Frequency	4				v			v					v		v	
Stability	26				v		-	v					v		v	
E.R.P/	4	v	v	v	v	v	v	v	v		v			v	v	v
E.I.R.P	26	v	v	v	v	v	-	v	v		v			v	v	v
Radiated Spurious	4						w	orst Case)					v	v	v
Emission	26						w	orst Case	•							
Remark	 The mark "v " means that this configuration is chosen for testing The mark "-" means that this bandwidth is not supported. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emiliar 								se emis	sions	are	der				



2.2 Connection Diagram of Test System

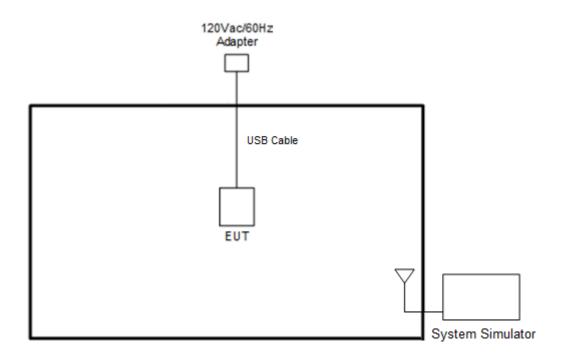

2.3 Support Unit used in test configuration and system

ltem	Equipment	Brand Name	Model No.	FCC ID	Data Cable	Power Cord	
1.	System Simulator	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m	

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

Example :

Offset(dB) = RF cable loss(dB) + attenuator factor(dB).

= 4.2 + 10 = 14.2 (dB)



2.5 Frequency List of Low/Middle/High Channels

LTE Band 4 Channel and Frequency List									
BW [MHz]	Channel/Frequency(MHz)	Middle	Highest						
20	Channel	20050	20175	20300					
20	Frequency	1720	1732.5	1745					
45	Channel	20025	20175	20325					
15	Frequency	1717.5	1732.5	1747.5					
10	Channel	20000	20175	20350					
10	Frequency	1715	1732.5	1750					
F	Channel	19975	20175	20375					
5	Frequency	1712.5	1732.5	1752.5					
2	Channel	19965	20175	20385					
3	Frequency	1711.5	1732.5	1753.5					
1.4	Channel	19957	20175	20393					
1.4	Frequency	1710.7	1732.5	1754.3					

LTE Band 26 Channel and Frequency List									
BW [MHz]	Channel/Frequency(MHz)	Middle	Highest						
15	Channel	26865	26915	26965					
15	Frequency	831.5	836.5	841.5					
10	Channel	26840	26915	26990					
10	Frequency	829.0	836.5	844.0					
5	Channel	26815	26915	27015					
5	Frequency	826.5	836.5	846.5					
3	Channel	26805	26915	27025					
3	Frequency	825.5	836.5	847.5					
1.4	Channel	26797	26915	27033					
1.4	Frequency	824.7	836.5	848.3					




3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.1.1 Test Setup


3.1.2 Conducted Output Power



3.1.3 Peak-to-Average Ratio, Occupied Bandwidth ,Conducted Band-Edge and Conducted Spurious Emission

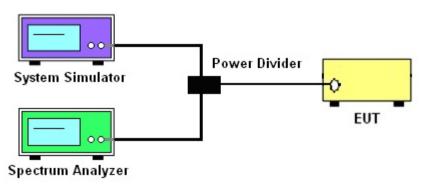

3.1.4 Frequency Stability

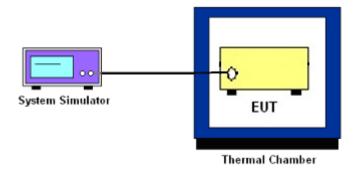

3.1.5 Test Result of Conducted Test

Please refer to Appendix A.



3.2 Conducted Output Power and ERP/EIRP

3.2.1 Description of the Conducted Output Power Measurement and ERP/EIRP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 7 Watts for LTE Band 26

The EIRP of mobile transmitters must not exceed 1 Watts for LTE Band 4

According to KDB 412172 D01 Power Approach,

 $EIRP = P_T + G_T - L_C$, ERP = EIRP - 2.15, where

- P_T = transmitter output power in dBm
- G_T = gain of the transmitting antenna in dBi

 L_{C} = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.2.2 Test Procedures

- 1. The transmitter output port was connected to the system simulator.
- 2. Set EUT at maximum power through the system simulator.
- 3. Select lowest, middle, and highest channels for each band and different modulation.
- 4. Measure and record the power level from the system simulator.



3.3 Peak-to-Average Ratio

3.3.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.3.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.2.6

- 1. The EUT was connected to spectrum and system simulator via a power divider.
- 2. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
- 3. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
- 4. Record the deviation as Peak to Average Ratio.



3.4 Occupied Bandwidth

3.4.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.4.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.4.3 (26dB) and Section 5.4.4 (99OB)

- 1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
- The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span of the spectrum analyzer should be more than 2 times the expected OBW.
- 3. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
- 4. Set the detection mode to peak, and the trace mode to max hold.
- Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace. (this is the reference value)
- 6. Determine the "-26 dB down amplitude" as equal to (Reference Value X).
- 7. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the "–X dB down amplitude" determined in step 6. If a marker is below this "-X dB down amplitude" value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
- 8. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



3.5 Conducted Band Edge

3.5.1 Description of Conducted Band Edge Measurement

22.917(a)

For operations in the 824 – 849 MHz band, the FCC limit is 43 + 10log10(P[Watts]) dB below the transmitter power P(Watts) in a 100kHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

27.53 (h)

For operations in the 1710 - 1755 MHz band, the FCC limit is $43 + 10log_{10}(P[Watts])$ dB below the transmitter power P(Watts) in a 1 MHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

3.5.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

- 1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
- 2. The band edges of low and high channels for the highest RF powers were measured.
- 3. Set RBW >= 1% EBW in the 1MHz band immediately outside and adjacent to the band edge.
- 4. Beyond the 1 MHz band from the band edge, RBW=1MHz was used.
- 5. Set spectrum analyzer with RMS detector.
- 6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- 7. Checked that all the results comply with the emission limit line.

The limit line is derived from 43 + 10log(P)dB below the transmitter power P(Watts)

3.6 Conducted Spurious Emission

3.6.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least 43 + 10 log (P) dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.6.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

- 1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
- The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 3. The middle channel for the highest RF power within the transmitting frequency was measured.
- 4. The conducted spurious emission for the whole frequency range was taken.
- 5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
- 6. Set spectrum analyzer with RMS detector.
- 7. Taking the record of maximum spurious emission.
- 8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- 9. The limit line is derived from 43 + 10log(P)dB below the transmitter power P(Watts)



3.7 Frequency Stability

3.7.1 Description of Frequency Stability Measurement

22.355

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ (± 2.5 ppm) of the center frequency.

27.54

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

3.7.2 Test Procedures for Temperature Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

- 1. The EUT was set up in the thermal chamber and connected with the system simulator.
- With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
- 3. With power OFF, the temperature was raised in 10°C step up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.7.3 Test Procedures for Voltage Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

- 1. The EUT was placed in a temperature chamber at 20±5° C and connected with the system simulator.
- 2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
- 3. The variation in frequency was measured for the worst case.




4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.1.1 Test Setup

For radiated emissions below 30MHz

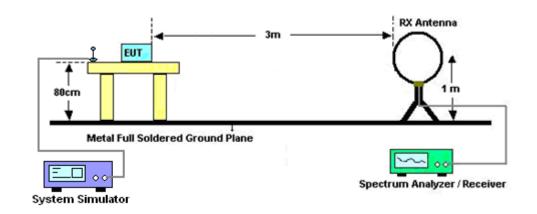


For radiated test from 30MHz to 1GHz

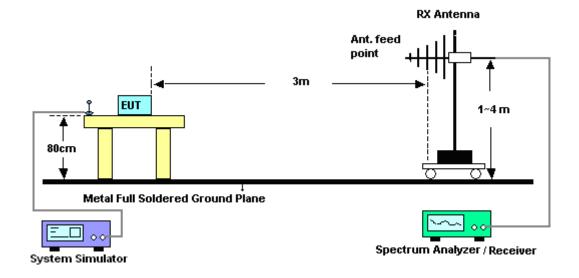



For radiated test above 1GHz

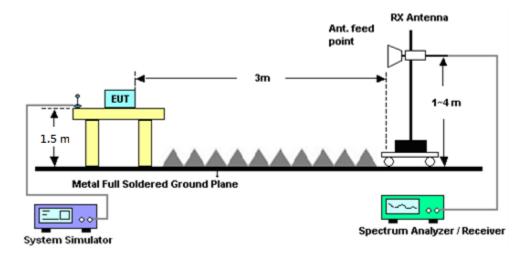

4.1.2 Test Result of Radiated Test

Please refer to Appendix B.

Note:

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

4.2 Radiated Spurious Emission Measurement

4.2.1 Description of Radiated Spurious Emission Measurement

The radiated spurious emission was measured by substitution method according to ANSI / TIA-603-E. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least 43 + 10 log (P) dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.2.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 7 and ANSI / TIA-603-E Section 2.2.12.

- 1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
- 2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
- 3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
- 4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
- 5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
- 6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
- 7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
- 8. Taking the record of output power at antenna port.
- 9. Repeat step 7 to step 8 for another polarization.
- 10. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from 43 + 10log(P)dB below the transmitter power P(Watts)

EIRP (dBm) = S.G. Power – Tx Cable Loss + Tx Antenna Gain

ERP (dBm) = EIRP - 2.15



List of Measuring Equipment 5

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Dec. 26, 2019	Jun. 16, 2020~ Jul. 07, 2020	Dec. 25, 2020	Radiation (03CH12-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01N -06	37059 & 01	30MHz~1GHz	Oct. 12, 2019	Jun. 16, 2020~ Jul. 07, 2020	Oct. 11, 2020	Radiation (03CH12-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-1328	1GHz~18GHz	Nov. 14, 2019	Jun. 16, 2020~ Jul. 07, 2020	Nov. 13, 2020	Radiation (03CH12-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	BBHA917058 4	18GHz~40GHz	Dec. 10, 2019	Jun. 16, 2020~ Jul. 07, 2020	Dec. 09, 2020	Radiation (03CH12-HY)
Preamplifier	COM-POWER	PA-103	161075	10MHz~1GHz	Mar. 25, 2020	Jun. 16, 2020~ Jul. 07, 2020	Mar. 24, 2021	Radiation (03CH12-HY)
Preamplifier	Keysight	83017A	MY53270148	1GHz~26.5GHz	Dec. 20, 2019	Jun. 16, 2020~ Jul. 07, 2020	Dec. 19, 2020	Radiation (03CH12-HY)
Preamplifier	Agilent	8449B	3008A02375	1GHz~26.5GHz	Mar. 26, 2020	Jun. 16, 2020~ Jul. 07, 2020	Mar. 25, 2021	Radiation (03CH12-HY)
Preamplifier	Jet-Power	JPA0118-55-3 03K	1710001800 054002	1GHz~18GHz	Aug. 06, 2019	Jun. 16, 2020~ Jul. 07, 2020	Aug. 05, 2020	Radiation (03CH12-HY)
Preamplifier	EMEC	EM18G40G	060715	18GHz~40GHz	Dec. 13, 2019	Jun. 16, 2020~ Jul. 07, 2020	Dec. 12, 2020	Radiation (03CH12-HY)
Spectrum Analyzer	Agilent	N9010A	MY53470118	10Hz~44GHz	Mar. 12, 2020	Jun. 16, 2020~ Jul. 07, 2020	Mar. 11, 2021	Radiation (03CH12-HY)
Base Station	Anritsu	MT8821C	6201107507	FDD/TDD/NB-lo T/Cat-M1/SEQ	Jun. 27, 2019	Jun. 16, 2020~ Jun. 19, 2020	Jun. 26, 2020	Radiation (03CH12-HY)
Base Station	Anritsu	MT8821C	6201107507	FDD/TDD/NB-lo T/Cat-M1/SEQ	Jun. 27, 2020	Jul. 06, 2020~ Jul. 07, 2020	Jun. 26, 2021	Radiation (03CH12-HY)
Signal Generator	Rohde & Schwarz	SMB100A	101107	100kHz~40GHz	Aug. 27, 2019	Jun. 16, 2020~ Jul. 07, 2020	Aug. 26, 2020	Radiation (03CH12-HY)
Filter	Wainwright	WLKS1200-12 SS	SN2	1.2GHz Low Pass Filter	Mar. 21, 2020	Jun. 16, 2020~ Jul. 07, 2020	Mar. 20, 2021	Radiation (03CH12-HY)
Filter	Wainwright	WHKX12-1080 -1200-15000-6 0SS	SN1	1.2GHz High Pass Filter	Mar. 18, 2020	Jun. 16, 2020~ Jul. 07, 2020	Mar. 17, 2021	Radiation (03CH12-HY)
Filter	Wainwright	WHKX12-2700 -3000-18000-6 0ST	SN2	3GHz High Pass Filter	Jul. 15, 2019	Jun. 16, 2020~ Jul. 07, 2020	Jul. 14, 2020	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 126E	0058/126E	30MHz~18GHz	Dec. 12, 2019	Jun. 16, 2020~ Jul. 07, 2020	Dec. 11, 2020	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	505134/2	30MHz~40GHz	Feb. 25, 2020	Jun. 16, 2020~ Jul. 07, 2020	Feb. 24, 2021	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	800740/2	30MHz~40GHz	Feb. 25, 2020	Jun. 16, 2020~ Jul. 07, 2020	Feb. 24, 2021	Radiation (03CH12-HY)
Hygrometer	TECPEL	DTM-303B	TP140349	N/A	Oct. 25, 2019	Jun. 16, 2020~ Jul. 07, 2020	Oct. 24, 2020	Radiation (03CH12-HY)
Controller	EMEC	EM1000	N/A	Control Turn table & Ant Mast	N/A	Jun. 16, 2020~ Jul. 07, 2020	N/A	Radiation (03CH12-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1m~4m	N/A	Jun. 16, 2020~ Jul. 07, 2020	N/A	Radiation (03CH12-HY)
Turn Table	EMEC	TT2000	N/A	0~360 Degree	N/A	Jun. 16, 2020~ Jul. 07, 2020	N/A	Radiation (03CH12-HY)
Software	Audix	E3 6.2009-8-24	RK-000989	N/A	N/A	Jun. 16, 2020~ Jul. 07, 2020	N/A	Radiation (03CH12-HY)
Base Station	Anritsu	MT8821C	6201107507	FDD/TDD/NB-lo T/Cat-M1/SEQ	Jun. 27, 2020	Jul. 09, 2020~ Oct. 11, 2020	Jun. 26, 2021	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSV40	101908	10Hz~40GHz	May 13, 2020	Jul. 09, 2020~ Oct. 11, 2020	May 12, 2021	Conducted (TH05-HY)
Temperature Chamber	ESPEC	SH-641	92013720	-40° C ~90° ℃	Sep. 02, 2019	Jul. 09, 2020~ Jul. 11, 2020	Sep. 01, 2020	Conducted (TH05-HY)
Thermal Chamber	ESPEC	SU-241	92003713	-40°C ~90°C	May 15, 2020	Oct. 11, 2020	May 14, 2021	Conducted (TH05-HY)
Programmable Power Supply	GW Instek	PSS-2005	EL890094	1V~20V 0.5A~5A	Oct. 09, 2019	Jul. 09, 2020~ Jul. 11, 2020	Oct. 08, 2020	Conducted (TH05-HY)
Programmable Power Supply	GW Instek	PSS-2005	EL883644	1V~20V 0.5A~5A	Oct. 09, 2019	Oct. 11, 2020	Oct. 14, 2021	Conducted (TH05-HY)
Coupler	Warison	20dB 25W S MA Directional Coupler	#A	1-18GHz	Jan. 13, 2020	Jul. 09, 2020~ Oct. 11, 2020	Jan. 12, 2021	Conducted (TH05-HY)



6 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of	3.24
Confidence of 95% (U = 2Uc(y))	3.24

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Maccuring Uncortainty for a Loval of	
Measuring Uncertainty for a Level of	3.62
Confidence of 95% (U = 2Uc(y))	0.02

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of	4.06
Confidence of 95% (U = 2Uc(y))	4.00



Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power)

		Ľ	TE C	at. N	/1 B	and 4 Maxin	num Average Powe	er [dBm]	
BW [MHz]	RB Size	RB Offset		Index	۲	Mod	Lowest	Midalla	llighaat
DVV [IVITIZ]	RD SIZE	RB Unset	L	М	Н	wod	Lowest	Middle	Highest
20	1	0	0	8	15		23.53	23.48	23.30
20	1	5	0	8	15		23.52	23.47	23.31
20	3	0	0	8	15	QPSK	23.57	23.50	23.37
20	3	3	0	8	15		23.38	23.34	23.18
20	6	0	0	8	15		23.43	23.32	23.19
20	1	0	0	8	15		23.77	23.67	23.53
20	1	5	0	8	15		23.74	23.64	23.55
20	3	0	0	8	15	16-QAM	23.67	23.57	23.44
20	3	3	0	8	15		23.63	23.55	23.41
20	6	0	0	8	15		23.49	23.62	23.38
15	1	0	0	6	11		23.50	23.46	23.30
15	1	5	0	6	11		23.53	23.43	23.30
15	3	0	0	6	11	QPSK	23.56	23.51	23.37
15	3	3	0	6	11		23.40	23.29	23.19
15	6	0	0	6	11		23.38	23.36	23.16
15	1	0	0	6	11		23.74	23.66	23.50
15	1	5	0	6	11		23.71	23.64	23.48
15	3	0	0	6	11	16-QAM	23.64	23.60	23.39
15	3	3	0	6	11		23.61	23.55	23.38
15	6	0	0	6	11		23.73	23.50	23.56
10	1	0	0	4	7		23.55	23.48	23.38
10	1	5	0	4	7		23.52	23.46	23.34
10	3	0	0	4	7	QPSK	23.58	23.49	23.41
10	3	3	0	4	7		23.40	23.34	23.21
10	6	0	0	4	7		22.39	22.30	22.21
10	1	0	0	4	7		23.78	23.75	23.54
10	1	5	0	4	7		23.74	23.65	23.54
10	3	0	0	4	7	16-QAM	23.67	23.58	23.45
10	3	3	0	4	7		23.65	23.56	23.40
10	6	0	0	4	7		21.51	21.64	21.47
5	1	0	0	2	3		23.45	23.48	23.35
5	1	5	0	2	3		23.53	23.47	23.31
5	3	0	0	2	3	QPSK	22.58	22.52	22.33
5	3	3	0	2	3		22.36	22.30	22.17
5	6	0	0	2	3		22.43	22.35	22.24
5	1	0	0	2	3		23.77	23.73	23.66
5	1	5	0	2	3		23.76	23.64	23.57
5	3	0	0	2	3	16-QAM	22.69	22.59	22.48
5	3	3	0	2	3		22.67	22.60	22.49
5	6	0	0	2	3		21.49	21.66	21.31



Report No. : FG010618-04A

		Ľ	TE C	at. N	/1 B	and 4 Maxin	num Average Powe	er [dBm]		
BW [MHz]	RB Size	RB Offset	Index			Mod	Lowest	Middle	Highest	
	IND 5126	IND ONSET	L	Μ	Н	Mod	Lowest	middle	riigilest	
3	1	0	0	0	1		23.40	23.49	23.27	
3	1	5	0	0	1		23.51	23.47	23.29	
3	3	0	0	0	1	QPSK	22.58	22.54	22.40	
3	3	3	0	0	1		22.40	22.35	22.17	
3	6	0	0	0	1		21.48	21.42	21.27	
3	1	0	0	0	1		22.46	22.44	22.25	
3	1	5	0	0	1		22.41	22.36	22.21	
3	3	0	0	0	1	16-QAM	21.72	21.66	21.49	
3	3	3	0	0	1		21.68	21.62	21.44	
3	6	0	0	0	1		21.71	21.65	21.49	
1.4	1	0	0	0	0		23.68	23.50	23.47	
1.4	1	5	0	0	0		23.62	23.58	23.44	
1.4	3	0	0	0	0	QPSK	22.61	22.53	22.41	
1.4	3	3	0	0	0		22.39	22.36	22.19	
1.4	6	0	0	0	0		21.56	21.52	21.34	
1.4	1	0	0	0	0		22.66	22.60	22.46	
1.4	1	5	0	0	0		22.61	22.57	22.42	
1.4	3	0	0	0	0	16-QAM	21.79	21.70	21.56	
1.4	3	3	0	0	0		21.81	21.75	21.62	
1.4	6	0	0	0	0		21.67	21.56	21.46	



Report No. : FG010618-04A

LTE Cat. M1 Band 26 Maximum Average Power [dBm]												
BW [MHz]	RB Size	RB Offset		Index	1	Mod	Lowest	Middle	Highest			
45		0	L	M	H		00.40	00.50	00.05			
15	1	0	0	6	11		23.43	23.52	23.35			
15	1	5	0	6	11	0001	23.41	23.48	23.34			
15	3	0	0	6	11	QPSK	23.60	23.54	23.60			
15	3	3	0	6	11		23.30	23.33	23.24			
15	6	0	0	6	11		23.41	23.43	23.35			
15	1	0	0	6	11		23.68	23.75	23.61			
15	1	5	0	6	11		23.59	23.73	23.53			
15	3	0	0	6	11	16-QAM	23.73	23.73	23.72			
15	3	3	0	6	11		23.66	23.67	23.66			
15	6	0	0	6	11		23.57	23.49	23.54			
10	1	0	0	4	7		23.48	23.42	23.41			
10	1	5	0	4	7		23.47	23.39	23.36			
10	3	0	0	4	7	QPSK	23.62	23.52	23.47			
10	3	3	0	4	7		23.42	23.31	23.33			
10	6	0	0	4	7		22.42	22.34	22.30			
10	1	0	0	4	7		23.75	23.71	23.74			
10	1	5	0	4	7		23.70	23.61	23.61			
10	3	0	0	4	7	16-QAM	23.75	23.68	23.63			
10	3	3	0	4	7		23.71	23.65	23.59			
10	6	0	0	4	7		21.64	21.55	21.45			
5	1	0	0	2	3		23.42	23.40	23.43			
5	1	5	0	2	3		23.45	23.38	23.36			
5	3	0	0	2	3	QPSK	22.60	22.53	22.50			
5	3	3	0	2	3		22.38	22.30	22.30			
5	6	0	0	2	3		22.37	22.33	22.37			
5	1	0	0	2	3		23.77	23.63	23.76			
5	1	5	0	2	3		23.65	23.56	23.58			
5	3	0	0	2	3	16-QAM	22.69	22.61	22.61			
5	3	3	0	2	3		22.67	22.62	22.60			
5	6	0	0	2	3		21.73	21.66	21.65			
3	1	0	0	0	1		23.38	23.37	23.35			
3	1	5	0	0	. 1		23.42	23.35	23.29			
3	3	0	0	0	1	QPSK	23.52	23.46	23.45			
3	3	3	0	0	1		23.35	23.23	23.26			
3	6	0	0	0	1		22.33	22.27	22.26			
3	1	0	0	0	1		23.75	23.68	23.70			
3	1	5	0	0	1		23.66	23.58	23.59			
3	3	0	0	0	1	16-QAM	23.00	23.66	23.59			
3	3	3	0	0	1	10-GPAIN			23.54			
3	6	0	-	0	1		23.69 21.60	23.65 21.54	23.53			
3 1.4	6 1	0	0	0	-		21.60	21.54	23.34			
		-	0	-	0							
1.4	1	5	0	0	0	ODEK	23.39	23.32	23.31			
1.4	3	0	0	0	0	QPSK	23.55	23.50	23.39			
1.4	3	3	0	0	0		23.34	23.27	23.30			
1.4	6	0	0	0	0		22.42	22.33	22.23			
1.4	1	0	0	0	0		23.71	23.71	23.64			
1.4	1	5	0	0	0		23.66	23.54	23.55			
1.4	3	0	0	0	0	16-QAM	23.75	23.67	23.58			
1.4	3	3	0	0	0		23.69	23.59	23.54			
1.4	6	0	0	0	0		21.64	21.48	21.37			




LTE Band 4


Peak-to-Average Ratio

Mode		LTE Band 4 / 20MHz									
Mod.	QP	SK	160	Limit: 13dB							
RB Size	1RB	Full RB	1RB	Full RB	Result						
Lowest CH	7.83	5.80	8.43	6.67							
Middle CH	5.65	5.74	7.25	8.49	PASS						
Highest CH	5.19	5.59	6.64	7.74							



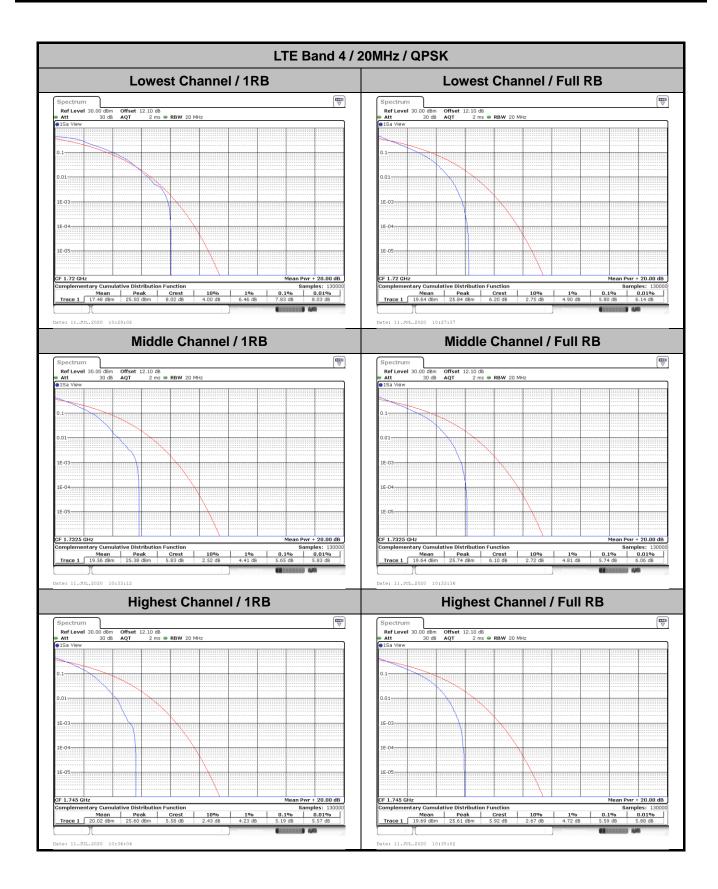



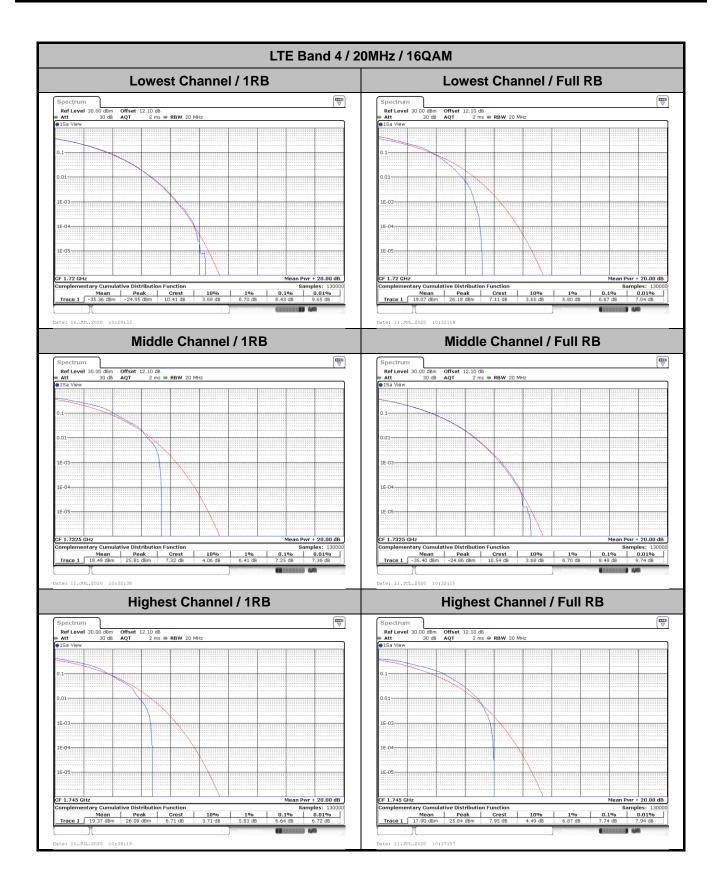





26dB Bandwidth

Mode		LTE Band 4 : 26dB BW(MHz)													
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz				
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM			
Lowest CH	1.29	1.31	1.28	1.36	1.28	1.33	1.32	1.32	1.32	1.32	1.36	1.32			
Middle CH	1.27	1.31	1.31	1.32	1.32	1.33	1.30	1.24	1.32	1.35	1.32	1.32			
Highest CH	1.26	1.28	1.26	1.29	1.24	1.32	1.32	1.32	1.29	1.35	1.32	1.32			




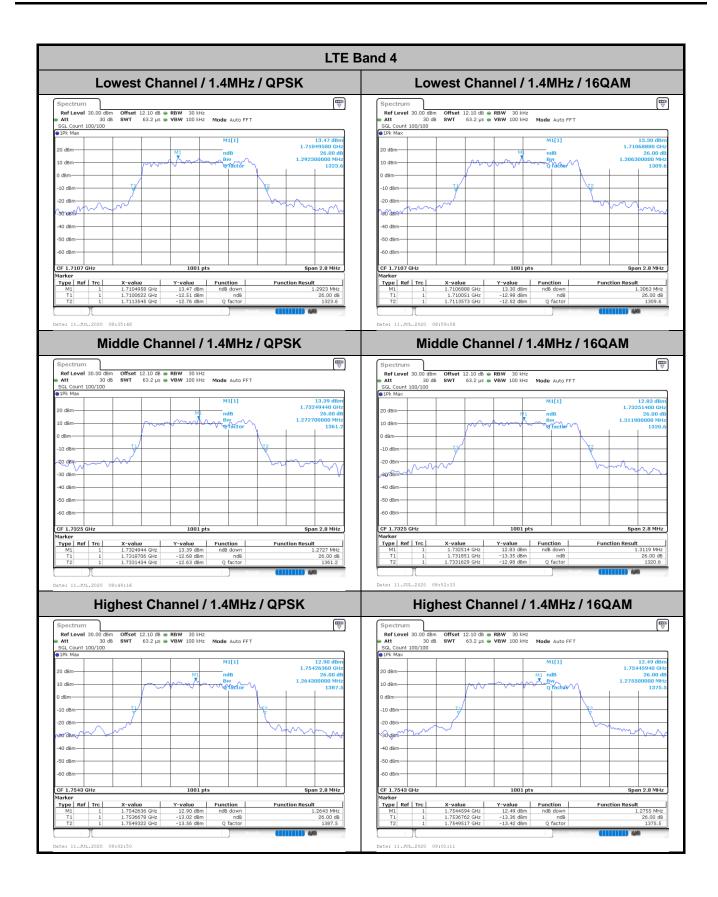




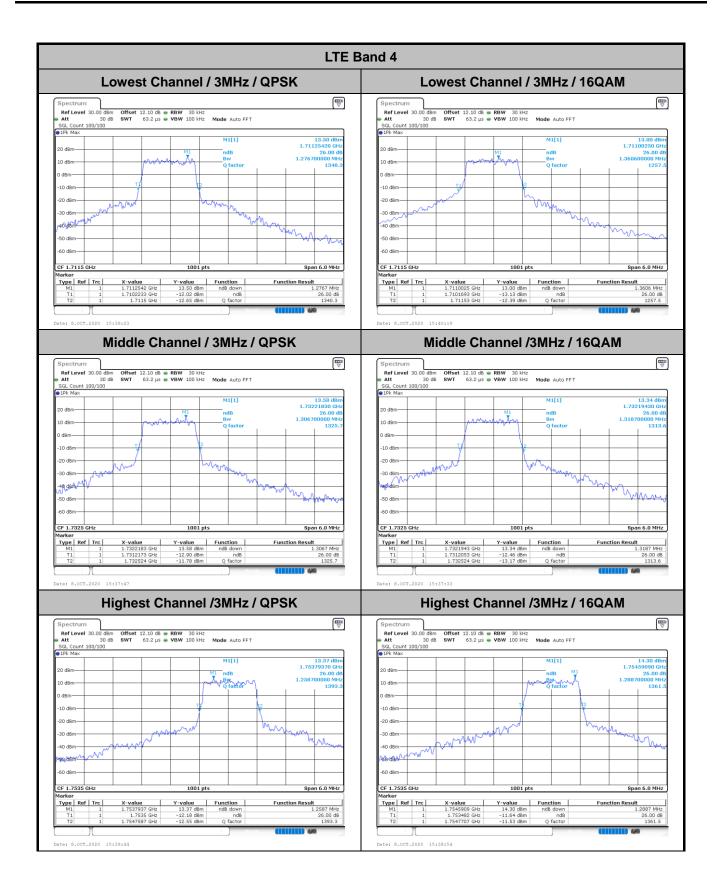




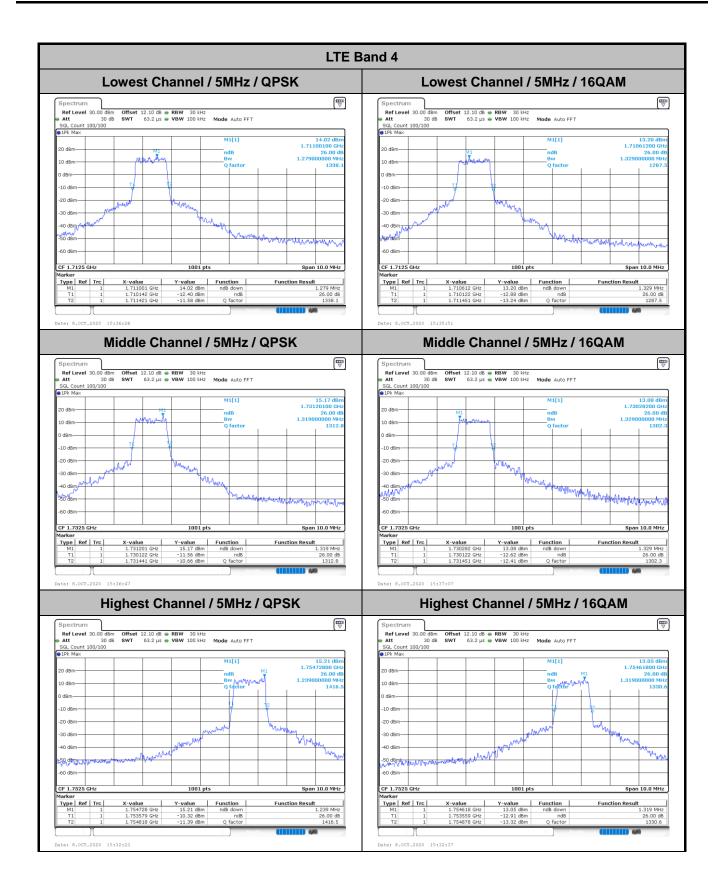




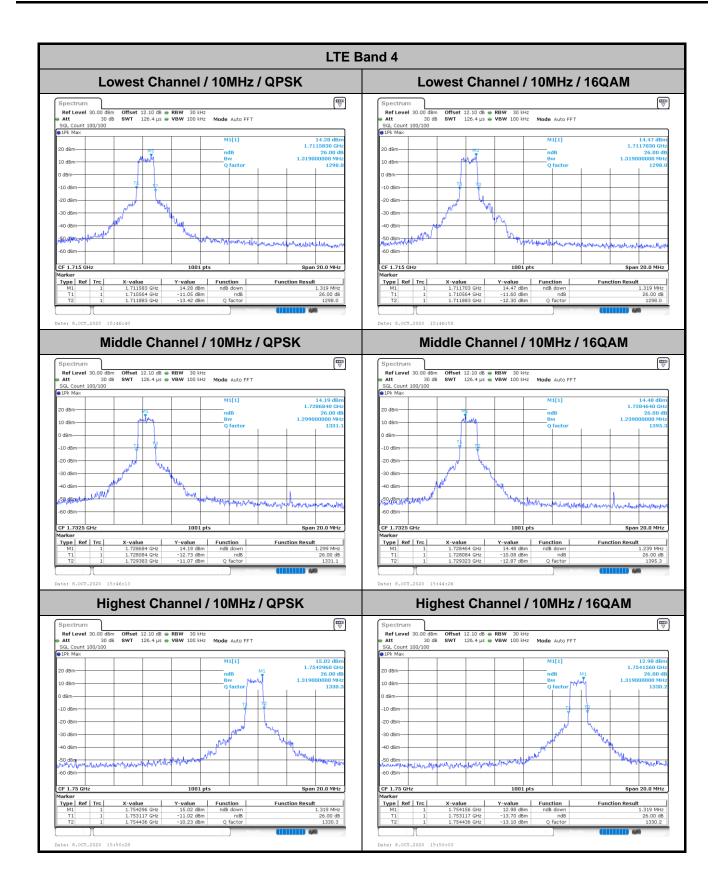



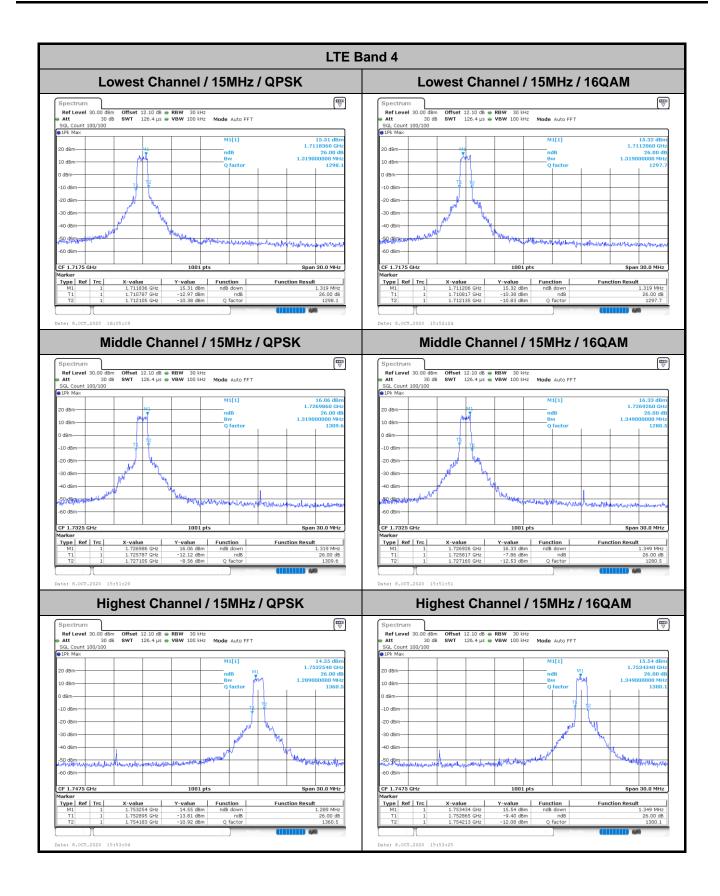



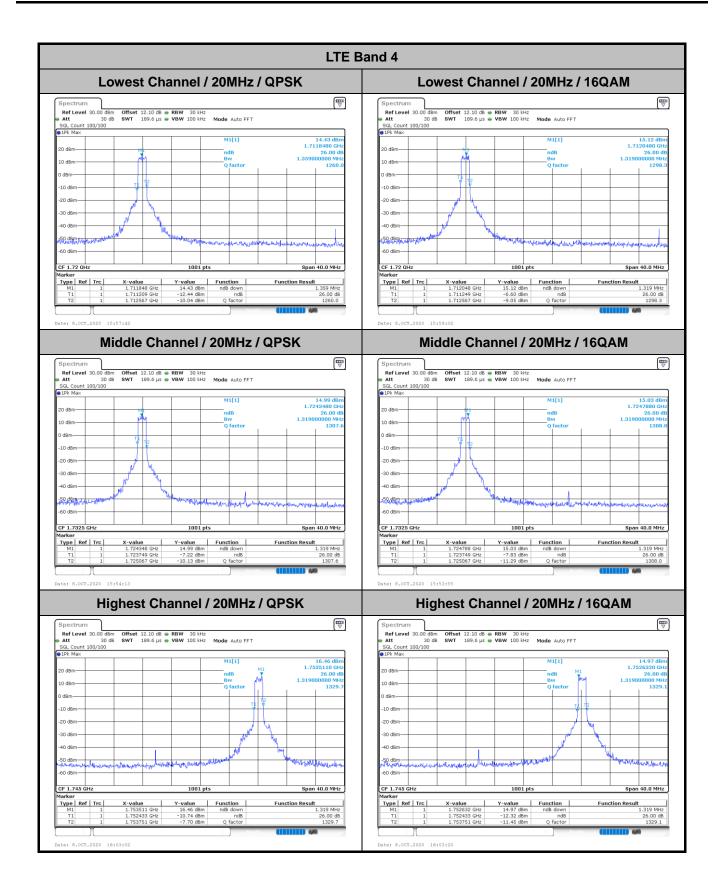





Occupied Bandwidth

Mode	LTE Band 4 : 99%OBW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	1.09	1.09	1.11	1.10	1.11	1.10	1.10	1.12	1.11	1.14	1.12	1.08
Middle CH	1.10	1.09	1.10	1.11	1.11	1.12	1.14	1.10	1.11	1.14	1.12	1.12
Highest CH	1.09	1.09	1.10	1.08	1.10	1.10	1.14	1.12	1.11	1.11	1.12	1.12




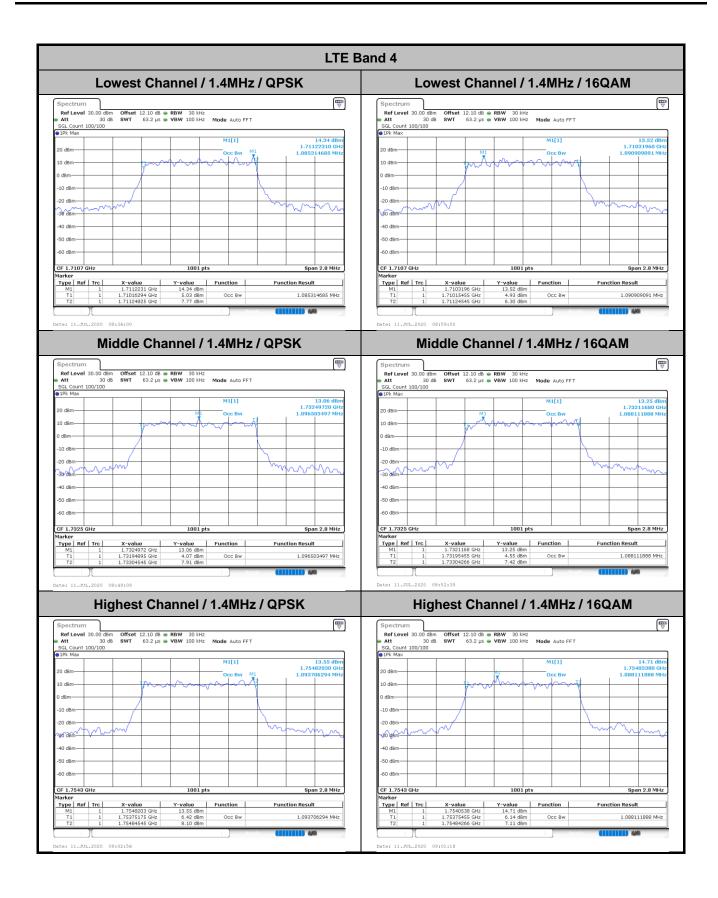




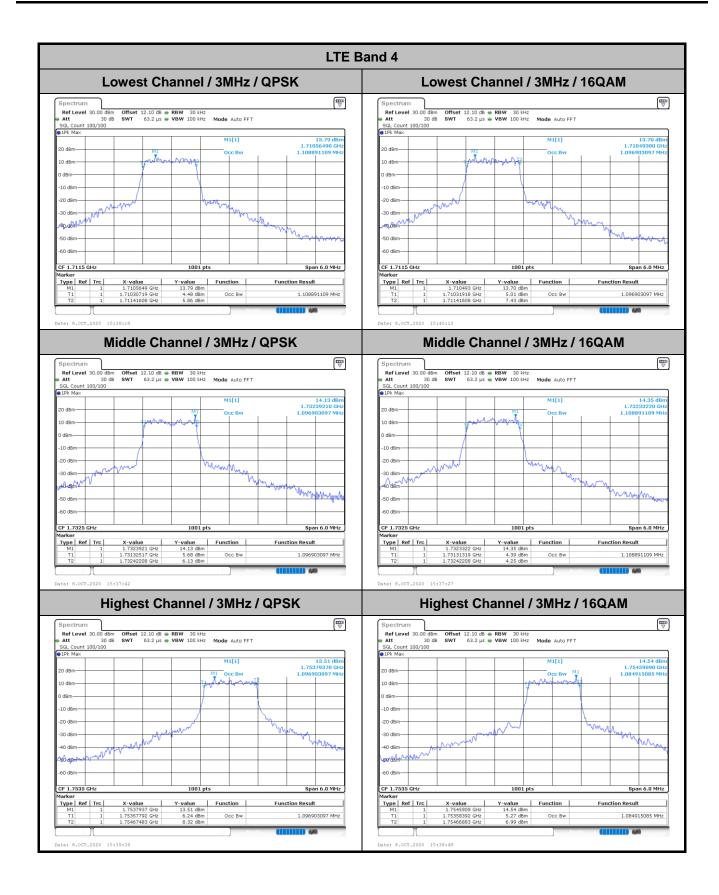




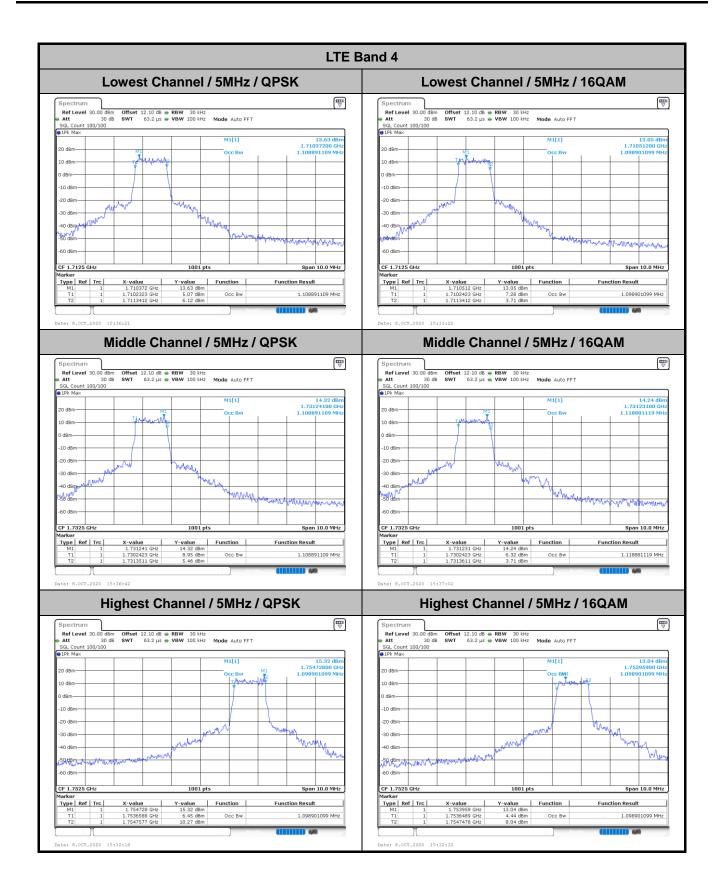




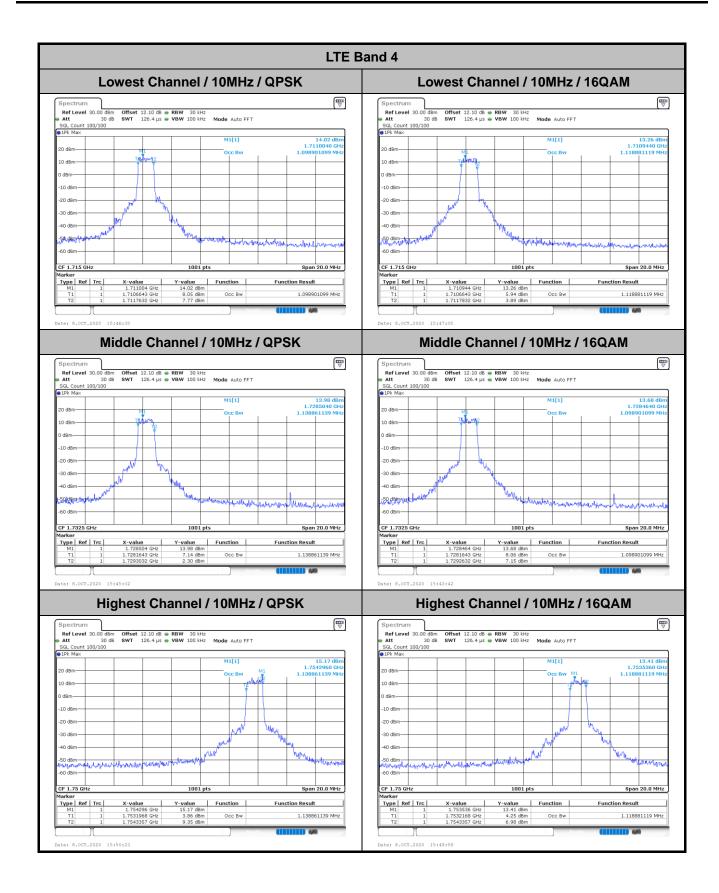



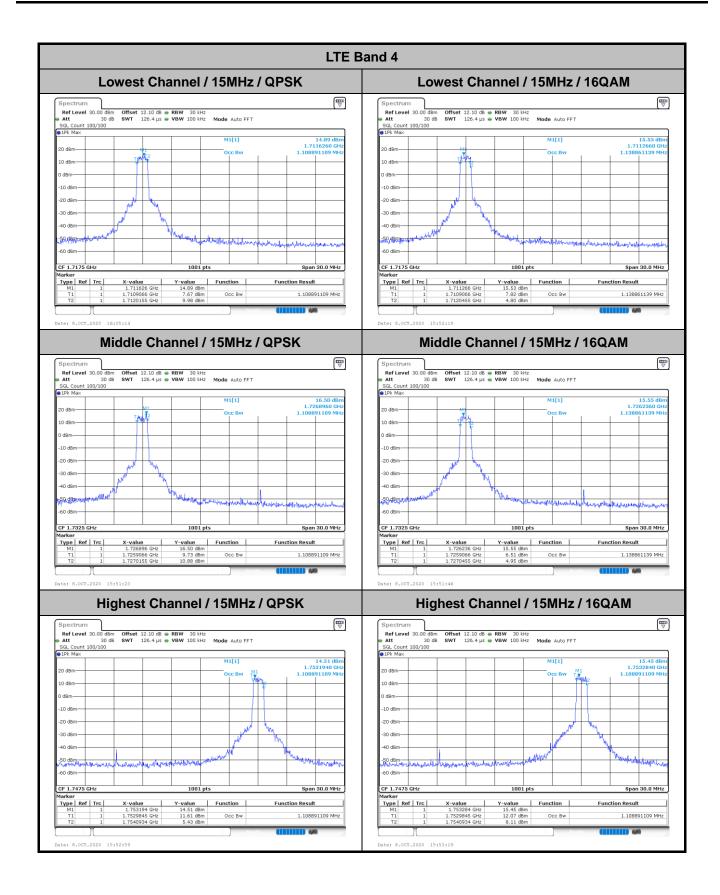



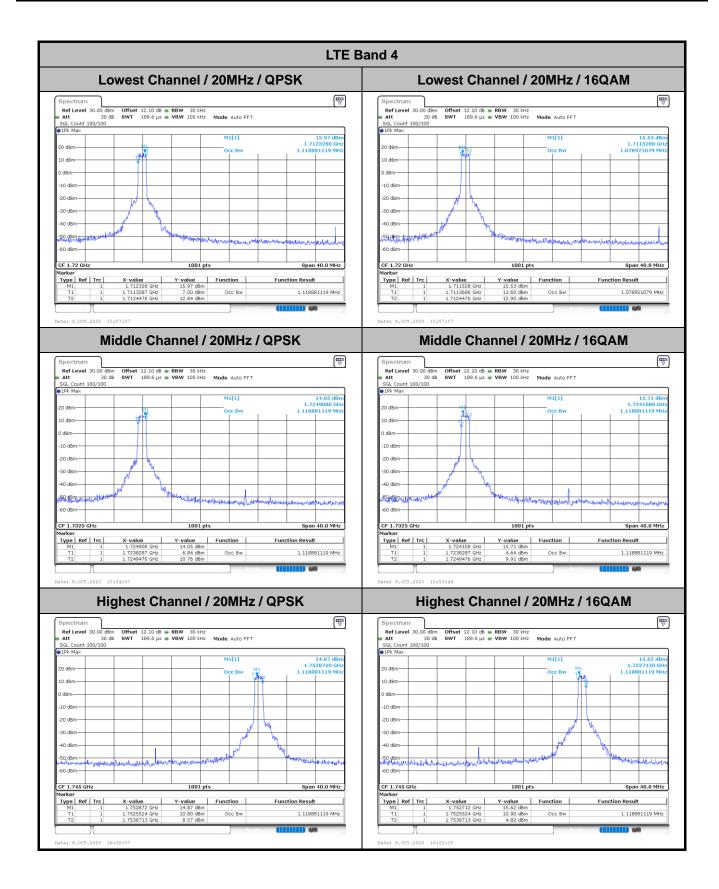



Conducted Band Edge

