

01_WLAN2.4GHz_802.11b 1Mbps_Front_0mm_Ch11; Chain 0

Communication System: WiFi; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: HSL2450_220919 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.843$ S/m; $\epsilon_r = 40.733$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.5°C

DASY Configuration:

- Electronics: DAE4 Sn855; Calibrated: 2022/4/21
- Probe: EX3DV4 - SN7400; ConvF(7.63, 7.63, 7.63) @ 2462 MHz; Calibrated: 2022/4/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -24.0, 31.0$
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1153
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (111x81x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 1.56 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 22.33 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.65 W/kg

SAR(1 g) = 0.777 W/kg; SAR(10 g) = 0.319 W/kg

Maximum value of SAR (measured) = 1.34 W/kg

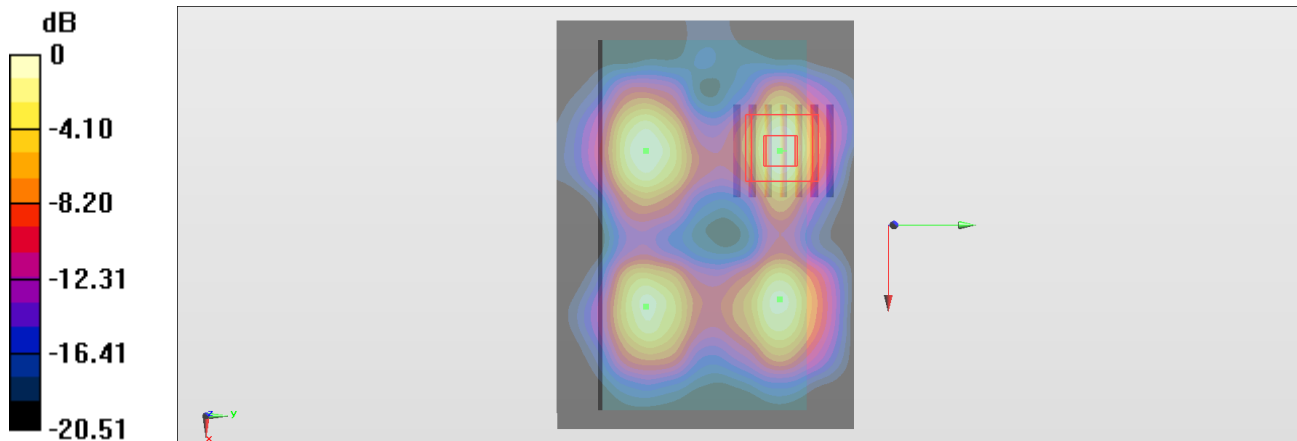

0 dB = 1.34 W/kg = 1.27 dBW/kg

02_WLAN2.4GHz_802.11b 1Mbps_Front_0mm_Ch6; Chain 1

Communication System: WiFi; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: HSL2450_220919 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.823$ S/m; $\epsilon_r = 40.874$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.5°C

DASY Configuration:

- Electronics: DAE4 Sn855; Calibrated: 2022/4/21
- Probe: EX3DV4 - SN7400; ConvF(7.63, 7.63, 7.63) @ 2437 MHz; Calibrated: 2022/4/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -24.0, 31.0$
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1153
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (111x81x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 3.68 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 32.49 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 3.56 W/kg

SAR(1 g) = 1.6 W/kg; SAR(10 g) = 0.637 W/kg

Maximum value of SAR (measured) = 2.83 W/kg

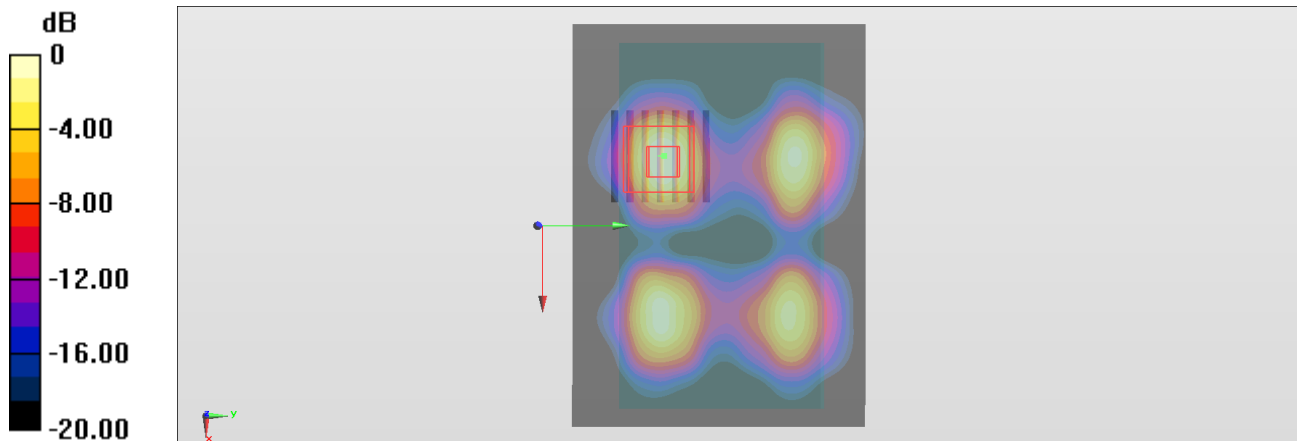

0 dB = 2.83 W/kg = 4.52 dBW/kg

03_WLAN2.4GHz_802.11b 1Mbps_Front_10mm_Ch11; Chain 0

Communication System: WiFi; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: HSL2450_220919 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.843$ S/m; $\epsilon_r = 40.733$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.5°C

DASY Configuration:

- Electronics: DAE4 Sn855; Calibrated: 2022/4/21
- Probe: EX3DV4 - SN7400; ConvF(7.63, 7.63, 7.63) @ 2462 MHz; Calibrated: 2022/4/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -24.0, 31.0$
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1153
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (111x81x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.356 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 12.43 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.409 W/kg

SAR(1 g) = 0.221 W/kg; SAR(10 g) = 0.116 W/kg

Maximum value of SAR (measured) = 0.332 W/kg

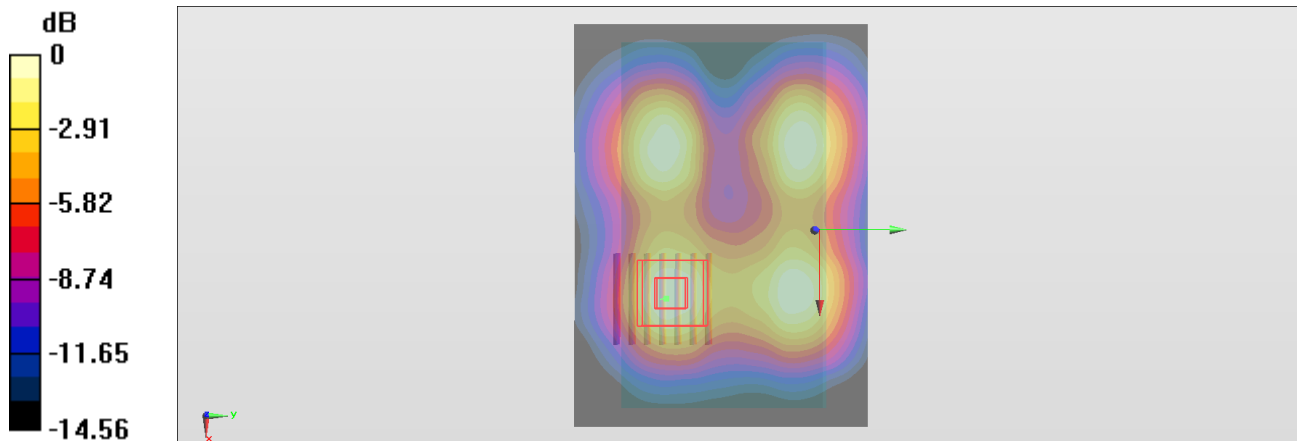

0 dB = 0.332 W/kg = -4.79 dBW/kg

05_WLAN2.4GHz_802.11b 1Mbps_Back_0mm_Ch11; Chain 0

Communication System: WiFi; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: HSL2450_220919 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.843$ S/m; $\epsilon_r = 40.733$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.5°C

DASY Configuration:

- Electronics: DAE4 Sn855; Calibrated: 2022/4/21
- Probe: EX3DV4 - SN7400; ConvF(7.63, 7.63, 7.63) @ 2462 MHz; Calibrated: 2022/4/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -24.0, 31.0$
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1153
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (111x81x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.0709 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.797 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.108 W/kg

SAR(1 g) = 0.044 W/kg; SAR(10 g) = 0.023 W/kg

Maximum value of SAR (measured) = 0.0678 W/kg

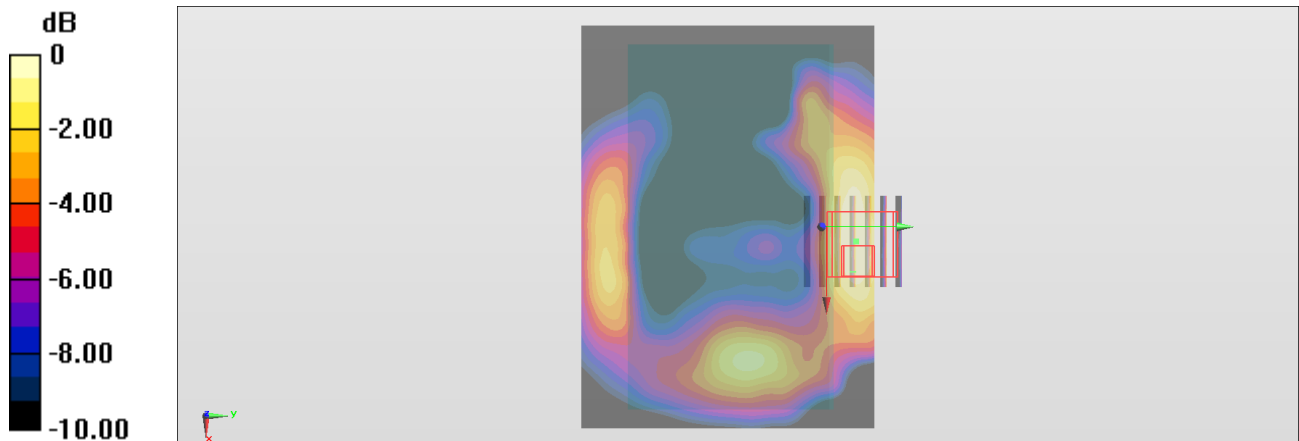

0 dB = 0.0678 W/kg = -11.69 dBW/kg

06_WLAN2.4GHz_802.11b 1Mbps_Back_0mm_Ch6; Chain 1

Communication System: WiFi; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: HSL2450_220919 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.823$ S/m; $\epsilon_r = 40.874$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.5°C

DASY Configuration:

- Electronics: DAE4 Sn855; Calibrated: 2022/4/21
- Probe: EX3DV4 - SN7400; ConvF(7.63, 7.63, 7.63) @ 2437 MHz; Calibrated: 2022/4/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -24.0, 31.0$
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1153
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (111x81x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.0910 W/kg



Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 6.043 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.106 W/kg

SAR(1 g) = 0.049 W/kg; SAR(10 g) = 0.024 W/kg

Maximum value of SAR (measured) = 0.0804 W/kg

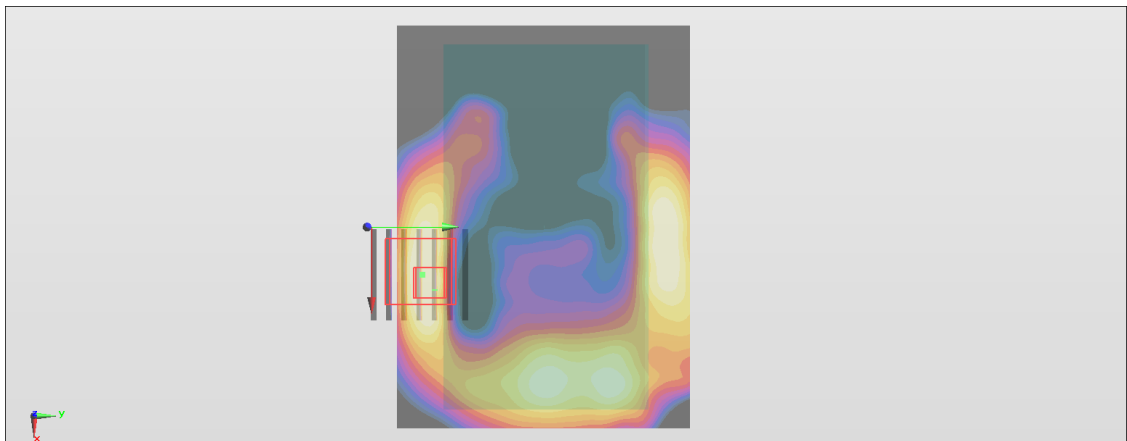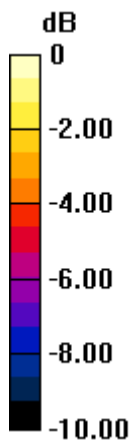

0 dB = 0.0804 W/kg = -10.95 dBW/kg

07_WLAN2.4GHz_802.11b 1Mbps_Back_10mm_Ch11; Chain 0

Communication System: WiFi; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: HSL2450_220919 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.843$ S/m; $\epsilon_r = 40.733$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.5°C

DASY Configuration:

- Electronics: DAE4 Sn855; Calibrated: 2022/4/21
- Probe: EX3DV4 - SN7400; ConvF(7.63, 7.63, 7.63) @ 2462 MHz; Calibrated: 2022/4/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -24.0, 31.0$
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1153
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (111x81x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.0238 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 2.938 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.0260 W/kg

SAR(1 g) = 0.012 W/kg; SAR(10 g) = 0.00671 W/kg

Maximum value of SAR (measured) = 0.0195 W/kg

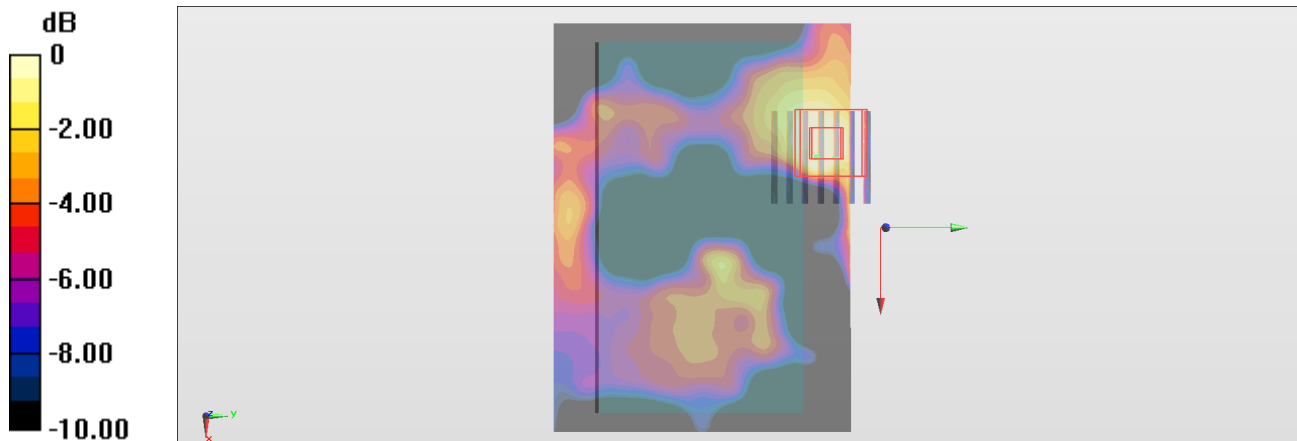

0 dB = 0.0195 W/kg = -17.10 dBW/kg

08_WLAN2.4GHz_802.11b 1Mbps_Back_10mm_Ch6; Chain 1

Communication System: WiFi; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: HSL2450_220919 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.823$ S/m; $\epsilon_r = 40.874$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.5°C

DASY Configuration:

- Electronics: DAE4 Sn855; Calibrated: 2022/4/21
- Probe: EX3DV4 - SN7400; ConvF(7.63, 7.63, 7.63) @ 2437 MHz; Calibrated: 2022/4/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -24.0, 31.0$
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1153
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (111x81x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.0337 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 2.979 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.0360 W/kg

SAR(1 g) = 0.016 W/kg; SAR(10 g) = 0.00807 W/kg

Maximum value of SAR (measured) = 0.0255 W/kg

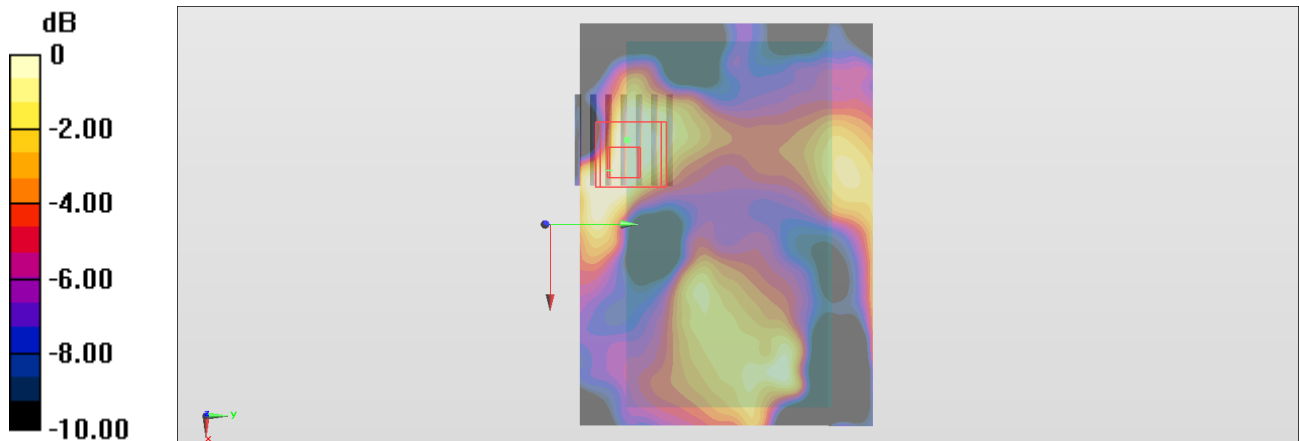

0 dB = 0.0255 W/kg = -15.93 dBW/kg

09_WLAN2.4GHz_802.11b 1Mbps_Left_0mm_Ch11; Chain 0

Communication System: WiFi; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: HSL2450_220919 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.843$ S/m; $\epsilon_r = 40.733$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.5°C

DASY Configuration:

- Electronics: DAE4 Sn855; Calibrated: 2022/4/21
- Probe: EX3DV4 - SN7400; ConvF(7.63, 7.63, 7.63) @ 2462 MHz; Calibrated: 2022/4/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -24.0, 31.0$
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1153
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (111x81x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.312 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 9.921 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.379 W/kg

SAR(1 g) = 0.185 W/kg; SAR(10 g) = 0.083 W/kg

Maximum value of SAR (measured) = 0.306 W/kg

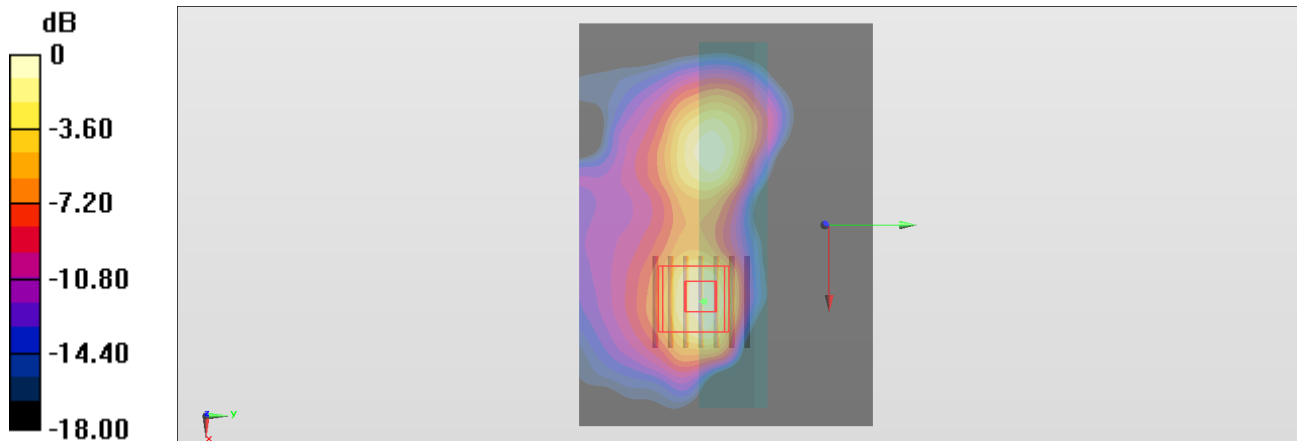

0 dB = 0.306 W/kg = -5.14 dBW/kg

10_WLAN2.4GHz_802.11b 1Mbps_Left_0mm_Ch6; Chain 1

Communication System: WiFi; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: HSL2450_220919 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.823$ S/m; $\epsilon_r = 40.874$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.5°C

DASY Configuration:

- Electronics: DAE4 Sn855; Calibrated: 2022/4/21
- Probe: EX3DV4 - SN7400; ConvF(7.63, 7.63, 7.63) @ 2437 MHz; Calibrated: 2022/4/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -24.0, 31.0$
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1153
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (111x81x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.507 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 11.42 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.600 W/kg

SAR(1 g) = 0.295 W/kg; SAR(10 g) = 0.138 W/kg

Maximum value of SAR (measured) = 0.487 W/kg

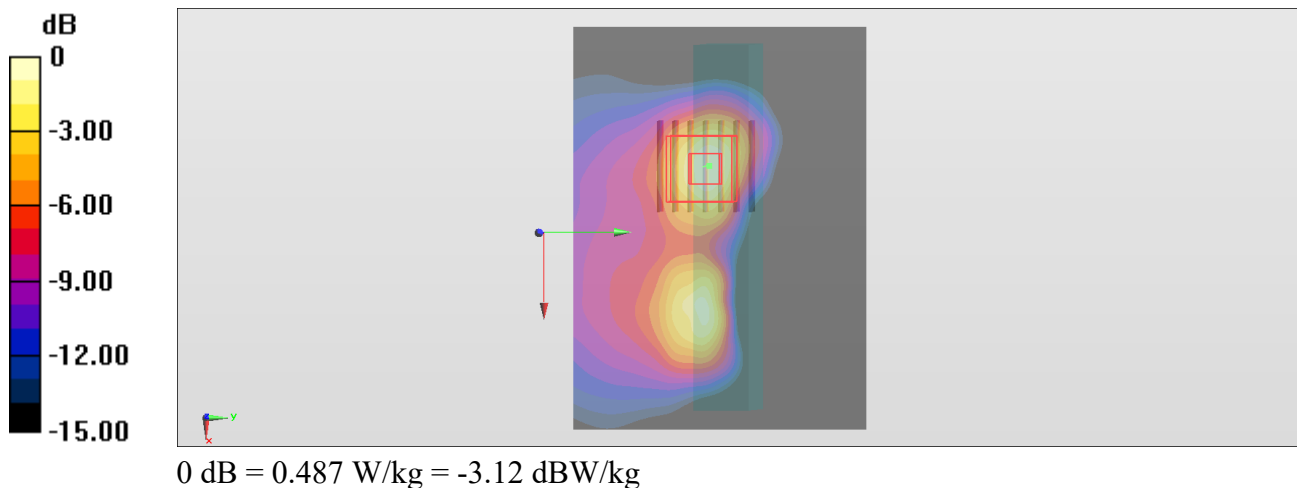

11_WLAN2.4GHz_802.11b 1Mbps_Left_10mm_Ch11; Chain 0

Communication System: WiFi; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: HSL2450_220919 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.843$ S/m; $\epsilon_r = 40.733$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.5°C

DASY Configuration:

- Electronics: DAE4 Sn855; Calibrated: 2022/4/21
- Probe: EX3DV4 - SN7400; ConvF(7.63, 7.63, 7.63) @ 2462 MHz; Calibrated: 2022/4/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -24.0, 31.0$
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1153
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (111x81x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.0888 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.665 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.0960 W/kg

SAR(1 g) = 0.053 W/kg; SAR(10 g) = 0.030 W/kg

Maximum value of SAR (measured) = 0.0782 W/kg

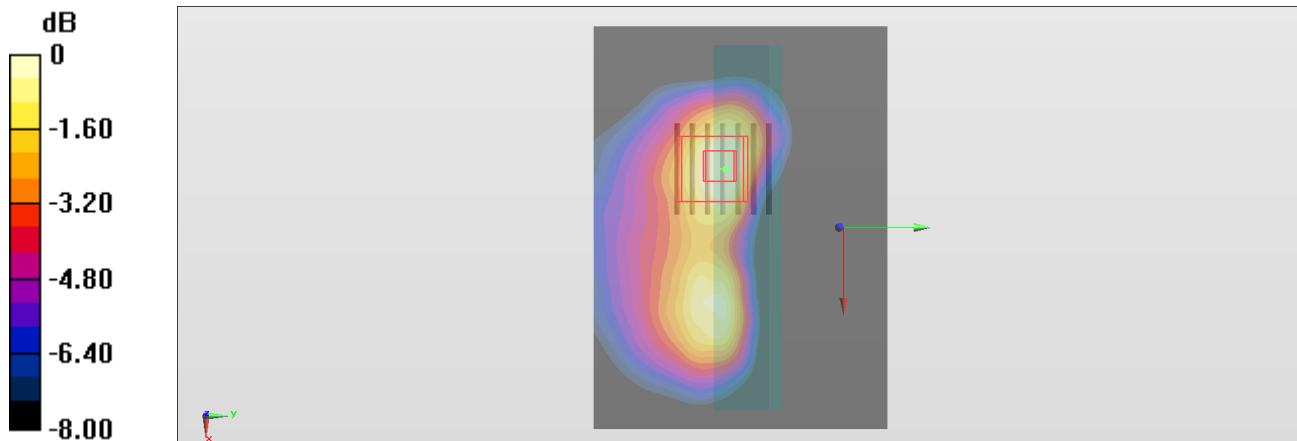

0 dB = 0.0782 W/kg = -11.07 dBW/kg

12_WLAN2.4GHz_802.11b 1Mbps_Left_10mm_Ch6; Chain 1

Communication System: WiFi; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: HSL2450_220919 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.823$ S/m; $\epsilon_r = 40.874$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.5°C

DASY Configuration:

- Electronics: DAE4 Sn855; Calibrated: 2022/4/21
- Probe: EX3DV4 - SN7400; ConvF(7.63, 7.63, 7.63) @ 2437 MHz; Calibrated: 2022/4/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -24.0, 31.0$
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1153
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (111x81x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.155 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 7.583 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.165 W/kg

SAR(1 g) = 0.093 W/kg; SAR(10 g) = 0.053 W/kg

Maximum value of SAR (measured) = 0.138 W/kg

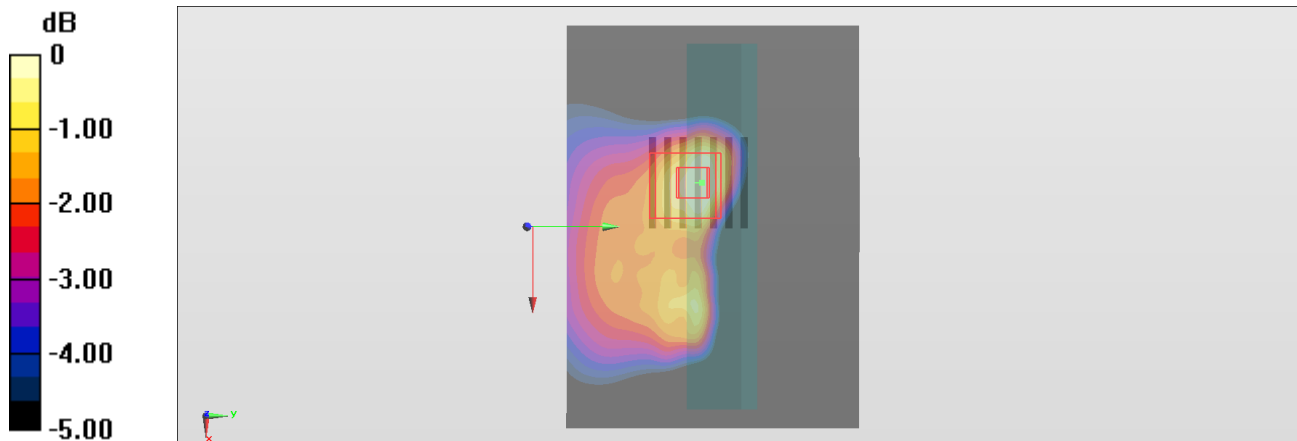

0 dB = 0.138 W/kg = -8.60 dBW/kg

13_WLAN2.4GHz_802.11b 1Mbps_Right_0mm_Ch11; Chain 0

Communication System: WiFi; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: HSL2450_220919 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.843$ S/m; $\epsilon_r = 40.733$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.5°C

DASY Configuration:

- Electronics: DAE4 Sn855; Calibrated: 2022/4/21
- Probe: EX3DV4 - SN7400; ConvF(7.63, 7.63, 7.63) @ 2462 MHz; Calibrated: 2022/4/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -24.0, 31.0$
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1153
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (111x81x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.436 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 12.76 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.428 W/kg

SAR(1 g) = 0.203 W/kg; SAR(10 g) = 0.095 W/kg

Maximum value of SAR (measured) = 0.319 W/kg

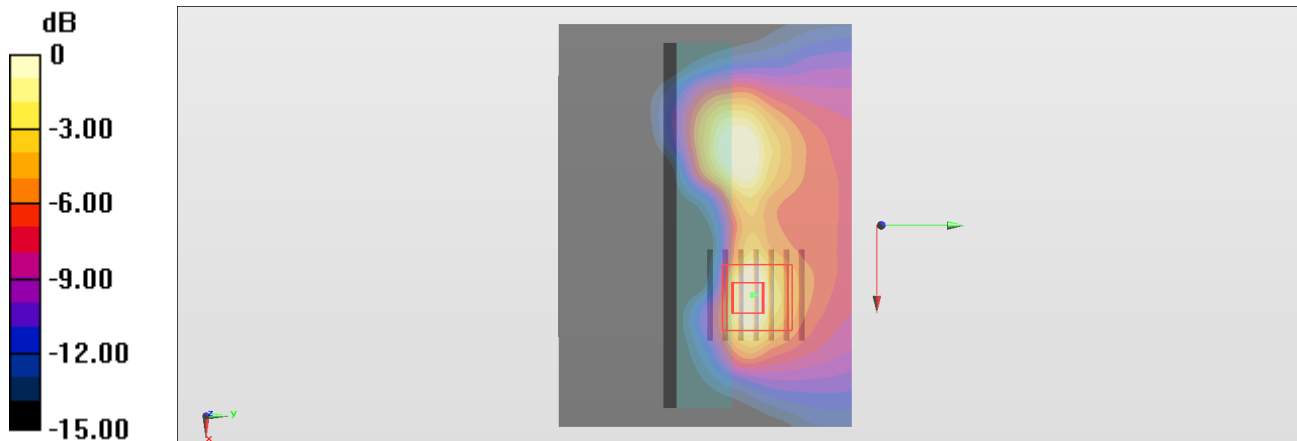

14_WLAN2.4GHz_802.11b 1Mbps_Right_0mm_Ch6; Chain 1

Communication System: WiFi; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: HSL2450_220919 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.823$ S/m; $\epsilon_r = 40.874$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.5°C

DASY Configuration:

- Electronics: DAE4 Sn855; Calibrated: 2022/4/21
- Probe: EX3DV4 - SN7400; ConvF(7.63, 7.63, 7.63) @ 2437 MHz; Calibrated: 2022/4/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -24.0, 31.0$
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1153
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (111x81x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.527 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 13.70 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.612 W/kg

SAR(1 g) = 0.305 W/kg; SAR(10 g) = 0.145 W/kg

Maximum value of SAR (measured) = 0.486 W/kg

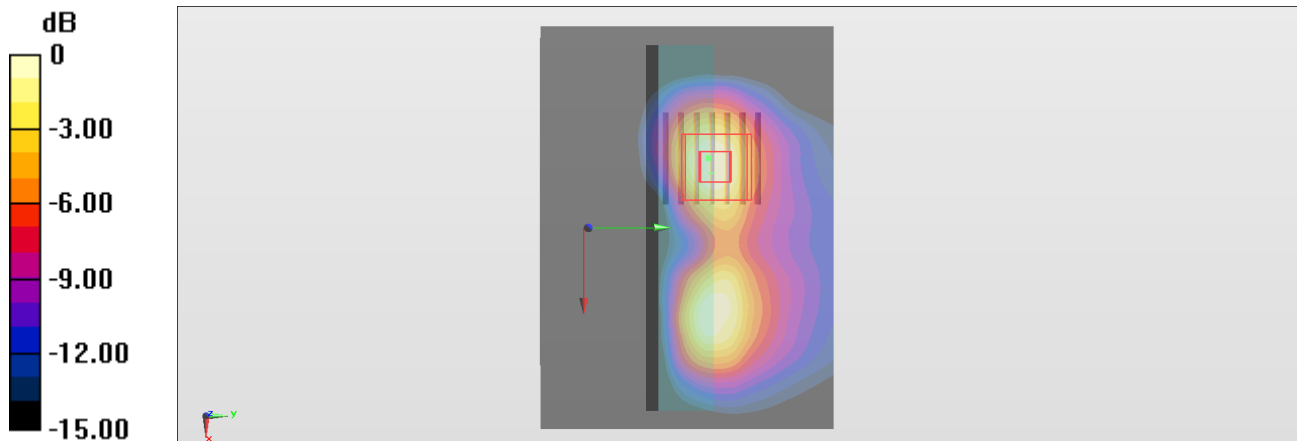

0 dB = 0.486 W/kg = -3.13 dBW/kg

15_WLAN2.4GHz_802.11b 1Mbps_Right_10mm_Ch11; Chain 0

Communication System: WiFi; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: HSL2450_220919 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.843$ S/m; $\epsilon_r = 40.733$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.5°C

DASY Configuration:

- Electronics: DAE4 Sn855; Calibrated: 2022/4/21
- Probe: EX3DV4 - SN7400; ConvF(7.63, 7.63, 7.63) @ 2462 MHz; Calibrated: 2022/4/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -24.0, 31.0$
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1153
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (111x81x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.110 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 6.821 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.104 W/kg

SAR(1 g) = 0.061 W/kg; SAR(10 g) = 0.037 W/kg

Maximum value of SAR (measured) = 0.0883 W/kg

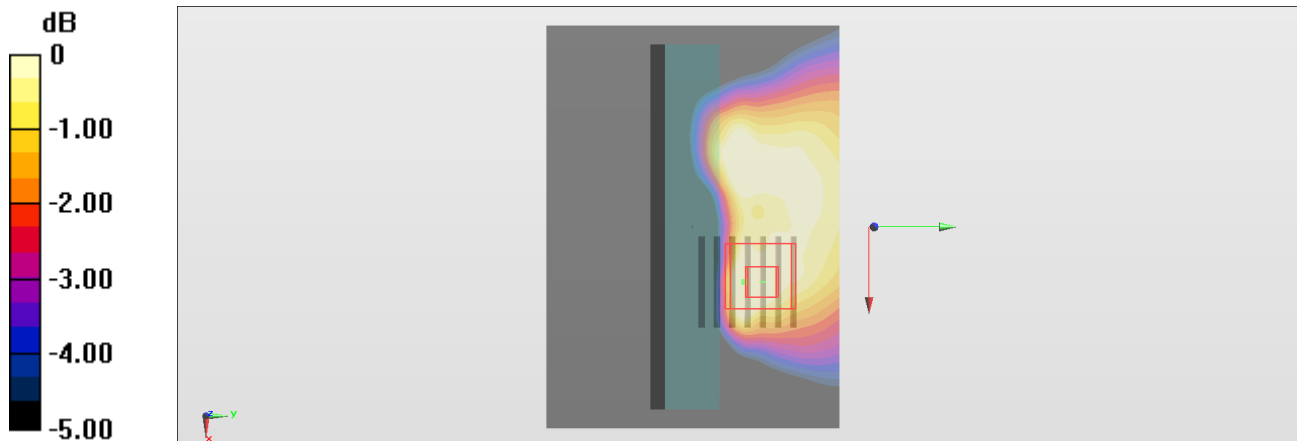

0 dB = 0.0883 W/kg = -10.54 dBW/kg

16_WLAN2.4GHz_802.11b 1Mbps_Right_10mm_Ch6; Chain 1

Communication System: WiFi; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: HSL2450_220919 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.823$ S/m; $\epsilon_r = 40.874$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.5°C

DASY Configuration:

- Electronics: DAE4 Sn855; Calibrated: 2022/4/21
- Probe: EX3DV4 - SN7400; ConvF(7.63, 7.63, 7.63) @ 2437 MHz; Calibrated: 2022/4/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -24.0, 31.0$
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1153
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (111x81x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.134 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 7.929 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.157 W/kg

SAR(1 g) = 0.087 W/kg; SAR(10 g) = 0.049 W/kg

Maximum value of SAR (measured) = 0.129 W/kg

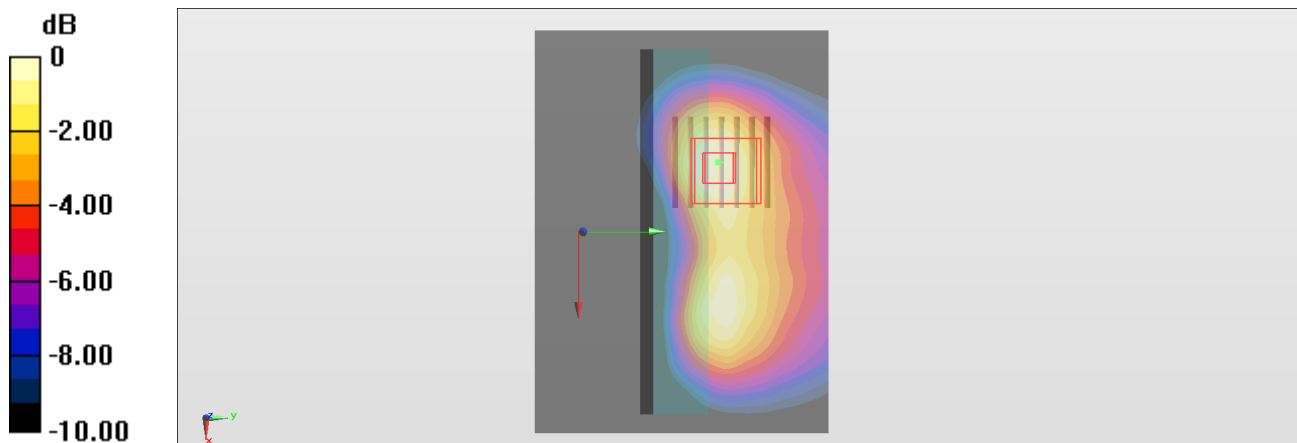

0 dB = 0.129 W/kg = -8.89 dBW/kg

17_WLAN2.4GHz_802.11b 1Mbps_Top_0mm_Ch11; Chain 0

Communication System: WiFi; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: HSL2450_220919 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.843$ S/m; $\epsilon_r = 40.733$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.5°C

DASY Configuration:

- Electronics: DAE4 Sn855; Calibrated: 2022/4/21
- Probe: EX3DV4 - SN7400; ConvF(7.63, 7.63, 7.63) @ 2462 MHz; Calibrated: 2022/4/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -24.0, 31.0$
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1153
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (81x91x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.0380 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 4.175 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.0550 W/kg

SAR(1 g) = 0.031 W/kg; SAR(10 g) = 0.020 W/kg

Maximum value of SAR (measured) = 0.0460 W/kg

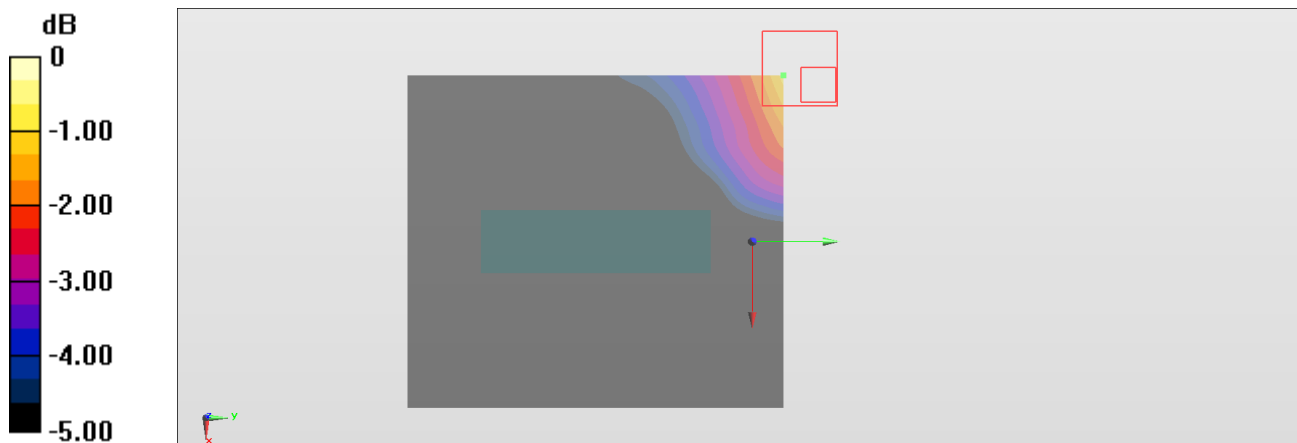

0 dB = 0.0460 W/kg = -13.37 dBW/kg

18_WLAN2.4GHz_802.11b 1Mbps_Top_0mm_Ch6; Chain 1

Communication System: WiFi; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: HSL2450_220919 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.823$ S/m; $\epsilon_r = 40.874$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.5°C

DASY Configuration:

- Electronics: DAE4 Sn855; Calibrated: 2022/4/21
- Probe: EX3DV4 - SN7400; ConvF(7.63, 7.63, 7.63) @ 2437 MHz; Calibrated: 2022/4/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -24.0, 31.0$
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1153
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (81x91x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.0517 W/kg



Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.261 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.0570 W/kg

SAR(1 g) = 0.035 W/kg; SAR(10 g) = 0.023 W/kg

Maximum value of SAR (measured) = 0.0492 W/kg

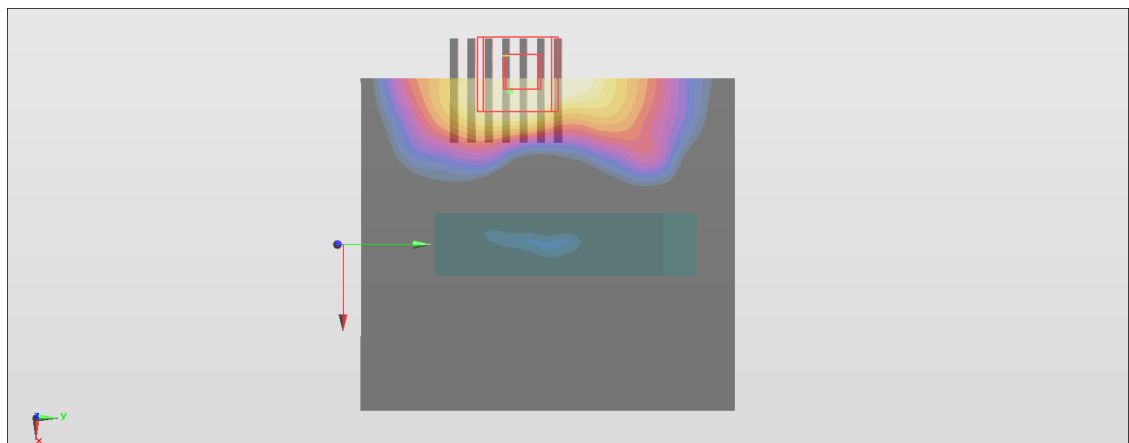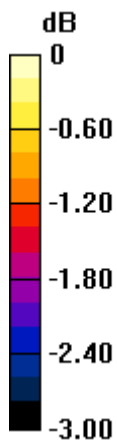

0 dB = 0.0492 W/kg = -13.08 dBW/kg

19_WLAN2.4GHz_802.11b 1Mbps_Top_10mm_Ch11; Chain 0

Communication System: WiFi; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: HSL2450_220919 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.843$ S/m; $\epsilon_r = 40.733$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.5°C

DASY Configuration:

- Electronics: DAE4 Sn855; Calibrated: 2022/4/21
- Probe: EX3DV4 - SN7400; ConvF(7.63, 7.63, 7.63) @ 2462 MHz; Calibrated: 2022/4/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -24.0, 31.0$
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1153
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (81x91x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.0196 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.582 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.0250 W/kg

SAR(1 g) = 0.013 W/kg; SAR(10 g) = 0.00595 W/kg

Maximum value of SAR (measured) = 0.0210 W/kg

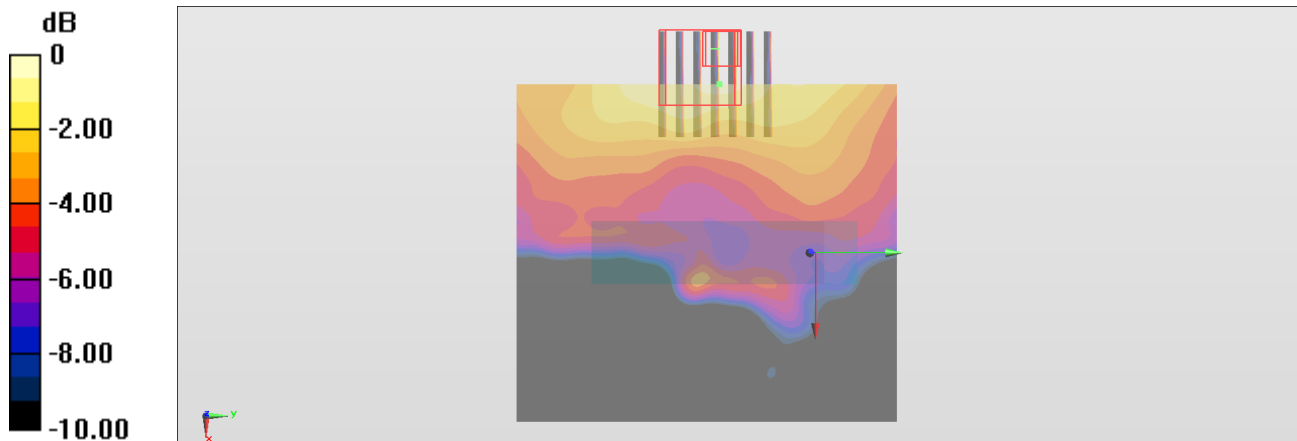

0 dB = 0.0210 W/kg = -16.78 dBW/kg

20_WLAN2.4GHz_802.11b 1Mbps_Top_10mm_Ch6; Chain 1

Communication System: WiFi; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: HSL2450_220919 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.823$ S/m; $\epsilon_r = 40.874$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.5°C

DASY Configuration:

- Electronics: DAE4 Sn855; Calibrated: 2022/4/21
- Probe: EX3DV4 - SN7400; ConvF(7.63, 7.63, 7.63) @ 2437 MHz; Calibrated: 2022/4/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -24.0, 31.0$
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1153
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Area Scan (81x91x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.0344 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 4.169 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.0420 W/kg

SAR(1 g) = 0.024 W/kg; SAR(10 g) = 0.016 W/kg

Maximum value of SAR (measured) = 0.0331 W/kg

