



FCC RF Test Report

APPLICANT : Sony Corporation
EQUIPMENT : Wireless module
BRAND NAME : Sony
MODEL NAME : AL1DR
FCC ID : AK8145890811
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DSS) Spread Spectrum Transmitter

The product was received on Dec. 05, 2017 and testing was completed on Dec. 18, 2017. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.

SPORTON INTERNATIONAL INC.

TEL : 886-3-327-3456

FAX : 886-3-328-4978

FCC ID : AK8145890811

Page Number : 1 of 58

Report Issued Date : Mar. 27, 2018

Report Version : Rev. 03

Report Template No.: BU5-FR15CBT Version 2.0



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION..... 5

 1.1 Applicant 5

 1.2 Manufacturer 5

 1.3 Product Feature of Equipment Under Test..... 5

 1.4 Modification of EUT 5

 1.5 Testing Location 6

 1.6 Applicable Standards..... 6

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST..... 7

 2.1 Carrier Frequency Channel 7

 2.2 Descriptions of Test Mode 8

 2.3 Test Mode..... 9

 2.4 Connection Diagram of Test System..... 10

 2.5 EUT Operation Test Setup 10

 2.6 Measurement Results Explanation Example..... 10

3 TEST RESULT 11

 3.1 Number of Channel Measurement 11

 3.2 Hopping Channel Separation Measurement 13

 3.3 Dwell Time Measurement 19

 3.4 20dB and 99% Bandwidth Measurement 22

 3.5 Output Power Measurement..... 33

 3.6 Conducted Band Edges Measurement..... 34

 3.7 Conducted Spurious Emission Measurement 41

 3.8 Radiated Band Edges and Spurious Emission Measurement 51

 3.9 Antenna Requirements 55

4 LIST OF MEASURING EQUIPMENT..... 56

5 UNCERTAINTY OF EVALUATION..... 58

APPENDIX A. AC CONDUCTED EMISSION TEST RESULT

APPENDIX B. RADIATED SPURIOUS EMISSION

APPENDIX C. RADIATED SPURIOUS EMISSION PLOTS

APPENDIX D. DUTY CYCLE PLOTS



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR7D0542A	Rev. 01	Initial issue of report	Jan. 03, 2018
FR7D0542A	Rev. 02	Add note description in summary.	Mar. 20, 2018
FR7D0542A	Rev. 03	Add near photos in setup photographs	Mar. 27, 2018



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(1)	Number of Channels	≥ 15 Chs	Pass	-
3.2	15.247(a)(1)	Hopping Channel Separation	$\geq 2/3$ of 20dB BW	Pass	-
3.3	15.247(a)(1)	Dwell Time of Each Channel	≤ 0.4 sec in 31.6sec period	Pass	-
3.4	15.247(a)(1)	20dB Bandwidth	NA	Pass	-
3.4	-	99% Bandwidth	-	Pass	-
3.5	15.247(b)(1)	Peak Output Power	≤ 125 mW	Pass	-
3.6	15.247(d)	Conducted Band Edges	≤ 20 dBc	Pass	-
3.7	15.247(d)	Conducted Spurious Emission	≤ 20 dBc	Pass	-
3.8	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 9.47 dB at 40.800 MHz
-	15.207	AC Conducted Emission	15.207(a)	Not Required	-
3.9	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-

Note:

1. Not required means after assessing, test items are not necessary to carry out.
2. EUT with fixture and the fixture doesn't have related port.



1 General Description

1.1 Applicant

Sony Corporation
1-7-1 Konan, Minato-ku, Tokyo, 108-0075, Japan

1.2 Manufacturer

Sony Corporation
1-7-1 Konan, Minato-ku, Tokyo, 108-0075, Japan

1.3 Product Feature of Equipment Under Test

Bluetooth, and DTS b/g/n.

Product Specification subjective to this standard	
Antenna Type / Gain	Monopole Antenna with gain -8.00 dBi

EUT Information List		
HW Version	S/N	Performed Test Item
A	N/A	RF conducted measurement Radiated Spurious Emission

1.4 Modification of EUT

No modifications are made to the EUT during all test items.



1.5 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1190 and TW0007 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Test Site	SPORTON INTERNATIONAL INC.
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No.
	TH05-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	SPORTON INTERNATIONAL INC.
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd Rd., Kwei-Shan District, Tao Yuan City, Taiwan R.O.C. TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No.
	03CH11-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

1.6 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart C §15.247
- ANSI C63.10-2013

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	27	2429	54	2456
	1	2403	28	2430	55	2457
	2	2404	29	2431	56	2458
	3	2405	30	2432	57	2459
	4	2406	31	2433	58	2460
	5	2407	32	2434	59	2461
	6	2408	33	2435	60	2462
	7	2409	34	2436	61	2463
	8	2410	35	2437	62	2464
	9	2411	36	2438	63	2465
	10	2412	37	2439	64	2466
	11	2413	38	2440	65	2467
	12	2414	39	2441	66	2468
	13	2415	40	2442	67	2469
	14	2416	41	2443	68	2470
	15	2417	42	2444	69	2471
	16	2418	43	2445	70	2472
	17	2419	44	2446	71	2473
	18	2420	45	2447	72	2474
	19	2421	46	2448	73	2475
	20	2422	47	2449	74	2476
	21	2423	48	2450	75	2477
	22	2424	49	2451	76	2478
	23	2425	50	2452	77	2479
	24	2426	51	2453	78	2480
	25	2427	52	2454	-	-
	26	2428	53	2455	-	-



2.2 Descriptions of Test Mode

Preliminary tests were performed in different data rates and recorded the RF output power in the following table:

Channel	Frequency	Bluetooth RF Output Peak Power		
		Data Rate / Modulation		
		GFSK	$\pi/4$ -DQPSK	8-DPSK
		1Mbps	2Mbps	3Mbps
Ch00	2402MHz	8.50 dBm	9.02 dBm	9.28 dBm
Ch39	2441MHz	8.69 dBm	8.50 dBm	8.87 dBm
Ch78	2480MHz	8.40 dBm	7.53 dBm	7.75 dBm

Channel	Frequency	Bluetooth RF Output Average Power		
		Data Rate / Modulation		
		GFSK	$\pi/4$ -DQPSK	8-DPSK
		1Mbps	2Mbps	3Mbps
Ch00	2402MHz	8.10 dBm	6.45 dBm	6.45 dBm
Ch39	2441MHz	8.39 dBm	5.89 dBm	5.87 dBm
Ch78	2480MHz	8.12 dBm	4.60 dBm	4.64 dBm

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower. Pre-scanned tests, X, Y, Z in three orthogonal panels, and different data rates were conducted to determine the final configuration (Z plane as worst plane) from all possible combinations.




2.3 Test Mode

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases			
Test Item	Data Rate / Modulation		
	Bluetooth BR 1Mbps GFSK	Bluetooth EDR 2Mbps $\pi/4$ -DQPSK	Bluetooth EDR 3Mbps 8-DPSK
Conducted Test Cases	Mode 1: CH00_2402 MHz	Mode 4: CH00_2402 MHz	Mode 7: CH00_2402 MHz
	Mode 2: CH39_2441 MHz	Mode 5: CH39_2441 MHz	Mode 8: CH39_2441 MHz
	Mode 3: CH78_2480 MHz	Mode 6: CH78_2480 MHz	Mode 9: CH78_2480 MHz
Radiated Test Cases	Bluetooth EDR 3Mbps 8-DPSK		
	Mode 1: CH00_2402 MHz for 1Mbps		
	Mode 2: CH39_2441 MHz for 1Mbps		
	Mode 3: CH78_2480 MHz for 1Mbps		
	Mode 4: CH00_2402 MHz for 2Mbps		
	Mode 5: CH39_2441 MHz for 2Mbps		
	Mode 6: CH78_2480 MHz for 2Mbps		
	Mode 7: CH00_2402 MHz for 3Mbps		
	Mode 8: CH39_2441 MHz for 3Mbps		
	Mode 9: CH78_2480 MHz for 3Mbps		

2.4 Connection Diagram of Test System

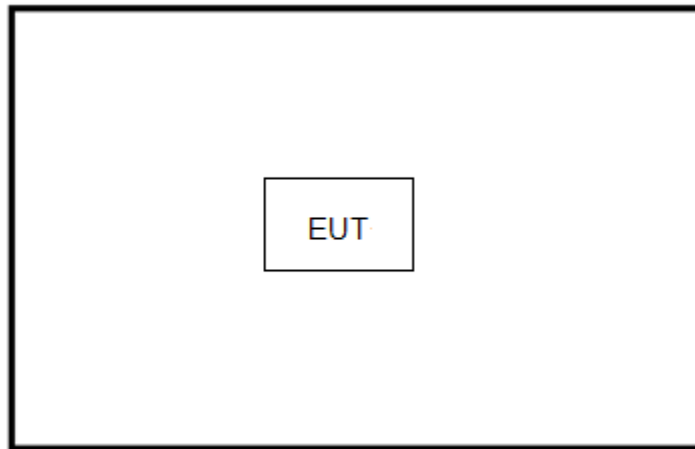

2.5 EUT Operation Test Setup

The RF test items, programmed RF utility, “Tera term Tool” installed in the notebook make the EUT provide functions like channel selection and power level for continuous transmitting signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 Number of Channel Measurement

3.1.1 Limits of Number of Hopping Frequency

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 7.8.3.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = the frequency band of operation; RBW = 300kHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. The number of hopping frequency used is defined as the number of total channel.
7. Record the measurement data derived from spectrum analyzer.

3.1.4 Test Setup

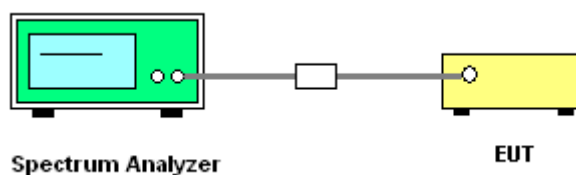


3.1.5 Test Result of Number of Hopping Frequency


Please refer to Appendix A.



Number of Hopping Channel Plot on Channel 00 - 78

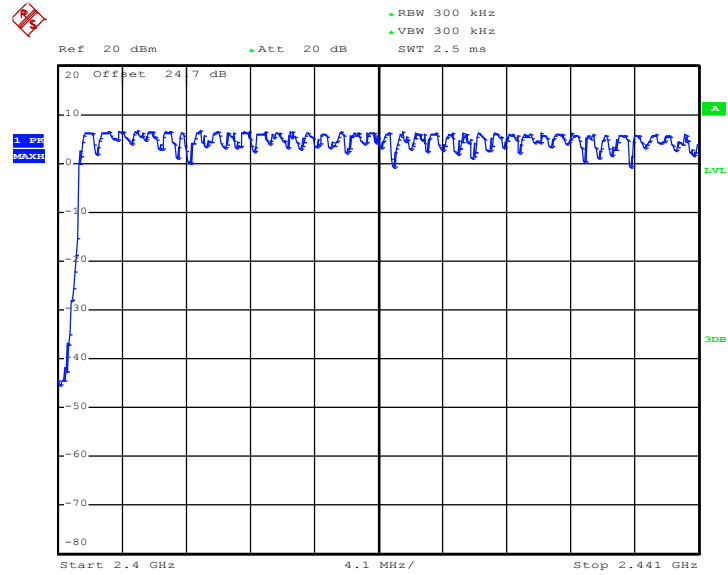

Date: 18.DEC.2017 21:40:18

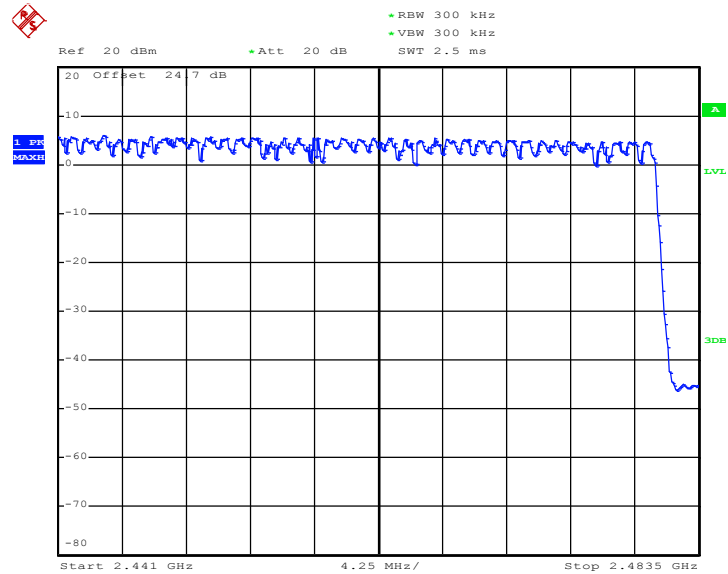

Date: 18.DEC.2017 21:40:46

3.2 Hopping Channel Separation Measurement

3.2.1 Limit of Hopping Channel Separation

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.2.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings:
Span = wide enough to capture the peaks of two adjacent channels;
RBW = 300kHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

3.2.4 Test Setup

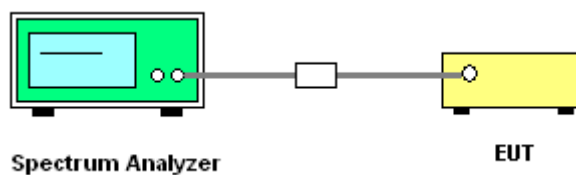


3.2.5 Test Result of Hopping Channel Separation

Please refer to Appendix A.




<1Mbps>

Channel Separation Plot on Channel 00 - 01

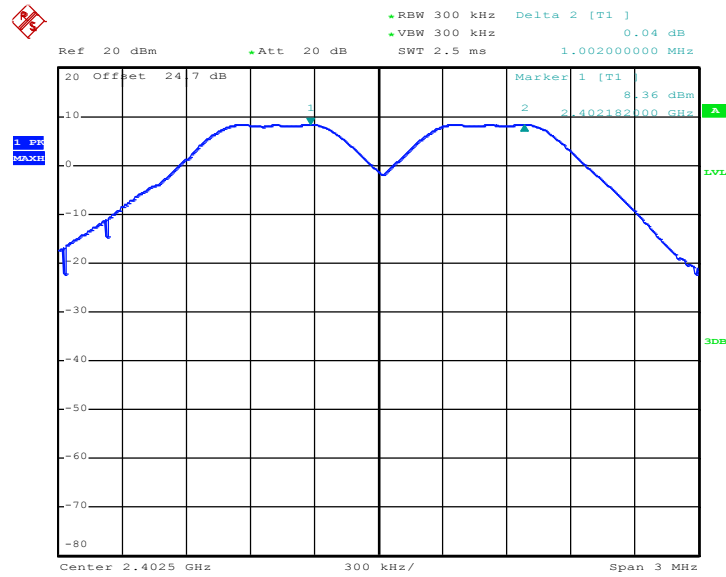

Date: 18.DEC.2017 19:48:28


Channel Separation Plot on Channel 39 - 40

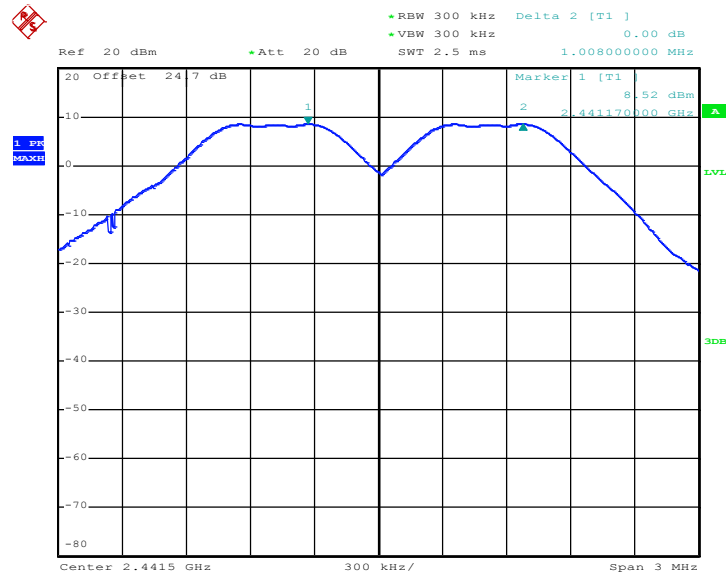

Date: 18.DEC.2017 19:56:18




Channel Separation Plot on Channel 77 - 78

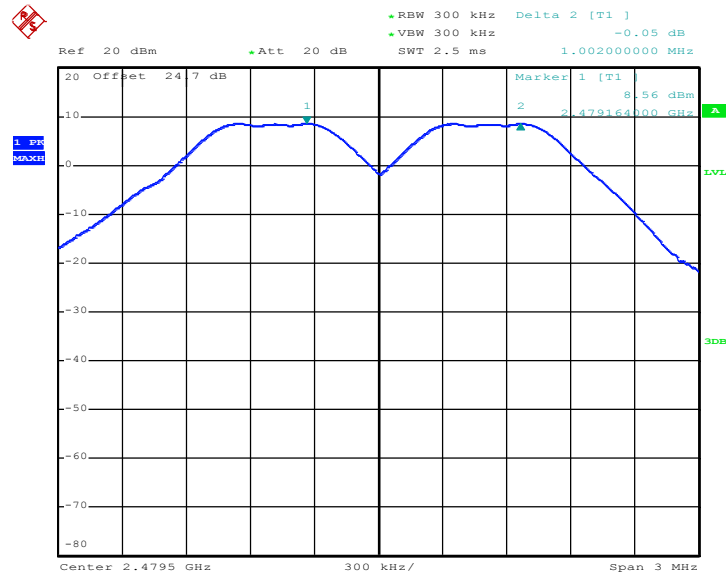

Date: 18.DEC.2017 20:05:08

<2Mbps>


Channel Separation Plot on Channel 00 - 01

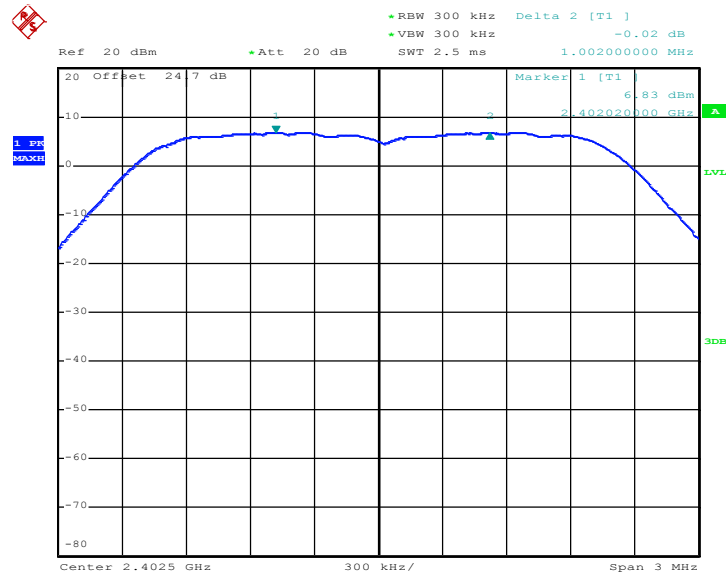

Date: 18.DEC.2017 20:48:11




Channel Separation Plot on Channel 39 - 40

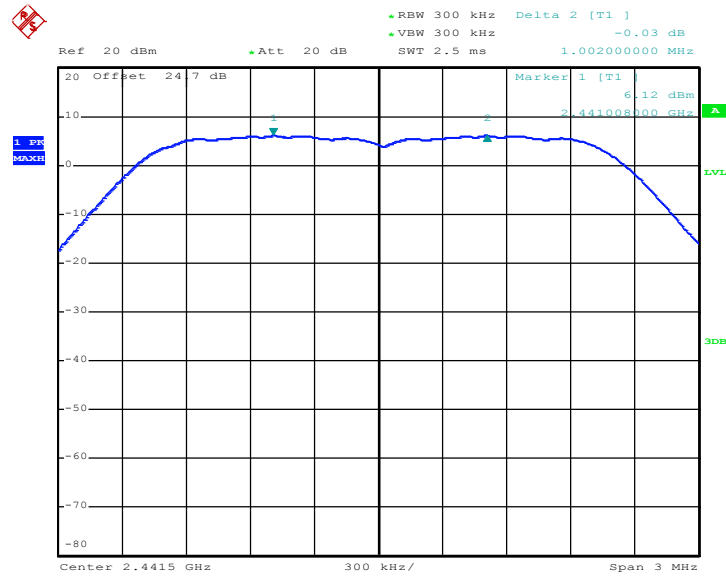

Date: 18.DEC.2017 20:56:43

Channel Separation Plot on Channel 77 - 78

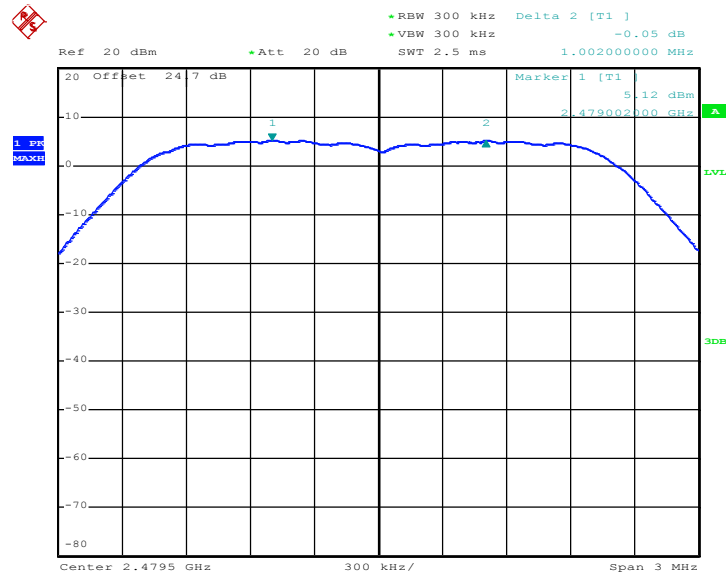


Date: 18.DEC.2017 21:07:18




<3Mbps>

Channel Separation Plot on Channel 00 - 01

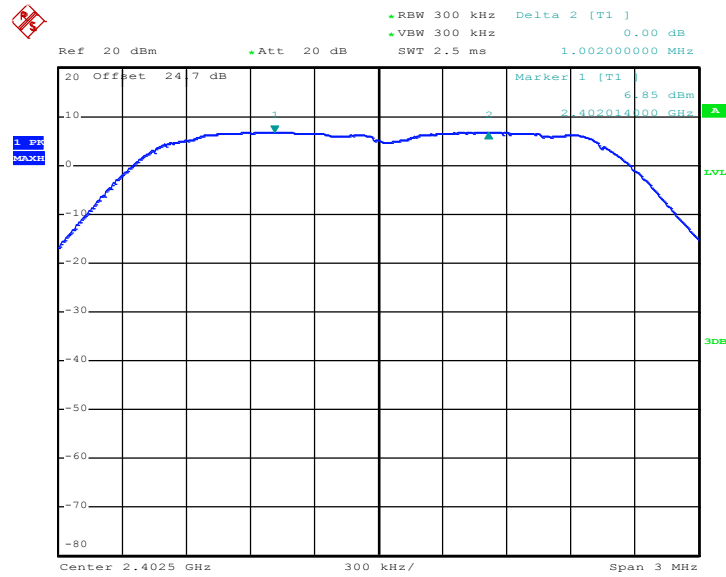

Date: 18.DEC.2017 21:18:59


Channel Separation Plot on Channel 39 - 40

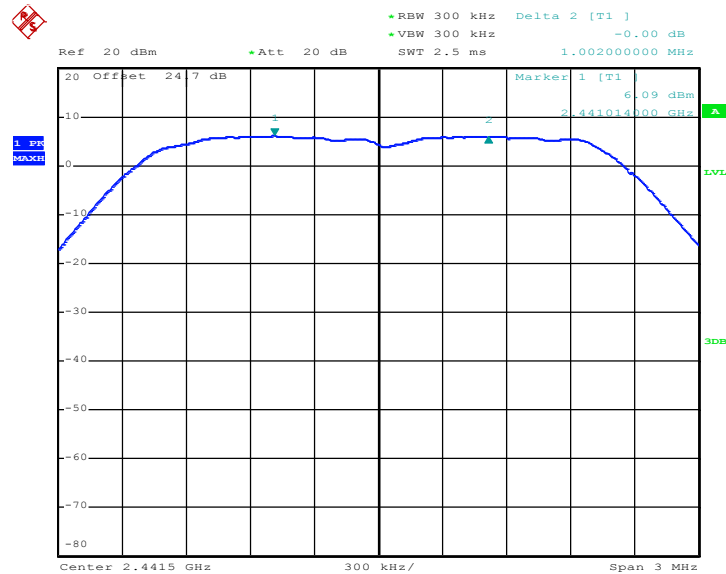

Date: 18.DEC.2017 21:25:54



Channel Separation Plot on Channel 77 - 78

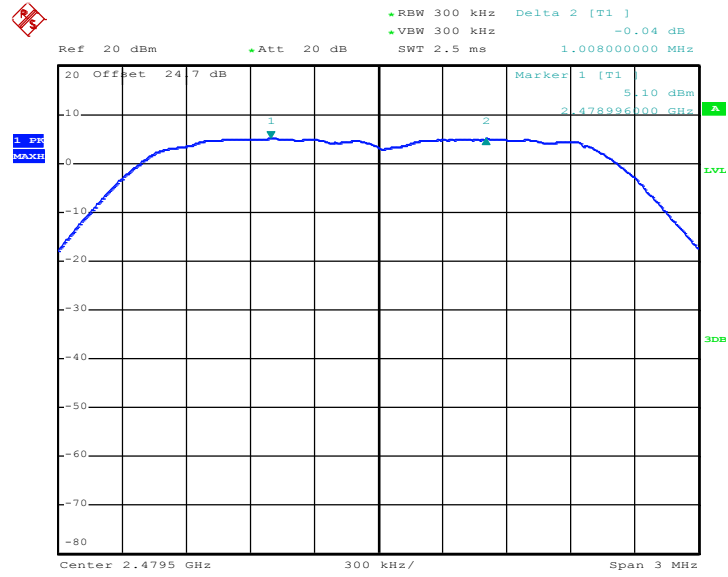

Date: 18.DEC.2017 21:32:13

3.3 Dwell Time Measurement

3.3.1 Limit of Dwell Time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.


3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.4.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW \geq RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

3.3.4 Test Setup

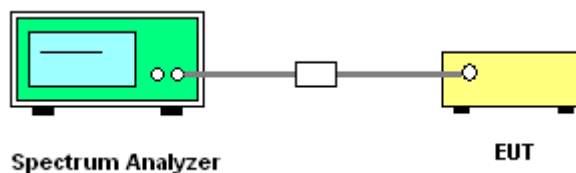

3.3.5 Test Result of Dwell Time

Please refer to Appendix A.




Remark:

1. In normal mode, hopping rate is 1600 hops/s with 6 slots in 79 hopping channels.
With channel hopping rate (1600 / 6 / 79) in Occupancy Time Limit (0.4 x 79) (s),
Hops Over Occupancy Time comes to (1600 / 6 / 79) x (0.4 x 79) = 106.67 hops.
2. In AFH mode, hopping rate is 800 hops/s with 6 slots in 20 hopping channels.
With channel hopping rate (800 / 6 / 20) in Occupancy Time Limit (0.4 x 20) (s),
Hops Over Occupancy Time comes to (800 / 6 / 20) x (0.4 x 20) = 53.33 hops.
3. Dwell Time(s) = Hops Over Occupancy Time (hops) x Package Transfer Time

Package Transfer Time Plot

<1Mbps>

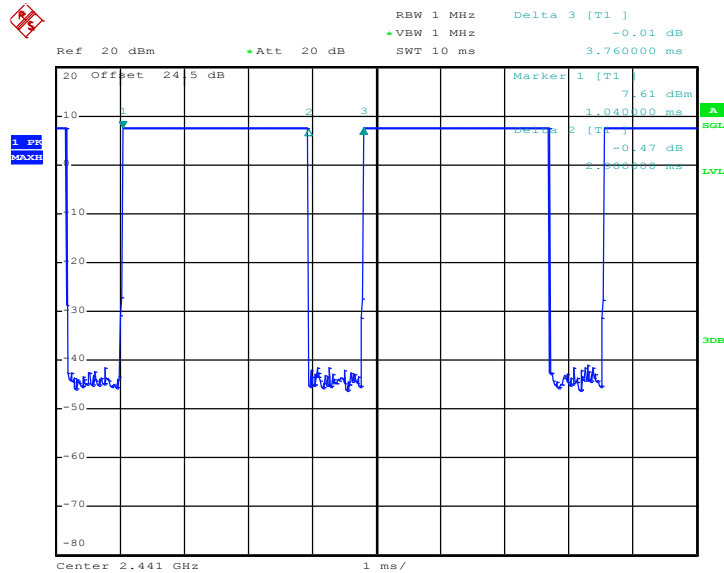


Date: 11.DEC.2017 15:44:31



Package Transfer Time Plot


<2Mbps>

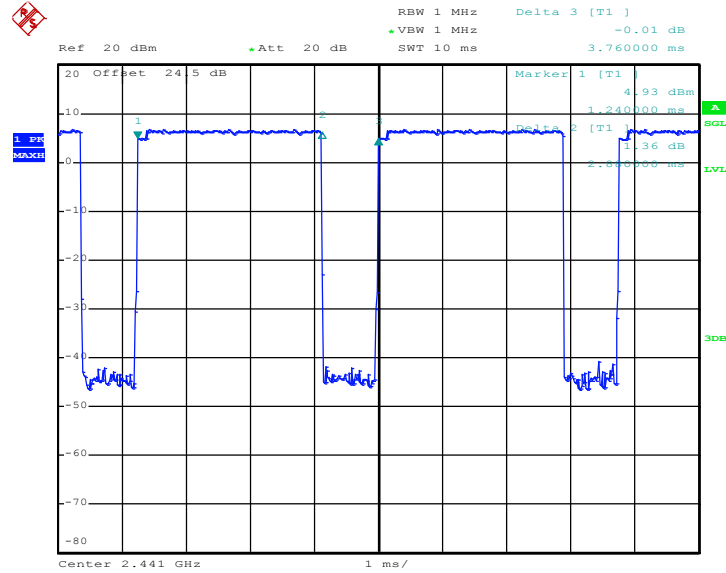

Date: 11.DEC.2017 15:46:39

Package Transfer Time Plot

<3Mbps>

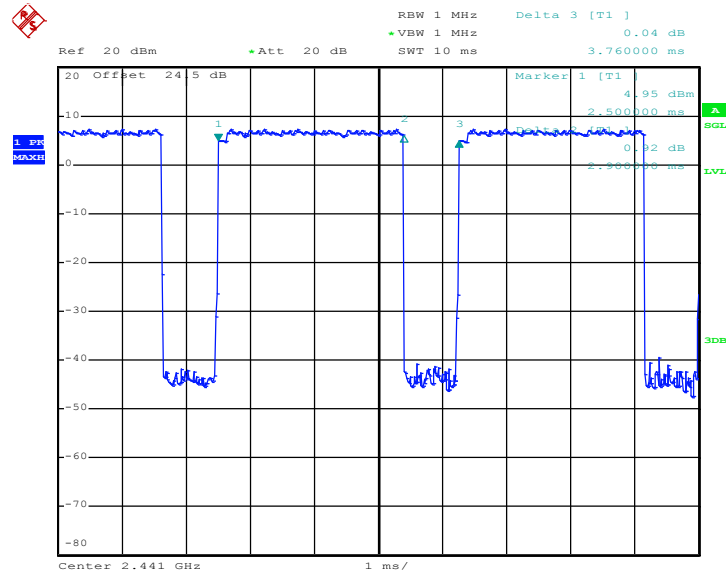

Date: 11.DEC.2017 15:48:31

3.4 20dB and 99% Bandwidth Measurement

3.4.1 Limit of 20dB and 99% Bandwidth

Reporting only

3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 6.9.2 and 6.9.3.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Use the following spectrum analyzer settings for 20dB Bandwidth measurement.
Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hopping channel;
RBW \geq 1% of the 20 dB bandwidth; VBW \geq RBW; Sweep = auto; Detector function = peak;
Trace = max hold.
5. Use the following spectrum analyzer settings for 99 % Bandwidth measurement.
Span = approximately 1.5 to 5 times the 99% bandwidth, centered on a hopping channel;
RBW \geq 1% of the 99% bandwidth; VBW \geq RBW; Sweep = auto; Detector function = peak;
Trace = max hold.
6. Measure and record the results in the test report.

3.4.4 Test Setup




3.4.5 Test Result of 20dB Bandwidth

Please refer to Appendix A.




<1Mbps>

20 dB Bandwidth Plot on Channel 00

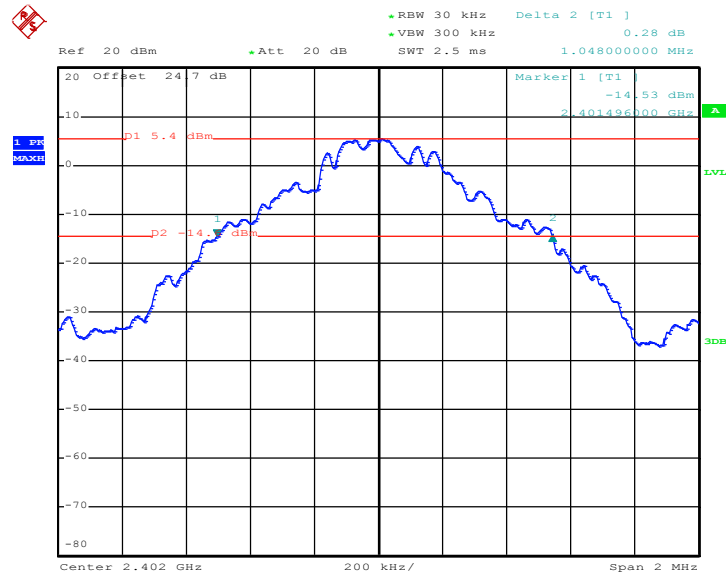

Date: 18.DEC.2017 19:34:16


20 dB Bandwidth Plot on Channel 39

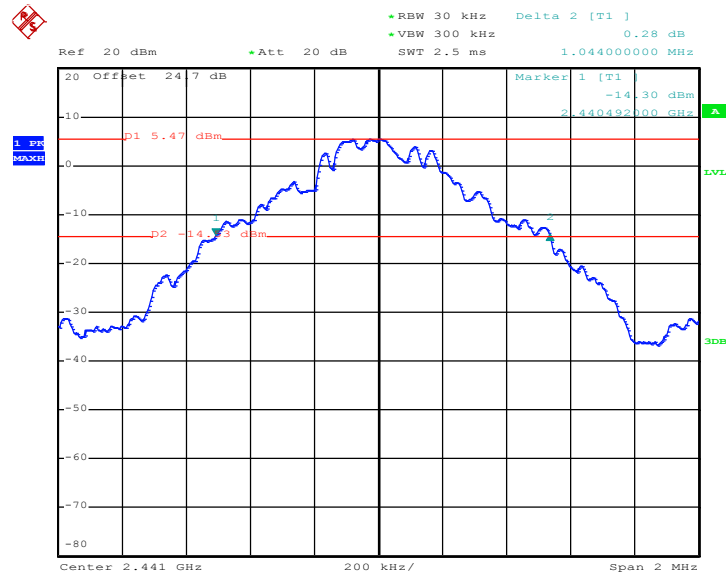

Date: 18.DEC.2017 19:49:46




20 dB Bandwidth Plot on Channel 78

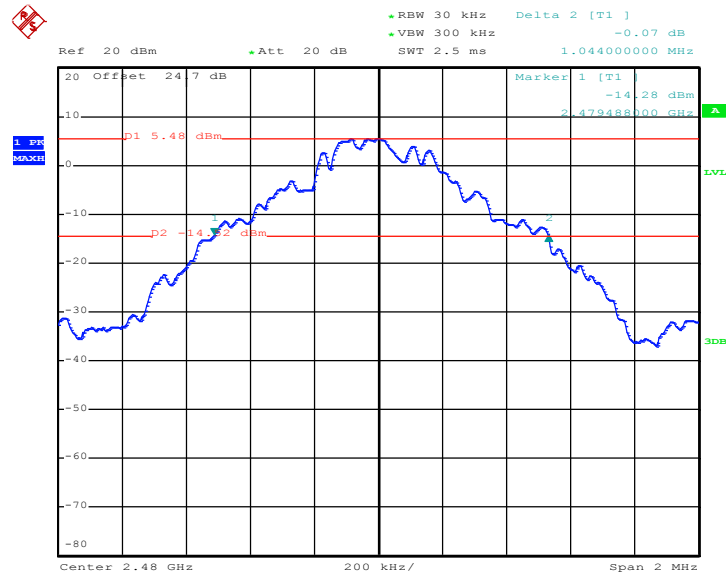

Date: 18.DEC.2017 19:59:01

<2Mbps>


20 dB Bandwidth Plot on Channel 00

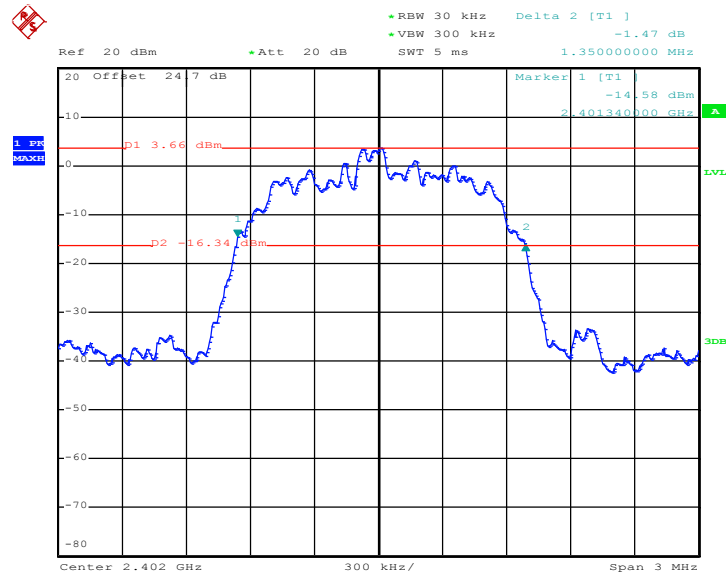

Date: 18.DEC.2017 20:38:41




20 dB Bandwidth Plot on Channel 39

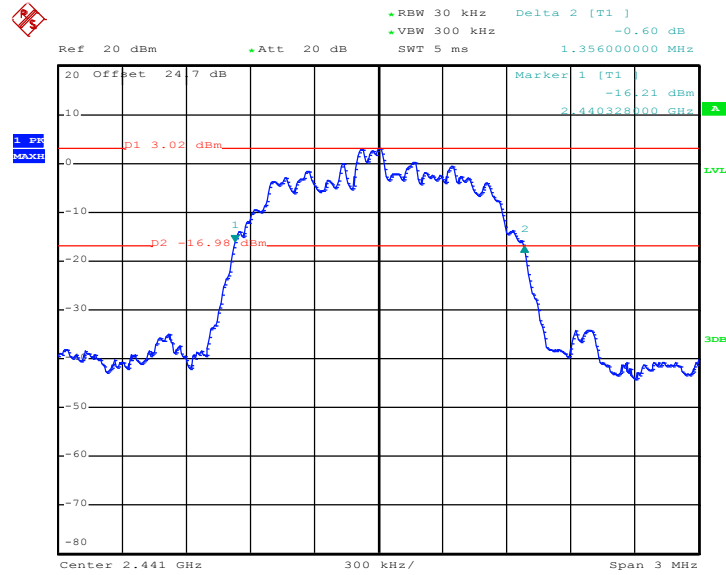

Date: 18.DEC.2017 20:49:59

20 dB Bandwidth Plot on Channel 78

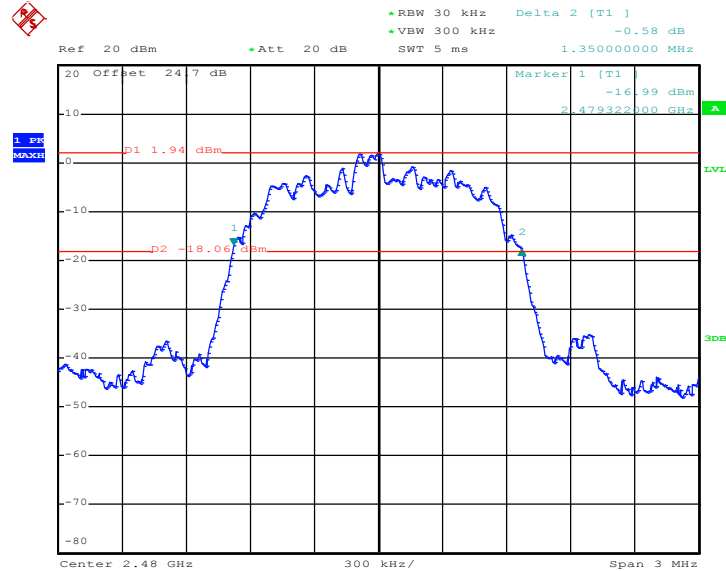


Date: 18.DEC.2017 20:57:56




<3Mbps>

20 dB Bandwidth Plot on Channel 00

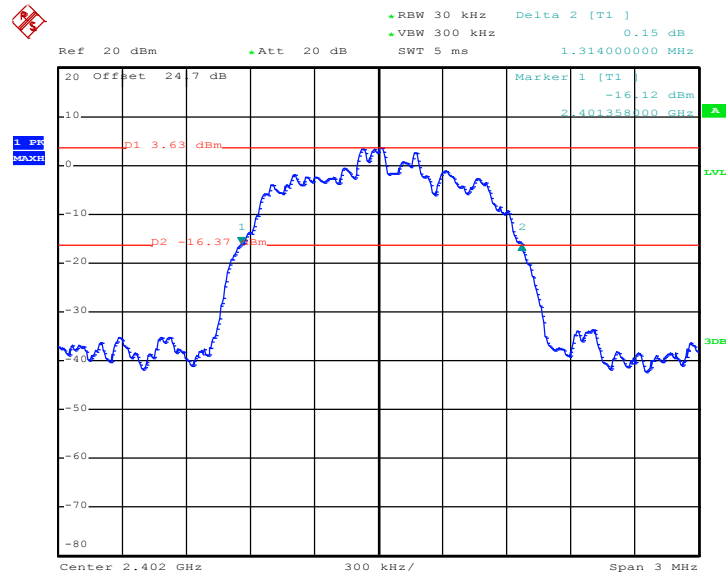

Date: 18.DEC.2017 21:10:18


20 dB Bandwidth Plot on Channel 39

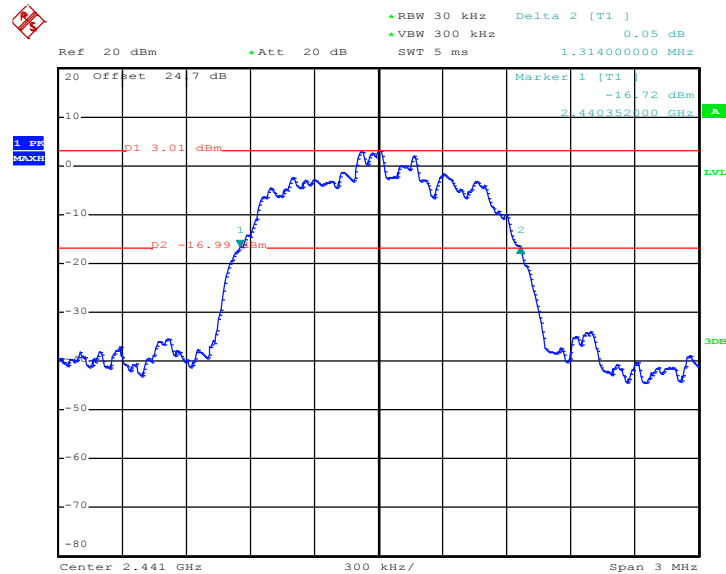

Date: 18.DEC.2017 21:20:10



20 dB Bandwidth Plot on Channel 78

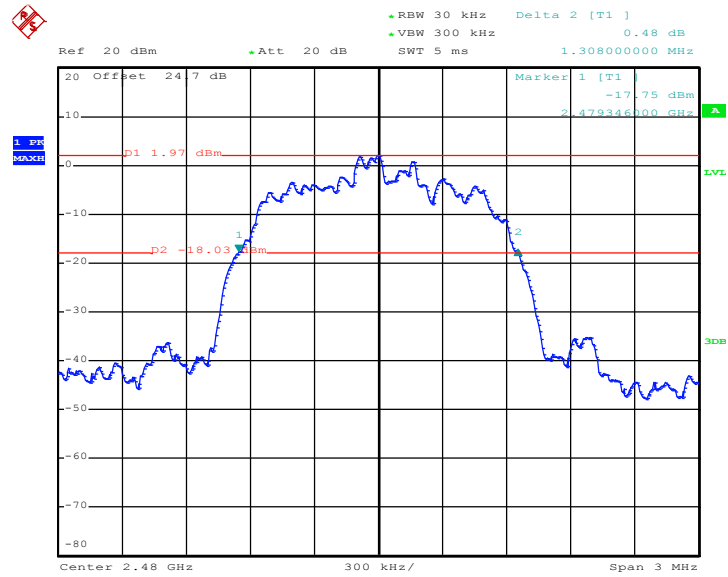

Date: 18.DEC.2017 21:26:59




3.4.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.


<1Mbps>

99% Occupied Bandwidth Plot on Channel 00

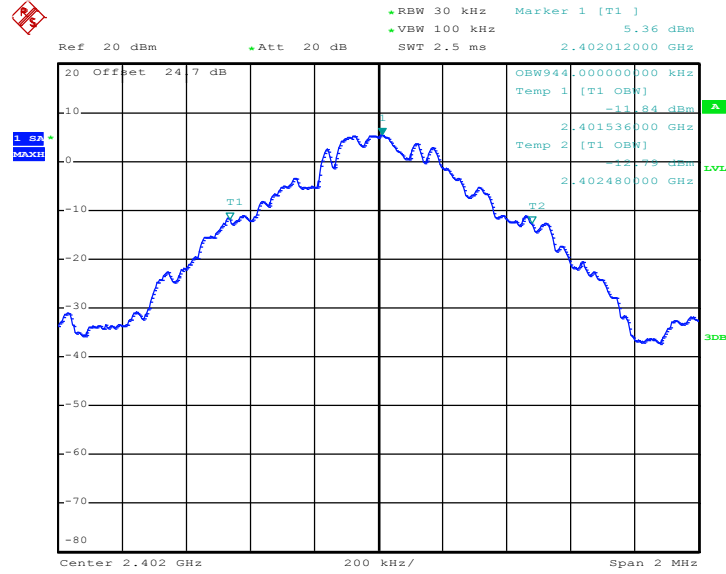

Date: 18.DEC.2017 19:35:26


99% Occupied Bandwidth Plot on Channel 39

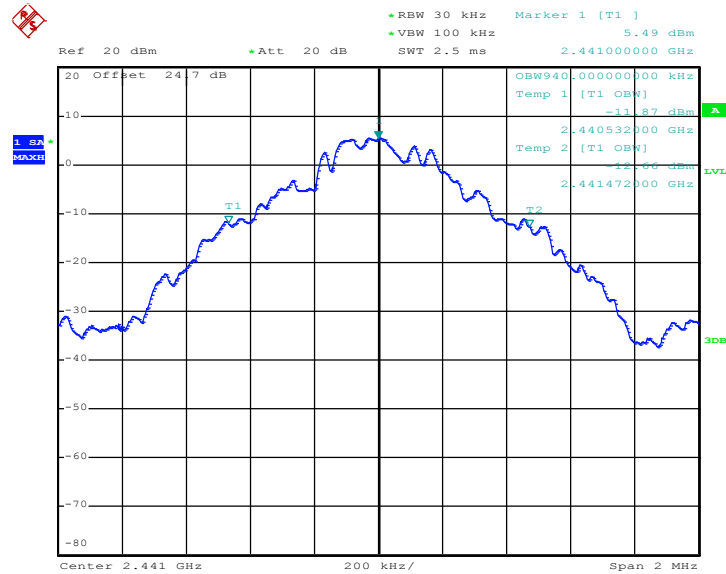

Date: 18.DEC.2017 19:51:22




99% Occupied Bandwidth Plot on Channel 78

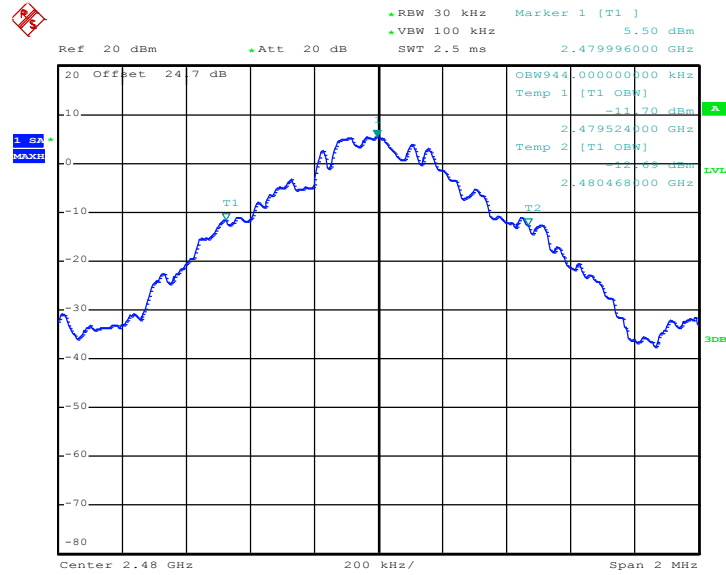

Date: 18.DEC.2017 20:00:16

<2Mbps>


99% Occupied Bandwidth Plot on Channel 00

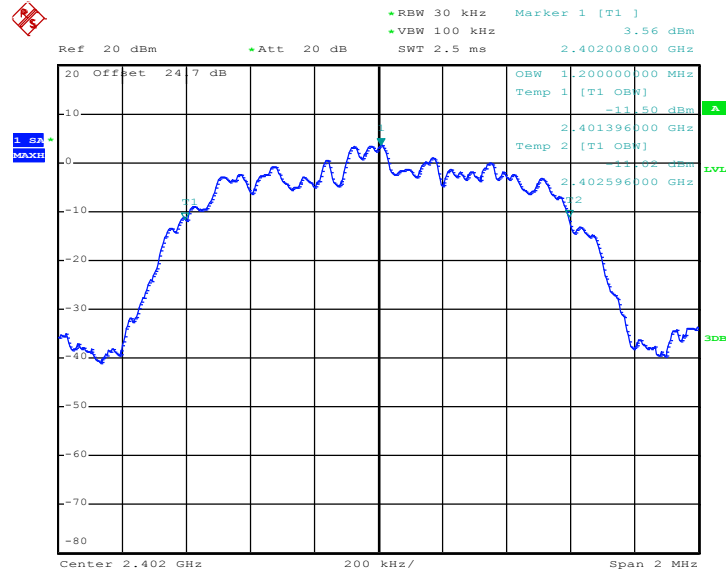

Date: 18.DEC.2017 20:39:51




99% Occupied Bandwidth Plot on Channel 39

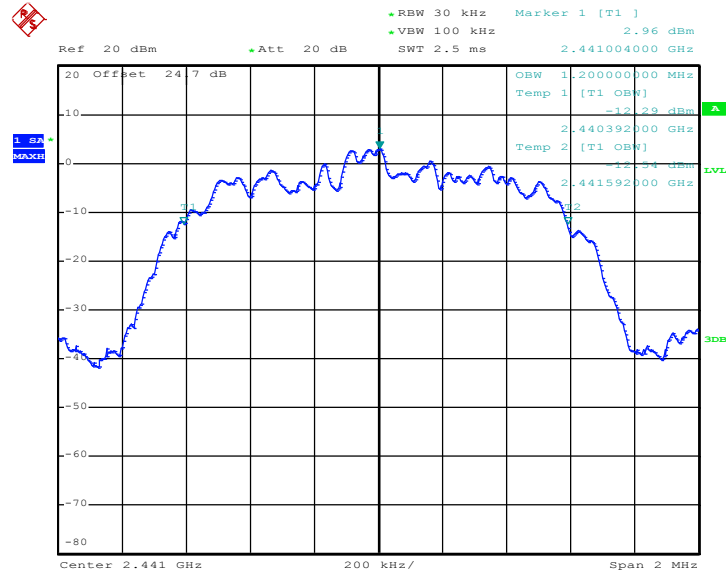

Date: 18.DEC.2017 20:50:38

99% Occupied Bandwidth Plot on Channel 78

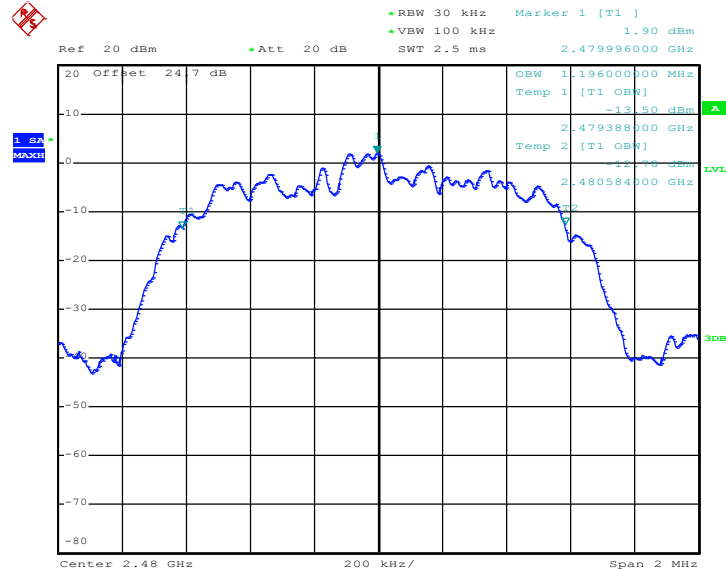


Date: 18.DEC.2017 20:58:52




<3Mbps>

99% Occupied Bandwidth Plot on Channel 00

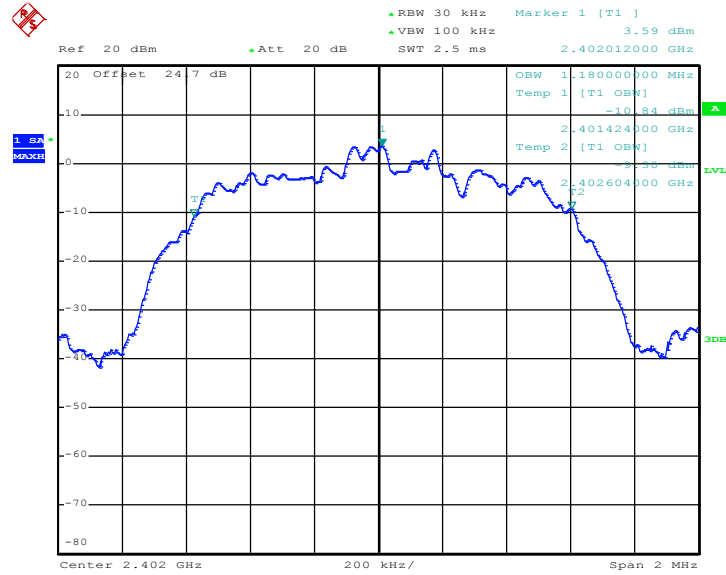

Date: 18.DEC.2017 21:11:14


99% Occupied Bandwidth Plot on Channel 39

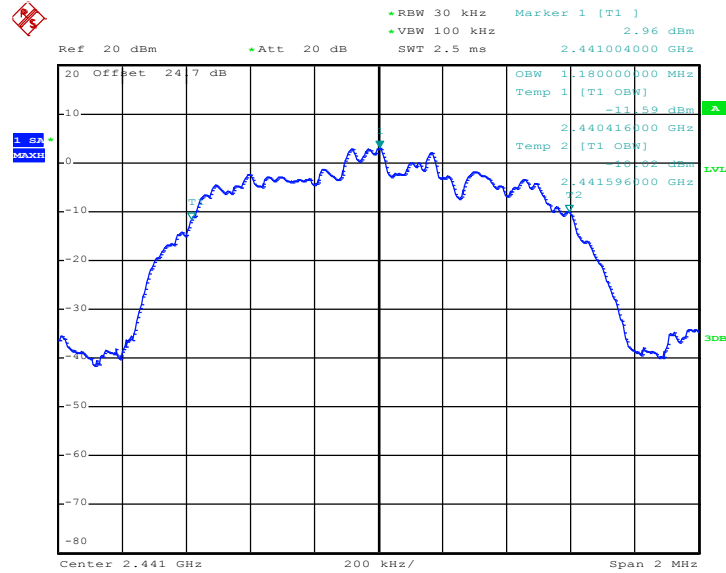

Date: 18.DEC.2017 21:20:50



99% Occupied Bandwidth Plot on Channel 78

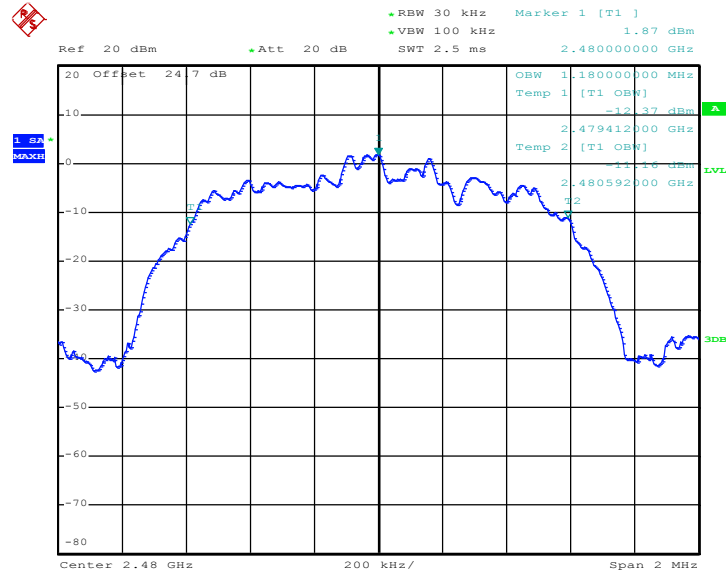

Date: 18.DEC.2017 21:27:55

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.5 Output Power Measurement

3.5.1 Limit of Output Power

Section 15.247 (b) The maximum peak conducted output power of the intentional radiator shall not exceed the following: (1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts. The power limit for 1Mbps, 2Mbps, 3Mbps and AFH modes are 0.125 watts.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.5.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power with cable loss and record the results in the test report.
5. Measure and record the results in the test report.

3.5.4 Test Setup

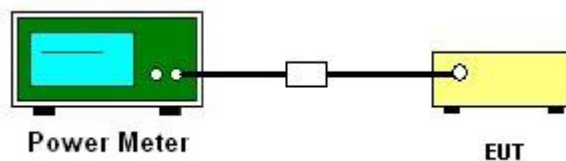

3.5.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.5.6 Test Result of Average Output Power (Reporting Only)

Please refer to Appendix A.

3.6 Conducted Band Edges Measurement

3.6.1 Limit of Band Edges

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.

3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.6.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Set RBW = 100kHz, VBW = 300kHz. Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100kHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used.
4. Enable hopping function of the EUT and then repeat step 2. and 3.
5. Measure and record the results in the test report.

3.6.4 Test Setup






3.6.5 Test Result of Conducted Band Edges


<1Mbps>

Low Band Edge Plot on Channel 00

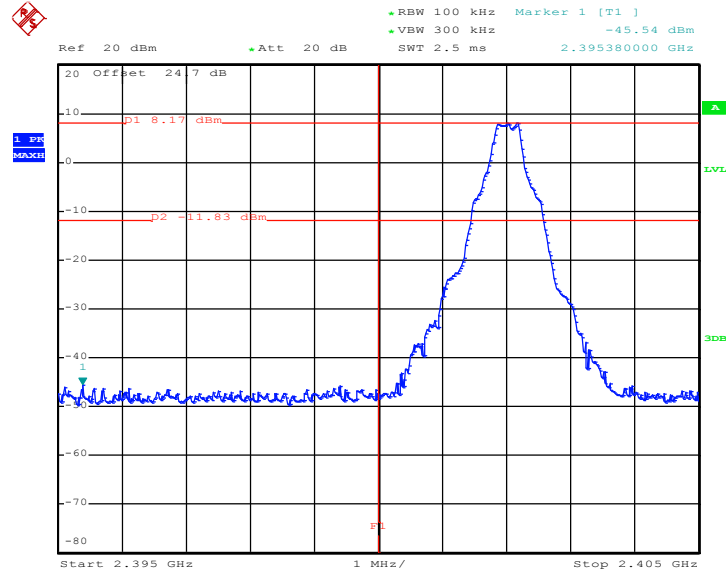

Date: 18.DEC.2017 19:34:48

High Band Edge Plot on Channel 78

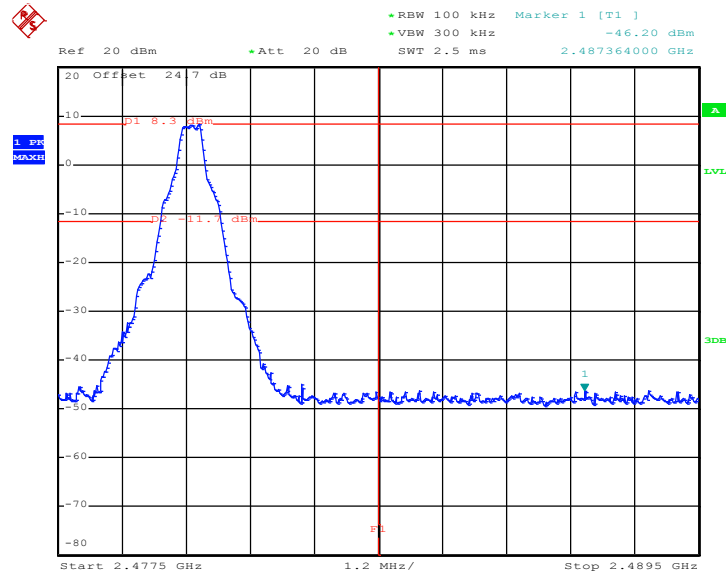


Date: 18.DEC.2017 19:59:32




<2Mbps>

Low Band Edge Plot on Channel 00

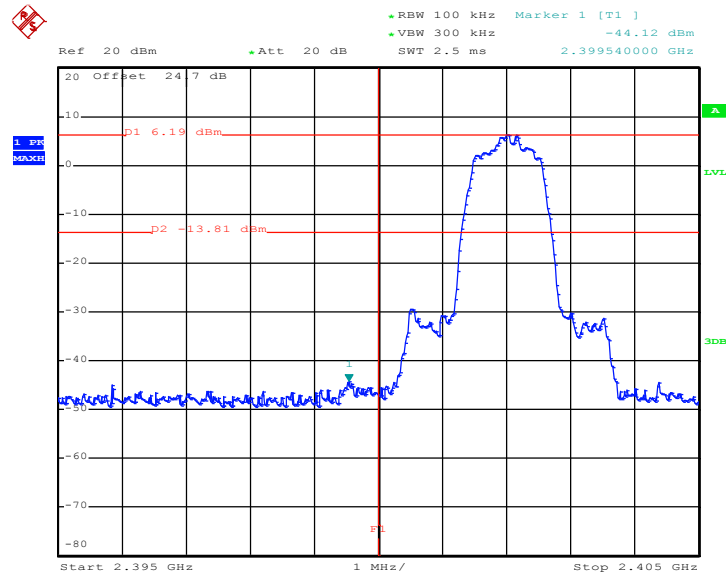

Date: 18.DEC.2017 20:39:11

High Band Edge Plot on Channel 78

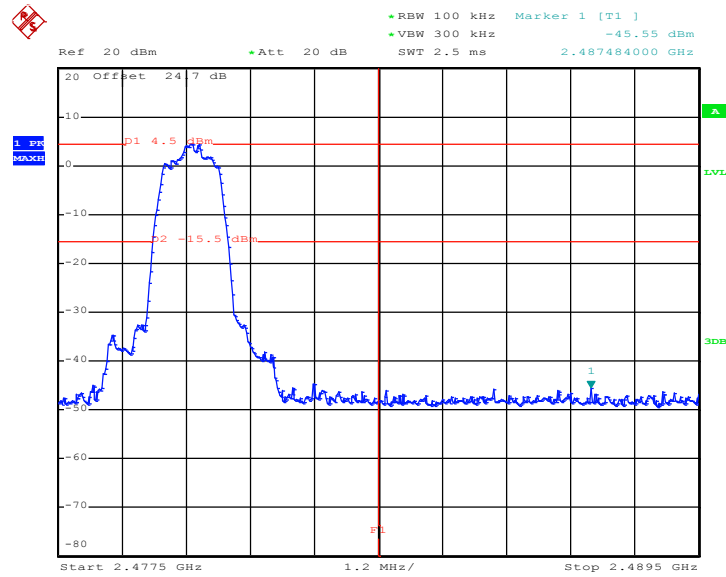


Date: 18.DEC.2017 20:58:16




<3Mbps>

Low Band Edge Plot on Channel 00

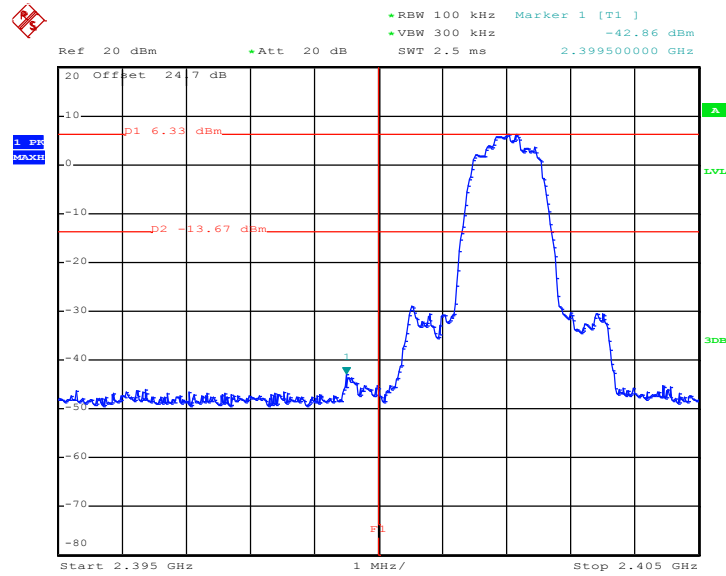

Date: 18.DEC.2017 21:10:40

High Band Edge Plot on Channel 78

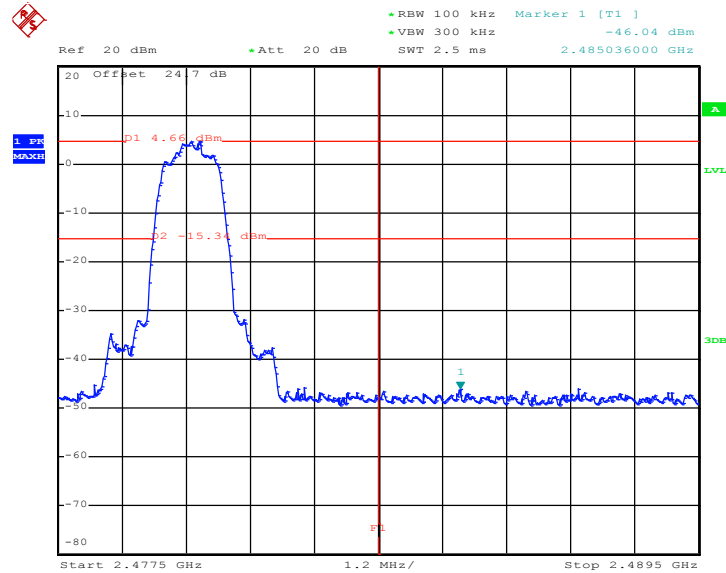


Date: 18.DEC.2017 21:27:18




3.6.6 Test Result of Conducted Hopping Mode Band Edges

1Mbps Hopping Mode Low Band Edge Plot

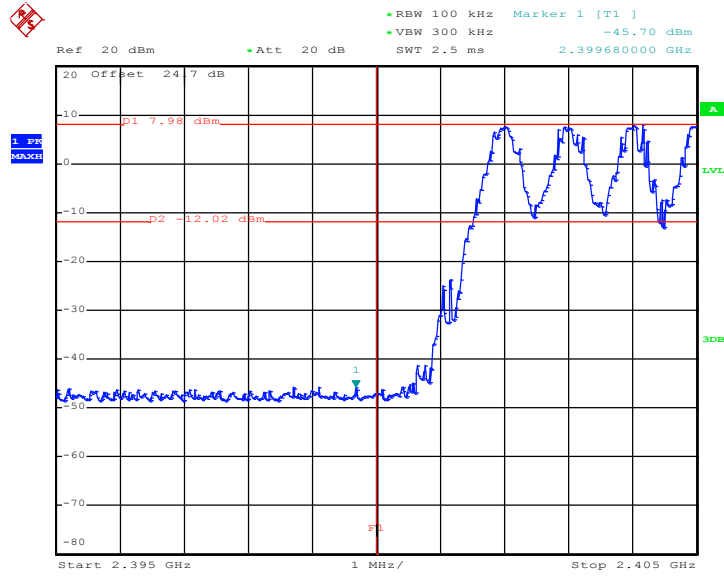

Date: 18.DEC.2017 20:24:04


1Mbps Hopping Mode High Band Edge Plot

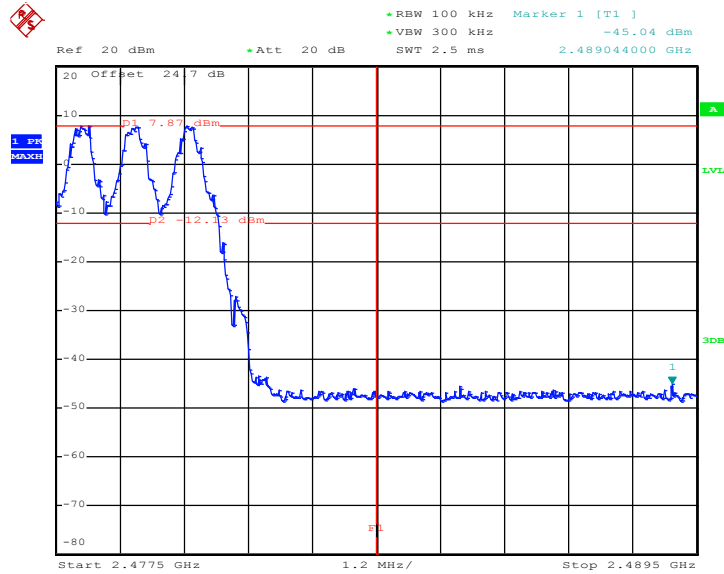

Date: 18.DEC.2017 20:24:53




2Mbps Hopping Mode Low Band Edge Plot

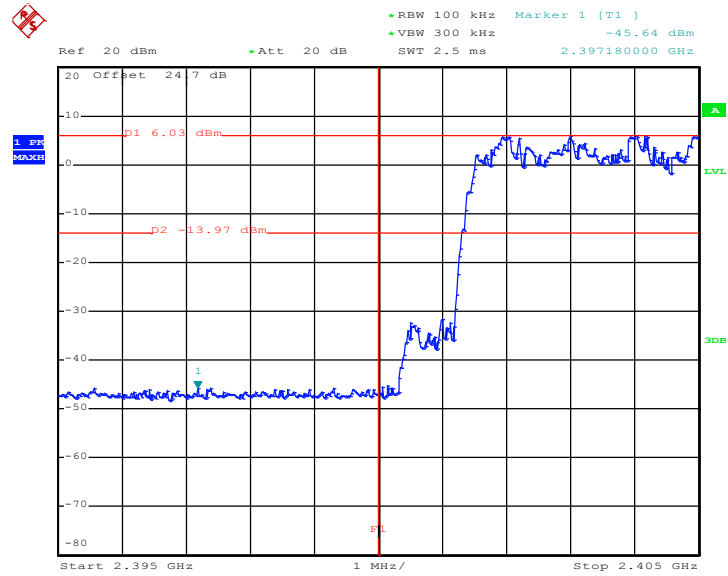

Date: 18.DEC.2017 20:32:42


2Mbps Hopping Mode High Band Edge Plot

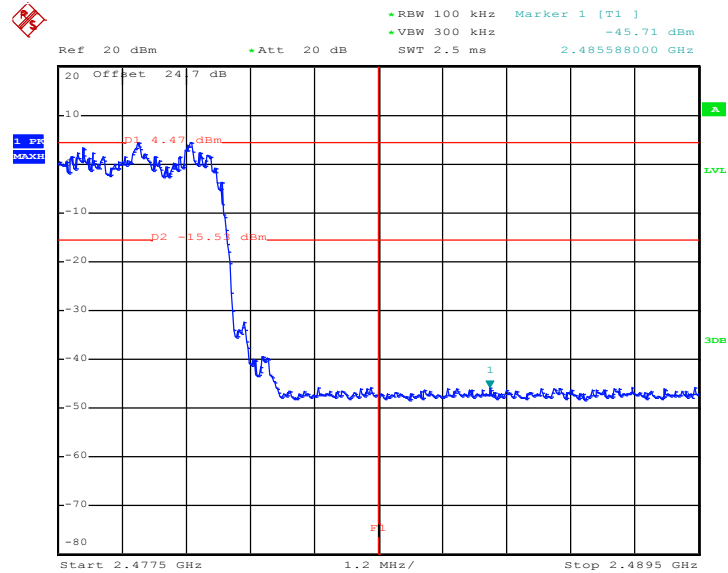

Date: 18.DEC.2017 20:34:32




3Mbps Hopping Mode Low Band Edge Plot

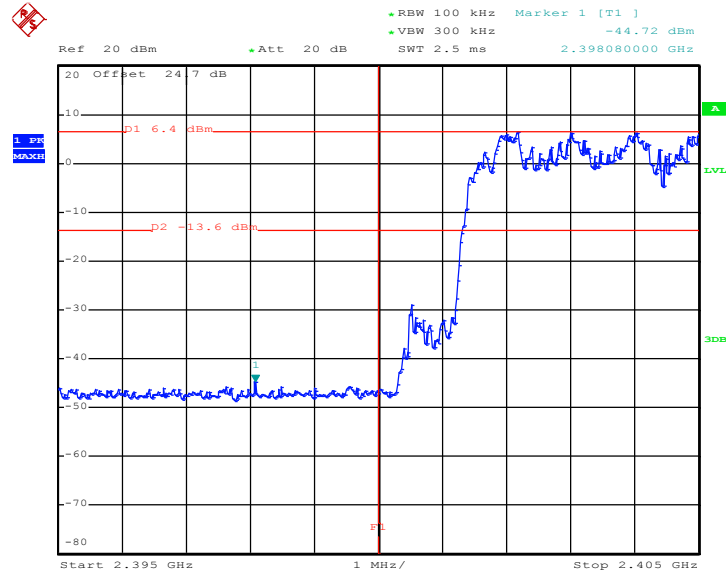

Date: 18.DEC.2017 21:35:24

3Mbps Hopping Mode High Band Edge Plot

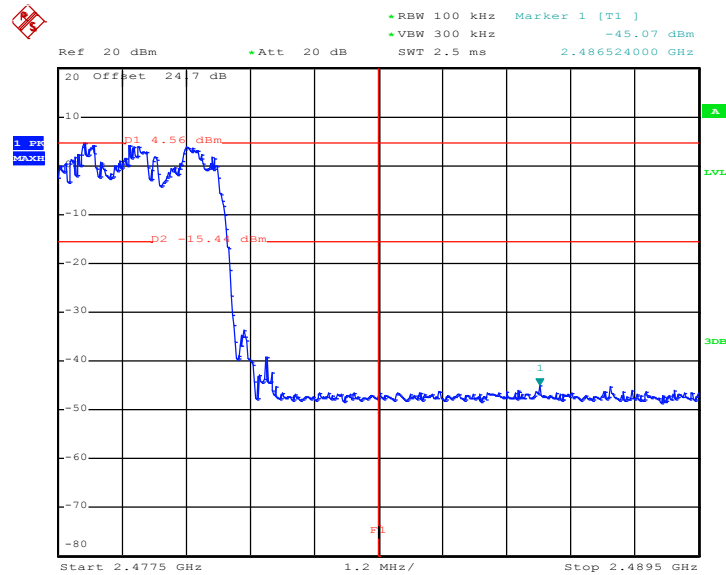

Date: 18.DEC.2017 21:36:50

3.7 Conducted Spurious Emission Measurement

3.7.1 Limit of Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


3.7.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.7.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 7.8.8.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW = 300kHz, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


3.7.4 Test Setup

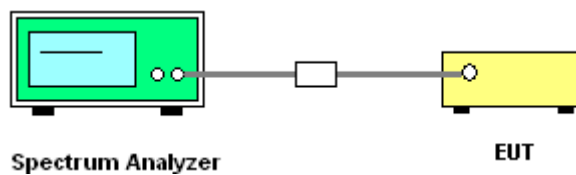




3.7.5 Test Result of Conducted Spurious Emission

1Mbps CSE Plot on Ch 00 between 30MHz ~ 3 GHz

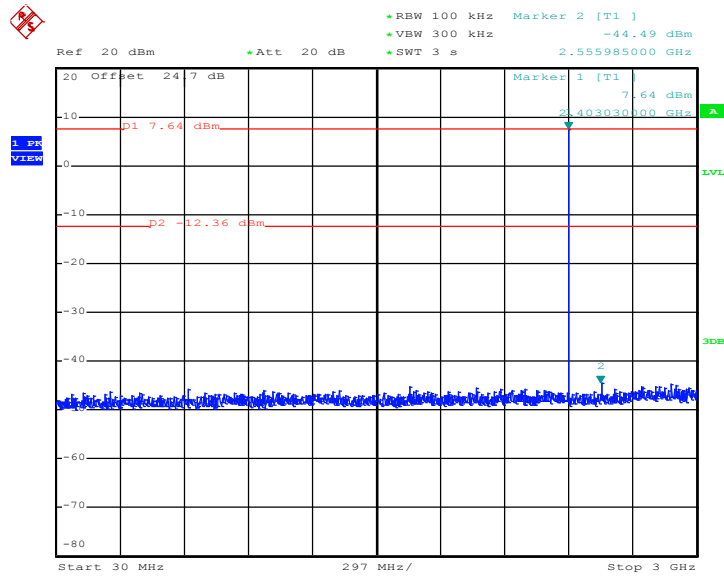

Date: 18.DEC.2017 19:44:44


1Mbps CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

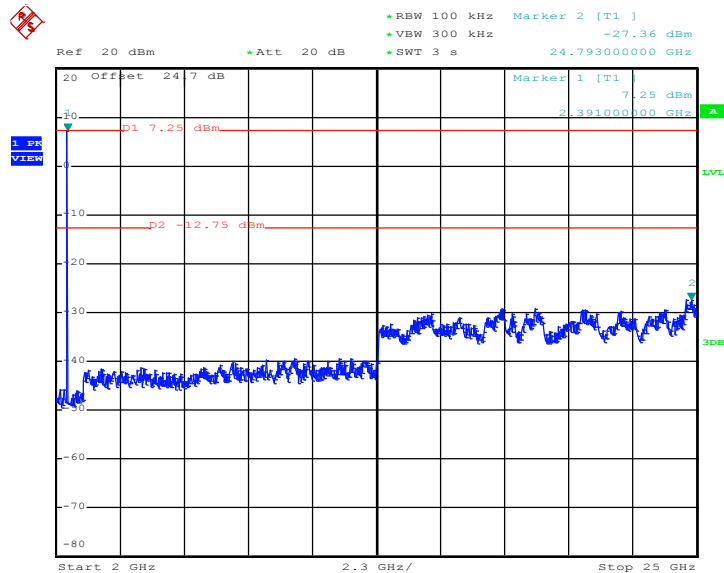

Date: 18.DEC.2017 19:43:16




1Mbps CSE Plot on Ch 39 between 30MHz ~ 3 GHz

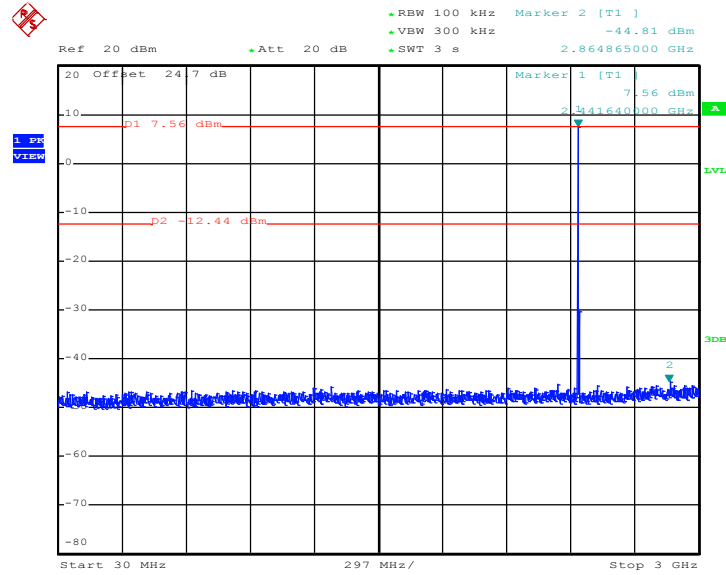

Date: 18.DEC.2017 19:53:26


1Mbps CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

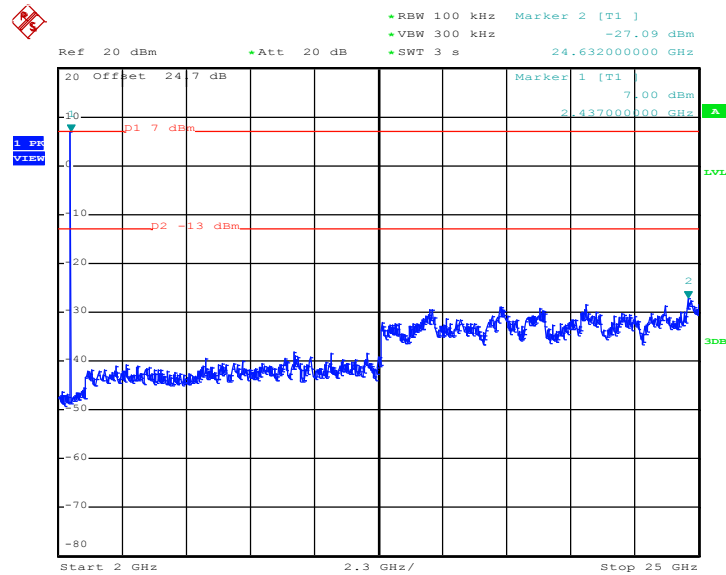

Date: 18.DEC.2017 19:54:49




1Mbps CSE Plot on Ch 78 between 30MHz ~ 3 GHz

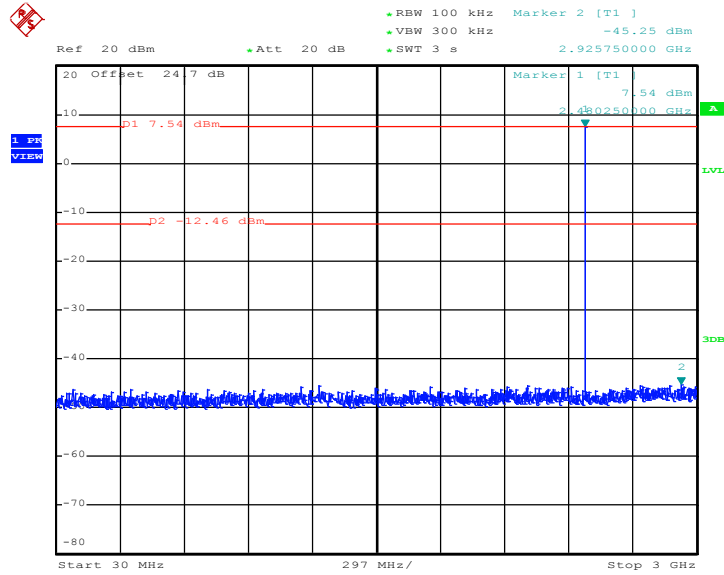

Date: 18.DEC.2017 20:02:02


1Mbps CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

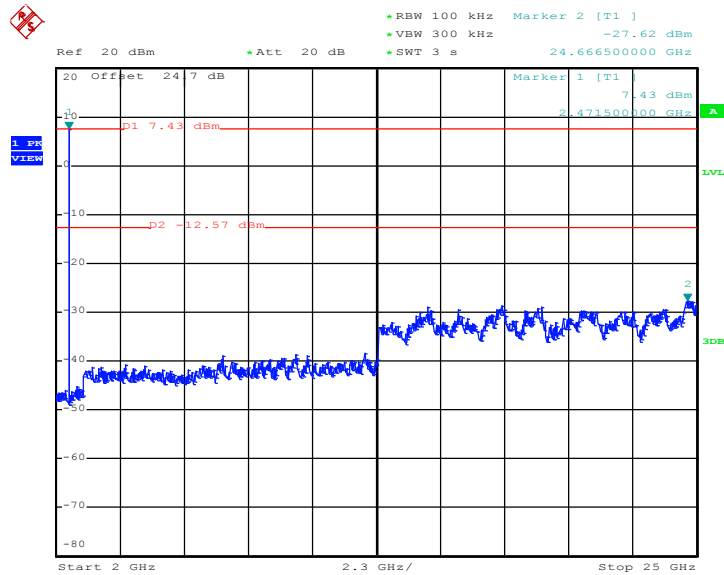

Date: 18.DEC.2017 20:03:15




2Mbps CSE Plot on Ch 00 between 30MHz ~ 3 GHz

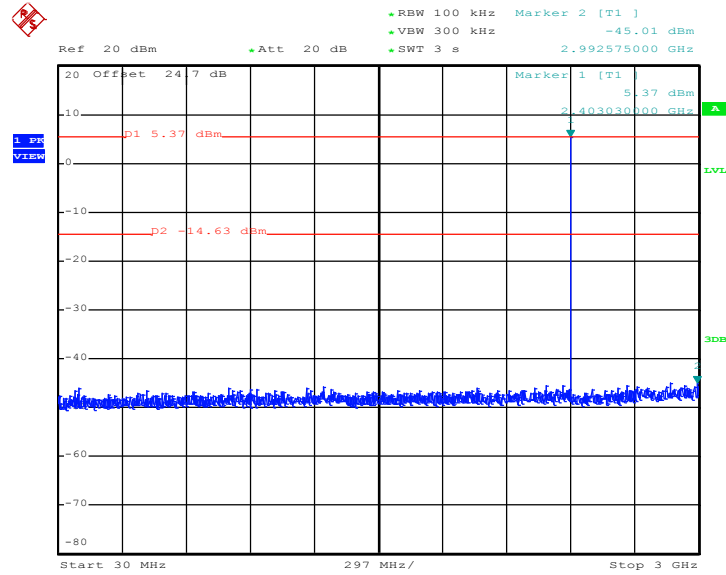

Date: 18.DEC.2017 20:41:38


2Mbps CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

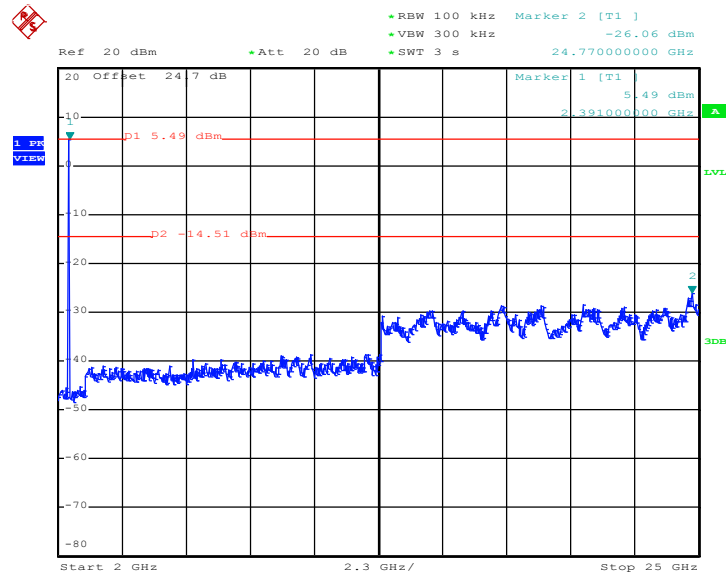

Date: 18.DEC.2017 20:43:54




2Mbps CSE Plot on Ch 39 between 30MHz ~ 3 GHz

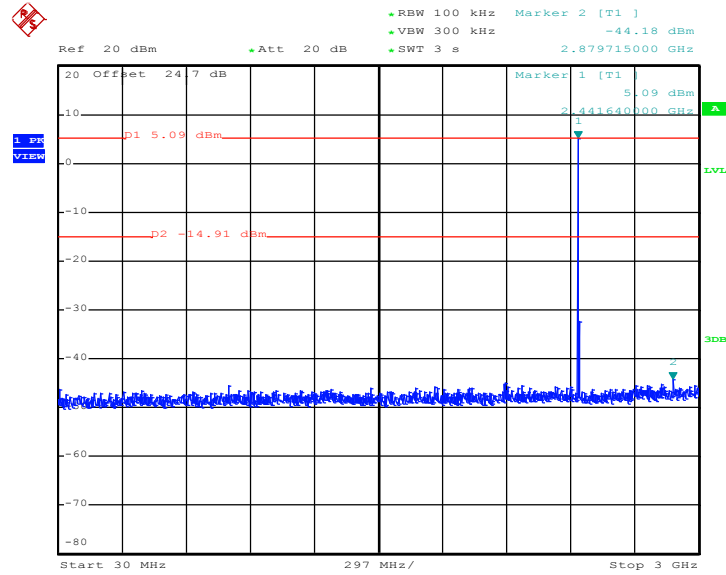

Date: 18.DEC.2017 20:52:42


2Mbps CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

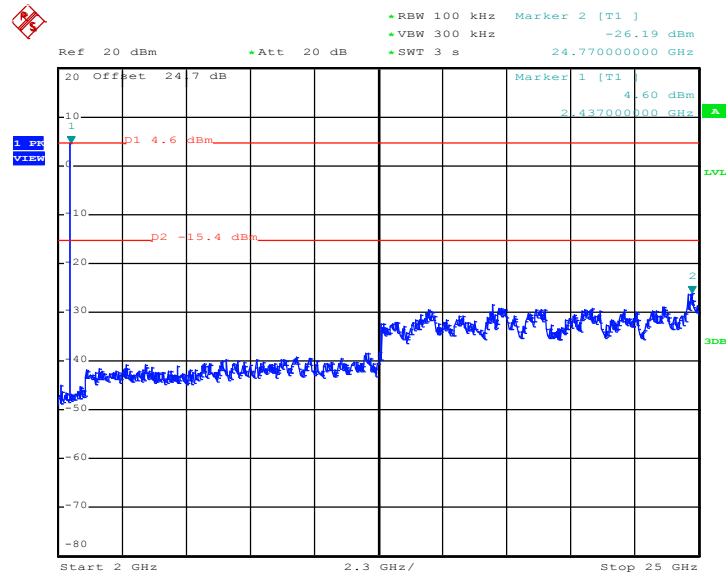

Date: 18.DEC.2017 20:54:24




2Mbps CSE Plot on Ch 78 between 30MHz ~ 3 GHz

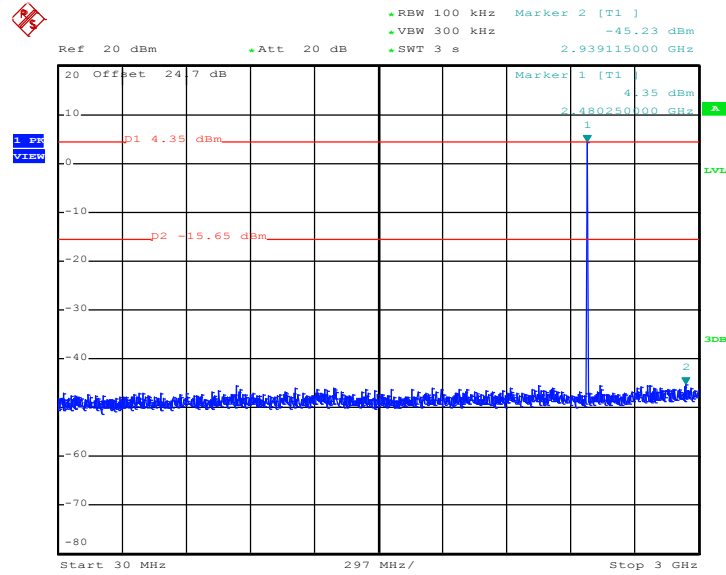

Date: 18.DEC.2017 21:05:25


2Mbps CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

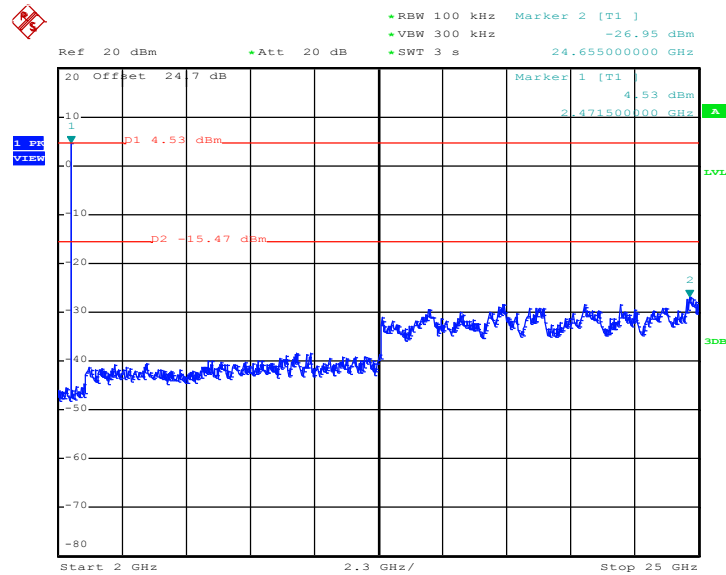

Date: 18.DEC.2017 21:04:50




3Mbps CSE Plot on Ch 00 between 30MHz ~ 3 GHz

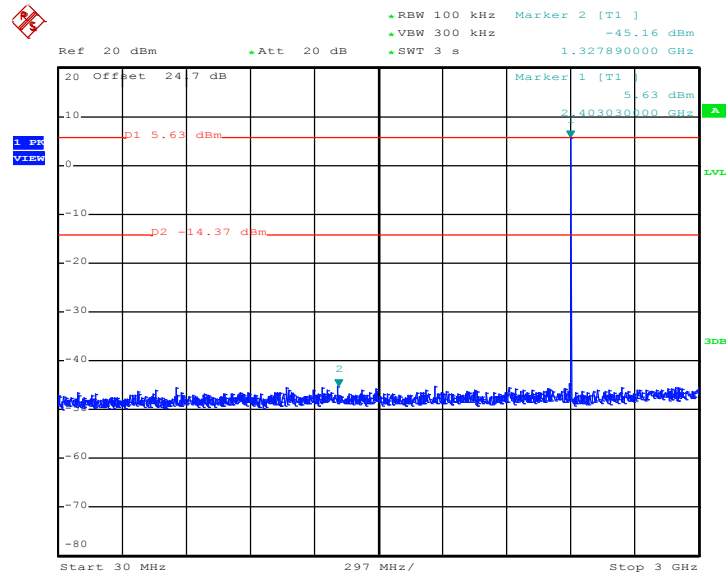

Date: 18.DEC.2017 21:13:14


3Mbps CSE Plot on Ch 00 between 2 GHz ~ 25 GHz

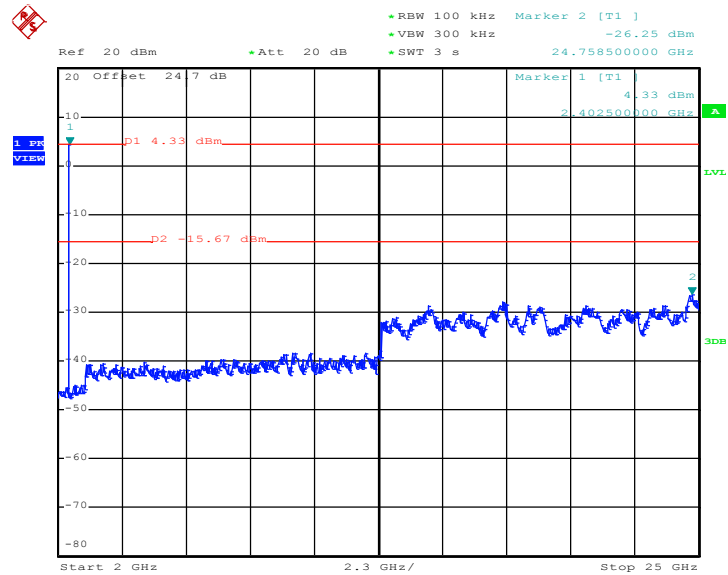

Date: 18.DEC.2017 21:17:21




3Mbps CSE Plot on Ch 39 between 30MHz ~ 3 GHz

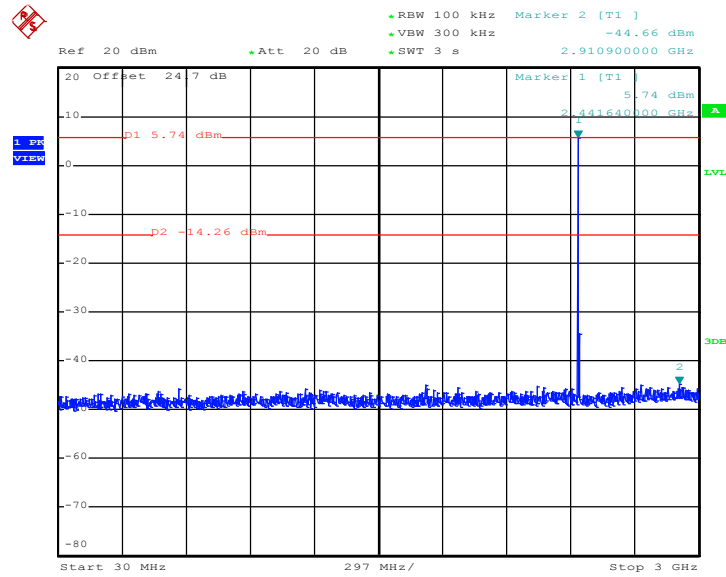

Date: 18.DEC.2017 21:22:55


3Mbps CSE Plot on Ch 39 between 2 GHz ~ 25 GHz

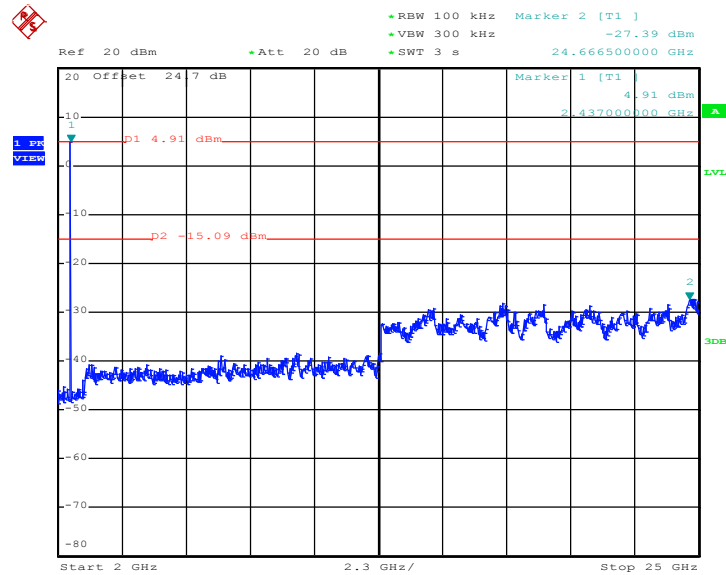

Date: 18.DEC.2017 21:24:23




3Mbps CSE Plot on Ch 78 between 30MHz ~ 3 GHz

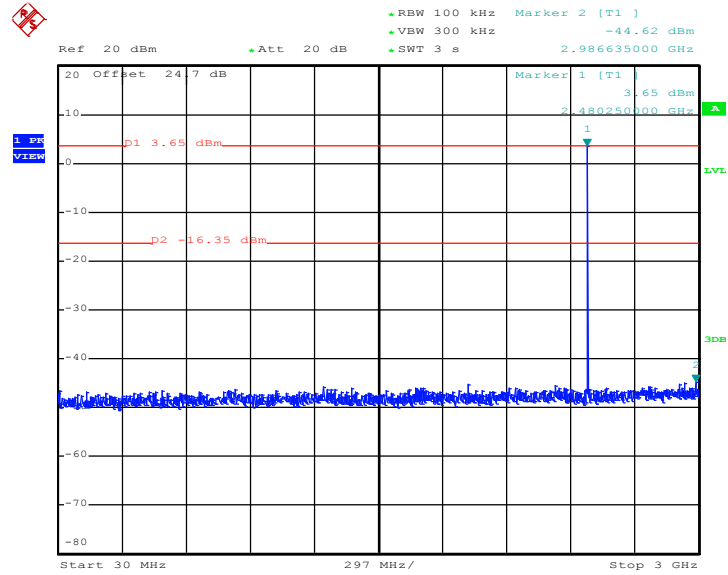

Date: 18.DEC.2017 21:29:32

3Mbps CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

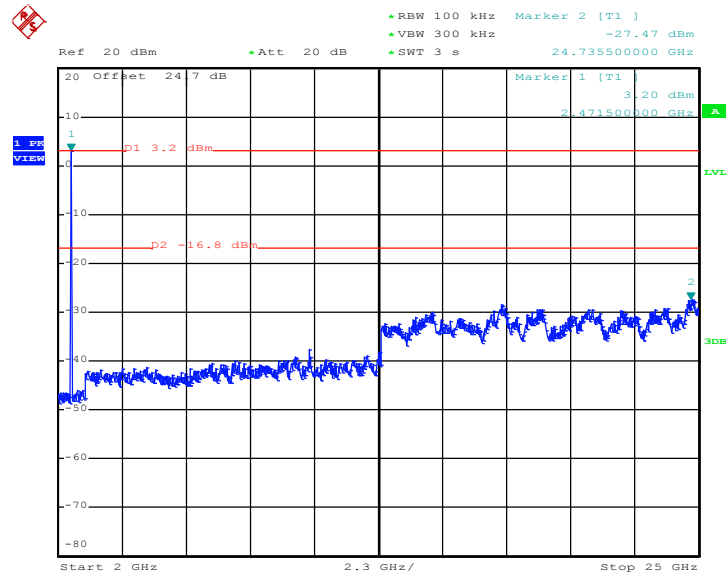

Date: 18.DEC.2017 21:30:34



3.8 Radiated Band Edges and Spurious Emission Measurement

3.8.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.8.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




3.8.3 Test Procedures

1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
4. Set to the maximum power setting and enable the EUT transmit continuously.
5. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1 \text{ GHz}$, RBW=1MHz for $f > 1\text{GHz}$; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
 - (3) For average measurement: use duty cycle correction factor method per 15.35(c).
Duty cycle = On time/100 milliseconds
On time = $N_1 * L_1 + N_2 * L_2 + \dots + N_{n-1} * L_{n-1} + N_n * L_n$
Where N_1 is number of type 1 pulses, L_1 is length of type 1 pulses, etc.
Average Emission Level = Peak Emission Level + $20 * \log(\text{Duty cycle})$
6. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
7. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
8. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.


The average levels were calculated from the peak level corrected with duty cycle correction factor (-24.76dB) derived from $20 \log(\text{dwell time}/100\text{ms})$. This correction is only for signals that hop with the fundamental signal, such as band-edge and harmonic. Other spurious signals that are independent of the hopping signal would not use this correction.

3.8.4 Test Setup


For radiated emissions below 30MHz

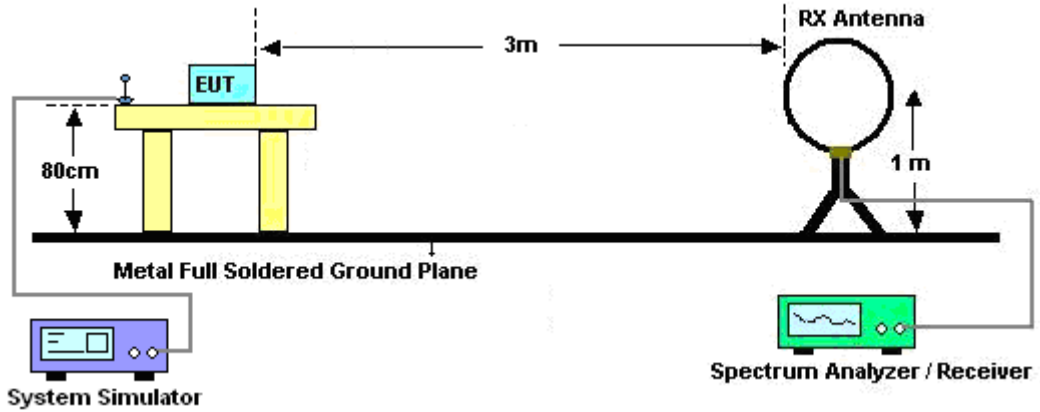

For radiated emissions from 30MHz to 1GHz

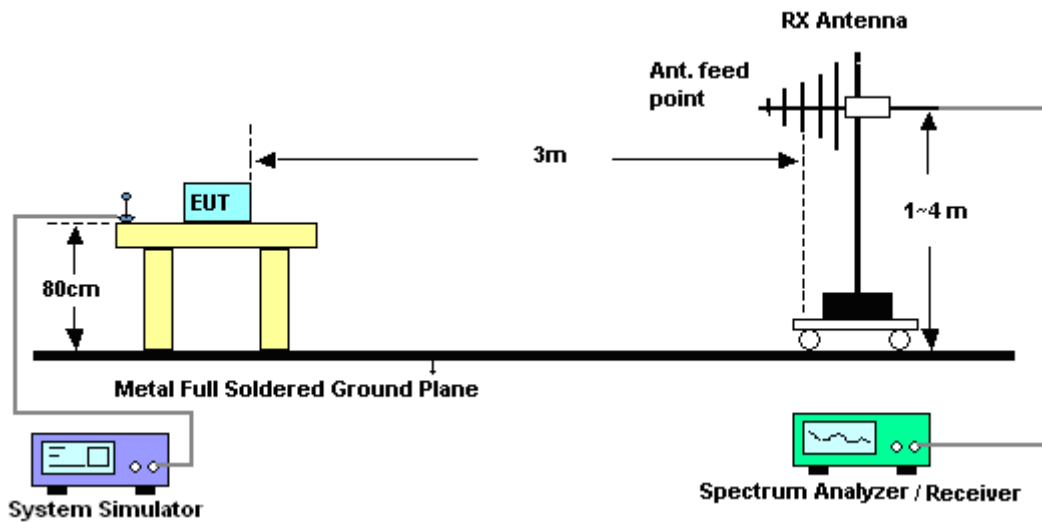

For radiated emissions above 1GHz

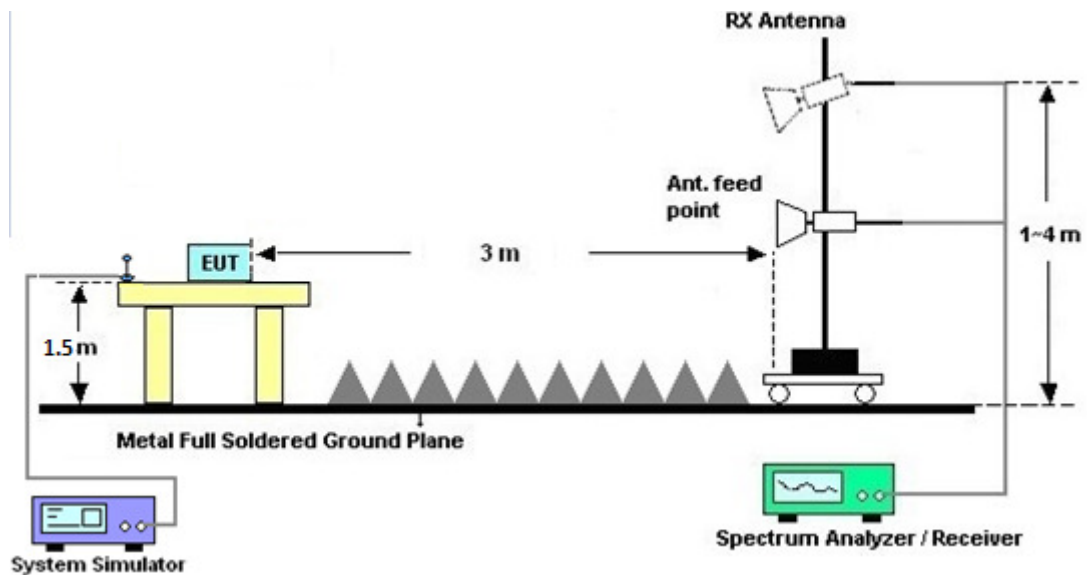

3.8.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.8.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B and C.

3.8.7 Duty Cycle

Please refer to Appendix D.

3.8.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix B and C.



3.9 Antenna Requirements

3.9.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.9.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.9.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Power Meter	Agilent	E4416A	GB41292344	N/A	Dec. 26, 2016	Dec. 11, 2017~ Dec. 18, 2017	Dec. 25, 2017	Conducted (TH05-HY)
Power Sensor	Agilent	E9327A	US40441548	50MHz~18GHz	Dec. 26, 2016	Dec. 11, 2017~ Dec. 18, 2017	Dec. 25, 2017	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101397	10Hz~40GHz	Nov. 09, 2017	Dec. 11, 2017~ Dec. 18, 2017	Nov. 08, 2018	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP40	100055	9kHz~40GHz	Jun. 20, 2017	Dec. 11, 2017~ Dec. 18, 2017	Jun. 19, 2018	Conducted (TH05-HY)
Hygrometer	TECPEL	DTM-303B	TP157151	N/A	Mar. 20, 2017	Dec. 11, 2017~ Dec. 18, 2017	Mar. 19, 2018	Conducted (TH05-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY84209521	1GHz~26GHz	Jan. 03, 2017	Dec. 11, 2017~ Dec. 18, 2017	Jan. 02, 2018	Conducted (TH05-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Nov. 23, 2017	Dec. 13, 2017~ Dec. 16, 2017	Nov. 22, 2019	Radiation (03CH11-HY)
Bilog Antenna	TESEQ	CBL 6111D&N-6-06	35414&AT-N0 602	30MHz~1GHz	Oct. 14, 2017	Dec. 13, 2017~ Dec. 16, 2017	Oct. 13, 2018	Radiation (03CH11-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1326	1GHz ~ 18GHz	Oct. 16, 2017	Dec. 13, 2017~ Dec. 16, 2017	Oct. 15, 2018	Radiation (03CH11-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170584	18GHz- 40GHz	Nov. 27, 2017	Dec. 13, 2017~ Dec. 16, 2017	Nov. 26, 2018	Radiation (03CH11-HY)
Spectrum Analyzer	Keysight	N9010A	MY54200486	10Hz ~ 44GHz	Oct. 19, 2017	Dec. 13, 2017~ Dec. 16, 2017	Oct. 18, 2018	Radiation (03CH11-HY)
Amplifier	SONOMA	310N	187312	9kHz~1GHz	Nov. 10, 2016	Dec. 13, 2017~ Dec. 16, 2017	Nov. 09, 2018	Radiation (03CH11-HY)
Preamplifier	Keysight	83017A	MY53270080	1GHz~26.5GHz	Nov. 10, 2016	Dec. 13, 2017~ Dec. 16, 2017	Nov. 09, 2018	Radiation (03CH11-HY)
Preamplifier	MITEQ	AMF-7D-00101800	2025787	1GHZ~18GHZ	Feb. 13, 2017	Dec. 13, 2017~ Dec. 16, 2017	Feb. 12, 2018	Radiation (03CH11-HY)
Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz,V SWR : 2.5:1 max	Jul. 18, 2017	Dec. 13, 2017~ Dec. 16, 2017	Jul. 17, 2018	Radiation (03CH11-HY)
Hygrometer	TECPEL	DTN-303B	TP140325	N/A	Oct. 12, 2017	Dec. 13, 2017~ Dec. 16, 2017	Oct. 11, 2018	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4 MY28419/4MY 28654/4	30MHz~1GHz	Sep. 11, 2017	Dec. 13, 2017~ Dec. 16, 2017	Sep. 10, 2018	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4 MY28419/4MY 28654/4	1GHz~25GHz	Sep. 11, 2017	Dec. 13, 2017~ Dec. 16, 2017	Sep. 10, 2018	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4 MY28419/4MY 28654/4	25GHz~40GHz	Sep. 11, 2017	Dec. 13, 2017~ Dec. 16, 2017	Sep. 10, 2018	Radiation (03CH11-HY)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Controller	EMEC	EM 1000	N/A	Control Turn table & Ant Mast	N/A	Dec. 13, 2017~ Dec. 16, 2017	N/A	Radiation (03CH11-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1~4m	N/A	Dec. 13, 2017~ Dec. 16, 2017	N/A	Radiation (03CH11-HY)
Turn Table	EMEC	TT 2000	N/A	0~360 Degree	N/A	Dec. 13, 2017~ Dec. 16, 2017	N/A	Radiation (03CH11-HY)
Test Software	Audix	E3	6.2009-8-24c	N/A	N/A	Dec. 13, 2017~ Dec. 16, 2017	N/A	Radiation (03CH11-HY)
Filter	Wainwright	WHKX12-1080-1200-1500-60SS	SNs2	1.2G High Pass	Sep. 18, 2017	Dec. 13, 2017~ Dec. 16, 2017	Sep. 17, 2018	Radiation (03CH11-HY)
Filter	Wainwright	WHKX12-2700-3000-18000-60SS	SN3	2.7G High Pass	Sep. 18, 2017	Dec. 13, 2017~ Dec. 16, 2017	Sep. 17, 2018	Radiation (03CH11-HY)



5 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.20
---	------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.50
---	------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.20
---	------

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Derek Hsu	Temperature:	21~25	°C
Test Date:	2017/12/11~2017/12/18	Relative Humidity:	51~54	%

TEST RESULTS DATA
20dB and Hopping Channel Separation

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	20db BW (MHz)	Hopping Channel Separation Measurement (MHz)	Hopping Channel Separation Measurement Limit (MHz)	Pass/Fail
DH	1Mbps	1	0	2402	1.05	1.00	0.6987	Pass
DH	1Mbps	1	39	2441	1.04	1.01	0.6960	Pass
DH	1Mbps	1	78	2480	1.04	1.00	0.6960	Pass
2DH	2Mbps	1	0	2402	1.35	1.00	0.9000	Pass
2DH	2Mbps	1	39	2441	1.36	1.00	0.9040	Pass
2DH	2Mbps	1	78	2480	1.35	1.00	0.9000	Pass
3DH	3Mbps	1	0	2402	1.31	1.00	0.8760	Pass
3DH	3Mbps	1	39	2441	1.31	1.00	0.8760	Pass
3DH	3Mbps	1	78	2480	1.31	1.01	0.8720	Pass

TEST RESULTS DATA
99% Bandwidth

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)
DH	1Mbps	1	0	2402	0.94
DH	1Mbps	1	39	2441	0.94
DH	1Mbps	1	78	2480	0.94
2DH	2Mbps	1	0	2402	1.20
2DH	2Mbps	1	39	2441	1.20
2DH	2Mbps	1	78	2480	1.20
3DH	3Mbps	1	0	2402	1.18
3DH	3Mbps	1	39	2441	1.18
3DH	3Mbps	1	78	2480	1.18

TEST RESULTS DATA
Dwell Time

Mod.	Hopping Channel Number Rate	Hops Over Occupancy Time(hops)	Package Transfer Time (msec)	Dwell Time (sec)	Limits (sec)	Pass/Fail
Nomal	79	106.67	2.90	0.31	0.4	Pass
AFH	20	53.33	2.90	0.15	0.4	Pass

TEST RESULTS DATA

Peak Power Table

DH	channel		Peak Power (dBm)	Power Limit (dBm)	Test Result
DH1	0	1	8.50	20.97	Pass
	39	1	8.69	20.97	Pass
	78	1	8.40	20.97	Pass
2DH1	0	1	9.02	20.97	Pass
	39	1	8.50	20.97	Pass
	78	1	7.53	20.97	Pass
3DH1	0	1	9.28	20.97	Pass
	39	1	8.87	20.97	Pass
	78	1	7.75	20.97	Pass

TEST RESULTS DATA

Average Power Table

(Reporting Only)

DH	CH.	NTX	Average Power (dBm)	Duty Factor (dB)
DH1	0	1	8.10	5.12
	39	1	8.39	5.12
	78	1	8.12	5.12
2DH1	0	1	6.45	5.08
	39	1	5.89	5.08
	78	1	4.60	5.08
3DH1	0	1	6.45	5.07
	39	1	5.87	5.07
	78	1	4.64	5.07

TEST RESULTS DATA

Number of Hopping Frequency

Number of Hopping (Channel)	Adaptive Frequency Hopping (Channel)	Limits (Channel)	Pass/Fail
79	20	>15	Pass



Appendix B. Radiated Spurious Emission

Test Engineer :	Hao Hsu, Jacky Hung, and Ken Wu	Temperature :	26~28°C
		Relative Humidity :	52~57%

2.4GHz 2400~2483.5MHz

BT (1M) (Band Edge @ 3m)

BT	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
BT CH00 2402MHz		2351.895	41.58	-32.42	74	41.92	27.04	6.22	33.6	311	204	P	H	
		2351.895	16.82	-37.18	54	-	-	-	-	-	-	A	H	
	*	2402	92.77	-	-	92.87	27.13	6.36	33.59	311	204	P	H	
	*	2402	68.01	-	-	-	-	-	-	-	-	A	H	
													H	
														H
			2358.51	42.17	-31.83	74	42.44	27.04	6.29	33.6	248	221	P	V
			2358.51	17.41	-36.59	54	-	-	-	-	-	-	A	V
	*	2402	93.34	-	-	93.44	27.13	6.36	33.59	248	221	P	V	
	*	2402	68.58	-	-	-	-	-	-	-	-	-	A	V
														V
														V
BT CH 39 2441MHz		2373.7	42.13	-31.87	74	42.35	27.09	6.29	33.6	333	202	P	H	
		2373.7	17.37	-36.63	54	-	-	-	-	-	-	A	H	
	*	2441	95.06	-	-	94.99	27.27	6.38	33.58	333	202	P	H	
	*	2441	70.3	-	-	-	-	-	-	-	-	A	H	
			2489.22	41.76	-32.24	74	41.55	27.4	6.39	33.58	333	202	P	H
			2489.22	17	-37	54	-	-	-	-	-	-	A	H
			2362.08	41.64	-32.36	74	41.91	27.04	6.29	33.6	269	224	P	V
			2362.08	16.88	-37.12	54	-	-	-	-	-	-	A	V
	*	2441	95.08	-	-	95.01	27.27	6.38	33.58	269	224	P	V	
	*	2441	70.32	-	-	-	-	-	-	-	-	-	A	V
			2485.51	41.93	-32.07	74	41.76	27.36	6.39	33.58	269	224	P	V
			2485.51	17.17	-36.83	54	-	-	-	-	-	-	A	V



BT CH 78 2480MHz	*	2480	96.26	-	-	96.1	27.36	6.38	33.58	400	199	P	H
	*	2480	71.5	-	-	-	-	-	-	-	-	A	H
		2491.28	42.76	-31.24	74	42.55	27.4	6.39	33.58	400	199	P	H
		2491.28	18	-36	54	-	-	-	-	-	-	A	H
													H
													H
	*	2480	96.39	-	-	96.23	27.36	6.38	33.58	264	222	P	V
	*	2480	71.63	-	-	-	-	-	-	-	-	A	V
		2487.04	42.36	-31.64	74	42.19	27.36	6.39	33.58	264	222	P	V
		2487.04	17.6	-36.4	54	-	-	-	-	-	-	A	V
													V
													V
Remark	<ol style="list-style-type: none"> 1. No other spurious found. 2. All results are PASS against Peak and Average limit line. 												



2.4GHz 2400~2483.5MHz

BT (1M) (Harmonic @ 3m)

BT	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
BT CH 00 2402MHz		4804	46.39	-27.61	74	69.85	31.26	9.6	64.75	100	0	P	H	
		4804	21.63	-32.37	54	-	-	-	-	-	-	A	H	
													H	
													H	
		4804	41.34	-32.66	74	64.8	31.26	9.6	64.75	100	0	P	V	
		4804	16.58	-37.42	54	-	-	-	-	-	-	-	A	V
														V
														V
BT CH 39 2441MHz		4882	43.47	-30.53	74	66.8	31.38	9.56	64.7	100	0	P	H	
		4882	18.71	-35.29	54	-	-	-	-	-	-	A	H	
		7323	42.6	-31.4	74	59.36	36.32	11.31	64.83	100	0	P	H	
		7323	17.84	-36.16	54	-	-	-	-	-	-	A	H	
		4882	39.9	-34.1	74	63.23	31.38	9.56	64.7	100	0	P	V	
		4882	15.14	-38.86	54	-	-	-	-	-	-	-	A	V
		7323	42.65	-31.35	74	59.41	36.32	11.31	64.83	100	0	P	V	
		7323	17.89	-36.11	54	-	-	-	-	-	-	-	A	V
BT CH 78 2480MHz		4960	40.63	-33.37	74	63.75	31.54	9.53	64.63	100	0	P	H	
		4960	15.87	-38.13	54	-	-	-	-	-	-	A	H	
		7440	42.67	-31.33	74	59.24	36.59	11.34	64.88	100	0	P	H	
		7440	17.91	-36.09	54	-	-	-	-	-	-	A	H	
		4960	40.36	-33.64	74	63.48	31.54	9.53	64.63	100	0	P	V	
		4960	15.6	-38.4	54	-	-	-	-	-	-	A	V	
		7440	42.18	-31.82	74	58.75	36.59	11.34	64.88	100	0	P	V	
		7440	17.42	-36.58	54	-	-	-	-	-	-	-	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



Emission below 1GHz

2.4GHz BT (1M) (LF)

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
2.4GHz BT LF		30.27	20.92	-19.08	40	28.21	24.36	0.82	32.5	-	-	P	H	
		122.88	19.45	-24.05	43.5	32.85	17.51	1.51	32.46	-	-	P	H	
		245.46	21.99	-24.01	46	34.42	17.93	1.95	32.38	-	-	P	H	
		390.3	25.2	-20.8	46	33.47	21.44	2.56	32.33	-	-	P	H	
		631.8	27.75	-18.25	46	30.61	26.35	3.15	32.46	-	-	P	H	
		853	32.31	-13.69	46	31.15	29.24	3.67	31.9	100	0	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			40.8	30.53	-9.47	40	43.36	18.83	0.82	32.49	100	0	P	V
			119.91	21.69	-21.81	43.5	35.21	17.51	1.39	32.46	-	-	P	V
			244.92	22.76	-23.24	46	35.19	17.93	1.95	32.38	-	-	P	V
			390.3	22.74	-23.26	46	31.01	21.44	2.56	32.33	-	-	P	V
			649.3	27.62	-18.38	46	30.26	26.51	3.2	32.46	-	-	P	V
			857.9	32.47	-13.53	46	31.15	29.38	3.67	31.88	-	-	P	V
													V	
												V		
												V		
												V		
												V		
												V		
Remark	1. No other spurious found. 2. All results are PASS against limit line.													



2.4GHz 2400~2483.5MHz

BT (2M) (Band Edge @ 3m)

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
BT CH00 2402MHz		2370.48	41.95	-32.05	74	42.17	27.09	6.29	33.6	312	199	P	H	
		2370.48	17.16	-36.84	54	-	-	-	-	-	-	A	H	
	*	2402	93.33	-	-	93.43	27.13	6.36	33.59	312	199	P	H	
	*	2402	68.54	-	-	-	-	-	-	-	-	A	H	
													H	
													H	
			2377.41	42.07	-31.93	74	42.29	27.09	6.29	33.6	248	224	P	V
			2377.41	17.28	-36.72	54	-	-	-	-	-	-	A	V
	*	2402	93.26	-	-	-	93.36	27.13	6.36	33.59	248	224	P	V
	*	2402	68.47	-	-	-	-	-	-	-	-	-	A	V
														V
														V
BT CH 39 2441MHz		2317.98	41.82	-32.18	74	42.33	26.95	6.15	33.61	334	205	P	H	
		2317.98	17.03	-36.97	54	-	-	-	-	-	-	A	H	
	*	2441	94.36	-	-	94.29	27.27	6.38	33.58	334	205	P	H	
	*	2441	69.57	-	-	-	-	-	-	-	-	A	H	
			2489.92	41.39	-32.61	74	41.18	27.4	6.39	33.58	334	205	P	H
			2489.92	16.6	-37.4	54	-	-	-	-	-	-	A	H
			2363.48	41.76	-32.24	74	42.03	27.04	6.29	33.6	238	218	P	V
			2363.48	16.97	-37.03	54	-	-	-	-	-	-	A	V
	*	2441	94.68	-	-	-	94.61	27.27	6.38	33.58	238	218	P	V
	*	2441	69.89	-	-	-	-	-	-	-	-	-	A	V
			2490.97	41.68	-32.32	74	41.47	27.4	6.39	33.58	238	218	P	V
			2490.97	16.89	-37.11	54	-	-	-	-	-	-	A	V



BT CH 78 2480MHz	*	2480	94.6	-	-	94.44	27.36	6.38	33.58	400	200	P	H
	*	2480	69.81	-	-	-	-	-	-	-	-	A	H
		2483.84	42.42	-31.58	74	42.26	27.36	6.38	33.58	400	200	P	H
		2483.84	17.63	-36.37	54	-	-	-	-	-	-	A	H
													H
													H
	*	2480	94.63	-	-	94.47	27.36	6.38	33.58	209	221	P	V
	*	2480	69.84	-	-	-	-	-	-	-	-	A	V
		2492.24	41.81	-32.19	74	41.59	27.4	6.39	33.57	209	221	P	V
		2492.24	17.02	-36.98	54	-	-	-	-	-	-	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

BT (2M) (Harmonic @ 3m)

BT	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
BT CH 00 2402MHz		4804	44.72	-29.28	74	68.18	31.26	9.6	64.75	100	0	P	H	
		4804	19.93	-34.07	54	-	-	-	-	-	-	A	H	
													H	
													H	
		4804	39.98	-34.02	74	63.44	31.26	9.6	64.75	100	0	P	V	
		4804	15.19	-38.81	54	-	-	-	-	-	-	-	A	V
														V
														V
BT CH 39 2441MHz		4882	41.69	-32.31	74	65.02	31.38	9.56	64.7	100	0	P	H	
		4882	16.9	-37.1	54	-	-	-	-	-	-	A	H	
		7323	42.42	-31.58	74	59.18	36.32	11.31	64.83	100	0	P	H	
		7323	17.63	-36.37	54	-	-	-	-	-	-	A	H	
		4882	40.53	-33.47	74	63.86	31.38	9.56	64.7	100	0	P	V	
		4882	15.74	-38.26	54	-	-	-	-	-	-	A	V	
		7323	42.77	-31.23	74	59.53	36.32	11.31	64.83	100	0	P	V	
		7323	17.98	-36.02	54	-	-	-	-	-	-	A	V	
BT CH 78 2480MHz		4960	40.01	-33.99	74	63.13	31.54	9.53	64.63	100	0	P	H	
		4960	15.22	-38.78	54	-	-	-	-	-	-	A	H	
		7440	42.07	-31.93	74	58.64	36.59	11.34	64.88	100	0	P	H	
		7440	17.28	-36.72	54	-	-	-	-	-	-	A	H	
		4960	39.38	-34.62	74	62.5	31.54	9.53	64.63	100	0	P	V	
		4960	14.59	-39.41	54	-	-	-	-	-	-	A	V	
		7440	42.45	-31.55	74	59.02	36.59	11.34	64.88	100	0	P	V	
		7440	17.66	-36.34	54	-	-	-	-	-	-	A	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



2.4GHz 2400~2483.5MHz

BT (3M) (Band Edge @ 3m)

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
BT CH00 2402MHz		2334.99	41.57	-32.43	74	41.96	27	6.22	33.61	311	200	P	H	
		2334.99	16.81	-37.19	54	-	-	-	-	-	-	A	H	
	*	2402	92.92	-	-	93.02	27.13	6.36	33.59	311	200	P	H	
	*	2402	68.16	-	-	-	-	-	-	-	-	A	H	
													H	
														H
			2334.045	42.19	-31.81	74	42.63	26.95	6.22	33.61	245	223	P	V
			2334.045	17.43	-36.57	54	-	-	-	-	-	-	A	V
	*		2402	93.46	-	-	93.56	27.13	6.36	33.59	245	223	P	V
	*		2402	68.7	-	-	-	-	-	-	-	-	A	V
														V
	BT CH 39 2441MHz		2364.74	41.65	-32.35	74	41.92	27.04	6.29	33.6	297	202	P	H
		2364.74	16.89	-37.11	54	-	-	-	-	-	-	A	H	
*		2441	94.4	-	-	94.33	27.27	6.38	33.58	297	202	P	H	
*		2441	69.64	-	-	-	-	-	-	-	-	A	H	
			2490.76	42.64	-31.36	74	42.43	27.4	6.39	33.58	297	202	P	H
			2490.76	17.88	-36.12	54	-	-	-	-	-	-	A	H
			2389.8	41.65	-32.35	74	41.75	27.13	6.36	33.59	297	326	P	V
			2389.8	16.89	-37.11	54	-	-	-	-	-	-	A	V
*			2441	94.12	-	-	94.05	27.27	6.38	33.58	297	326	P	V
*			2441	69.36	-	-	-	-	-	-	-	-	A	V
			2493.21	41.64	-32.36	74	41.42	27.4	6.39	33.57	297	326	P	V
			2493.21	16.88	-37.12	54	-	-	-	-	-	-	A	V



BT CH 78 2480MHz	*	2480	94.36	-	-	94.2	27.36	6.38	33.58	323	198	P	H
		2480	69.6	-	-	-	-	-	-	-	-	A	H
		2492.04	41.81	-32.19	74	41.59	27.4	6.39	33.57	323	198	P	H
		2492.04	17.05	-36.95	54	-	-	-	-	-	-	A	H
													H
													H
	*	2480	94.9	-	-	94.74	27.36	6.38	33.58	277	329	P	V
		2480	70.14	-	-	-	-	-	-	-	-	A	V
		2491.12	41.88	-32.12	74	41.67	27.4	6.39	33.58	277	329	P	V
		2491.12	17.12	-36.88	54	-	-	-	-	-	-	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

BT (3M) (Harmonic @ 3m)

BT	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BT CH 00 2402MHz		4804	45.59	-28.41	74	69.05	31.26	9.6	64.75	100	0	P	H
		4804	20.83	-33.17	54	-	-	-	-	-	-	A	H
													H
													H
		4804	39.76	-34.24	74	63.22	31.26	9.6	64.75	100	0	P	V
		4804	15	-39	54	-	-	-	-	-	-	A	V
													V
													V
BT CH 39 2441MHz		4882	41.85	-32.15	74	65.18	31.38	9.56	64.7	100	0	P	H
		4882	17.09	-36.91	54	-	-	-	-	-	-	A	H
		7323	42.48	-31.52	74	59.24	36.32	11.31	64.83	100	0	P	H
		7323	17.72	-36.28	54	-	-	-	-	-	-	A	H
		4882	39.53	-34.47	74	62.86	31.38	9.56	64.7	100	0	P	V
		4882	14.77	-39.23	54	-	-	-	-	-	-	A	V
		7323	42.27	-31.73	74	59.03	36.32	11.31	64.83	100	0	P	V
		7323	17.51	-36.49	54	-	-	-	-	-	-	A	V
BT CH 78 2480MHz		4960	41.7	-32.3	74	64.82	31.54	9.53	64.63	100	0	P	H
		4960	16.94	-37.06	54	-	-	-	-	-	-	A	H
		7440	42.12	-31.88	74	58.69	36.59	11.34	64.88	100	0	P	H
		7440	17.36	-36.64	54	-	-	-	-	-	-	A	H
		4960	40.32	-33.68	74	63.44	31.54	9.53	64.63	100	0	P	V
		4960	15.56	-38.44	54	-	-	-	-	-	-	A	V
		7440	43.21	-30.79	74	59.78	36.59	11.34	64.88	100	0	P	V
		7440	18.45	-35.55	54	-	-	-	-	-	-	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

- Level(dBμV/m) =
Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

- Level(dBμV/m)
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
- Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

- Level(dBμV/m)
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
- Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix C. Radiated Spurious Emission Plots

Test Engineer :	Hao Hsu, Jacky Hung, and Ken Wu	Temperature :	26~28°C
		Relative Humidity :	52~57%

2.4GHz 2400~2483.5MHz




BT (1M) (Band Edge @ 3m)

BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT (1M) CH00 2402MHz	
1	Horizontal	Fundamental
Peak	<p>Site : 03CH11-HY Condition : PEAK_8E_74 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 7D0542</p>	<p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 9120D-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 7D0542</p>






BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT (1M) CH00 2402MHz	
1	Vertical	Fundamental
Peak	<p>Site : 03CH11-14Y Condition : PEAK_BE_74 3m HORN 91200-HF VERTICAL Detector : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Project : 7D0542</p>	<p>Site : 03CH11-14Y Condition : PEAK_74 3m HORN 91200-HF VERTICAL Detector : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Project : 7D0542</p>

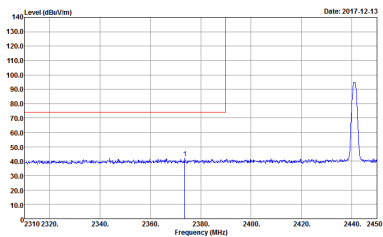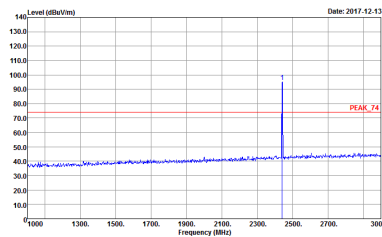
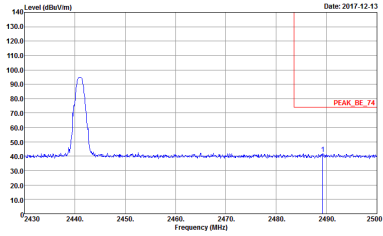


BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT (1M) CH39 2441MHz	
1	Horizontal	Fundamental
Peak	 <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 7D0542</p>	 <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 7D0542</p>
Peak	 <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 7D0542</p>	Left blank

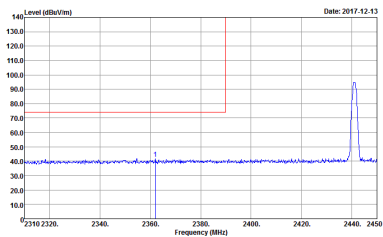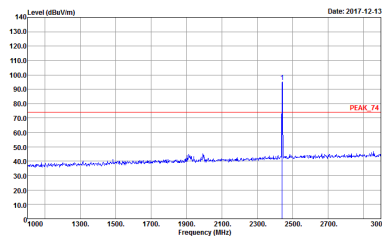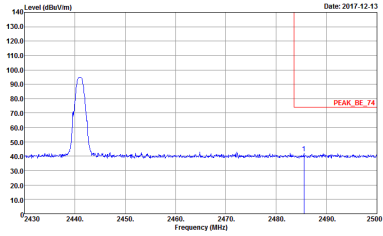

BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT (1M) CH39 2441MHz	
1	Vertical	Fundamental
Peak	 <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 7D0542</p>	 <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 7D0542</p>
Peak	 <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 7D0542</p>	Left blank

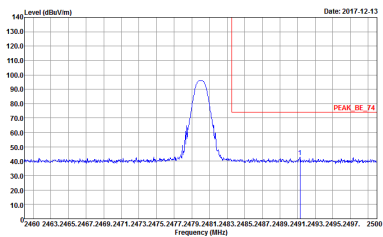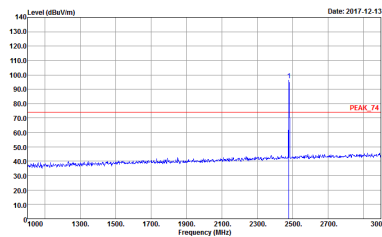

BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT (1M) CH78 2480MHz	
1	Horizontal	Fundamental
Peak	 <p>Date: 2017.12.13</p> <p>Site : 03CH11-14Y Condition : PEAK_BE_74 3m HORN 91200-HF HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 7D0542</p>	 <p>Date: 2017.12.13</p> <p>Site : 03CH11-14Y Condition : PEAK_74 3m HORN 91200-HF HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 7D0542</p>





BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT (1M) CH78 2480MHz	
1	Vertical	Fundamental
Peak	<p>Site : 03CH11-14Y Condition : PEAK_BE_74 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 7D0542</p>	<p>Site : 03CH11-14Y Condition : PEAK_74 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 7D0542</p>



2.4GHz 2400~2483.5MHz

BT (1M) (Harmonic @ 3m)

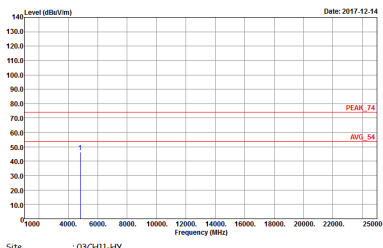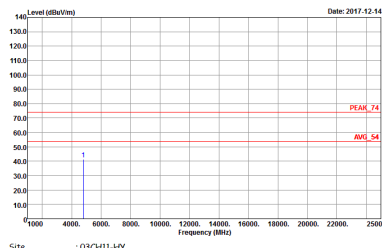BT	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BT (1M) CH00 2402MHz	
1	Horizontal	Vertical
Peak Avg.	 <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-HF HORIZONTAL Detector : Peak Project : 7D0542</p>	 <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-HF VERTICAL Detector : Peak Project : 7D0542</p>



BT	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BT (1M) CH39 2441MHz	
1	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH11-11Y Condition : PEAK_74 3m HORN 91200-HF HORIZONTAL Detector : Peak Project : 7D0542</p>	<p>Site : 03CH11-11Y Condition : PEAK_74 3m HORN 91200-HF VERTICAL Detector : Peak Project : 7D0542</p>





BT	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BT (1M) CH78 2480MHz	
1	Horizontal	Vertical
Peak Avg.	<p>Horizontal spectrum plot showing Level (dBuV/m) vs Frequency (MHz). The plot displays two distinct peaks labeled '1' and '2' at approximately 5.5 MHz and 7.5 MHz respectively. The y-axis ranges from 0 to 140 dBuV/m, and the x-axis ranges from 0 to 25000 MHz. Two horizontal red lines indicate the 'PEAK_74' and 'AVG_54' levels. The date is 2017.12.14. Metadata: Site: 03CH11-11Y, Condition: PEAK_74 3m HORN 91200-HF HORIZONTAL, Detector: Peak, Project: 7D0542.</p>	<p>Vertical spectrum plot showing Level (dBuV/m) vs Frequency (MHz). The plot displays two distinct peaks labeled '1' and '2' at approximately 5.5 MHz and 7.5 MHz respectively. The y-axis ranges from 0 to 140 dBuV/m, and the x-axis ranges from 0 to 25000 MHz. Two horizontal red lines indicate the 'PEAK_74' and 'AVG_54' levels. The date is 2017.12.14. Metadata: Site: 03CH11-11Y, Condition: PEAK_74 3m HORN 91200-HF VERTICAL, Detector: Peak, Project: 7D0542.</p>



Emission below 1GHz



2.4GHz BT (1M) (LF)

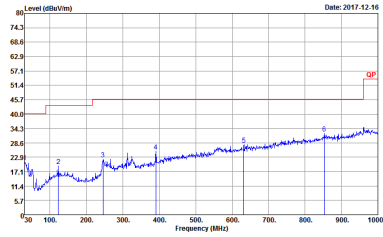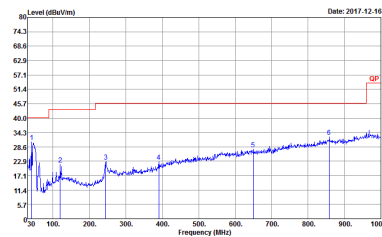BT	2.4GHz 2400~2483.5MHz	
ANT	BT (1M) LF	
1	Horizontal	Vertical
QP / Peak	 <p>Site : 03CH11-HY Condition : QP 3m BT-L06 6111D-LF_ETC HORIZONTAL Detector : Peak Project : 7D0542</p>	 <p>Site : 03CH11-HY Condition : QP 3m BT-L06 6111D-LF_ETC VERTICAL Detector : Peak Project : 7D0542</p>



2.4GHz 2400~2483.5MHz




BT (2M) (Band Edge @ 3m)

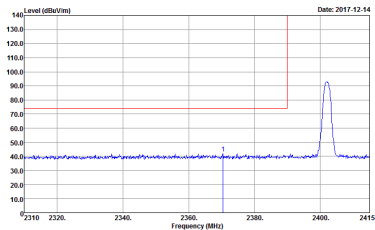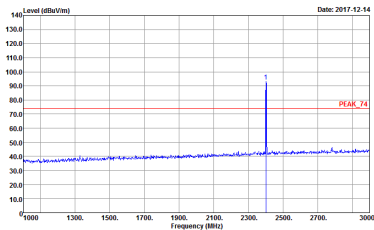BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT (2M) CH00 2402MHz	
1	Horizontal	Fundamental
Peak	 <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 9120D-HF HORIZONTAL Detector : Peak Project : 7D0542</p>	 <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 9120D-HF HORIZONTAL Detector : Peak Project : 7D0542</p>






BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT (2M) CH00 2402MHz	
1	Vertical	Fundamental
Peak	<p>Site : 03CH11-14Y Condition : PEAK_BE_74 3m HORN 91200-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 7D0542</p>	<p>Site : 03CH11-14Y Condition : PEAK_74 3m HORN 91200-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 7D0542</p>

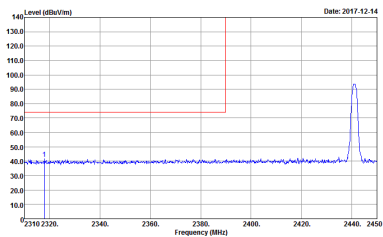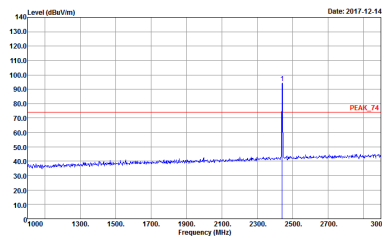
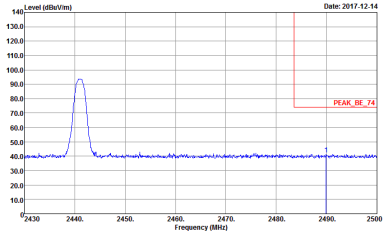


BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT (2M) CH39 2441MHz	
1	Horizontal	Fundamental
Peak	 <p> Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF HORIZONTAL Detector : Peak Project : 7D0542 </p>	 <p> Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-HF HORIZONTAL Detector : Peak Project : 7D0542 </p>
Peak	 <p> Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF HORIZONTAL Detector : Peak Project : 7D0542 </p>	Left blank

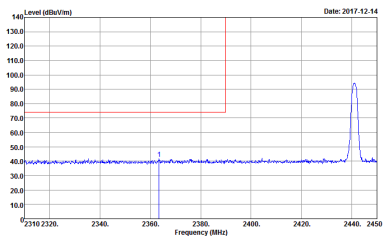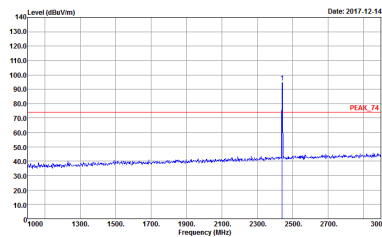
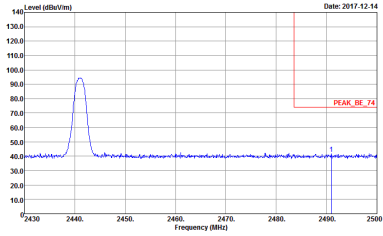


BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT (2M) CH39 2441MHz	
1	Vertical	Fundamental
<p>Peak</p>	 <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 7D0542</p>	 <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 7D0542</p>
<p>Peak</p>	 <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 7D0542</p>	<p>Left blank</p>

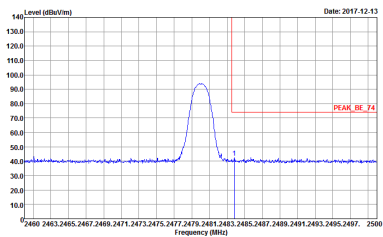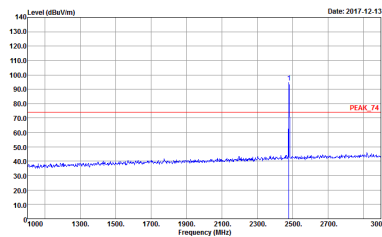

BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT (2M) CH78 2480MHz	
1	Horizontal	Fundamental
Peak	 <p>Site : 03CH11-14Y Condition : PEAK_BE_74 3m HORN 91200-HF HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 7D0542</p>	 <p>Site : 03CH11-14Y Condition : PEAK_74 3m HORN 91200-HF HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 7D0542</p>

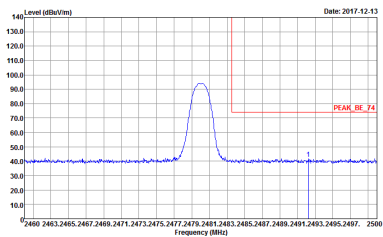
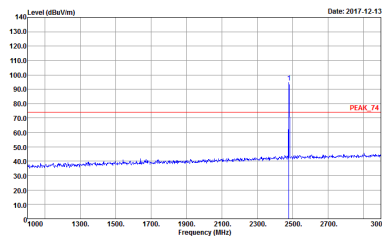


BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT (2M) CH78 2480MHz	
1	Vertical	Fundamental
Peak	 <p>Site : 03CH11-14Y Condition : PEAK_BE_74 3m HORN 91200-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 7D0542</p>	 <p>Site : 03CH11-14Y Condition : PEAK_74 3m HORN 91200-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 7D0542</p>





2.4GHz 2400~2483.5MHz

BT (2M) (Harmonic @ 3m)

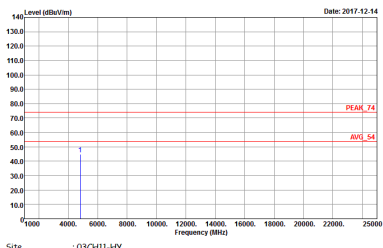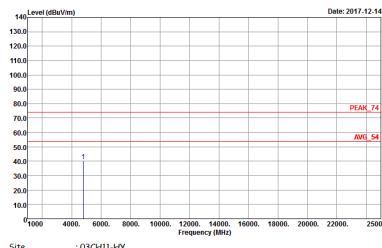BT	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BT (2M) CH00 2402MHz	
1	Horizontal	Vertical
Peak Avg.	 <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-HF HORIZONTAL Detector : Peak Project : 7D0542</p>	 <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-HF VERTICAL Detector : Peak Project : 7D0542</p>

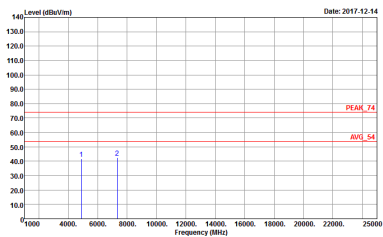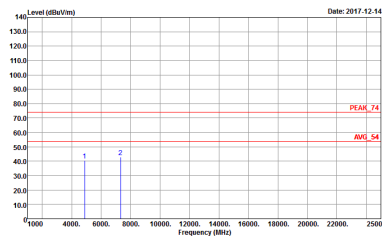

BT	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BT (2M) CH39 2441MHz	
1	Horizontal	Vertical
Peak Avg.	 <p>Site : 03CH11-11Y Condition : PEAK_74 3m HORN 91200-HF HORIZONTAL Detector : Peak Project : 7D0542</p>	 <p>Site : 03CH11-11Y Condition : PEAK_74 3m HORN 91200-HF VERTICAL Detector : Peak Project : 7D0542</p>





BT	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BT (2M) CH78 2480MHz	
1	Horizontal	Vertical
<p>Peak Avg.</p>		



2.4GHz 2400~2483.5MHz




BT (3M) (Band Edge @ 3m)

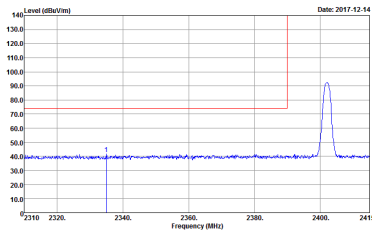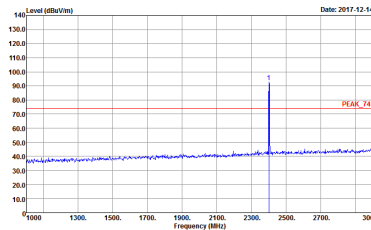BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT (3M) CH00 2402MHz	
1	Horizontal	Fundamental
Peak	 <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 9120D-HF HORIZONTAL Detector : Peak Project : 7D0542</p>	 <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 9120D-HF HORIZONTAL Detector : Peak Project : 7D0542</p>






BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT (3M) CH00 2402MHz	
1	Vertical	Fundamental
Peak	<p>Site : 03CH11-14Y Condition : PEAK_BE_74 3m HORN 91200-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 7D0542</p>	<p>Site : 03CH11-14Y Condition : PEAK_74 3m HORN 91200-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 7D0542</p>

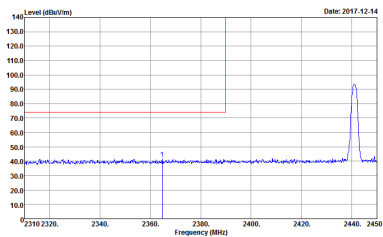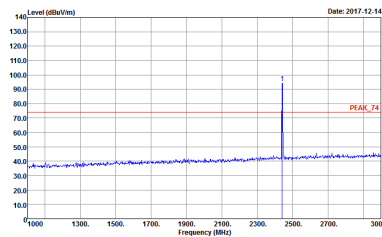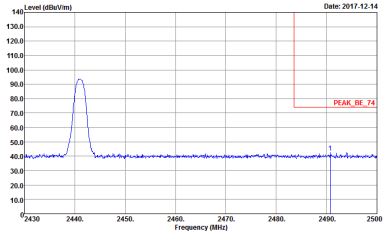

BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT (3M) CH39 2441MHz	
1	Horizontal	Fundamental
Peak	 <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 7D0542</p>	 <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 7D0542</p>
Peak	 <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 7D0542</p>	Left blank

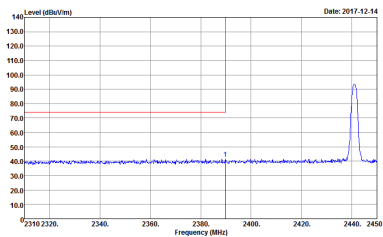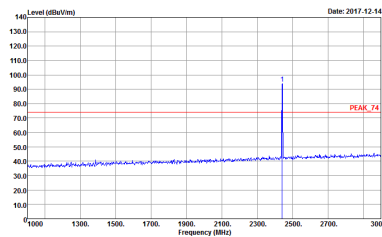
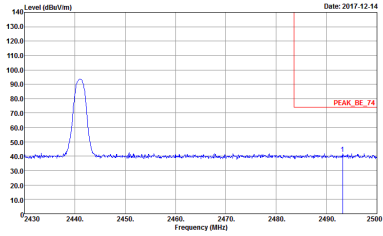


BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT (3M) CH39 2441MHz	
1	Vertical	Fundamental
Peak	 <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 7D0542</p>	 <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 7D0542</p>
Peak	 <p>Site : 03CH11-HY Condition : PEAK_BE_74 3m HORN 91200-HF VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 7D0542</p>	Left blank



BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT (3M) CH78 2480MHz	
1	Horizontal	Fundamental
Peak	<p>Site : 03CH11-14Y Condition : PEAK_BE_74 3m HORN 91200-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 7D0542</p>	<p>Site : 03CH11-14Y Condition : PEAK_74 3m HORN 91200-HF HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 7D0542</p>

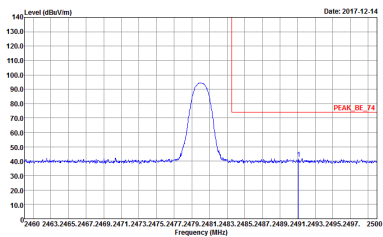
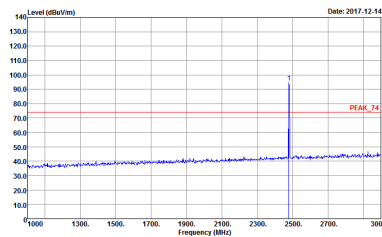


BT	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BT (3M) CH78 2480MHz	
1	Vertical	Fundamental
Peak	 <p>Site : 03CH11-14Y Condition : PEAK_BE_74 3m HORN 91200-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 7D0542</p>	 <p>Site : 03CH11-14Y Condition : PEAK_74 3m HORN 91200-HF VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 7D0542</p>





2.4GHz 2400~2483.5MHz



BT (3M) (Harmonic @ 3m)

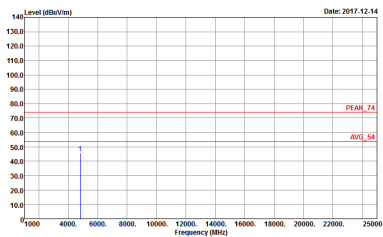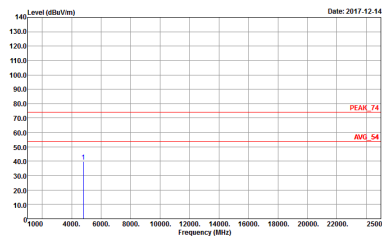BT	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BT (3M) CH00 2402MHz	
1	Horizontal	Vertical
<p>Peak Avg.</p>	 <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-HF HORIZONTAL Detector : Peak Project : 7D0542</p>	 <p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-HF VERTICAL Detector : Peak Project : 7D0542</p>

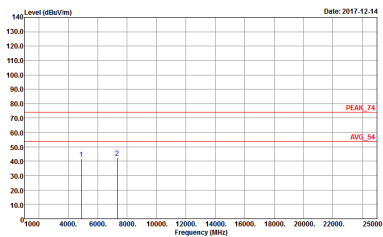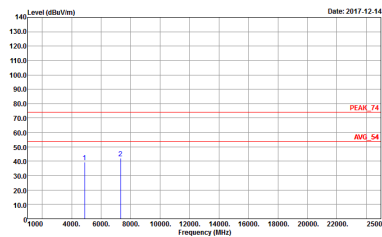

BT	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BT (3M) CH39 2441MHz	
1	Horizontal	Vertical
Peak Avg.	 <p>Site : 03CH11-11Y Condition : PEAK_74 3m HORN 91200-HF HORIZONTAL Detector : Peak Project : 7D0542</p>	 <p>Site : 03CH11-11Y Condition : PEAK_74 3m HORN 91200-HF VERTICAL Detector : Peak Project : 7D0542</p>

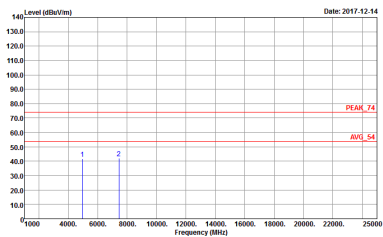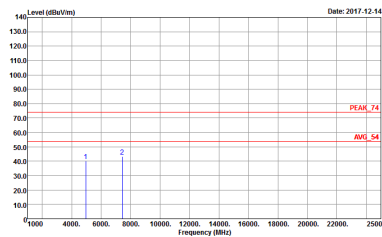


BT	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BT (3M) CH78 2480MHz	
1	Horizontal	Vertical
Peak Avg.	 <p>Site : 03CH11-11Y Condition : PEAK_74 3m HORN 91200-HF HORIZONTAL Detector : Peak Project : 7D0542</p>	 <p>Site : 03CH11-11Y Condition : PEAK_74 3m HORN 91200-HF VERTICAL Detector : Peak Project : 7D0542</p>




Appendix D. Duty Cycle Plots

<1Mbps>

DH5 on time (One Pulse) Plot on Channel 39

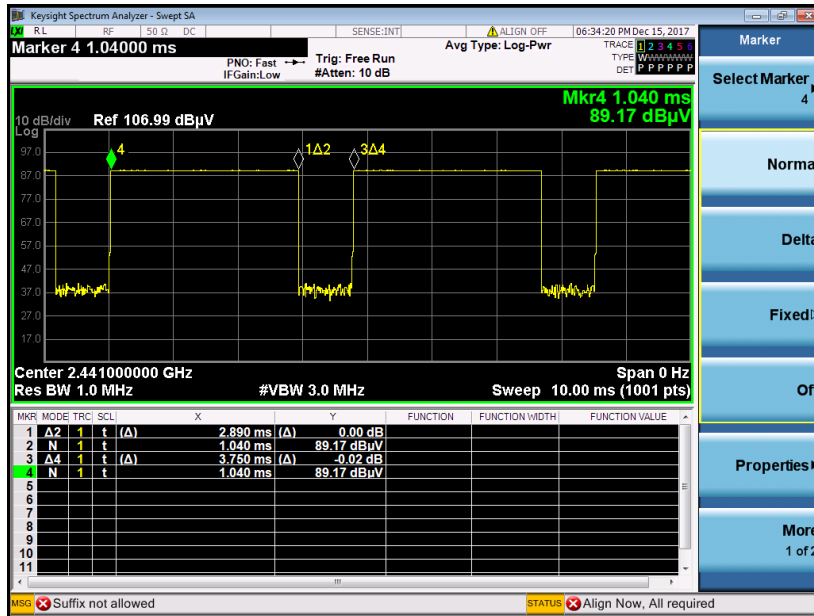

on time (Count Pulses) Plot on Channel 39

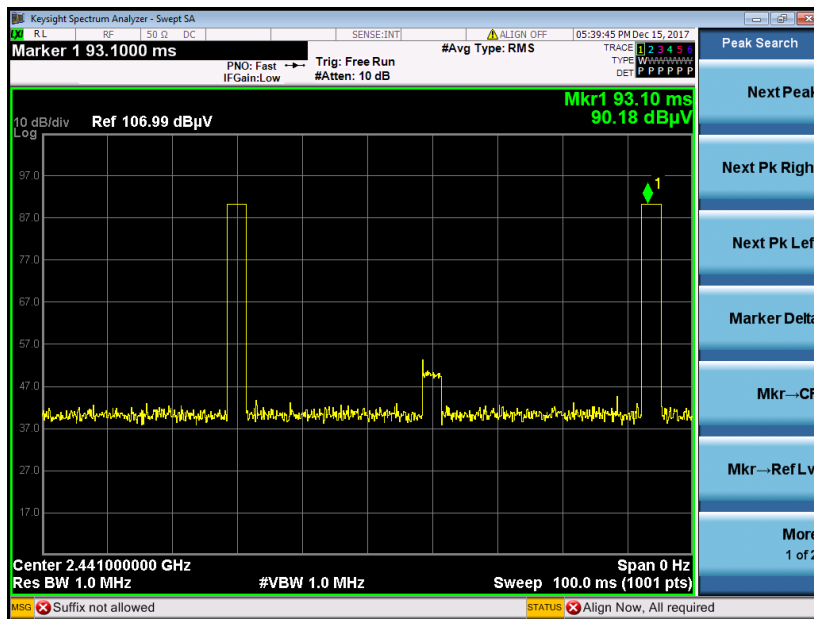


Note:

1. Worst case Duty cycle = on time/100 milliseconds = $2 * 2.89 / 100 = 5.78 \%$
2. Worst case Duty cycle correction factor = $20 * \log(\text{Duty cycle}) = -24.76 \text{ dB}$
3. DH5 has the highest duty cycle worst case and is reported.




<2Mbps>

2DH5 on time (One Pulse) Plot on Channel 39

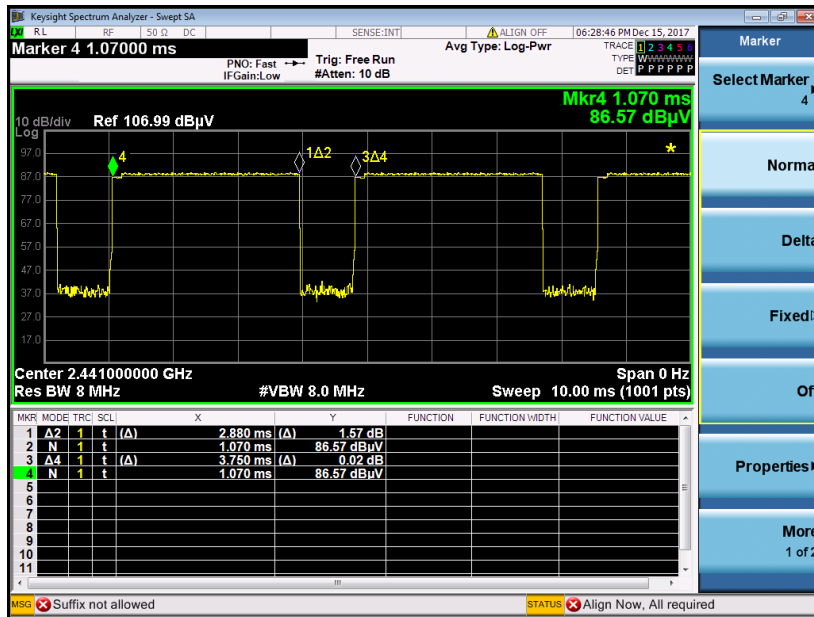

on time (Count Pulses) Plot on Channel 39

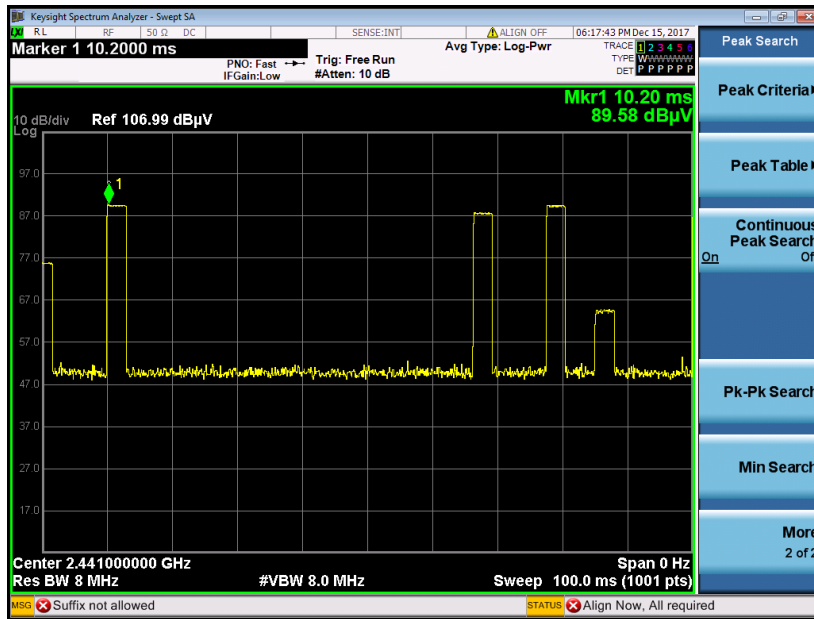


Note:

1. Worst case Duty cycle = on time/100 milliseconds = 2 * 2.88 / 100 = 5.76 %
2. Worst case Duty cycle correction factor = 20*log(Duty cycle) = -24.79 dB
3. 2DH5 has the highest duty cycle worst case and is reported.




<3Mbps>

3DH5 on time (One Pulse) Plot on Channel 39

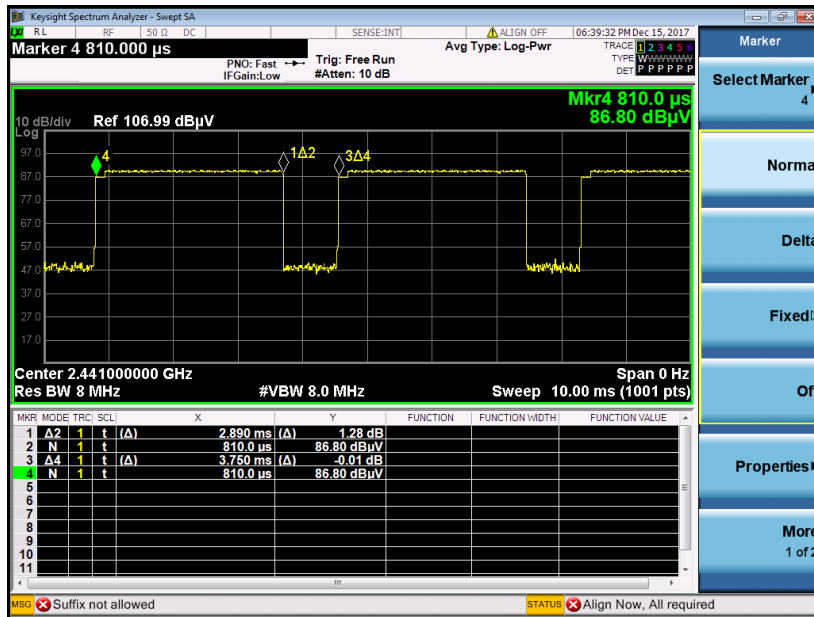

on time (Count Pulses) Plot on Channel 39

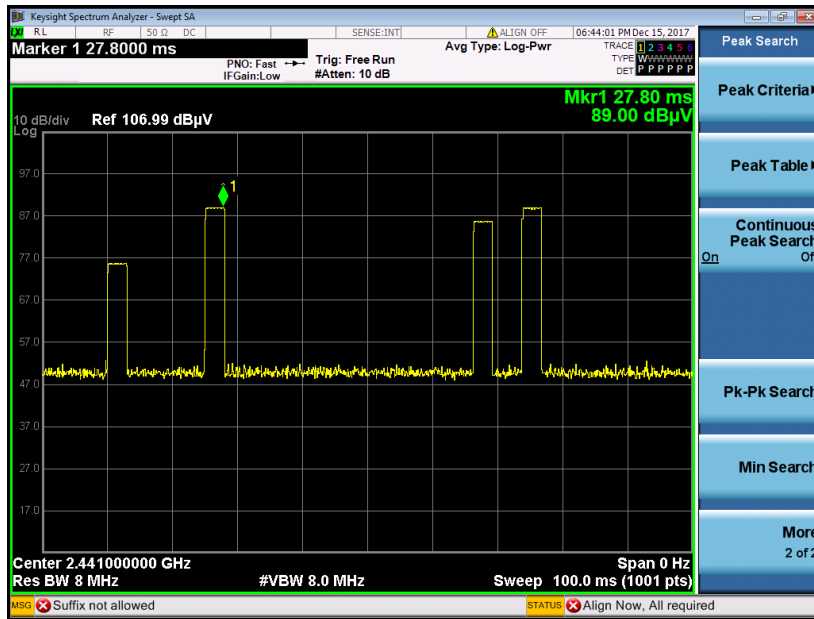

Note:

1. Worst case Duty cycle = on time/100 milliseconds = 2 * 2.89 / 100 = 5.78 %
2. Worst case Duty cycle correction factor = 20*log(Duty cycle) = -24.76 dB
3. 3DH5 has the highest duty cycle worst case and is reported.



Duty Cycle Correction Factor Consideration for AFH mode:

Bluetooth normal hopping rate is 1600Hz and reduced to 800Hz in AFH mode; due to the reduced number of hopping frequencies, with the same packet configuration the dwell time in each channel frequency within 100msec period is longer in AFH mode than normal mode.

In AFH mode, the minimum hopping frequencies are 20, to get the longest dwell time DH5 packet is observed; the period to have DH5 packet completing one hopping sequence is

$$2.89 \text{ ms} \times 20 \text{ channels} = 57.8 \text{ ms}$$

There cannot be 2 complete hopping sequences within 100ms period, considering the random hopping behavior, maximum 2 hops can be possibly observed within the period. $[100\text{ms} / 57.6\text{ms}] = 2$ hops

Thus, the maximum possible ON time:

$$2.89 \text{ ms} \times 2 = 5.78 \text{ ms}$$

Worst case Duty Cycle Correction factor, which is derived from the maximum possible ON time,

$$20 \times \log(5.78 \text{ ms}/100\text{ms}) = -24.76 \text{ dB}$$