


4.2 Configuration and peripherals

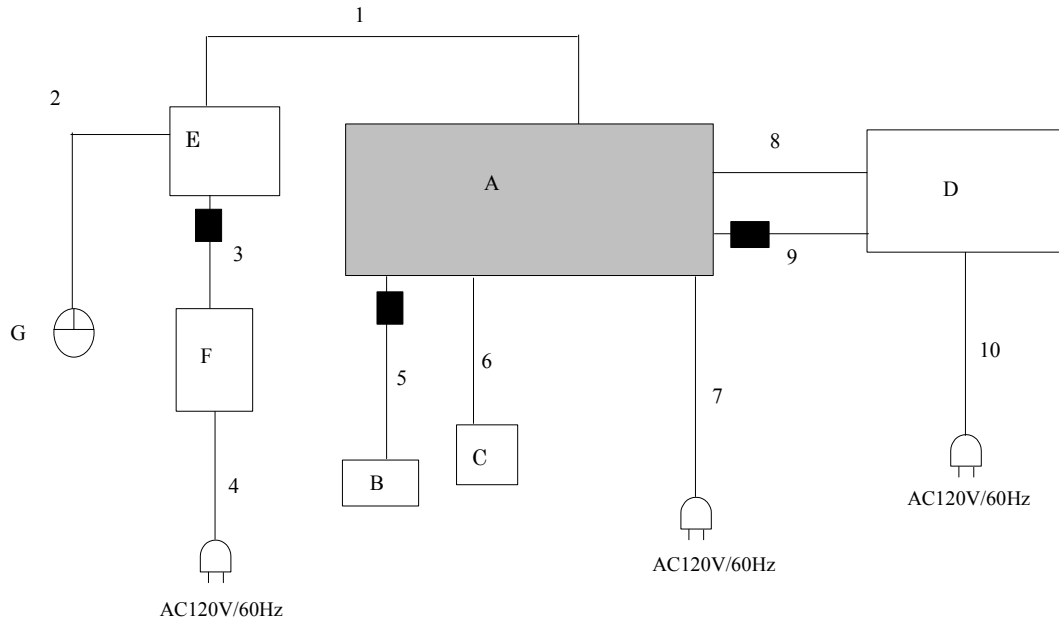

■ : Standard Ferrite Core

* Cabling and setup were taken into consideration and test data was taken under worse case conditions.

Description of EUT and Support equipment

No.	Item	Model number	Serial number	Manufacturer	Remarks
A	PLAYSTATION®3	CECHG01	1040181	Sony Computer Entertainment Inc.	EUT
B	PLAYSTATION®3 Controller	CECHZC1J	046092401751	Sony Computer Entertainment Inc.	-
C	PSP	PSP1000	27400000-0782619	Sony Computer Entertainment Inc.	-
D	Display	MDT201WS	5Z001932GJ	MITSUBISHI	-
E	Note PC	ThinkPad X40	KV-DNK71	IBM	-
F	AC Adaptor	02K6808	11S02K6808 Z1Z 89H52GA21	IBM	-
G	Mouse	M-UB48	LZE02601001	Logitech	-

List of cables used

No.	Name	Length (m)	Cable Shielding	Connector Shielding	Remark
1	LAN Cable	2.9	Unshielded	Unshielded	-
2	USB Cable	0.8	Shielded	Shielded	-
3	DC Cable	2.0	Unshielded	Unshielded	One ferrite core (standard attachment)
4	AC Cable	1.0	Unshielded	Unshielded	-
5	USB Cable	1.5	Shielded	Shielded	One ferrite core (standard attachment)
6	USB Cable	0.5	Shielded	Shielded	-
7	AC Cable	2.5	Unshielded	Unshielded	-
8	HDMI Cable	2.0	Shielded	Shielded	-
9	AV Multi Cable	2.5	Unshielded	Unshielded	One ferrite core (standard attachment)
10	AC Cable	2.0	Unshielded	Unshielded	-

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

APPENDIX 1: Photographs of test setup

Conducted Emission

Front



Rear



Spurious Emission (Radiated)

Front



Rear



Worst Case Position
(Horizontal: X-axis/ Vertical: X-axis)

X-axis



Y-axis

