

A

B

C

D

E



F

DRAWING

SONY STANDARD

A3

14.11

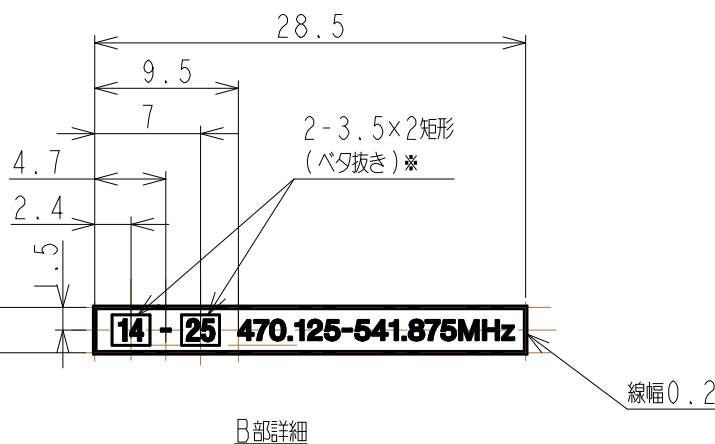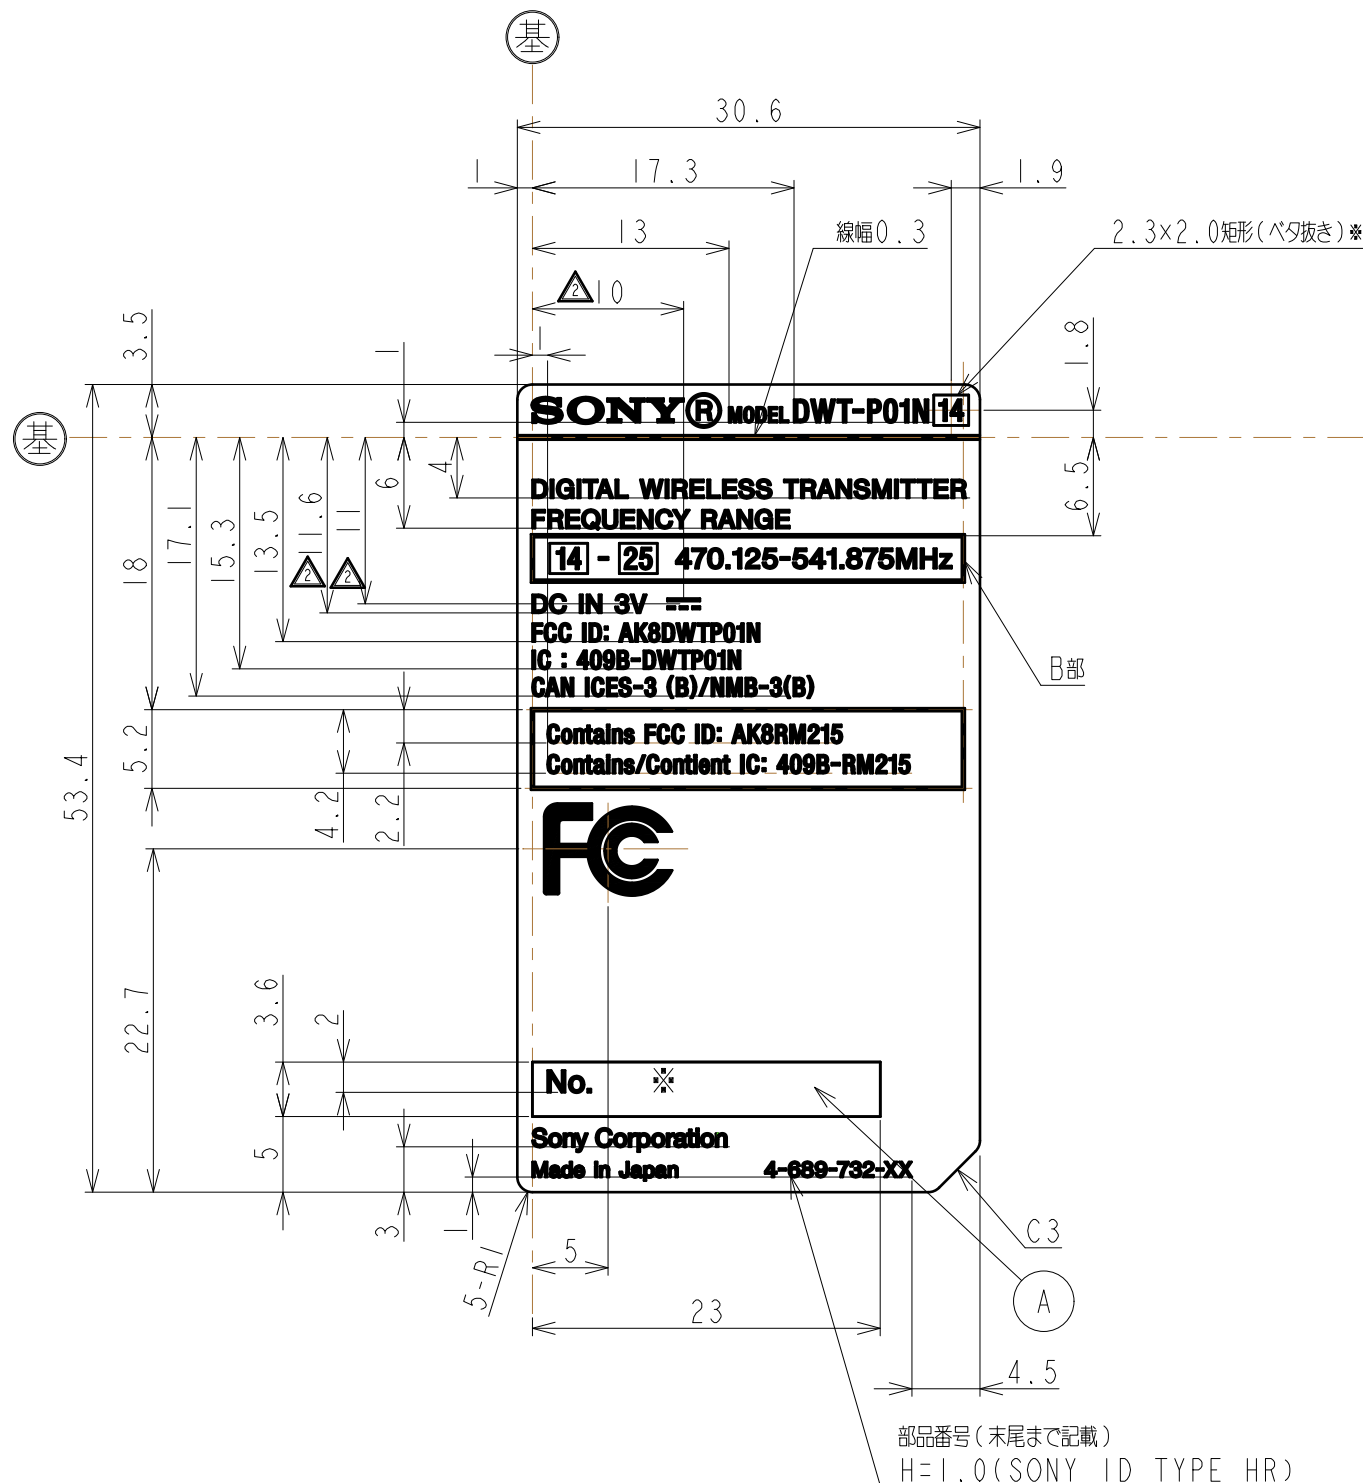

ポリエステルフィルム
+0.025 ラミネート(ツヤ消し)

印刷面

ポリエステルフィルム +0.05

アルミ蒸着

アクリル系感圧性接着剤
(リンテック社R-type相当品)

シリコン含浸剥離紙

材料構成図


記 載 文 字	字 高	タイプフェース	印 刷 色
SONY®	L=10	SONY LOGO TYPE Rマーク付	シルバーメタリック （抜き文字）
MODEL	H=1.0	SONY ID TYPE HRC	
DWT-P01N	H=1.5		
DIGITAL WIRELESS TRANSMITTER	H=1.2	SONY ID TYPE HR	
FREQUENCY RANGE			
14 . 14 . - . 25	H=1.4	SONY ID TYPE HRC	黒色
470.125-541.875MHz	H=1.3	SONY ID TYPE HR	シルバーメタリック （抜き文字）
FCC ID: AK8DWTPO1N IC : 409B-DWTP01N CAN ICES-3 (B)/NMB-3(B)	H=1.2	SONY ID TYPE HRC	
Contains FCC ID: AK8RM215 Contains/Contient IC: 409B-RM215			
FC	a=6.0	清刷参照	
Sony Corporation	H=1.2	清刷参照	
Made in Japan	H=1.0	SONY ID TYPE HR	黒色
No.	H=1.2		シルバーメタリック （抜き文字）
DC IN 3V			
==	a=1.5	清刷参照	

△

△

- 注1)印刷色は、地:「黒艶消」、文字:「銀」処理のこと。ただし、※指示部は、地:「銀」、文字:「黒艶消」とする。
- 2)図中A部に字高2mmでシリアルNoを記載。(発注時に別途連絡)
- 3)品質特性:STM-1077「ソニー部品設計基準-機銘板」の7項に定める各特性を満足すること。
- 4)版下は校正承認を要し、納入形態は別途打合わせのこと。
- 5)この部品は、部番:4-138-255-の外形型流用のこと。

Purchase recycled resins and wire rods only from the business partners that Sony approves as Green Partners.
再生樹脂・被覆電線はグリーンパートナー認定取引先から調達すること。


△x						GENERAL TOLERANCE <table><tr><td colspan="2">STS-3</td></tr><tr><td>L</td><td>4 ±0.2</td></tr><tr><td>4<L</td><td>16 ±0.3</td></tr><tr><td>16<L</td><td>63 ±0.4</td></tr><tr><td>63<L</td><td>250 ±0.5</td></tr><tr><td>250<L</td><td>400 ±0.7</td></tr><tr><td>400<L</td><td>1000 ±1.5</td></tr><tr><td>1000<L</td><td>2000 ±3</td></tr><tr><td>2000<L</td><td>4000 ±4</td></tr></table>	STS-3		L	4 ±0.2	4<L	16 ±0.3	16<L	63 ±0.4	63<L	250 ±0.5	250<L	400 ±0.7	400<L	1000 ±1.5	1000<L	2000 ±3	2000<L	4000 ±4	DATE OF ISSUE 2016.07.22	
STS-3																										
L	4 ±0.2																									
4<L	16 ±0.3																									
16<L	63 ±0.4																									
63<L	250 ±0.5																									
250<L	400 ±0.7																									
400<L	1000 ±1.5																									
1000<L	2000 ±3																									
2000<L	4000 ±4																									
△x 6		-02	⊗	EC-G29002	定格電圧追記、末尾送り。	齊藤	DOCUMENT TYPE PART																			
			2016.09.28					DRAWING																		
△x				MR-B71672	P/N RELEASE	齊藤	TOLERANCING ISO 8015																			
			2016.08.22																							
HISTORY X COUNT	SUFFIX /REPL.	RELEASE NO. DATE		REVISION		SIGN.	MATERIAL (COLOR) PETP+AL+PSA (銀)		FINISH (COLOR) SEE ABOVE																	
LEGAL OWNER Sony Global M&O Corporation																										
RESPONSIBLE DEPARTMENT INZ Design Mechanical Design I					SIZE A3	UNIT mm	ORIGINAL MODEL DWT-P01N/14(UC)		DESCRIPTION (E) LABEL14(UC),MODEL NUMBER																	
PLANNED BY '16.07.28 K. SAITO		CHECKED BY		APPROVED BY	SCALE 2:1		TENTATIVE MODEL MAX30140		DESCRIPTION (J) キメラヘル14(UC)																	
DRAWN BY '16.07.28 K. SAITO					PRJ. METHOD 		TENTATIVE PART NO. 0-518-030-01	PART NO. 4-689-732-02	SHEET/PAGES △2 1 / 1																	

THIS DOCUMENT IS THE PROPRIETARY PROPERTY OF SONY. ITS USE IS AUTHORIZED ONLY FOR RESPONDING TO A REQUEST FOR QUOTATION, OR FOR THE PERFORMANCE OF WORK FOR SONY. ALL QUESTIONS MUST BE REFERRED TO THE LOCAL PURCHASING DEPARTMENT OF SONY. THIS PART SHOULD NOT CONTAIN ANY SUBSTANCES WHICH ARE SPECIFIED IN SS-00259-01. THE REPRODUCTION, DISTRIBUTION AND UTILIZATION OF THIS DOCUMENT AS WELL AS THE COMMUNICATION OF ITS CONTENTS TO OTHERS WITHOUT EXPRESS AUTHORIZATION IS PROHIBITED. OFFENDERS WILL BE HELD LIABLE FOR THE PAYMENT OF DAMAGES. ALL RIGHTS RESERVED IN THE EVENT OF THE GRANT OF A PATENT, UTILITY MODEL OR DESIGN. COPYRIGHT RESERVED.

F

A3

F spec - D32

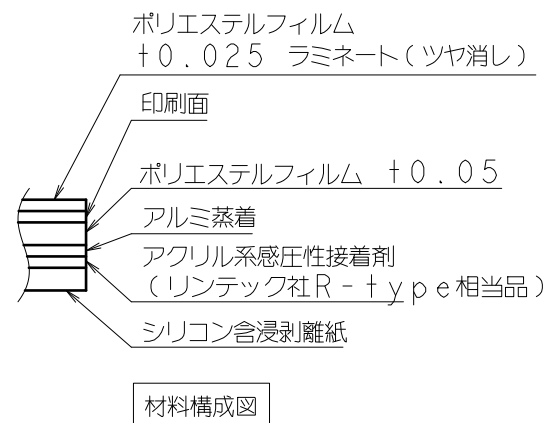

注1)印刷色は、地：「黒艶消」、文字：「銀」処理のこと。ただし、※指示部は、地：「銀」、文字：「黒艶消」とする。

2)図中A部に字高2mmでシリアルNoを記載。（発注時に別途連絡）

3)品質特性：STM-1077「ソニー部品設計基準-機銘板」の7項に定める各特性を満足すること。

4)版下は校正承認を要し、納入形態は別途打合わせのこと。

5)この部品は、部番：4-138-255-の外形型流用のこと。

Purchase recycled resins and wire rods only from the business partners that Sony approves as Green Partners.
再生樹脂・被覆電線はグリーンパートナー認定取引先から調達すること。

△ x						GENERAL TOLERANCE <table><tr><td colspan="2">L</td><td>4</td><td>±0.2</td></tr><tr><td colspan="2">4<L</td><td>16</td><td>±0.3</td></tr><tr><td colspan="2">16<L</td><td>63</td><td>±0.4</td></tr><tr><td colspan="2">63<L</td><td>250</td><td>±0.5</td></tr><tr><td colspan="2">250<L</td><td>400</td><td>±0.7</td></tr><tr><td colspan="2">400<L</td><td>1000</td><td>±1.5</td></tr><tr><td colspan="2">1000<L</td><td>2000</td><td>±3</td></tr><tr><td colspan="2">2000<L</td><td>4000</td><td>±4</td></tr></table>	L		4	±0.2	4<L		16	±0.3	16<L		63	±0.4	63<L		250	±0.5	250<L		400	±0.7	400<L		1000	±1.5	1000<L		2000	±3	2000<L		4000	±4	DATE OF ISSUE 2016.07.22	
L		4	±0.2																																					
4<L		16	±0.3																																					
16<L		63	±0.4																																					
63<L		250	±0.5																																					
250<L		400	±0.7																																					
400<L		1000	±1.5																																					
1000<L		2000	±3																																					
2000<L		4000	±4																																					
△ xII		-02	⊗	EC-G29002 2016.09.28	定格電圧追記、末尾送り。	齊藤	DOCUMENT TYPE PART	DRAWING																																
△ x				MR-B71672 2016.08.22	P/N RELEASE	齊藤	TOLERANCING ISO 8015																																	
HISTORY X COUNT	SUFFIX /REPL.	RELEASE NO. DATE		REVISION		SIGN.	MATERIAL(COLOR) PETP+AL+PSA (銀)	FINISH(COLOR) SEE ABOVE																																
LEGAL OWNER Sony Global M&O Corporation																																								
RESPONSIBLE DEPARTMENT INZ Design Mechanical Design I				SIZE A3	UNIT mm	ORIGINAL MODEL DWT-P01N/30(UC)	DESCRIPTION (E) LABEL30(UC),MODEL NUMBER																																	
PLANNED BY '16.07.28 K.SAITO		CHECKED BY	APPROVED BY	SCALE 2:1	TENTATIVE MODEL MAX30140	DESCRIPTION (J) キメラハ"ル30(UC)																																		
DRAWN BY '16.07.28 K.SAITO				PRJ. METHOD	TENTATIVE PART NO. 0-518-031-01	PART NO. 4-689-733-02		SHEET/PAGES △ 1 / 1																																
THIS DOCUMENT IS THE PROPRIETARY PROPERTY OF SONY. ITS USE IS AUTHORIZED ONLY FOR RESPONDING TO A REQUEST FOR QUOTATION, OR FOR THE PERFORMANCE OF WORK FOR SONY. ALL QUESTIONS MUST BE REFERRED TO THE LOCAL PURCHASING DEPARTMENT OF SONY. THIS PART DOES NOT CONTAIN ANY SUBSTANCES WHICH ARE SPECIFIED IN S55-00259-01. THE REPRODUCTION, DISTRIBUTION AND UTILIZATION OF THIS DOCUMENT AS WELL AS THE COMMUNICATION OF ITS CONTENTS TO ANY OTHER PARTY WITHOUT EXPRESS AUTHORIZATION IS PROHIBITED. OFFENDERS WILL BE HELD LIABLE FOR THE PAYMENT OF DAMAGES. ALL RIGHTS ARE RESERVED IN THE EVENT OF A PATENT, UTILITY MODEL OR DESIGN. COPYRIGHT RESERVED.																																								

THIS DOCUMENT IS THE PROPRIETARY PROPERTY OF SONY. ITS USE IS AUTHORIZED ONLY FOR RESPONDING TO A REQUEST FOR QUOTATION, OR FOR THE PERFORMANCE OF WORK FOR SONY. ALL QUESTIONS MUST BE REFERRED TO THE LOCAL PURCHASING DEPARTMENT OF SONY. THIS PART SHOULD NOT CONTAIN ANY SUBSTANCES WHICH ARE SPECIFIED IN SS-00259-01. THE REPRODUCTION, DISTRIBUTION AND UTILIZATION OF THIS DOCUMENT AS WELL AS THE COMMUNICATION OF ITS CONTENTS TO OTHERS WITHOUT EXPRESS AUTHORIZATION IS PROHIBITED. OFFENDERS WILL BE HELD LIABLE FOR THE PAYMENT OF DAMAGES. ALL RIGHTS RESERVED IN THE EVENT OF THE GRANT OF A PATENT, UTILITY MODEL OR DESIGN. COPYRIGHT RESERVED.

4689733_label_30uc_ks.drw : CHECK-IN 2016/Sep/27 18:19:40 PM

A

B

C

D

E



F

DRAWING

SONY STANDARD

A3

'14.11

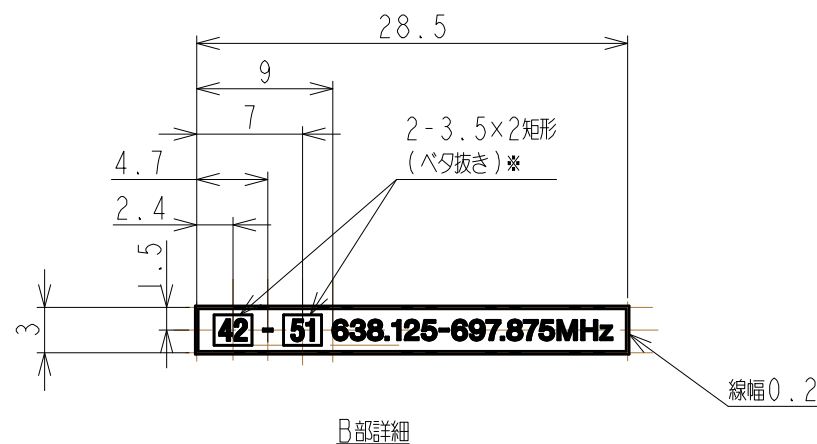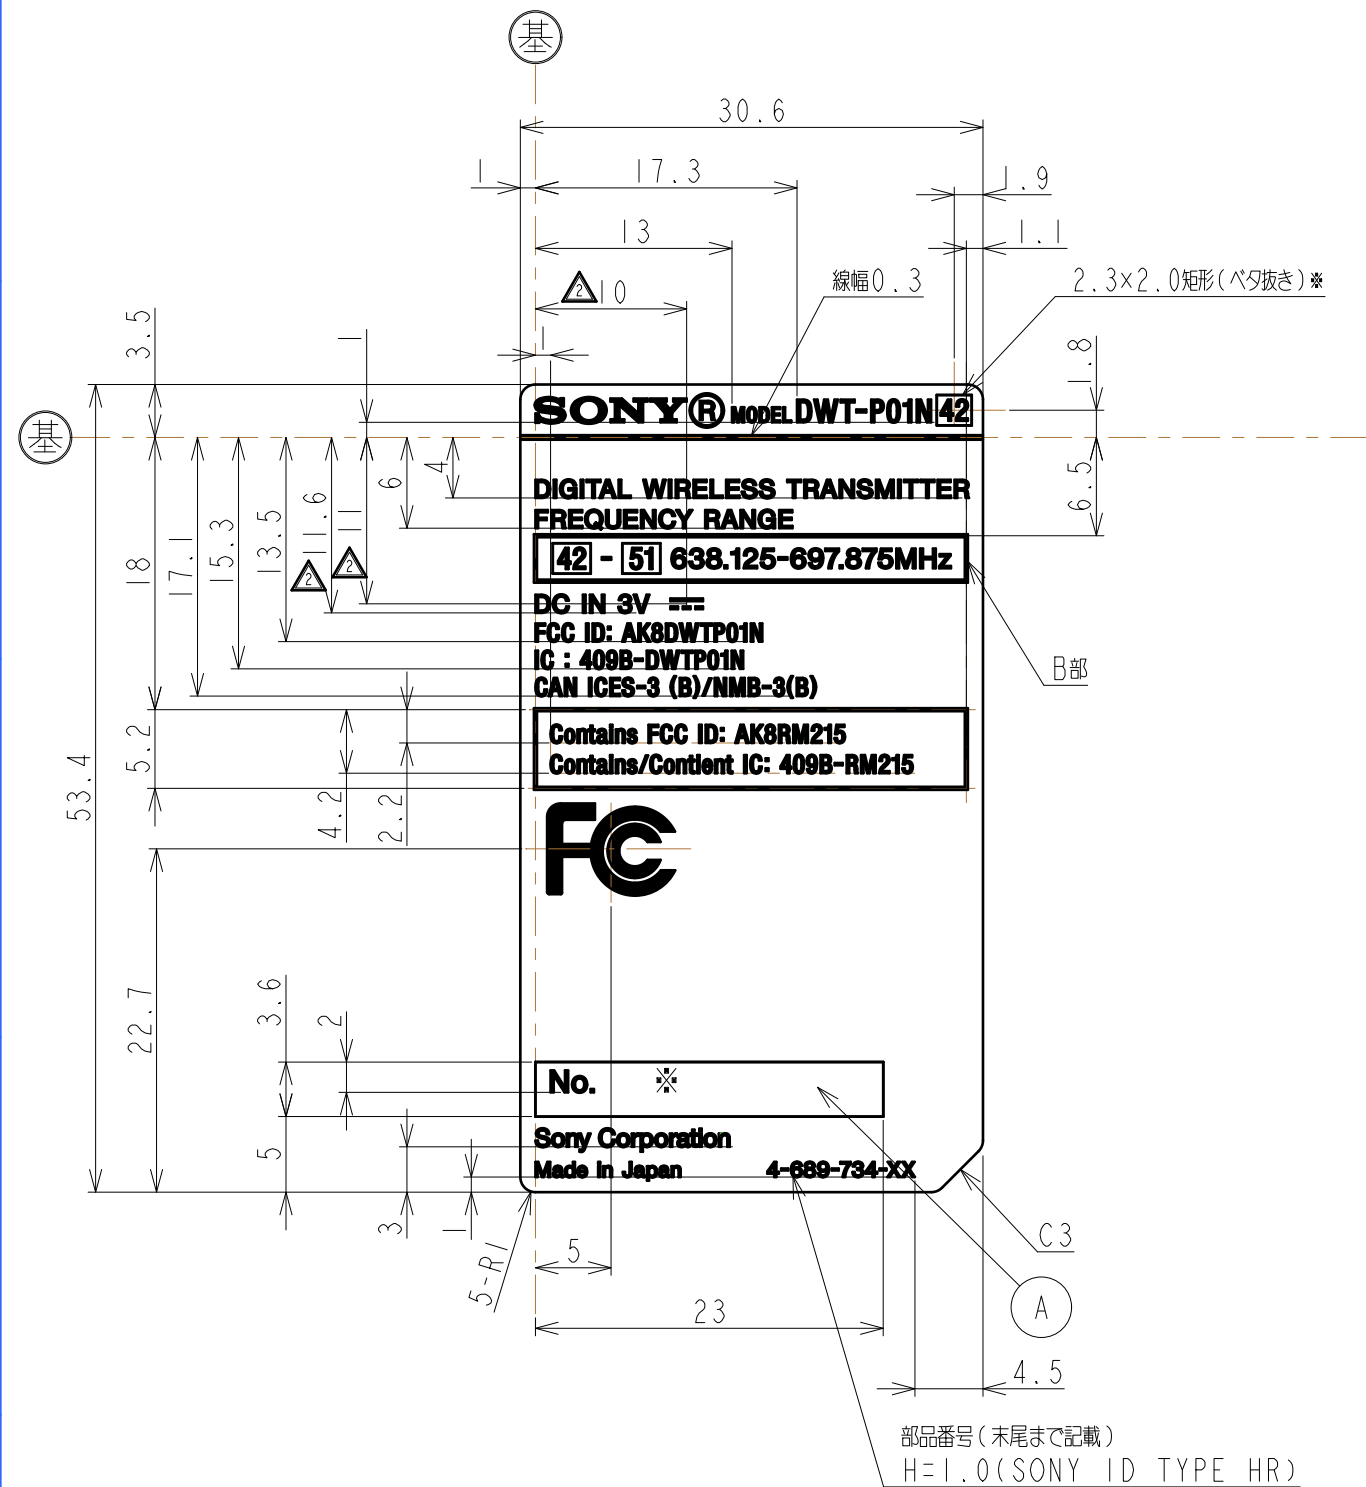

ポリエステルフィルム
+0.025 ラミネート(ツヤ消し)
印刷面
ポリエステルフィルム +0.05
アルミ蒸着
アクリル系感圧性接着剤
(リンテック社R-type相当品)
シリコン含浸剥離紙







材料構成図

記 載 文 字	字 高	タイプフェース	印 刷 色
SONY®	L=10	SONY LOGO TYPE Rマーク付	シルバーメタリック （抜き文字）
MODEL	H=1.0	SONY ID TYPE HRC	
DWT-P01N	H=1.5		
DIGITAL WIRELESS TRANSMITTER	H=1.2	SONY ID TYPE HR	
FREQUENCY RANGE			
42 . 42 . - . 51	H=1.4	SONY ID TYPE HRC	黒色
638.125-697.875MHz	H=1.3	SONY ID TYPE HR	シルバーメタリック （抜き文字）
FCC ID: AK8DWT01N IC : 409B-DWTP01N CAN ICES-3 (B)/NMB-3(B)	H=1.2	SONY ID TYPE HRC	
Contains FCC ID: AK8RM215 Contains/Contient IC: 409B-RM215			
FC	α=6.0	清刷参照	
Sony Corporation	H=1.2	清刷参照	
Made in Japan	H=1.0	SONY ID TYPE HR	
No.	H=1.2		黒色
DC IN 3V			シルバーメタリック （抜き文字）
≡	α=1.5	清刷参照	

- 注1)印刷色は、地:「黒艶消」、文字:「銀」処理のこと。ただし、※指示部は、地:「銀」、文字:「黒艶消」とする。
2)図中A部に字高2mmでシリアルNoを記載。(発注時に別途連絡)
3)品質特性:STM-1077「ソニー部品設計基準-機銘板」の7項に定める各特性を満足すること。
4)版下は校正承認を要し、納入形態は別途打合わせのこと。
5)この部品は、部番:4-138-255-の外形型流用のこと。

Purchase recycled resins and wire rods only from the business partners that Sony approves as Green Partners.
再生樹脂・被覆電線はグリーンパートナー認定取引先から調達すること。

△x						GENERAL TOLERANCE		STS-3		DATE OF ISSUE	
△x 6		-02 ⊗		EC-G29002		定格電圧追記、末尾送り。		16 ±0.2		2016.07.22	
△x				MR-B71672		P/N RELEASE		16 ±0.3		DOCUMENT TYPE	
HISTORY		SUFFIX		RELEASE NO.		REVISION		SIGN.		DRAWING	
X COUNT		/REPL.		DATE						PART	
LEGAL OWNER								MATERIAL(COLOR)		FINISH(COLOR)	
Sony Global M&O Corporation								PETP+AL+PSA		SEE ABOVE	
RESPONSIBLE DEPARTMENT				SIZE		UNIT		ORIGINAL MODEL		DESCRIPTION (E)	
INZ Design Mechanical Design I				A3		mm		DWT-P01N/42(UC)		LABEL42(UC), MODEL NUMBER	
PLANNED BY		CHECKED BY		APPROVED BY		SCALE		TENTATIVE MODEL		DESCRIPTION (J)	
'16.07.28 K. SAITO						2:1		MAX30140		キメイラヘル42(UC)	
DRAWN BY						PRJ. METHOD		TENTATIVE PART NO.		PART NO.	
'16.07.28 K. SAITO						①E-1		0-518-032-01		4-689-734-02 △	
THIS DOCUMENT IS THE PROPRIETARY PROPERTY OF SONY. ITS USE IS AUTHORIZED ONLY FOR RESPONDING TO A REQUEST FOR QUOTATION, OR FOR THE PERFORMANCE OF WORK FOR SONY. ALL QUESTIONS MUST BE REFERRED TO THE LOCAL PURCHASING DEPARTMENT OF SONY. THIS PART SHOULD NOT CONTAIN ANY SUBSTANCES WHICH ARE SPECIFIED IN SS-00259-01. THE REPRODUCTION, DISTRIBUTION AND UTILIZATION OF THIS DOCUMENT AS WELL AS THE COMMUNICATION OF ITS CONTENTS TO OTHERS WITHOUT EXPRESS AUTHORIZATION IS PROHIBITED. OFFENDERS WILL BE HELD LIABLE FOR THE PAYMENT OF DAMAGES. ALL RIGHTS RESERVED IN THE EVENT OF THE GRANT OF A PATENT, UTILITY MODEL OR DESIGN. COPYRIGHT RESERVED.										SHEET/PAGES	
										1 / 1	

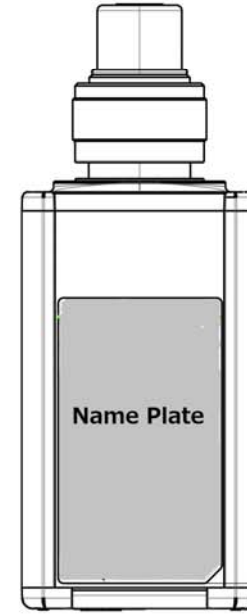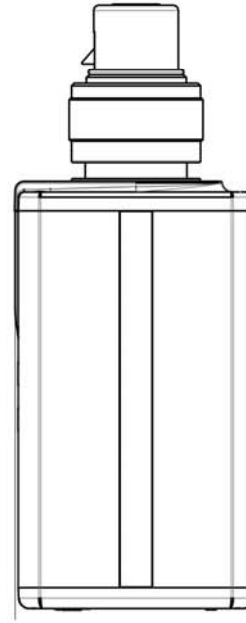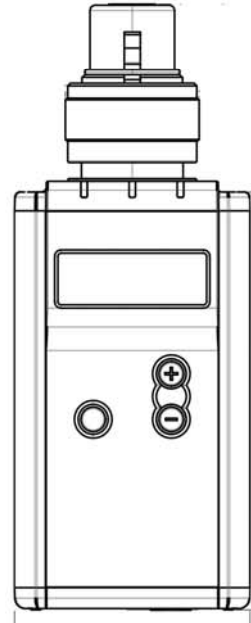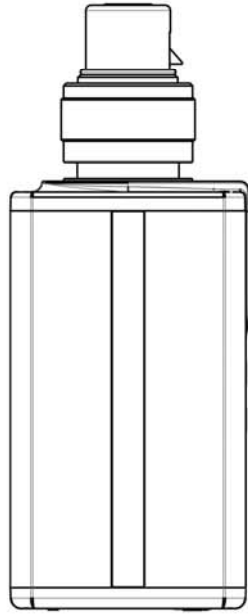

DRAWING

SONY STANDARD