




[802.11ac (VHT20)/ 5240 MHz]

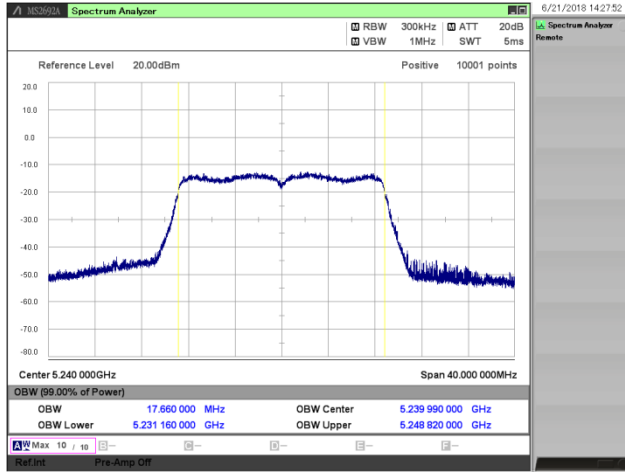


[802.11ac (VHT20)/ 5260 MHz]

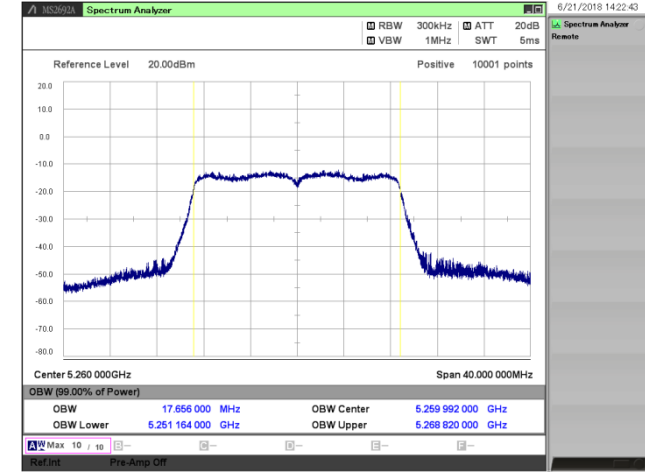


[802.11ac (VHT20)/ 5300 MHz]

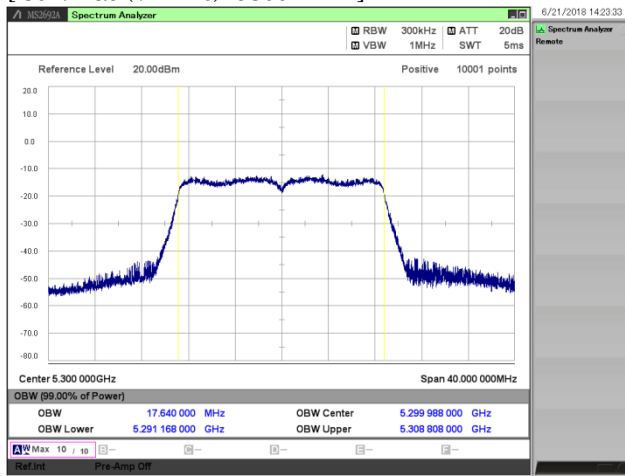


[802.11ac (VHT20)/ 5320 MHz]

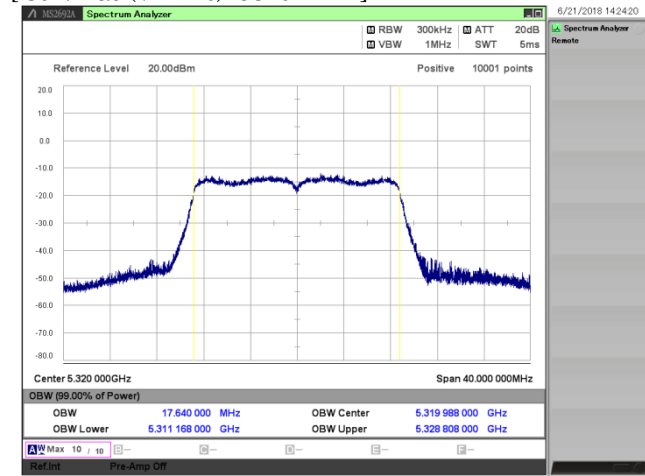


[802.11ac (VHT20)/ 5500 MHz]

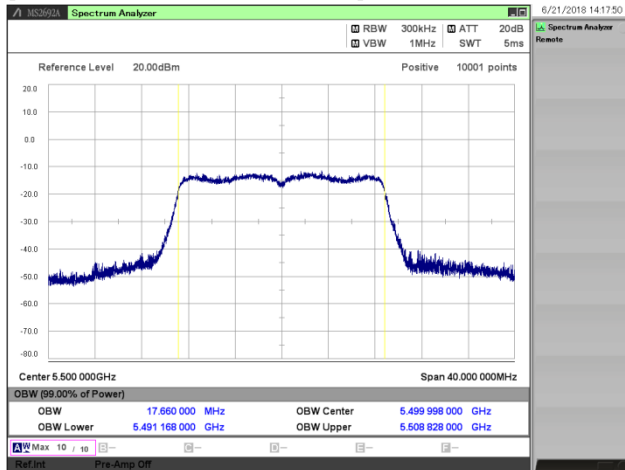


[802.11ac (VHT20)/ 5600 MHz]

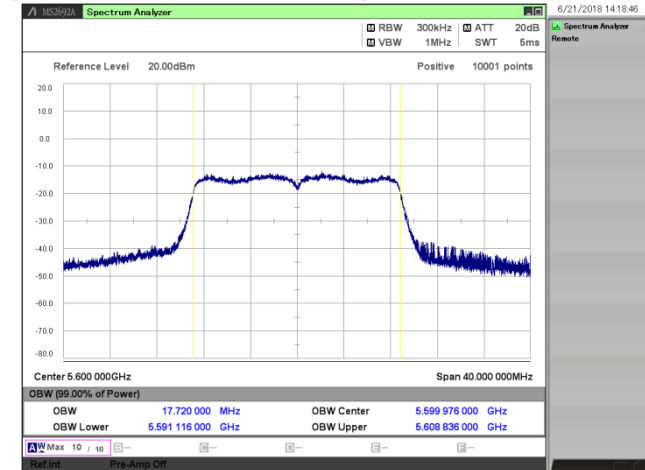


[802.11ac (VHT20)/ 5700 MHz]

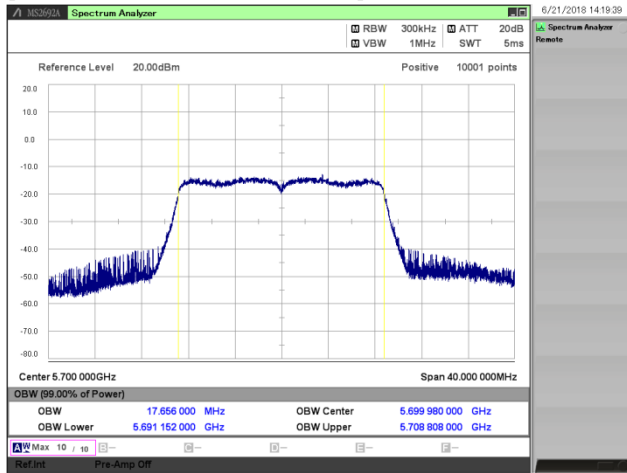


[802.11ac (VHT20)/ 5720 MHz]

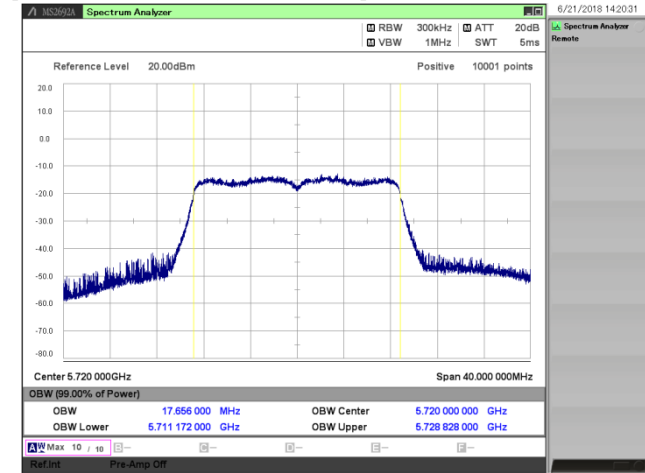


[802.11ac (VHT20)/ 5745 MHz]

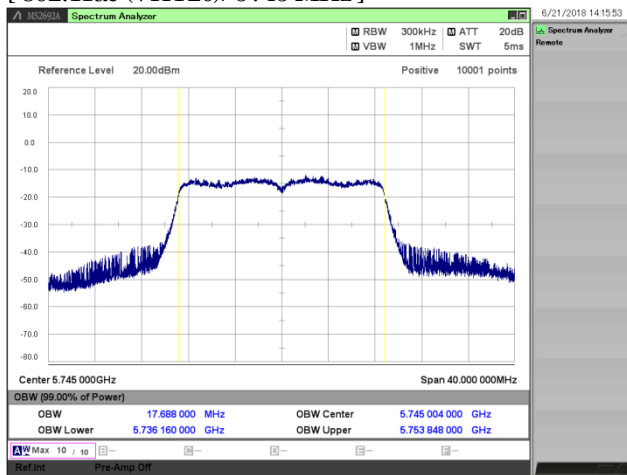


[802.11ac (VHT20)/ 5785 MHz]

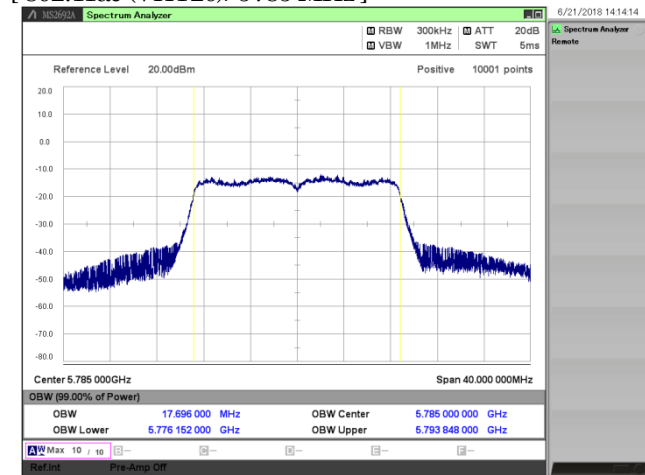


[802.11ac (VHT20)/ 5825 MHz]

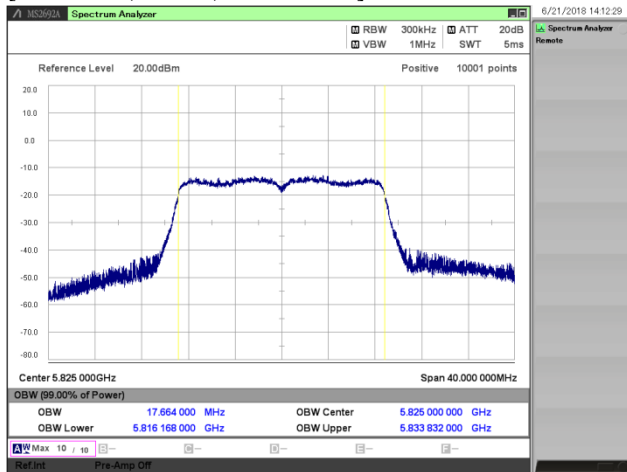


[802.11n (HT40)/ 5190 MHz]

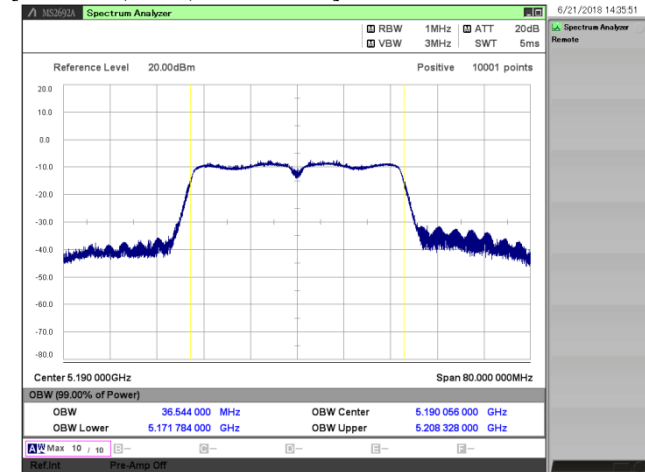


[802.11n (HT40)/ 5230 MHz]

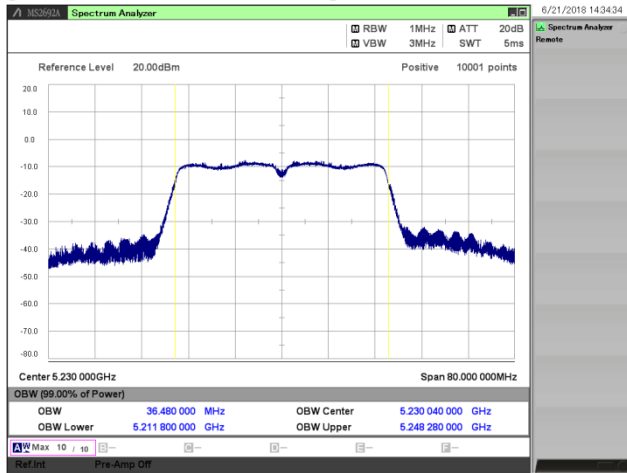


[802.11n (HT40)/ 5270 MHz]

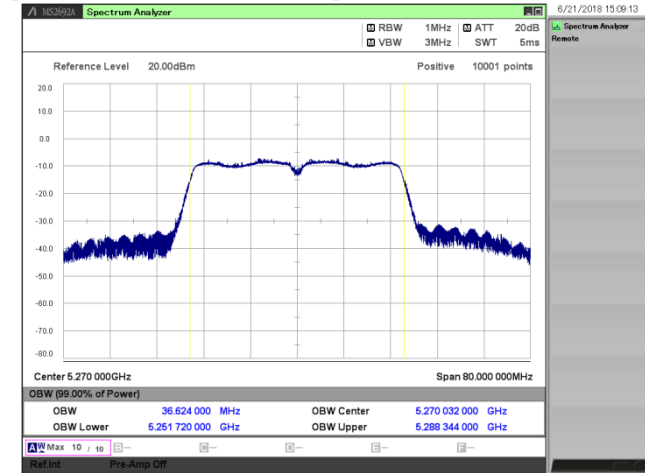


[802.11n (HT40)/ 5310 MHz]

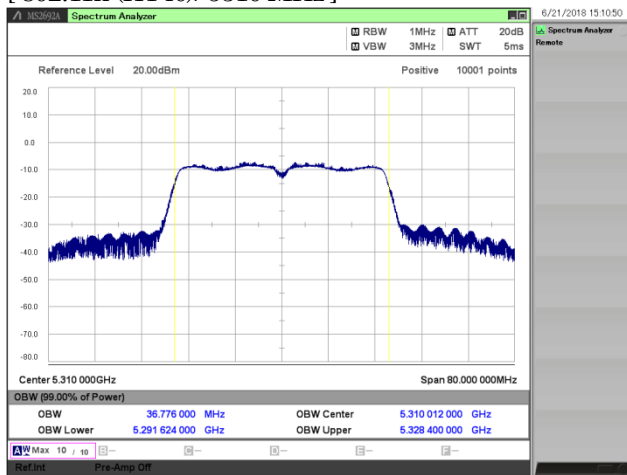


[802.11n (HT40)/ 5510 MHz]

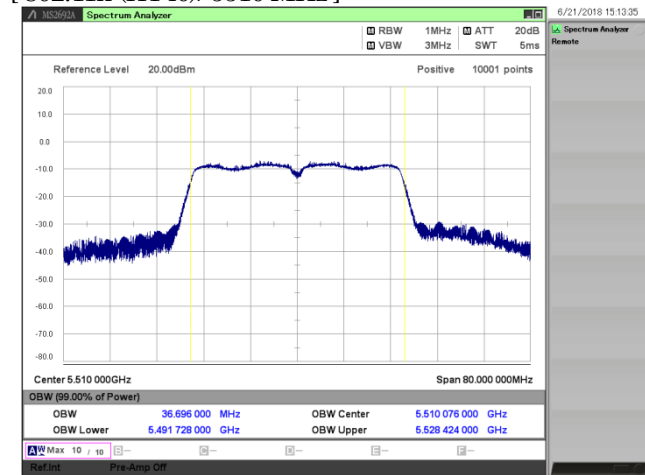


[802.11n (HT40)/ 5590 MHz]

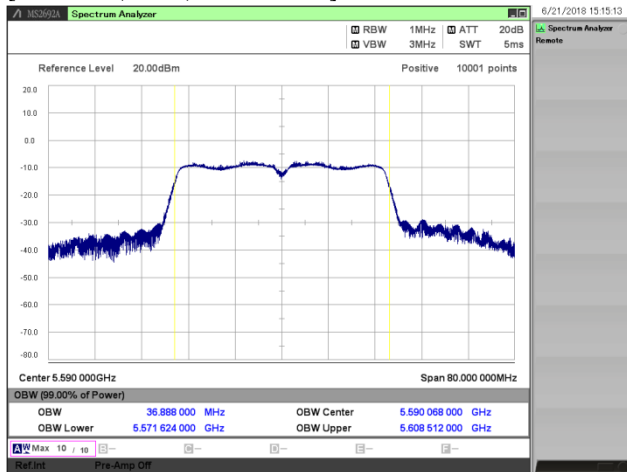


[802.11n (HT40)/ 5670 MHz]

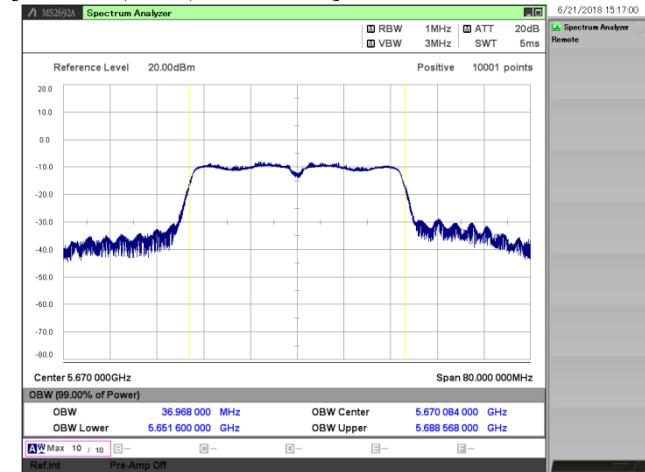


[802.11n (HT40)/ 5755 MHz]

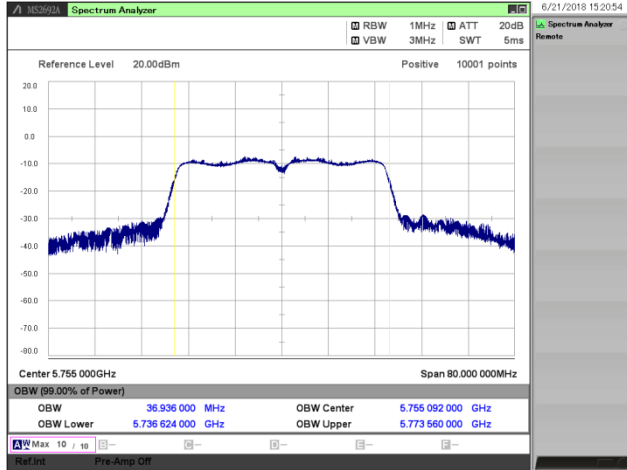


[802.11n (HT40)/ 5795 MHz]

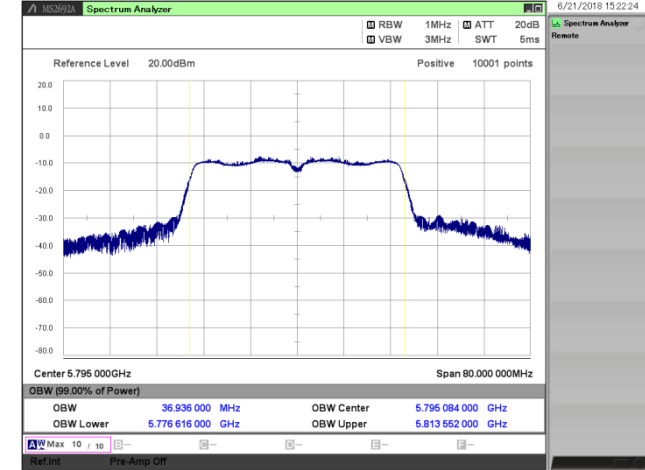


[802.11ac (VHT40)/ 5190 MHz]

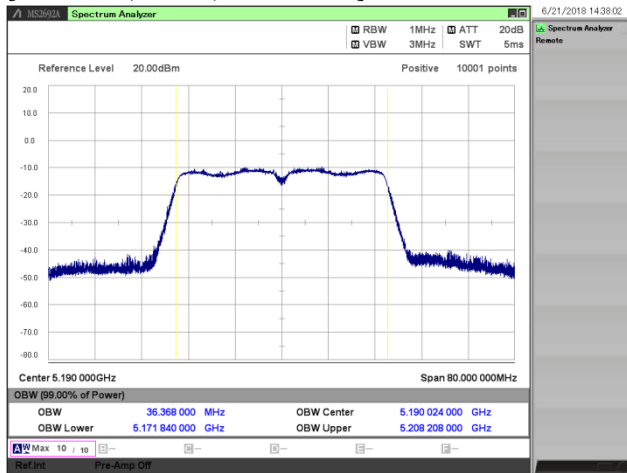


[802.11ac (VHT40)/ 5230 MHz]

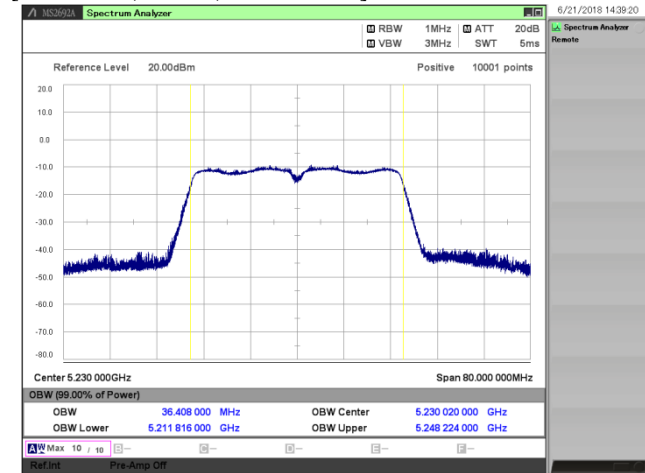


[802.11ac (VHT40)/ 5270 MHz]

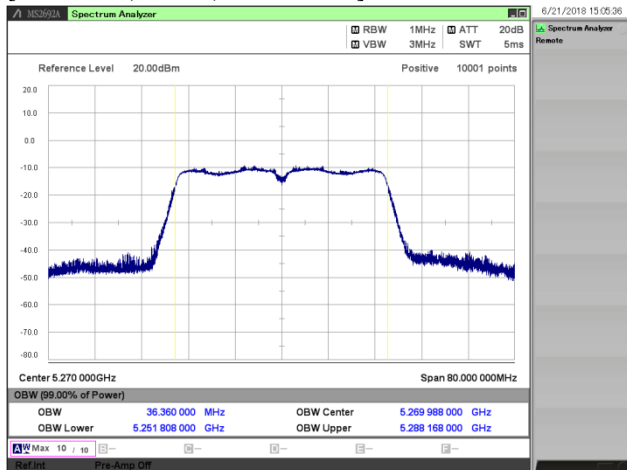


[802.11ac (VHT40)/ 5310 MHz]

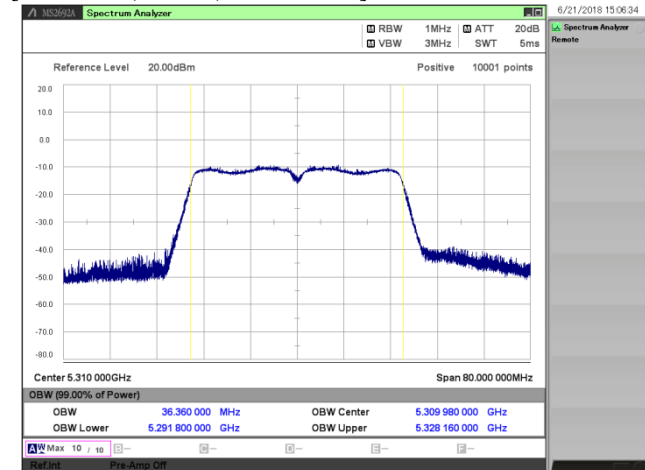


[802.11ac (VHT40)/ 5510 MHz]

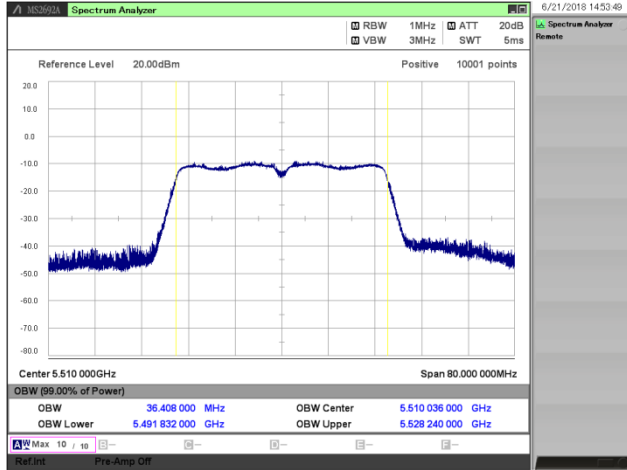


[802.11ac (VHT40)/ 5590 MHz]

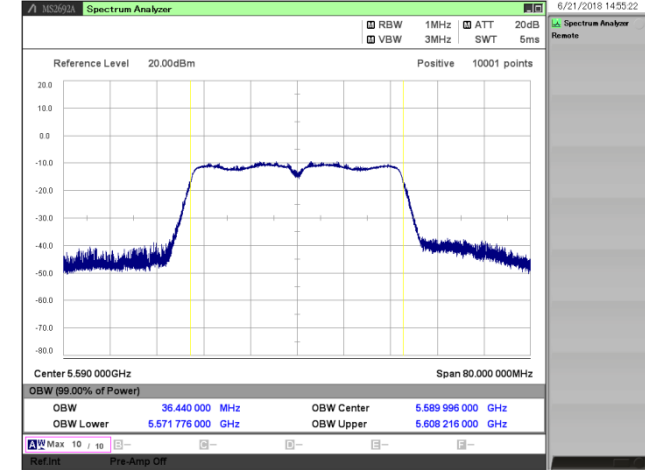


[802.11ac (VHT40)/ 5670 MHz]

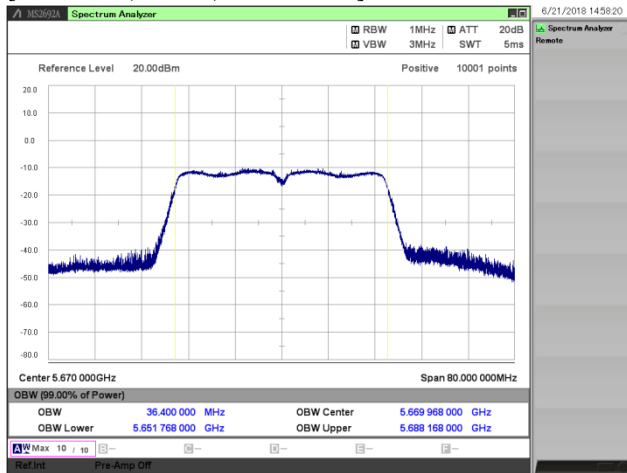


[802.11ac (VHT40)/ 5710 MHz]

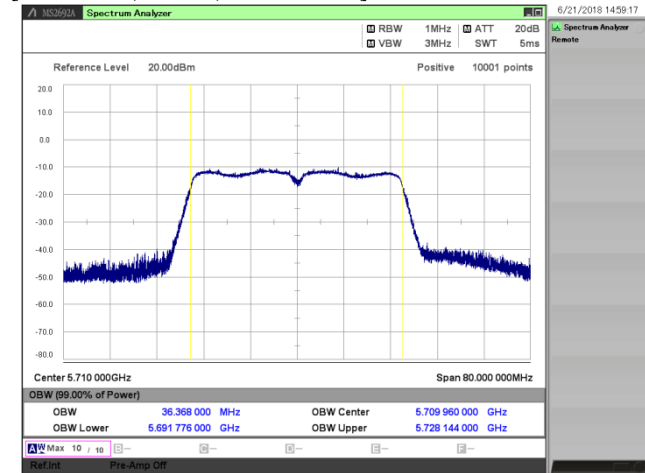


[802.11ac (VHT40)/ 5755 MHz]

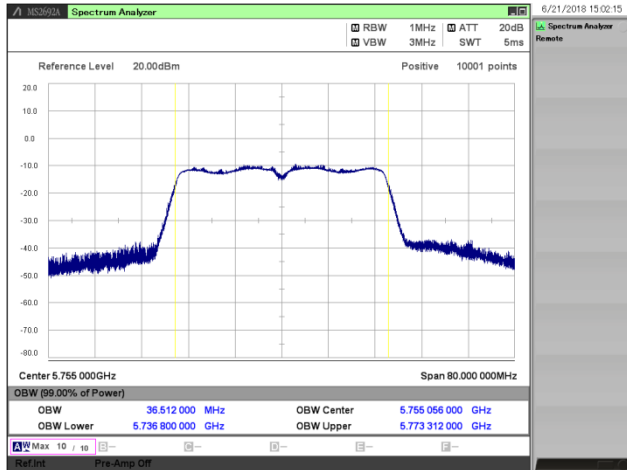


[802.11ac (VHT40)/ 5795 MHz]

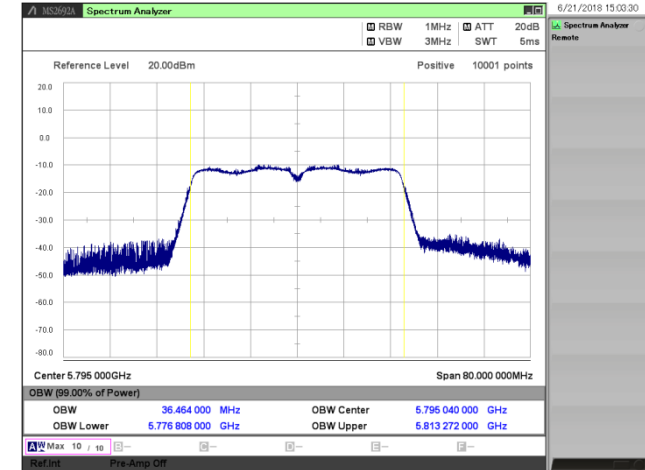


[802.11ac (VHT80)/ 5210 MHz]

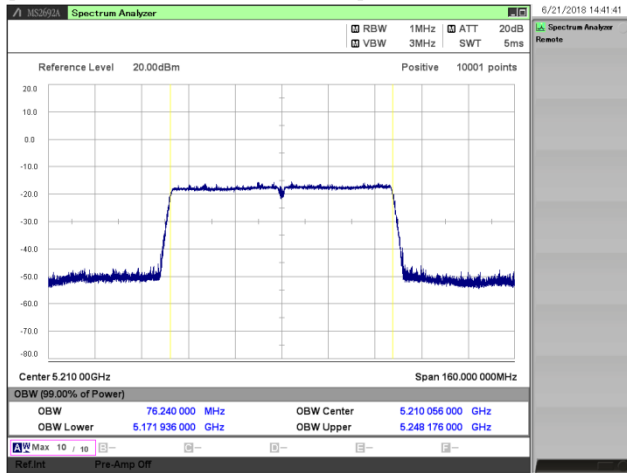


[802.11ac (VHT80)/ 5290 MHz]

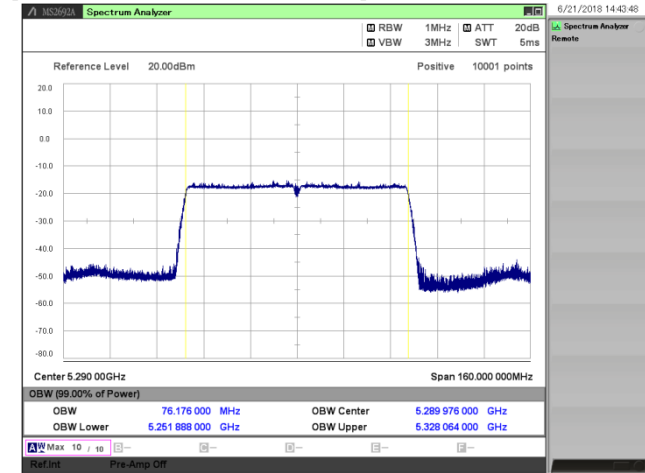


[802.11ac (VHT80)/ 5530 MHz]

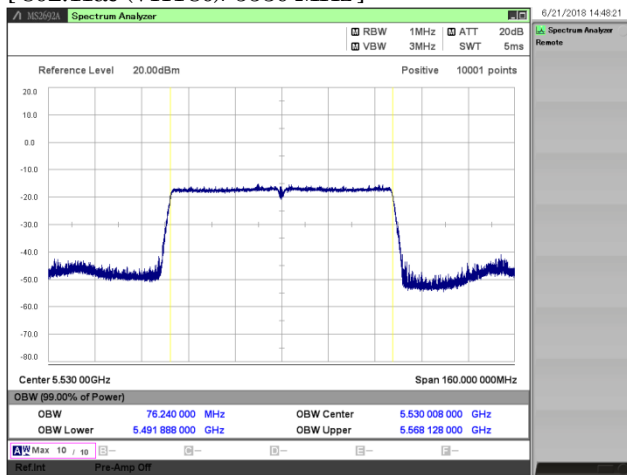


[802.11ac (VHT80)/ 5610 MHz]

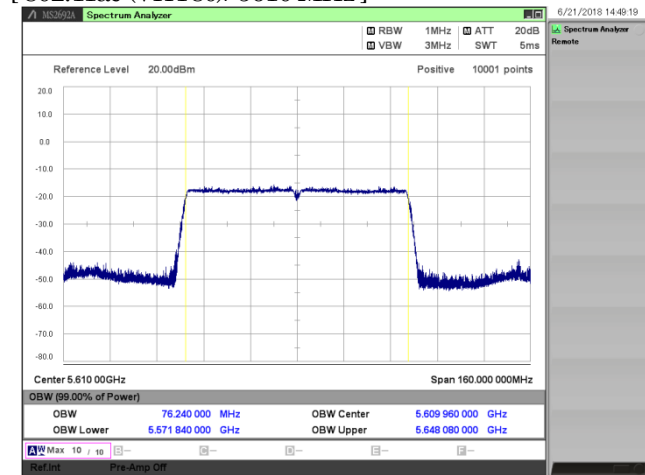

[802.11ac (VHT80)/ 5690 MHz]

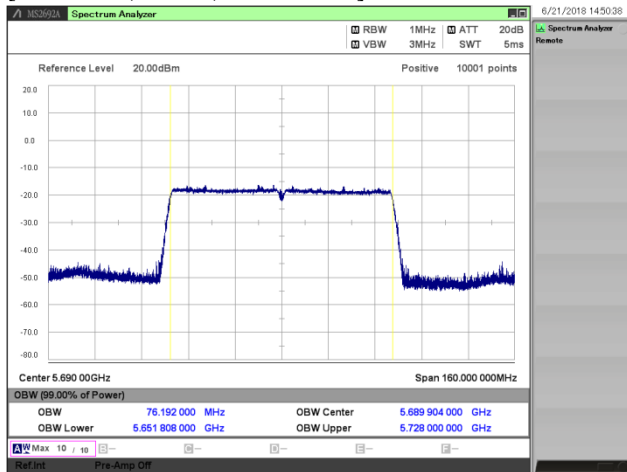

[802.11ac (VHT80)/ 5775 MHz]

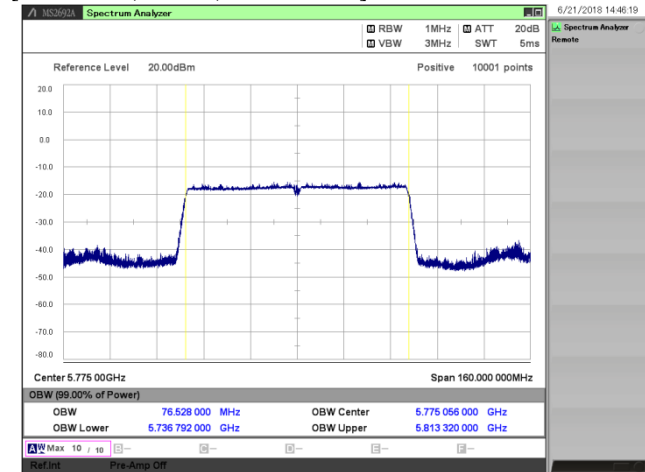

3.5. Maximum Conducted Output Power

- 1) Ambient temperature : 24.5deg.C
 2) Relative humidity : 56.3 %
 3) Date of measurement : June 12, 2018
 4) Measured by : M.KOUGA
 5) Operating mode : Transmitting mode

Mode	Rate [Mbps]	Ch. [MHz]	Reading (AV) [dBm]	C.F. [dB]	Duty Factor [dB]	Ant. Gain [dBi]	Conducted Output Power				Equivalent Isotropically Radiated Power			
							Result (AV) [dBm]	Result (AV) [mW]	Limit [dBm]	Margin [dB]	Result (AV) [dBm]	Result (AV) [mW]	Limit [dBm]	Margin [dB]
11a	6	5180	2.16	11.62	0.07	0.0	13.85	24.27	23.98	10.13	13.85	24.27	29.98	16.13
		5200	1.90	11.62	0.07	0.0	13.59	22.86	23.98	10.39	13.59	22.86	29.98	16.39
		5220	2.22	11.62	0.07	0.0	13.91	24.60	23.98	10.07	13.91	24.60	29.98	16.07
		5240	2.20	11.62	0.07	0.0	13.89	24.49	23.98	10.09	13.89	24.49	29.98	16.09
		5260	2.10	11.62	0.07	0.0	13.79	23.93	23.94	10.15	13.79	23.93	29.94	16.15
		5280	1.67	11.63	0.07	0.0	13.37	21.73	23.98	10.61	13.37	21.73	29.98	16.61
		5300	2.02	11.63	0.07	0.0	13.72	23.55	23.88	10.16	13.72	23.55	29.88	16.16
		5320	1.96	11.63	0.07	0.0	13.66	23.23	23.88	10.22	13.66	23.23	29.88	16.22
		5500	1.93	11.65	0.07	0.0	13.65	23.17	23.98	10.33	13.65	23.17	29.98	16.33
		5600	1.62	11.66	0.07	0.0	13.35	21.63	23.98	10.63	13.35	21.63	29.98	16.63
		5700	0.91	11.67	0.07	0.0	12.65	18.41	23.98	11.33	12.65	18.41	29.98	17.33
		5745	1.48	11.67	0.07	0.0	13.22	20.99	30.00	16.78	13.22	20.99	36.00	22.78
		5785	1.31	11.68	0.07	0.0	13.06	20.23	30.00	16.94	13.06	20.23	36.00	22.94
		5825	1.07	11.68	0.07	0.0	12.82	19.14	30.00	17.18	12.82	19.14	36.00	23.18
11n (HT20)	MCS0	5180	2.13	11.62	0.07	0.0	13.82	24.10	23.98	10.16	13.82	24.10	29.98	16.16
		5200	2.00	11.62	0.07	0.0	13.69	23.39	23.98	10.29	13.69	23.39	29.98	16.29
		5220	1.75	11.62	0.07	0.0	13.44	22.08	23.98	10.54	13.44	22.08	29.98	16.54
		5240	1.99	11.62	0.07	0.0	13.68	23.33	23.98	10.30	13.68	23.33	29.98	16.30
		5260	1.89	11.62	0.07	0.0	13.58	22.80	23.98	10.40	13.58	22.80	29.98	16.40
		5280	1.78	11.63	0.07	0.0	13.48	22.28	23.98	10.50	13.48	22.28	29.98	16.50
		5300	1.83	11.63	0.07	0.0	13.53	22.54	23.98	10.45	13.53	22.54	29.98	16.45
		5320	1.89	11.63	0.07	0.0	13.59	22.86	23.98	10.39	13.59	22.86	29.98	16.39
		5500	1.68	11.65	0.07	0.0	13.40	21.88	23.98	10.58	13.40	21.88	29.98	16.58
		5600	1.61	11.66	0.07	0.0	13.34	21.58	23.98	10.64	13.34	21.58	29.98	16.64
		5700	0.61	11.67	0.07	0.0	12.35	17.18	23.98	11.63	12.35	17.18	29.98	17.63
		5745	1.69	11.67	0.07	0.0	13.43	22.03	30.00	16.57	13.43	22.03	36.00	22.57
		5785	1.48	11.68	0.07	0.0	13.23	21.04	30.00	16.77	13.23	21.04	36.00	22.77
		5825	0.85	11.68	0.07	0.0	12.60	18.20	30.00	17.40	12.60	18.20	36.00	23.40
11ac (VHT20)	MCS0	5180	-2.14	11.62	0.07	0.0	9.55	9.02	23.98	14.43	9.55	9.02	29.98	20.43
		5200	-2.44	11.62	0.07	0.0	9.25	8.41	23.98	14.73	9.25	8.41	29.98	20.73
		5220	-2.36	11.62	0.07	0.0	9.33	8.57	23.98	14.65	9.33	8.57	29.98	20.65
		5240	-2.23	11.62	0.07	0.0	9.46	8.83	23.98	14.52	9.46	8.83	29.98	20.52
		5260	-2.65	11.62	0.07	0.0	9.04	8.02	23.87	14.83	9.04	8.02	29.87	20.83
		5280	-2.55	11.63	0.07	0.0	9.15	8.22	23.91	14.76	9.15	8.22	29.91	20.76
		5300	-2.66	11.63	0.07	0.0	9.04	8.02	23.86	14.82	9.04	8.02	29.86	20.82
		5320	-2.52	11.63	0.07	0.0	9.18	8.28	23.86	14.68	9.18	8.28	29.86	20.68
		5500	-2.22	11.65	0.07	0.0	9.50	8.91	23.87	14.37	9.50	8.91	29.87	20.37
		5600	-2.68	11.66	0.07	0.0	9.05	8.04	23.87	14.82	9.05	8.04	29.87	20.82
		5620	-2.53	11.66	0.07	0.0	9.20	8.32	23.88	14.68	9.20	8.32	29.88	20.68
		5700	-2.73	11.67	0.07	0.0	9.01	7.96	23.88	14.87	9.01	7.96	29.88	20.87
		5720	-3.35	11.67	0.07	0.0	8.39	6.90	23.87	15.48	8.39	6.90	29.87	21.48
		5745	-2.68	11.67	0.07	0.0	9.06	8.05	30.00	20.94	9.06	8.05	36.00	26.94
5785	-2.85	11.68	0.07	0.0	8.90	7.76	30.00	21.10	8.90	7.76	36.00	27.10		
5825	-2.74	11.68	0.07	0.0	9.01	7.96	30.00	20.99	9.01	7.96	36.00	26.99		

Mode	Rate [Mbps]	Ch. [MHz]	Reading (AV) [dBm]	C.F. [dB]	Duty Factor [dB]	Ant. Gain [dBi]	Maximum Conducted Power				Equivalent Isotropically Radiated Power			
							Result (AV) [dBm]	Result (AV) [mW]	Limit [dBm]	Margin [dB]	Result (AV) [dBm]	Result (AV) [mW]	Limit [dBm]	Margin [dB]
11n (HT40)	MCS0	5190	-0.28	11.62	0.08	0.0	11.42	13.87	23.98	12.56	11.42	13.87	29.98	18.56
		5230	-0.27	11.62	0.08	0.0	11.43	13.90	23.98	12.55	11.43	13.90	29.98	18.55
		5270	-0.25	11.63	0.08	0.0	11.46	14.00	23.98	12.52	11.46	14.00	29.98	18.52
		5310	-0.22	11.63	0.08	0.0	11.49	14.09	23.98	12.49	11.49	14.09	29.98	18.49
		5510	-0.27	11.65	0.08	0.0	11.46	14.00	23.98	12.52	11.46	14.00	29.98	18.52
		5590	-0.50	11.66	0.08	0.0	11.24	13.30	23.98	12.74	11.24	13.30	29.98	18.74
		5670	-1.05	11.67	0.08	0.0	10.70	11.75	23.98	13.28	10.70	11.75	29.98	19.28
		5755	-0.56	11.68	0.08	0.0	11.20	13.18	30.00	18.80	11.20	13.18	36.00	24.80
5795	-0.68	11.68	0.08	0.0	11.08	12.82	30.00	18.92	11.08	12.82	36.00	24.92		
11ac (VHT40)	MCS0	5190	-2.13	11.62	0.07	0.0	9.56	9.04	23.98	14.42	9.56	9.04	29.98	20.42
		5230	-2.39	11.62	0.07	0.0	9.30	8.51	23.98	14.68	9.30	8.51	29.98	20.68
		5270	-2.40	11.63	0.07	0.0	9.30	8.51	23.98	14.68	9.30	8.51	29.98	20.68
		5310	-2.25	11.63	0.07	0.0	9.45	8.81	23.98	14.53	9.45	8.81	29.98	20.53
		5510	-2.27	11.65	0.07	0.0	9.45	8.81	23.98	14.53	9.45	8.81	29.98	20.53
		5590	-2.60	11.66	0.07	0.0	9.13	8.18	23.98	14.85	9.13	8.18	29.98	20.85
		5630	-2.62	11.66	0.07	0.0	9.11	8.15	23.98	14.87	9.11	8.15	29.98	20.87
		5670	-2.87	11.67	0.07	0.0	8.87	7.71	23.98	15.11	8.87	7.71	29.98	21.11
		5710	-3.24	11.67	0.07	0.0	8.50	7.08	23.98	15.48	8.50	7.08	29.98	21.48
		5755	-2.50	11.68	0.07	0.0	9.25	8.41	30.00	20.75	9.25	8.41	36.00	26.75
5795	-2.69	11.68	0.07	0.0	9.06	8.05	30.00	20.94	9.06	8.05	36.00	26.94		
11ac (VHT80)	MCS0	5210	-4.91	11.62	0.07	0.0	6.78	4.76	23.98	17.20	6.78	4.76	29.98	23.20
		5290	-5.13	11.63	0.07	0.0	6.57	4.54	23.98	17.41	6.57	4.54	29.98	23.41
		5530	-5.09	11.65	0.07	0.0	6.63	4.60	23.98	17.35	6.63	4.60	29.98	23.35
		5610	-5.37	11.66	0.07	0.0	6.36	4.33	23.98	17.62	6.36	4.33	29.98	23.62
		5690	-5.63	11.67	0.07	0.0	6.11	4.08	23.98	17.87	6.11	4.08	29.98	23.87
		5775	-5.36	11.68	0.07	0.0	6.39	4.36	30.00	23.61	6.39	4.36	36.00	29.61

Worst Data Rate check

Mode	Rate [Mbps]	Channel [MHz]	Reading(AV) [dBm]	C.F. [dB]	T _(on+off) [msec]	T [msec]	Duty Factor [dB]	Result(AV) [dBm]
11a	6	5180	2.16	11.62	1.454	1.431	0.07	13.85
	9	5180	1.78	11.62	0.981	0.959	0.10	13.50
	12	5180	1.79	11.62	0.749	0.727	0.13	13.54
	18	5180	1.74	11.62	0.513	0.491	0.19	13.55
	24	5180	1.79	11.62	0.398	0.376	0.25	13.66
	36	5180	1.51	11.62	0.277	0.255	0.36	13.49
	48	5180	1.41	11.62	0.221	0.199	0.46	13.49
	54	5180	1.44	11.62	0.201	0.179	0.50	13.56
11n (HT20)	MCS0	5180	2.13	11.62	1.362	1.339	0.07	13.82
	MCS1	5180	1.91	11.62	0.709	0.687	0.14	13.67
	MCS2	5180	1.86	11.62	0.494	0.471	0.20	13.68
	MCS3	5180	1.72	11.62	0.385	0.363	0.26	13.60
	MCS4	5180	1.47	11.62	0.277	0.255	0.36	13.45
	MCS5	5180	1.57	11.62	0.221	0.199	0.45	13.64
	MCS6	5180	1.48	11.62	0.205	0.183	0.49	13.59
	MCS7	5180	1.40	11.62	0.189	0.168	0.54	13.56
11ac (VHT20)	MCS0	5180	-2.14	11.62	1.369	1.347	0.07	9.55
	MCS1	5180	-2.44	11.62	0.717	0.695	0.14	9.32
	MCS2	5180	-2.48	11.62	0.498	0.475	0.20	9.34
	MCS3	5180	-2.63	11.62	0.390	0.367	0.26	9.25
	MCS4	5180	-2.70	11.62	0.282	0.259	0.36	9.28
	MCS5	5180	-2.53	11.62	0.225	0.203	0.45	9.54
	MCS6	5180	-2.57	11.62	0.209	0.187	0.48	9.53
	MCS7	5180	-2.62	11.62	0.194	0.172	0.52	9.52
11n (HT40)	MCS0	5190	-0.28	11.62	1.294	1.271	0.08	11.42
	MCS1	5190	-0.61	11.62	0.677	0.655	0.14	11.15
	MCS2	5190	-0.66	11.62	0.470	0.447	0.21	11.17
	MCS3	5190	-0.71	11.62	0.370	0.348	0.27	11.18
	MCS4	5190	-0.82	11.62	0.266	0.244	0.38	11.18
	MCS5	5190	-0.79	11.62	0.214	0.192	0.47	11.30
	MCS6	5190	-0.77	11.62	0.198	0.176	0.51	11.36
	MCS7	5190	-0.84	11.62	0.182	0.160	0.56	11.34
11ac (VHT40)	MCS0	5190	-2.13	11.62	1.454	1.431	0.07	9.56
	MCS1	5190	-2.22	11.62	0.758	0.735	0.13	9.53
	MCS2	5190	-2.28	11.62	0.526	0.503	0.19	9.53
	MCS3	5190	-2.37	11.62	0.410	0.387	0.24	9.49
	MCS4	5190	-2.46	11.62	0.294	0.272	0.34	9.50
	MCS5	5190	-2.50	11.62	0.238	0.216	0.42	9.54
	MCS6	5190	-2.56	11.62	0.218	0.195	0.47	9.53
	MCS7	5190	-2.79	11.62	0.202	0.180	0.50	9.33
	MCS8	5190	-2.83	11.62	0.178	0.155	0.58	9.37
	MCS9	5190	-2.70	11.62	0.170	0.147	0.61	9.53
11ac (VHT80)	MCS0	5210	-4.91	11.62	1.333	1.311	0.07	6.78
	MCS1	5210	-5.21	11.62	0.697	0.675	0.14	6.55
	MCS2	5210	-5.30	11.62	0.486	0.464	0.20	6.52
	MCS3	5210	-5.33	11.62	0.381	0.359	0.26	6.55
	MCS4	5210	-5.45	11.62	0.273	0.252	0.36	6.53
	MCS5	5210	-5.48	11.62	0.221	0.200	0.45	6.59
	MCS6	5210	-5.52	11.62	0.205	0.184	0.49	6.59
	MCS7	5210	-5.51	11.62	0.189	0.167	0.53	6.64
	MCS8	5210	-5.48	11.62	0.169	0.148	0.60	6.74
	MCS9	5210	-5.55	11.62	0.157	0.135	0.65	6.72

3.6. Maximum Power Spectral Density



- 1) Ambient temperature : 20.0deg.C
 2) Relative humidity : 58.0 %
 3) Date of measurement : July 03, 2018
 4) Measured by : M.KOUGA
 5) Operating mode : Transmitting mode

Mode	Rate [Mbps]	Ch. [MHz]	Reading (RMS) [dBm/MHz]	C.F. [dB]	RBW Factor [dB]	Ant. Gain [dBi]	Power Spectral Density			Power Spectral Density (EIRP)		
							Result (RMS) [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]	Result (RMS) [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
11a	6	5180	-10.73	11.62	-	0.0	0.89	11.00	10.11	0.89	17.00	16.11
		5220	-10.91	11.62	-	0.0	0.71	11.00	10.29	0.71	17.00	16.29
		5240	-11.64	11.62	-	0.0	-0.02	11.00	11.02	-0.02	17.00	17.02
		5260	-11.66	11.62	-	0.0	-0.04	11.00	11.04	-0.04	17.00	17.04
		5300	-11.45	11.63	-	0.0	0.18	11.00	10.82	0.18	17.00	16.82
		5320	-11.68	11.63	-	0.0	-0.05	11.00	11.05	-0.05	17.00	17.05
		5500	-11.56	11.65	-	0.0	0.09	11.00	10.91	0.09	17.00	16.91
		5600	-11.78	11.66	-	0.0	-0.12	11.00	11.12	-0.12	17.00	17.12
		5700	-12.39	11.67	-	0.0	-0.72	11.00	11.72	-0.72	17.00	17.72
		5745	-19.92	11.67	6.99	0.0	-1.26	30.00	31.26	-1.26	36.00	37.26
5785	-19.96	11.68	6.99	0.0	-1.29	30.00	31.29	-1.29	36.00	37.29		
5825	-20.91	11.68	6.99	0.0	-2.24	30.00	32.24	-2.24	36.00	38.24		
11n (HT20)	MCS0	5180	-11.80	11.62	-	0.0	-0.18	11.00	11.18	-0.18	17.00	17.18
		5220	-11.77	11.62	-	0.0	-0.15	11.00	11.15	-0.15	17.00	17.15
		5240	-11.55	11.62	-	0.0	0.07	11.00	10.93	0.07	17.00	16.93
		5260	-11.55	11.62	-	0.0	0.07	11.00	10.93	0.07	17.00	16.93
		5300	-11.85	11.63	-	0.0	-0.22	11.00	11.22	-0.22	17.00	17.22
		5320	-11.54	11.63	-	0.0	0.09	11.00	10.91	0.09	17.00	16.91
		5500	-11.43	11.65	-	0.0	0.22	11.00	10.78	0.22	17.00	16.78
		5600	-12.23	11.66	-	0.0	-0.57	11.00	11.57	-0.57	17.00	17.57
		5700	-12.67	11.67	-	0.0	-1.00	11.00	12.00	-1.00	17.00	18.00
		5745	-20.07	11.67	6.99	0.0	-1.41	30.00	31.41	-1.41	36.00	37.41
5785	-20.32	11.68	6.99	0.0	-1.65	30.00	31.65	-1.65	36.00	37.65		
5825	-20.56	11.68	6.99	0.0	-1.89	30.00	31.89	-1.89	36.00	37.89		
11ac (VHT20)	MCS0	5180	-15.93	11.62	-	0.0	-4.31	11.00	15.31	-4.31	17.00	21.31
		5220	-16.10	11.62	-	0.0	-4.48	11.00	15.48	-4.48	17.00	21.48
		5240	-16.07	11.62	-	0.0	-4.45	11.00	15.45	-4.45	17.00	21.45
		5260	-15.95	11.62	-	0.0	-4.33	11.00	15.33	-4.33	17.00	21.33
		5300	-16.34	11.63	-	0.0	-4.71	11.00	15.71	-4.71	17.00	21.71
		5320	-15.87	11.63	-	0.0	-4.24	11.00	15.24	-4.24	17.00	21.24
		5500	-15.46	11.65	-	0.0	-3.81	11.00	14.81	-3.81	17.00	20.81
		5600	-15.73	11.66	-	0.0	-4.07	11.00	15.07	-4.07	17.00	21.07
		5700	-16.72	11.67	-	0.0	-5.05	11.00	16.05	-5.05	17.00	22.05
		5720	-16.53	11.67	-	0.0	-4.86	11.00	15.86	-4.86	17.00	21.86
		5745	-24.58	11.67	6.99	0.0	-5.92	30.00	35.92	-5.92	36.00	41.92
		5785	-24.39	11.68	6.99	0.0	-5.72	30.00	35.72	-5.72	36.00	41.72
5825	-24.78	11.68	6.99	0.0	-6.11	30.00	36.11	-6.11	36.00	42.11		


Mode	Rate [Mbps]	Ch. [MHz]	Reading (RMS) [dBm/MHz]	C.F. [dB]	RBW Factor	Ant. Gain [dBi]	Power Spectral Density			Power Spectral Density (EIRP)		
							Result (RMS) [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]	Result (RMS) [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
11n (HT40)	6	5190	-17.53	11.62	-	0.0	-5.91	11.00	16.91	-5.91	17.00	22.91
		5230	-17.00	11.62	-	0.0	-5.38	11.00	16.38	-5.38	17.00	22.38
		5270	-16.94	11.63	-	0.0	-5.31	11.00	16.31	-5.31	17.00	22.31
		5310	-17.28	11.63	-	0.0	-5.65	11.00	16.65	-5.65	17.00	22.65
		5510	-16.39	11.65	-	0.0	-4.74	11.00	15.74	-4.74	17.00	21.74
		5590	-17.08	11.66	-	0.0	-5.42	11.00	16.42	-5.42	17.00	22.42
		5670	-17.44	11.67	-	0.0	-5.77	11.00	16.77	-5.77	17.00	22.77
		5755	-25.20	11.68	6.99	0.0	-6.53	30.00	36.53	-6.53	36.00	42.53
5795	-25.76	11.68	6.99	0.0	-7.09	30.00	37.09	-7.09	36.00	43.09		
11ac (VHT40)	MCS0	5190	-18.75	11.62	-	0.0	-7.13	11.00	18.13	-7.13	17.00	24.13
		5230	-19.09	11.62	-	0.0	-7.47	11.00	18.47	-7.47	17.00	24.47
		5270	-19.24	11.63	-	0.0	-7.61	11.00	18.61	-7.61	17.00	24.61
		5310	-19.04	11.63	-	0.0	-7.41	11.00	18.41	-7.41	17.00	24.41
		5510	-18.70	11.65	-	0.0	-7.05	11.00	18.05	-7.05	17.00	24.05
		5590	-19.10	11.66	-	0.0	-7.44	11.00	18.44	-7.44	17.00	24.44
		5670	-19.51	11.67	-	0.0	-7.84	11.00	18.84	-7.84	17.00	24.84
		5710	-19.34	11.67	-	0.0	-7.67	11.00	18.67	-7.67	17.00	24.67
5755	-27.02	11.68	6.99	0.0	-8.35	30.00	38.35	-8.35	36.00	44.35		
5795	-27.65	11.68	6.99	0.0	-8.98	30.00	38.98	-8.98	36.00	44.98		
11ac (VHT80)	MCS0	5210	-25.56	11.62	-	0.0	-13.94	11.00	24.94	-13.94	17.00	30.94
		5290	-25.87	11.63	-	0.0	-14.24	11.00	25.24	-14.24	17.00	31.24
		5530	-25.06	11.65	-	0.0	-13.41	11.00	24.41	-13.41	17.00	30.41
		5610	-25.65	11.66	-	0.0	-13.99	11.00	24.99	-13.99	17.00	30.99
		5690	-25.92	11.67	-	0.0	-14.25	11.00	25.25	-14.25	17.00	31.25
5775	-33.36	11.68	6.99	0.0	-14.69	30.00	44.69	-14.69	36.00	50.69		

Note


For the U-NII-3 Band, the power spectral density are based on any 500 kHz band.

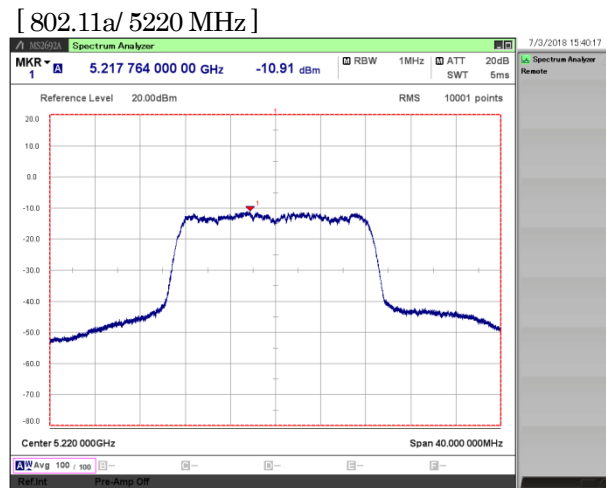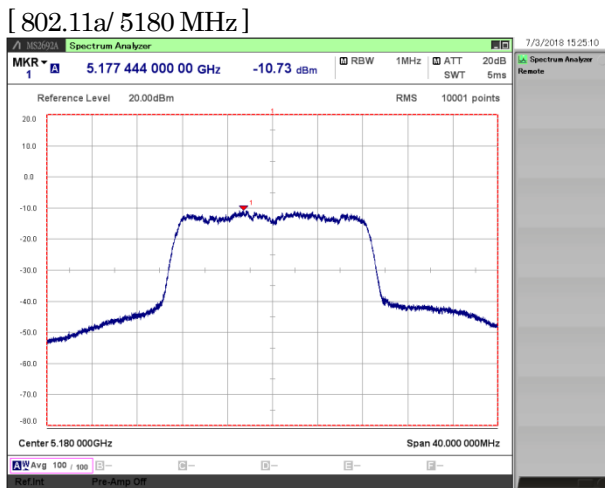


[802.11a/ 5240 MHz]

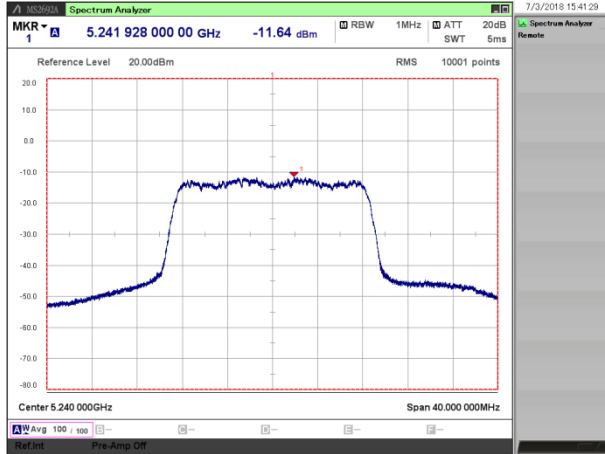


[802.11a/ 5260 MHz]

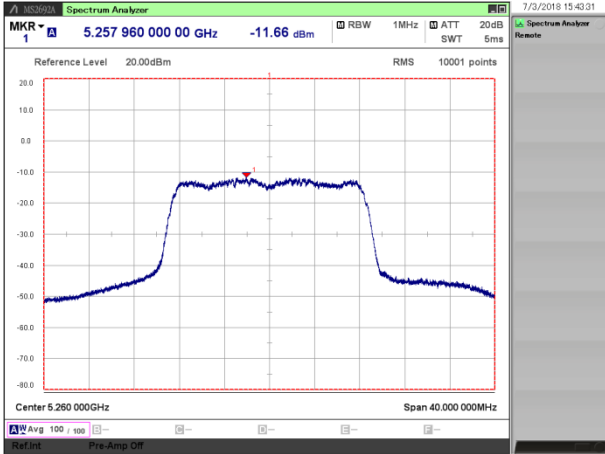


[802.11a/ 5300 MHz]

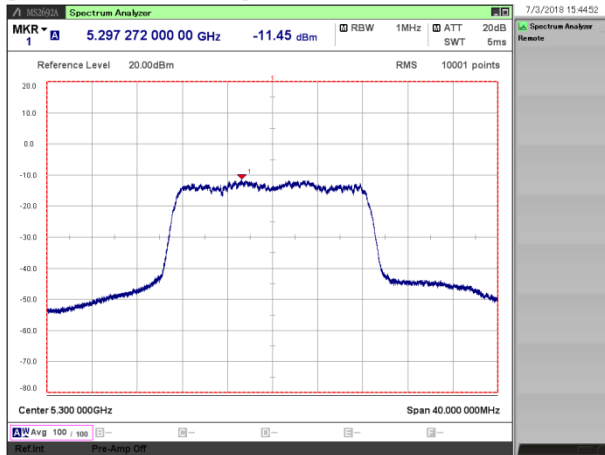


[802.11a/ 5320 MHz]

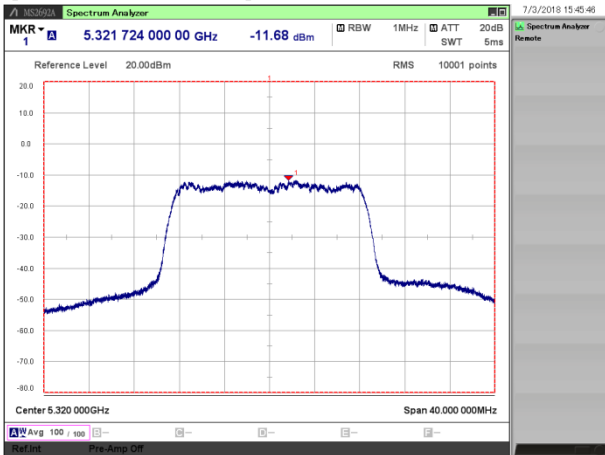


[802.11a/ 5500 MHz]

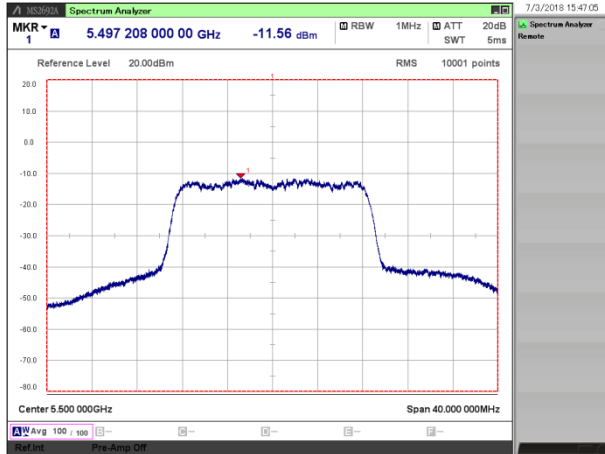


[802.11a/ 5600 MHz]

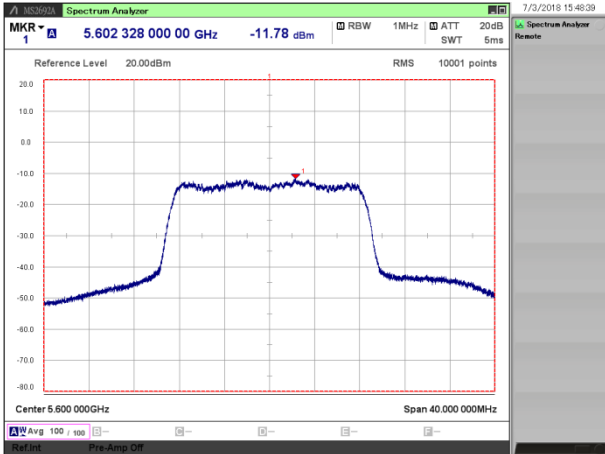


[802.11a/ 5700 MHz]

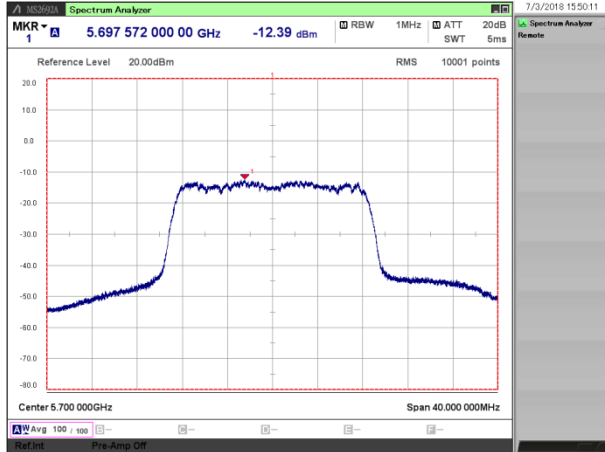


[802.11a/ 5745 MHz]

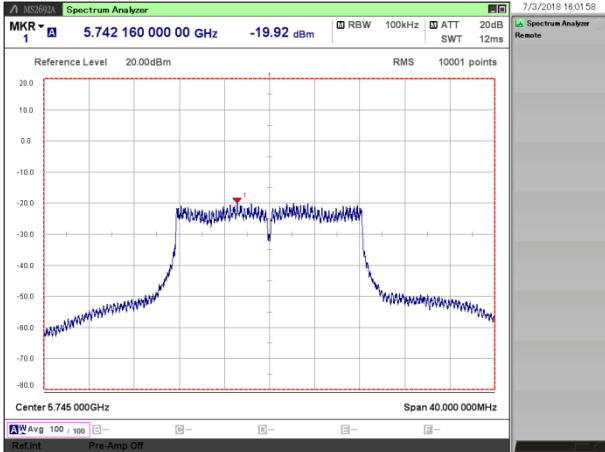


[802.11a/ 5785 MHz]

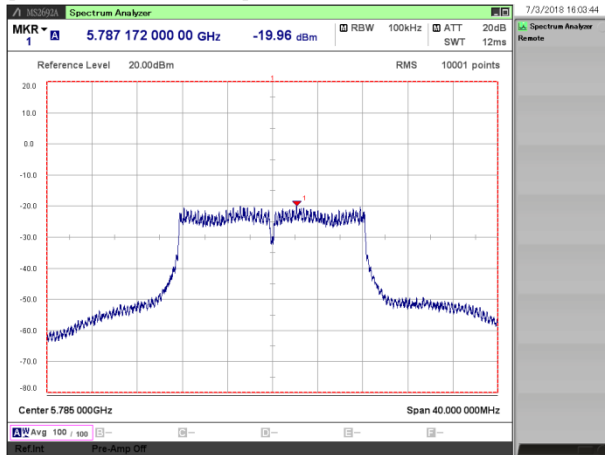


[802.11a/ 5825 MHz]

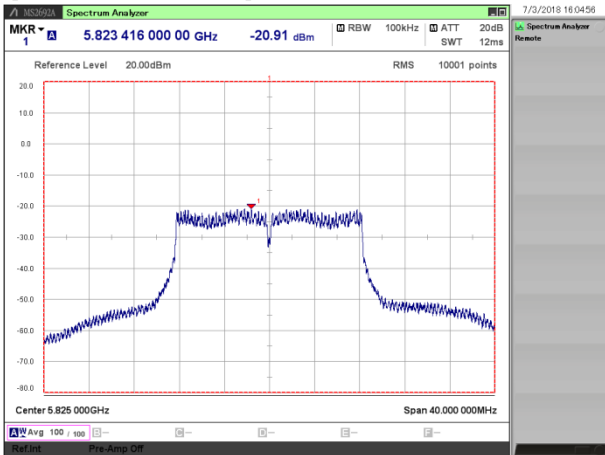


[802.11n (HT20)/ 5180 MHz]

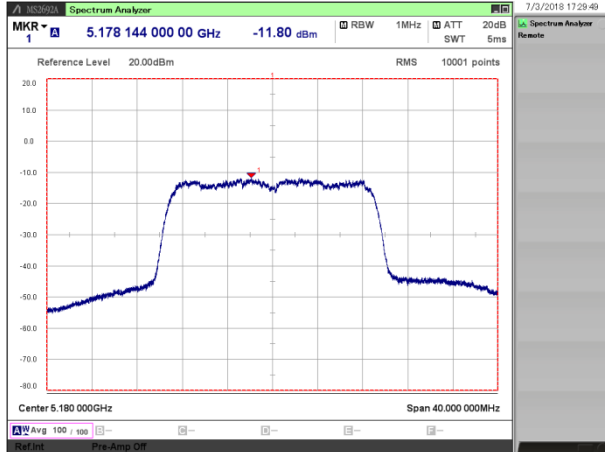


[802.11n (HT20)/ 5220 MHz]

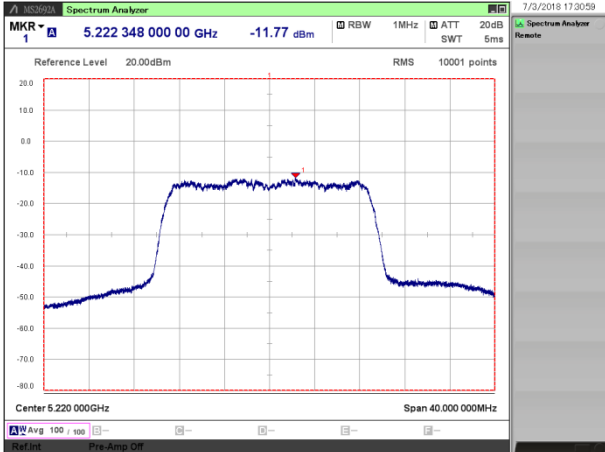


[802.11n (HT20)/ 5240 MHz]

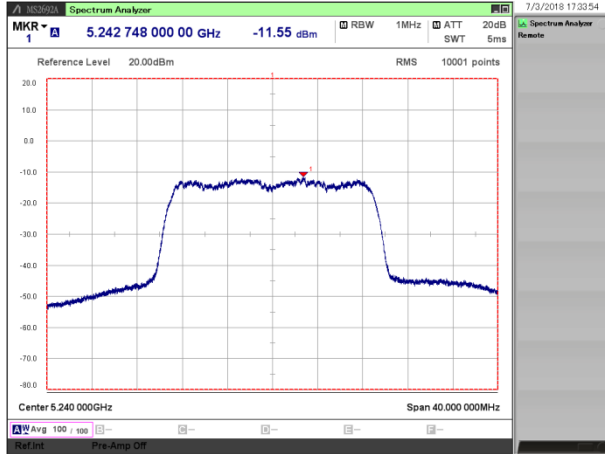


[802.11n (HT20)/ 5260 MHz]

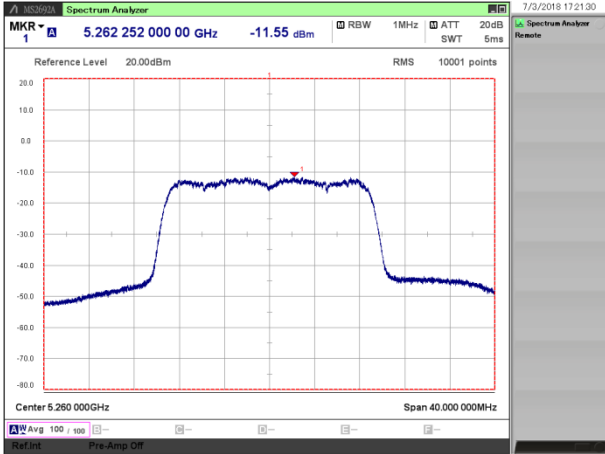


[802.11n (HT20)/ 5300 MHz]

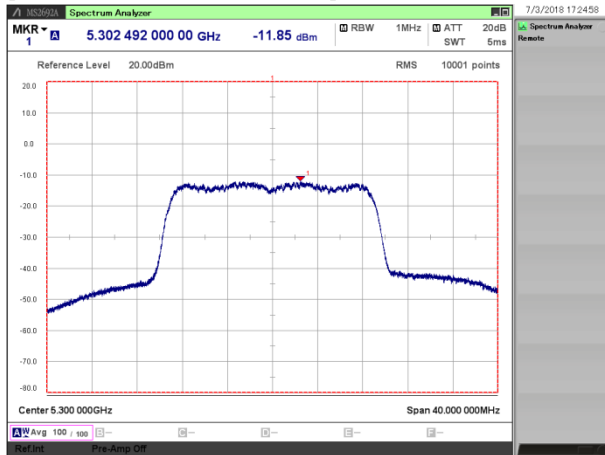


[802.11n (HT20)/ 5320 MHz]

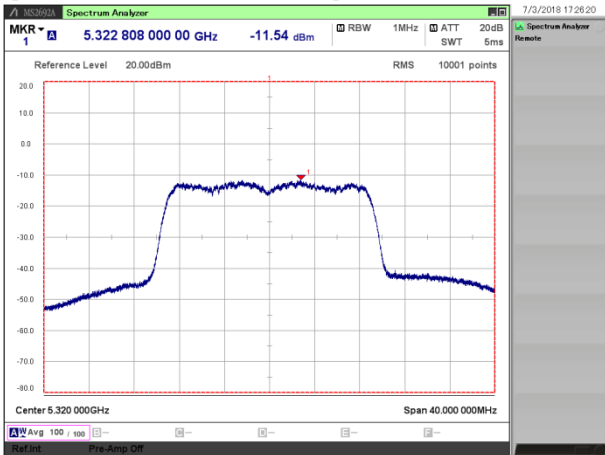


[802.11n (HT20)/ 5500 MHz]

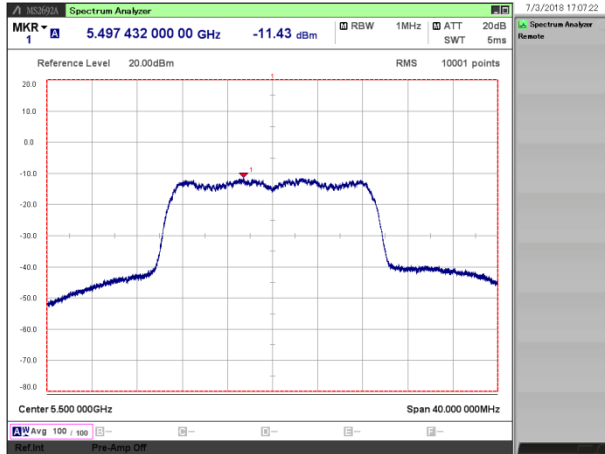


[802.11n (HT20)/ 5600 MHz]

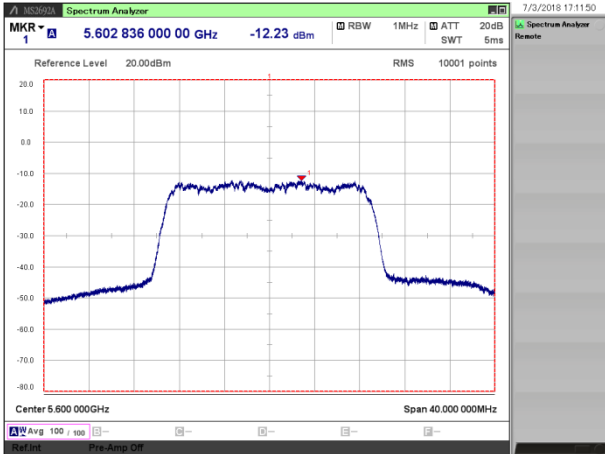


[802.11n (HT20)/ 5700 MHz]

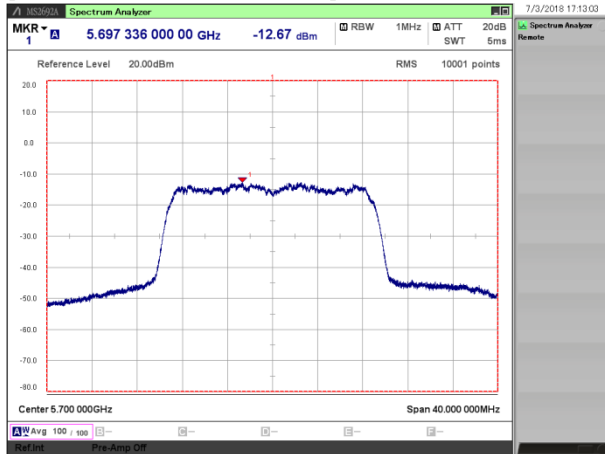


[802.11n (HT20)/ 5745 MHz]

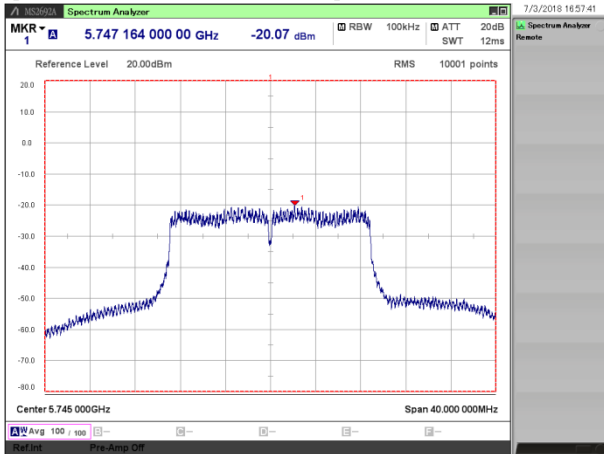


[802.11n (HT20)/ 5785 MHz]

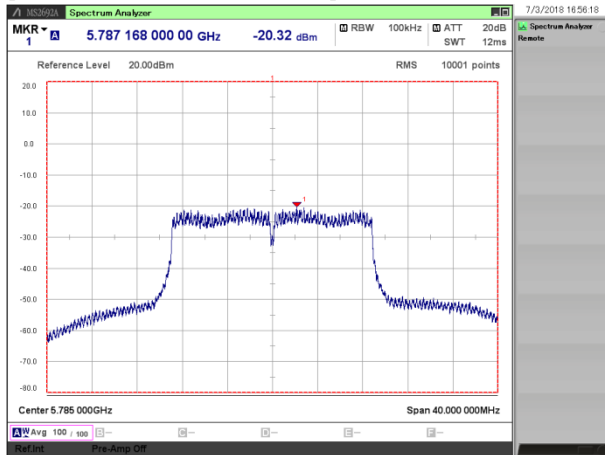


[802.11n (HT20)/ 5825 MHz]

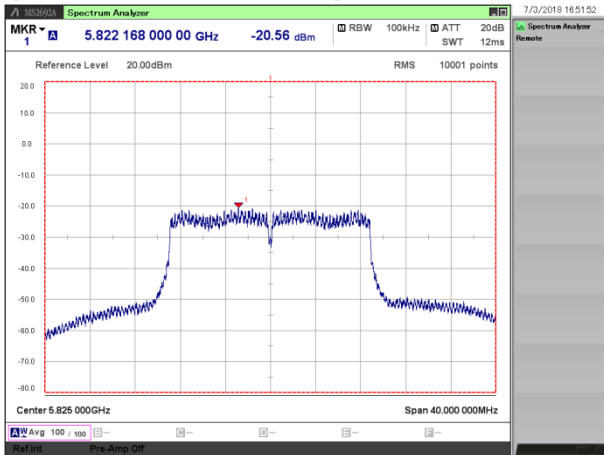


[802.11ac (VHT20)/ 5180 MHz]

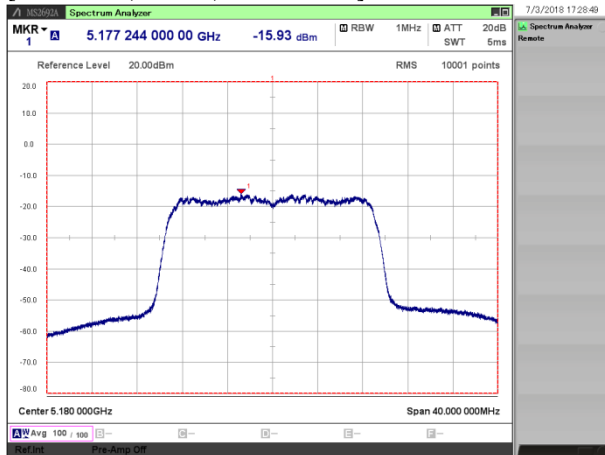


[802.11ac (VHT20)/ 5220 MHz]

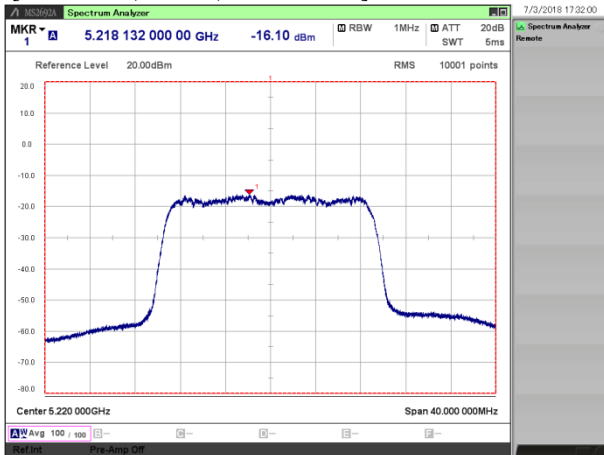


[802.11ac (VHT20)/ 5240 MHz]

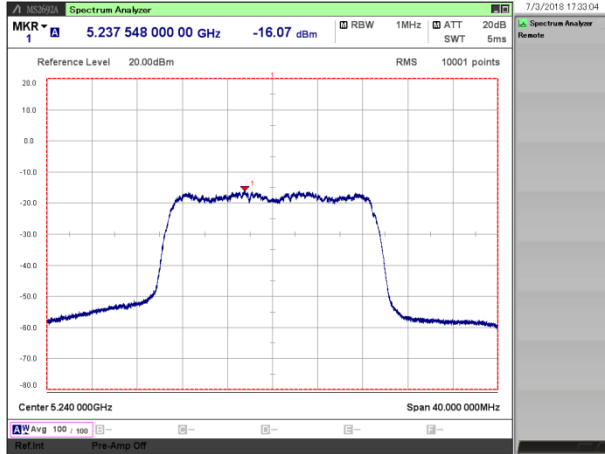


[802.11ac (VHT20)/ 5260 MHz]

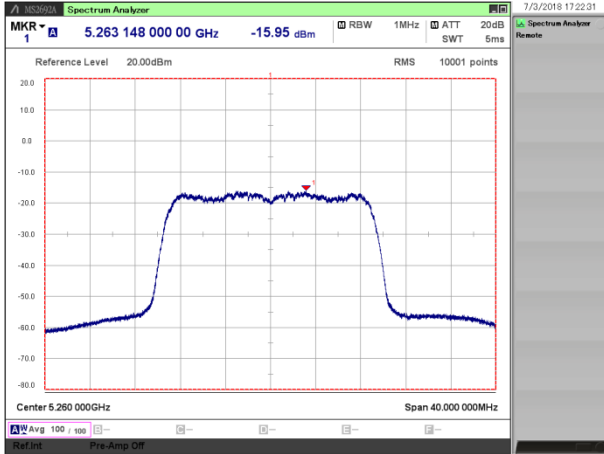


[802.11ac (VHT20)/ 5300 MHz]

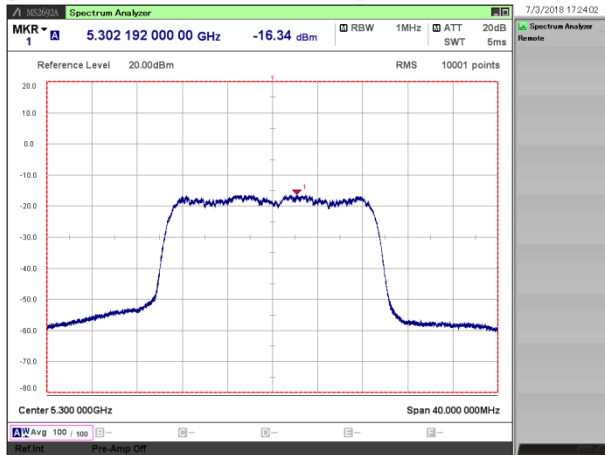


[802.11ac (VHT20)/ 5320 MHz]

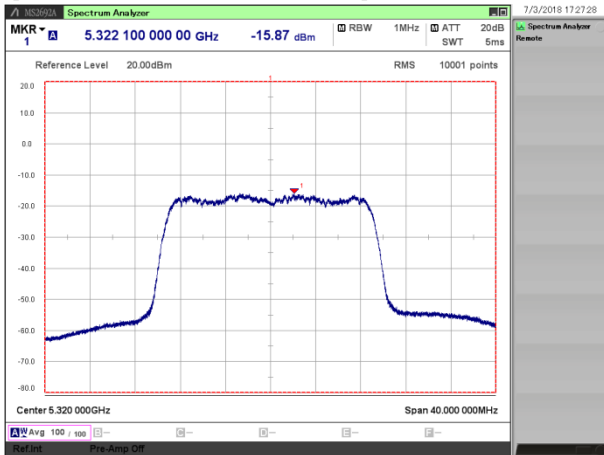


[802.11ac (VHT20)/ 5500 MHz]

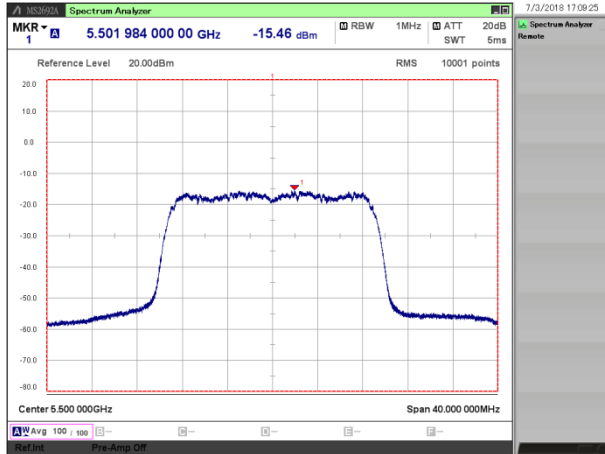


[802.11ac (VHT20)/ 5600 MHz]

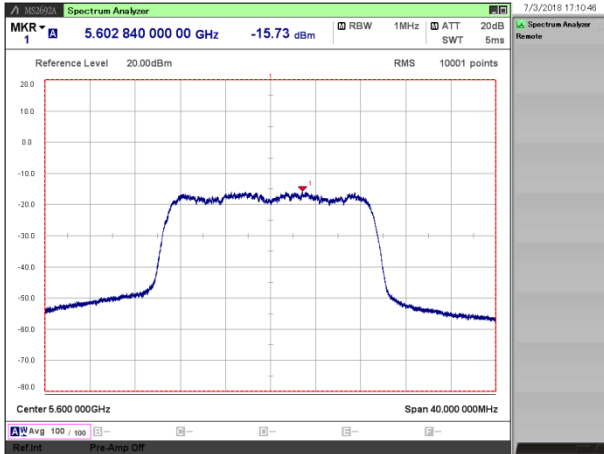


[802.11ac (VHT20)/ 5700 MHz]

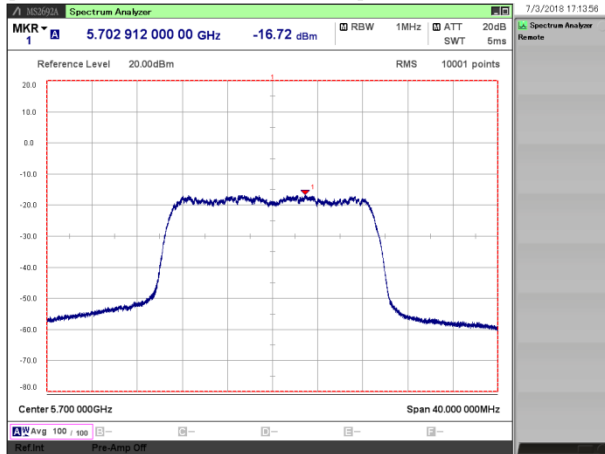


[802.11ac (VHT20)/ 5720 MHz]

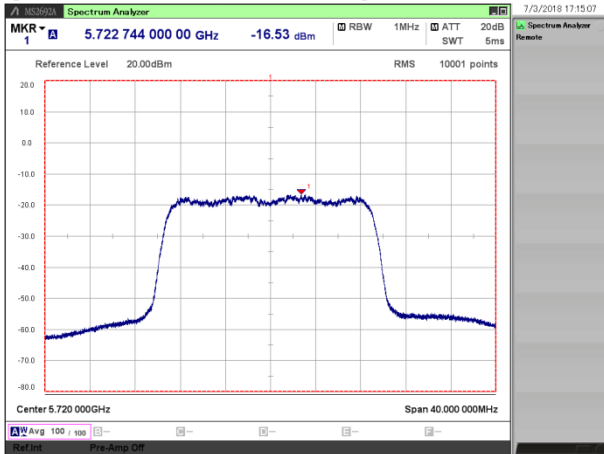


[802.11ac (VHT20)/ 5745 MHz]

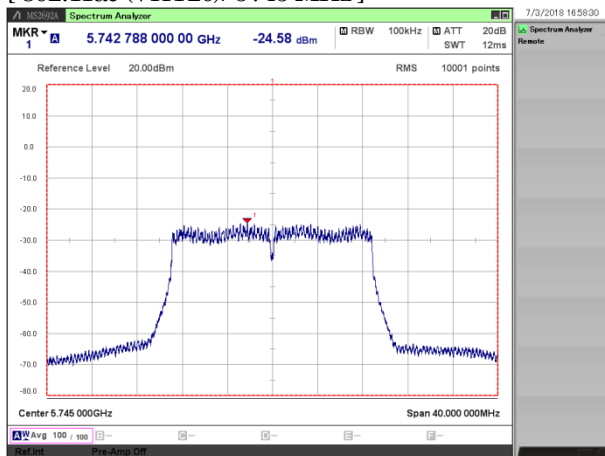


[802.11ac (VHT20)/ 5785 MHz]

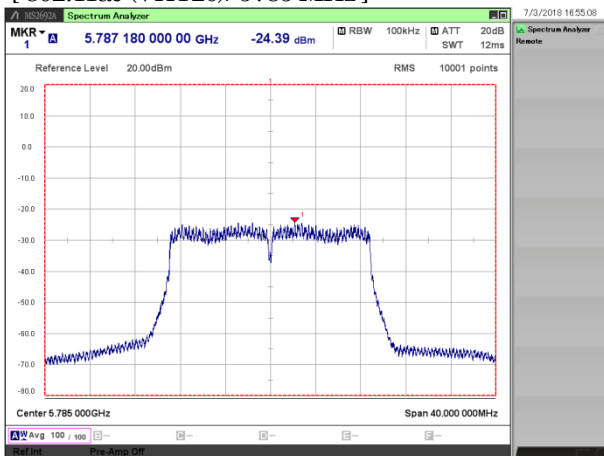


[802.11ac (VHT20)/ 5825 MHz]

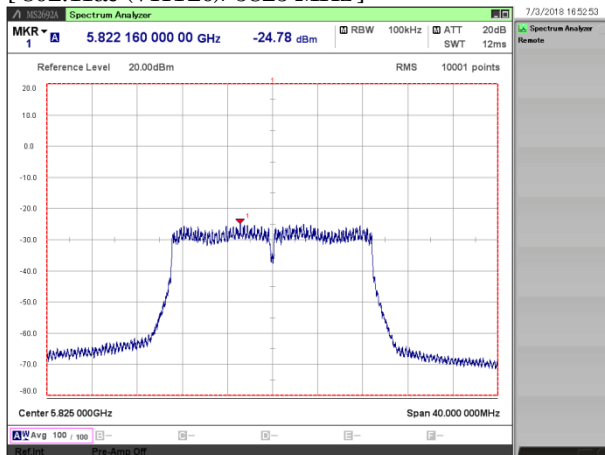


[802.11n (HT40)/ 5190 MHz]

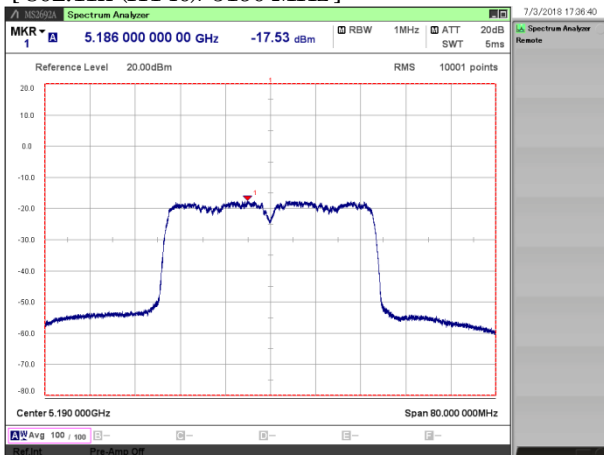


[802.11n (HT40)/ 5230 MHz]

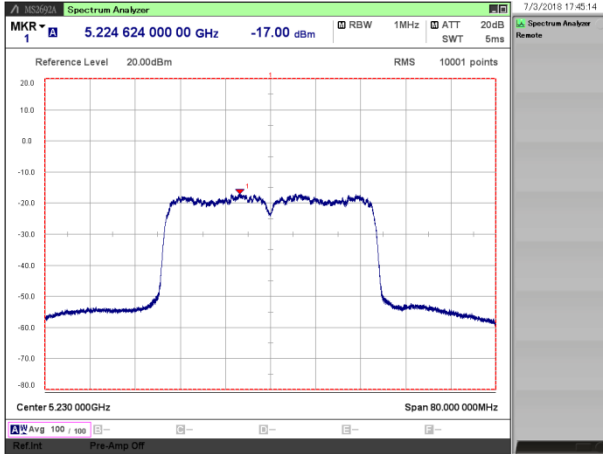


[802.11n (HT40)/ 5270 MHz]

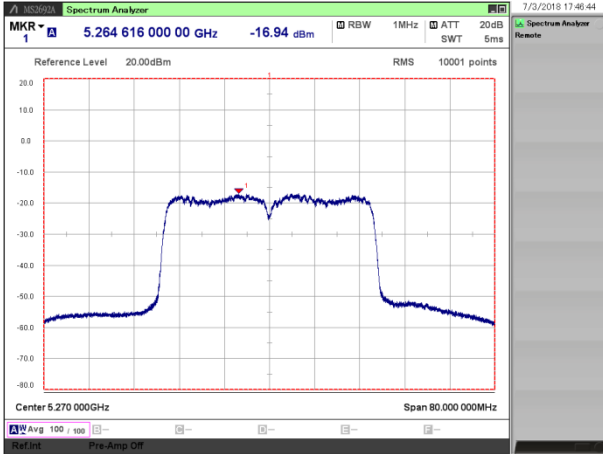


[802.11n (HT40)/ 5310 MHz]

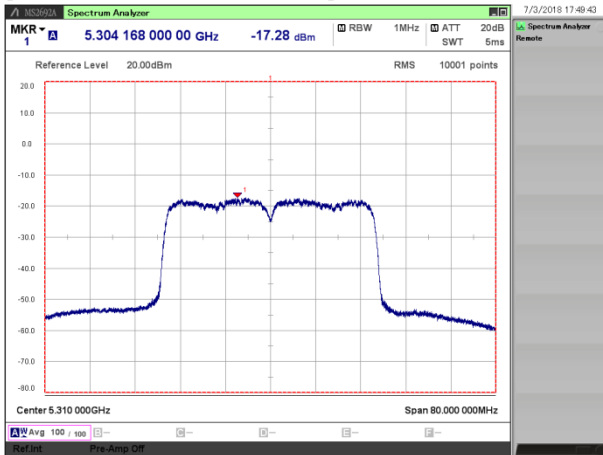


[802.11n (HT40)/ 5510 MHz]

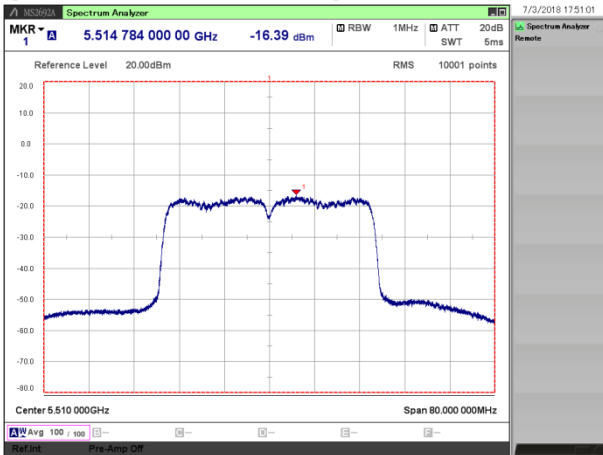


[802.11n (HT40)/ 5590 MHz]

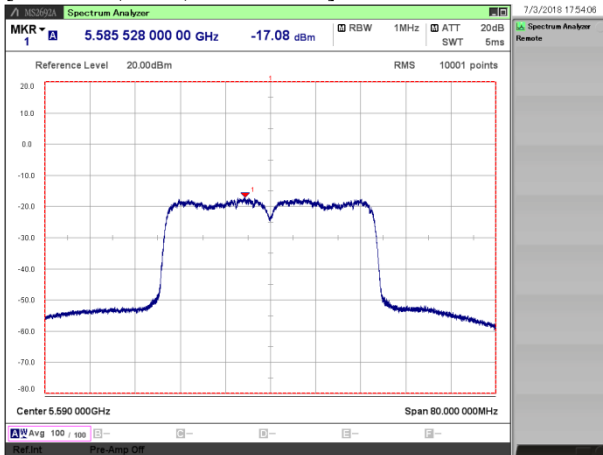


[802.11n (HT40)/ 5670 MHz]

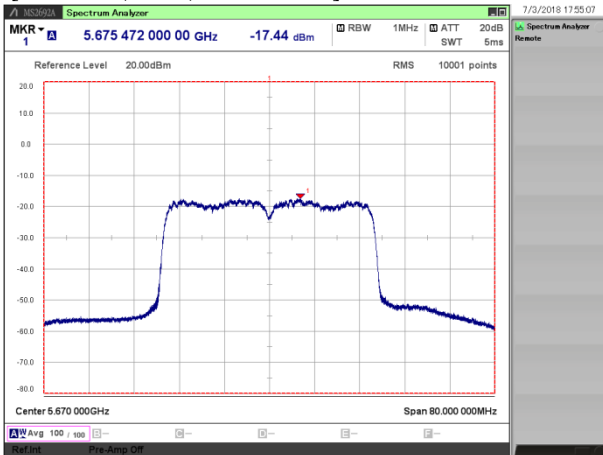


[802.11n (HT40)/ 5755 MHz]

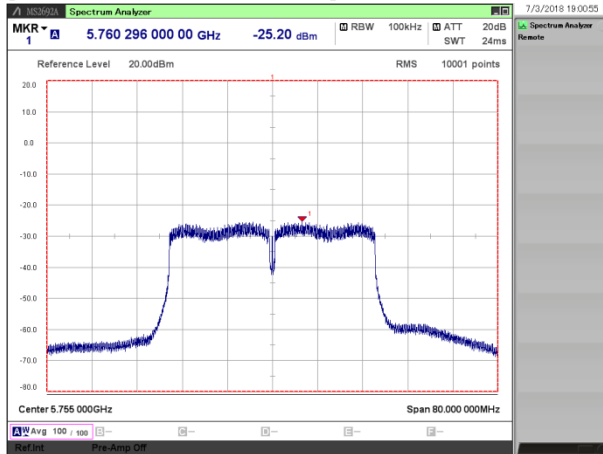


[802.11n (HT40)/ 5795 MHz]

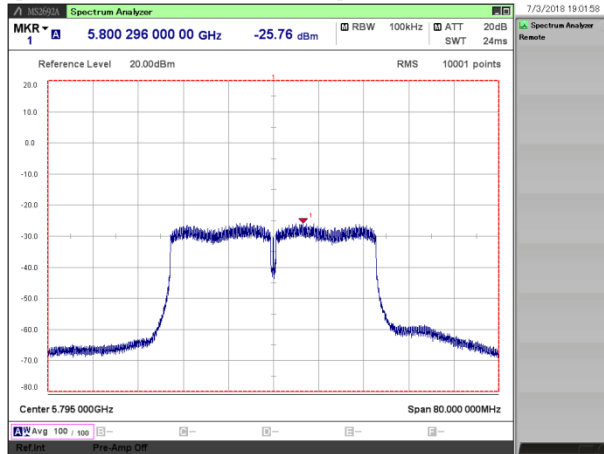


[802.11ac (VHT40)/ 5190 MHz]

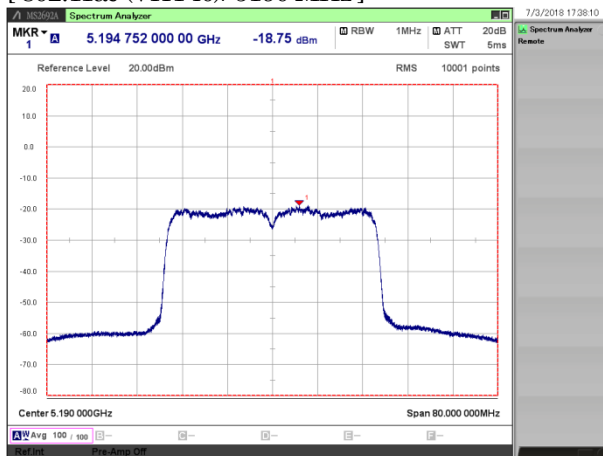

[802.11ac (VHT40)/ 5230 MHz]

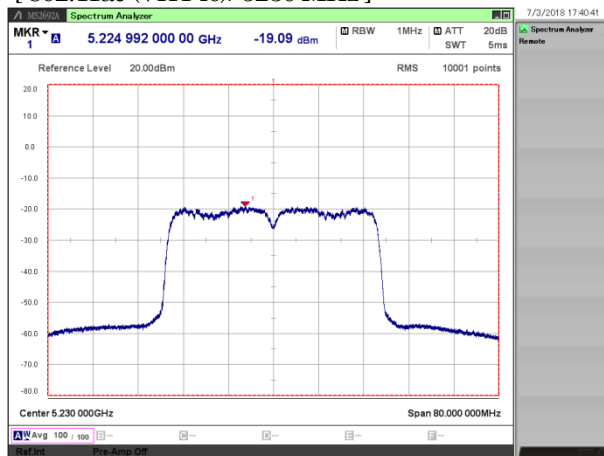

[802.11ac (VHT40)/ 5270 MHz]

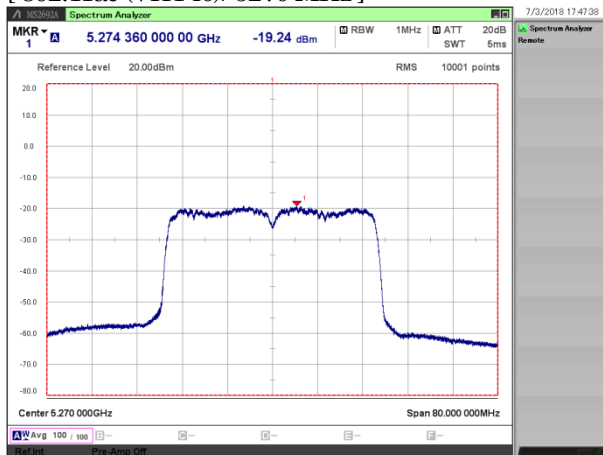

[802.11ac (VHT40)/ 5310 MHz]

