



RADIO TEST REPORT

Test Report No. : 11288814H-B-R1

Applicant : Sony Interactive Entertainment Inc.
Type of Equipment : Wireless communication module
Model No. : J20H091
FCC ID : AK8M16DFL1
Test regulation : **FCC Part 15 Subpart C: 2016**
*WLAN, Bluetooth Low Energy parts
*Class II permissive change
(Maximum Peak Output Power and Radiated Spurious Emission tests only)
Test Result : **Complied**

1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the above regulation.
4. The test results in this report are traceable to the national or international standards.
5. This test report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.
6. This test report covers Radio technical requirements. It does not cover administrative issues such as Manual or non-Radio test related Requirements. (if applicable)
7. This report is a revised version of 11288814H-B. 11288814H-B is replaced with this report.

Date of test: February 16 to May 20, 2016

Representative test engineer:


Yuta Moriya
Engineer

Consumer Technology Division

Approved by:


Takayuki Shimada
Engineer

Consumer Technology Division



NVLAP LAB CODE: 200572-0

This laboratory is accredited by the NVLAP LAB CODE 200572-0, U.S.A. The tests reported herein have been performed in accordance with its terms of accreditation.
*As for the range of Accreditation in NVLAP, you may refer to the WEB address,
http://japan.ul.com/resources/emc_accredited/

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

13-EM-F0429

CONTENTS	PAGE
SECTION 1: Customer information.....	4
SECTION 2: Equipment under test (E.U.T.).....	4
SECTION 3: Test specification, procedures & results.....	7
SECTION 4: Operation of E.U.T. during testing.....	10
SECTION 5: Radiated Spurious Emission	12
SECTION 6: Antenna Terminal Conducted Tests.....	14
APPENDIX 1: Test data	15
Maximum Peak Output Power	15
Radiated Spurious Emission	16
APPENDIX 2: Test instruments	36
APPENDIX 3: Photographs of test setup	37
Radiated Spurious Emission	37
Worst Case Position	39
Test Configuration and peripherals	42

SECTION 1: Customer information

Company Name	Sony Interactive Entertainment Inc.
Brand Name	SONY
Address	1-7-1 Konan, Minato-ku, Tokyo, 108-0075 Japan
Telephone Number	+81-3-6748-6333
Facsimile Number	+81-3-6748-6383
Contact Person	Kiyoto Sasaki

SECTION 2: Equipment under test (E.U.T.)

2.1 Identification of E.U.T.

Type of Equipment	Wireless communication module
Model No	J20H091
Serial No	Refer to Clause 4.2
Country of Manufacture	China/Japan
Receipt Date of Sample	February 6, 2016 (Maximum Peak Output Power test) April 30, 2016 (Radiated Spurious Emission test)
Condition of EUT	Production prototype (Not for Sale: This sample is equivalent to mass-produced items.)
Modification of EUT	No modification by the test lab.

2.2 Product Description

J20H091 is the Wireless communication module.

Product Specification

Clock frequency in the system (radio part)	40MHz
Operating Temperature	-10 - +85 deg. C
Power Supply	DC 3.3 V, DC 1.8 V
Size	20 x 18 x 3.6 mm, 55pin LGA

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radio Specification

WLAN (IEEE802.11b/g/n-20)

Equipment Type	Transceiver
Frequency of Operation	2412-2462MHz
Type of Modulation	DSSS, OFDM
Bandwidth & Channel spacing	Less than 20MHz & 5MHz
Method of frequency generation	Synthesizer
Power Supply (inner)	DC 3.3 V / DC 1.8 V / DC 1.1 V
Antenna Type	PIFA (Antenna port WA for 2.4GHz / Antenna port WB)
Antenna Gain: G _{ANT}	5.6dBi (Antenna port WA for 2.4GHz / Antenna port WB)
Directional Gain *1)	8.61dBi

WLAN (IEEE802.11a/11n-20/11ac-20/11n-40/11ac-40/11ac-80)

Equipment Type	Transceiver
Frequency of Operation	W52: 5180-5240MHz W53: 5260-5320MHz W56: 5500-5700MHz W58: 5745-5825MHz
Type of Modulation	OFDM
Bandwidth & Channel spacing	Less than 20MHz/40MHz/80MHz&20MHz/40MHz/80MHz
Method of frequency generation	Synthesizer
Power Supply (inner)	DC 3.3 V / DC 1.8 V / DC 1.1 V
Antenna Type	PIFA (Antenna port WA for 5GHz / Antenna port WC for 5GHz)
Antenna Gain: G _{ANT}	5.0dBi (Antenna port WA for 5GHz) 5.6dBi (Antenna port WC for 5GHz)
Directional Gain *1)	8.32dBi

Bluetooth (BDR/EDR)

Equipment Type	Transceiver
Frequency of Operation	2402-2480MHz
Type of Modulation	FHSS (GFSK, $\pi/4$ DQPSK, 8DPSK)
Bandwidth & Channel spacing	79MHz & 1MHz
Method of frequency generation	Synthesizer
Power Supply (inner)	DC 3.3 V / DC 1.8 V / DC 1.1 V
Antenna Type	PIFA (Antenna port WC for 2.4 GHz)
Antenna Gain	7.2dBi (Antenna port WC for 2.4 GHz)

Bluetooth (Low Energy)

Equipment Type	Transceiver
Frequency of Operation	2402-2480MHz
Type of Modulation	GFSK
Bandwidth & Channel spacing	1MHz & 2MHz
Method of frequency generation	Synthesizer
Power Supply (inner)	DC 3.3 V / DC 1.8 V / DC 1.1 V
Antenna Type	PIFA (Antenna port WC for 2.4 GHz)
Antenna Gain	7.2dBi (Antenna port WC for 2.4 GHz)

*1) Directional antenna gain = $10 \log \left(\frac{G_{ANT1}}{10^{20}} + \frac{G_{ANT2}}{10^{20}} \right)^2 / 2$

*This test report applies to WLAN (2.4 GHz band) and Bluetooth Low Energy.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

<Contents of the change from original model>

Test Report Number of original model is 11155194H-B-R3 (issued by UL Japan, Inc.).

Specification was changed from the original model as follows:

* The form change of the antenna design.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

SECTION 3: Test specification, procedures & results

3.1 Test Specification

Test Specification : FCC Part 15 Subpart C
FCC part 15 final revised on April 6, 2016.

Title : FCC 47CFR Part15 Radio Frequency Device Subpart C Intentional Radiators
Section 15.207 Conducted limits
Section 15.247 Operation within the bands 902-928MHz,
2400-2483.5MHz, and 5725-5850MHz

* Also the EUT complies with FCC Part 15 Subpart B.

3.2 Procedures and results

Item	Test Procedure	Specification	Worst margin	Results	Remarks
Maximum Peak Output Power *1)	FCC: KDB 558074 D01 DTS Meas Guidance v03r05 ----- IC: RSS-Gen 6.12	FCC: Section 15.247(b)(3) ----- IC: RSS-247 5.4(4)	See data.	Complied	Conducted
Spurious Emission Restricted Band Edges	FCC: KDB 558074 D01 DTS Meas Guidance v03r05 ----- IC: RSS-Gen 6.13	FCC: Section15.247(d) ----- IC: RSS-247 5.5 RSS-Gen 8.9 RSS-Gen 8.10	5.5 dB 2483.500 MHz, AV, Hori.	Complied	Radiated (above 30 MHz) *2)

Note: UL Japan, Inc.'s EMI Work Procedures No. 13-EM-W0420 and 13-EM-W0422.

*1) Since directional antenna gain of Bluetooth Low Energy was higher than the original test report: 11155194H-B-R3, this test report was shown as recalculated limit.

*2) Radiated test was selected over 30 MHz based on section 15.247(d) and KDB 558074 D01 DTS Meas Guidance v03r05 12.2.7.

* In case any questions arise about test procedure, ANSI C63.10: 2013 is also referred.

FCC Part 15.31 (e)

The EUT has the power supply regulator. However one of the input voltages to RF part doesn't go through the regulator. The stable voltage will be supplied by the end product, which will be required to have a power supply regulator. Therefore, the EUT complies with the requirement.

FCC Part 15.203/212 Antenna requirement

The EUT has a unique coupling/antenna connector (U.FL). Therefore the equipment complies with the requirement of 15.203/212.

3.3 Addition to standard

No addition, exclusion nor deviation has been made from the standard.

3.4 Uncertainty

EMI

The following uncertainties have been calculated to provide a confidence level of 95 % using a coverage factor $k = 2$.
Ise EMC Lab.

Antenna terminal test Uncertainty (+/-)							
Power meter		Conducted emission and Power density			Conducted emission		Channel power
Below 1 GHz	Above 1 GHz	Below 1 GHz	1 GHz - 3 GHz	3 GHz - 18 GHz	18 GHz - 26.5 GHz	26.5 GHz - 40 GHz	
0.9 dB	1.0 dB	1.4 dB	1.7 dB	2.8 dB	2.8 dB	2.9 dB	2.6 dB

Test distance	Radiated emission (+dB) 9 kHz - 30 MHz
3m	3.8 dB
10m	3.7 dB

Polarity	Radiated emission (Below 1GHz)			
	(3 m*)(+dB)		(10 m*)(+dB)	
	30 – 200 MHz	200 – 1000MHz	30 – 200 MHz	200 – 1000MHz
Horizontal	4.9 dB	5.2 dB	4.9 dB	5.0 dB
Vertical	4.6 dB	5.9 dB	5.0 dB	5.0 dB

Radiated emission				
(3 m*)(+dB)		(1 m*)(+dB)	(1 m*)(+dB)	(10 m*)(+dB)
1 – 6GHz	6 – 18GHz	10 – 26.5 GHz	26.5 – 40GHz	1 -18 GHz
5.1 dB	5.3 dB	5.1 dB	5.1 dB	5.3 dB

*Measurement distance

Radiated emission test

The data listed in this test report has enough margin, more than the site margin.

3.5 Test Location

UL Japan, Inc. Ise EMC Lab. *NVLAP Lab. code: 200572-0
4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN
Telephone: +81 596 24 8999, Facsimile: +81 596 24 8124

Test site	IC Registration Number	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Other rooms	Maximum measurement distance
No.1 semi-anechoic chamber	2973C-1	19.2 x 11.2 x 7.7	7.0 x 6.0	No.1 Power source room	10 m
No.2 semi-anechoic chamber	2973C-2	7.5 x 5.8 x 5.2	4.0 x 4.0	-	3 m
No.3 semi-anechoic chamber	2973C-3	12.0 x 8.5 x 5.9	6.8 x 5.75	No.3 Preparation room	3 m
No.3 shielded room	-	4.0 x 6.0 x 2.7	N/A	-	-
No.4 semi-anechoic chamber	2973C-4	12.0 x 8.5 x 5.9	6.8 x 5.75	No.4 Preparation room	3 m
No.4 shielded room	-	4.0 x 6.0 x 2.7	N/A	-	-
No.5 semi-anechoic chamber	-	6.0 x 6.0 x 3.9	6.0 x 6.0	-	-
No.6 shielded room	-	4.0 x 4.5 x 2.7	4.0 x 4.5	-	-
No.6 measurement room	-	4.75 x 5.4 x 3.0	4.75 x 4.15	-	-
No.7 shielded room	-	4.7 x 7.5 x 2.7	4.7 x 7.5	-	-
No.8 measurement room	-	3.1 x 5.0 x 2.7	N/A	-	-
No.9 measurement room	-	8.8 x 4.6 x 2.8	2.4 x 2.4	-	-
No.11 measurement room	-	6.2 x 4.7 x 3.0	4.8 x 4.6	-	-

* Size of vertical conducting plane (for Conducted Emission test) : 2.0 m x 2.0m for No.1, No.2, No.3, and No.4 semi-anechoic chambers and No.3 and No.4 shielded rooms.

3.6 Test data, Test instruments, and Test set up

Refer to APPENDIX.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

SECTION 4: Operation of E.U.T. during testing

4.1 Operating Mode(s)

Test operating mode was determined as follows according to “Section 1 of 6 802.11 a/b/g/n testing - Managing Complex Regulatory Approvals - ” of TCB Council Workshop October 2009.

Mode	Remarks*
IEEE 802.11b (11b)	2Mbps, PN9
IEEE 802.11g (11g)	9Mbps, PN9
IEEE 802.11n MIMO 20MHz BW (11n-20)	MCS 0, PN9
Bluetooth Low Energy(BT LE)	Maximum Packet Size, PRBS9
*The worst condition was determined based on the test result of Maximum Peak Output Power (Mid Channel) of original test report (Test report No. 11155194H-B-R3).	
*The power value of the EUT was set for testing as follows (setting value might be different from product specification value); Power settings: WLAN 8(dBm) Bluetooth (LE) Same as production model Software: O-pro_DOS_Labtool_Ver 2.0.0.88 *This setting of software is the worst case. Any conditions under the normal use do not exceed the condition of setting. In addition, end users cannot change the settings of the output power of the product.	

*Details of Operating mode for WLAN

Test Item	Operating Mode	Used Antenna port	Tested frequency
Spurious Emission (Radiated)	11b Tx 11n-20 Tx *1)	WA + WB	2412MHz 2437MHz 2462MHz
*1) The test was performed on 11n-20 Tx mode according to “Section 1 of 6 802.11 a/b/g/n testing- Managing Complex Regulatory Approvals - ” of TCB Council Workshop October 2009, as the 11n-20 Tx mode had higher power than 11g mode at antenna terminal test.			

*Details of Operating mode for BT LE

Test Item	Operating Mode	Tested frequency
Maximum Peak Output Power, Spurious Emission (Radiated)	BT LE	2402MHz 2440MHz 2480MHz

*Simultaneously transmission

Test Item	Mode *1)
Spurious Emission (Radiated)	Tx BT LE 2402 MHz + 11n-20 5180 MHz Tx BT LE 2440 MHz + 11n-20 5180 MHz Tx BT LE 2480 MHz + 11n-20 5180 MHz
*1) The test was performed on the mode as a representative, because it had the highest power of 5GHz band at antenna terminal test.	

4.2 Configuration and peripherals

This page has been submitted for a separate exhibit.

SECTION 5: Radiated Spurious Emission

Test Procedure

It was measured based on "11.0 Emissions in non-restricted frequency bands" of "558074 D01 DTS Meas Guidance v03r05".

[For below 1GHz]

EUT was placed on a urethane platform of nominal size, 0.5 m by 1.0 m, raised 0.8 m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with a ground plane.

[For above 1GHz]

EUT was placed on a urethane platform of nominal size, 0.5 m by 1.0 m, raised 1.5 m above the conducting ground plane.

The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with absorbent materials lined on a ground plane.

The height of the measuring antenna varied between 1 and 4 m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field strength.

The measurements were performed for both vertical and horizontal antenna polarization with the Test Receiver, or the Spectrum Analyzer.

The measurements were made with the following detector function of the test receiver and the Spectrum analyzer (in linear mode).

The test was made with the detector (RBW/VBW) in the following table.

When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

Test Antennas are used as below;

Frequency	30 MHz to 200 MHz	200 MHz to 1 GHz	Above 1 GHz
Antenna Type	Biconical	Logperiodic	Horn

In any 100 kHz bandwidth outside the restricted band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator confirmed 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on a radiated measurement.

20 dBc was applied to the frequency over the limit of FCC 15.209 / Table 4 of RSS-Gen 8.9(IC) and outside the restricted band of FCC15.205 / Table 6 of RSS-Gen 8.10 (IC).

Frequency	Below 1 GHz	Above 1 GHz		20 dBc
Instrument used	Test Receiver	Spectrum Analyzer		Spectrum Analyzer
Detector	QP	PK	AV *1)	PK
IF Bandwidth	BW 120 kHz	RBW: 1 MHz VBW: 3 MHz	Average Power Method: RBW: 1 MHz VBW: 3 MHz Detector: Power Averaging (RMS) Trace: 100 traces If duty cycle was less than 98%, a duty factor was added to the results.	RBW: 100 kHz VBW: 300kHz
Test Distance	3m	4.4 m / 4.5 m *2) (1 GHz – 10GHz), 1 m *3) (10 GHz – 26.5 GHz)		4.4 m / 4.5 m *2) (1 GHz – 10GHz), 1 m *3) (10 GHz – 26.5 GHz)

*1) Average Power Measurement was performed based on 6.0 & 12.2.5 of "KDB 558074 D01 DTS Meas Guidance v03r05"

*2) Distance Factor: $20 \times \log(4.4 \text{ m} / 3.0 \text{ m}) = 3.33 \text{ dB}$ (for WLAN) / $20 \times \log(4.5 \text{ m} / 3.0 \text{ m}) = 3.53 \text{ dB}$ (for BT LE)

*3) Distance Factor: $20 \times \log(1.0 \text{ m} / 3.0 \text{ m}) = -9.5 \text{ dB}$

- The carrier level and noise levels were confirmed at each position of X, Y and Z axes of EUT (Antenna and Module) to see the position of maximum noise, and the test was made at the position that has the maximum noise.

The test results and limit are rounded off to one decimal place, so some differences might be observed.

Measurement range : 30 M - 26.5 GHz
Test data : APPENDIX
Test result : Pass

SECTION 6: Antenna Terminal Conducted Tests

Test Procedure

The tests were made with below setting connected to the antenna port.

Test	Span	RBW	VBW	Sweep time	Detector	Trace	Instrument used
Maximum Peak Output Power	-	-	-	Auto	Peak	-	Power Meter (Sensor: 50 MHz BW)

The test results and limit are rounded off to two decimals place, so some differences might be observed.

Test data : APPENDIX
Test result : Pass

APPENDIX 1: Test data

Maximum Peak Output Power

Test place Ise EMC Lab. No.3 Preparation Room
Report No. 11155194H
Date February 16, 2016
Temperature/ Humidity 23deg. C / 34% RH
Engineer Tomoki Matsui
Mode Tx BT LE

Freq. [MHz]	Reading Peak [dBm]	Cable Loss [dB]	Atten. [dB]	Result		Limit		Margin [dB]
				[dBm]	[mW]	[dBm]	[mW]	
2402	-9.63	1.77	10.03	2.17	1.65	28.80	758	26.63
2440	-9.69	1.78	10.03	2.12	1.63	28.80	758	26.68
2480	-9.75	1.79	10.03	2.07	1.61	28.80	758	26.73

Sample Calculation:

Result = Reading + Cable Loss (including the cable(s) customer supplied) + Attenuator

*This Limit was reduced by 1.2 dB for directional gain of the antenna/antenna array exceeding 6 dBi.

Radiated Spurious Emission

Test place : Ise EMC Lab. No.3 Semi Anechoic Chamber
Report No. : 11288814H
Date : May 18, 2016 May 19, 2016
Temperature / Humidity : 22 deg. C / 43 % RH 22deg. C / 46 % RH
Engineer : Yuta Moriya Yuta Moriya
 (1-10GHz) (Above 10GHz)
Mode : Tx 11b 2412 MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	2390.000	PK	42.7	26.9	6.6	32.7	-	43.5	73.9	30.4	
Hori	4824.000	PK	43.2	31.8	8.8	31.8	-	52.0	73.9	21.9	
Hori	7236.000	PK	41.6	36.0	8.6	32.6	-	53.6	73.9	20.3	Floor noise
Hori	9648.000	PK	41.7	38.2	9.4	33.3	-	56.0	73.9	17.9	Floor noise
Hori	2390.000	AV	34.6	26.9	6.6	32.7	-	35.4	53.9	18.5	
Hori	4824.000	AV	35.8	31.8	8.8	31.8	-	44.6	53.9	9.3	
Hori	7236.000	AV	31.5	36.0	8.6	32.6	-	43.5	53.9	10.4	Floor noise
Hori	9648.000	AV	31.8	38.2	9.4	33.3	-	46.1	53.9	7.8	Floor noise
Vert	2390.000	PK	44.1	26.9	6.6	32.7	-	44.9	73.9	29.0	
Vert	4824.000	PK	41.8	31.8	8.8	31.8	-	50.6	73.9	23.3	
Vert	7236.000	PK	41.9	36.0	8.6	32.6	-	53.9	73.9	20.0	Floor noise
Vert	9648.000	PK	41.9	38.2	9.4	33.3	-	56.2	73.9	17.7	Floor noise
Vert	2390.000	AV	35.2	26.9	6.6	32.7	-	36.0	53.9	17.9	
Vert	4824.000	AV	34.6	31.8	8.8	31.8	-	43.4	53.9	10.5	
Vert	7236.000	AV	31.6	36.0	8.6	32.6	-	43.6	53.9	10.3	Floor noise
Vert	9648.000	AV	31.9	38.2	9.4	33.3	-	46.2	53.9	7.7	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz 20log (4.4 m / 3.0 m) = 3.33 dB
 10 GHz - 26.5 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

20dBc Data Sheet

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	2412.000	PK	97.3	26.9	6.6	32.7	98.1	-	-	Carrier
Hori	2400.000	PK	40.1	26.9	6.6	32.7	40.9	78.1	37.2	
Vert	2412.000	PK	98.0	26.9	6.6	32.7	98.8	-	-	Carrier
Vert	2400.000	PK	39.1	26.9	6.6	32.7	39.9	78.8	38.9	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

UL Japan, Inc.

Ise EMC Lab.



4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission (Reference Plot for band-edge)

Test place	Ise EMC Lab. No.3 Semi Anechoic Chamber
Report No.	11288814H
Date	May 18, 2016
Temperature / Humidity	22 deg. C / 43 % RH
Engineer	Yuta Moriya (1-10GHz)
Mode	Tx 11b 2412 MHz

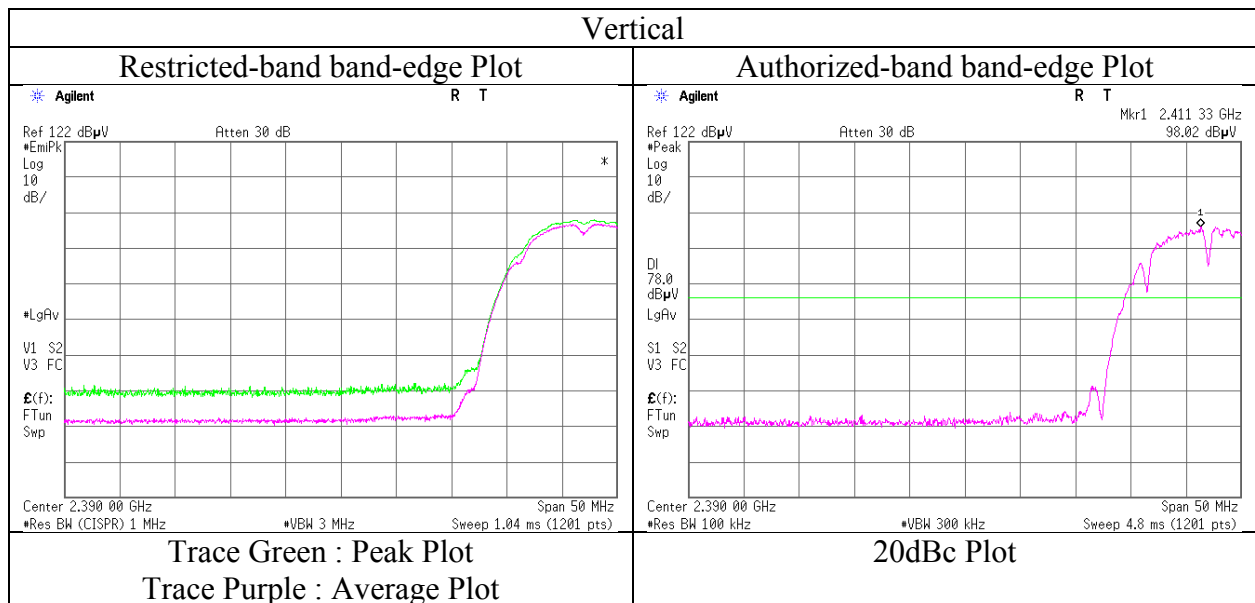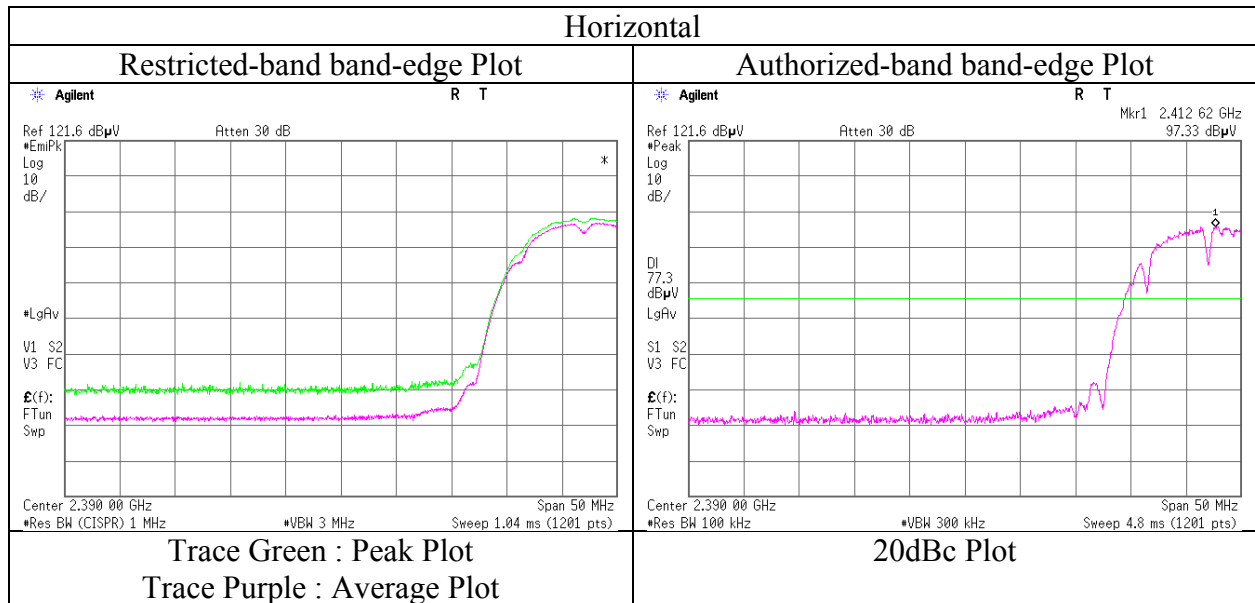

* Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place : Ise EMC Lab. No.3 Semi Anechoic Chamber
Report No. : 11288814H
Date : May 18, 2016 May 19, 2016
Temperature / Humidity : 22 deg. C / 43 % RH 22deg. C / 46 % RH
Engineer : Yuta Moriya Yuta Moriya
 (1-10GHz) (Above 10GHz)
Mode : Tx 11b 2437 MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	4874.000	PK	40.6	31.9	8.8	31.7	-	49.6	73.9	24.3	
Hori	7311.000	PK	40.5	36.0	8.7	32.6	-	52.6	73.9	21.3	Floor noise
Hori	9748.000	PK	41.6	38.2	9.4	33.3	-	55.9	73.9	18.0	Floor noise
Hori	4874.000	AV	32.8	31.9	8.8	31.7	-	41.8	53.9	12.1	
Hori	7311.000	AV	31.6	36.0	8.7	32.6	-	43.7	53.9	10.2	Floor noise
Hori	9748.000	AV	31.7	38.2	9.4	33.3	-	46.0	53.9	7.9	Floor noise
Vert	4874.000	PK	40.9	31.9	8.8	31.7	-	49.9	73.9	24.0	
Vert	7311.000	PK	41.5	36.0	8.7	32.6	-	53.6	73.9	20.3	Floor noise
Vert	9748.000	PK	40.1	38.2	9.4	33.3	-	54.4	73.9	19.5	Floor noise
Vert	4874.000	AV	32.6	31.9	8.8	31.7	-	41.6	53.9	12.3	
Vert	7311.000	AV	31.9	36.0	8.7	32.6	-	44.0	53.9	9.9	Floor noise
Vert	9748.000	AV	31.9	38.2	9.4	33.3	-	46.2	53.9	7.7	Floor noise



Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz $20\log(4.4\text{ m} / 3.0\text{ m}) = 3.33\text{ dB}$
 10 GHz - 26.5 GHz $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

Radiated Spurious Emission
(Reference Plot for band-edge)



Test place	Ise EMC Lab. No.3 Semi Anechoic Chamber
Report No.	11288814H
Date	May 18, 2016
Temperature / Humidity	22 deg. C / 43 % RH
Engineer	Yuta Moriya (1-10GHz)
Mode	Tx 11b 2462 MHz

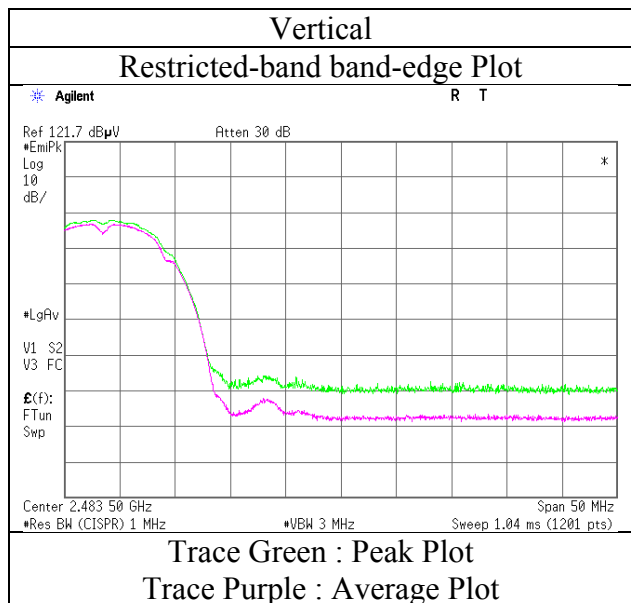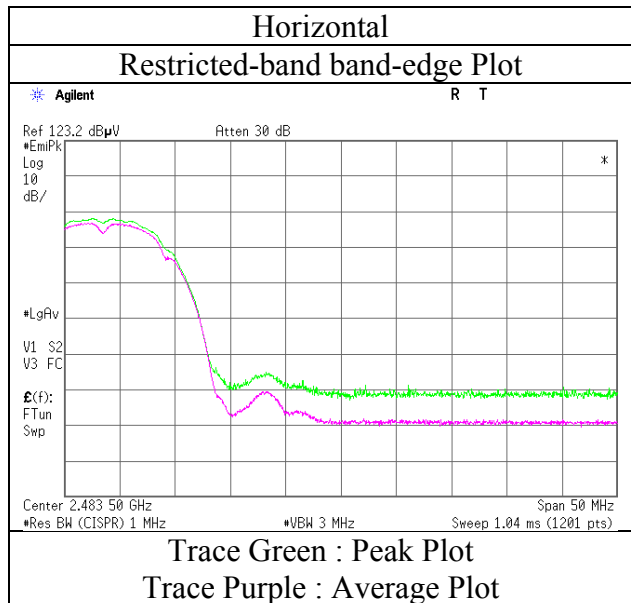

* Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission (Reference Plot for band-edge)

Test place	Ise EMC Lab. No.3 Semi Anechoic Chamber
Report No.	11288814H
Date	May 18, 2016
Temperature / Humidity	22 deg. C / 43 % RH
Engineer	Yuta Moriya (1-10GHz)
Mode	Tx 11n-20 2412 MHz

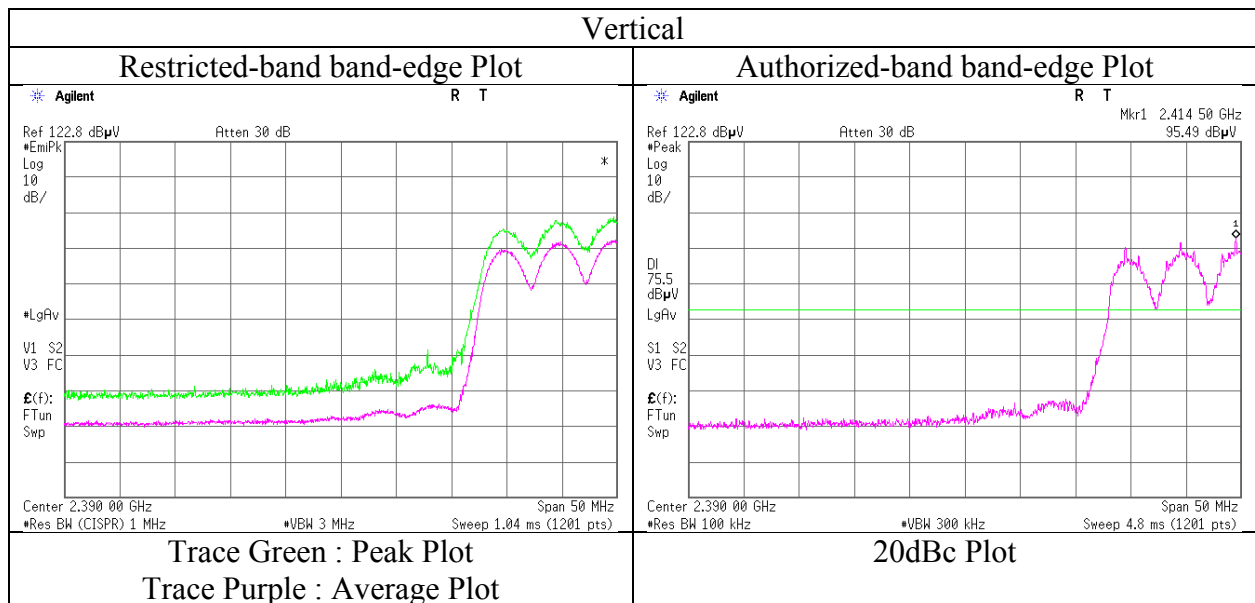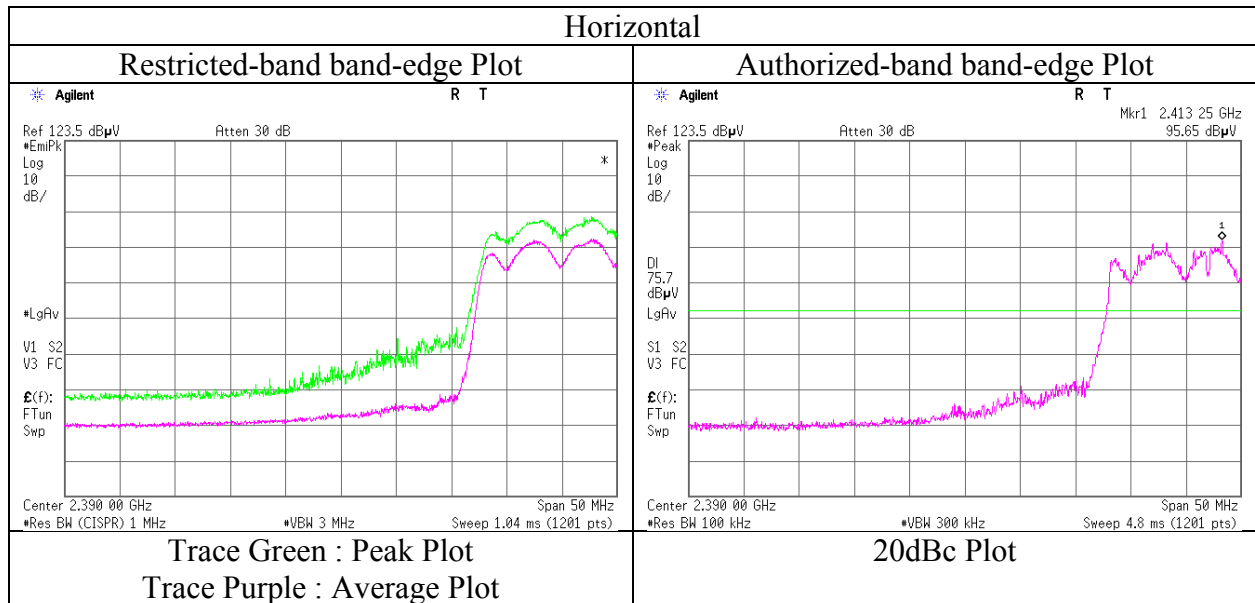

* Final result of restricted band edge was shown in tabular data.

UL Japan, Inc.

Ise EMC Lab.



4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission
(Plot data, Worst case)



Test place	Ise EMC Lab. No.3 Semi Anechoic Chamber		
Report No.	11288814H		
Date	May 18, 2016	May 19, 2016	May 20, 2016
Temperature / Humidity	22 deg. C / 43 % RH	22deg. C / 46 % RH	24 deg. C / 47 % RH
Engineer	Yuta Moriya (1-10GHz)	Yuta Moriya (Above 10GHz)	Yuta Moriya (Below 1GHz)
Mode	Tx 11n-20 2437 MHz		

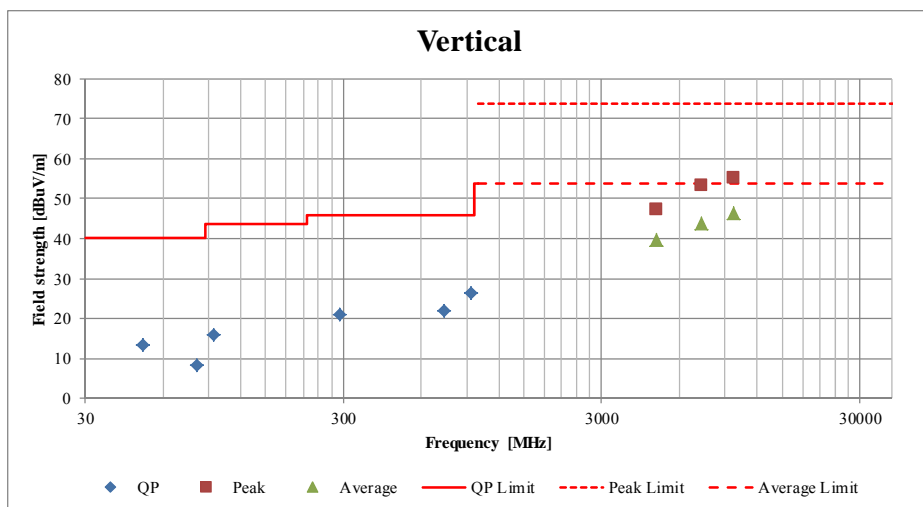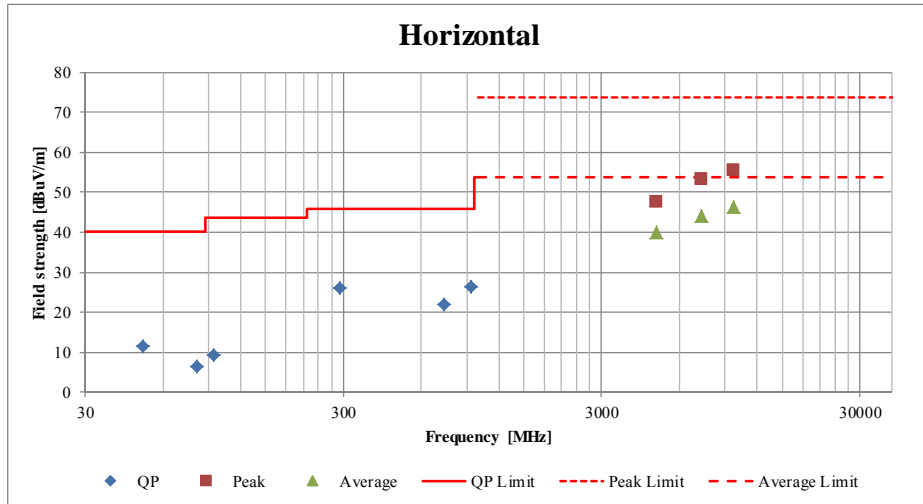

*These plots data contains sufficient number to show the trend of characteristic features for EUT.

Radiated Spurious Emission
(Reference Plot for band-edge)



Test place Ise EMC Lab. No.3 Semi Anechoic Chamber
Report No. 11288814H
Date May 18, 2016
Temperature / Humidity 22 deg. C / 43 % RH
Engineer Yuta Moriya
(1-10GHz)
Mode Tx 11n-20 2462 MHz

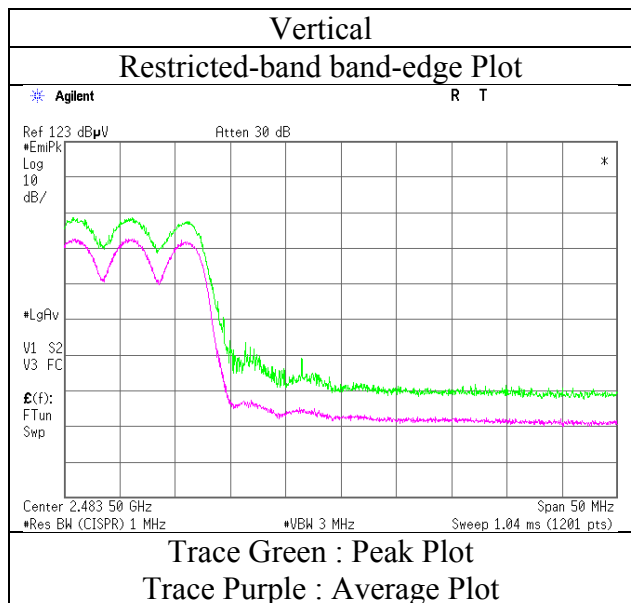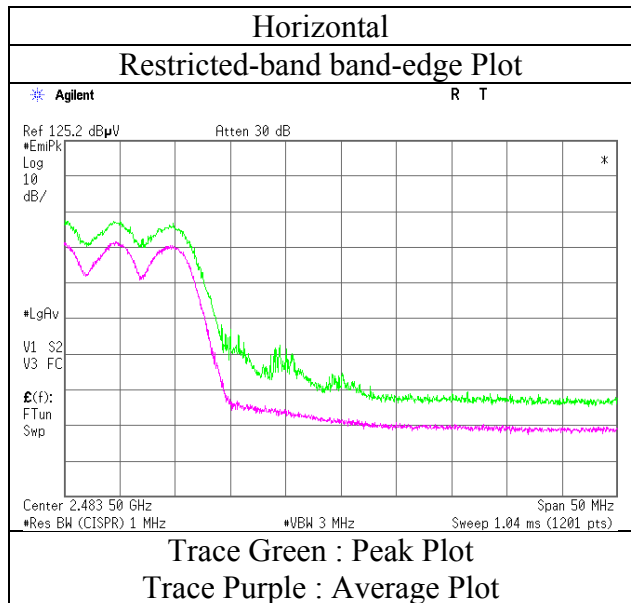

* Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission
(Reference Plot for band-edge)

Test place	Ise EMC Lab. No.3 Semi Anechoic Chamber
Report No.	11288814H
Date	May 18, 2016
Temperature / Humidity	22 deg. C / 43 % RH
Engineer	Yuta Moriya (1-10GHz)
Mode	Tx BT LE 2402 MHz

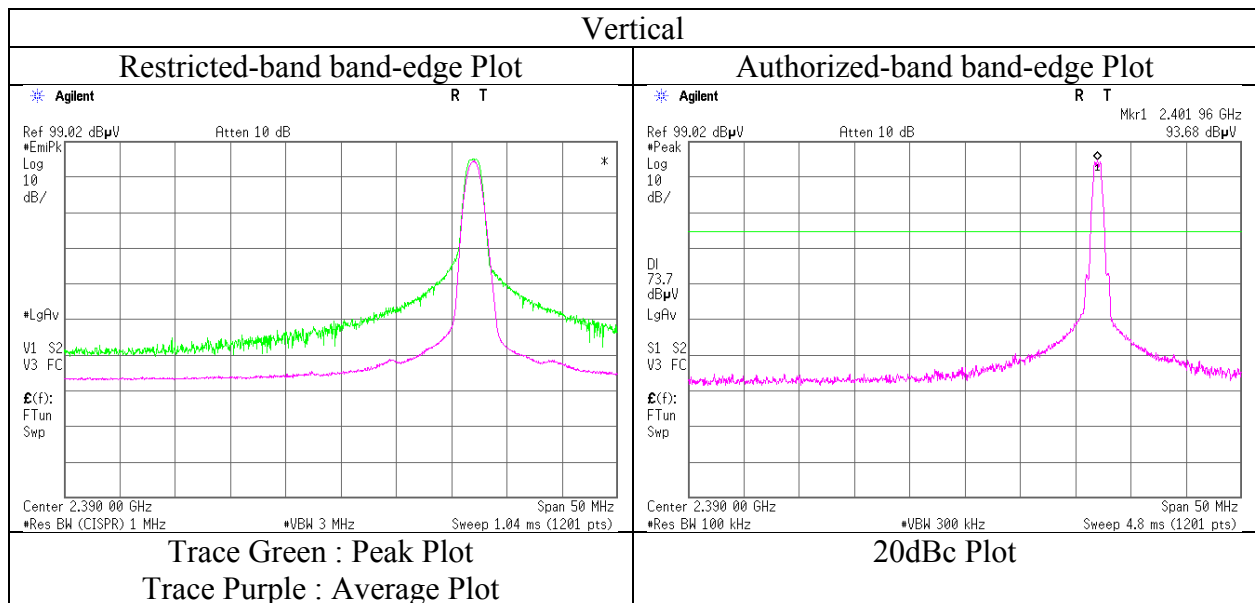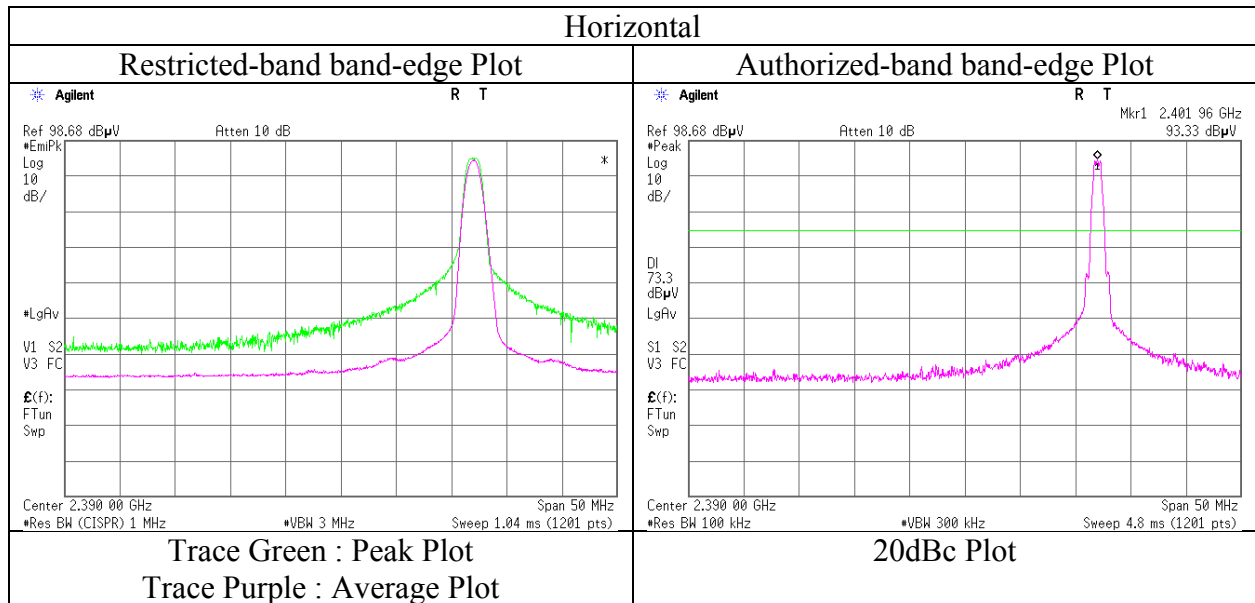

* Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Ise EMC Lab. No.3 Semi Anechoic Chamber		
Report No.	11288814H		
Date	May 18, 2016	May 19, 2016	May 20, 2016
Temperature / Humidity	22 deg. C / 43 % RH	22deg. C / 46 % RH	24 deg. C / 47 % RH
Engineer	Yuta Moriya (1-10GHz)	Yuta Moriya (Above 10GHz)	Yuta Moriya (Below 1GHz)
Mode	Tx BT LE 2480 MHz		

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	50.000	QP	25.1	10.3	7.3	32.2	-	10.5	40.0	29.5	
Hori	81.564	QP	24.2	6.6	7.8	32.2	-	6.4	40.0	33.6	
Hori	94.411	QP	24.5	8.9	8.0	32.2	-	9.2	43.5	34.3	
Hori	292.042	QP	31.9	13.4	9.8	31.9	-	23.2	46.0	22.8	
Hori	737.331	QP	21.1	20.2	12.6	31.9	-	22.0	46.0	24.0	
Hori	939.992	QP	21.0	22.2	13.6	30.7	-	26.1	46.0	19.9	
Hori	2483.500	PK	58.2	26.9	6.8	32.6	-	59.3	73.9	14.6	
Hori	4960.000	PK	39.8	32.1	8.0	31.7	-	48.2	73.9	25.7	Floor noise
Hori	7440.000	PK	40.4	36.0	8.9	32.7	-	52.6	73.9	21.3	Floor noise
Hori	9920.000	PK	40.5	38.2	9.6	33.4	-	54.9	73.9	19.0	Floor noise
Hori	2483.500	AV	45.3	26.9	6.8	32.6	2.0	48.4	53.9	5.5	*1)
Hori	4960.000	AV	32.0	32.1	8.0	31.7	-	40.4	53.9	13.5	Floor noise
Hori	7440.000	AV	32.1	36.0	8.9	32.7	-	44.3	53.9	9.6	Floor noise
Hori	9920.000	AV	32.4	38.2	9.6	33.4	-	46.8	53.9	7.1	Floor noise
Vert	50.000	QP	28.9	10.3	7.3	32.2	-	14.3	40.0	25.7	
Vert	81.564	QP	27.5	6.6	7.8	32.2	-	9.7	40.0	30.3	
Vert	94.411	QP	30.0	8.9	8.0	32.2	-	14.7	43.5	28.8	
Vert	292.042	QP	28.4	13.4	9.8	31.9	-	19.7	46.0	26.3	
Vert	737.331	QP	21.2	20.2	12.6	31.9	-	22.1	46.0	23.9	
Vert	939.992	QP	21.0	22.2	13.6	30.7	-	26.1	46.0	19.9	
Vert	2483.500	PK	59.1	26.9	6.8	32.6	-	60.2	73.9	13.7	
Vert	4960.000	PK	40.0	32.1	8.0	31.7	-	48.4	73.9	25.5	Floor noise
Vert	7440.000	PK	40.4	36.0	8.9	32.7	-	52.6	73.9	21.3	Floor noise
Vert	9920.000	PK	40.4	38.2	9.6	33.4	-	54.8	73.9	19.1	Floor noise
Vert	2483.500	AV	44.7	26.9	6.8	32.6	2.0	47.8	53.9	6.1	*1)
Vert	4960.000	AV	31.7	32.1	8.0	31.7	-	40.1	53.9	13.8	Floor noise
Vert	7440.000	AV	31.9	36.0	8.9	32.7	-	44.1	53.9	9.8	Floor noise
Vert	9920.000	AV	32.0	38.2	9.6	33.4	-	46.4	53.9	7.5	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor



*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz 20log (4.5 m / 3.0 m) = 3.53 dB
 10 GHz - 26.5 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

*1) Not Out of Band emission(Leakage Power)

Radiated Spurious Emission
(Reference Plot for band-edge)


Test place	Ise EMC Lab. No.3 Semi Anechoic Chamber
Report No.	11288814H
Date	May 18, 2016
Temperature / Humidity	22 deg. C / 43 % RH
Engineer	Yuta Moriya (1-10GHz)
Mode	Tx BT LE 2480 MHz

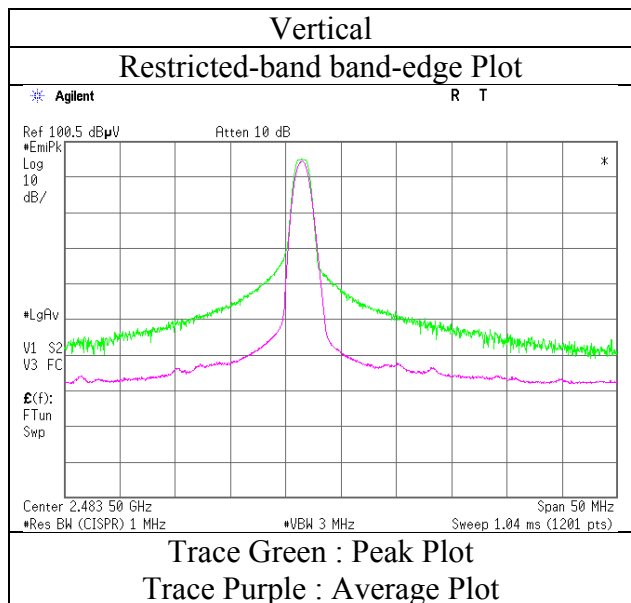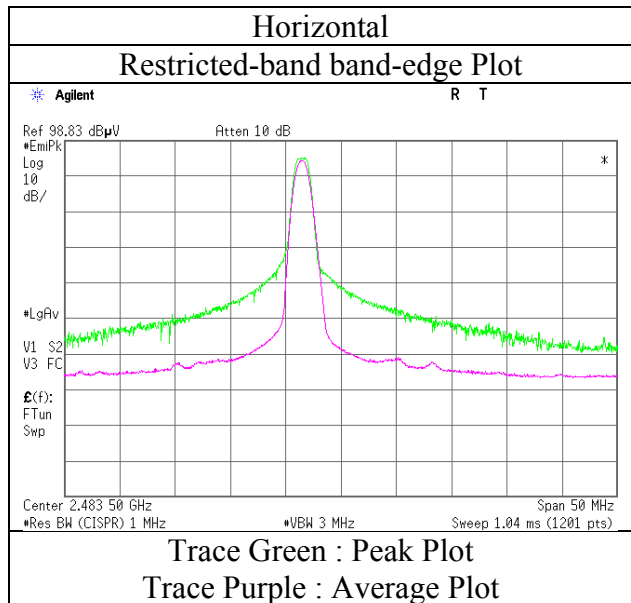

* Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission (Plot data, Worst case)

Test place	Ise EMC Lab. No.3 Semi Anechoic Chamber		
Report No.	11288814H		
Date	May 18, 2016	May 19, 2016	May 20, 2016
Temperature / Humidity	22 deg. C / 43 % RH	22deg. C / 46 % RH	24 deg. C / 47 % RH
Engineer	Yuta Moriya (1-10GHz)	Yuta Moriya (Above 10GHz)	Yuta Moriya (Below 1GHz)
Mode	Tx BT LE 2402MHz		

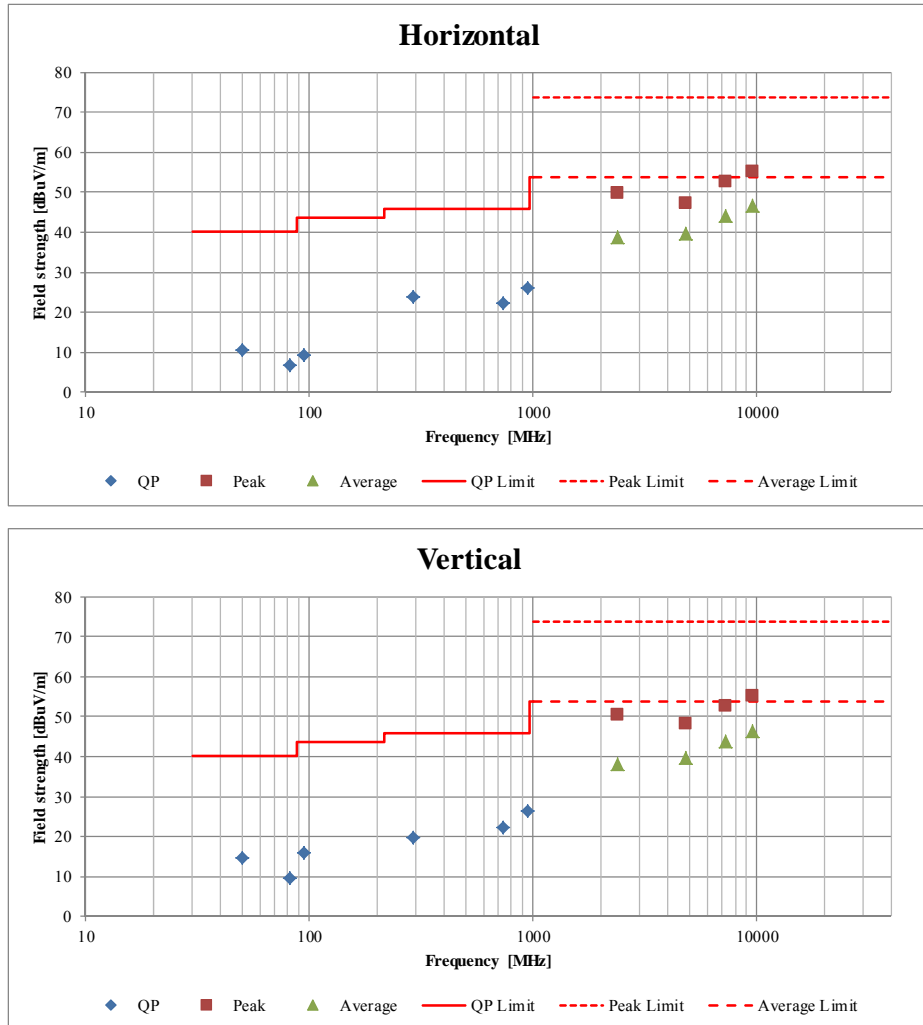

*These plots data contains sufficient number to show the trend of characteristic features for EUT.

Radiated Spurious Emission

Test place : Ise EMC Lab. No.3 Semi Anechoic Chamber
Report No. : 11288814H
Date : May 19, 2016
Temperature / Humidity : 22deg. C / 46 % RH
Engineer : Yuta Moriya
(Above 1GHz)
Mode : Tx BT LE 2402 MHz and 11n-20 5180MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	2390.000	PK	48.5	26.9	6.8	32.7	-	49.5	73.9	24.4	
Hori	2390.000	AV	35.1	26.9	6.8	32.7	2.0	38.1	53.9	15.8	*1)
Vert	2390.000	PK	50.4	26.9	6.8	32.7	-	51.4	73.9	22.5	
Vert	2390.000	AV	36.7	26.9	6.8	32.7	2.0	39.7	53.9	14.2	*1)

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz 20log(4.5 m / 3.0 m) = 3.53 dB

*1) Not Out of Band emission(Leakage Power)

20dBc Data Sheet

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	2402.000	PK	93.9	26.9	6.8	32.7	94.9	-	-	Carrier
Hori	2400.000	PK	47.8	26.9	6.8	32.7	48.8	74.9	26.1	
Vert	2402.000	PK	94.2	26.9	6.8	32.7	95.2	-	-	Carrier
Vert	2400.000	PK	48.2	26.9	6.8	32.7	49.2	75.2	26.0	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Radiated Spurious Emission

Test place : Ise EMC Lab. No.3 Semi Anechoic Chamber
Report No. : 11288814H
Date : May 19, 2016 May 20, 2016
Temperature / Humidity : 22deg. C / 46 % RH 24 deg. C / 47 % RH
Engineer : Yuta Moriya Yuta Moriya
(Above 1GHz) (Below 1GHz)
Mode : Tx BT LE 2440 MHz and 11n-20 5180MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	50.002	QP	25.1	10.3	7.3	32.2	-	10.5	40.0	29.5	
Hori	81.556	QP	24.5	6.6	7.8	32.2	-	6.7	40.0	33.3	
Hori	94.432	QP	23.9	8.9	8.0	32.2	-	8.6	43.5	34.9	
Hori	292.041	QP	35.2	13.4	9.8	31.9	-	26.5	46.0	19.5	
Hori	737.334	QP	21.1	20.2	12.6	31.9	-	22.0	46.0	24.0	
Hori	939.966	QP	21.2	22.2	13.6	30.7	-	26.3	46.0	19.7	
Hori	4880.000	PK	40.7	31.9	8.1	31.7	-	49.0	73.9	24.9	Floor noise
Hori	7320.000	PK	41.0	36.0	8.9	32.6	-	53.3	73.9	20.6	Floor noise
Hori	9760.000	PK	40.7	38.2	9.6	33.3	-	55.2	73.9	18.7	Floor noise
Hori	4880.000	AV	32.1	31.9	8.1	31.7	-	40.4	53.9	13.5	Floor noise
Hori	7320.000	AV	32.1	36.0	8.9	32.6	-	44.4	53.9	9.5	Floor noise
Hori	9760.000	AV	32.3	38.2	9.6	33.3	-	46.8	53.9	7.1	Floor noise
Vert	50.002	QP	25.0	10.3	7.3	32.2	-	10.4	40.0	29.6	
Vert	81.556	QP	26.1	6.6	7.8	32.2	-	8.3	40.0	31.7	
Vert	94.432	QP	30.9	8.9	8.0	32.2	-	15.6	43.5	27.9	
Vert	292.041	QP	30.0	13.4	9.8	31.9	-	21.3	46.0	24.7	
Vert	737.334	QP	21.0	20.2	12.6	31.9	-	21.9	46.0	24.1	
Vert	939.966	QP	21.2	22.2	13.6	30.7	-	26.3	46.0	19.7	
Vert	4880.000	PK	40.6	31.9	8.1	31.7	-	48.9	73.9	25.0	Floor noise
Vert	7320.000	PK	40.9	36.0	8.9	32.6	-	53.2	73.9	20.7	Floor noise
Vert	9760.000	PK	40.6	38.2	9.6	33.3	-	55.1	73.9	18.8	Floor noise
Vert	4880.000	AV	32.0	31.9	8.1	31.7	-	40.3	53.9	13.6	Floor noise
Vert	7320.000	AV	32.0	36.0	8.9	32.6	-	44.3	53.9	9.6	Floor noise
Vert	9760.000	AV	32.4	38.2	9.6	33.3	-	46.9	53.9	7.0	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz 20log(4.5 m / 3.0 m) = 3.53 dB
 10 GHz - 26.5 GHz 20log(1.0 m / 3.0 m) = -9.5 dB

Radiated Spurious Emission

Test place : Ise EMC Lab. No.3 Semi Anechoic Chamber
 Report No. : 11288814H
 Date : May 19, 2016
 Temperature / Humidity : 22deg. C / 46 % RH
 Engineer : Yuta Moriya
 (Above 1GHz)
 Mode : Tx BT LE 2480 MHz and 11n-20 5180MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	2483.500	PK	60.3	26.9	6.8	32.6	-	61.4	73.9	12.5	
Hori	2483.500	AV	45.1	26.9	6.8	32.6	2.0	48.2	53.9	5.7	*1)
Vert	2483.500	PK	59.8	26.9	6.8	32.6	-	60.9	73.9	13.0	
Vert	2483.500	AV	45.1	26.9	6.8	32.6	2.0	48.2	53.9	5.7	*1)

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz $20\log(4.5\text{ m} / 3.0\text{ m}) = 3.53\text{ dB}$

*1) Not Out of Band emission(Leakage Power)

APPENDIX 2: Test instruments

Test equipment

Control No.	Instrument	Manufacturer	Model No	Serial No	Test Item	Calibration Date * Interval(month)
MAEC-03	Semi Anechoic Chamber(NSA)	TDK	Semi Anechoic Chamber 3m	DA-10005	RE	2015/10/01 * 12
MOS-13	Thermo-Hygrometer	Custom	CTH-180	1301	RE	2016/01/21 * 12
MJM-16	Measure	KOMELON	KMC-36	-	RE	-
COTS-MEMI	EMI measurement program	TSJ	TEPTO-DV	-	RE	-
MSA-16	Spectrum Analyzer	Agilent	E4440A	MY46186390	RE	2016/02/08 * 12
MHA-20	Horn Antenna 1-18GHz	Schwarzbeck	BBHA9120D	258	RE	2015/05/18 * 12
MCC-167	Microwave Cable	Junkosha	MWX221	1404S374(1m) / 1405S074(5m)	RE	2015/05/21 * 12
MPA-11	MicroWave System Amplifier	Agilent	83017A	MY39500779	RE	2016/03/24 * 12
MMM-08	DIGITAL HiTESTER	Hioki	3805	051201197	RE	2016/01/13 * 12
MHF-25	High Pass Filter 3.5-18.0GHz	UL Japan	HPF SELECTOR	001	RE	2015/09/16 * 12
MHF-06	High Pass Filter 3.5-24GHz	TOKIMEC	TF323DCA	601	RE	2016/05/16 * 12
MHA-06	Horn Antenna 1-18GHz	Schwarzbeck	BBHA9120D	254	RE	2016/02/29 * 12
MSA-10	Spectrum Analyzer	Agilent	E4448A	MY46180655	RE	2016/02/24 * 12
MTR-08	Test Receiver	Rohde & Schwarz	ESCI	100767	RE	2015/09/02 * 12
MBA-03	Biconical Antenna	Schwarzbeck	BBA9106	1915	RE	2015/10/11 * 12
MLA-22	Logperiodic Antenna(200-1000MHz)	Schwarzbeck	VUSLP9111B	911B-191	RE	2016/01/30 * 12
MCC-51	Coaxial cable	UL Japan	-	-	RE	2015/07/13 * 12
MAT-70	Attenuator(6dB)	Agilent	8491A-006	MY52460153	RE	2016/04/05 * 12
MPA-13	Pre Amplifier	SONOMA INSTRUMENT	310	260834	RE	2016/03/24 * 12
MSA-14	Spectrum Analyzer	Agilent	E4440A	MY48250080	AT	2015/10/07 * 12
MAT-56	Attenuator(10dB)	Suhner	6810.19.A	-	AT	2016/01/18 * 12
MPM-08	Power Meter	Anritsu	ML2495A	6K00003338	AT	2015/10/08 * 12
MPSE-11	Power sensor	Anritsu	MA2411B	011737	AT	2015/10/08 * 12
MOS-19	Thermo-Hygrometer	Custom	CTH-201	0001	AT	2015/12/08 * 12
MAT-57	Attenuator(10dB)	Suhner	6810.19.A	-	AT	2016/01/18 * 12
MAT-58	Attenuator(10dB)	Suhner	6810.19.A	-	AT	2016/01/18 * 12
MCC-138	Microwave cable	HUBER+SUHNER	SUCOFLEX 102	37953/2	AT	2015/10/08 * 12
MTA-36	Terminator	-	50ΩSMA	-	AT	Pre Check
MTA-43	Terminator	Mini-Circuits	ANNE-50X+	MUU3460140	AT	Pre Check
MAT-23	Attenuator(10dB) 1-18GHz	Orient Microwave	BX10-0476-00	-	AT	2015/03/13 * 12
MCC-137	Microwave cable	HUBER+SUHNER	SUCOFLEX 102	37954/2	AT	2015/10/08 * 12

The expiration date of the calibration is the end of the expired month.

All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.

Test Item: RE: Radiated Emission test

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124