



RADIO TEST REPORT

Test Report No. : 11653095H-A

Applicant : Sony Interactive Entertainment Inc.
Type of Equipment : Wireless communication module
Model No. : J20H091
FCC ID : AK8M16DFL1
Test regulation : FCC Part 15 Subpart C: 2016
Class II Permissive Change
*Bluetooth part
(Radiated Spurious Emission test only)
Test Result : Complied

1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the above regulation.
4. The test results in this report are traceable to the national or international standards.
5. This test report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.
6. This test report covers Radio technical requirements. It does not cover administrative issues such as Manual or non-Radio test related Requirements. (if applicable)

Date of test: February 15 to 26, 2017

Representative test engineer:

Tomoki Matsui

Engineer

Consumer Technology Division

Approved by:

Takayuki Shimada

Engineer

Consumer Technology Division



NVLAP LAB CODE: 200572-0

This laboratory is accredited by the NVLAP LAB CODE 200572-0, U.S.A. The tests reported herein have been performed in accordance with its terms of accreditation.
*As for the range of Accreditation in NVLAP, you may refer to the WEB address,
http://japan.ul.com/resources/emc_accredited/

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

13-EM-F0429

CONTENTS	PAGE
SECTION 1: Customer information.....	4
SECTION 2: Equipment under test (E.U.T.).....	4
SECTION 3: Test specification, procedures & results.....	7
SECTION 4: Operation of E.U.T. during testing.....	9
SECTION 5: Radiated Spurious Emission	11
APPENDIX 1: Test data	12
Radiated Spurious Emission	12
APPENDIX 2: Test instruments	26
APPENDIX 3: Photographs of test setup	27
Radiated Spurious Emission	27
Worst Case Position	28
Test Configuration and peripherals	30

SECTION 1: Customer information

Company Name	Sony Interactive Entertainment Inc.
Brand Name	SONY
Address	1-7-1 Konan, Minato-ku, Tokyo, 108-0075 Japan
Telephone Number	+81-50-3807-5639
Facsimile Number	+81-50-3807-9594
Contact Person	Kiyoto Sasaki

SECTION 2: Equipment under test (E.U.T.)

2.1 Identification of E.U.T.

Type of Equipment	Wireless communication module
Model No	J20H091
Serial No	Refer to Clause 4.2
Country of Manufacture	China/Japan
Receipt Date of Sample	February 9, 2017
Condition of EUT	Production prototype (Not for Sale: This sample is equivalent to mass-produced items.)
Modification of EUT	No modification by the test lab.

2.2 Product Description

J20H091 is the Wireless communication module.

Product Specification

Clock frequency in the system (radio part)	40MHz
Operating Temperature	-10 - +85 deg. C
Power Supply	DC 3.3 V, DC 1.8 V
Size	20 x 18 x 3.6 mm, 55pin LGA

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radio Specification

WLAN (IEEE802.11b/g/n-20)

Equipment Type	Transceiver
Frequency of Operation	2412 MHz - 2462 MHz
Type of Modulation	DSSS, OFDM
Bandwidth & Channel spacing	Less than 20 MHz & 5 MHz
Method of frequency generation	Synthesizer
Power Supply (inner)	DC 3.3 V / DC 1.8 V / DC 1.1 V
Antenna Type	PIFA (Antenna port WA for 2.4 GHz), IFA (Antenna port WB for 2.4 GHz)
Antenna Gain: G _{ANT}	5.6 dBi (Antenna port WA for 2.4 GHz), 4.2 dBi (Antenna port WB for 2.4 GHz)
Directional Gain *1)	7.93 dBi

WLAN (IEEE802.11a/11n-20/11ac-20/11n-40/11ac-40/11ac-80)

Equipment Type	Transceiver
Frequency of Operation	W52: 5180 MHz - 5240 MHz W53: 5260 MHz - 5320 MHz W56: 5500 MHz - 5700 MHz W58: 5745 MHz - 5825 MHz
Type of Modulation	OFDM
Bandwidth & Channel spacing	Less than 20 MHz / 40 MHz / 80 MHz & 20 MHz / 40 MHz / 80 MHz
Method of frequency generation	Synthesizer
Power Supply (inner)	DC 3.3 V / DC 1.8 V / DC 1.1 V
Antenna Type	PIFA (Antenna port WA for 5 GHz / Antenna port WC for 5 GHz)
Antenna Gain: G _{ANT}	5.0 dBi (Antenna port WA for 5 GHz) 3.5 dBi (Antenna port WC for 5 GHz)
Directional Gain *1)	7.29 dBi

Bluetooth (BDR/EDR)

Equipment Type	Transceiver
Frequency of Operation	2402 MHz - 2480 MHz
Type of Modulation	FHSS (GFSK, $\pi/4$ DQPSK, 8DPSK)
Bandwidth & Channel spacing	79 MHz & 1 MHz
Method of frequency generation	Synthesizer
Power Supply (inner)	DC 3.3 V / DC 1.8 V / DC 1.1 V
Antenna Type	PIFA (Antenna port WC for 2.4 GHz)
Antenna Gain	6.4 dBi (Antenna port WC for 2.4 GHz)

Bluetooth (Low Energy)

Equipment Type	Transceiver
Frequency of Operation	2402 MHz - 2480 MHz
Type of Modulation	GFSK
Bandwidth & Channel spacing	1 MHz & 2 MHz
Method of frequency generation	Synthesizer
Power Supply (inner)	DC 3.3 V / DC 1.8 V / DC 1.1 V
Antenna Type	PIFA (Antenna port WC for 2.4 GHz)
Antenna Gain	6.4 dBi (Antenna port WC for 2.4 GHz)

*1) Directional antenna gain = $10 \log \left(\frac{G_{ANT1}}{10^{20}} + \frac{G_{ANT2}}{10^{20}} \right)^2 / 2$

*This test report applies to Bluetooth.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

<Contents of the change from original model>

Test Report Number of original model is 11155194H-A-R3 (issued by UL Japan, Inc.).

Specification was changed from the original model as follows:

Antenna of the EUT was modified.

The radio specification is identical to the original.

Therefore only Radiated Spurious Emission test were performed in this report.

Additionally, only the information of modified antenna is described in this report.

SECTION 3: Test specification, procedures & results

3.1 Test Specification

Test Specification : FCC Part 15 Subpart C
FCC Part 15 final revised on November 14, 2016 and effective December 14, 2016

Title : FCC 47CFR Part15 Radio Frequency Device Subpart C Intentional Radiators
Section 15.207 Conducted limits
Section 15.247 Operation within the bands 902-928MHz,
2400-2483.5MHz, and 5725-5850MHz

* Also the EUT complies with FCC Part 15 Subpart B.

3.2 Procedures and results

Item	Test Procedure	Specification	Worst Margin	Results	Remarks
Spurious Emission & Band Edge Compliance	FCC: FCC Public Notice DA 00-705 IC: RSS-Gen 6.13	FCC: Section15.247(d) IC: RSS-247 5.5 RSS-Gen 8.9 RSS-Gen 8.10	15.4 dB 2703.221 MHz, Horizontal, AV	Complied	Conducted/ Radiated (above 30 MHz) *1)
Note: UL Japan, Inc.'s EMI Work Procedures No. 13-EM-W0420 and 13-EM-W0422. *1) Radiated test was selected over 30 MHz based on section 15.247(d).					

* In case any questions arise about test procedure, ANSI C63.10: 2013 is also referred.

FCC Part 15.31 (e)

The EUT has the power supply regulator. However one of the input voltages to RF part doesn't go through the regulator. The stable voltage will be supplied by the end product, which will be required to have a power supply regulator. Therefore, the EUT complies with the requirement.

FCC Part 15.203/212 Antenna requirement

The EUT has unique coupling/antenna connectors (U.FL) for antenna ports WA and WC and also has a pattern antenna (Antenna port WB) that is not removable from the EUT.
Therefore the equipment complies with the requirement of 15.203/212.

3.3 Addition to standard

No addition, exclusion nor deviation has been made from the standard.

3.4 Uncertainty

EMI

The following uncertainties have been calculated to provide a confidence level of 95 % using a coverage factor $k=2$.
Ise EMC Lab.

Polarity	Radiated emission (Below 1GHz)			
	(3 m*) (+/-)		(10 m*) (+/-)	
	30 MHz - 200 MHz	200 MHz - 1000 MHz	30 MHz - 200 MHz	200 MHz - 1000 MHz
Horizontal	5.0 dB	5.3 dB	5.0 dB	5.0 dB
Vertical	4.7 dB	5.9 dB	5.0 dB	5.1 dB

Radiated emission (Above 1GHz)				
(3 m*) (+/-)		(1 m*) (+/-)		(10 m*) (+/-)
1 GHz - 6GHz	6 GHz - 18GHz	10 GHz - 26.5 GHz	26.5 GHz - 40GHz	1 GHz - 18 GHz
5.2 dB	5.4 dB	5.5 dB	5.5 dB	5.4 dB

*Measurement distance

Radiated emission test

The data listed in this test report has enough margin, more than the site margin.

3.5 Test Location

UL Japan, Inc. Ise EMC Lab. *NVLAP Lab. code: 200572-0
4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN
Telephone: +81 596 24 8999, Facsimile: +81 596 24 8124

Test site	IC Registration Number	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Other rooms	Maximum measurement distance
No.1 semi-anechoic chamber	2973C-1	19.2 x 11.2 x 7.7	7.0 x 6.0	No.1 Power source room	10 m
No.2 semi-anechoic chamber	2973C-2	7.5 x 5.8 x 5.2	4.0 x 4.0	-	3 m
No.3 semi-anechoic chamber	2973C-3	12.0 x 8.5 x 5.9	6.8 x 5.75	No.3 Preparation room	3 m
No.3 shielded room	-	4.0 x 6.0 x 2.7	N/A	-	-
No.4 semi-anechoic chamber	2973C-4	12.0 x 8.5 x 5.9	6.8 x 5.75	No.4 Preparation room	3 m
No.4 shielded room	-	4.0 x 6.0 x 2.7	N/A	-	-
No.5 semi-anechoic chamber	-	6.0 x 6.0 x 3.9	6.0 x 6.0	-	-
No.6 shielded room	-	4.0 x 4.5 x 2.7	4.0 x 4.5	-	-
No.6 measurement room	-	4.75 x 5.4 x 3.0	4.75 x 4.15	-	-
No.7 shielded room	-	4.7 x 7.5 x 2.7	4.7 x 7.5	-	-
No.8 measurement room	-	3.1 x 5.0 x 2.7	N/A	-	-
No.9 measurement room	-	8.8 x 4.6 x 2.8	2.4 x 2.4	-	-
No.11 measurement room	-	6.2 x 4.7 x 3.0	4.8 x 4.6	-	-

* Size of vertical conducting plane (for Conducted Emission test) : 2.0 m x 2.0 m for No.1, No.2, No.3, and No.4 semi-anechoic chambers and No.3 and No.4 shielded rooms.

3.6 Test data, Test instruments, and Test set up

Refer to APPENDIX.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN
Telephone : +81 596 24 8999
Facsimile : +81 596 24 8124

SECTION 4: Operation of E.U.T. during testing

4.1 Operating Mode(s)

Bluetooth (BT): Transmitting (Tx), Payload: PRBS9

Details of Operating Mode(s)

Test Item	Mode	Tested frequency
Spurious Emission (Radiated)	Tx (Hopping Off) DH5, 3DH5	2402 MHz 2441 MHz 2480 MHz
<p>*As a result of preliminary test, the formal test was performed with the above modes, which had the maximum payload length (except Dwell time test)</p> <p>*2DH mode (2Mb/s EDR: pi/4DQPSK) was excluded for other tests than power measurement by using 3DH mode (3 Mb/s EDR: 8DPSK) as a representative.</p> <p>* It is considered that the non-tested packet type (e.g. inquiry) can be omitted as it is complied with above all the test items based on Bluetooth Core specification.</p> <p>*EUT has the power settings by the software as follows; Power settings: Same as production model Software: Opro_DOS_Labtool_Ver2.0.0.84 *This setting of software is the worst case. Any conditions under the normal use do not exceed the condition of setting. In addition, end users cannot change the settings of the output power of the product.</p>		

Simultaneously transmission

Test Item	Mode *1)
Spurious Emission (Radiated)	Tx (Hopping Off) 3DH5 2402 MHz + 11n-20 5180 MHz Tx (Hopping Off) 3DH5 2441 MHz + 11n-20 5180 MHz Tx (Hopping Off) 3DH5 2480 MHz + 11n-20 5180 MHz
<p>*1) The test was performed on the mode as a representative, because it had the highest power of 5GHz band at antenna terminal test.</p>	

4.2 Configuration and peripherals

This page has been submitted for a separate exhibit.

SECTION 5: Radiated Spurious Emission

Test Procedure

[For below 1 GHz]

EUT was placed on a urethane platform of nominal size, 0.5 m by 1.0 m, raised 0.8 m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with a ground plane.

[For above 1 GHz]

EUT was placed on a urethane platform of nominal size, 0.5 m by 0.5 m, raised 1.5 m above the conducting ground plane.

The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with absorbent materials lined on a ground plane.

The height of the measuring antenna varied between 1 and 4 m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field strength.

The measurements were performed for both vertical and horizontal antenna polarization with the Test Receiver, or the Spectrum Analyzer.

The measurements were made with the following detector function of the test receiver and the Spectrum analyzer (in linear mode).

The test was made with the detector (RBW/VBW) in the following table.

When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

Test Antennas are used as below;

Frequency	30 MHz to 200 MHz	200 MHz to 1 GHz	Above 1 GHz
Antenna Type	Biconical	Logperiodic	Horn

In any 100 kHz bandwidth outside the restricted band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator confirmed 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on a radiated measurement.

20 dBc was applied to the frequency over the limit of FCC 15.209 / Table 4 of RSS-Gen 8.9 (IC) and outside the restricted band of FCC15.205 / Table 6 of RSS-Gen 8.10 (IC).

Frequency	Below 1 GHz	Above 1 GHz		20 dBc
Instrument used	Test Receiver	Spectrum Analyzer		Spectrum Analyzer
Detector	QP	PK	AV	PK
IF Bandwidth	BW 120 kHz	RBW: 1 MHz VBW: 3 MHz	RBW: 1 MHz VBW: 10 Hz *1)	RBW: 100 kHz VBW: 300 kHz
Test Distance	3 m	3.75 m*2) (1 GHz – 10 GHz), 1 m*3) (10 GHz – 26.5 GHz)		3.75 m*2) (1 GHz – 10 GHz), 1 m*3) (10 GHz – 26.5 GHz)

*1) Although DA 00-705 accepts VBW = 10 Hz for AV measurements, it was confirmed that superfluous smoothing was not performed.

*2) Distance Factor: $20 \times \log(3.75 \text{ m}/3.0 \text{ m}) = 1.94 \text{ dB}$

*3) Distance Factor: $20 \times \log(1.0 \text{ m}/3.0 \text{ m}) = -9.5 \text{ dB}$

- The carrier level and noise levels were confirmed at each position of X, Y and Z axes of EUT (Antenna and Module) to see the position of maximum noise, and the test was made at the position that has the maximum noise.

The test results and limit are rounded off to one decimal place, so some differences might be observed.

Measurement range : 30 MHz - 26.5 GHz
Test data : APPENDIX
Test result : Pass

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

APPENDIX 1: Test data

Radiated Spurious Emission

Test place Ise EMC Lab. No.2 Semi Anechoic Chamber
Report No. 11653095H
Date February 15, 2017 February 22, 2017 February 24, 2017 February 26, 2017
Temperature / Humidity 23 deg. C / 31 % RH 24 deg. C / 31 % RH 23deg. C / 32 % RH 21 deg. C / 27 % RH
Engineer Tomoki Matsui Yuta Moriya Yuta Moriya Tomoki Matsui
(1 GHz -10 GHz) (10 GHz -18 GHz) (18 GHz-26.5 GHz) (Below 1 GHz)
Mode Tx, Hopping Off, DH5 2402 MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	49.152	QP	25.2	11.1	7.0	28.1	-	15.2	40.0	24.8	
Hori	78.647	QP	27.0	6.5	7.2	28.0	-	12.7	40.0	27.3	
Hori	88.000	QP	24.4	8.0	7.3	28.0	-	11.7	40.0	28.3	
Hori	92.270	QP	26.1	8.7	7.4	28.0	-	14.2	43.5	29.3	
Hori	114.238	QP	24.4	12.1	7.6	27.9	-	16.2	43.5	27.3	
Hori	960.000	QP	21.9	22.4	11.4	26.5	-	29.2	46.0	16.8	
Hori	2390.000	PK	44.4	27.6	4.9	34.6	-	42.3	73.9	31.6	
Hori	4804.000	PK	41.3	31.5	7.6	33.8	-	46.6	73.9	27.3	Floor noise
Hori	7206.000	PK	41.5	36.1	8.4	33.9	-	52.1	73.9	21.8	Floor noise
Hori	9608.000	PK	42.5	38.5	9.3	34.5	-	55.8	73.9	18.1	Floor noise
Hori	2390.000	AV	32.0	27.6	4.9	34.6	-	29.9	53.9	24.0	
Hori	4804.000	AV	29.2	31.5	7.6	33.8	-	34.5	53.9	19.4	Floor noise
Hori	7206.000	AV	29.3	36.1	8.4	33.9	-	39.9	53.9	14.0	Floor noise
Hori	9608.000	AV	30.7	38.5	9.3	34.5	-	44.0	53.9	9.9	Floor noise
Vert	49.152	QP	31.6	11.1	7.0	28.1	-	21.6	40.0	18.4	
Vert	78.647	QP	30.5	6.5	7.2	28.0	-	16.2	40.0	23.8	
Vert	88.000	QP	25.7	8.0	7.3	28.0	-	13.0	40.0	27.0	
Vert	92.270	QP	29.3	8.7	7.4	28.0	-	17.4	43.5	26.1	
Vert	110.900	QP	25.3	11.6	7.5	27.9	-	16.5	43.5	27.0	
Vert	960.000	QP	21.9	22.4	11.4	26.5	-	29.2	46.0	16.8	
Vert	2390.000	PK	44.1	27.6	4.9	34.6	-	42.0	73.9	31.9	
Vert	4804.000	PK	41.3	31.5	7.6	33.8	-	46.6	73.9	27.3	Floor noise
Vert	7206.000	PK	41.5	36.1	8.4	33.9	-	52.1	73.9	21.8	Floor noise
Vert	9608.000	PK	42.5	38.5	9.3	34.5	-	55.8	73.9	18.1	Floor noise
Vert	2390.000	AV	31.9	27.6	4.9	34.6	-	29.8	53.9	24.1	
Vert	4804.000	AV	29.2	31.5	7.6	33.8	-	34.5	53.9	19.4	Floor noise
Vert	7206.000	AV	29.3	36.1	8.4	33.9	-	39.9	53.9	14.0	Floor noise
Vert	9608.000	AV	30.7	38.5	9.3	34.5	-	44.0	53.9	9.9	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz 20log (3.75 m / 3.0 m) = 1.94 dB
10 GHz - 26.5 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

20dBc Data Sheet



Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	2402.000	PK	94.1	27.6	5.0	34.6	92.1	-	-	Carrier
Hori	2400.000	PK	38.3	27.6	5.0	34.6	36.3	72.1	35.8	
Vert	2402.000	PK	92.7	27.6	5.0	34.6	90.7	-	-	Carrier
Vert	2400.000	PK	36.9	27.6	5.0	34.6	34.9	70.7	35.8	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

***These results have sufficient margin without taking account Dwell time factor.**

Radiated Spurious Emission (Reference Plot for band-edge)

Test place	Ise EMC Lab. No.2 Semi Anechoic Chamber
Report No.	11653095H
Date	February 15, 2017
Temperature / Humidity	23 deg. C / 31 % RH
Engineer	Tomoki Matsui
	(1 GHz -10 GHz)
Mode	Tx, Hopping Off, DH5 2402 MHz

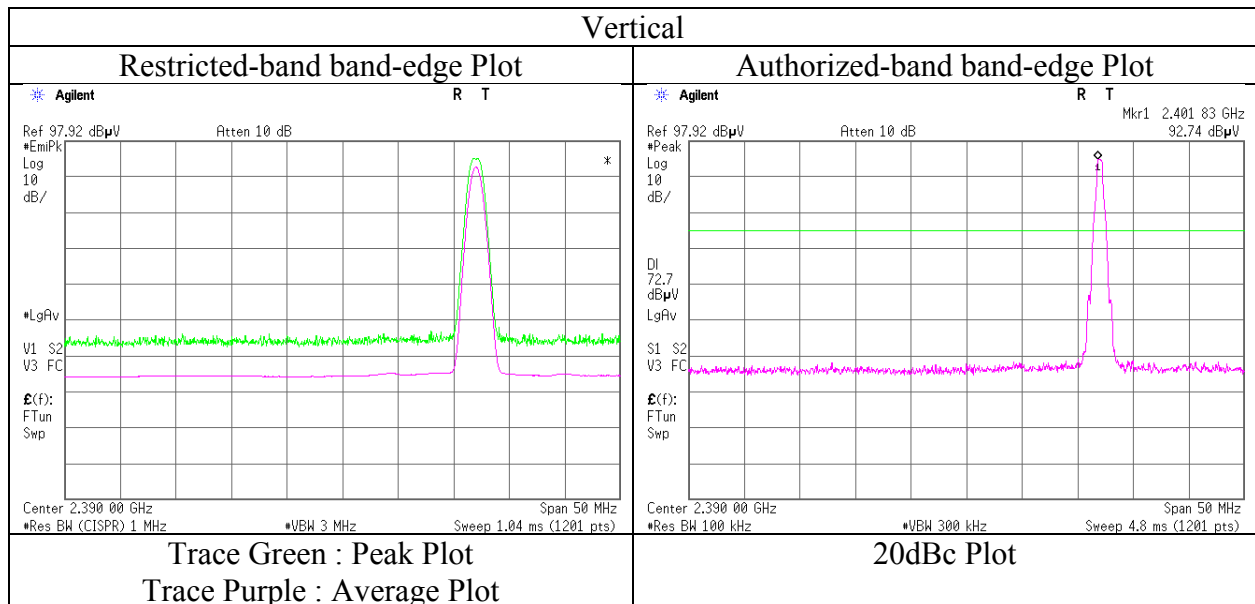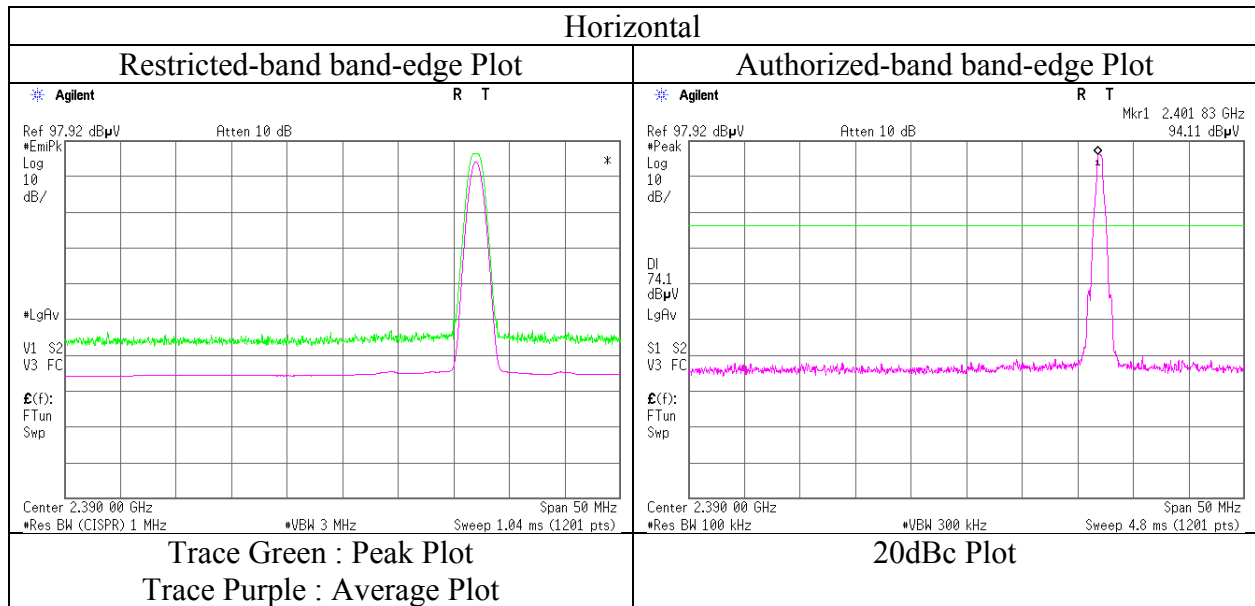

* Final result of restricted band edge was shown in tabular data.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Test place : Ise EMC Lab. No.2 Semi Anechoic Chamber
Report No. : 11653095H
Date : February 15, 2017 February 22, 2017 February 24, 2017 February 26, 2017
Temperature / Humidity : 23 deg. C / 31 % RH 24 deg. C / 31 % RH 23deg. C / 32 % RH 21 deg. C / 27 % RH
Engineer : Tomoki Matsui Yuta Moriya Yuta Moriya Tomoki Matsui
 (1 GHz -10 GHz) (10 GHz -18 GHz) (18 GHz-26.5 GHz) (Below 1 GHz)
Mode : Tx, Hopping Off, DH5 2441 MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	49.152	QP	25.2	11.1	7.0	28.1	-	15.2	40.0	24.8	
Hori	78.647	QP	27.5	6.5	7.2	28.0	-	13.2	40.0	26.8	
Hori	88.000	QP	24.4	8.0	7.3	28.0	-	11.7	40.0	28.3	
Hori	92.270	QP	26.1	8.7	7.4	28.0	-	14.2	43.5	29.3	
Hori	114.238	QP	24.4	12.1	7.6	27.9	-	16.2	43.5	27.3	
Hori	960.000	QP	21.9	22.4	11.4	26.5	-	29.2	46.0	16.8	
Hori	4882.000	PK	41.9	31.7	7.6	33.8	-	47.4	73.9	26.5	Floor noise
Hori	7323.000	PK	41.7	36.3	8.5	33.9	-	52.6	73.9	21.3	Floor noise
Hori	9764.000	PK	42.5	38.5	9.2	34.5	-	55.7	73.9	18.2	Floor noise
Hori	4882.000	AV	29.4	31.7	7.6	33.8	-	34.9	53.9	19.0	Floor noise
Hori	7323.000	AV	29.4	36.3	8.5	33.9	-	40.3	53.9	13.6	Floor noise
Hori	9764.000	AV	30.4	38.5	9.2	34.5	-	43.6	53.9	10.3	Floor noise
Vert	49.152	QP	31.4	11.1	7.0	28.1	-	21.4	40.0	18.6	
Vert	78.647	QP	30.4	6.5	7.2	28.0	-	16.1	40.0	23.9	
Vert	88.000	QP	25.7	8.0	7.3	28.0	-	13.0	40.0	27.0	
Vert	92.270	QP	29.3	8.7	7.4	28.0	-	17.4	43.5	26.1	
Vert	110.900	QP	24.7	11.6	7.5	27.9	-	15.9	43.5	27.6	
Vert	960.000	QP	21.9	22.4	11.4	26.5	-	29.2	46.0	16.8	
Vert	4882.000	PK	41.9	31.7	7.6	33.8	-	47.4	73.9	26.5	Floor noise
Vert	7323.000	PK	41.7	36.3	8.5	33.9	-	52.6	73.9	21.3	Floor noise
Vert	9764.000	PK	42.5	38.5	9.2	34.5	-	55.7	73.9	18.2	Floor noise
Vert	4882.000	AV	29.4	31.7	7.6	33.8	-	34.9	53.9	19.0	Floor noise
Vert	7323.000	AV	29.4	36.3	8.5	33.9	-	40.3	53.9	13.6	Floor noise
Vert	9764.000	AV	30.4	38.5	9.2	34.5	-	43.6	53.9	10.3	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz 20log (3.75 m / 3.0 m) = 1.94 dB
10 GHz - 26.5 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

***These results have sufficient margin without taking account Dwell time factor.**

Radiated Spurious Emission

Test place : Ise EMC Lab. No.2 Semi Anechoic Chamber
Report No. : 11653095H
Date : February 15, 2017 February 22, 2017 February 24, 2017 February 26, 2017
Temperature / Humidity : 23 deg. C / 31 % RH 24 deg. C / 31 % RH 23deg. C / 32 % RH 21 deg. C / 27 % RH
Engineer : Tomoki Matsui Yuta Moriya Yuta Moriya Tomoki Matsui
 (1 GHz -10 GHz) (10 GHz -18 GHz) (18 GHz-26.5 GHz) (Below 1 GHz)
Mode : Tx, Hopping Off, DH5 2480 MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	49.152	QP	25.2	11.1	7.0	28.1	-	15.2	40.0	24.8	
Hori	78.647	QP	27.5	6.5	7.2	28.0	-	13.2	40.0	26.8	
Hori	88.000	QP	24.4	8.0	7.3	28.0	-	11.7	40.0	28.3	
Hori	92.270	QP	26.2	8.7	7.4	28.0	-	14.3	43.5	29.2	
Hori	114.238	QP	24.4	12.1	7.6	27.9	-	16.2	43.5	27.3	
Hori	960.000	QP	21.9	22.4	11.4	26.5	-	29.2	46.0	16.8	
Hori	2483.500	PK	47.0	27.7	5.1	34.6	-	45.2	73.9	28.7	
Hori	2487.921	PK	48.2	27.7	5.1	34.6	-	46.4	73.9	27.5	
Hori	4960.000	PK	41.5	32.0	7.6	33.8	-	47.3	73.9	26.6	Floor noise
Hori	7440.000	PK	42.1	36.4	8.5	34.0	-	53.0	73.9	20.9	Floor noise
Hori	9920.000	PK	42.7	38.6	9.3	34.6	-	56.0	73.9	17.9	Floor noise
Hori	2483.500	AV	33.9	27.7	5.1	34.6	-	32.1	53.9	21.8	
Hori	2487.921	AV	35.5	27.7	5.1	34.6	-	33.7	53.9	20.2	
Hori	4960.000	AV	29.3	32.0	7.6	33.8	-	35.1	53.9	18.8	Floor noise
Hori	7440.000	AV	29.4	36.4	8.5	34.0	-	40.3	53.9	13.6	Floor noise
Hori	9920.000	AV	30.7	38.6	9.3	34.6	-	44.0	53.9	9.9	Floor noise
Vert	49.152	QP	31.7	11.1	7.0	28.1	-	21.7	40.0	18.3	
Vert	78.647	QP	30.7	6.5	7.2	28.0	-	16.4	40.0	23.6	
Vert	88.000	QP	25.7	8.0	7.3	28.0	-	13.0	40.0	27.0	
Vert	92.270	QP	29.3	8.7	7.4	28.0	-	17.4	43.5	26.1	
Vert	110.900	QP	24.6	11.6	7.5	27.9	-	15.8	43.5	27.7	
Vert	960.000	QP	21.9	22.4	11.4	26.5	-	29.2	46.0	16.8	
Vert	2483.500	PK	45.3	27.7	5.1	34.6	-	43.5	73.9	30.4	
Vert	2487.921	PK	46.0	27.7	5.1	34.6	-	44.2	73.9	29.7	
Vert	4960.000	PK	41.5	32.0	7.6	33.8	-	47.3	73.9	26.6	Floor noise
Vert	7440.000	PK	42.1	36.4	8.5	34.0	-	53.0	73.9	20.9	Floor noise
Vert	9920.000	PK	42.7	38.6	9.3	34.6	-	56.0	73.9	17.9	Floor noise
Vert	2483.500	AV	32.8	27.7	5.1	34.6	-	31.0	53.9	22.9	
Vert	2487.921	AV	34.2	27.7	5.1	34.6	-	32.4	53.9	21.5	
Vert	4960.000	AV	29.3	32.0	7.6	33.8	-	35.1	53.9	18.8	Floor noise
Vert	7440.000	AV	29.4	36.4	8.5	34.0	-	40.3	53.9	13.6	Floor noise
Vert	9920.000	AV	30.7	38.6	9.3	34.6	-	44.0	53.9	9.9	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)



*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz 20log (3.75 m / 3.0 m) = 1.94 dB
 10 GHz - 26.5 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

***These results have sufficient margin without taking account Dwell time factor.**

Radiated Spurious Emission
(Reference Plot for band-edge)

Test place : Ise EMC Lab. No.2 Semi Anechoic Chamber
Report No. : 11653095H
Date : February 15, 2017
Temperature / Humidity : 23 deg. C / 31 % RH
Engineer : Tomoki Matsui
(1 GHz -10 GHz)
Mode : Tx, Hopping Off, DH5 2480 MHz

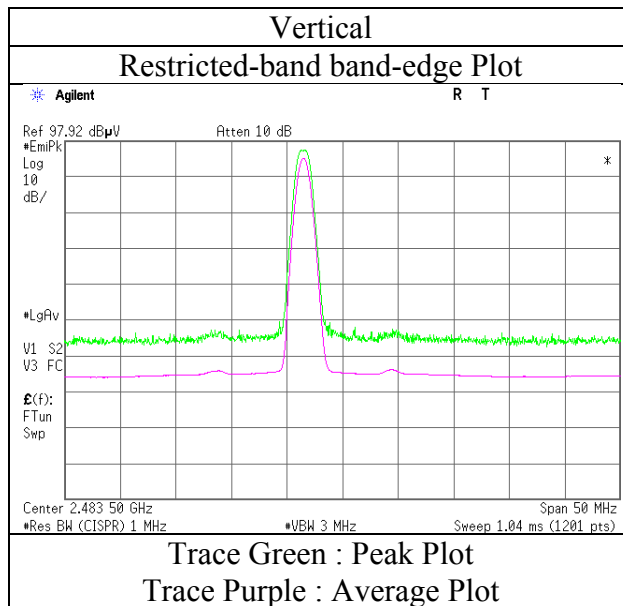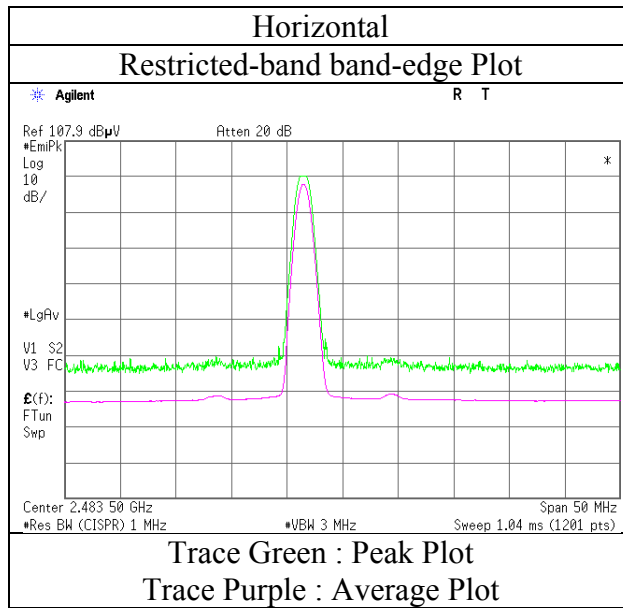

* Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place : Ise EMC Lab. No.2 Semi Anechoic Chamber
Report No. : 11653095H
Date : February 15, 2017 February 22, 2017 February 24, 2017 February 26, 2017
Temperature / Humidity : 23 deg. C / 31 % RH 24 deg. C / 31 % RH 23deg. C / 32 % RH 21 deg. C / 27 % RH
Engineer : Tomoki Matsui Yuta Moriya Yuta Moriya Tomoki Matsui
 (1 GHz -10 GHz) (10 GHz -18 GHz) (18 GHz-26.5 GHz) (Below 1 GHz)
Mode : Tx, Hopping Off, 3DH5 2402 MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	49.152	QP	24.8	11.1	7.0	28.1	-	14.8	40.0	25.2	
Hori	78.647	QP	27.9	6.5	7.2	28.0	-	13.6	40.0	26.4	
Hori	88.000	QP	24.4	8.0	7.3	28.0	-	11.7	40.0	28.3	
Hori	92.270	QP	26.5	8.7	7.4	28.0	-	14.6	43.5	28.9	
Hori	114.238	QP	24.4	12.1	7.6	27.9	-	16.2	43.5	27.3	
Hori	960.000	QP	21.9	22.4	11.4	26.5	-	29.2	46.0	16.8	
Hori	2390.000	PK	44.1	27.6	4.9	34.6	-	42.0	73.9	31.9	
Hori	4804.000	PK	41.3	31.5	7.6	33.8	-	46.6	73.9	27.3	Floor noise
Hori	7206.000	PK	41.5	36.1	8.4	33.9	-	52.1	73.9	21.8	Floor noise
Hori	9608.000	PK	42.5	38.5	9.3	34.5	-	55.8	73.9	18.1	Floor noise
Hori	2390.000	AV	31.9	27.6	4.9	34.6	-	29.8	53.9	24.1	
Hori	4804.000	AV	29.2	31.5	7.6	33.8	-	34.5	53.9	19.4	Floor noise
Hori	7206.000	AV	29.3	36.1	8.4	33.9	-	39.9	53.9	14.0	Floor noise
Hori	9608.000	AV	30.7	38.5	9.3	34.5	-	44.0	53.9	9.9	Floor noise
Vert	49.152	QP	31.4	11.1	7.0	28.1	-	21.4	40.0	18.6	
Vert	78.647	QP	30.5	6.5	7.2	28.0	-	16.2	40.0	23.8	
Vert	88.000	QP	25.5	8.0	7.3	28.0	-	12.8	40.0	27.2	
Vert	92.270	QP	29.2	8.7	7.4	28.0	-	17.3	43.5	26.2	
Vert	110.900	QP	24.6	11.6	7.5	27.9	-	15.8	43.5	27.7	
Vert	960.000	QP	21.9	22.4	11.4	26.5	-	29.2	46.0	16.8	
Vert	2390.000	PK	44.4	27.6	4.9	34.6	-	42.3	73.9	31.6	
Vert	4804.000	PK	41.3	31.5	7.6	33.8	-	46.6	73.9	27.3	Floor noise
Vert	7206.000	PK	41.5	36.1	8.4	33.9	-	52.1	73.9	21.8	Floor noise
Vert	9608.000	PK	42.5	38.5	9.3	34.5	-	55.8	73.9	18.1	Floor noise
Vert	2390.000	AV	31.8	27.6	4.9	34.6	-	29.7	53.9	24.2	
Vert	4804.000	AV	29.2	31.5	7.6	33.8	-	34.5	53.9	19.4	Floor noise
Vert	7206.000	AV	29.3	36.1	8.4	33.9	-	39.9	53.9	14.0	Floor noise
Vert	9608.000	AV	30.7	38.5	9.3	34.5	-	44.0	53.9	9.9	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz 20log (3.75 m / 3.0 m) = 1.94 dB
 10 GHz - 26.5 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

20dBc Data Sheet



Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	2402.000	PK	94.8	27.6	5.0	34.6	92.8	-	-	Carrier
Hori	2399.592	PK	47.7	27.6	4.9	34.6	45.6	72.8	27.2	
Hori	2400.000	PK	46.1	27.6	5.0	34.6	44.1	72.8	28.7	
Vert	2402.000	PK	93.1	27.6	5.0	34.6	91.1	-	-	Carrier
Vert	2399.592	PK	46.1	27.6	4.9	34.6	44.0	71.1	27.1	
Vert	2400.000	PK	44.6	27.6	5.0	34.6	42.6	71.1	28.5	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

***These results have sufficient margin without taking account Dwell time factor.**

Radiated Spurious Emission (Reference Plot for band-edge)

Test place	Ise EMC Lab. No.2 Semi Anechoic Chamber
Report No.	11653095H
Date	February 15, 2017
Temperature / Humidity	23 deg. C / 31 % RH
Engineer	Tomoki Matsui
	(1 GHz -10 GHz)
Mode	Tx, Hopping Off, 3DH5 2402 MHz

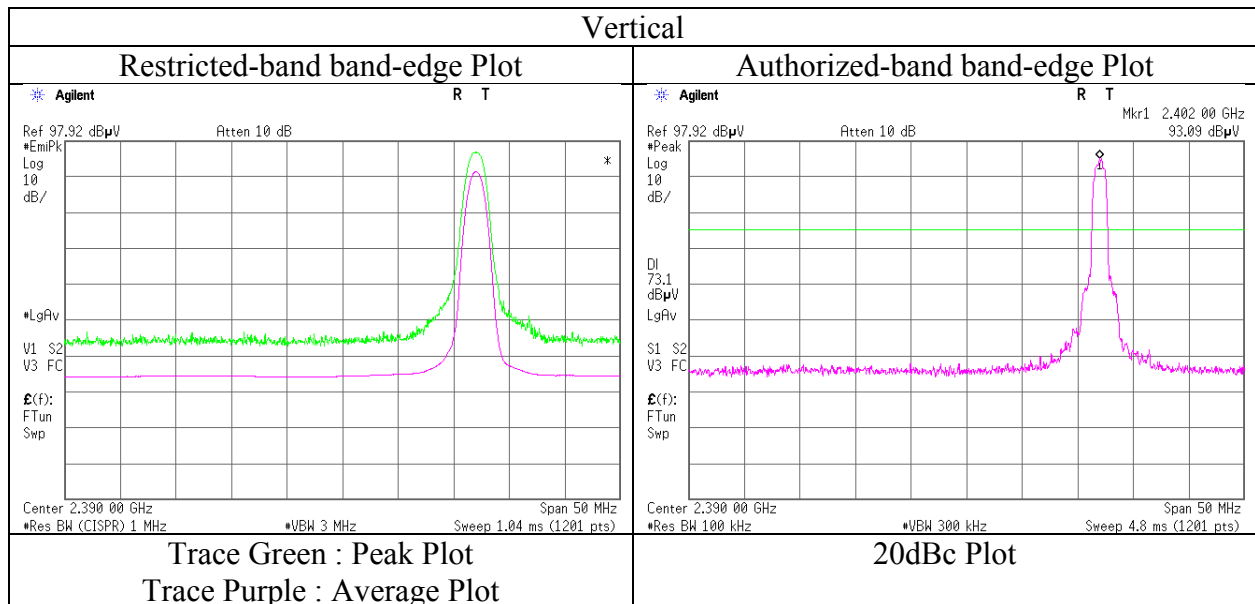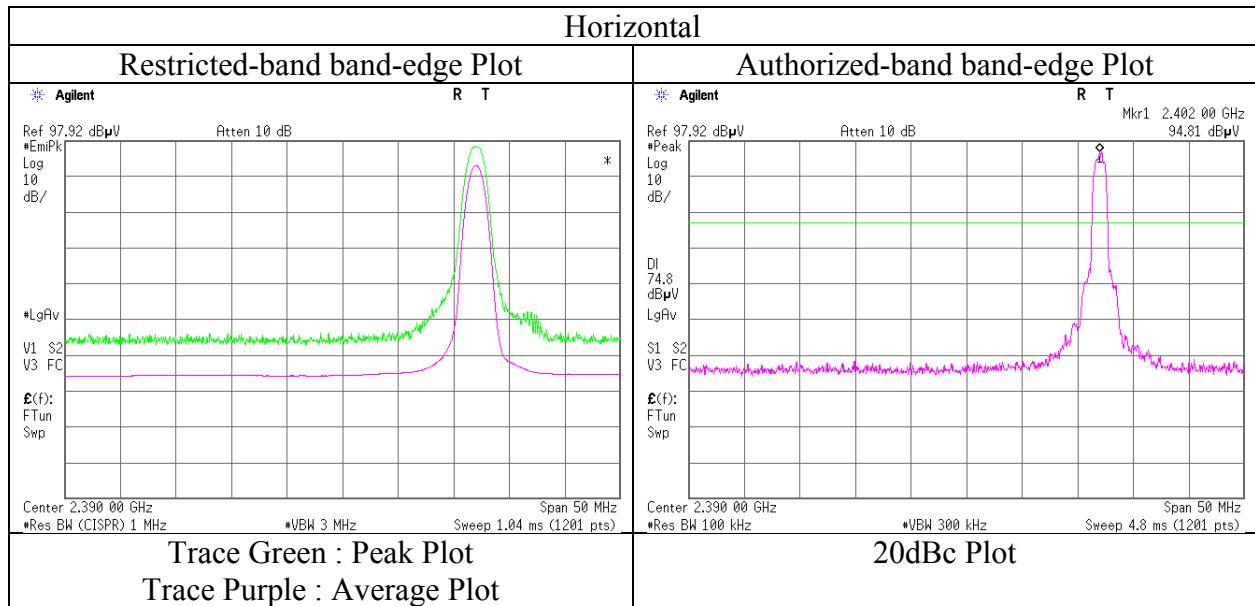

* Final result of restricted band edge was shown in tabular data.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

Radiated Spurious Emission

Test place : Ise EMC Lab. No.2 Semi Anechoic Chamber
Report No. : 11653095H
Date : February 15, 2017 February 22, 2017 February 24, 2017 February 26, 2017
Temperature / Humidity : 23 deg. C / 31 % RH 24 deg. C / 31 % RH 23deg. C / 32 % RH 21 deg. C / 27 % RH
Engineer : Tomoki Matsui Yuta Moriya Yuta Moriya Tomoki Matsui
 (1 GHz -10 GHz) (10 GHz -18 GHz) (18 GHz-26.5 GHz) (Below 1 GHz)
Mode : Tx, Hopping Off, 3DH5 2441 MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	49.152	QP	25.1	11.1	7.0	28.1	-	15.1	40.0	24.9	
Hori	78.647	QP	27.4	6.5	7.2	28.0	-	13.1	40.0	26.9	
Hori	88.000	QP	24.4	8.0	7.3	28.0	-	11.7	40.0	28.3	
Hori	92.270	QP	26.4	8.7	7.4	28.0	-	14.5	43.5	29.0	
Hori	114.238	QP	24.4	12.1	7.6	27.9	-	16.2	43.5	27.3	
Hori	960.000	QP	21.9	22.4	11.4	26.5	-	29.2	46.0	16.8	
Hori	4882.000	PK	41.9	31.7	7.6	33.8	-	47.4	73.9	26.5	Floor noise
Hori	7323.000	PK	41.7	36.3	8.5	33.9	-	52.6	73.9	21.3	Floor noise
Hori	9764.000	PK	42.5	38.5	9.2	34.5	-	55.7	73.9	18.2	Floor noise
Hori	4882.000	AV	29.4	31.7	7.6	33.8	-	34.9	53.9	19.0	Floor noise
Hori	7323.000	AV	29.4	36.3	8.5	33.9	-	40.3	53.9	13.6	Floor noise
Hori	9764.000	AV	30.4	38.5	9.2	34.5	-	43.6	53.9	10.3	Floor noise
Vert	49.152	QP	31.2	11.1	7.0	28.1	-	21.2	40.0	18.8	
Vert	78.647	QP	30.7	6.5	7.2	28.0	-	16.4	40.0	23.6	
Vert	88.000	QP	25.7	8.0	7.3	28.0	-	13.0	40.0	27.0	
Vert	92.270	QP	29.5	8.7	7.4	28.0	-	17.6	43.5	25.9	
Vert	110.900	QP	24.6	11.6	7.5	27.9	-	15.8	43.5	27.7	
Vert	960.000	QP	21.9	22.4	11.4	26.5	-	29.2	46.0	16.8	
Vert	4882.000	PK	41.9	31.7	7.6	33.8	-	47.4	73.9	26.5	Floor noise
Vert	7323.000	PK	41.7	36.3	8.5	33.9	-	52.6	73.9	21.3	Floor noise
Vert	9764.000	PK	42.5	38.5	9.2	34.5	-	55.7	73.9	18.2	Floor noise
Vert	4882.000	AV	29.4	31.7	7.6	33.8	-	34.9	53.9	19.0	Floor noise
Vert	7323.000	AV	29.4	36.3	8.5	33.9	-	40.3	53.9	13.6	Floor noise
Vert	9764.000	AV	30.4	38.5	9.2	34.5	-	43.6	53.9	10.3	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz $20\log(3.75\text{ m} / 3.0\text{ m}) = 1.94\text{ dB}$
10 GHz - 26.5 GHz $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

***These results have sufficient margin without taking account Dwell time factor.**

Radiated Spurious Emission

Test place : Ise EMC Lab. No.2 Semi Anechoic Chamber
Report No. : 11653095H
Date : February 15, 2017 February 22, 2017 February 24, 2017 February 26, 2017
Temperature / Humidity : 23 deg. C / 31 % RH 24 deg. C / 31 % RH 23deg. C / 32 % RH 21 deg. C / 27 % RH
Engineer : Tomoki Matsui Yuta Moriya Yuta Moriya Tomoki Matsui
 (1 GHz -10 GHz) (10 GHz -18 GHz) (18 GHz-26.5 GHz) (Below 1 GHz)
Mode : Tx, Hopping Off, 3DH5 2480 MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	49.152	QP	25.2	11.1	7.0	28.1	-	15.2	40.0	24.8	
Hori	78.647	QP	27.5	6.5	7.2	28.0	-	13.2	40.0	26.8	
Hori	88.000	QP	24.4	8.0	7.3	28.0	-	11.7	40.0	28.3	
Hori	92.270	QP	26.2	8.7	7.4	28.0	-	14.3	43.5	29.2	
Hori	114.238	QP	24.4	12.1	7.6	27.9	-	16.2	43.5	27.3	
Hori	960.000	QP	21.9	22.4	11.4	26.5	-	29.2	46.0	16.8	
Hori	2483.500	PK	54.3	27.7	5.1	34.6	-	52.5	73.9	21.4	
Hori	2484.703	PK	55.2	27.7	5.1	34.6	-	53.4	73.9	20.5	
Hori	4960.000	PK	41.5	32.0	7.6	33.8	-	47.3	73.9	26.6	Floor noise
Hori	7440.000	PK	42.1	36.4	8.5	34.0	-	53.0	73.9	20.9	Floor noise
Hori	9920.000	PK	42.7	38.6	9.3	34.6	-	56.0	73.9	17.9	Floor noise
Hori	2483.500	AV	37.7	27.7	5.1	34.6	-	35.9	53.9	18.0	
Hori	2484.703	AV	35.2	27.7	5.1	34.6	-	33.4	53.9	20.5	
Hori	4960.000	AV	29.3	32.0	7.6	33.8	-	35.1	53.9	18.8	Floor noise
Hori	7440.000	AV	29.4	36.4	8.5	34.0	-	40.3	53.9	13.6	Floor noise
Hori	9920.000	AV	30.7	38.6	9.3	34.6	-	44.0	53.9	9.9	Floor noise
Vert	49.152	QP	31.7	11.1	7.0	28.1	-	21.7	40.0	18.3	
Vert	78.647	QP	30.7	6.5	7.2	28.0	-	16.4	40.0	23.6	
Vert	88.000	QP	25.7	8.0	7.3	28.0	-	13.0	40.0	27.0	
Vert	92.270	QP	29.3	8.7	7.4	28.0	-	17.4	43.5	26.1	
Vert	110.900	QP	24.6	11.6	7.5	27.9	-	15.8	43.5	27.7	
Vert	960.000	QP	21.9	22.4	11.4	26.5	-	29.2	46.0	16.8	
Vert	2483.500	PK	52.0	27.7	5.1	34.6	-	50.2	73.9	23.7	
Vert	2484.703	PK	52.8	27.7	5.1	34.6	-	51.0	73.9	22.9	
Vert	4960.000	PK	41.5	32.0	7.6	33.8	-	47.3	73.9	26.6	Floor noise
Vert	7440.000	PK	42.1	36.4	8.5	34.0	-	53.0	73.9	20.9	Floor noise
Vert	9920.000	PK	42.7	38.6	9.3	34.6	-	56.0	73.9	17.9	Floor noise
Vert	2483.500	AV	36.1	27.7	5.1	34.6	-	34.3	53.9	19.6	
Vert	2484.703	AV	33.6	27.7	5.1	34.6	-	31.8	53.9	22.1	
Vert	4960.000	AV	29.3	32.0	7.6	33.8	-	35.1	53.9	18.8	Floor noise
Vert	7440.000	AV	29.4	36.4	8.5	34.0	-	40.3	53.9	13.6	Floor noise
Vert	9920.000	AV	30.7	38.6	9.3	34.6	-	44.0	53.9	9.9	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)



*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz 20log (3.75 m / 3.0 m) = 1.94 dB
 10 GHz - 26.5 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

***These results have sufficient margin without taking account Dwell time factor.**

Radiated Spurious Emission
(Reference Plot for band-edge)

Test place Ise EMC Lab. No.2 Semi Anechoic Chamber
Report No. 11653095H
Date February 15, 2017
Temperature / Humidity 23 deg. C / 31 % RH
Engineer Tomoki Matsui
(1 GHz -10 GHz)
Mode Tx, Hopping Off, 3DH5 2480 MHz

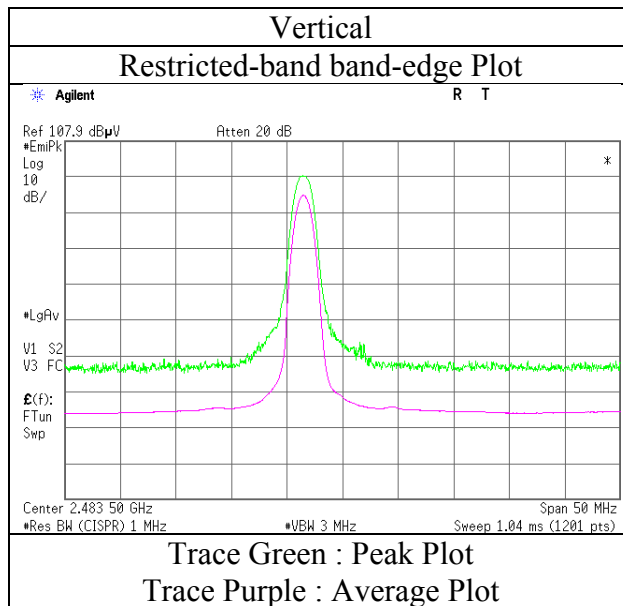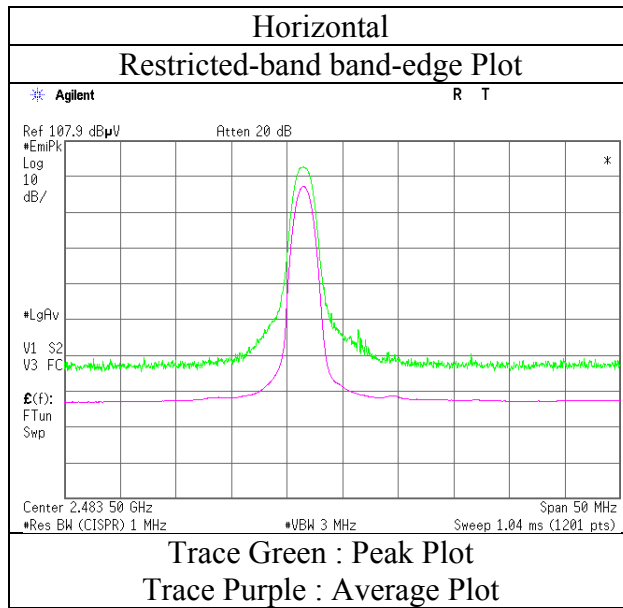

* Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place : Ise EMC Lab. No.2 Semi Anechoic Chamber
Report No. : 11653095H
Date : February 21, 2017
Temperature / Humidity : 24 deg. C / 30 % RH
Engineer : Takumi Shimada
(1 GHz -10 GHz)
Mode : Tx, Hopping Off, 3DH5 2402 MHz and 11n-20 5180MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	2390.000	PK	44.1	27.6	4.9	34.6	-	42.0	73.9	31.9	
Hori.	2776.250	PK	47.5	28.1	5.3	34.6	-	46.3	73.9	27.6	
Hori.	2390.000	AV	32.1	27.6	4.9	34.6	-	30.0	53.9	23.9	
Hori.	2776.250	AV	34.0	28.1	5.3	34.6	-	32.8	53.9	21.1	
Vert.	2390.000	PK	45.0	27.6	4.9	34.6	-	42.9	73.9	31.0	
Vert.	2769.580	PK	50.7	28.1	5.3	34.6	-	49.5	73.9	24.4	
Vert.	2390.000	AV	34.5	27.6	4.9	34.6	-	32.4	53.9	21.5	
Vert.	2769.580	AV	38.7	28.1	5.3	34.6	-	37.5	53.9	16.4	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz 20log (3.75 m / 3.0 m) = 1.94 dB
10 GHz - 26.5 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

20dBc Data Sheet

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	2402.000	PK	96.0	27.6	5.0	34.6	94.0	-	-	Carrier
Hori	2400.000	PK	47.3	27.6	5.0	34.6	45.3	74.0	28.7	
Hori	2399.900	PK	48.7	27.6	5.0	34.6	46.7	74.0	27.3	
Vert	2402.000	PK	94.4	27.6	5.0	34.6	92.4	-	-	Carrier
Vert	2400.000	PK	45.0	27.6	5.0	34.6	43.0	72.4	29.4	
Vert	2399.892	PK	46.5	27.6	5.0	34.6	44.5	72.4	27.9	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

***These results have sufficient margin without taking account Dwell time factor.**

Radiated Spurious Emission

Test place Ise EMC Lab. No.2 Semi Anechoic Chamber
Report No. 11653095H
Date February 21, 2017 February 23, 2017 February 24, 2017 February 26, 2017
Temperature / Humidity 24 deg. C / 30 % RH 22 deg. C / 30 % RH 23deg. C / 32 % RH 21 deg. C / 27 % RH
Engineer Takumi Shimada Takumi Shimada Yuta Moriya Tomoki Matsui
(1 GHz -10 GHz) (10 GHz -18 GHz) (18 GHz-26.5 GHz) (Below 1 GHz)
Mode Tx, Hopping Off, 3DH5 2441 MHz and 11n-20 5180MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	49.152	QP	24.5	11.1	7.0	28.1	-	14.5	40.0	25.5	
Hori	78.647	QP	26.2	6.5	7.2	28.0	-	11.9	40.0	28.1	
Hori	88.000	QP	24.4	8.0	7.3	28.0	-	11.7	40.0	28.3	
Hori	92.270	QP	25.3	8.7	7.4	28.0	-	13.4	43.5	30.1	
Hori	114.238	QP	24.7	12.1	7.6	27.9	-	16.5	43.5	27.0	
Hori	960.000	QP	21.9	22.4	11.4	26.5	-	29.2	46.0	16.8	
Hori.	2733.710	PK	51.3	28.0	5.2	34.6	-	49.9	73.9	24.0	
Hori.	4882.000	PK	42.3	31.7	7.6	33.8	-	47.8	73.9	26.1	Floor noise
Hori.	7323.000	PK	42.5	36.3	8.5	33.9	-	53.4	73.9	20.5	Floor noise
Hori.	9764.000	PK	43.9	38.5	9.2	34.5	-	57.1	73.9	16.8	Floor noise
Hori.	2733.710	AV	38.5	28.0	5.2	34.6	-	37.1	53.9	16.8	
Hori.	4882.000	AV	30.4	31.7	7.6	33.8	-	35.9	53.9	18.0	Floor noise
Hori.	7323.000	AV	30.5	36.3	8.5	33.9	-	41.4	53.9	12.5	Floor noise
Hori.	9764.000	AV	31.9	38.5	9.2	34.5	-	45.1	53.9	8.8	Floor noise
Vert	49.152	QP	30.8	11.1	7.0	28.1	-	20.8	40.0	19.2	
Vert	78.880	QP	27.2	6.5	7.3	28.0	-	13.0	40.0	27.0	
Vert	88.000	QP	25.7	8.0	7.3	28.0	-	13.0	40.0	27.0	
Vert	91.370	QP	27.5	8.5	7.4	28.0	-	15.4	43.5	28.1	
Vert	110.900	QP	24.6	11.6	7.5	27.9	-	15.8	43.5	27.7	
Vert	960.000	QP	21.9	22.4	11.4	26.5	-	29.2	46.0	16.8	
Vert.	2735.554	PK	50.4	28.0	5.2	34.6	-	49.0	73.9	24.9	
Vert.	4882.000	PK	41.9	31.7	7.6	33.8	-	47.4	73.9	26.5	Floor noise
Vert.	7323.000	PK	42.6	36.3	8.5	33.9	-	53.5	73.9	20.4	Floor noise
Vert.	9764.000	PK	42.6	38.5	9.2	34.5	-	55.8	73.9	18.1	Floor noise
Vert.	2735.554	AV	38.2	28.0	5.2	34.6	-	36.8	53.9	17.1	
Vert.	4882.000	AV	30.3	31.7	7.6	33.8	-	35.8	53.9	18.1	Floor noise
Vert.	7323.000	AV	30.6	36.3	8.5	33.9	-	41.5	53.9	12.4	Floor noise
Vert.	9764.000	AV	31.8	38.5	9.2	34.5	-	45.0	53.9	8.9	Floor noise

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz 20log (3.75 m / 3.0 m) = 1.94 dB
10 GHz - 26.5 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

***These results have sufficient margin without taking account Dwell time factor.**

Radiated Spurious Emission

Test place : Ise EMC Lab. No.2 Semi Anechoic Chamber
Report No. : 11653095H
Date : February 21, 2017
Temperature / Humidity : 24 deg. C / 30 % RH
Engineer : Takumi Shimada
(1 GHz -10 GHz)
Mode : Tx, Hopping Off, 3DH5 2480 MHz and 11n-20 5180MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	2483.500	PK	53.9	27.7	5.1	34.6	-	52.1	73.9	21.8	
Hori.	2703.221	PK	52.3	28.0	5.2	34.6	-	50.9	73.9	23.0	
Hori.	2483.500	AV	37.9	27.7	5.1	34.6	-	36.1	53.9	17.8	
Hori.	2703.221	AV	39.9	28.0	5.2	34.6	-	38.5	53.9	15.4	
Vert.	2483.500	PK	52.0	27.7	5.1	34.6	-	50.2	73.9	23.7	
Vert.	2703.230	PK	51.6	28.0	5.2	34.6	-	50.2	73.9	23.7	
Vert.	2483.500	AV	36.4	27.7	5.1	34.6	-	34.6	53.9	19.3	
Vert.	2703.230	AV	39.1	28.0	5.2	34.6	-	37.7	53.9	16.2	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)



*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz 20log(3.75 m / 3.0 m) = 1.94 dB
10 GHz - 26.5 GHz 20log(1.0 m / 3.0 m) = -9.5 dB

***These results have sufficient margin without taking account Dwell time factor.**

Radiated Spurious Emission (Plot data, Worst case)

Test place	Ise EMC Lab. No.2 Semi Anechoic Chamber			
Report No.	11653095H			
Date	February 15, 2017	February 22, 2017	February 24, 2017	February 26, 2017
Temperature / Humidity	23 deg. C / 31 % RH	24 deg. C / 31 % RH	23deg. C / 32 % RH	21 deg. C / 27 % RH
Engineer	Tomoki Matsui	Yuta Moriya	Yuta Moriya	Tomoki Matsui
	(1 GHz -10 GHz)	(10 GHz -18 GHz)	(18 GHz-26.5 GHz)	(Below 1 GHz)
Mode	Tx, Hopping Off, 3DH5 2402 MHz			

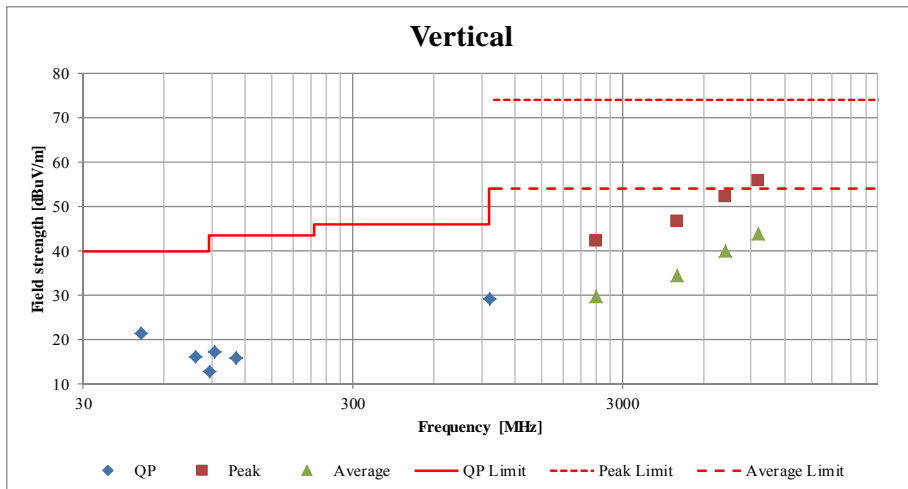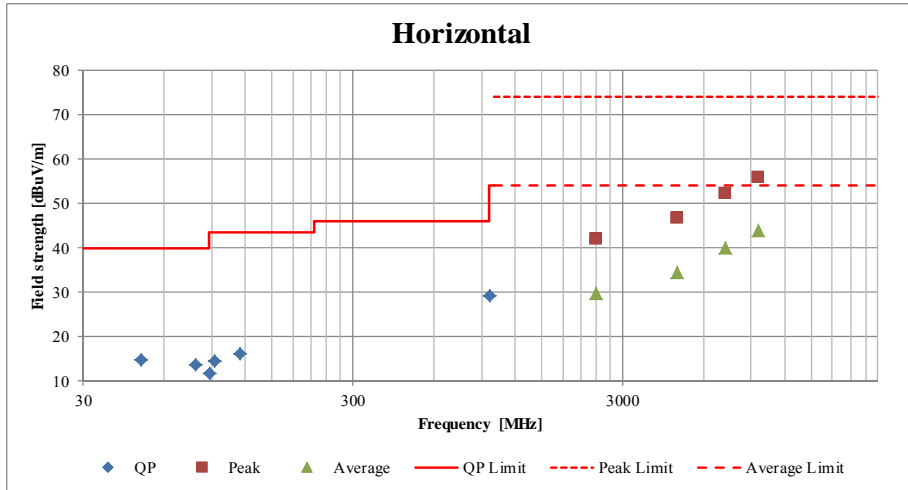

*These plots data contains sufficient number to show the trend of characteristic features for EUT.

APPENDIX 2: Test instruments

Test equipment

Control No.	Instrument	Manufacturer	Model No	Serial No	Test Item	Calibration Date * Interval(month)
MAEC-02	Semi Anechoic Chamber(NSA)	TDK	Semi Anechoic Chamber 3m	DA-06902	RE	2016/08/02 * 12
MOS-22	Thermo-Hygrometer	Custom	CTH-201	0003	RE	2016/12/13 * 12
MJM-14	Measure	KOMELON	KMC-36	-	RE	-
COTS-MEMI	EMI measurement program	TSJ	TEPTO-DV	-	RE	-
MRENT-126	Spectrum Analyzer	KEYSIGHT	E4440A	MY46185516	RE	2016/07/01 * 12
MHA-06	Horn Antenna 1-18GHz	Schwarzbeck	BBHA9120D	254	RE	2016/02/29 * 12
MCC-216	Microwave Cable	Junkosha	MWX221	1604S253(1 m) / 1608S087(5 m)	RE	2016/08/29 * 12
MPA-10	Pre Amplifier	Agilent	8449B	3008A02142	RE	2017/01/16 * 12
MMM-01	Digital Tester	Fluke	FLUKE 26-3	78030611	RE	2016/08/23 * 12
MHF-26	High Pass Filter 3.5-18.0GHz	UL Japan	HPF SELECTOR	002	RE	2016/09/19 * 12
MHA-21	Horn Antenna 1-18GHz	Schwarzbeck	BBHA9120D	9120D-557	RE	2016/09/28 * 12
MHA-17	Horn Antenna 15-40GHz	Schwarzbeck	BBHA9170	BBHA9170307	RE	2016/06/24 * 12
MTR-03	Test Receiver	Rohde & Schwarz	ESCI	100300	RE	2016/10/21 * 12
MBA-08	Biconical Antenna	Schwarzbeck	VHA9103B	08031	RE	2016/09/29 * 12
MLA-21	Logperiodic Antenna(200-1000MHz)	Schwarzbeck	VUSLP9111B	911B-190	RE	2017/01/05 * 12
MCC-12	Coaxial Cable	Fujikura/Agilent	-	-	RE	2016/02/08 * 12
MAT-07	Attenuator(6dB)	Weinschel Corp	2	BK7970	RE	2016/11/28 * 12
MPA-09	Pre Amplifier	Agilent	8447D	2944A10845	RE	2016/09/13 * 12

The expiration date of the calibration is the end of the expired month.

All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.

Test Item: RE: Radiated Emission test

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124