




# RADIO TEST REPORT


**Test Report No. : 12219846H-C**

**Applicant** : Sony Interactive Entertainment Inc.  
**Type of Equipment** : Wireless communication module  
**Model No.** : J20H096  
**FCC ID** : AK8M18DFT1  
**Test regulation** : FCC Part 15 Subpart E: 2018  
For Permissive Change  
(Maximum Conducted Output Power, Maximum Power Spectral Density and Radiated Spurious Emission tests only)  
**Test Result** : Complied

1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the above regulation.
4. The test results in this report are traceable to the national or international standards.
5. This test report covers Radio technical requirements. It does not cover administrative issues such as Manual or non-Radio test related Requirements. (if applicable)
6. The all test items in this test report are conducted by UL Japan, Inc. Ise EMC Lab.
7. This test report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

**Date of test:** January 24 to March 28, 2018

**Representative test engineer:**   
Takafumi Noguchi  
Engineer  
Consumer Technology Division

**Approved by:**   
Takayuki Shimada  
Leader  
Consumer Technology Division



This laboratory is accredited by the NVLAP LAB CODE 200572-0, U.S.A. The tests reported herein have been performed in accordance with its terms of accreditation.  
\*As for the range of Accreditation in NVLAP, you may refer to the WEB address,  
[http://japan.ul.com/resources/emc\\_accredited/](http://japan.ul.com/resources/emc_accredited/)

- The testing in which "Non-accreditation" is displayed is outside the accreditation scopes in UL Japan.  
 There is no testing item of "Non-accreditation".

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN  
Telephone : +81 596 24 8999  
Facsimile : +81 596 24 8124



| <b>CONTENTS</b>  | <b>PAGE</b> |
|--|-------------|
| <b>SECTION 1: Customer information.....</b>                                | <b>4</b>    |
| <b>SECTION 2: Equipment under test (E.U.T.).....</b>                       | <b>4</b>    |
| <b>SECTION 3: Test specification, procedures &amp; results.....</b>        | <b>7</b>    |
| <b>SECTION 4: Operation of E.U.T. during testing.....</b>                  | <b>10</b>   |
| <b>SECTION 5: Radiated Spurious Emission and Band Edge Compliance.....</b> | <b>13</b>   |
| <b>SECTION 6: Antenna Terminal Conducted Tests.....</b>                    | <b>15</b>   |
| <b>APPENDIX 1: Test data .....</b>   | <b>16</b>   |
| Maximum Conducted Output Power .....                                       | 16          |
| Maximum Power Spectral Density .....                                       | 24          |
| Radiated Spurious Emission .....   | 52          |
| <b>APPENDIX 2: Test instruments .....</b>                                  | <b>93</b>   |
| <b>APPENDIX 3: Photographs of test setup .....</b>                         | <b>94</b>   |
| Radiated Spurious Emission .....   | 94          |
| Worst Case Position .....  | 95          |
| Test Configuration and peripherals.....                                    | 97          |

---

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## **SECTION 1: Customer information**

|                  |   |
|------------------|---|
| Company Name     | Sony Interactive Entertainment Inc.           |
| Brand Name       | SONY  |
| Address          | 1-7-1 Konan, Minato-ku, Tokyo, 108-0075 Japan |
| Telephone Number | +81-50-3807-5639                              |
| Facsimile Number | +81-50-3807-9594                              |
| Contact Person   | Kiyoto Sasaki                                 |

## **SECTION 2: Equipment under test (E.U.T.)**

### **2.1 Identification of E.U.T.**

|                        |   |
|------------------------|---|
| Type of Equipment      | Wireless communication module   |
| Model No               | J20H096   |
| Serial No              | Refer to Clause 4.2   |
| Country of Manufacture | China/Japan   |
| Receipt Date of Sample | January 20, 2018  |
| Condition of EUT       | Production prototype<br>(Not for Sale: This sample is equivalent to mass-produced items.) |
| Modification of EUT    | No modification by the test lab.  |

### **2.2 Product Description**

J20H096 is the Wireless communication module.

#### **Product Specification**

|  |                             |
|--|-----------------------------|
| Clock frequency in the system (radio part) | 26 MHz                      |
| Operating Temperature                      | -10 deg. C - +85 deg. C     |
| Power Supply                               | DC 3.3 V, DC 1.8 V          |
| Size                                       | 20 x 18 x 3.0 mm, 55pin LGA |

---

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## Radio Specification

### WLAN (IEEE802.11b/g/n-20)

|                                |   |
|--------------------------------|---|
| Equipment Type                 | Transceiver   |
| Frequency of Operation         | 2412 MHz - 2462 MHz                                     |
| Type of Modulation             | DSSS, OFDM  |
| Bandwidth & Channel spacing    | Less than 20 MHz & 5 MHz                                |
| Method of frequency generation | Synthesizer   |
| Antenna Type                   | PIFA (Antenna port WA for 2.4 GHz / Antenna port WB)    |
| Antenna Gain: G <sub>ANT</sub> | 5.6 dBi (Antenna port WA for 2.4 GHz / Antenna port WB) |
| Directional Gain *1)           | 8.61 dBi  |

### WLAN (IEEE802.11a/11n-20/11ac-20/11n-40/11ac-40/11ac-80)

|                                |  |
|--------------------------------|--|
| Equipment Type                 | Transceiver  |
| Frequency of Operation         | U-NII-1: 5180 MHz - 5240 MHz<br>U-NII-2A: 5260 MHz - 5320 MHz<br>U-NII-2C: 5500 MHz - 5700 MHz<br>U-NII-3: 5745 MHz - 5825 MHz |
| Type of Modulation             | OFDM   |
| Bandwidth & Channel spacing    | Less than 20 MHz / 40 MHz / 80 MHz &<br>20 MHz / 40 MHz / 80 MHz   |
| Method of frequency generation | Synthesizer  |
| Antenna Type                   | PIFA (Antenna port WA for 5 GHz /<br>Antenna port WC for 5 GHz)  |
| Antenna Gain: G <sub>ANT</sub> | 5.0 dBi (Antenna port WA for 5 GHz),<br>5.6 dBi (Antenna port WC for 5 GHz)  |
| Directional Gain *1)           | 8.32 dBi   |

### Bluetooth (BDR/EDR)

|                                |                                       |
|--------------------------------|---------------------------------------|
| Equipment Type                 | Transceiver                           |
| Frequency of Operation         | 2402 MHz - 2480 MHz                   |
| Type of Modulation             | FHSS (GFSK, $\pi/4$ DQPSK, 8DPSK)     |
| Bandwidth & Channel spacing    | 79 MHz & 1 MHz                        |
| Method of frequency generation | Synthesizer                           |
| Antenna Type                   | PIFA (Antenna port WC for 2.4 GHz)    |
| Antenna Gain                   | 7.0 dBi (Antenna port WC for 2.4 GHz) |

### Bluetooth (Low Energy)

|                                |                                       |
|--------------------------------|---------------------------------------|
| Equipment Type                 | Transceiver                           |
| Frequency of Operation         | 2402 MHz - 2480 MHz                   |
| Type of Modulation             | GFSK                                  |
| Bandwidth & Channel spacing    | 1 MHz & 2 MHz                         |
| Method of frequency generation | Synthesizer                           |
| Antenna Type                   | PIFA (Antenna port WC for 2.4 GHz)    |
| Antenna Gain                   | 7.0 dBi (Antenna port WC for 2.4 GHz) |

\*1) Directional antenna gain =  $10 \log \left( \frac{G_{ANT1}}{10^{20}} + \frac{G_{ANT2}}{10^{20}} \right)^2 / 2$

\*This test report applies to WLAN (5 GHz band).

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

<Contents of the change from original model>

Test Report Number of original model is 12079942H-C-R1 (issued by UL Japan, Inc.)

Antenna was only changed from the original model, and other radio specification is identical to it.

In this report, Radiated Spurious Emission test was performed.

For Maximum Conducted Output Power and Maximum Power Spectral Density tests, test result from the original report and new antenna gain were used in the test data.

Information of antenna was updated in Section 2.2.

---

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## **SECTION 3: Test specification, procedures & results**

### **3.1 Test Specification**

Test Specification : FCC Part 15 Subpart E  
FCC Part 15 final revised on March 12, 2018 and effective April 11, 2018

Title : FCC 47CFR Part15 Radio Frequency Device Subpart E  
Unlicensed National Information Infrastructure Devices  
Section 15.407 General technical requirements

\* The revision on March 12, 2018, does not affect the test specification applied to the EUT.

\*\* Also the EUT complies with FCC Part 15 Subpart B.

### **3.2 Procedures and results**

| Item                                   | Test Procedure   | Specification  | Worst margin                           | Results  | Remarks                    |
|--|--|--|--|----------|----------------------------|
| Maximum Conducted Output Power         | FCC: KDB Publication Number 789033 D02                 | FCC: 15.407 (a) (1) (2) (3)                          | See data                               | Complied | Conducted                  |
|  | IC: -  | IC: RSS-247 6.2.1.1<br>6.2.2.1<br>6.2.3.1<br>6.2.4.1 |  |          |                            |
| Maximum Power Spectral Density         | FCC: KDB Publication Number 789033 D02                 | FCC : 15.407 (a) (1) (2) (3)                         | See data                               | Complied | Conducted                  |
|  | IC: -  | IC: RSS-247 6.2.1.1<br>6.2.2.1<br>6.2.3.1<br>6.2.4.1 |  |          |                            |
| Spurious Emission Restricted Band Edge | FCC: ANSI C63.10-2013<br>KDB Publication Number 789033 | FCC: 15.407 (b), 15.205 and 15.209                   | 7.5 dB<br>5460.000 MHz<br>Vertical, AV | Complied | Radiated (> 30 MHz)<br>*1) |
|  | IC: -  | IC: RSS-247 6.2.1.2<br>6.2.2.2<br>6.2.3.2<br>6.2.4.2 |  |          |                            |

Note: UL Japan, Inc.'s EMI Work Procedures No. 13-EM-W0420 and 13-EM-W0422.

\*1) Radiated test was selected over 30 MHz based on section FCC 15.407 (b) and KDB 789033 D02 G.3.b).

Symbols:

Complied The data of this test item has enough margin, more than the measurement uncertainty.

Complied# The data of this test item meets the limits unless the measurement uncertainty is taken into consideration.

\* In case any questions arise about test procedure, ANSI C63.10: 2013 is also referred.

### **FCC Part 15.31 (e)**

The EUT has the power supply regulator. However one of the input voltages to RF part doesn't go through the regulator. The stable voltage will be supplied by the end product, which will be required to have a power supply regulator. Therefore, the EUT complies with the requirement.

### **FCC Part 15.203/212 Antenna requirement**

The EUT has a unique coupling/antenna connector (U.FL). Therefore the equipment complies with the requirement of 15.203/212.

### **3.3 Addition to standard**

No addition, exclusion nor deviation has been made from the standard.

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

### 3.4 Uncertainty

#### EMI

The following uncertainties have been calculated to provide a confidence level of 95 % using a coverage factor  $k=2$ .

Ise EMC Lab.

#### Antenna Terminal test

| Test Item   | Uncertainty (+/-) |
|---|-------------------|
| RF output power   | 1.3 dB            |
| Antenna terminal conducted emission / Power density / Burst power | 2.7 dB            |
| Adjacent channel power / Channel power                            |                   |
| Below 3GHz  | 1.9 dB            |
| 3 GHz or 6 GHz  | 2.1 dB            |

#### Radiated emission

| Measurement distance | Frequency range                  | Uncertainty (+/-) |
|----------------------|----------------------------------|-------------------|
| 3 m                  | 9 kHz to 30 MHz                  | 3.3 dB            |
| 10 m                 |                                  | 3.2 dB            |
| 3 m                  | 30 MHz to 200 MHz (Horizontal)   | 4.8 dB            |
|                      | 30 MHz to 200 MHz (Vertical)     | 5.0 dB            |
|                      | 200 MHz to 1000 MHz (Horizontal) | 5.2 dB            |
|                      | 200 MHz to 1000 MHz (Vertical)   | 6.3 dB            |
| 10 m                 | 30 MHz to 200 MHz (Horizontal)   | 4.8 dB            |
|                      | 30 MHz to 200 MHz (Vertical)     | 4.9 dB            |
|                      | 200 MHz to 1000 MHz (Horizontal) | 5.0 dB            |
|                      | 200 MHz to 1000 MHz (Vertical)   | 5.0 dB            |
| 3 m                  | 1 GHz to 6 GHz                   | 5.0 dB            |
|                      | 6 GHz to 18 GHz                  | 5.3 dB            |
| 1 m                  | 10 GHz to 26.5 GHz               | 5.8 dB            |
|                      | 26.5 GHz to 40 GHz               | 5.8 dB            |
| 10 m                 | 1 GHz to 18 GHz                  | 5.2 dB            |

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124



### 3.5 Test Location

UL Japan, Inc. Ise EMC Lab.  
4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN  
Telephone: +81 596 24 8999, Facsimile: +81 596 24 8124  
NVLAP Lab. code: 200572-0 / FCC Test Firm Registration Number: 199967

| Test site                  | IC Registration Number | Width x Depth x Height (m) | Size of reference ground plane (m) / horizontal conducting plane | Other rooms            | Maximum measurement distance |
|----------------------------|------------------------|----------------------------|--|------------------------|------------------------------|
| No.1 semi-anechoic chamber | 2973C-1                | 19.2 x 11.2 x 7.7          | 7.0 x 6.0  | No.1 Power source room | 10 m                         |
| No.2 semi-anechoic chamber | 2973C-2                | 7.5 x 5.8 x 5.2            | 4.0 x 4.0  | -                      | 3 m                          |
| No.3 semi-anechoic chamber | 2973C-3                | 12.0 x 8.5 x 5.9           | 6.8 x 5.75   | No.3 Preparation room  | 3 m                          |
| No.3 shielded room         | -                      | 4.0 x 6.0 x 2.7            | N/A  | -                      | -                            |
| No.4 semi-anechoic chamber | 2973C-4                | 12.0 x 8.5 x 5.9           | 6.8 x 5.75   | No.4 Preparation room  | 3 m                          |
| No.4 shielded room         | -                      | 4.0 x 6.0 x 2.7            | N/A  | -                      | -                            |
| No.5 semi-anechoic chamber | -                      | 6.0 x 6.0 x 3.9            | 6.0 x 6.0  | -                      | -                            |
| No.6 shielded room         | -                      | 4.0 x 4.5 x 2.7            | 4.0 x 4.5  | -                      | -                            |
| No.6 measurement room      | -                      | 4.75 x 5.4 x 3.0           | 4.75 x 4.15  | -                      | -                            |
| No.7 shielded room         | -                      | 4.7 x 7.5 x 2.7            | 4.7 x 7.5  | -                      | -                            |
| No.8 measurement room      | -                      | 3.1 x 5.0 x 2.7            | N/A  | -                      | -                            |
| No.9 measurement room      | -                      | 8.8 x 4.6 x 2.8            | 2.4 x 2.4  | -                      | -                            |
| No.11 measurement room     | -                      | 6.2 x 4.7 x 3.0            | 4.8 x 4.6  | -                      | -                            |

\* Size of vertical conducting plane (for Conducted Emission test) : 2.0 x 2.0 m for No.1, No.2, No.3, and No.4 semi-anechoic chambers and No.3 and No.4 shielded rooms.

### 3.6 Test data, Test instruments, and Test set up

Refer to APPENDIX.

## UL Japan, Inc. Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN  
Telephone : +81 596 24 8999  
Facsimile : +81 596 24 8124

## **SECTION 4: Operation of E.U.T. during testing**

### **4.1 Operating Mode(s)**

Test operating mode was determined as follows according to “Section 1 of 6 802.11 a/b/g/n testing - Managing Complex Regulatory Approvals -” of TCB Council Workshop October 2009 and also was judged the necessity of 802.11ac mode by the pre-test.

| <b>Mode</b>  | <b>Remarks*</b>  |
|--|------------------|
| IEEE 802.11a (11a)   | 54 Mbps, PN9     |
| IEEE 802.11n MIMO 20 MHz BW (11n-20)   | MCS 7, PN9       |
| IEEE 802.11ac MIMO 20 MHz BW (11ac-20)   | MCS 7 (1Tx), PN9 |
| IEEE 802.11n MIMO 40 MHz BW (11n-40)   | MCS 1, PN9       |
| IEEE 802.11ac MIMO 40 MHz BW (11ac-40)   | MCS 7 (1Tx), PN9 |
| IEEE 802.11ac MIMO 80 MHz BW (11ac-80)   | MCS 7 (1Tx), PN9 |
| *The worst antenna and condition was determined based on the test result of Maximum Conducted Output Power.  |                  |
| *The power value of the EUT was set for testing as follows (setting value might be different from product specification value);<br>Power settings: U-NII-1: Value = 12<br>U-NII-2A, U-NII-2C, U-NII-3: Value = 16<br>Software: MT_TEST_Tool_Ver6.3<br>*This setting of software is the worst case.<br>Any conditions under the normal use do not exceed the condition of setting.<br>In addition, end users cannot change the settings of the output power of the product. |                  |

---

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

\*The details of Operation mode(s)

| Test Item  | Operating Mode                    | Tested Antenna port | Tested Frequency                 |                                  |                                  |                                  |
|--|-----------------------------------|---------------------|----------------------------------|----------------------------------|----------------------------------|----------------------------------|
|  |                                   |                     | Lower Band                       | Middle Band                      | Additional Band                  | Upper Band                       |
| Maximum Conducted Output Power, Maximum Power Spectral Density   | 11a Tx<br>11n-20 Tx<br>11ac-20 Tx | WA+WC,<br>WA, WC    | 5180 MHz<br>5220 MHz<br>5240 MHz | 5260 MHz<br>5300 MHz<br>5320 MHz | 5500 MHz<br>5580 MHz<br>5700 MHz | 5745 MHz<br>5785 MHz<br>5825 MHz |
|  | 11n-40 Tx<br>11ac-40 Tx           | WA+WC,<br>WA, WC    | 5190 MHz<br>5230 MHz             | 5270 MHz<br>5310 MHz             | 5510 MHz<br>5550 MHz<br>5670 MHz | 5755 MHz<br>5795 MHz             |
|  | 11ac-80 Tx                        | WA+WC,<br>WA, WC    | 5210 MHz                         | 5290 MHz                         | 5530 MHz<br>5610 MHz             | 5775 MHz                         |
| Radiated Spurious Emission (Below 1 GHz)   | 11ac-40 Tx *1)                    | WA+WC               | -                                | -                                | 5550 MHz                         | -                                |
| Radiated Spurious Emission (Above 1 GHz)   | 11ac-20 Tx *2)                    | WA+WC               | 5180 MHz                         | 5260 MHz<br>5320 MHz             | 5500 MHz<br>5580 MHz<br>5700 MHz | 5745 MHz<br>5785 MHz<br>5825 MHz |
|  | 11ac-40 Tx *3)                    | WA+WC               | 5190 MHz                         | 5270 MHz<br>5310 MHz             | 5510 MHz<br>5550 MHz<br>5670 MHz | 5755 MHz<br>5795 MHz             |
|  | 11ac-80 Tx                        | WA+WC               | 5210 MHz                         | 5290 MHz                         | 5530 MHz<br>5610 MHz             | 5775 MHz                         |
| *1) The mode was tested as a representative, because it had the highest power at antenna terminal test.  |                                   |                     |                                  |                                  |                                  |                                  |
| *2) Since 11a, 11ac-20 and 11n-20 have the same modulation method and no differences in transmitting specification, test was performed on the representative mode that had the highest peak output power |                                   |                     |                                  |                                  |                                  |                                  |
| *3) Since 11n-40 and 11ac-40 have the same modulation method and no differences in transmitting specification, test was performed on the representative mode that had the highest peak output power.     |                                   |                     |                                  |                                  |                                  |                                  |

\*Simultaneously transmission

| Test Item   | Operating Mode *1)        | Tested Antenna port | Tested Frequency |             |                 |            |
|---|---------------------------|---------------------|------------------|-------------|-----------------|------------|
|   |                           |                     | Lower Band       | Middle Band | Additional Band | Upper Band |
| Radiated Spurious Emission  | 11ac-80 + Hopping on 3DH5 | WA+WC               | -                | -           | 5530            | -          |
| *1) The mode was tested as a representative, because it had the worst margin of 5GHz at radiated emission test. |                           |                     |                  |             |                 |            |

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## 4.2 Configuration and peripherals

**This page has been submitted for a separate exhibit.**

---

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## **SECTION 5: Radiated Spurious Emission and Band Edge Compliance**

### **Test Procedure**

< Below 1GHz >

EUT was placed on a urethane platform of nominal size, 0.5 m by 1.0 m, raised 0.8 m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with a ground plane.

< Above 1GHz >

EUT was placed on a urethane platform of nominal size, 0.5 m by 0.5 m, raised 1.5 m above the conducting ground plane.

The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with absorbent materials lined on a ground plane.

The height of the measuring antenna varied between 1 and 4 m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field strength.

The measurements were performed for both vertical and horizontal antenna polarization with the Test Receiver, or the Spectrum Analyzer.

The measurements were made with the following detector function of the test receiver and the Spectrum analyzer (in linear mode).

The test was made with the detector (RBW/VBW) in the following table.

When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

< Below 1GHz >

The result also satisfied with the general limits specified in section 15.209 (a).

< Above 1GHz >

Inside of restricted bands (Section 15.205):

Apply to limit in the Section 15.209 (a).

Outside of the restricted bands:

Apply to limit 68.2 dBuV/m, 3 m (-27 dBm e.i.r.p. \*) in the Section 15.407 (b) (1) (2) (3).

For U-NII-3 Bandedge

-27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge in the section 15.407(b)(4)(i).

Restricted band edge:

Apply to limit in the Section 15.209 (a).

Since this limit is severer than the limit of the inside of restricted bands.

\*Electric field strength to e.i.r.p. conversion:

$$E = \frac{1000000 \sqrt{30P}}{3} \text{ (uV/m)} \quad :P \text{ is the e.i.r.p. (Watts)}$$

---

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

**Test Antennas are used as below;**

|              |                   |                  |             |
|--------------|-------------------|------------------|-------------|
| Frequency    | 30 MHz to 200 MHz | 200 MHz to 1 GHz | Above 1 GHz |
| Antenna Type | Biconical         | Logperiodic      | Horn        |

|                 |               |  |   |
|-----------------|---------------|--|---|
| Frequency       | Below 1 GHz   | Above 1 GHz  |   |
| Instrument used | Test Receiver | Spectrum Analyzer  |   |
| Detector        | QP            | Peak   | Average   |
| IF Bandwidth    | BW: 120 kHz   | RBW: 1 MHz<br>VBW: 3 MHz   | Method AD *1)<br>RBW: 1 MHz<br>VBW: 3 MHz<br>Detector: Power Averaging (RMS)<br>Trace: ≥ 100 traces<br>If duty cycle was less than 98%, a duty factor was added to the results. |
| Test Distance   | 3 m           | 3 m (below 1 GHz),<br>4.4 m*2) (1 GHz - 10 GHz),<br>1 m*3) (10 GHz - 40 GHz) |   |

\*1) The test method was also referred to KDB 789033 D02 General UNII Test Procedures New Rules v02r01 "Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices Part 15, Subpart E".

\*2) Distance Factor:  $20 \times \log(4.4 \text{ m}/3.0 \text{ m}) = 3.33 \text{ dB}$

\*3) Distance Factor:  $20 \times \log(1.0 \text{ m}/3.0 \text{ m}) = -9.5 \text{ dB}$

- The carrier level and noise levels were confirmed at each position of X, Y and Z axes of EUT (Antenna and Module) to see the position of maximum noise, and the test was made at the position that has the maximum noise.

The test results and limit are rounded off to one decimal place, so some differences might be observed.

**Measurement range** : 30 MHz - 40 GHz  
**Test data** : APPENDIX  
**Test result** : Pass

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## **SECTION 6: Antenna Terminal Conducted Tests**

### **Test Procedure**

The tests were made with below setting connected to the antenna port.

| <b>Test</b>                    | <b>Span</b>              | <b>RBW</b> | <b>VBW</b> | <b>Sweep time</b> | <b>Detector</b>                 | <b>Trace</b> | <b>Instrument used and Test method</b>      |
|--------------------------------|--------------------------|------------|------------|-------------------|---------------------------------|--------------|---|
| Maximum Conducted Output Power | -                        | -          | -          | Auto              | Average                         | -            | Power Meter (Sensor: 80 MHz BW) (Method PM) |
| Maximum Power Spectral Density | Encompass the entire EBW | 1 MHz *1)  | ≥ 3 RBW    | Auto              | RMS Power Averaging (200 times) | Clear Write  | Spectrum Analyzer                           |

\* The test method was also referred to KDB 789033 D02 General UNII Test Procedures New Rules v02r01 "Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices Part 15, Subpart E".

\*1) KDB 789033 D02 says that RBW is set to be 500 kHz for 5.725 GHz-5.850 GHz, but it is not possible with spectrum analyzer, so RBW Correction Factor ( $10 \log(500 \text{ kHz} / 470 \text{ kHz})$ ) was added to the test result.

The test results and limit are rounded off to two decimals place, so some differences might be observed.

**Test data** : APPENDIX  
**Test result** : Pass

**APPENDIX 1: Test data**

**Maximum Conducted Output Power**

Report No. 12219846H  
Test place Ise EMC Lab. No.11 Measurement Room  
Date January 26, 2018  
Temperature / Humidity 22deg. C / 34 % RH  
Engineer Takumi Shimada  
Mode Tx 11a 54Mbps

Antenna port WA+WC

Applied limit: 15.407, mobile and portable client device

| Tested Frequency [MHz] | 26 dB EBW [MHz] (B for FCC) | 99% OBW [MHz] (B for IC) | Conducted power |         |          |              |             |             | e.i.r.p.     |         |          |              |             |             |
|------------------------|-----------------------------|--------------------------|-----------------|---------|----------|--------------|-------------|-------------|--------------|---------|----------|--------------|-------------|-------------|
|                        |                             |                          | Antenna port    |         |          | Result [dBm] | Limit [dBm] | Margin [dB] | Antenna port |         |          | Result [dBm] | Limit [dBm] | Margin [dB] |
|                        |                             |                          | WA [mW]         | WC [mW] | Sum [mW] |              |             |             | WA [mW]      | WC [mW] | Sum [mW] |              |             |             |
| 5180                   | -                           | 16.571                   | 4.35            | 4.30    | 8.64     | 9.37         | 21.65       | 12.28       | 29.51        | 29.17   | 58.69    | 17.69        | 29.97       | 12.28       |
| 5220                   | -                           | 16.517                   | 4.42            | 3.87    | 8.29     | 9.18         | 21.65       | 12.47       | 29.99        | 26.30   | 56.29    | 17.50        | 29.97       | 12.47       |
| 5240                   | -                           | 16.329                   | 4.56            | 3.89    | 8.45     | 9.27         | 21.65       | 12.38       | 30.97        | 26.42   | 57.40    | 17.59        | 29.97       | 12.38       |
| 5260                   | 19.346                      | 16.574                   | 6.73            | 5.94    | 12.67    | 11.03        | 21.54       | 10.51       | 45.71        | 40.36   | 86.07    | 19.35        | 29.97       | 10.62       |
| 5300                   | 19.455                      | 16.653                   | 6.82            | 6.35    | 13.18    | 11.20        | 21.57       | 10.37       | 46.34        | 43.15   | 89.50    | 19.52        | 29.97       | 10.45       |
| 5320                   | 19.515                      | 16.619                   | 7.03            | 6.47    | 13.50    | 11.30        | 21.58       | 10.28       | 47.75        | 43.95   | 91.71    | 19.62        | 29.97       | 10.35       |
| 5500                   | 19.499                      | 16.582                   | 7.38            | 7.33    | 14.71    | 11.68        | 21.58       | 9.90        | 50.12        | 49.77   | 99.89    | 20.00        | 29.97       | 9.97        |
| 5580                   | 19.228                      | 16.687                   | 7.21            | 7.33    | 14.54    | 11.63        | 21.51       | 9.88        | 48.98        | 49.77   | 98.75    | 19.95        | 29.97       | 10.02       |
| 5700                   | 19.426                      | 16.575                   | 6.84            | 6.76    | 13.60    | 11.34        | 21.56       | 10.22       | 46.45        | 45.92   | 92.37    | 19.66        | 29.97       | 10.31       |
| 5745                   | -                           | -                        | 7.19            | 6.84    | 14.03    | 11.47        | 27.68       | 16.21       | 48.87        | 46.45   | 95.32    | 19.79        | 36.00       | 16.21       |
| 5785                   | -                           | -                        | 7.14            | 6.95    | 14.10    | 11.49        | 27.68       | 16.19       | 48.53        | 47.21   | 95.74    | 19.81        | 36.00       | 16.19       |
| 5825                   | -                           | -                        | 6.76            | 6.46    | 13.22    | 11.21        | 27.68       | 16.47       | 45.92        | 43.85   | 89.77    | 19.53        | 36.00       | 16.47       |

| Tested Frequency [MHz] | Duty Factor [dB] | Antenna port WA           |                 |                  |                    |                          |                | Antenna port WC           |                 |                  |                    |                          |                |
|------------------------|------------------|---------------------------|-----------------|------------------|--------------------|--------------------------|----------------|---------------------------|-----------------|------------------|--------------------|--------------------------|----------------|
|                        |                  | Power Meter Reading [dBm] | Cable Loss [dB] | Atten. Loss [dB] | Antenna Gain [dBi] | Result Cond. Power [dBm] | e.i.r.p. [dBm] | Power Meter Reading [dBm] | Cable Loss [dB] | Atten. Loss [dB] | Antenna Gain [dBi] | Result Cond. Power [dBm] | e.i.r.p. [dBm] |
| 5180                   | 0.00             | -14.22                    | 0.70            | 19.90            | 8.32               | 6.38                     | 14.70          | -14.30                    | 0.70            | 19.93            | 8.32               | 6.33                     | 14.65          |
| 5220                   | 0.00             | -14.15                    | 0.70            | 19.90            | 8.32               | 6.45                     | 14.77          | -14.75                    | 0.70            | 19.93            | 8.32               | 5.88                     | 14.20          |
| 5240                   | 0.00             | -14.01                    | 0.70            | 19.90            | 8.32               | 6.59                     | 14.91          | -14.73                    | 0.70            | 19.93            | 8.32               | 5.90                     | 14.22          |
| 5260                   | 0.00             | -12.32                    | 0.70            | 19.90            | 8.32               | 8.28                     | 16.60          | -12.89                    | 0.70            | 19.93            | 8.32               | 7.74                     | 16.06          |
| 5300                   | 0.00             | -12.25                    | 0.70            | 19.89            | 8.32               | 8.34                     | 16.66          | -12.60                    | 0.70            | 19.93            | 8.32               | 8.03                     | 16.35          |
| 5320                   | 0.00             | -12.12                    | 0.70            | 19.89            | 8.32               | 8.47                     | 16.79          | -12.51                    | 0.70            | 19.92            | 8.32               | 8.11                     | 16.43          |
| 5500                   | 0.00             | -12.01                    | 0.80            | 19.89            | 8.32               | 8.68                     | 17.00          | -12.06                    | 0.80            | 19.91            | 8.32               | 8.65                     | 16.97          |
| 5580                   | 0.00             | -12.13                    | 0.80            | 19.91            | 8.32               | 8.58                     | 16.90          | -12.07                    | 0.80            | 19.92            | 8.32               | 8.65                     | 16.97          |
| 5700                   | 0.00             | -12.35                    | 0.80            | 19.90            | 8.32               | 8.35                     | 16.67          | -12.40                    | 0.80            | 19.90            | 8.32               | 8.30                     | 16.62          |
| 5745                   | 0.00             | -12.12                    | 0.80            | 19.89            | 8.32               | 8.57                     | 16.89          | -12.34                    | 0.80            | 19.89            | 8.32               | 8.35                     | 16.67          |
| 5785                   | 0.00             | -12.14                    | 0.80            | 19.88            | 8.32               | 8.54                     | 16.86          | -12.26                    | 0.80            | 19.88            | 8.32               | 8.42                     | 16.74          |
| 5825                   | 0.00             | -12.38                    | 0.80            | 19.88            | 8.32               | 8.30                     | 16.62          | -12.58                    | 0.80            | 19.88            | 8.32               | 8.10                     | 16.42          |

Sample Calculation:

Conducted Power Result = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor

e.i.r.p. Result = Conducted Power Result + Antenna Gain

Conducted Power Limit (5250 MHz-5350 MHz, 5470 MHz-5725 MHz) = 250 mW or (11 + 10logB) dBm, whichever is lower

The conducted power limit was reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. (All frequencies for FCC, 5725 MHz-5850 MHz for IC)

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124



## Maximum Conducted Output Power

Report No. 12219846H  
Test place Ise EMC Lab. No.11 Measurement Room  
Date January 26, 2018  
Temperature / Humidity 22deg. C / 34 % RH  
Engineer Takumi Shimada  
Mode Tx 11n-20

### Antenna port WA+WC

Applied limit: 15.407, mobile and portable client device

| Tested Frequency [MHz] | 26 dB EBW [MHz] | 99% OBW [MHz] | Conducted power |         |          |              |             |             | e.i.r.p.     |         |          |              |             |             |
|------------------------|-----------------|---------------|-----------------|---------|----------|--------------|-------------|-------------|--------------|---------|----------|--------------|-------------|-------------|
|                        |                 |               | Antenna port    |         |          | Result [dBm] | Limit [dBm] | Margin [dB] | Antenna port |         |          | Result [dBm] | Limit [dBm] | Margin [dB] |
|                        |                 |               | WA [mW]         | WC [mW] | Sum [mW] |              |             |             | WA [mW]      | WC [mW] | Sum [mW] |              |             |             |
| 5180                   | -               | 17.729        | 4.39            | 4.38    | 8.76     | 9.43         | 21.65       | 12.22       | 29.79        | 29.72   | 59.50    | 17.75        | 29.97       | 12.22       |
| 5220                   | -               | 17.752        | 4.33            | 3.39    | 7.71     | 8.87         | 21.65       | 12.78       | 29.38        | 23.01   | 52.39    | 17.19        | 29.97       | 12.78       |
| 5240                   | -               | 17.683        | 4.44            | 3.55    | 7.98     | 9.02         | 21.65       | 12.63       | 30.13        | 24.10   | 54.23    | 17.34        | 29.97       | 12.63       |
| 5260                   | 19.608          | 17.697        | 6.85            | 6.18    | 13.04    | 11.15        | 21.60       | 10.45       | 46.56        | 41.98   | 88.53    | 19.47        | 29.97       | 10.50       |
| 5300                   | 19.953          | 17.649        | 7.06            | 6.10    | 13.16    | 11.19        | 21.65       | 10.46       | 47.97        | 41.40   | 89.37    | 19.51        | 29.97       | 10.46       |
| 5320                   | 19.839          | 17.673        | 7.01            | 6.28    | 13.30    | 11.24        | 21.65       | 10.41       | 47.64        | 42.66   | 90.30    | 19.56        | 29.97       | 10.41       |
| 5500                   | 19.910          | 17.693        | 7.28            | 7.38    | 14.66    | 11.66        | 21.65       | 9.99        | 49.43        | 50.12   | 99.55    | 19.98        | 29.97       | 9.99        |
| 5580                   | 19.883          | 17.697        | 7.21            | 6.70    | 13.91    | 11.43        | 21.65       | 10.22       | 48.98        | 45.50   | 94.48    | 19.75        | 29.97       | 10.22       |
| 5700                   | 19.595          | 17.725        | 6.78            | 6.81    | 13.58    | 11.33        | 21.60       | 10.27       | 46.03        | 46.24   | 92.26    | 19.65        | 29.97       | 10.32       |
| 5745                   | -               | -             | 7.33            | 7.26    | 14.59    | 11.64        | 27.68       | 16.04       | 49.77        | 49.32   | 99.09    | 19.96        | 36.00       | 16.04       |
| 5785                   | -               | -             | 7.18            | 6.41    | 13.59    | 11.33        | 27.68       | 16.35       | 48.75        | 43.55   | 92.30    | 19.65        | 36.00       | 16.35       |
| 5825                   | -               | -             | 7.11            | 6.70    | 13.81    | 11.40        | 27.68       | 16.28       | 48.31        | 45.50   | 93.80    | 19.72        | 36.00       | 16.28       |

| Antenna port WA        |                  |                           |                 |                  |                    |                          |                       | Antenna port WC           |                 |                  |                    |                          |                       |  |
|------------------------|------------------|---------------------------|-----------------|------------------|--------------------|--------------------------|-----------------------|---------------------------|-----------------|------------------|--------------------|--------------------------|-----------------------|--|
| Tested Frequency [MHz] | Duty Factor [dB] | Power Meter Reading [dBm] | Cable Loss [dB] | Atten. Loss [dB] | Antenna Gain [dBi] | Result Cond. Power [dBm] | Result e.i.r.p. [dBm] | Power Meter Reading [dBm] | Cable Loss [dB] | Atten. Loss [dB] | Antenna Gain [dBi] | Result Cond. Power [dBm] | Result e.i.r.p. [dBm] |  |
| 5180                   | 0.00             | -14.18                    | 0.70            | 19.90            | 8.32               | 6.42                     | 14.74                 | -14.22                    | 0.70            | 19.93            | 8.32               | 6.41                     | 14.73                 |  |
| 5220                   | 0.00             | -14.24                    | 0.70            | 19.90            | 8.32               | 6.36                     | 14.68                 | -15.33                    | 0.70            | 19.93            | 8.32               | 5.30                     | 13.62                 |  |
| 5240                   | 0.00             | -14.13                    | 0.70            | 19.90            | 8.32               | 6.47                     | 14.79                 | -15.13                    | 0.70            | 19.93            | 8.32               | 5.50                     | 13.82                 |  |
| 5260                   | 0.00             | -12.24                    | 0.70            | 19.90            | 8.32               | 8.36                     | 16.68                 | -12.72                    | 0.70            | 19.93            | 8.32               | 7.91                     | 16.23                 |  |
| 5300                   | 0.00             | -12.10                    | 0.70            | 19.89            | 8.32               | 8.49                     | 16.81                 | -12.78                    | 0.70            | 19.93            | 8.32               | 7.85                     | 16.17                 |  |
| 5320                   | 0.00             | -12.13                    | 0.70            | 19.89            | 8.32               | 8.46                     | 16.78                 | -12.64                    | 0.70            | 19.92            | 8.32               | 7.98                     | 16.30                 |  |
| 5500                   | 0.00             | -12.07                    | 0.80            | 19.89            | 8.32               | 8.62                     | 16.94                 | -12.03                    | 0.80            | 19.91            | 8.32               | 8.68                     | 17.00                 |  |
| 5580                   | 0.00             | -12.13                    | 0.80            | 19.91            | 8.32               | 8.58                     | 16.90                 | -12.46                    | 0.80            | 19.92            | 8.32               | 8.26                     | 16.58                 |  |
| 5700                   | 0.00             | -12.39                    | 0.80            | 19.90            | 8.32               | 8.31                     | 16.63                 | -12.37                    | 0.80            | 19.90            | 8.32               | 8.33                     | 16.65                 |  |
| 5745                   | 0.00             | -12.04                    | 0.80            | 19.89            | 8.32               | 8.65                     | 16.97                 | -12.08                    | 0.80            | 19.89            | 8.32               | 8.61                     | 16.93                 |  |
| 5785                   | 0.00             | -12.12                    | 0.80            | 19.88            | 8.32               | 8.56                     | 16.88                 | -12.61                    | 0.80            | 19.88            | 8.32               | 8.07                     | 16.39                 |  |
| 5825                   | 0.00             | -12.16                    | 0.80            | 19.88            | 8.32               | 8.52                     | 16.84                 | -12.42                    | 0.80            | 19.88            | 8.32               | 8.26                     | 16.58                 |  |

Sample Calculation:

Conducted Power Result = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor  
e.i.r.p. Result = Conducted Power Result + Antenna Gain

Conducted Power Limit (5250 MHz-5350 MHz, 5470 MHz-5725 MHz) = 250 mW or (11 + 10logB) dBm, whichever is lower

The conducted power limit was reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. (All frequencies for FCC, 5725 MHz-5850 MHz for IC)

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## Maximum Conducted Output Power

Report No. 12219846H  
Test place Ise EMC Lab. No.11 Measurement Room  
Date January 26, 2018  
Temperature / Humidity 22deg. C / 34 % RH  
Engineer Takumi Shimada  
Mode Tx 11ac-20

### Antenna port WA+WC

Applied limit: 15.407, mobile and portable client device

| Tested Frequency [MHz] | 26 dB EBW [MHz] | 99% OBW [MHz] | Conducted power |         |          |              |             |             | e.i.r.p.     |         |          |              |             |             |
|------------------------|-----------------|---------------|-----------------|---------|----------|--------------|-------------|-------------|--------------|---------|----------|--------------|-------------|-------------|
|                        |                 |               | Antenna port    |         |          | Result [dBm] | Limit [dBm] | Margin [dB] | Antenna port |         |          | Result [dBm] | Limit [dBm] | Margin [dB] |
|                        |                 |               | WA [mW]         | WC [mW] | Sum [mW] |              |             |             | WA [mW]      | WC [mW] | Sum [mW] |              |             |             |
| 5180                   | -               | 17.689        | 4.32            | 4.50    | 8.81     | 9.45         | 21.65       | 12.20       | 29.31        | 30.55   | 59.86    | 17.77        | 29.97       | 12.20       |
| 5220                   | -               | 17.684        | 4.54            | 3.78    | 8.32     | 9.20         | 21.65       | 12.45       | 30.83        | 25.64   | 56.48    | 17.52        | 29.97       | 12.45       |
| 5240                   | -               | 17.628        | 4.61            | 3.87    | 8.49     | 9.29         | 21.65       | 12.36       | 31.33        | 26.30   | 57.64    | 17.61        | 29.97       | 12.36       |
| 5260                   | 19.774          | 17.701        | 7.03            | 6.22    | 13.25    | 11.22        | 21.64       | 10.42       | 47.75        | 42.27   | 90.02    | 19.54        | 29.97       | 10.43       |
| 5300                   | 19.945          | 17.707        | 7.03            | 6.24    | 13.27    | 11.23        | 21.65       | 10.42       | 47.75        | 42.36   | 90.12    | 19.55        | 29.97       | 10.42       |
| 5320                   | 19.684          | 17.668        | 7.78            | 6.53    | 14.31    | 11.56        | 21.62       | 10.06       | 52.84        | 44.36   | 97.21    | 19.88        | 29.97       | 10.09       |
| 5500                   | 19.830          | 17.626        | 7.31            | 7.40    | 14.71    | 11.68        | 21.65       | 9.97        | 49.66        | 50.23   | 99.89    | 20.00        | 29.97       | 9.97        |
| 5580                   | 19.702          | 17.690        | 7.33            | 7.23    | 14.56    | 11.63        | 21.62       | 9.99        | 49.77        | 49.09   | 98.86    | 19.95        | 29.97       | 10.02       |
| 5700                   | 19.763          | 17.710        | 7.03            | 6.84    | 13.87    | 11.42        | 21.63       | 10.21       | 47.75        | 46.45   | 94.20    | 19.74        | 29.97       | 10.23       |
| 5745                   | -               | -             | 7.62            | 7.26    | 14.88    | 11.73        | 27.68       | 15.95       | 51.76        | 49.32   | 101.08   | 20.05        | 36.00       | 15.95       |
| 5785                   | -               | -             | 7.38            | 6.76    | 14.14    | 11.50        | 27.68       | 16.18       | 50.12        | 45.92   | 96.04    | 19.82        | 36.00       | 16.18       |
| 5825                   | -               | -             | 7.14            | 6.73    | 13.87    | 11.42        | 27.68       | 16.26       | 48.53        | 45.71   | 94.24    | 19.74        | 36.00       | 16.26       |

| Antenna port WA        |                  |                           |                 |                  |                    |                          | Antenna port WC       |                           |                 |                  |                    |                          |                       |
|------------------------|------------------|---------------------------|-----------------|------------------|--------------------|--------------------------|-----------------------|---------------------------|-----------------|------------------|--------------------|--------------------------|-----------------------|
| Tested Frequency [MHz] | Duty Factor [dB] | Power Meter Reading [dBm] | Cable Loss [dB] | Atten. Loss [dB] | Antenna Gain [dBi] | Result Cond. Power [dBm] | Result e.i.r.p. [dBm] | Power Meter Reading [dBm] | Cable Loss [dB] | Atten. Loss [dB] | Antenna Gain [dBi] | Result Cond. Power [dBm] | Result e.i.r.p. [dBm] |
| 5180                   | 0.00             | -14.25                    | 0.70            | 19.90            | 8.32               | 6.35                     | 14.67                 | -14.10                    | 0.70            | 19.93            | 8.32               | 6.53                     | 14.85                 |
| 5220                   | 0.00             | -14.03                    | 0.70            | 19.90            | 8.32               | 6.57                     | 14.89                 | -14.86                    | 0.70            | 19.93            | 8.32               | 5.77                     | 14.09                 |
| 5240                   | 0.00             | -13.96                    | 0.70            | 19.90            | 8.32               | 6.64                     | 14.96                 | -14.75                    | 0.70            | 19.93            | 8.32               | 5.88                     | 14.20                 |
| 5260                   | 0.00             | -12.13                    | 0.70            | 19.90            | 8.32               | 8.47                     | 16.79                 | -12.69                    | 0.70            | 19.93            | 8.32               | 7.94                     | 16.26                 |
| 5300                   | 0.00             | -12.12                    | 0.70            | 19.89            | 8.32               | 8.47                     | 16.79                 | -12.68                    | 0.70            | 19.93            | 8.32               | 7.95                     | 16.27                 |
| 5320                   | 0.00             | -11.68                    | 0.70            | 19.89            | 8.32               | 8.91                     | 17.23                 | -12.47                    | 0.70            | 19.92            | 8.32               | 8.15                     | 16.47                 |
| 5500                   | 0.00             | -12.05                    | 0.80            | 19.89            | 8.32               | 8.64                     | 16.96                 | -12.02                    | 0.80            | 19.91            | 8.32               | 8.69                     | 17.01                 |
| 5580                   | 0.00             | -12.06                    | 0.80            | 19.91            | 8.32               | 8.65                     | 16.97                 | -12.13                    | 0.80            | 19.92            | 8.32               | 8.59                     | 16.91                 |
| 5700                   | 0.00             | -12.23                    | 0.80            | 19.90            | 8.32               | 8.47                     | 16.79                 | -12.35                    | 0.80            | 19.90            | 8.32               | 8.35                     | 16.67                 |
| 5745                   | 0.00             | -11.87                    | 0.80            | 19.89            | 8.32               | 8.82                     | 17.14                 | -12.08                    | 0.80            | 19.89            | 8.32               | 8.61                     | 16.93                 |
| 5785                   | 0.00             | -12.00                    | 0.80            | 19.88            | 8.32               | 8.68                     | 17.00                 | -12.38                    | 0.80            | 19.88            | 8.32               | 8.30                     | 16.62                 |
| 5825                   | 0.00             | -12.14                    | 0.80            | 19.88            | 8.32               | 8.54                     | 16.86                 | -12.40                    | 0.80            | 19.88            | 8.32               | 8.28                     | 16.60                 |

Sample Calculation:

Conducted Power Result = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor

e.i.r.p. Result = Conducted Power Result + Antenna Gain

Conducted Power Limit (5250 MHz-5350 MHz, 5470 MHz-5725 MHz) = 250 mW or (11 + 10logB) dBm, whichever is lower

The conducted power limit was reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. (All frequencies for FCC, 5725 MHz-5850 MHz for IC)

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## Maximum Conducted Output Power

Report No. 12219846H  
Test place Ise EMC Lab. No.11 Measurement Room  
Date January 26, 2018  
Temperature / Humidity 22deg. C / 34 % RH  
Engineer Takumi Shimada  
Mode Tx 11n-40

### Antenna port WA+WC

Applied limit: 15.407, mobile and portable client device

| Tested Frequency [MHz] | 26 dB EBW (B for FCC) [MHz] | 99% OBW (B for IC) [MHz] | Conducted power |         |          |              |             |             | e.i.r.p.     |         |          |              |             |             |
|------------------------|-----------------------------|--------------------------|-----------------|---------|----------|--------------|-------------|-------------|--------------|---------|----------|--------------|-------------|-------------|
|                        |                             |                          | Antenna port    |         |          | Result [dBm] | Limit [dBm] | Margin [dB] | Antenna port |         |          | Result [dBm] | Limit [dBm] | Margin [dB] |
|                        |                             |                          | WA [mW]         | WC [mW] | Sum [mW] |              |             |             | WA [mW]      | WC [mW] | Sum [mW] |              |             |             |
| 5190                   | -                           | 36.172                   | 4.09            | 4.24    | 8.33     | 9.21         | 21.65       | 12.44       | 27.80        | 28.77   | 56.57    | 17.53        | 29.97       | 12.44       |
| 5230                   | -                           | 36.191                   | 4.47            | 3.70    | 8.17     | 9.12         | 21.65       | 12.53       | 30.34        | 25.12   | 55.46    | 17.44        | 29.97       | 12.53       |
| 5270                   | 39.695                      | 36.132                   | 6.28            | 5.92    | 12.20    | 10.86        | 21.65       | 10.79       | 42.66        | 40.18   | 82.84    | 19.18        | 29.97       | 10.79       |
| 5310                   | 40.121                      | 36.259                   | 6.87            | 6.31    | 13.18    | 11.20        | 21.65       | 10.45       | 46.67        | 42.85   | 89.52    | 19.52        | 29.97       | 10.45       |
| 5510                   | 40.036                      | 36.259                   | 7.33            | 7.10    | 14.42    | 11.59        | 21.65       | 10.06       | 49.77        | 48.19   | 97.97    | 19.91        | 29.97       | 10.06       |
| 5550                   | 40.150                      | 36.242                   | 7.19            | 7.31    | 14.51    | 11.62        | 21.65       | 10.03       | 48.87        | 49.66   | 98.52    | 19.94        | 29.97       | 10.03       |
| 5670                   | 40.228                      | 36.238                   | 6.84            | 6.07    | 12.91    | 11.11        | 21.65       | 10.54       | 46.45        | 41.21   | 87.66    | 19.43        | 29.97       | 10.54       |
| 5755                   | -                           | -                        | 6.79            | 6.95    | 13.74    | 11.38        | 27.68       | 16.30       | 46.13        | 47.21   | 93.34    | 19.70        | 36.00       | 16.30       |
| 5795                   | -                           | -                        | 7.00            | 6.35    | 13.35    | 11.26        | 27.68       | 16.42       | 47.53        | 43.15   | 90.69    | 19.58        | 36.00       | 16.42       |

| Tested Frequency [MHz] | Antenna port WA  |                           |                 |                  |                    |                          | Antenna port WC       |                           |                 |                  |                    |                          |                       |
|------------------------|------------------|---------------------------|-----------------|------------------|--------------------|--------------------------|-----------------------|---------------------------|-----------------|------------------|--------------------|--------------------------|-----------------------|
|                        | Duty Factor [dB] | Power Meter Reading [dBm] | Cable Loss [dB] | Atten. Loss [dB] | Antenna Gain [dBi] | Result Cond. Power [dBm] | Result e.i.r.p. [dBm] | Power Meter Reading [dBm] | Cable Loss [dB] | Atten. Loss [dB] | Antenna Gain [dBi] | Result Cond. Power [dBm] | Result e.i.r.p. [dBm] |
|                        | 5190             | 0.00                      | -14.48          | 0.70             | 19.90              | 8.32                     | 6.12                  | 14.44                     | -14.36          | 0.70             | 19.93              | 8.32                     | 6.27                  |
| 5230                   | 0.00             | -14.10                    | 0.70            | 19.90            | 8.32               | 6.50                     | 14.82                 | -14.95                    | 0.70            | 19.93            | 8.32               | 5.68                     | 14.00                 |
| 5270                   | 0.00             | -12.61                    | 0.70            | 19.89            | 8.32               | 7.98                     | 16.30                 | -12.91                    | 0.70            | 19.93            | 8.32               | 7.72                     | 16.04                 |
| 5310                   | 0.00             | -12.22                    | 0.70            | 19.89            | 8.32               | 8.37                     | 16.69                 | -12.62                    | 0.70            | 19.92            | 8.32               | 8.00                     | 16.32                 |
| 5510                   | 0.00             | -12.04                    | 0.80            | 19.89            | 8.32               | 8.65                     | 16.97                 | -12.20                    | 0.80            | 19.91            | 8.32               | 8.51                     | 16.83                 |
| 5550                   | 0.00             | -12.14                    | 0.80            | 19.91            | 8.32               | 8.57                     | 16.89                 | -12.08                    | 0.80            | 19.92            | 8.32               | 8.64                     | 16.96                 |
| 5670                   | 0.00             | -12.36                    | 0.80            | 19.91            | 8.32               | 8.35                     | 16.67                 | -12.88                    | 0.80            | 19.91            | 8.32               | 7.83                     | 16.15                 |
| 5755                   | 0.00             | -12.37                    | 0.80            | 19.89            | 8.32               | 8.32                     | 16.64                 | -12.27                    | 0.80            | 19.89            | 8.32               | 8.42                     | 16.74                 |
| 5795                   | 0.00             | -12.23                    | 0.80            | 19.88            | 8.32               | 8.45                     | 16.77                 | -12.65                    | 0.80            | 19.88            | 8.32               | 8.03                     | 16.35                 |

#### Sample Calculation:

Conducted Power Result = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor  
e.i.r.p. Result = Conducted Power Result + Antenna Gain

Conducted Power Limit (5250 MHz-5350 MHz, 5470 MHz-5725 MHz) = 250 mW or (11 + 10logB) dBm, whichever is lower

The conducted power limit was reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. (All frequencies for FCC, 5725 MHz-5850 MHz for IC)

## Maximum Conducted Output Power

Report No. 12219846H  
Test place Ise EMC Lab. No.11 Measurement Room  
Date January 26, 2018  
Temperature / Humidity 22deg. C / 34 % RH  
Engineer Takumi Shimada  
Mode Tx 11ac-40

### Antenna port WA+WC

Applied limit: 15.407, mobile and portable client device

| Tested Frequency [MHz] | 26 dB EBW (B for FCC) [MHz] | 99% OBW (B for IC) [MHz] | Conducted power |         |          |              |             |             |              |         |          | e.i.r.p.     |             |             |
|------------------------|-----------------------------|--------------------------|-----------------|---------|----------|--------------|-------------|-------------|--------------|---------|----------|--------------|-------------|-------------|
|                        |                             |                          | Antenna port    |         |          | Result [dBm] | Limit [dBm] | Margin [dB] | Antenna port |         |          | Result [dBm] | Limit [dBm] | Margin [dB] |
|                        |                             |                          | WA [mW]         | WC [mW] | Sum [mW] |              |             |             | WA [mW]      | WC [mW] | Sum [mW] |              |             |             |
| 5190                   | -                           | 36.288                   | 4.33            | 4.59    | 8.92     | 9.50         | 21.65       | 12.15       | 29.38        | 31.19   | 60.57    | 17.82        | 29.97       | 12.15       |
| 5230                   | -                           | 36.310                   | 4.50            | 3.72    | 8.21     | 9.15         | 21.65       | 12.50       | 30.55        | 25.23   | 55.78    | 17.47        | 29.97       | 12.50       |
| 5270                   | 39.688                      | 36.192                   | 6.35            | 5.98    | 12.34    | 10.91        | 21.65       | 10.74       | 43.15        | 40.64   | 83.80    | 19.23        | 29.97       | 10.74       |
| 5310                   | 40.346                      | 36.144                   | 6.84            | 6.41    | 13.25    | 11.22        | 21.65       | 10.43       | 46.45        | 43.55   | 90.00    | 19.54        | 29.97       | 10.43       |
| 5510                   | 40.275                      | 36.237                   | 7.69            | 7.66    | 15.35    | 11.86        | 21.65       | 9.79        | 52.24        | 52.00   | 104.24   | 20.18        | 29.97       | 9.79        |
| 5550                   | 40.223                      | 36.224                   | 7.64            | 7.73    | 15.37    | 11.87        | 21.65       | 9.78        | 51.88        | 52.48   | 104.36   | 20.19        | 29.97       | 9.78        |
| 5670                   | 40.117                      | 36.268                   | 7.33            | 6.25    | 13.58    | 11.33        | 21.65       | 10.32       | 49.77        | 42.46   | 92.24    | 19.65        | 29.97       | 10.32       |
| 5755                   | -                           | -                        | 7.03            | 6.70    | 13.73    | 11.38        | 27.68       | 16.30       | 47.75        | 45.50   | 93.25    | 19.70        | 36.00       | 16.30       |
| 5795                   | -                           | -                        | 6.97            | 6.55    | 13.51    | 11.31        | 27.68       | 16.37       | 47.32        | 44.46   | 91.78    | 19.63        | 36.00       | 16.37       |

| Tested Frequency [MHz] | Antenna port WA  |                           |                 |                  |                    |                   | Antenna port WC |                           |                 |                  |                    |                   |                |
|------------------------|------------------|---------------------------|-----------------|------------------|--------------------|-------------------|-----------------|---------------------------|-----------------|------------------|--------------------|-------------------|----------------|
|                        | Duty Factor [dB] | Power Meter Reading [dBm] | Cable Loss [dB] | Atten. Loss [dB] | Antenna Gain [dBi] | Result            |                 | Power Meter Reading [dBm] | Cable Loss [dB] | Atten. Loss [dB] | Antenna Gain [dBi] | Result            |                |
|                        |                  |                           |                 |                  |                    | Cond. Power [dBm] | e.i.r.p. [dBm]  |                           |                 |                  |                    | Cond. Power [dBm] | e.i.r.p. [dBm] |
| 5190                   | 0.00             | -14.24                    | 0.70            | 19.90            | 8.32               | 6.36              | 14.68           | -14.01                    | 0.70            | 19.93            | 8.32               | 6.62              | 14.94          |
| 5230                   | 0.00             | -14.07                    | 0.70            | 19.90            | 8.32               | 6.53              | 14.85           | -14.93                    | 0.70            | 19.93            | 8.32               | 5.70              | 14.02          |
| 5270                   | 0.00             | -12.56                    | 0.70            | 19.89            | 8.32               | 8.03              | 16.35           | -12.86                    | 0.70            | 19.93            | 8.32               | 7.77              | 16.09          |
| 5310                   | 0.00             | -12.24                    | 0.70            | 19.89            | 8.32               | 8.35              | 16.67           | -12.55                    | 0.70            | 19.92            | 8.32               | 8.07              | 16.39          |
| 5510                   | 0.00             | -11.83                    | 0.80            | 19.89            | 8.32               | 8.86              | 17.18           | -11.87                    | 0.80            | 19.91            | 8.32               | 8.84              | 17.16          |
| 5550                   | 0.00             | -11.88                    | 0.80            | 19.91            | 8.32               | 8.83              | 17.15           | -11.84                    | 0.80            | 19.92            | 8.32               | 8.88              | 17.20          |
| 5670                   | 0.00             | -12.06                    | 0.80            | 19.91            | 8.32               | 8.65              | 16.97           | -12.75                    | 0.80            | 19.91            | 8.32               | 7.96              | 16.28          |
| 5755                   | 0.00             | -12.22                    | 0.80            | 19.89            | 8.32               | 8.47              | 16.79           | -12.43                    | 0.80            | 19.89            | 8.32               | 8.26              | 16.58          |
| 5795                   | 0.00             | -12.25                    | 0.80            | 19.88            | 8.32               | 8.43              | 16.75           | -12.52                    | 0.80            | 19.88            | 8.32               | 8.16              | 16.48          |

Sample Calculation:

Conducted Power Result = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor  
e.i.r.p. Result = Conducted Power Result + Antenna Gain

Conducted Power Limit (5250 MHz-5350 MHz, 5470 MHz-5725 MHz) = 250 mW or (11 + 10logB) dBm, whichever is lower

The conducted power limit was reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. (All frequencies for FCC, 5725 MHz-5850 MHz for IC)

## Maximum Conducted Output Power

Report No. 12219846H  
Test place Ise EMC Lab. No.11 Measurement Room  
Date January 26, 2018  
Temperature / Humidity 22deg. C / 34 % RH  
Engineer Takumi Shimada  
Mode Tx 11ac-80

### Antenna port WA+WC

Applied limit: 15.407, mobile and portable client device

| Tested Frequency [MHz] | 26 dB EBW (B for FCC) [MHz] | 99% OBW (B for IC) [MHz] | Conducted power |         |          |              |             |             | e.i.r.p.     |       |       |              |             |             |
|------------------------|-----------------------------|--------------------------|-----------------|---------|----------|--------------|-------------|-------------|--------------|-------|-------|--------------|-------------|-------------|
|                        |                             |                          | Antenna port    |         |          | Result [dBm] | Limit [dBm] | Margin [dB] | Antenna port |       |       | Result [dBm] | Limit [dBm] | Margin [dB] |
| WA [mW]                | WC [mW]                     | Sum [mW]                 | WA [mW]         | WC [mW] | Sum [mW] |              |             |             |              |       |       |              |             |             |
| 5210                   | -                           | 75.838                   | 4.05            | 3.54    | 7.59     | 8.80         | 21.65       | 12.85       | 27.48        | 24.04 | 51.52 | 17.12        | 29.97       | 12.85       |
| 5290                   | 80.515                      | 75.805                   | 6.70            | 5.87    | 12.57    | 10.99        | 21.65       | 10.66       | 45.50        | 39.90 | 85.40 | 19.31        | 29.97       | 10.66       |
| 5530                   | 80.062                      | 75.917                   | 7.21            | 7.31    | 14.52    | 11.62        | 21.65       | 10.03       | 48.98        | 49.66 | 98.64 | 19.94        | 29.97       | 10.03       |
| 5610                   | 80.213                      | 75.926                   | 7.38            | 6.37    | 13.75    | 11.38        | 21.65       | 10.27       | 50.12        | 43.25 | 93.37 | 19.70        | 29.97       | 10.27       |
| 5775                   | -                           | -                        | 7.00            | 6.75    | 13.74    | 11.38        | 27.68       | 16.30       | 47.53        | 45.81 | 93.35 | 19.70        | 36.00       | 16.30       |

| Tested Frequency [MHz] | Duty Factor [dB] | Antenna port WA           |                 |                  |                    |                   |                | Antenna port WC           |                 |                  |                    |                   |                |
|------------------------|------------------|---------------------------|-----------------|------------------|--------------------|-------------------|----------------|---------------------------|-----------------|------------------|--------------------|-------------------|----------------|
|                        |                  | Power Meter Reading [dBm] | Cable Loss [dB] | Atten. Loss [dB] | Antenna Gain [dBi] | Result            |                | Power Meter Reading [dBm] | Cable Loss [dB] | Atten. Loss [dB] | Antenna Gain [dBi] | Result            |                |
|                        |                  |                           |                 |                  |                    | Cond. Power [dBm] | e.i.r.p. [dBm] |                           |                 |                  |                    | Cond. Power [dBm] | e.i.r.p. [dBm] |
| 5210                   | 0.00             | -14.53                    | 0.70            | 19.90            | 8.32               | 6.07              | 14.39          | -15.14                    | 0.70            | 19.93            | 8.32               | 5.49              | 13.81          |
| 5290                   | 0.00             | -12.33                    | 0.70            | 19.89            | 8.32               | 8.26              | 16.58          | -12.94                    | 0.70            | 19.93            | 8.32               | 7.69              | 16.01          |
| 5530                   | 0.00             | -12.12                    | 0.80            | 19.90            | 8.32               | 8.58              | 16.90          | -12.07                    | 0.80            | 19.91            | 8.32               | 8.64              | 16.96          |
| 5610                   | 0.00             | -12.04                    | 0.80            | 19.92            | 8.32               | 8.68              | 17.00          | -12.68                    | 0.80            | 19.92            | 8.32               | 8.04              | 16.36          |
| 5775                   | 0.00             | -12.24                    | 0.80            | 19.89            | 8.32               | 8.45              | 16.77          | -12.40                    | 0.80            | 19.89            | 8.32               | 8.29              | 16.61          |

Sample Calculation:

Conducted Power Result = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor

e.i.r.p. Result = Conducted Power Result + Antenna Gain

Conducted Power Limit (5250 MHz-5350 MHz, 5470 MHz-5725 MHz) = 250 mW or (11 + 10logB) dBm, whichever is lower

The conducted power limit was reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. (All frequencies for FCC, 5725 MHz-5850 MHz for IC)

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN


Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

**Burst rate confirmation**

Report No. 12219846H  
 Test place Ise EMC Lab. No.11 Measurement Room  
 Date January 29, 2018  
 Temperature / Humidity 23deg. C / 32 % RH  
 Engineer Takumi Shimada  
 Mode Tx


**Duty 100 %**

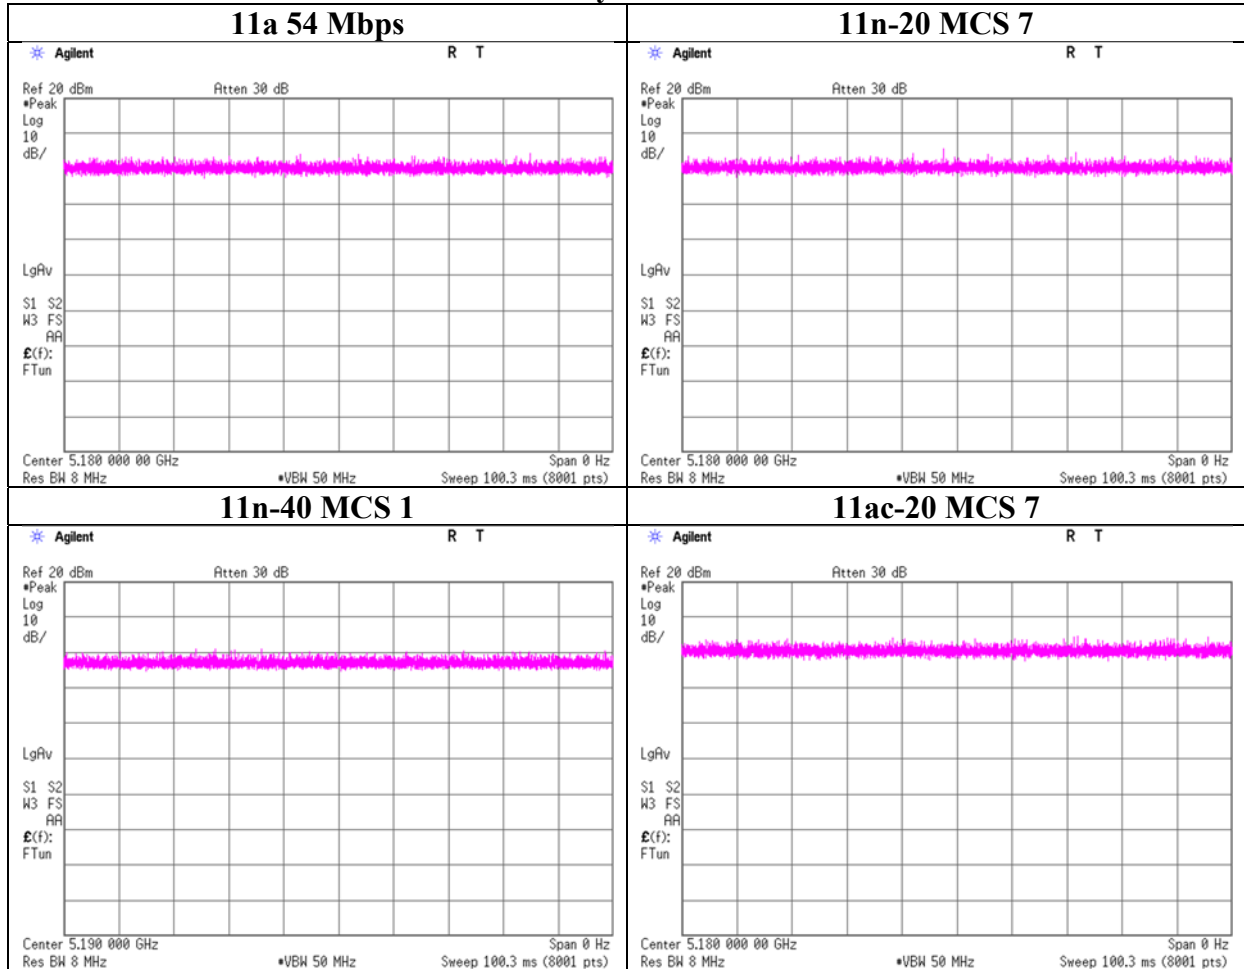

**Burst rate confirmation**

Report No. 12219846H  
 Test place Ise EMC Lab. No.11 Measurement Room  
 Date January 29, 2018  
 Temperature / Humidity 23deg. C / 32 % RH  
 Engineer Takumi Shimada  
 Mode Tx

**Duty 100 %**

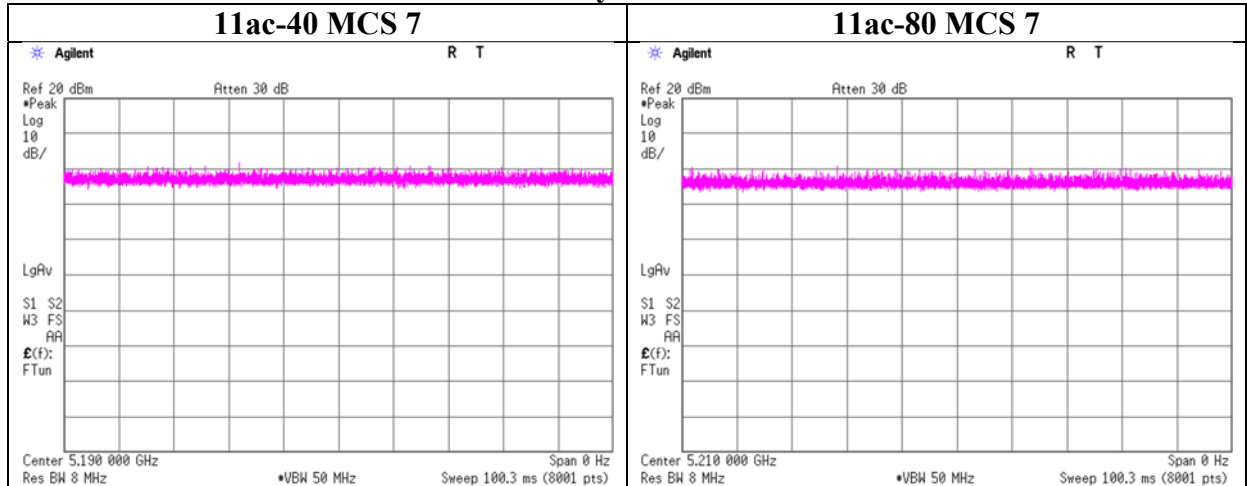

**UL Japan, Inc.**  
**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN  
 Telephone : +81 596 24 8999  
 Facsimile : +81 596 24 8124

## Maximum Power Spectral Density

Report No. 12219846H  
Test place Ise EMC Lab. No.3 Measurement Room  
Date February 2, 2018 February 5, 2018  
Temperature / Humidity 24deg. C / 31 % RH 23deg. C / 35 % RH  
Engineer Takumi Shimada Takumi Shimada  
Mode Tx 11a

Applied limit: 15.407, mobile and portable client device

| Tested Frequency [MHz] | PSD (Conducted) |            |              |                  |                 |             | PSD (e.i.r.p.) |            |              |                  |                 |             |
|------------------------|-----------------|------------|--------------|------------------|-----------------|-------------|----------------|------------|--------------|------------------|-----------------|-------------|
|                        | Antenna         |            |              | Result [dBm/MHz] | Limit [dBm/MHz] | Margin [dB] | Antenna        |            |              | Result [dBm/MHz] | Limit [dBm/MHz] | Margin [dB] |
|                        | 1 [mW/MHz]      | 2 [mW/MHz] | Sum [mW/MHz] |                  |                 |             | 1 [mW/MHz]     | 2 [mW/MHz] | Sum [mW/MHz] |                  |                 |             |
| 5180                   | 0.36            | 0.47       | 0.84         | -0.77            | 8.68            | 9.45        | 2.47           | 3.22       | 5.69         | 7.55             | 17.00           | 9.45        |
| 5220                   | 0.43            | 0.35       | 0.79         | -1.03            | 8.68            | 9.71        | 2.94           | 2.41       | 5.35         | 7.29             | 17.00           | 9.71        |
| 5240                   | 0.43            | 0.39       | 0.82         | -0.87            | 8.68            | 9.55        | 2.94           | 2.62       | 5.56         | 7.45             | 17.00           | 9.55        |
| 5260                   | 0.78            | 0.59       | 1.37         | 1.36             | 8.68            | 7.32        | 5.30           | 3.99       | 9.28         | 9.68             | 17.00           | 7.32        |
| 5300                   | 0.77            | 0.63       | 1.39         | 1.43             | 8.68            | 7.25        | 5.20           | 4.25       | 9.44         | 9.75             | 17.00           | 7.25        |
| 5320                   | 0.81            | 0.67       | 1.48         | 1.72             | 8.68            | 6.96        | 5.50           | 4.58       | 10.08        | 10.04            | 17.00           | 6.96        |
| 5500                   | 0.74            | 0.73       | 1.47         | 1.68             | 8.68            | 7.00        | 5.02           | 4.99       | 10.00        | 10.00            | 17.00           | 7.00        |
| 5580                   | 0.75            | 0.74       | 1.50         | 1.75             | 8.68            | 6.93        | 5.13           | 5.05       | 10.17        | 10.07            | 17.00           | 6.93        |
| 5700                   | 0.78            | 0.70       | 1.48         | 1.69             | 8.68            | 6.99        | 5.28           | 4.75       | 10.03        | 10.01            | 17.00           | 6.99        |
| 5745                   | 0.41            | 0.38       | 0.78         | -1.07            | 27.68           | 28.75       | 2.75           | 2.55       | 5.31         | 7.25             | 36.00           | 28.75       |
| 5785                   | 0.41            | 0.35       | 0.76         | -1.18            | 27.68           | 28.86       | 2.80           | 2.38       | 5.18         | 7.14             | 36.00           | 28.86       |
| 5825                   | 0.41            | 0.33       | 0.74         | -1.31            | 27.68           | 28.99       | 2.76           | 2.27       | 5.03         | 7.01             | 36.00           | 28.99       |

| Tested Frequency [MHz] | Duty Factor [dB] | RBW Correction Factor [dB] | Antenna Port WA       |                 |                  |                    |                            | Antenna Port WC               |                       |                 |                  |                    |                            |                               |
|------------------------|------------------|----------------------------|-----------------------|-----------------|------------------|--------------------|----------------------------|-------------------------------|-----------------------|-----------------|------------------|--------------------|----------------------------|-------------------------------|
|                        |                  |                            | PSD Reading [dBm/MHz] | Cable Loss [dB] | Atten. Loss [dB] | Antenna Gain [dBi] | PSD Result Cond. [dBm/MHz] | PSD Result e.i.r.p. [dBm/MHz] | PSD Reading [dBm/MHz] | Cable Loss [dB] | Atten. Loss [dB] | Antenna Gain [dBi] | PSD Result Cond. [dBm/MHz] | PSD Result e.i.r.p. [dBm/MHz] |
| 5180                   | 0.00             | 0.00                       | -16.26                | 2.02            | 9.84             | 8.32               | -4.40                      | 3.92                          | -15.10                | 2.02            | 9.84             | 8.32               | -3.24                      | 5.08                          |
| 5220                   | 0.00             | 0.00                       | -15.50                | 2.03            | 9.84             | 8.32               | -3.63                      | 4.69                          | -16.37                | 2.03            | 9.84             | 8.32               | -4.50                      | 3.82                          |
| 5240                   | 0.00             | 0.00                       | -15.50                | 2.03            | 9.84             | 8.32               | -3.63                      | 4.69                          | -16.01                | 2.03            | 9.84             | 8.32               | -4.14                      | 4.18                          |
| 5260                   | 0.00             | 0.00                       | -12.96                | 2.04            | 9.84             | 8.32               | -1.08                      | 7.24                          | -14.20                | 2.04            | 9.84             | 8.32               | -2.32                      | 6.01                          |
| 5300                   | 0.00             | 0.00                       | -13.06                | 2.05            | 9.85             | 8.32               | -1.16                      | 7.16                          | -13.94                | 2.05            | 9.85             | 8.32               | -2.04                      | 6.28                          |
| 5320                   | 0.00             | 0.00                       | -12.82                | 2.05            | 9.85             | 8.32               | -0.92                      | 7.40                          | -13.61                | 2.05            | 9.85             | 8.32               | -1.71                      | 6.61                          |
| 5500                   | 0.00             | 0.00                       | -13.36                | 2.18            | 9.86             | 8.32               | -1.32                      | 7.00                          | -13.38                | 2.18            | 9.86             | 8.32               | -1.34                      | 6.98                          |
| 5580                   | 0.00             | 0.00                       | -13.27                | 2.19            | 9.86             | 8.32               | -1.22                      | 7.10                          | -13.34                | 2.19            | 9.86             | 8.32               | -1.29                      | 7.03                          |
| 5700                   | 0.00             | 0.00                       | -13.16                | 2.20            | 9.86             | 8.32               | -1.10                      | 7.22                          | -13.61                | 2.20            | 9.86             | 8.32               | -1.55                      | 6.77                          |
| 5745                   | 0.00             | 0.27                       | -16.25                | 2.20            | 9.86             | 8.32               | -3.92                      | 4.40                          | -16.58                | 2.20            | 9.86             | 8.32               | -4.25                      | 4.07                          |
| 5785                   | 0.00             | 0.27                       | -16.18                | 2.20            | 9.86             | 8.32               | -3.85                      | 4.47                          | -16.88                | 2.20            | 9.86             | 8.32               | -4.55                      | 3.77                          |
| 5825                   | 0.00             | 0.27                       | -16.26                | 2.21            | 9.86             | 8.32               | -3.92                      | 4.40                          | -17.10                | 2.21            | 9.86             | 8.32               | -4.76                      | 3.56                          |

Sample Calculation:

PSD: Power Spectral Density

The PSD within 5725 MHz to 5825 MHz are based on any 500 kHz band.

RBW Correction Factor = 10 \* log (Specified bandwidth / Measured bandwidth)

PSD Result (Conducted) = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor + RBW Correction Factor

PSD Result (e.i.r.p.) = Conducted PSD Result + Antenna Gain

The conducted PSD limit was reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. (All frequencies for FCC, 5725 MHz-5850 MHz for IC)

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999


Facsimile : +81 596 24 8124



## Maximum Power Spectral Density

|                        |                                    |                    |
|------------------------|------------------------------------|--------------------|
| Report No.             | 12219846H                          |                    |
| Test place             | Ise EMC Lab. No.3 Measurement Room |                    |
| Date                   | February 2, 2018                   | February 5, 2018   |
| Temperature / Humidity | 24deg. C / 31 % RH                 | 23deg. C / 35 % RH |
| Engineer               | Takumi Shimada                     | Takumi Shimada     |
| Mode                   | Tx 11a                             |                    |

### 11a, Antenna port WA

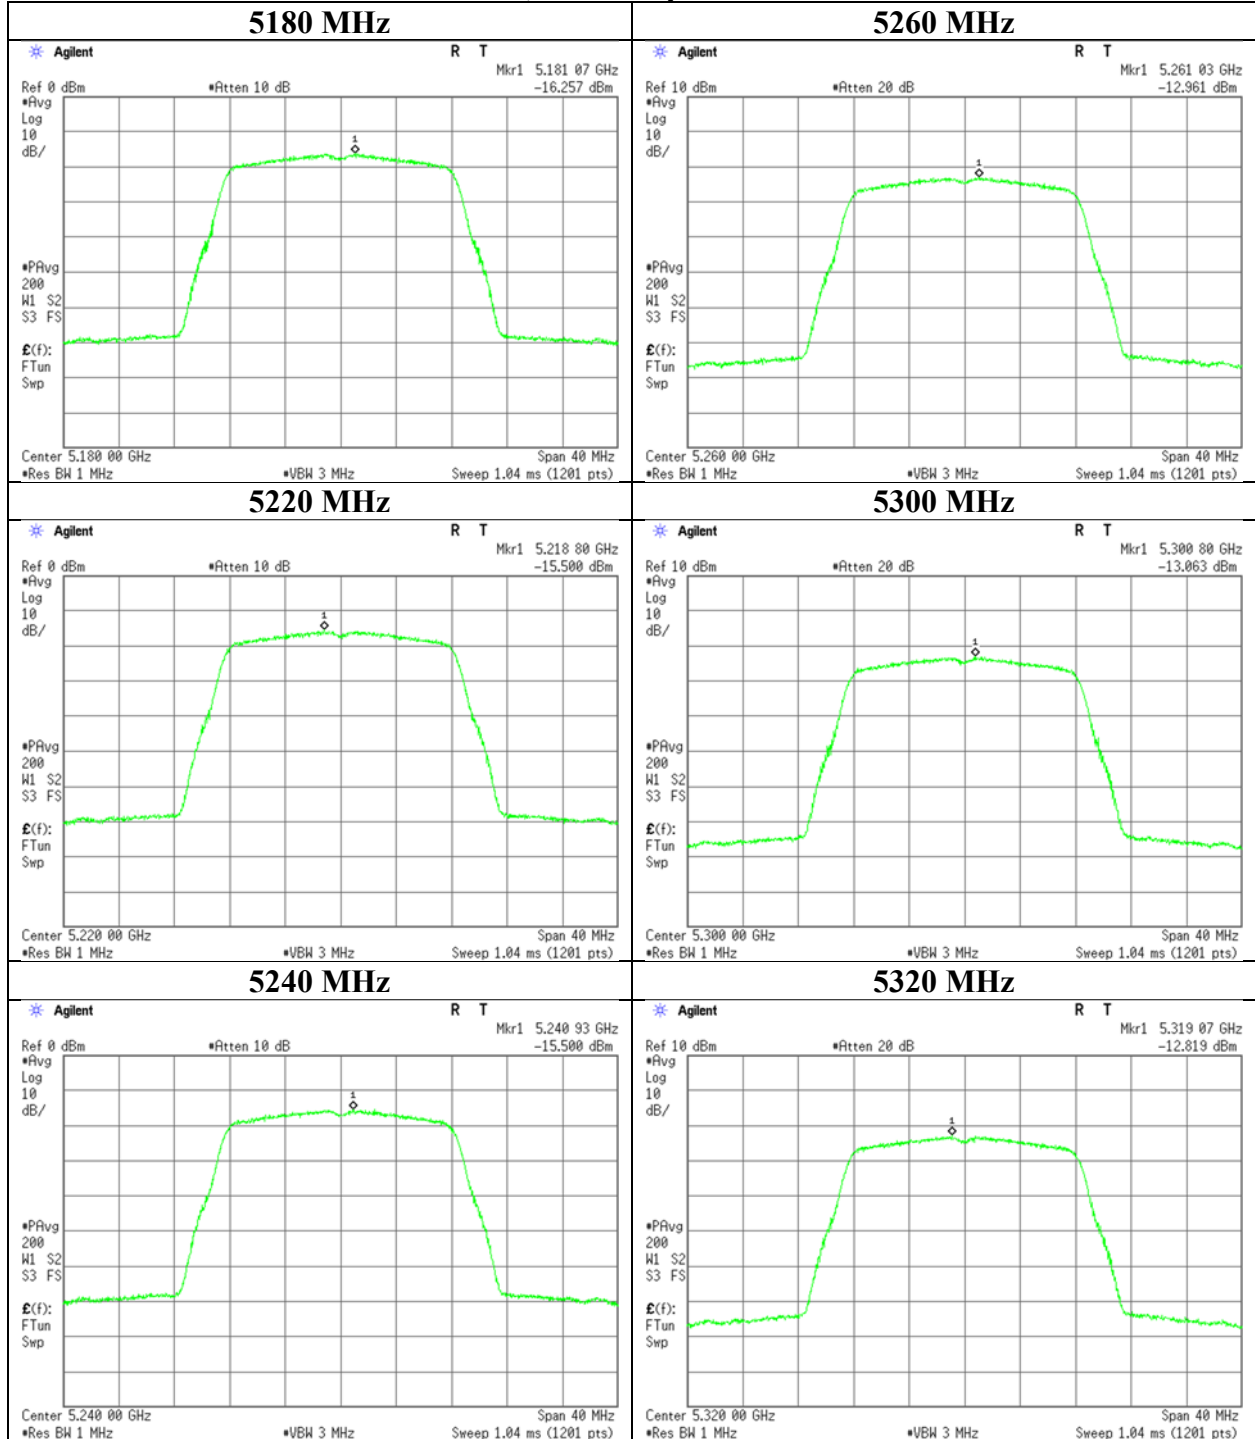

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN


Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## Maximum Power Spectral Density

|                        |                                    |                    |
|------------------------|------------------------------------|--------------------|
| Report No.             | 12219846H                          |                    |
| Test place             | Ise EMC Lab. No.3 Measurement Room |                    |
| Date                   | February 2, 2018                   | February 5, 2018   |
| Temperature / Humidity | 24deg. C / 31 % RH                 | 23deg. C / 35 % RH |
| Engineer               | Takumi Shimada                     | Takumi Shimada     |
| Mode                   | Tx 11a                             |                    |


### 11a, Antenna port WA

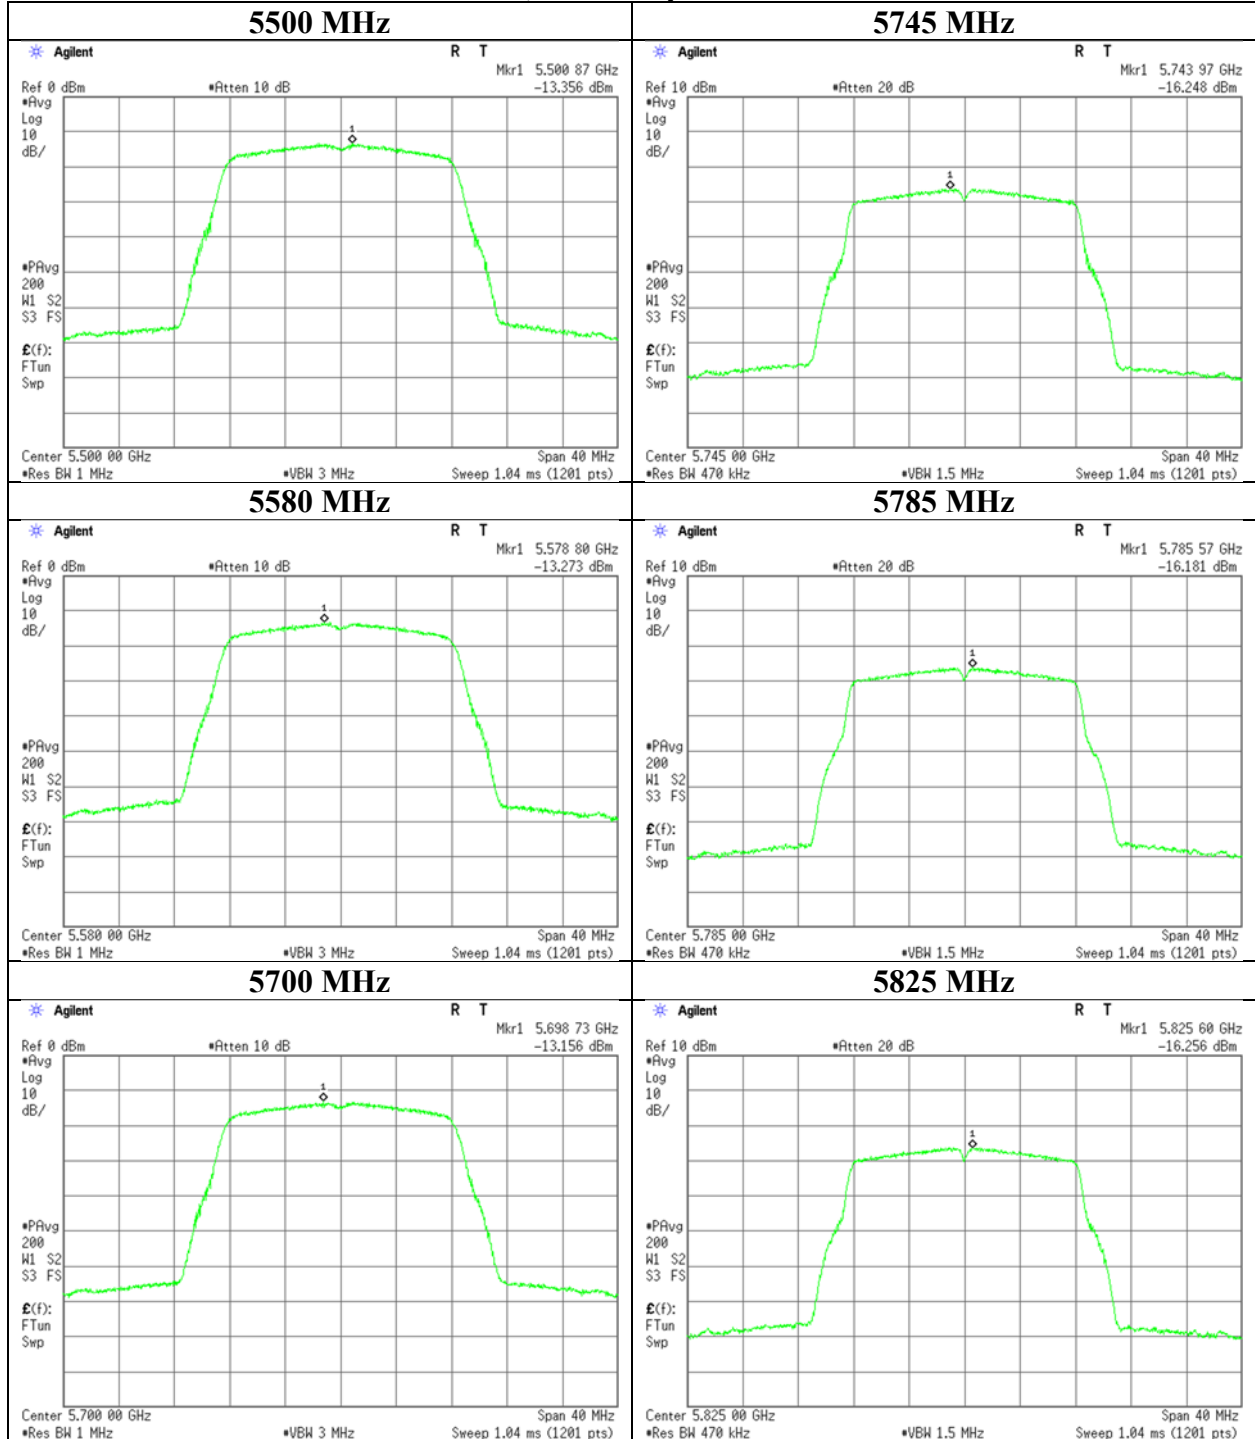

### Maximum Power Spectral Density

|                        |                                    |                    |
|------------------------|------------------------------------|--------------------|
| Report No.             | 12219846H                          |                    |
| Test place             | Ise EMC Lab. No.3 Measurement Room |                    |
| Date                   | February 2, 2018                   | February 5, 2018   |
| Temperature / Humidity | 24deg. C / 31 % RH                 | 23deg. C / 35 % RH |
| Engineer               | Takumi Shimada                     | Takumi Shimada     |
| Mode                   | Tx 11a                             |                    |


#### 11a, Antenna port WC

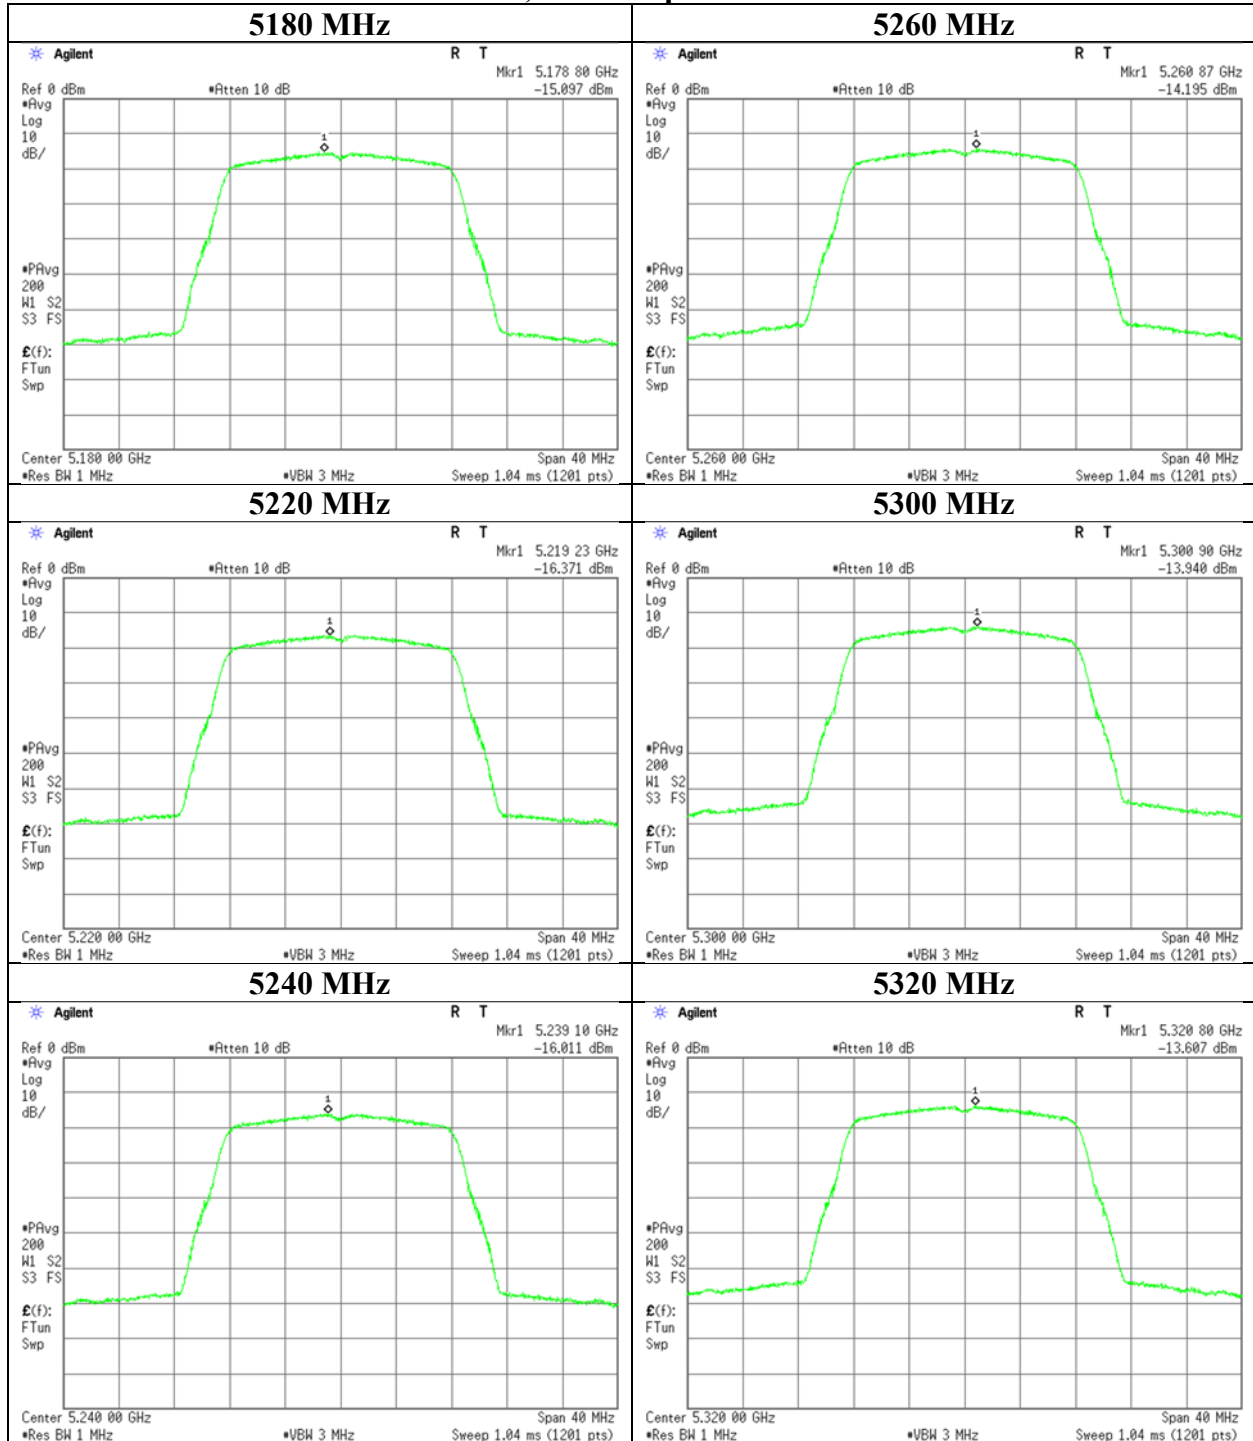

**Maximum Power Spectral Density**

|                        |                                    |                    |
|------------------------|------------------------------------|--------------------|
| Report No.             | 12219846H                          |                    |
| Test place             | Ise EMC Lab. No.3 Measurement Room |                    |
| Date                   | February 2, 2018                   | February 5, 2018   |
| Temperature / Humidity | 24deg. C / 31 % RH                 | 23deg. C / 35 % RH |
| Engineer               | Takumi Shimada                     | Takumi Shimada     |
| Mode                   | Tx 11a                             |                    |

**11a, Antenna port WC**

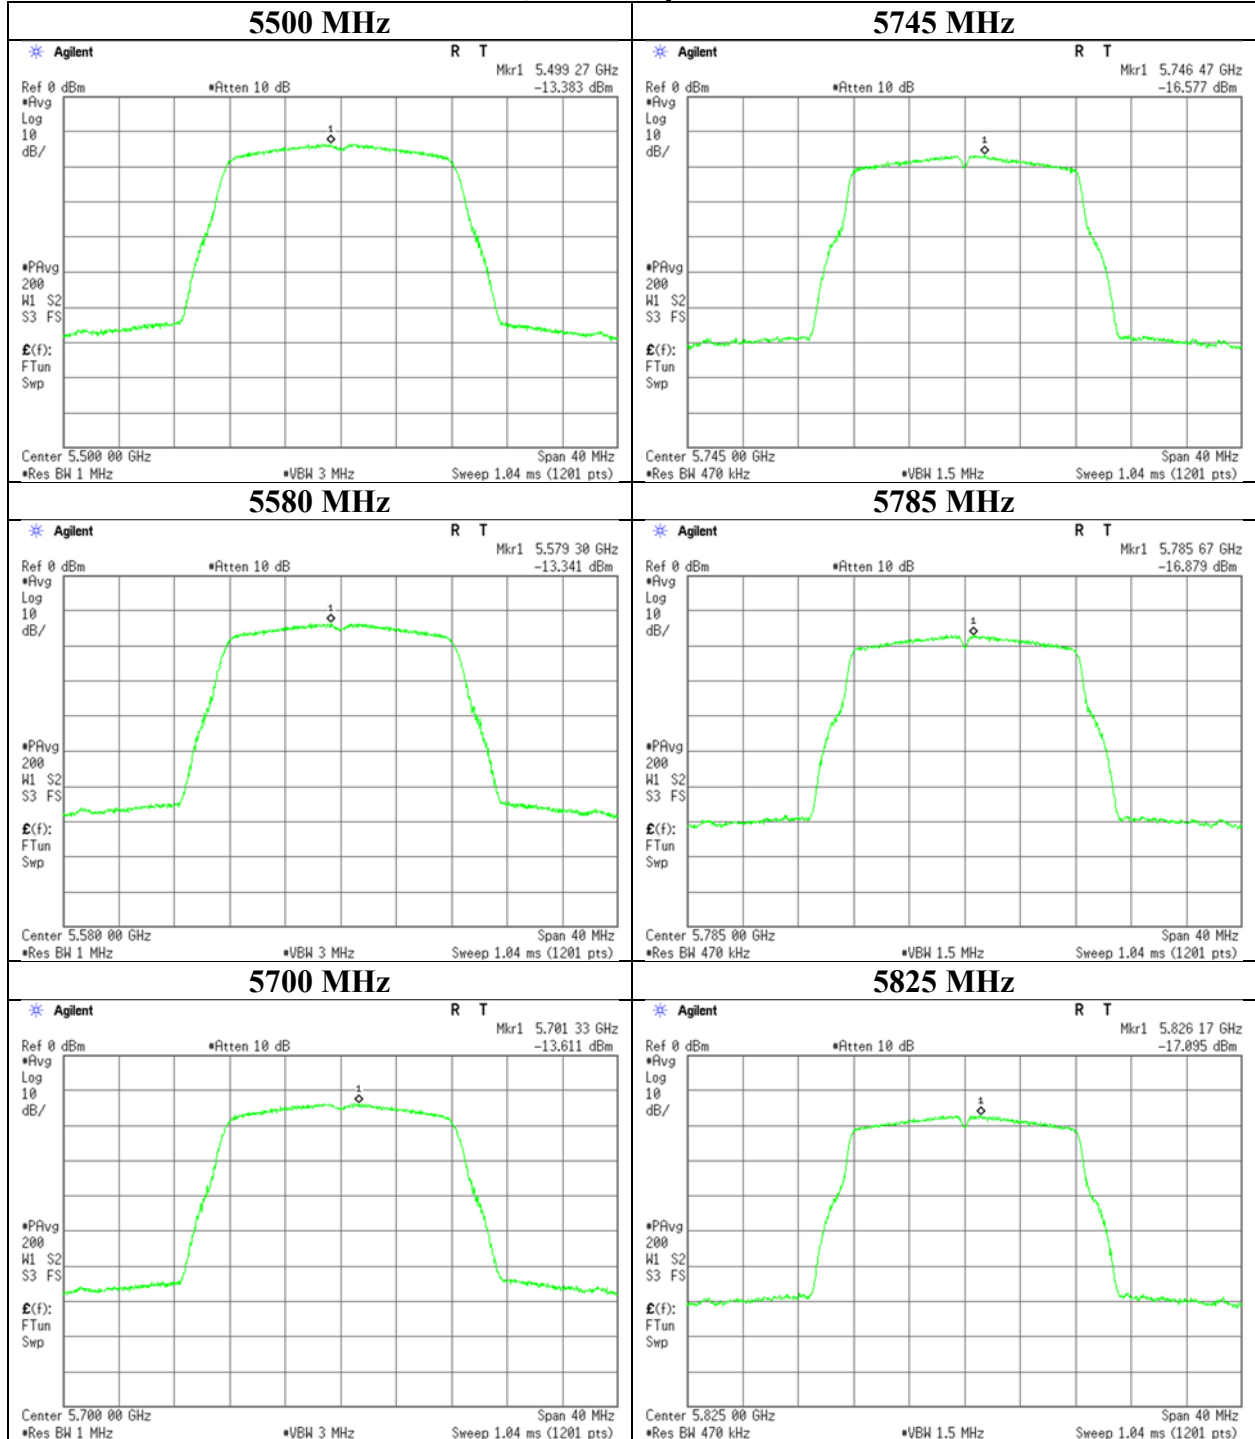

## Maximum Power Spectral Density

Report No. 12219846H  
Test place Ise EMC Lab. No.3 Measurement Room  
Date February 2, 2018 February 5, 2018  
Temperature / Humidity 24deg. C / 31 % RH 23deg. C / 35 % RH  
Engineer Takumi Shimada Takumi Shimada  
Mode Tx 11n-20

Applied limit: 15.407, mobile and portable client device

| Tested Frequency [MHz] | PSD (Conducted) |            |              |                  |                 |             | PSD (e.i.r.p.) |            |              |                  |                 |             |
|------------------------|-----------------|------------|--------------|------------------|-----------------|-------------|----------------|------------|--------------|------------------|-----------------|-------------|
|                        | Antenna         |            |              | Result [dBm/MHz] | Limit [dBm/MHz] | Margin [dB] | Antenna        |            |              | Result [dBm/MHz] | Limit [dBm/MHz] | Margin [dB] |
|                        | 1 [mW/MHz]      | 2 [mW/MHz] | Sum [mW/MHz] |                  |                 |             | 1 [mW/MHz]     | 2 [mW/MHz] | Sum [mW/MHz] |                  |                 |             |
| 5180                   | 0.41            | 0.44       | 0.85         | -0.69            | 8.68            | 9.37        | 2.80           | 2.99       | 5.79         | 7.63             | 17.00           | 9.37        |
| 5220                   | 0.46            | 0.36       | 0.82         | -0.87            | 8.68            | 9.55        | 3.12           | 2.44       | 5.56         | 7.45             | 17.00           | 9.55        |
| 5240                   | 0.42            | 0.40       | 0.81         | -0.89            | 8.68            | 9.57        | 2.85           | 2.69       | 5.53         | 7.43             | 17.00           | 9.57        |
| 5260                   | 0.74            | 0.58       | 1.32         | 1.20             | 8.68            | 7.48        | 5.00           | 3.95       | 8.94         | 9.52             | 17.00           | 7.48        |
| 5300                   | 0.68            | 0.65       | 1.33         | 1.25             | 8.68            | 7.43        | 4.65           | 4.42       | 9.07         | 9.57             | 17.00           | 7.43        |
| 5320                   | 0.77            | 0.62       | 1.39         | 1.44             | 8.68            | 7.24        | 5.22           | 4.24       | 9.46         | 9.76             | 17.00           | 7.24        |
| 5500                   | 0.78            | 0.73       | 1.51         | 1.78             | 8.68            | 6.90        | 5.29           | 4.94       | 10.23        | 10.10            | 17.00           | 6.90        |
| 5580                   | 0.75            | 0.68       | 1.43         | 1.54             | 8.68            | 7.14        | 5.08           | 4.60       | 9.68         | 9.86             | 17.00           | 7.14        |
| 5700                   | 0.74            | 0.66       | 1.40         | 1.46             | 8.68            | 7.22        | 5.02           | 4.50       | 9.51         | 9.78             | 17.00           | 7.22        |
| 5745                   | 0.39            | 0.34       | 0.73         | -1.39            | 27.68           | 29.07       | 2.62           | 2.30       | 4.93         | 6.93             | 36.00           | 29.07       |
| 5785                   | 0.40            | 0.34       | 0.74         | -1.31            | 27.68           | 28.99       | 2.72           | 2.31       | 5.03         | 7.01             | 36.00           | 28.99       |
| 5825                   | 0.40            | 0.33       | 0.73         | -1.35            | 27.68           | 29.03       | 2.73           | 2.25       | 4.98         | 6.97             | 36.00           | 29.03       |

| Tested Frequency [MHz] | Antenna Port WA  |                            |                       |                 |                  |                    |                 | Antenna Port WC    |                       |                 |                  |                    |                 |                    |
|------------------------|------------------|----------------------------|-----------------------|-----------------|------------------|--------------------|-----------------|--------------------|-----------------------|-----------------|------------------|--------------------|-----------------|--------------------|
|                        | Duty Factor [dB] | RBW Correction Factor [dB] | PSD Reading [dBm/MHz] | Cable Loss [dB] | Atten. Loss [dB] | Antenna Gain [dBi] | PSD Result      |                    | PSD Reading [dBm/MHz] | Cable Loss [dB] | Atten. Loss [dB] | Antenna Gain [dBi] | PSD Result      |                    |
|                        |                  |                            |                       |                 |                  |                    | Cond. [dBm/MHz] | e.i.r.p. [dBm/MHz] |                       |                 |                  |                    | Cond. [dBm/MHz] | e.i.r.p. [dBm/MHz] |
| 5180                   | 0.00             | 0.00                       | -15.71                | 2.02            | 9.84             | 8.32               | -3.85           | 4.47               | -15.42                | 2.02            | 9.84             | 8.32               | -3.56           | 4.76               |
| 5220                   | 0.00             | 0.00                       | -15.25                | 2.03            | 9.84             | 8.32               | -3.38           | 4.94               | -16.32                | 2.03            | 9.84             | 8.32               | -4.45           | 3.88               |
| 5240                   | 0.00             | 0.00                       | -15.65                | 2.03            | 9.84             | 8.32               | -3.78           | 4.55               | -15.90                | 2.03            | 9.84             | 8.32               | -4.03           | 4.29               |
| 5260                   | 0.00             | 0.00                       | -13.21                | 2.04            | 9.84             | 8.32               | -1.33           | 6.99               | -14.24                | 2.04            | 9.84             | 8.32               | -2.36           | 5.96               |
| 5300                   | 0.00             | 0.00                       | -13.55                | 2.05            | 9.85             | 8.32               | -1.65           | 6.67               | -13.77                | 2.05            | 9.85             | 8.32               | -1.87           | 6.45               |
| 5320                   | 0.00             | 0.00                       | -13.04                | 2.05            | 9.85             | 8.32               | -1.14           | 7.18               | -13.94                | 2.05            | 9.85             | 8.32               | -2.04           | 6.28               |
| 5500                   | 0.00             | 0.00                       | -13.13                | 2.18            | 9.86             | 8.32               | -1.09           | 7.23               | -13.42                | 2.18            | 9.86             | 8.32               | -1.38           | 6.94               |
| 5580                   | 0.00             | 0.00                       | -13.31                | 2.19            | 9.86             | 8.32               | -1.26           | 7.06               | -13.74                | 2.19            | 9.86             | 8.32               | -1.69           | 6.63               |
| 5700                   | 0.00             | 0.00                       | -13.38                | 2.20            | 9.86             | 8.32               | -1.32           | 7.00               | -13.85                | 2.20            | 9.86             | 8.32               | -1.79           | 6.53               |
| 5745                   | 0.00             | 0.27                       | -16.46                | 2.20            | 9.86             | 8.32               | -4.13           | 4.19               | -17.03                | 2.20            | 9.86             | 8.32               | -4.70           | 3.62               |
| 5785                   | 0.00             | 0.27                       | -16.31                | 2.20            | 9.86             | 8.32               | -3.98           | 4.34               | -17.01                | 2.20            | 9.86             | 8.32               | -4.68           | 3.64               |
| 5825                   | 0.00             | 0.27                       | -16.30                | 2.21            | 9.86             | 8.32               | -3.96           | 4.36               | -17.13                | 2.21            | 9.86             | 8.32               | -4.79           | 3.53               |

Sample Calculation:

PSD: Power Spectral Density

The PSD within 5725 MHz to 5825 MHz are based on any 500 kHz band.

RBW Correction Factor = 10 \* log (Specified bandwidth / Measured bandwidth)

PSD Result (Conducted) = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor + RBW Correction Factor

PSD Result (e.i.r.p.) = Conducted PSD Result + Antenna Gain

The conducted PSD limit was reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. (All frequencies for FCC, 5725 MHz-5850 MHz for IC)

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN


Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## Maximum Power Spectral Density

|                        |                                    |                    |
|------------------------|------------------------------------|--------------------|
| Report No.             | 12219846H                          |                    |
| Test place             | Ise EMC Lab. No.3 Measurement Room |                    |
| Date                   | February 2, 2018                   | February 5, 2018   |
| Temperature / Humidity | 24deg. C / 31 % RH                 | 23deg. C / 35 % RH |
| Engineer               | Takumi Shimada                     | Takumi Shimada     |
| Mode                   | Tx 11n-20                          |                    |


### 11n-20, Antenna port WA

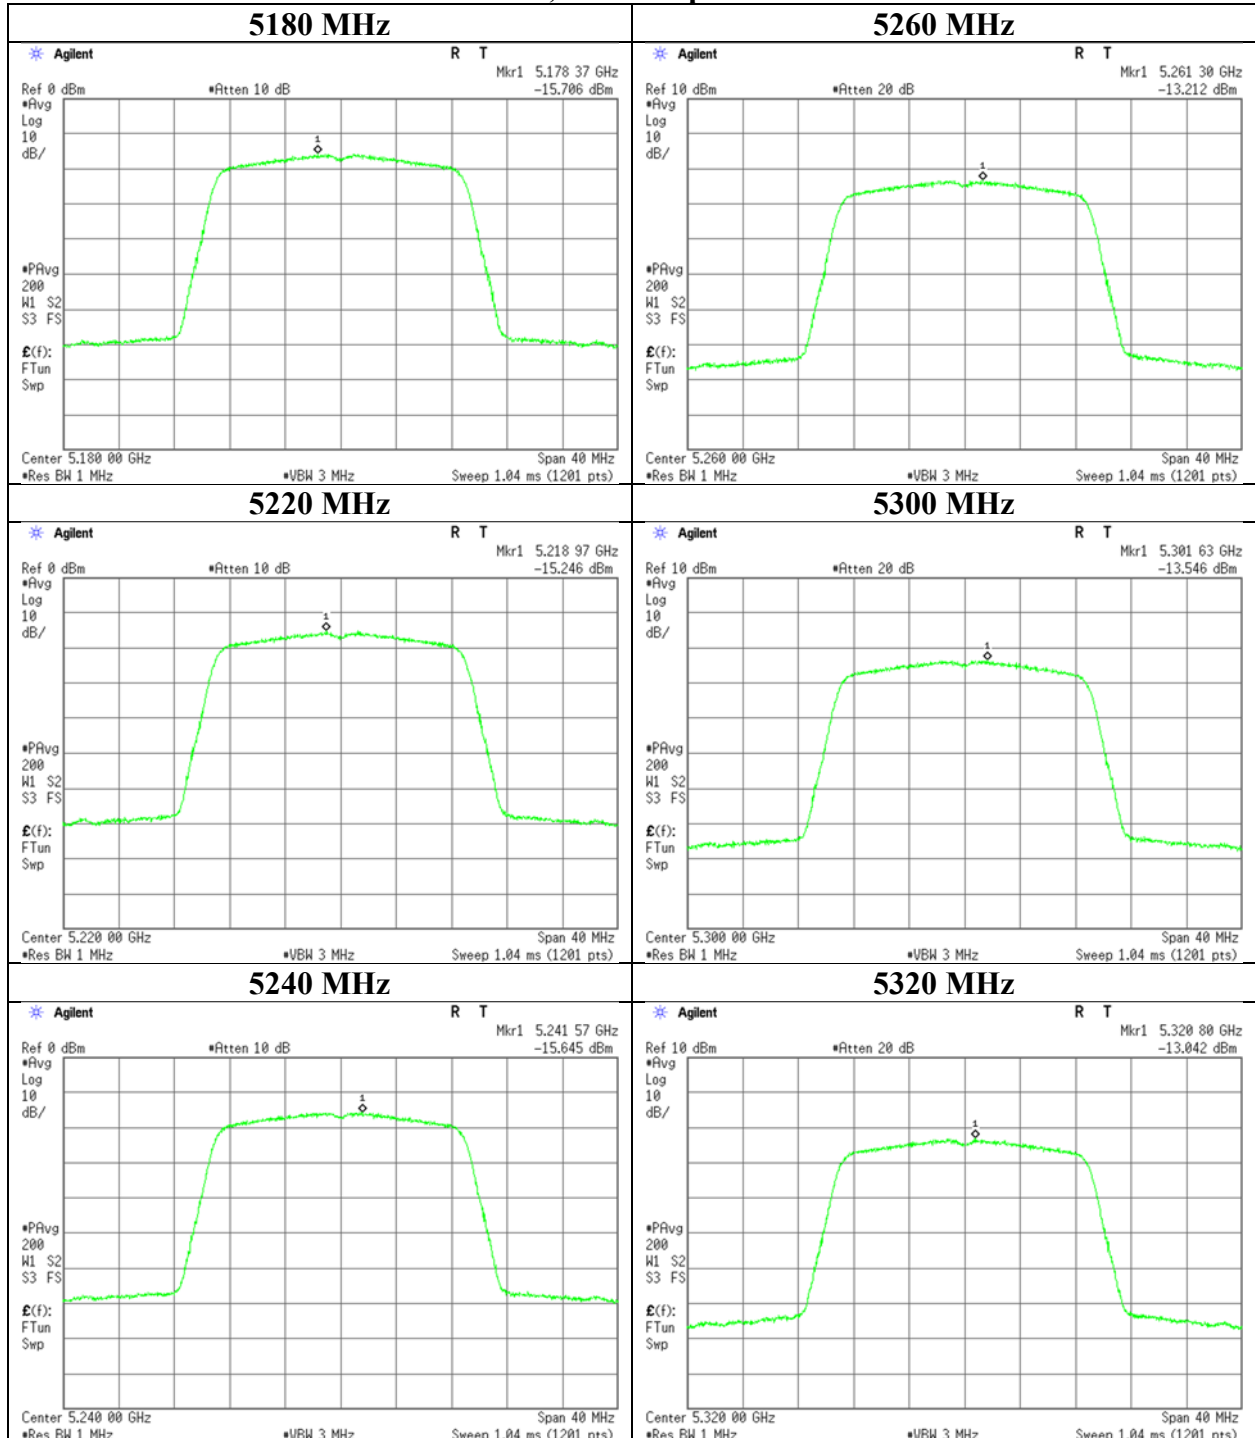

## Maximum Power Spectral Density

|                        |                                    |                    |
|------------------------|------------------------------------|--------------------|
| Report No.             | 12219846H                          |                    |
| Test place             | Ise EMC Lab. No.3 Measurement Room |                    |
| Date                   | February 2, 2018                   | February 5, 2018   |
| Temperature / Humidity | 24deg. C / 31 % RH                 | 23deg. C / 35 % RH |
| Engineer               | Takumi Shimada                     | Takumi Shimada     |
| Mode                   | Tx 11n-20                          |                    |


### 11n-20, Antenna port WA

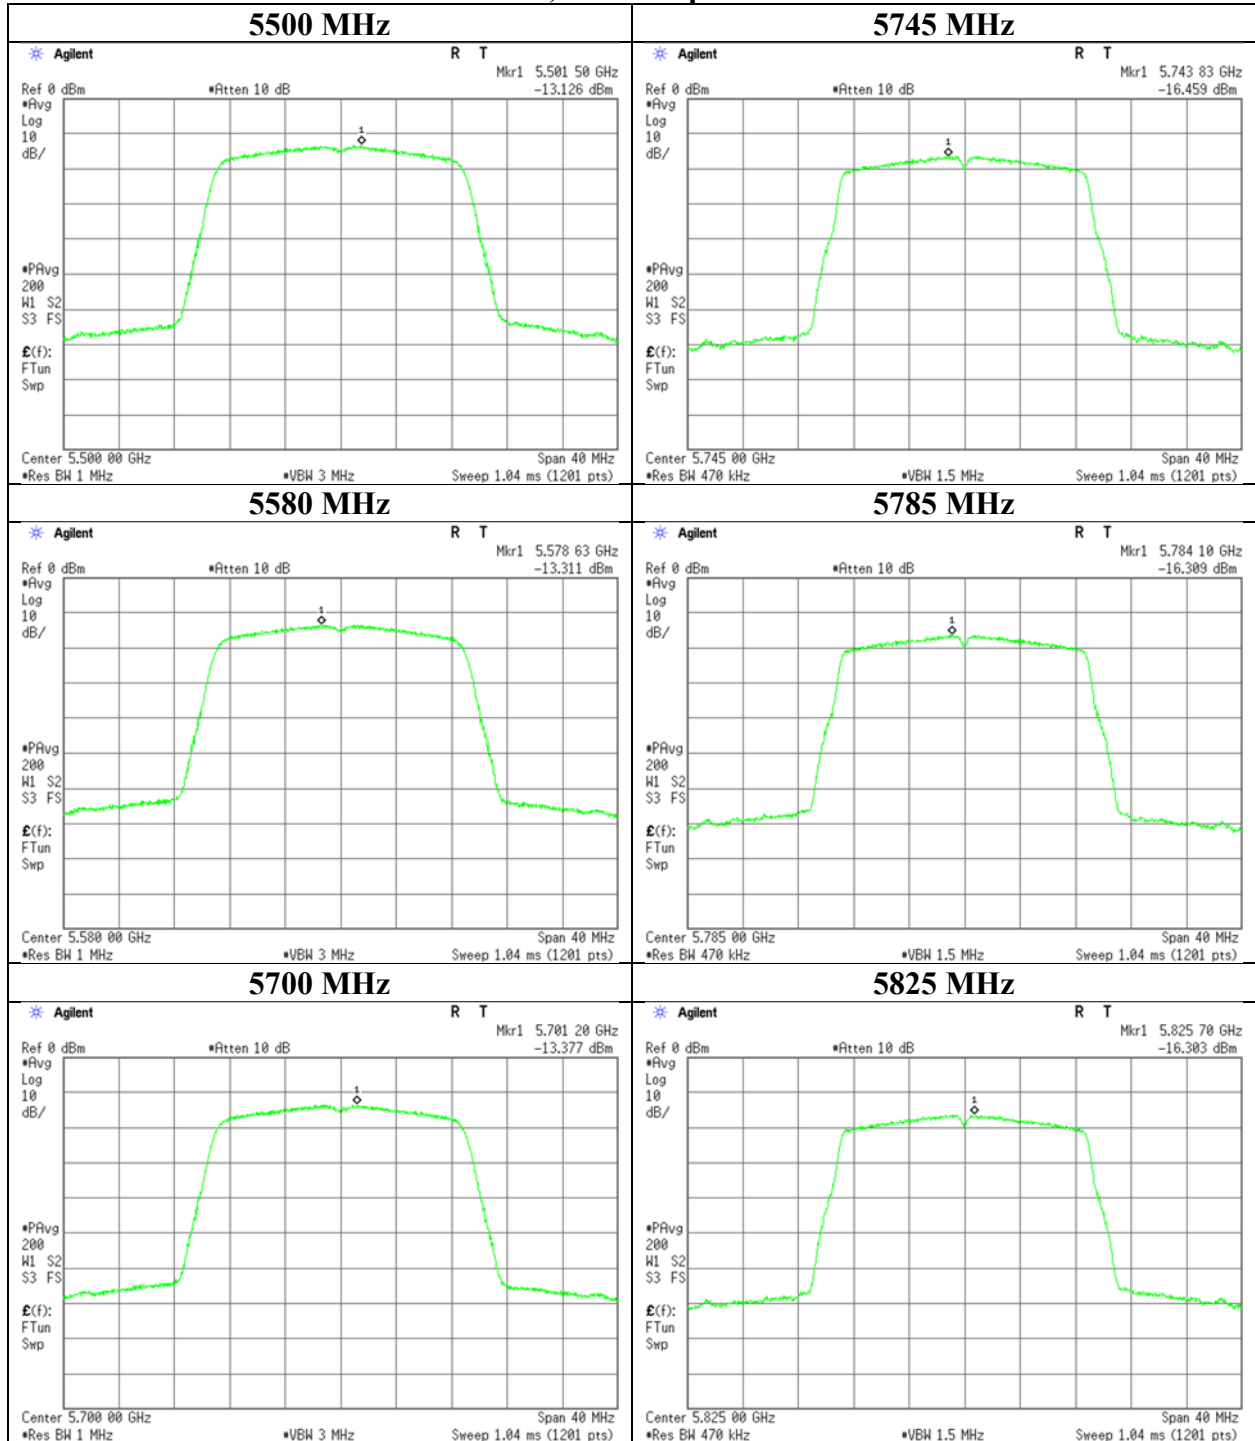

### Maximum Power Spectral Density

|                        |                                    |                    |
|------------------------|------------------------------------|--------------------|
| Report No.             | 12219846H                          |                    |
| Test place             | Ise EMC Lab. No.3 Measurement Room |                    |
| Date                   | February 2, 2018                   | February 5, 2018   |
| Temperature / Humidity | 24deg. C / 31 % RH                 | 23deg. C / 35 % RH |
| Engineer               | Takumi Shimada                     | Takumi Shimada     |
| Mode                   | Tx 11n-20                          |                    |

### 11n-20, Antenna port WC

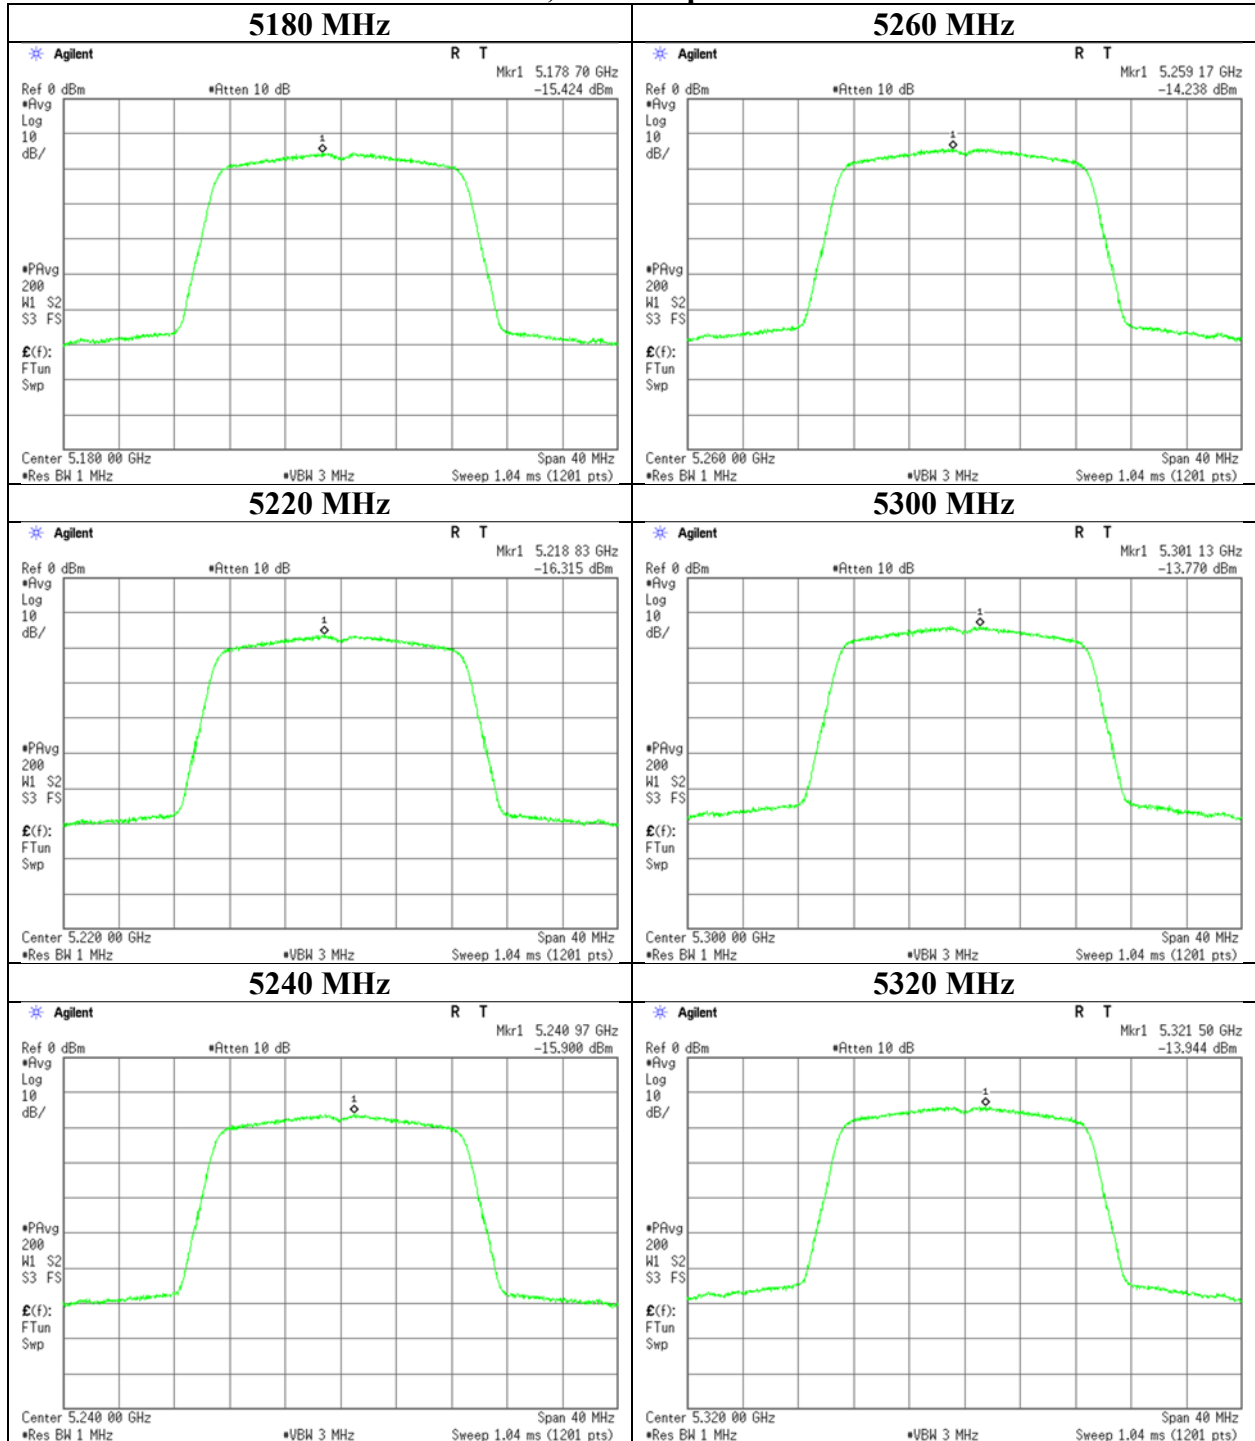




## Maximum Power Spectral Density

|                        |                                    |                    |
|------------------------|------------------------------------|--------------------|
| Report No.             | 12219846H                          |                    |
| Test place             | Ise EMC Lab. No.3 Measurement Room |                    |
| Date                   | February 2, 2018                   | February 5, 2018   |
| Temperature / Humidity | 24deg. C / 31 % RH                 | 23deg. C / 35 % RH |
| Engineer               | Takumi Shimada                     | Takumi Shimada     |
| Mode                   | Tx 11n-20                          |                    |

### 11n-20, Antenna port WC

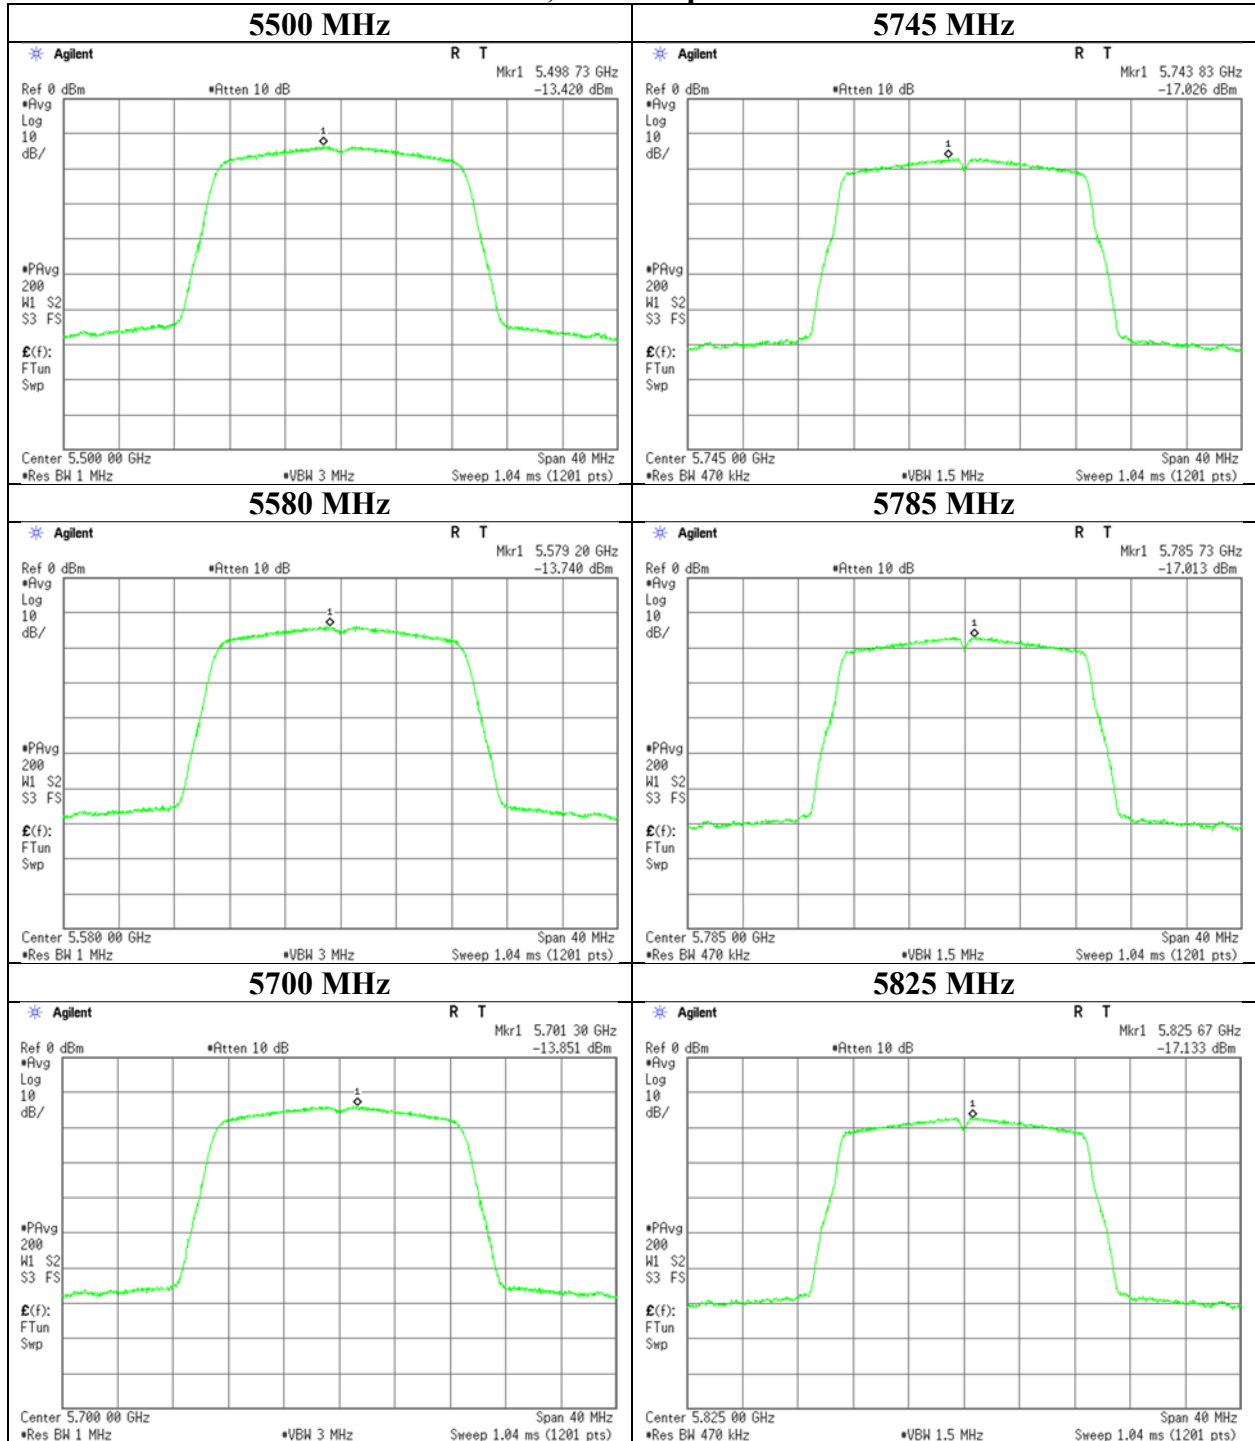

## Maximum Power Spectral Density

Report No. 12219846H  
Test place Ise EMC Lab. No.3 Measurement Room  
Date February 2, 2018 February 5, 2018  
Temperature / Humidity 24deg. C / 31 % RH 23deg. C / 35 % RH  
Engineer Takumi Shimada Takumi Shimada  
Mode Tx 11ac-20

Applied limit: 15.407, mobile and portable client device

| Tested Frequency [MHz] | PSD (Conducted) |            |              |                  |                 |             | PSD (e.i.r.p.) |            |              |                  |                 |             |
|------------------------|-----------------|------------|--------------|------------------|-----------------|-------------|----------------|------------|--------------|------------------|-----------------|-------------|
|                        | Antenna         |            |              | Result [dBm/MHz] | Limit [dBm/MHz] | Margin [dB] | Antenna        |            |              | Result [dBm/MHz] | Limit [dBm/MHz] | Margin [dB] |
|                        | 1 [mW/MHz]      | 2 [mW/MHz] | Sum [mW/MHz] |                  |                 |             | 1 [mW/MHz]     | 2 [mW/MHz] | Sum [mW/MHz] |                  |                 |             |
| 5180                   | 0.43            | 0.47       | 0.90         | -0.44            | 8.68            | 9.12        | 2.92           | 3.21       | 6.13         | 7.88             | 17.00           | 9.12        |
| 5220                   | 0.48            | 0.37       | 0.86         | -0.66            | 8.68            | 9.34        | 3.29           | 2.54       | 5.83         | 7.66             | 17.00           | 9.34        |
| 5240                   | 0.43            | 0.36       | 0.79         | -1.05            | 8.68            | 9.73        | 2.91           | 2.42       | 5.33         | 7.27             | 17.00           | 9.73        |
| 5260                   | 0.71            | 0.63       | 1.34         | 1.27             | 8.68            | 7.41        | 4.85           | 4.25       | 9.10         | 9.59             | 17.00           | 7.41        |
| 5300                   | 0.66            | 0.62       | 1.29         | 1.09             | 8.68            | 7.59        | 4.51           | 4.23       | 8.74         | 9.41             | 17.00           | 7.59        |
| 5320                   | 0.73            | 0.61       | 1.35         | 1.29             | 8.68            | 7.39        | 4.97           | 4.17       | 9.14         | 9.61             | 17.00           | 7.39        |
| 5500                   | 0.74            | 0.69       | 1.43         | 1.56             | 8.68            | 7.12        | 5.01           | 4.70       | 9.72         | 9.88             | 17.00           | 7.12        |
| 5580                   | 0.73            | 0.68       | 1.41         | 1.49             | 8.68            | 7.19        | 4.94           | 4.63       | 9.57         | 9.81             | 17.00           | 7.19        |
| 5700                   | 0.72            | 0.65       | 1.37         | 1.37             | 8.68            | 7.31        | 4.92           | 4.40       | 9.32         | 9.69             | 17.00           | 7.31        |
| 5745                   | 0.40            | 0.36       | 0.76         | -1.18            | 27.68           | 28.86       | 2.74           | 2.44       | 5.18         | 7.14             | 36.00           | 28.86       |
| 5785                   | 0.39            | 0.34       | 0.73         | -1.35            | 27.68           | 29.03       | 2.65           | 2.33       | 4.98         | 6.97             | 36.00           | 29.03       |
| 5825                   | 0.40            | 0.33       | 0.72         | -1.40            | 27.68           | 29.08       | 2.72           | 2.21       | 4.92         | 6.92             | 36.00           | 29.08       |

| Tested Frequency [MHz] | Duty Factor [dB] | RBW Correction Factor [dB] | Antenna Port WA       |                 |                  |                    |                            | Antenna Port WC    |                       |                 |                  |                    |                            |                    |
|------------------------|------------------|----------------------------|-----------------------|-----------------|------------------|--------------------|----------------------------|--------------------|-----------------------|-----------------|------------------|--------------------|----------------------------|--------------------|
|                        |                  |                            | PSD Reading [dBm/MHz] | Cable Loss [dB] | Atten. Loss [dB] | Antenna Gain [dBi] | PSD Result Cond. [dBm/MHz] | e.i.r.p. [dBm/MHz] | PSD Reading [dBm/MHz] | Cable Loss [dB] | Atten. Loss [dB] | Antenna Gain [dBi] | PSD Result Cond. [dBm/MHz] | e.i.r.p. [dBm/MHz] |
| 5180                   | 0.00             | 0.00                       | -15.52                | 2.02            | 9.84             | 8.32               | -3.66                      | 4.66               | -15.11                | 2.02            | 9.84             | 8.32               | -3.25                      | 5.07               |
| 5220                   | 0.00             | 0.00                       | -15.02                | 2.03            | 9.84             | 8.32               | -3.15                      | 5.17               | -16.14                | 2.03            | 9.84             | 8.32               | -4.27                      | 4.06               |
| 5240                   | 0.00             | 0.00                       | -15.55                | 2.03            | 9.84             | 8.32               | -3.68                      | 4.64               | -16.35                | 2.03            | 9.84             | 8.32               | -4.48                      | 3.84               |
| 5260                   | 0.00             | 0.00                       | -13.34                | 2.04            | 9.84             | 8.32               | -1.46                      | 6.86               | -13.92                | 2.04            | 9.84             | 8.32               | -2.04                      | 6.28               |
| 5300                   | 0.00             | 0.00                       | -13.68                | 2.05            | 9.85             | 8.32               | -1.78                      | 6.54               | -13.95                | 2.05            | 9.85             | 8.32               | -2.05                      | 6.27               |
| 5320                   | 0.00             | 0.00                       | -13.26                | 2.05            | 9.85             | 8.32               | -1.36                      | 6.96               | -14.02                | 2.05            | 9.85             | 8.32               | -2.12                      | 6.20               |
| 5500                   | 0.00             | 0.00                       | -13.36                | 2.18            | 9.86             | 8.32               | -1.32                      | 7.00               | -13.64                | 2.18            | 9.86             | 8.32               | -1.60                      | 6.73               |
| 5580                   | 0.00             | 0.00                       | -13.43                | 2.19            | 9.86             | 8.32               | -1.38                      | 6.94               | -13.72                | 2.19            | 9.86             | 8.32               | -1.67                      | 6.65               |
| 5700                   | 0.00             | 0.00                       | -13.46                | 2.20            | 9.86             | 8.32               | -1.40                      | 6.92               | -13.94                | 2.20            | 9.86             | 8.32               | -1.88                      | 6.44               |
| 5745                   | 0.00             | 0.27                       | -16.27                | 2.20            | 9.86             | 8.32               | -3.94                      | 4.38               | -16.78                | 2.20            | 9.86             | 8.32               | -4.45                      | 3.87               |
| 5785                   | 0.00             | 0.27                       | -16.41                | 2.20            | 9.86             | 8.32               | -4.08                      | 4.24               | -16.98                | 2.20            | 9.86             | 8.32               | -4.65                      | 3.67               |
| 5825                   | 0.00             | 0.27                       | -16.32                | 2.21            | 9.86             | 8.32               | -3.98                      | 4.34               | -17.22                | 2.21            | 9.86             | 8.32               | -4.88                      | 3.44               |

Sample Calculation:

PSD: Power Spectral Density

The PSD within 5725 MHz to 5825 MHz are based on any 500 kHz band.

RBW Correction Factor = 10 \* log (Specified bandwidth / Measured bandwidth)

PSD Result (Conducted) = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor + RBW Correction Factor

PSD Result (e.i.r.p.) = Conducted PSD Result + Antenna Gain

The conducted PSD limit was reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. (All frequencies for FCC, 5725 MHz-5850 MHz for IC)

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN


Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## Maximum Power Spectral Density

|                        |                                    |                    |
|------------------------|------------------------------------|--------------------|
| Report No.             | 12219846H                          |                    |
| Test place             | Ise EMC Lab. No.3 Measurement Room |                    |
| Date                   | February 2, 2018                   | February 5, 2018   |
| Temperature / Humidity | 24deg. C / 31 % RH                 | 23deg. C / 35 % RH |
| Engineer               | Takumi Shimada                     | Takumi Shimada     |
| Mode                   | Tx 11ac-20                         |                    |


### 11ac-20, Antenna port WA

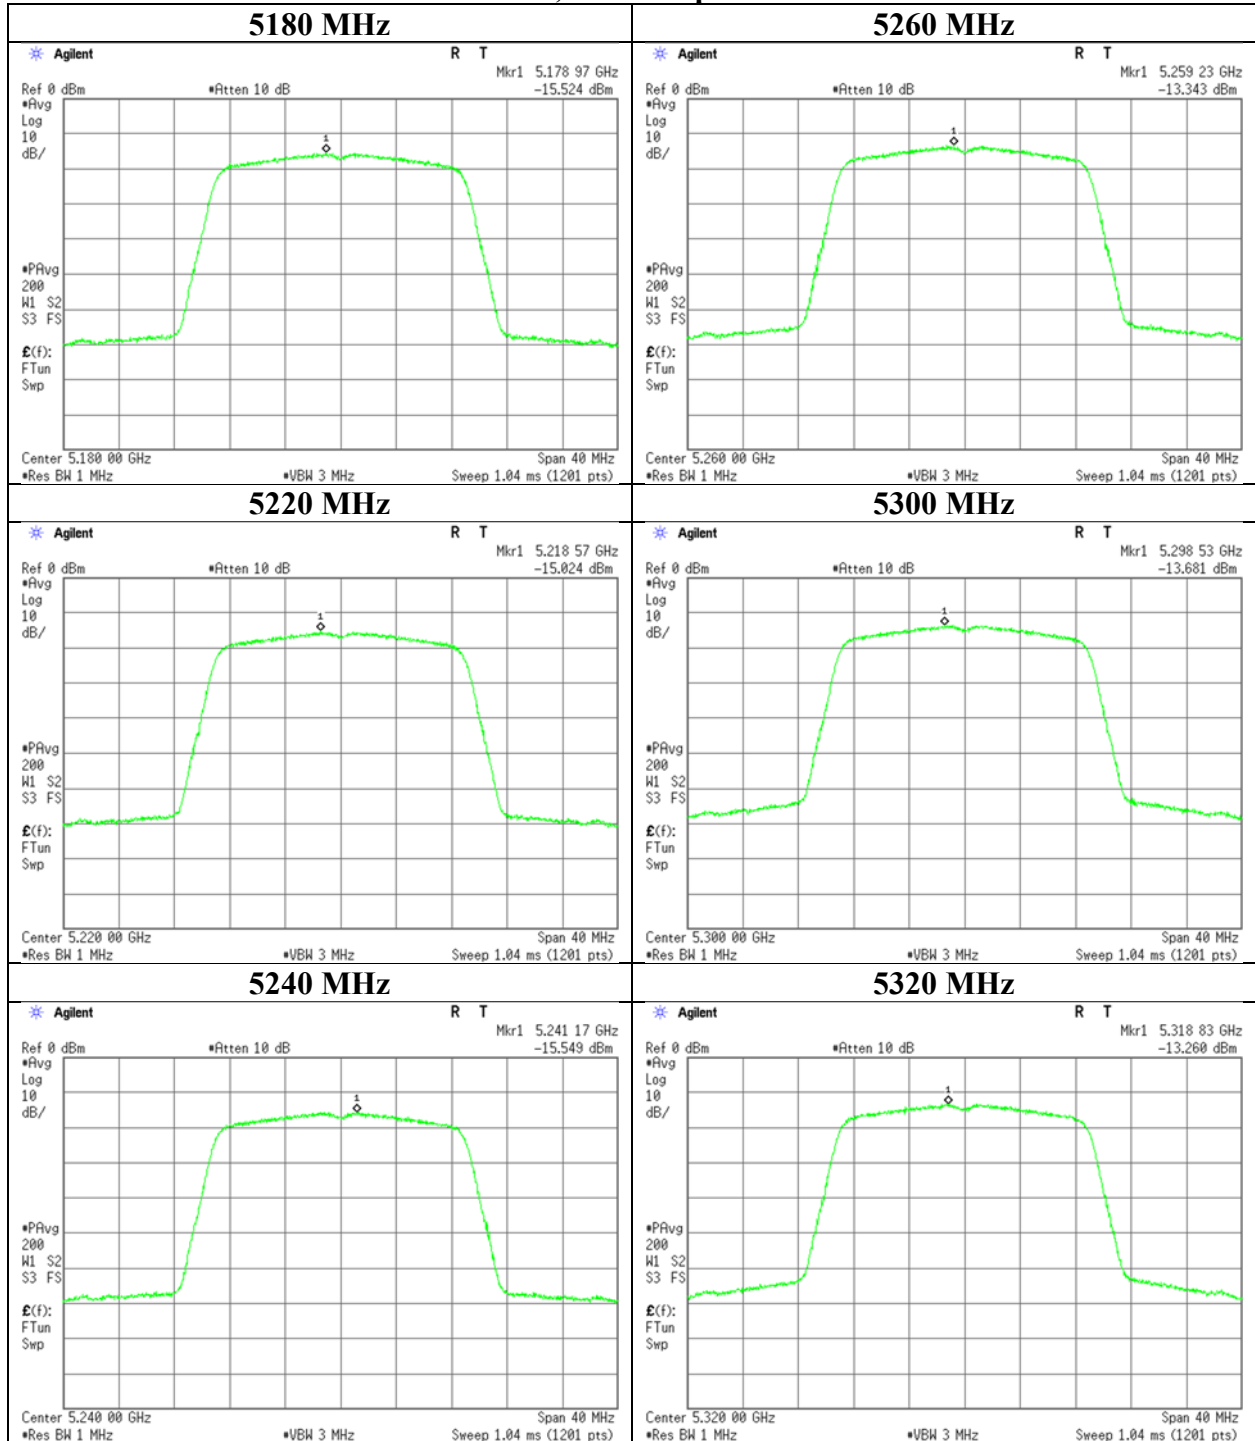

## Maximum Power Spectral Density

|                        |                                    |                    |
|------------------------|------------------------------------|--------------------|
| Report No.             | 12219846H                          |                    |
| Test place             | Ise EMC Lab. No.3 Measurement Room |                    |
| Date                   | February 2, 2018                   | February 5, 2018   |
| Temperature / Humidity | 24deg. C / 31 % RH                 | 23deg. C / 35 % RH |
| Engineer               | Takumi Shimada                     | Takumi Shimada     |
| Mode                   | Tx 11ac-20                         |                    |


### 11ac-20, Antenna port WA

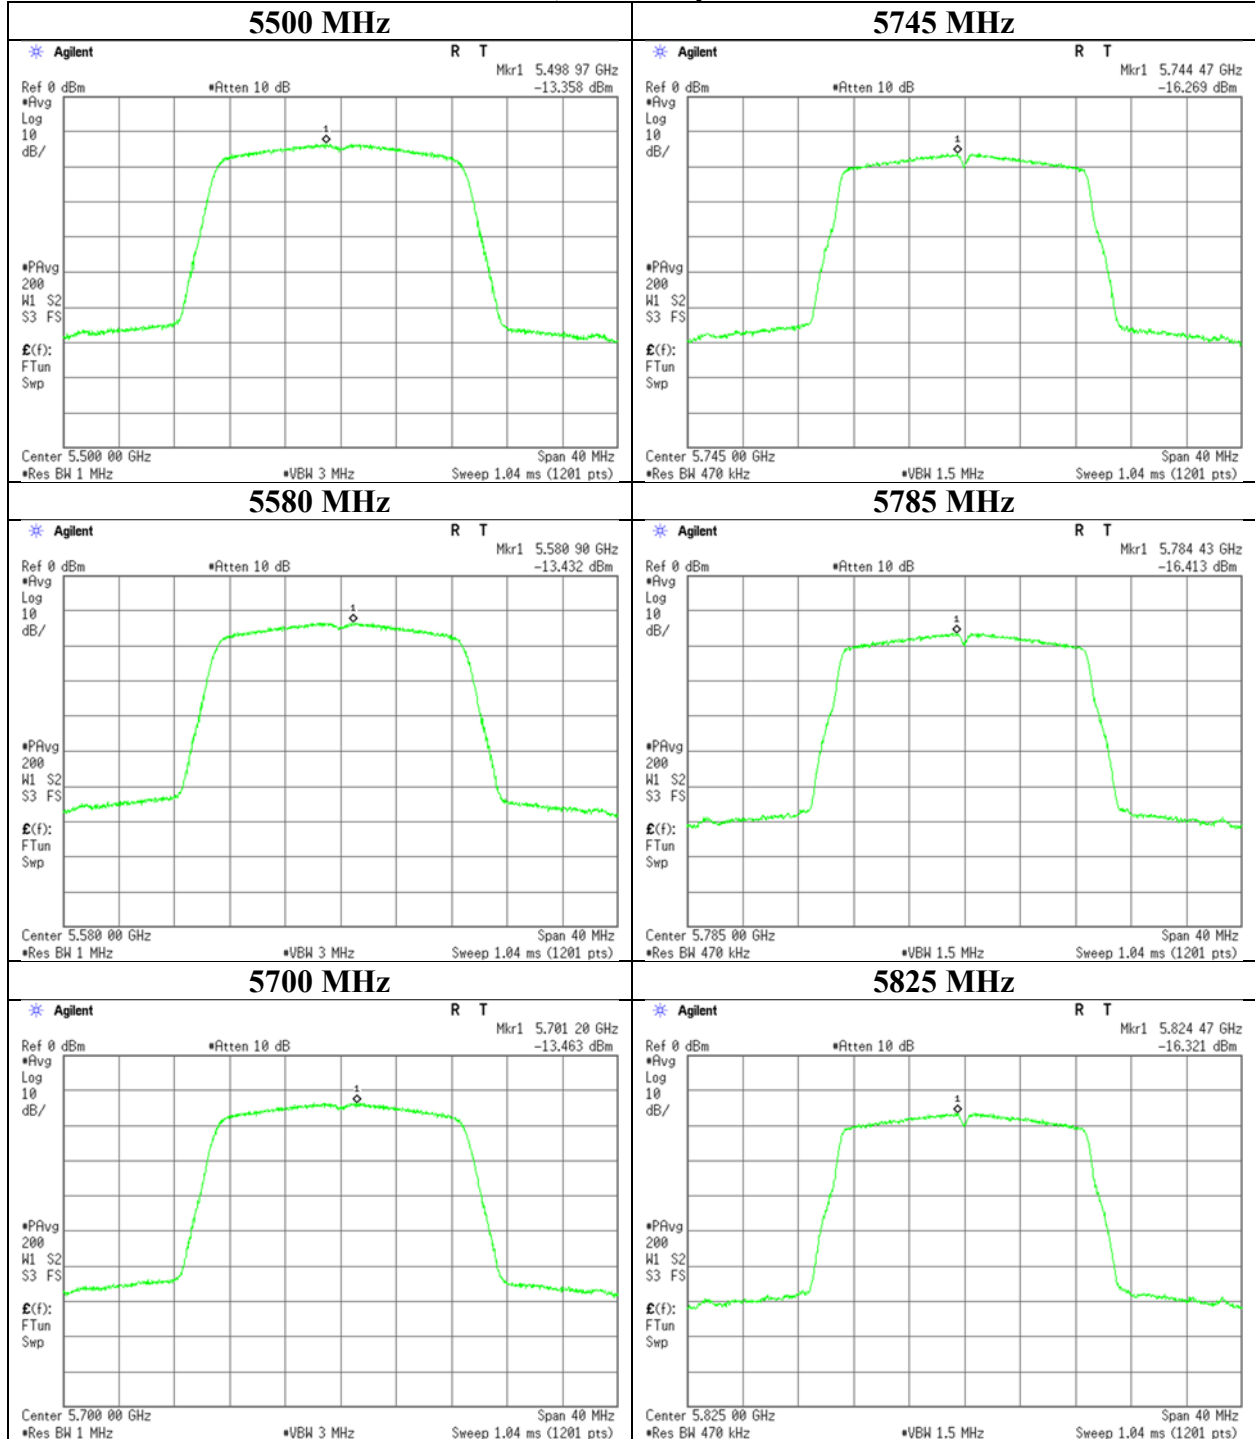

## Maximum Power Spectral Density

|                        |                                    |                    |
|------------------------|------------------------------------|--------------------|
| Report No.             | 12219846H                          |                    |
| Test place             | Ise EMC Lab. No.3 Measurement Room |                    |
| Date                   | February 2, 2018                   | February 5, 2018   |
| Temperature / Humidity | 24deg. C / 31 % RH                 | 23deg. C / 35 % RH |
| Engineer               | Takumi Shimada                     | Takumi Shimada     |
| Mode                   | Tx 11ac-20                         |                    |

### 11ac-20, Antenna port WC

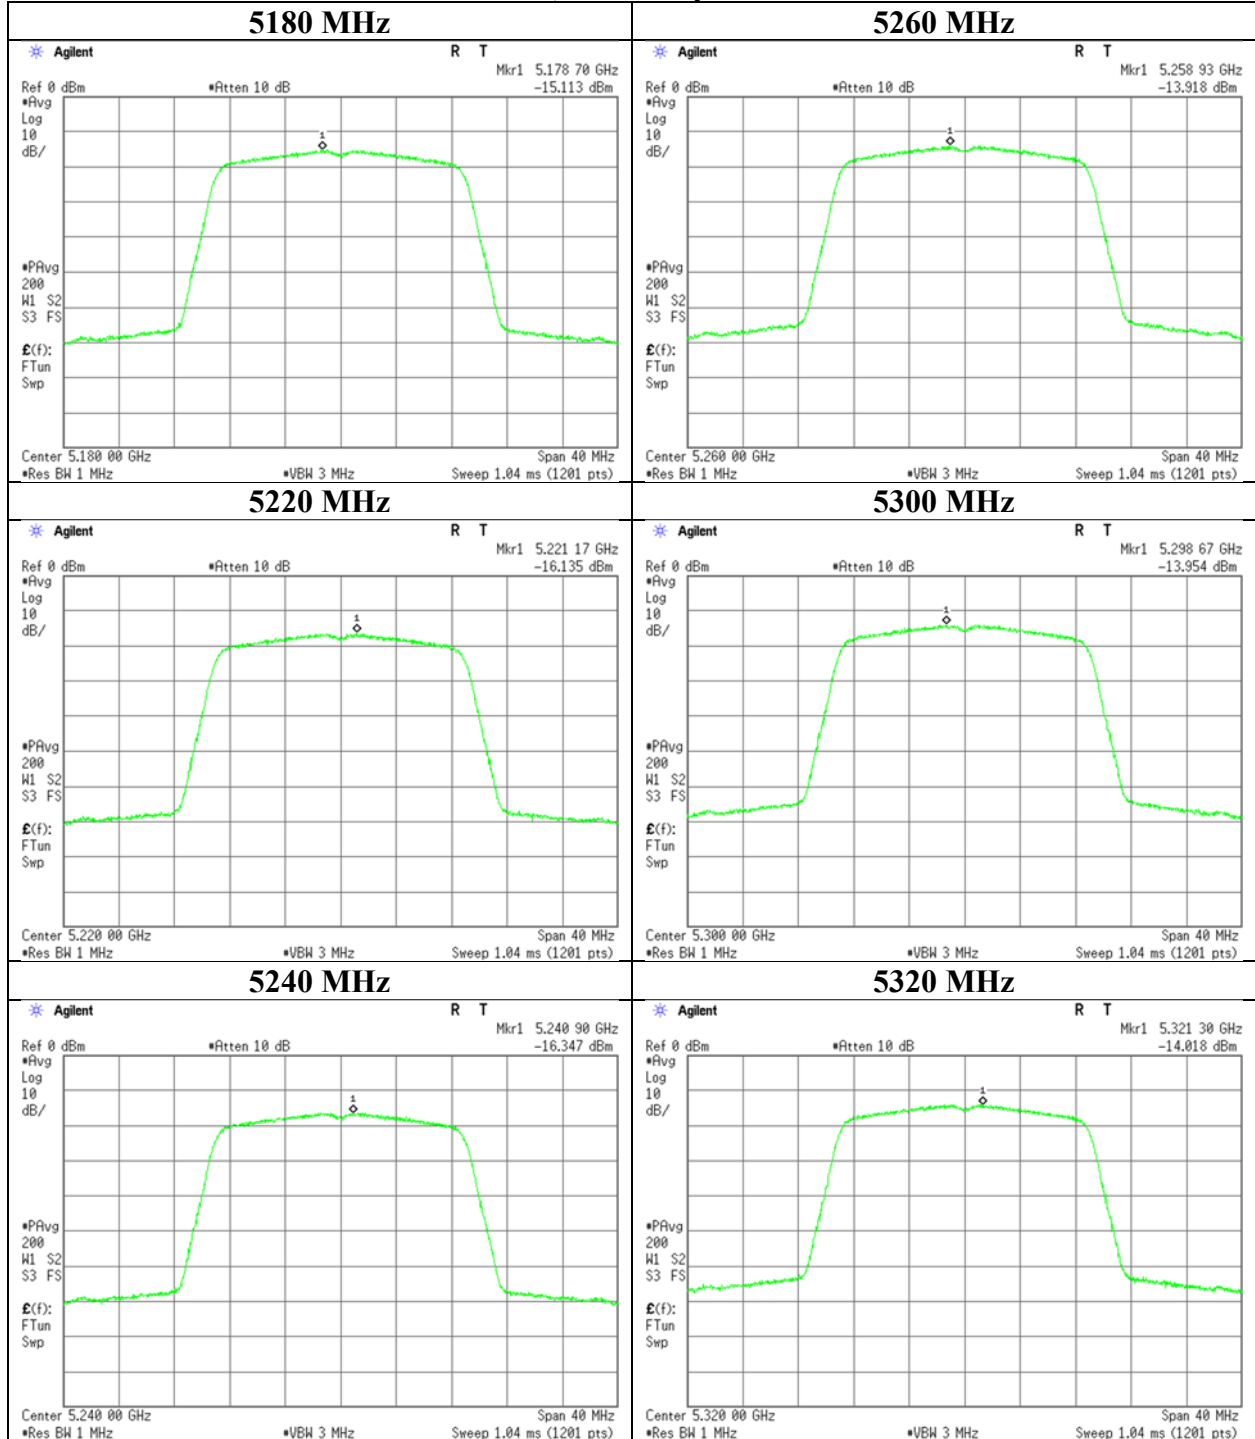

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN


Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## Maximum Power Spectral Density

|                        |                                    |                    |
|------------------------|------------------------------------|--------------------|
| Report No.             | 12219846H                          |                    |
| Test place             | Ise EMC Lab. No.3 Measurement Room |                    |
| Date                   | February 2, 2018                   | February 5, 2018   |
| Temperature / Humidity | 24deg. C / 31 % RH                 | 23deg. C / 35 % RH |
| Engineer               | Takumi Shimada                     | Takumi Shimada     |
| Mode                   | Tx 11ac-20                         |                    |

### 11ac-20, Antenna port WC

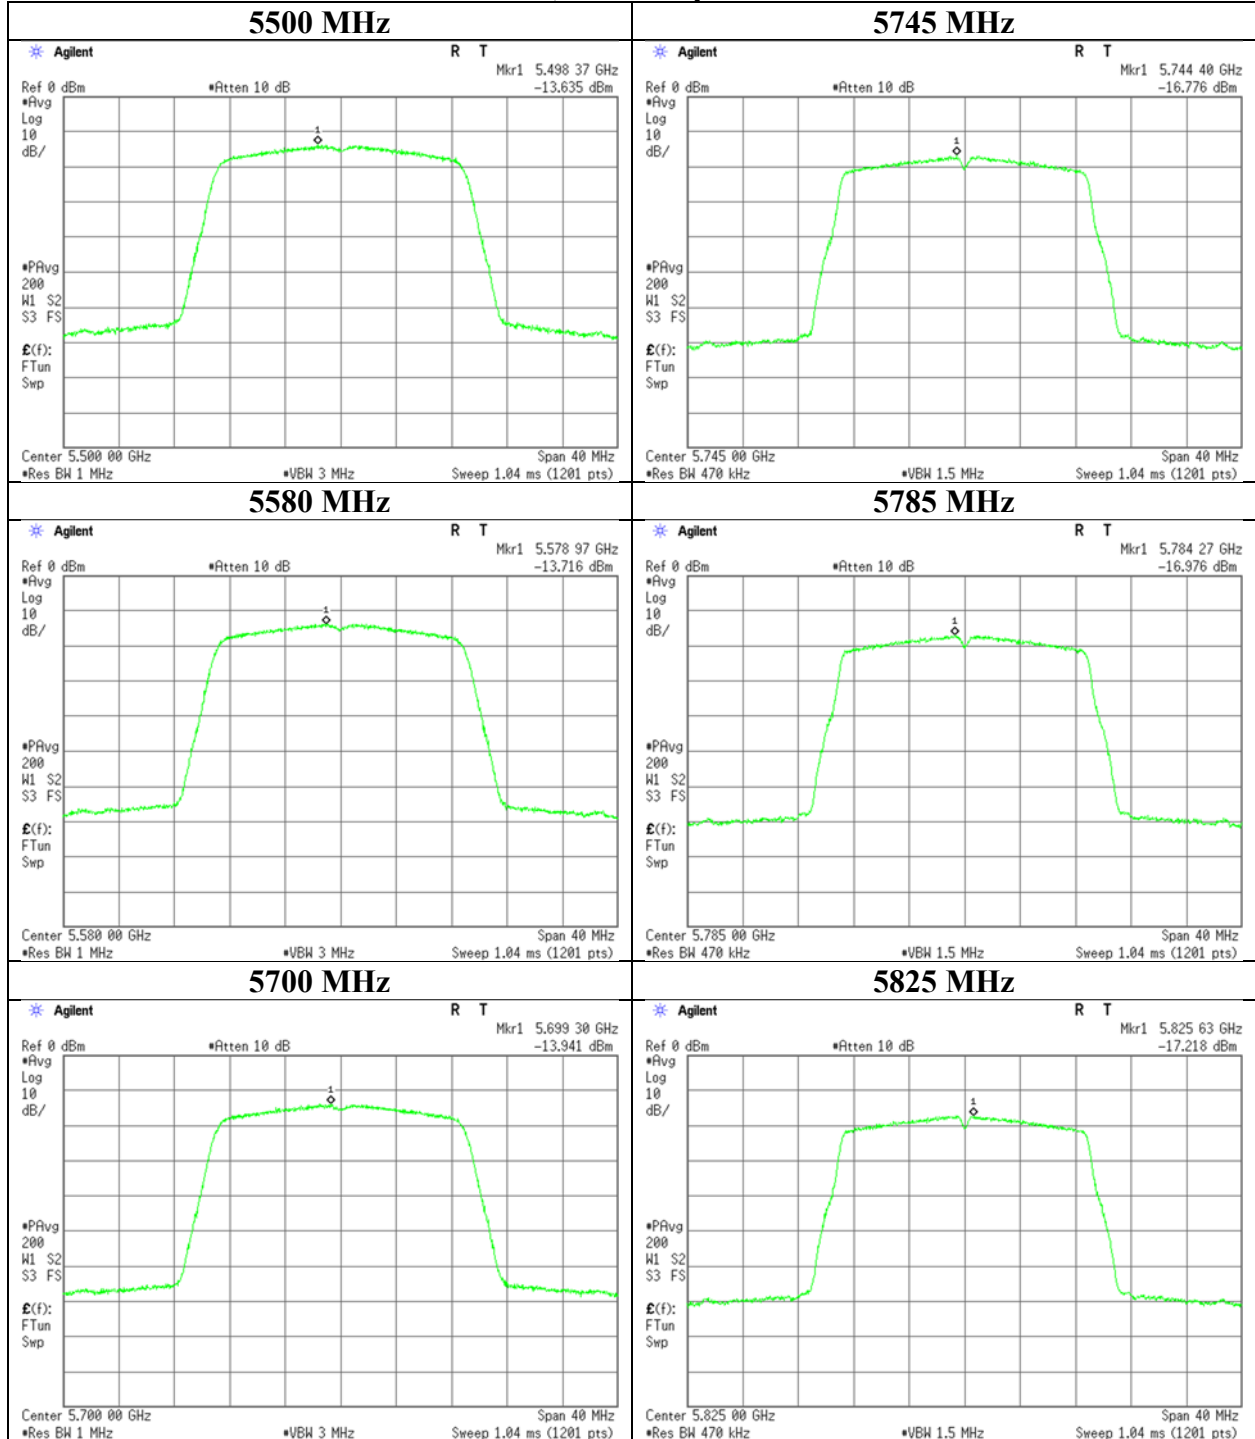

## Maximum Power Spectral Density

Report No. 12219846H  
Test place Ise EMC Lab. No.3 Measurement Room  
Date February 2, 2018 February 5, 2018  
Temperature / Humidity 24deg. C / 31 % RH 23deg. C / 35 % RH  
Engineer Takumi Shimada Takumi Shimada  
Mode Tx 11n-40

Applied limit: 15.407, mobile and portable client device

| Tested Frequency<br>[MHz] | PSD (Conducted) |          |           |           |       |          | PSD (e.i.r.p.) |          |           |           |       |        |
|---------------------------|-----------------|----------|-----------|-----------|-------|----------|----------------|----------|-----------|-----------|-------|--------|
|                           | Antenna         |          |           | Result    | Limit | Margin   | Antenna        |          |           | Result    | Limit | Margin |
|                           | 1               | 2        | Sum       |           |       |          | 1              | 2        | Sum       |           |       |        |
| [mW/MHz]                  | [mW/MHz]        | [mW/MHz] | [dBm/MHz] | [dBm/MHz] | [dB]  | [mW/MHz] | [mW/MHz]       | [mW/MHz] | [dBm/MHz] | [dBm/MHz] | [dB]  |        |
| 5190                      | 0.17            | 0.20     | 0.37      | -4.31     | 8.68  | 12.99    | 1.14           | 1.38     | 2.52      | 4.01      | 17.00 | 12.99  |
| 5230                      | 0.22            | 0.17     | 0.39      | -4.08     | 8.68  | 12.76    | 1.47           | 1.18     | 2.65      | 4.24      | 17.00 | 12.76  |
| 5270                      | 0.32            | 0.30     | 0.63      | -2.03     | 8.68  | 10.71    | 2.19           | 2.07     | 4.25      | 6.29      | 17.00 | 10.71  |
| 5310                      | 0.34            | 0.29     | 0.63      | -2.04     | 8.68  | 10.72    | 2.28           | 1.97     | 4.25      | 6.28      | 17.00 | 10.72  |
| 5510                      | 0.32            | 0.29     | 0.61      | -2.12     | 8.68  | 10.80    | 2.17           | 2.00     | 4.17      | 6.20      | 17.00 | 10.80  |
| 5550                      | 0.35            | 0.33     | 0.68      | -1.67     | 8.68  | 10.35    | 2.38           | 2.25     | 4.63      | 6.65      | 17.00 | 10.35  |
| 5670                      | 0.36            | 0.27     | 0.63      | -2.01     | 8.68  | 10.69    | 2.41           | 1.86     | 4.27      | 6.31      | 17.00 | 10.69  |
| 5755                      | 0.18            | 0.16     | 0.34      | -4.68     | 27.68 | 32.36    | 1.24           | 1.07     | 2.31      | 3.64      | 36.00 | 32.36  |
| 5795                      | 0.19            | 0.15     | 0.34      | -4.63     | 27.68 | 32.31    | 1.30           | 1.04     | 2.34      | 3.69      | 36.00 | 32.31  |

| Tested Frequency<br>[MHz] | Antenna Port WA |                       |             |            |             |              |            | Antenna Port WC |            |             |              |            |            |      |
|---------------------------|-----------------|-----------------------|-------------|------------|-------------|--------------|------------|-----------------|------------|-------------|--------------|------------|------------|------|
|                           | Duty Factor     | RBW Correction Factor | PSD Reading | Cable Loss | Atten. Loss | Antenna Gain | PSD Result | PSD Reading     | Cable Loss | Atten. Loss | Antenna Gain | PSD Result | PSD Result |      |
| [dB]                      | [dB]            | [dB]                  | [dB]        | [dB]       | [dB]        | [dBi]        | [dBm/MHz]  | [dBm/MHz]       | [dB]       | [dB]        | [dBi]        | [dBm/MHz]  | [dBm/MHz]  |      |
| 5190                      | 0.00            | 0.00                  | -19.60      | 2.02       | 9.84        | 8.32         | -7.74      | 0.58            | -18.79     | 2.02        | 9.84         | 8.32       | -6.93      | 1.39 |
| 5230                      | 0.00            | 0.00                  | -18.52      | 2.03       | 9.84        | 8.32         | -6.65      | 1.68            | -19.46     | 2.03        | 9.84         | 8.32       | -7.59      | 0.73 |
| 5270                      | 0.00            | 0.00                  | -16.81      | 2.04       | 9.85        | 8.32         | -4.92      | 3.40            | -17.06     | 2.04        | 9.85         | 8.32       | -5.17      | 3.15 |
| 5310                      | 0.00            | 0.00                  | -16.65      | 2.05       | 9.85        | 8.32         | -4.75      | 3.57            | -17.27     | 2.05        | 9.85         | 8.32       | -5.37      | 2.95 |
| 5510                      | 0.00            | 0.00                  | -17.00      | 2.18       | 9.86        | 8.32         | -4.96      | 3.36            | -17.35     | 2.18        | 9.86         | 8.32       | -5.31      | 3.01 |
| 5550                      | 0.00            | 0.00                  | -16.61      | 2.19       | 9.86        | 8.32         | -4.56      | 3.76            | -16.85     | 2.19        | 9.86         | 8.32       | -4.80      | 3.52 |
| 5670                      | 0.00            | 0.00                  | -16.55      | 2.20       | 9.86        | 8.32         | -4.49      | 3.83            | -17.69     | 2.20        | 9.86         | 8.32       | -5.63      | 2.69 |
| 5755                      | 0.00            | 0.27                  | -19.71      | 2.20       | 9.86        | 8.32         | -7.38      | 0.94            | -20.35     | 2.20        | 9.86         | 8.32       | -8.02      | 0.30 |
| 5795                      | 0.00            | 0.27                  | -19.51      | 2.20       | 9.86        | 8.32         | -7.18      | 1.14            | -20.48     | 2.20        | 9.86         | 8.32       | -8.15      | 0.17 |

Sample Calculation:

PSD: Power Spectral Density

The PSD within 5725 MHz to 5825 MHz are based on any 500 kHz band.

RBW Correction Factor = 10 \* log (Specified bandwidth / Measured bandwidth)

PSD Result (Conducted) = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor + RBW Correction Factor

PSD Result (e.i.r.p.) = Conducted PSD Result + Antenna Gain

The conducted PSD limit was reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. (All frequencies for FCC, 5725 MHz-5850 MHz for IC)

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN


Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## Maximum Power Spectral Density

|                        |                                    |                    |
|------------------------|------------------------------------|--------------------|
| Report No.             | 12219846H                          |                    |
| Test place             | Ise EMC Lab. No.3 Measurement Room |                    |
| Date                   | February 2, 2018                   | February 5, 2018   |
| Temperature / Humidity | 24deg. C / 31 % RH                 | 23deg. C / 35 % RH |
| Engineer               | Takumi Shimada                     |                    |
| Mode                   | Tx 11n-40                          |                    |

### 11n-40, Antenna port WA

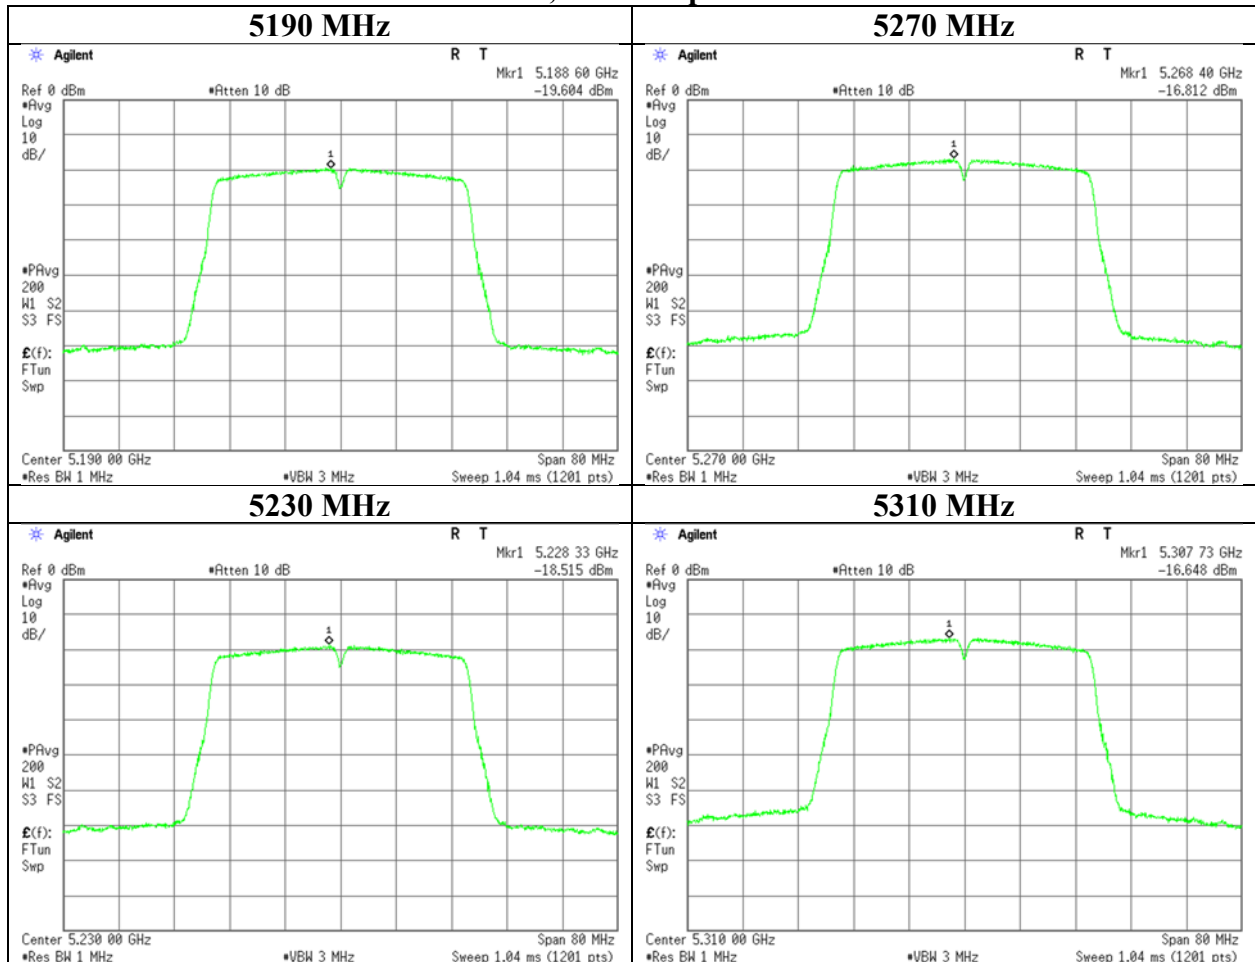

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999


Facsimile : +81 596 24 8124



## Maximum Power Spectral Density

|                        |                                    |                    |
|------------------------|------------------------------------|--------------------|
| Report No.             | 12219846H                          |                    |
| Test place             | Ise EMC Lab. No.3 Measurement Room |                    |
| Date                   | February 2, 2018                   | February 5, 2018   |
| Temperature / Humidity | 24deg. C / 31 % RH                 | 23deg. C / 35 % RH |
| Engineer               | Takumi Shimada                     | Takumi Shimada     |
| Mode                   | Tx 11n-40                          |                    |


### 11n-40, Antenna port WA

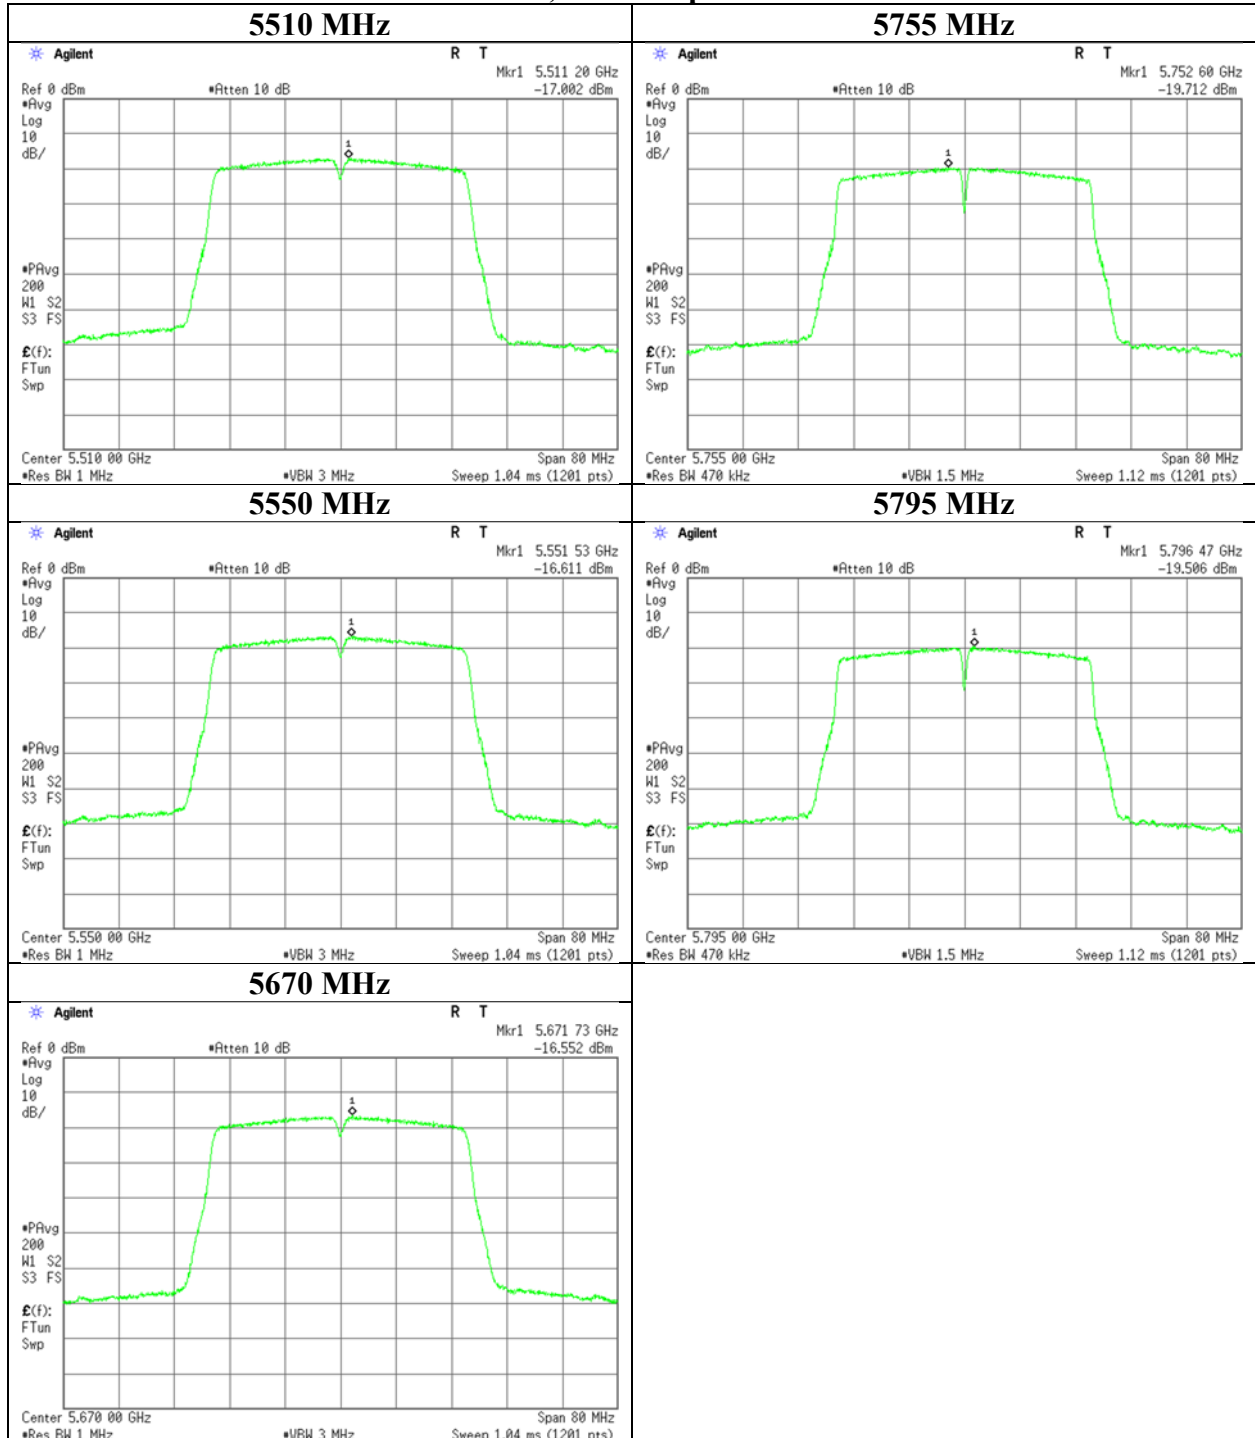

## Maximum Power Spectral Density

|                        |                                    |                    |
|------------------------|------------------------------------|--------------------|
| Report No.             | 12219846H                          |                    |
| Test place             | Ise EMC Lab. No.3 Measurement Room |                    |
| Date                   | February 2, 2018                   | February 5, 2018   |
| Temperature / Humidity | 24deg. C / 31 % RH                 | 23deg. C / 35 % RH |
| Engineer               | Takumi Shimada                     |                    |
| Mode                   | Tx 11n-40                          |                    |

### 11n-40, Antenna port WC

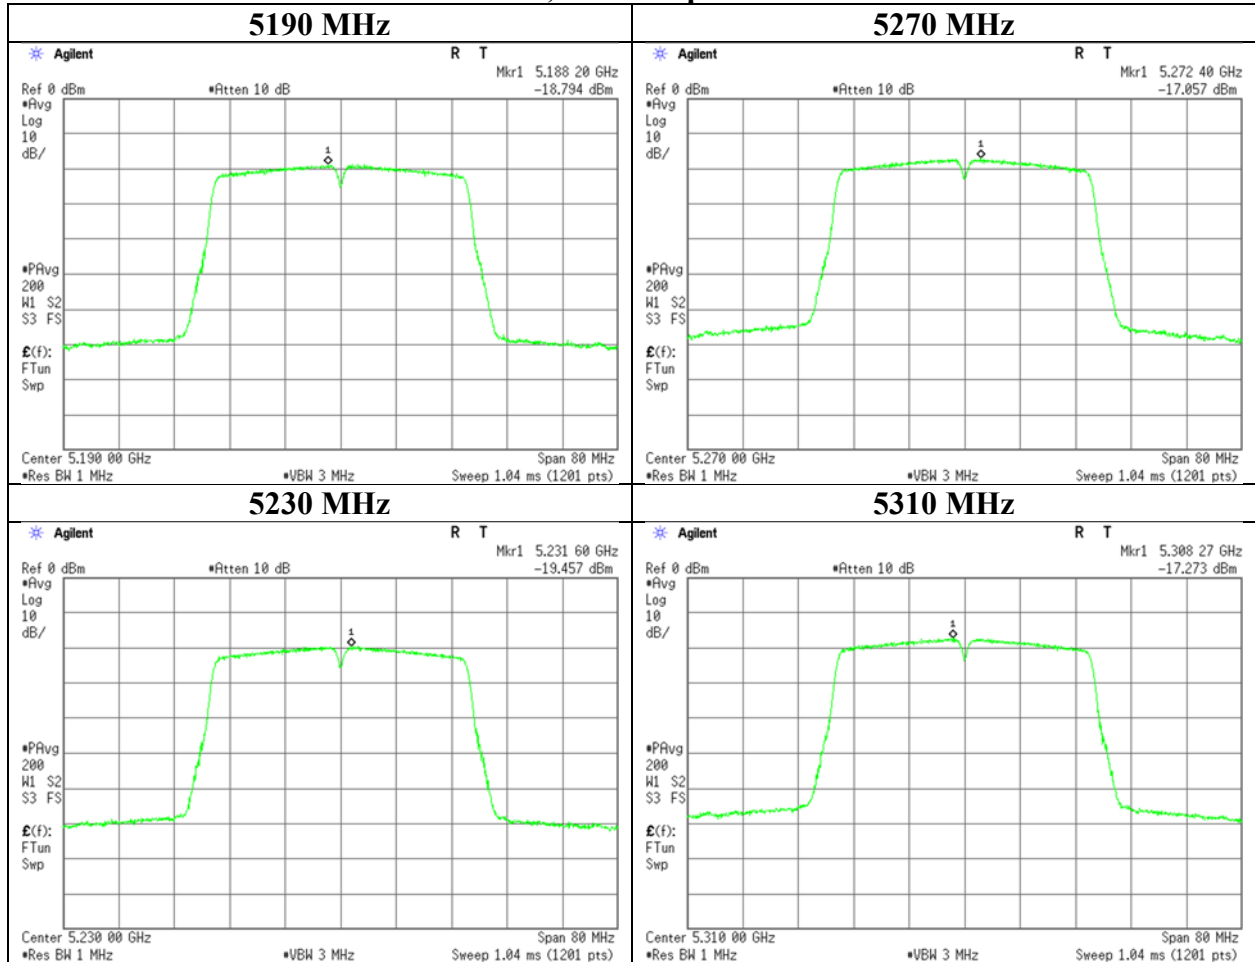

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN


Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## Maximum Power Spectral Density

|                        |                                    |                    |
|------------------------|------------------------------------|--------------------|
| Report No.             | 12219846H                          |                    |
| Test place             | Ise EMC Lab. No.3 Measurement Room |                    |
| Date                   | February 2, 2018                   | February 5, 2018   |
| Temperature / Humidity | 24deg. C / 31 % RH                 | 23deg. C / 35 % RH |
| Engineer               | Takumi Shimada                     |                    |
| Mode                   | Tx 11n-40                          |                    |

### 11n-40, Antenna port WC

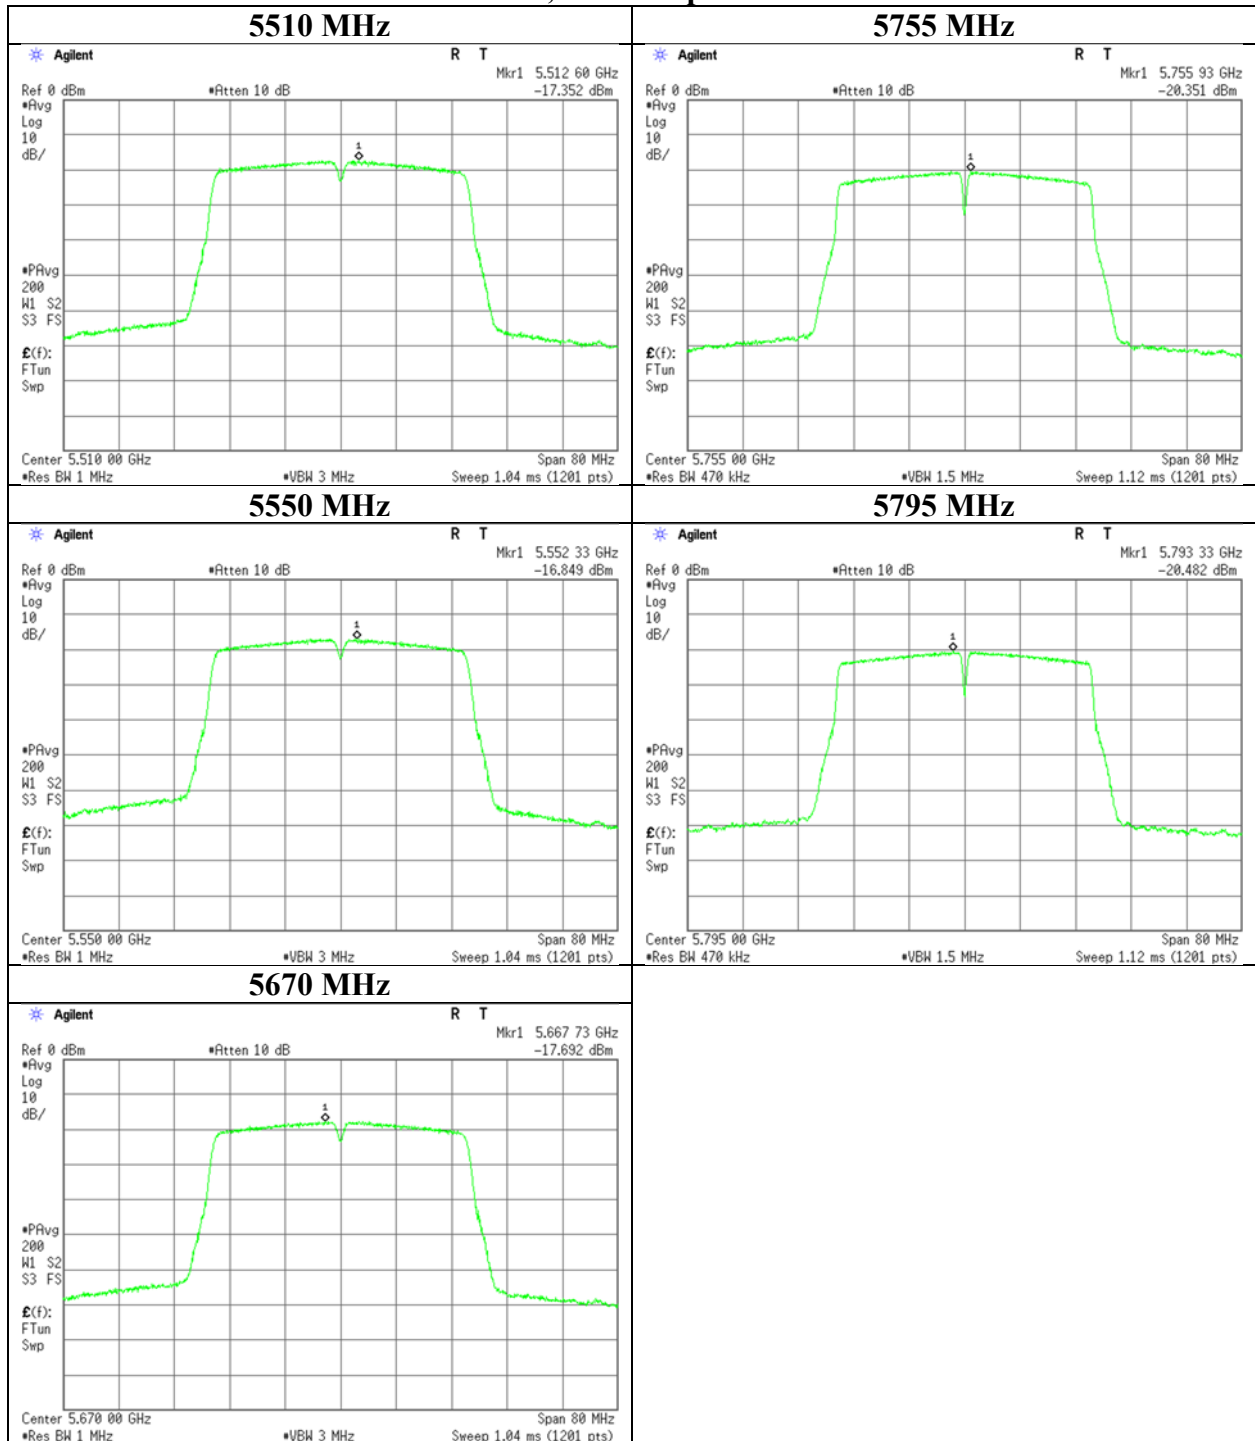

## Maximum Power Spectral Density

Report No. 12219846H  
Test place Ise EMC Lab. No.3 Measurement Room  
Date February 2, 2018 February 5, 2018  
Temperature / Humidity 24deg. C / 31 % RH 23deg. C / 35 % RH  
Engineer Takumi Shimada Takumi Shimada  
Mode Tx 11ac-40

**Antenna Port WA + WC** Applied limit: 15.407, mobile and portable client device

| Tested Frequency<br>[MHz] | PSD (Conducted) |          |           |           |       |          | PSD (e.i.r.p.) |          |           |           |       |        |
|---------------------------|-----------------|----------|-----------|-----------|-------|----------|----------------|----------|-----------|-----------|-------|--------|
|                           | Antenna         |          |           | Result    | Limit | Margin   | Antenna        |          |           | Result    | Limit | Margin |
|                           | 1               | 2        | Sum       |           |       |          | 1              | 2        | Sum       |           |       |        |
| [mW/MHz]                  | [mW/MHz]        | [mW/MHz] | [dBm/MHz] | [dBm/MHz] | [dB]  | [mW/MHz] | [mW/MHz]       | [mW/MHz] | [dBm/MHz] | [dBm/MHz] | [dB]  |        |
| 5190                      | 0.20            | 0.19     | 0.39      | -4.13     | 8.68  | 12.81    | 1.34           | 1.28     | 2.62      | 4.19      | 17.00 | 12.81  |
| 5230                      | 0.21            | 0.17     | 0.38      | -4.21     | 8.68  | 12.89    | 1.45           | 1.12     | 2.58      | 4.11      | 17.00 | 12.89  |
| 5270                      | 0.34            | 0.27     | 0.62      | -2.10     | 8.68  | 10.78    | 2.34           | 1.85     | 4.19      | 6.22      | 17.00 | 10.78  |
| 5310                      | 0.37            | 0.28     | 0.66      | -1.84     | 8.68  | 10.52    | 2.53           | 1.92     | 4.45      | 6.48      | 17.00 | 10.52  |
| 5510                      | 0.35            | 0.33     | 0.68      | -1.65     | 8.68  | 10.33    | 2.40           | 2.24     | 4.64      | 6.67      | 17.00 | 10.33  |
| 5550                      | 0.36            | 0.36     | 0.71      | -1.46     | 8.68  | 10.14    | 2.43           | 2.42     | 4.85      | 6.86      | 17.00 | 10.14  |
| 5670                      | 0.35            | 0.30     | 0.65      | -1.84     | 8.68  | 10.52    | 2.40           | 2.05     | 4.45      | 6.48      | 17.00 | 10.52  |
| 5755                      | 0.19            | 0.16     | 0.35      | -4.52     | 27.68 | 32.20    | 1.31           | 1.09     | 2.40      | 3.80      | 36.00 | 32.20  |
| 5795                      | 0.20            | 0.16     | 0.35      | -4.50     | 27.68 | 32.18    | 1.33           | 1.08     | 2.41      | 3.82      | 36.00 | 32.18  |

| Tested Frequency<br>[MHz] | Antenna Port WA |                       |             |            |             |              |            | Antenna Port WC |            |             |              |            |       |      |
|---------------------------|-----------------|-----------------------|-------------|------------|-------------|--------------|------------|-----------------|------------|-------------|--------------|------------|-------|------|
|                           | Duty Factor     | RBW Correction Factor | PSD Reading | Cable Loss | Atten. Loss | Antenna Gain | PSD Result | PSD Reading     | Cable Loss | Atten. Loss | Antenna Gain | PSD Result |       |      |
| [dB]                      | [dB]            | [dB]                  | [dBm/MHz]   | [dB]       | [dB]        | [dBi]        | [dBm/MHz]  | [dBm/MHz]       | [dB]       | [dB]        | [dBi]        | [dBm/MHz]  |       |      |
| 5190                      | 0.00            | 0.00                  | -18.92      | 2.02       | 9.84        | 8.32         | -7.06      | 1.26            | -19.10     | 2.02        | 9.84         | 8.32       | -7.24 | 1.09 |
| 5230                      | 0.00            | 0.00                  | -18.57      | 2.03       | 9.84        | 8.32         | -6.70      | 1.62            | -19.68     | 2.03        | 9.84         | 8.32       | -7.81 | 0.51 |
| 5270                      | 0.00            | 0.00                  | -16.52      | 2.04       | 9.85        | 8.32         | -4.63      | 3.69            | -17.55     | 2.04        | 9.85         | 8.32       | -5.66 | 2.67 |
| 5310                      | 0.00            | 0.00                  | -16.19      | 2.05       | 9.85        | 8.32         | -4.29      | 4.03            | -17.38     | 2.05        | 9.85         | 8.32       | -5.48 | 2.84 |
| 5510                      | 0.00            | 0.00                  | -16.56      | 2.18       | 9.86        | 8.32         | -4.52      | 3.80            | -16.85     | 2.18        | 9.86         | 8.32       | -4.81 | 3.51 |
| 5550                      | 0.00            | 0.00                  | -16.52      | 2.19       | 9.86        | 8.32         | -4.47      | 3.86            | -16.53     | 2.19        | 9.86         | 8.32       | -4.48 | 3.85 |
| 5670                      | 0.00            | 0.00                  | -16.58      | 2.20       | 9.86        | 8.32         | -4.52      | 3.80            | -17.26     | 2.20        | 9.86         | 8.32       | -5.20 | 3.12 |
| 5755                      | 0.00            | 0.27                  | -19.47      | 2.20       | 9.86        | 8.32         | -7.14      | 1.18            | -20.29     | 2.20        | 9.86         | 8.32       | -7.96 | 0.36 |
| 5795                      | 0.00            | 0.27                  | -19.41      | 2.20       | 9.86        | 8.32         | -7.08      | 1.24            | -20.32     | 2.20        | 9.86         | 8.32       | -8.00 | 0.32 |

Sample Calculation:

PSD: Power Spectral Density

The PSD within 5725 MHz to 5825 MHz are based on any 500 kHz band.

RBW Correction Factor =  $10 * \log(\text{Specified bandwidth} / \text{Measured bandwidth})$

PSD Result (Conducted) = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor + RBW Correction Factor


PSD Result (e.i.r.p.) = Conducted PSD Result + Antenna Gain

The conducted PSD limit was reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. (All frequencies for FCC, 5725 MHz-5850 MHz for IC)

## Maximum Power Spectral Density

|                        |                                    |                    |
|------------------------|------------------------------------|--------------------|
| Report No.             | 12219846H                          |                    |
| Test place             | Ise EMC Lab. No.3 Measurement Room |                    |
| Date                   | February 2, 2018                   | February 5, 2018   |
| Temperature / Humidity | 24deg. C / 31 % RH                 | 23deg. C / 35 % RH |
| Engineer               | Takumi Shimada                     |                    |
| Mode                   | Tx 11ac-40                         |                    |

### 11ac-40, Antenna port WA

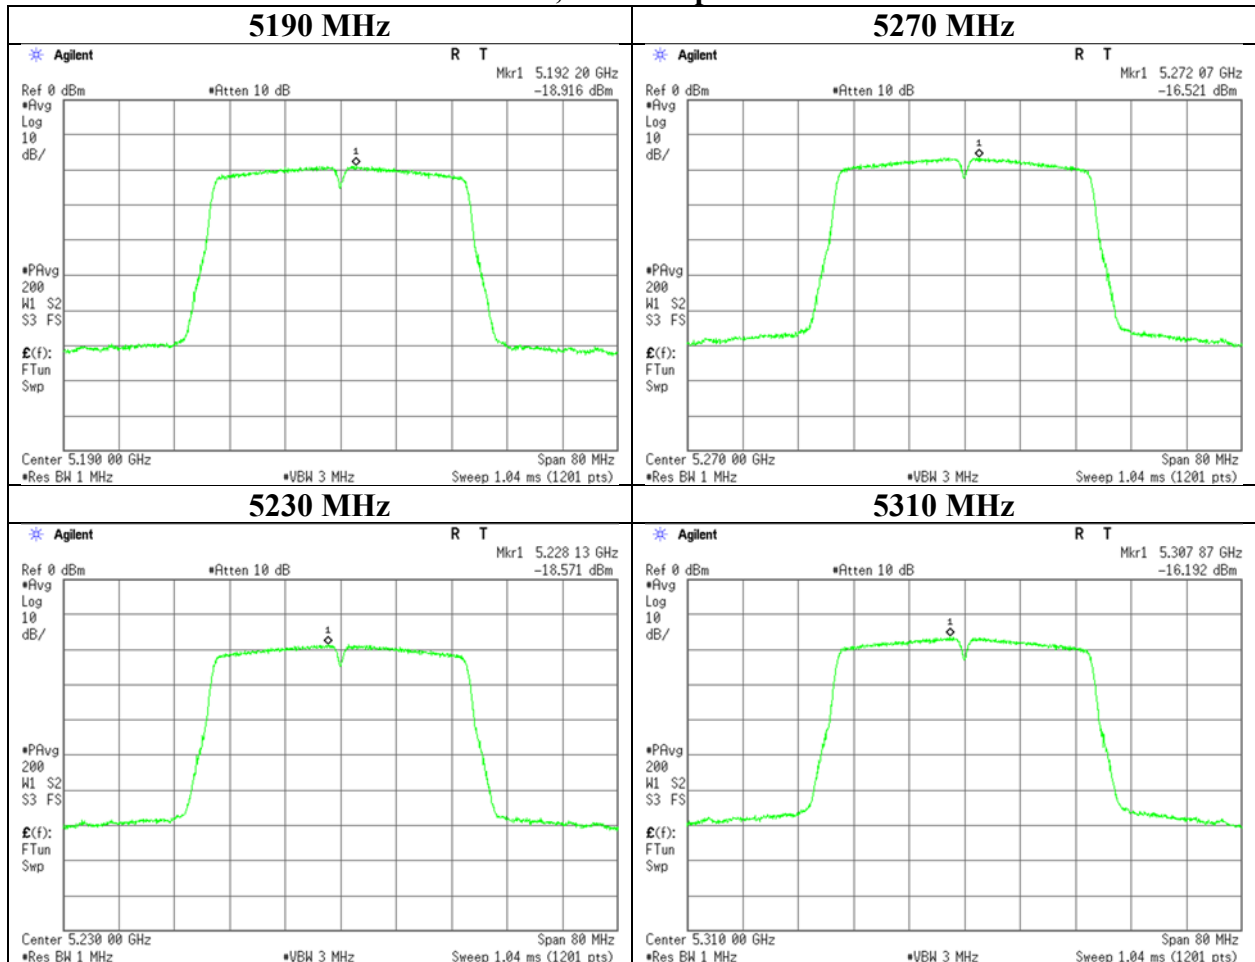

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN


Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## Maximum Power Spectral Density

|                        |                                    |                    |
|------------------------|------------------------------------|--------------------|
| Report No.             | 12219846H                          |                    |
| Test place             | Ise EMC Lab. No.3 Measurement Room |                    |
| Date                   | February 2, 2018                   | February 5, 2018   |
| Temperature / Humidity | 24deg. C / 31 % RH                 | 23deg. C / 35 % RH |
| Engineer               | Takumi Shimada                     | Takumi Shimada     |
| Mode                   | Tx 11ac-40                         |                    |


### 11ac-40, Antenna port WA

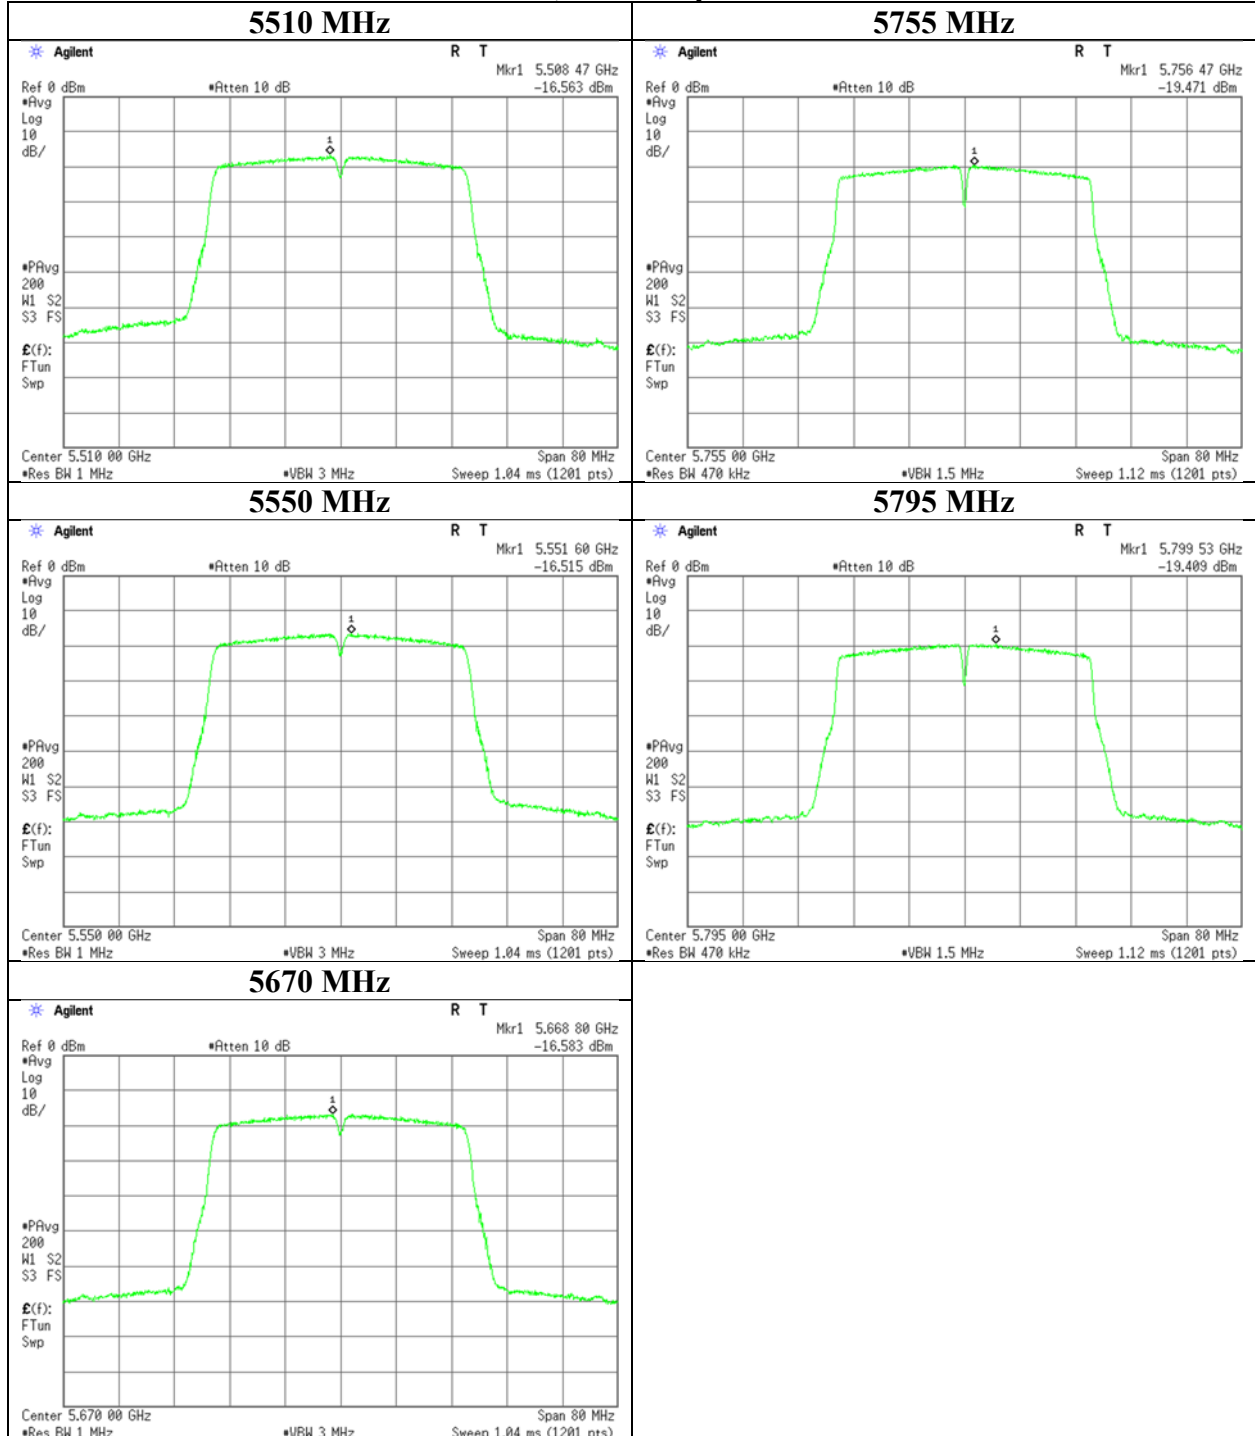

## Maximum Power Spectral Density

|                        |                                     |                    |
|------------------------|-------------------------------------|--------------------|
| Report No.             | 12219846H                           |                    |
| Test place             | Ise EMC Lab. No.11 Measurement Room |                    |
| Date                   | January 29, 2018                    | February 5, 2018   |
| Temperature / Humidity | 23deg. C / 32 % RH                  | 23deg. C / 35 % RH |
| Engineer               | Takafumi Noguchi                    | Takumi Shimada     |
| Mode                   | Tx 11ac-40                          |                    |

### 11ac-40, Antenna port WC

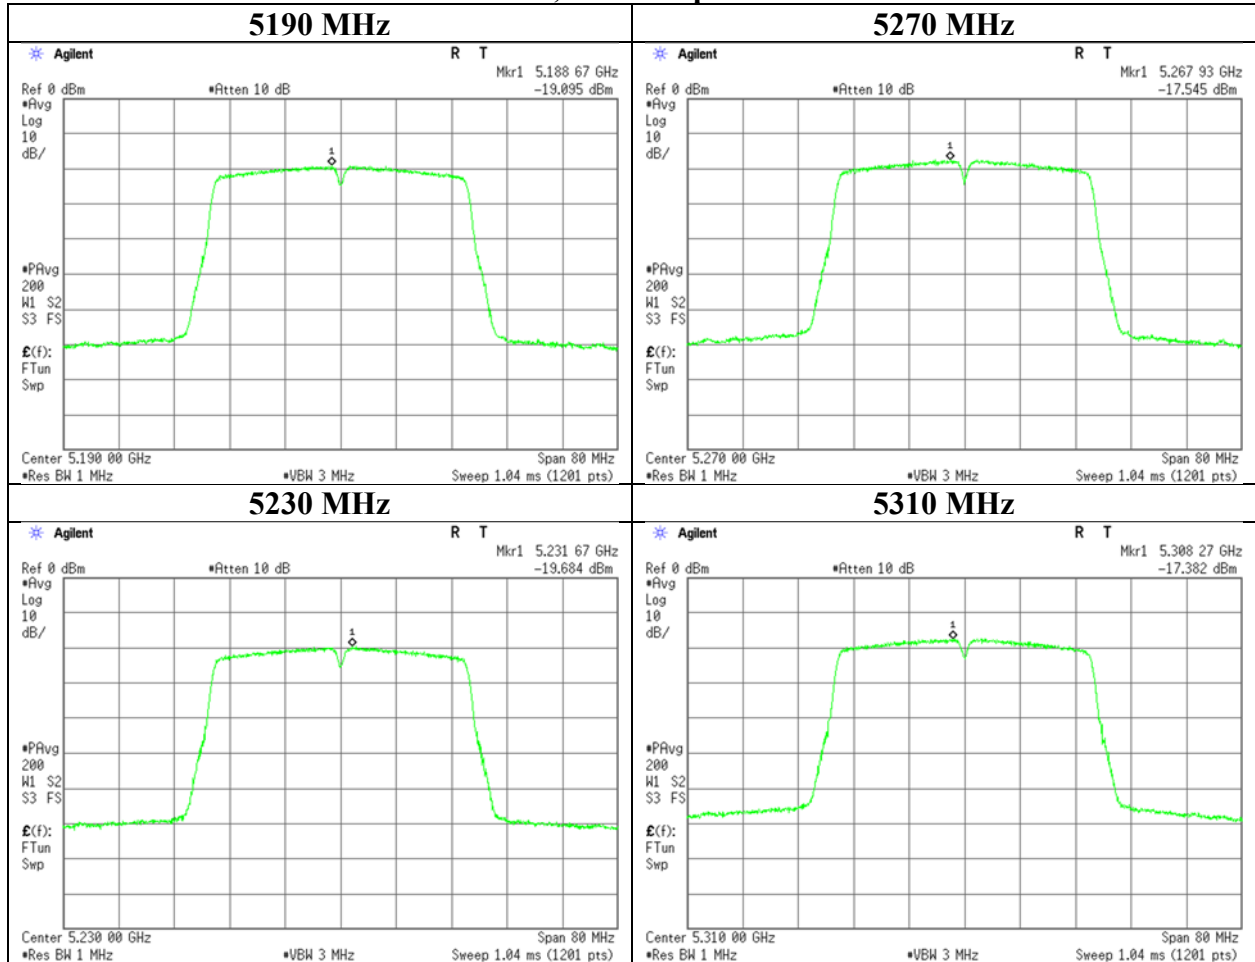

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN


Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## Maximum Power Spectral Density

|                        |                                    |                    |
|------------------------|------------------------------------|--------------------|
| Report No.             | 12219846H                          |                    |
| Test place             | Ise EMC Lab. No.3 Measurement Room |                    |
| Date                   | February 2, 2018                   | February 5, 2018   |
| Temperature / Humidity | 24deg. C / 31 % RH                 | 23deg. C / 35 % RH |
| Engineer               | Takumi Shimada                     | Takumi Shimada     |
| Mode                   | Tx 11ac-40                         |                    |

### 11ac-40, Antenna port WC

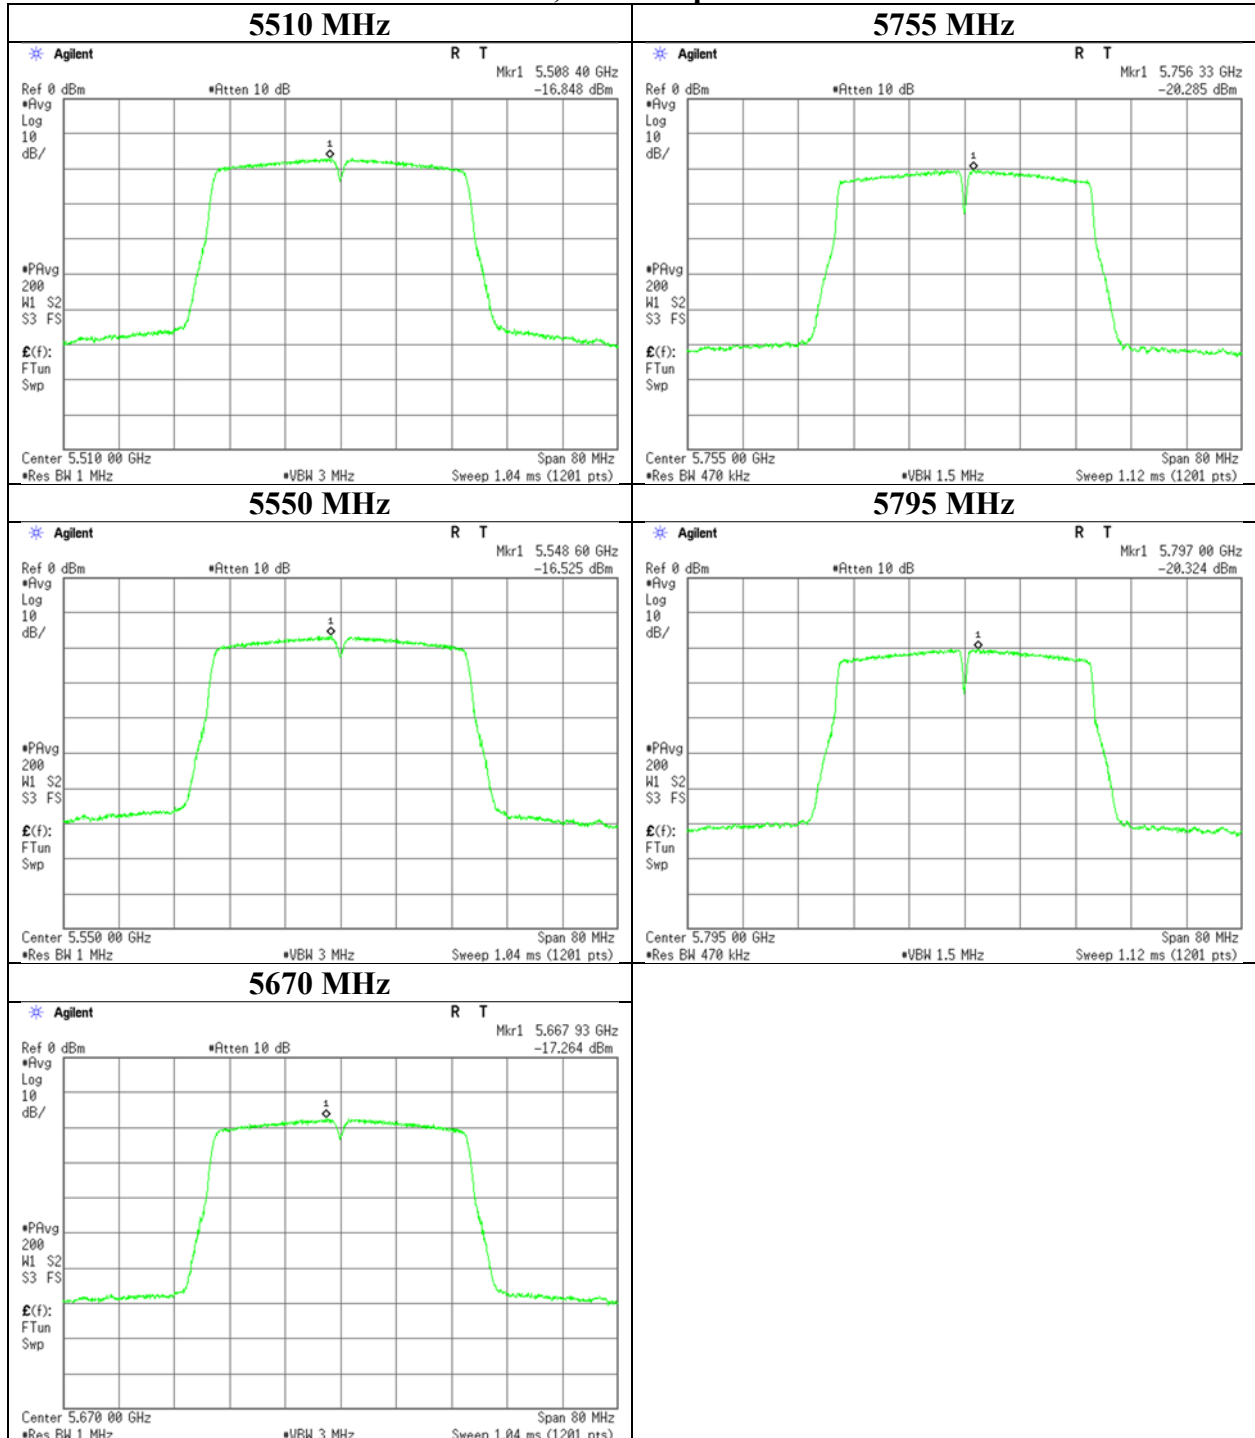



## Maximum Power Spectral Density

Report No. 12219846H  
Test place Ise EMC Lab. No.3 Measurement Room  
Date February 2, 2018 February 5, 2018  
Temperature / Humidity 24deg. C / 31 % RH 23deg. C / 35 % RH  
Engineer Takumi Shimada Takumi Shimada  
Mode Tx 11ac-80

Applied limit: 15.407, mobile and portable client device

| Tested Frequency<br>[MHz] | PSD (Conducted) |          |           |           |       |          | PSD (e.i.r.p.) |          |           |           |       |        |
|---------------------------|-----------------|----------|-----------|-----------|-------|----------|----------------|----------|-----------|-----------|-------|--------|
|                           | Antenna         |          |           | Result    | Limit | Margin   | Antenna        |          |           | Result    | Limit | Margin |
|                           | 1               | 2        | Sum       |           |       |          | 1              | 2        | Sum       |           |       |        |
| [mW/MHz]                  | [mW/MHz]        | [mW/MHz] | [dBm/MHz] | [dBm/MHz] | [dB]  | [mW/MHz] | [mW/MHz]       | [mW/MHz] | [dBm/MHz] | [dBm/MHz] | [dB]  |        |
| 5210                      | 0.09            | 0.07     | 0.16      | -8.02     | 8.68  | 16.70    | 0.61           | 0.46     | 1.07      | 0.30      | 17.00 | 16.70  |
| 5290                      | 0.15            | 0.12     | 0.27      | -5.67     | 8.68  | 14.35    | 0.99           | 0.85     | 1.84      | 2.65      | 17.00 | 14.35  |
| 5530                      | 0.14            | 0.16     | 0.30      | -5.21     | 8.68  | 13.89    | 0.98           | 1.06     | 2.04      | 3.11      | 17.00 | 13.89  |
| 5610                      | 0.16            | 0.13     | 0.29      | -5.40     | 8.68  | 14.08    | 1.09           | 0.86     | 1.96      | 2.92      | 17.00 | 14.08  |
| 5775                      | 0.08            | 0.07     | 0.15      | -8.17     | 27.68 | 35.85    | 0.58           | 0.46     | 1.04      | 0.15      | 36.00 | 35.85  |

| Tested Frequency<br>[MHz] | Duty Factor<br>[dB] | RBW Correction Factor<br>[dB] | Antenna Port WA          |                    |                     |                       | Antenna Port WC        |                           |                          |                    | PSD Result          |                       |                        |                           |
|---------------------------|---------------------|-------------------------------|--------------------------|--------------------|---------------------|-----------------------|------------------------|---------------------------|--------------------------|--------------------|---------------------|-----------------------|------------------------|---------------------------|
|                           |                     |                               | PSD Reading<br>[dBm/MHz] | Cable Loss<br>[dB] | Atten. Loss<br>[dB] | Antenna Gain<br>[dBi] | PSD Cond.<br>[dBm/MHz] | PSD e.i.r.p.<br>[dBm/MHz] | PSD Reading<br>[dBm/MHz] | Cable Loss<br>[dB] | Atten. Loss<br>[dB] | Antenna Gain<br>[dBi] | PSD Cond.<br>[dBm/MHz] | PSD e.i.r.p.<br>[dBm/MHz] |
| 5210                      | 0.00                | 0.00                          | -22.34                   | 2.03               | 9.84                | 8.32                  | -10.47                 | -2.15                     | -23.54                   | 2.03               | 9.84                | 8.32                  | -11.67                 | -3.35                     |
| 5290                      | 0.00                | 0.00                          | -20.25                   | 2.04               | 9.85                | 8.32                  | -8.36                  | -0.04                     | -20.93                   | 2.04               | 9.85                | 8.32                  | -9.04                  | -0.72                     |
| 5530                      | 0.00                | 0.00                          | -20.44                   | 2.19               | 9.86                | 8.32                  | -8.39                  | -0.07                     | -20.11                   | 2.19               | 9.86                | 8.32                  | -8.06                  | 0.26                      |
| 5610                      | 0.00                | 0.00                          | -19.98                   | 2.19               | 9.86                | 8.32                  | -7.93                  | 0.39                      | -21.01                   | 2.19               | 9.86                | 8.32                  | -8.96                  | -0.64                     |
| 5775                      | 0.00                | 0.27                          | -23.05                   | 2.20               | 9.86                | 8.32                  | -10.72                 | -2.40                     | -24.02                   | 2.20               | 9.86                | 8.32                  | -11.69                 | -3.37                     |

Sample Calculation:

PSD: Power Spectral Density

The PSD within 5725 MHz to 5825 MHz are based on any 500 kHz band.

RBW Correction Factor =  $10 * \log(\text{Specified bandwidth} / \text{Measured bandwidth})$

PSD Result (Conducted) = Reading + Cable Loss (including the cable(s) customer supplied) + Atten. Loss + Duty Factor + RBW Correction Factor

PSD Result (e.i.r.p.) = Conducted PSD Result + Antenna Gain

The conducted PSD limit was reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. (All frequencies for FCC, 5725 MHz-5850 MHz for IC)

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN


Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## Maximum Power Spectral Density

|                        |                                    |                    |
|------------------------|------------------------------------|--------------------|
| Report No.             | 12219846H                          |                    |
| Test place             | Ise EMC Lab. No.3 Measurement Room |                    |
| Date                   | February 2, 2018                   | February 5, 2018   |
| Temperature / Humidity | 24deg. C / 31 % RH                 | 23deg. C / 35 % RH |
| Engineer               | Takumi Shimada                     | Takumi Shimada     |
| Mode                   | Tx 11ac-80                         |                    |


### 11ac-80, Antenna port WA

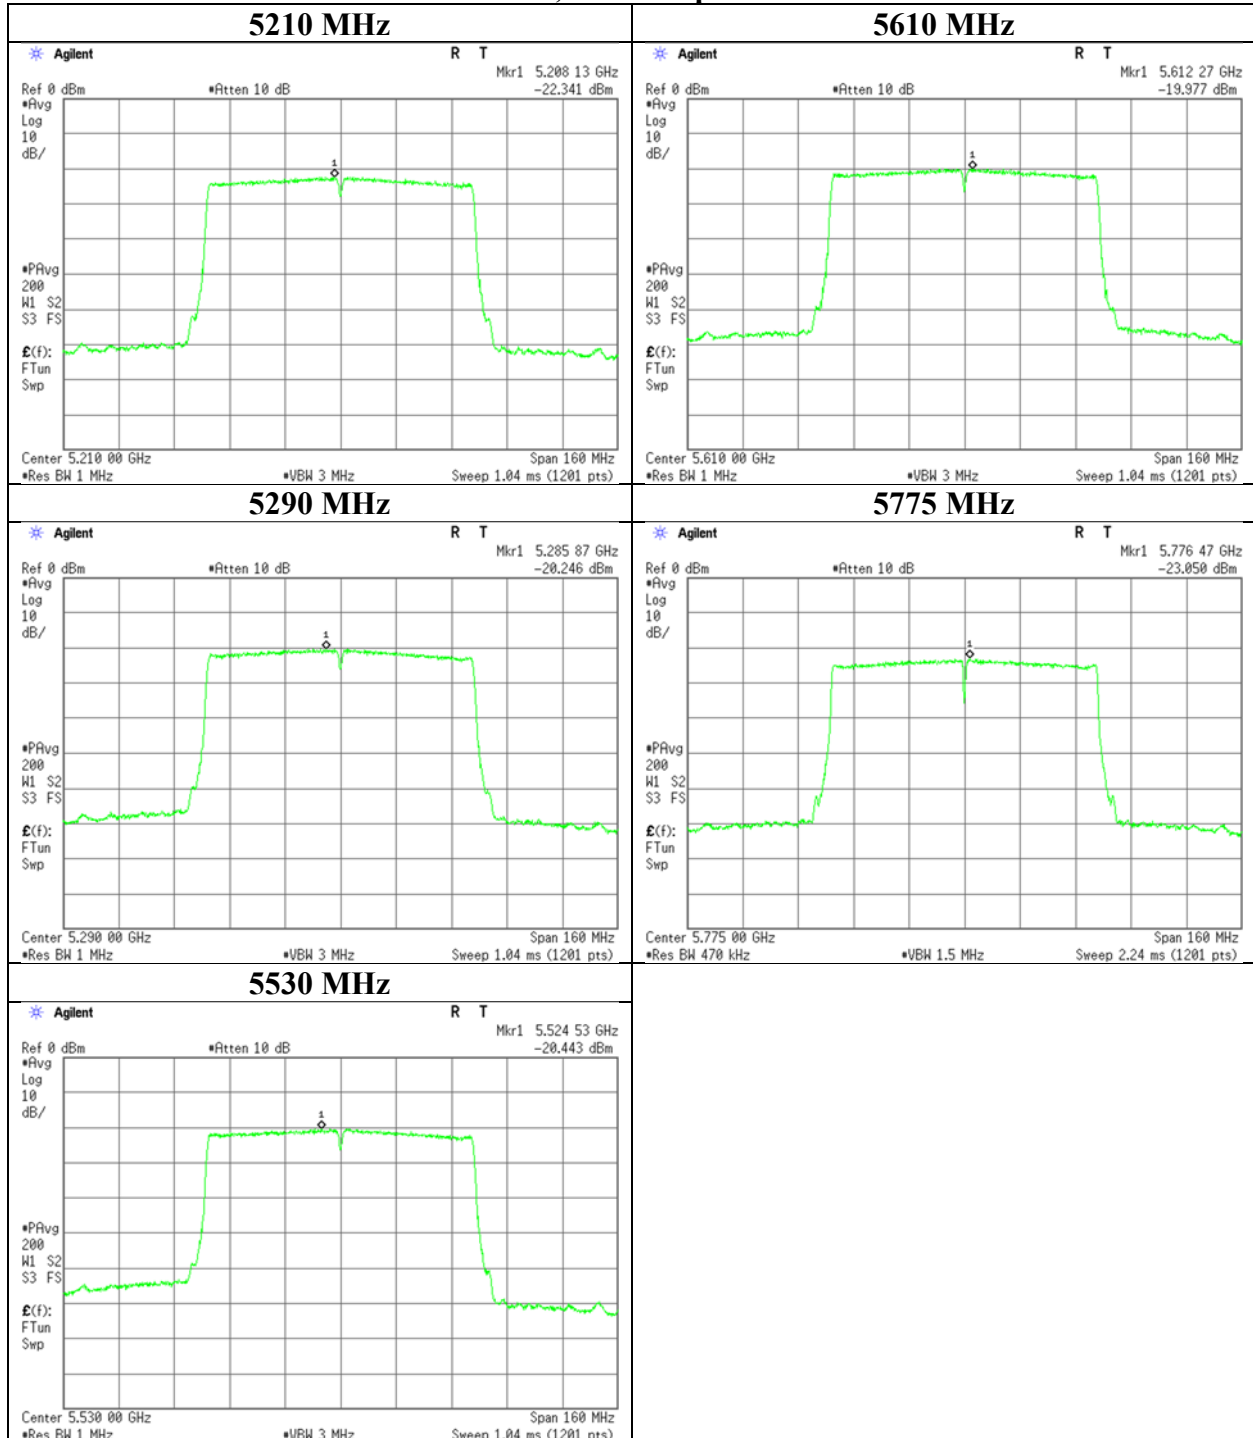

## Maximum Power Spectral Density

|                        |                                    |                    |
|------------------------|------------------------------------|--------------------|
| Report No.             | 12219846H                          |                    |
| Test place             | Ise EMC Lab. No.3 Measurement Room |                    |
| Date                   | February 2, 2018                   | February 5, 2018   |
| Temperature / Humidity | 24deg. C / 31 % RH                 | 23deg. C / 35 % RH |
| Engineer               | Takumi Shimada                     | Takumi Shimada     |
| Mode                   | Tx 11ac-80                         |                    |

### 11ac-80, Antenna port WC

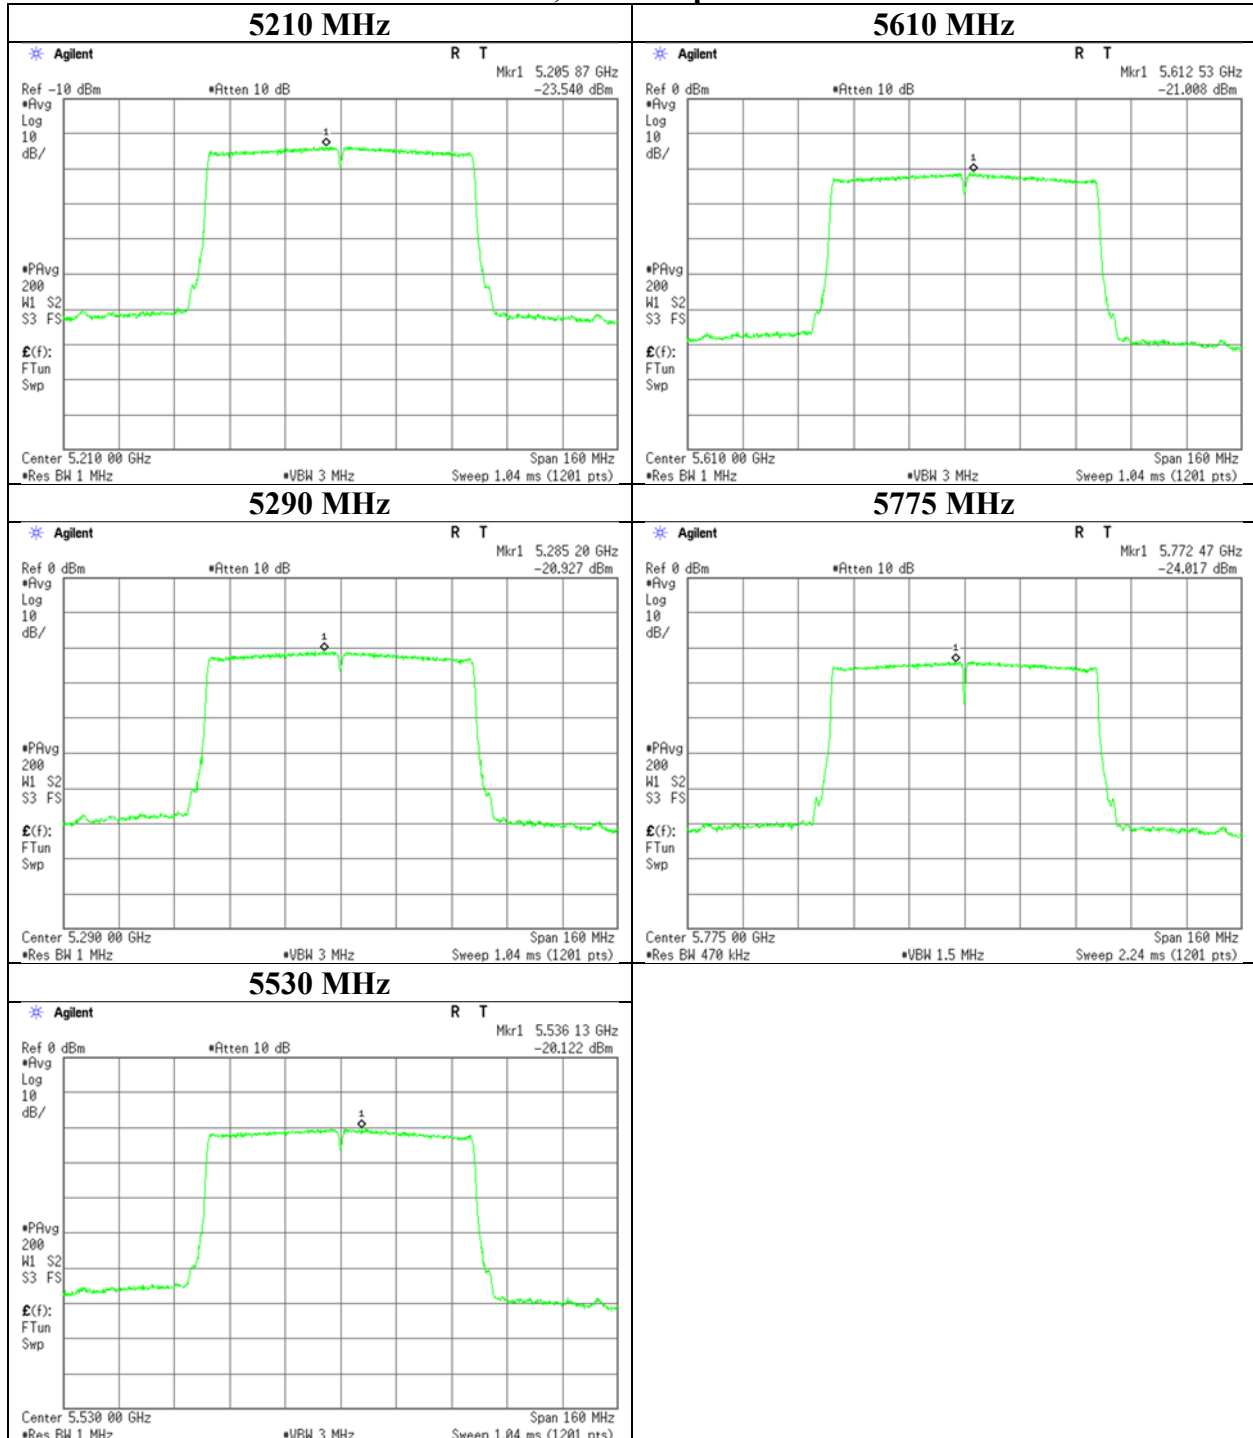

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## Radiated Spurious Emission

Report No. 12219846H  
Test place Ise EMC Lab. No.3 Semi Anechoic Chamber  
Date March 20, 2018 March 23, 2018 March 24, 2018 March 25, 2018  
Temperature / Humidity 21 deg. C / 45 % RH 24 deg. C / 30 % RH 21deg. C / 30 % RH 22 deg. C / 31 % RH  
Engineer Tomoki Matsui Takafumi Noguchi Ken Fujita Takafumi Noguchi  
Mode (1 GHz - 10 GHz) (10 GHz - 18 GHz) (18 GHz -26.5 GHz) (26.5 GHz - 40 GHz)  
Tx 11ac-20 5180 MHz

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Duty Factor [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Remark      |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|------------------|-----------------|----------------|-------------|-------------|
| Hori     | 3450.250        | PK       | 44.4           | 29.4            | 6.5       | 32.3      | -                | 48.0            | 73.9           | 25.9        |             |
| Hori     | 5150.000        | PK       | 42.1           | 32.2            | 7.2       | 31.7      | -                | 49.8            | 73.9           | 24.1        |             |
| Hori     | 10360.000       | PK       | 42.7           | 39.5            | -2.2      | 33.5      | -                | 46.5            | 73.9           | 27.4        | Floor noise |
| Hori     | 15540.000       | PK       | 43.6           | 39.0            | -0.4      | 33.0      | -                | 49.2            | 73.9           | 24.7        | Floor noise |
| Hori     | 3450.250        | AV       | 36.6           | 29.4            | 6.5       | 32.3      | -                | 40.2            | 53.9           | 13.7        |             |
| Hori     | 5150.000        | AV       | 31.9           | 32.2            | 7.2       | 31.7      | -                | 39.6            | 53.9           | 14.3        |             |
| Hori     | 10360.000       | AV       | 33.5           | 39.5            | -2.2      | 33.5      | -                | 37.3            | 53.9           | 16.6        | Floor noise |
| Hori     | 15540.000       | AV       | 35.4           | 39.0            | -0.4      | 33.0      | -                | 41.0            | 53.9           | 12.9        | Floor noise |
| Vert     | 3450.250        | PK       | 43.2           | 29.4            | 6.5       | 32.3      | -                | 46.8            | 73.9           | 27.1        |             |
| Vert     | 5150.000        | PK       | 42.7           | 32.2            | 7.2       | 31.7      | -                | 50.4            | 73.9           | 23.5        |             |
| Vert     | 10360.000       | PK       | 41.8           | 39.5            | -2.2      | 33.5      | -                | 45.6            | 73.9           | 28.3        | Floor noise |
| Vert     | 15540.000       | PK       | 43.7           | 39.0            | -0.4      | 33.0      | -                | 49.3            | 73.9           | 24.6        | Floor noise |
| Vert     | 3450.250        | AV       | 35.5           | 29.4            | 6.5       | 32.3      | -                | 39.1            | 53.9           | 14.8        |             |
| Vert     | 5150.000        | AV       | 34.4           | 32.2            | 7.2       | 31.7      | -                | 42.1            | 53.9           | 11.8        |             |
| Vert     | 10360.000       | AV       | 33.9           | 39.5            | -2.2      | 33.5      | -                | 37.7            | 53.9           | 16.2        | Floor noise |
| Vert     | 15540.000       | AV       | 35.6           | 39.0            | -0.4      | 33.0      | -                | 41.2            | 53.9           | 12.7        | Floor noise |

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz  $20\log(4.4\text{ m} / 3.0\text{ m}) = 3.33\text{ dB}$   
10 GHz - 40 GHz  $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

**UL Japan, Inc.**

**Ise EMC Lab.**



4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## Radiated Spurious Emission

|                        |   |
|------------------------|---|
| Report No.             | 12219846H                               |
| Test place             | Ise EMC Lab. No.3 Semi Anechoic Chamber |
| Date                   | March 20, 2018                          |
| Temperature / Humidity | 21 deg. C / 45 % RH                     |
| Engineer               | Tomoki Matsui                           |
| Mode                   | Tx 11ac-20 5180 MHz                     |

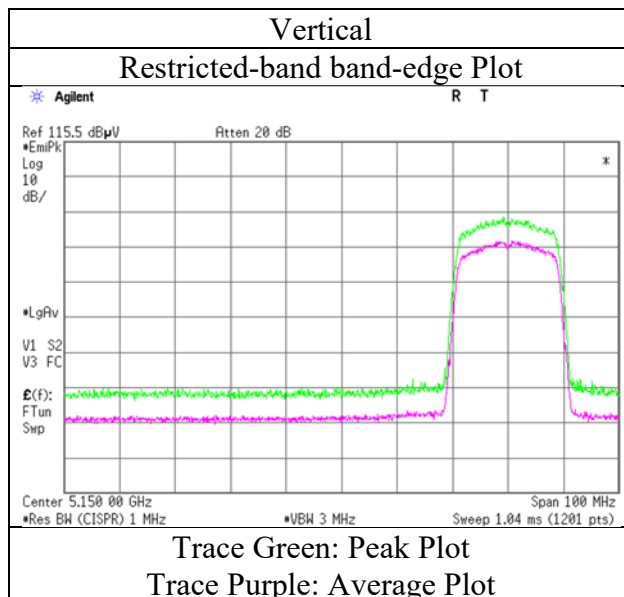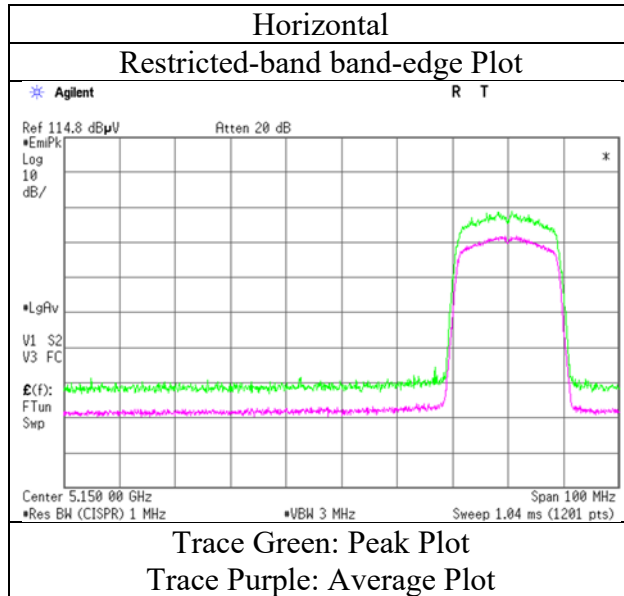

\* Final result of restricted band edge was shown in tabular data.

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## Radiated Spurious Emission

Report No. 12219846H  
Test place Ise EMC Lab. No.3 Semi Anechoic Chamber  
Date March 20, 2018 March 23, 2018 March 24, 2018 March 25, 2018  
Temperature / Humidity 21 deg. C / 45 % RH 24 deg. C / 30 % RH 21deg. C / 30 % RH 22 deg. C / 31 % RH  
Engineer Tomoki Matsui Takafumi Noguchi Ken Fujita Takafumi Noguchi  
(1 GHz - 10 GHz) (10 GHz - 18 GHz) (18 GHz - 26.5 GHz) (26.5 GHz - 40 GHz)  
Mode Tx 11ac-20 5260 MHz

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Duty Factor [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Remark      |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|------------------|-----------------|----------------|-------------|-------------|
| Hori     | 10520.000       | PK       | 44.5           | 39.7            | -2.3      | 33.5      | -                | 48.4            | 73.9           | 25.5        | Floor noise |
| Hori     | 15780.000       | PK       | 41.6           | 38.3            | -0.3      | 33.0      | -                | 46.6            | 73.9           | 27.3        | Floor noise |
| Hori     | 10520.000       | AV       | 33.7           | 39.7            | -2.3      | 33.5      | -                | 37.6            | 53.9           | 16.3        | Floor noise |
| Hori     | 15780.000       | AV       | 35.6           | 38.3            | -0.3      | 33.0      | -                | 40.6            | 53.9           | 13.3        | Floor noise |
| Vert     | 10520.000       | PK       | 42.3           | 39.7            | -2.3      | 33.5      | -                | 46.2            | 73.9           | 27.7        | Floor noise |
| Vert     | 15780.000       | PK       | 43.4           | 38.3            | -0.3      | 33.0      | -                | 48.4            | 73.9           | 25.5        | Floor noise |
| Vert     | 10520.000       | AV       | 33.7           | 39.7            | -2.3      | 33.5      | -                | 37.6            | 53.9           | 16.3        | Floor noise |
| Vert     | 15780.000       | AV       | 35.5           | 38.3            | -0.3      | 33.0      | -                | 40.5            | 53.9           | 13.4        | Floor noise |

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz  $20\log(4.4\text{ m} / 3.0\text{ m}) = 3.33\text{ dB}$   
10 GHz - 40 GHz  $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## Radiated Spurious Emission

Report No. 12219846H  
Test place Ise EMC Lab. No.3 Semi Anechoic Chamber  
Date March 20, 2018 March 23, 2018 March 24, 2018 March 25, 2018  
Temperature / Humidity 21 deg. C / 45 % RH 24 deg. C / 30 % RH 21deg. C / 30 % RH 22 deg. C / 31 % RH  
Engineer Tomoki Matsui Takafumi Noguchi Ken Fujita Takafumi Noguchi  
(1 GHz - 10 GHz) (10 GHz - 18 GHz) (18 GHz - 26.5 GHz) (26.5 GHz - 40 GHz)  
Mode Tx 11ac-20 5320 MHz

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Duty Factor [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Remark      |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|------------------|-----------------|----------------|-------------|-------------|
| Hori     | 5350.000        | PK       | 43.4           | 32.1            | 7.3       | 31.8      | -                | 51.0            | 73.9           | 22.9        |             |
| Hori     | 10640.000       | PK       | 43.3           | 39.9            | -2.3      | 33.6      | -                | 47.3            | 73.9           | 26.6        | Floor noise |
| Hori     | 15960.000       | PK       | 43.8           | 37.8            | -0.2      | 33.0      | -                | 48.4            | 73.9           | 25.5        | Floor noise |
| Hori     | 5350.000        | AV       | 34.7           | 32.1            | 7.3       | 31.8      | -                | 42.3            | 53.9           | 11.6        |             |
| Hori     | 10640.000       | AV       | 34.1           | 39.9            | -2.3      | 33.6      | -                | 38.1            | 53.9           | 15.8        | Floor noise |
| Hori     | 15960.000       | AV       | 35.5           | 37.8            | -0.2      | 33.0      | -                | 40.1            | 53.9           | 13.8        | Floor noise |
| Vert     | 5350.000        | PK       | 43.3           | 32.1            | 7.3       | 31.8      | -                | 50.9            | 73.9           | 23.0        |             |
| Vert     | 10640.000       | PK       | 42.1           | 39.9            | -2.3      | 33.6      | -                | 46.1            | 73.9           | 27.8        | Floor noise |
| Vert     | 15960.000       | PK       | 44.0           | 37.8            | -0.2      | 33.0      | -                | 48.6            | 73.9           | 25.3        | Floor noise |
| Vert     | 5350.000        | AV       | 35.1           | 32.1            | 7.3       | 31.8      | -                | 42.7            | 53.9           | 11.2        |             |
| Vert     | 10640.000       | AV       | 34.1           | 39.9            | -2.3      | 33.6      | -                | 38.1            | 53.9           | 15.8        | Floor noise |
| Vert     | 15960.000       | AV       | 35.3           | 37.8            | -0.2      | 33.0      | -                | 39.9            | 53.9           | 14.0        | Floor noise |

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz  $20\log(4.4 \text{ m} / 3.0 \text{ m}) = 3.33 \text{ dB}$   
10 GHz - 40 GHz  $20\log(1.0 \text{ m} / 3.0 \text{ m}) = -9.5 \text{ dB}$

**UL Japan, Inc.**

**Ise EMC Lab.**



4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## Radiated Spurious Emission

|                        |   |
|------------------------|---|
| Report No.             | 12219846H                               |
| Test place             | Ise EMC Lab. No.3 Semi Anechoic Chamber |
| Date                   | March 20, 2018                          |
| Temperature / Humidity | 21 deg. C / 45 % RH                     |
| Engineer               | Tomoki Matsui                           |
| Mode                   | Tx 11ac-20 5320 MHz                     |

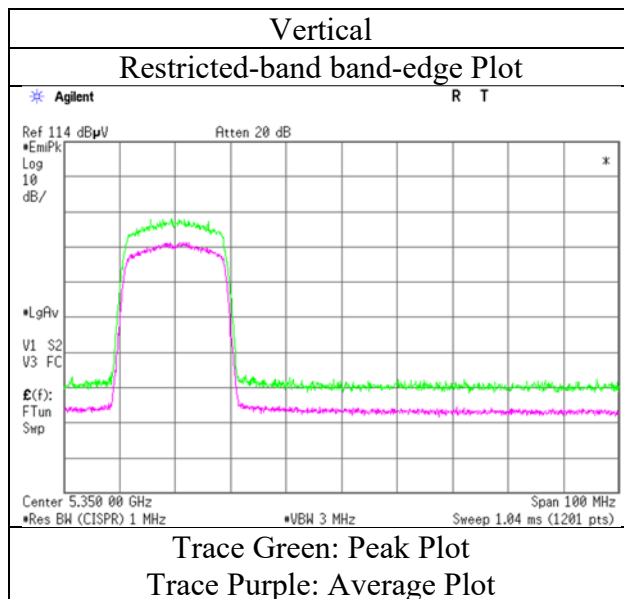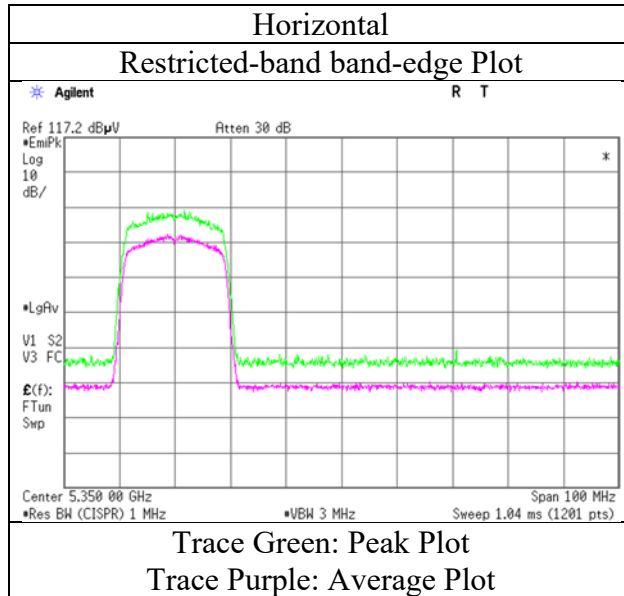

\* Final result of restricted band edge was shown in tabular data.



## Radiated Spurious Emission

Report No. 12219846H  
Test place Ise EMC Lab. No.3 Semi Anechoic Chamber  
Date March 20, 2018 March 23, 2018 March 24, 2018 March 25, 2018  
Temperature / Humidity 21 deg. C / 45 % RH 24 deg. C / 30 % RH 21deg. C / 30 % RH 22 deg. C / 31 % RH  
Engineer Tomoki Matsui Takafumi Noguchi Ken Fujita Takafumi Noguchi  
(1 GHz - 10 GHz) (10 GHz - 18 GHz) (18 GHz - 26.5 GHz) (26.5 GHz - 40 GHz)  
Mode Tx 11ac-20 5500 MHz

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Duty Factor [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Remark      |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|------------------|-----------------|----------------|-------------|-------------|
| Hori     | 3666.670        | PK       | 43.6           | 29.6            | 6.6       | 32.2      | -                | 47.6            | 73.9           | 26.3        |             |
| Hori     | 5460.000        | PK       | 41.9           | 32.0            | 7.4       | 31.8      | -                | 49.5            | 73.9           | 24.4        |             |
| Hori     | 5470.000        | PK       | 42.5           | 32.0            | 7.4       | 31.8      | -                | 50.1            | 68.2           | 18.1        |             |
| Hori     | 11000.000       | PK       | 43.0           | 40.5            | -2.2      | 33.6      | -                | 47.7            | 73.9           | 26.2        | Floor noise |
| Hori     | 16500.000       | PK       | 44.2           | 39.3            | 0.0       | 33.0      | -                | 50.5            | 73.9           | 23.4        | Floor noise |
| Hori     | 3666.670        | AV       | 38.2           | 29.6            | 6.6       | 32.2      | -                | 42.2            | 53.9           | 11.7        |             |
| Hori     | 5460.000        | AV       | 33.8           | 32.0            | 7.4       | 31.8      | -                | 41.4            | 53.9           | 12.5        |             |
| Hori     | 11000.000       | AV       | 34.4           | 40.5            | -2.2      | 33.6      | -                | 39.1            | 53.9           | 14.8        | Floor noise |
| Hori     | 16500.000       | AV       | 36.2           | 39.3            | 0.0       | 33.0      | -                | 42.5            | 53.9           | 11.4        | Floor noise |
| Vert     | 3666.670        | PK       | 43.1           | 29.6            | 6.6       | 32.2      | -                | 47.1            | 73.9           | 26.8        |             |
| Vert     | 5460.000        | PK       | 42.9           | 32.0            | 7.4       | 31.8      | -                | 50.5            | 73.9           | 23.4        |             |
| Vert     | 5470.000        | PK       | 42.8           | 32.0            | 7.4       | 31.8      | -                | 50.4            | 68.2           | 17.8        |             |
| Vert     | 11000.000       | PK       | 43.1           | 40.5            | -2.2      | 33.6      | -                | 47.8            | 73.9           | 26.1        | Floor noise |
| Vert     | 16500.000       | PK       | 44.0           | 39.3            | 0.0       | 33.0      | -                | 50.3            | 73.9           | 23.6        | Floor noise |
| Vert     | 3666.670        | AV       | 37.4           | 29.6            | 6.6       | 32.2      | -                | 41.4            | 53.9           | 12.5        |             |
| Vert     | 5460.000        | AV       | 34.2           | 32.0            | 7.4       | 31.8      | -                | 41.8            | 53.9           | 12.1        |             |
| Vert     | 11000.000       | AV       | 34.5           | 40.5            | -2.2      | 33.6      | -                | 39.2            | 53.9           | 14.7        | Floor noise |
| Vert     | 16500.000       | AV       | 35.6           | 39.3            | 0.0       | 33.0      | -                | 41.9            | 53.9           | 12.0        | Floor noise |

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz 20log (4.4 m / 3.0 m) = 3.33 dB  
10 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

**UL Japan, Inc.**

**Ise EMC Lab.**



4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## Radiated Spurious Emission

|                        |   |
|------------------------|---|
| Report No.             | 12219846H                               |
| Test place             | Ise EMC Lab. No.3 Semi Anechoic Chamber |
| Date                   | March 20, 2018                          |
| Temperature / Humidity | 21 deg. C / 45 % RH                     |
| Engineer               | Tomoki Matsui                           |
| Mode                   | Tx 11ac-20 5500 MHz                     |

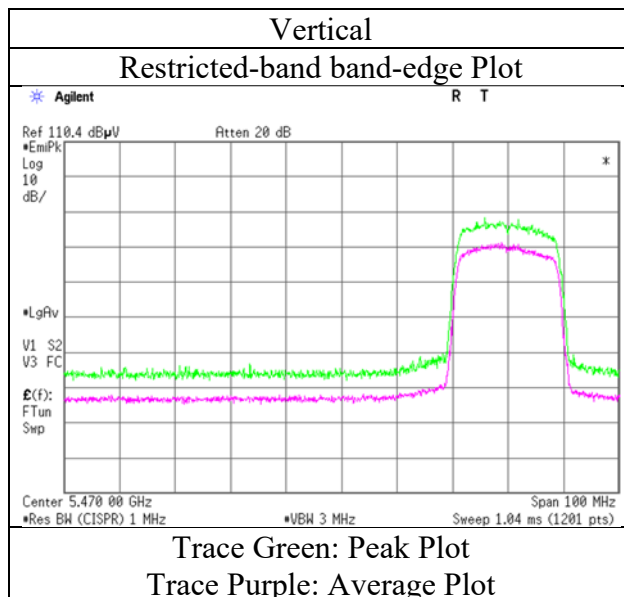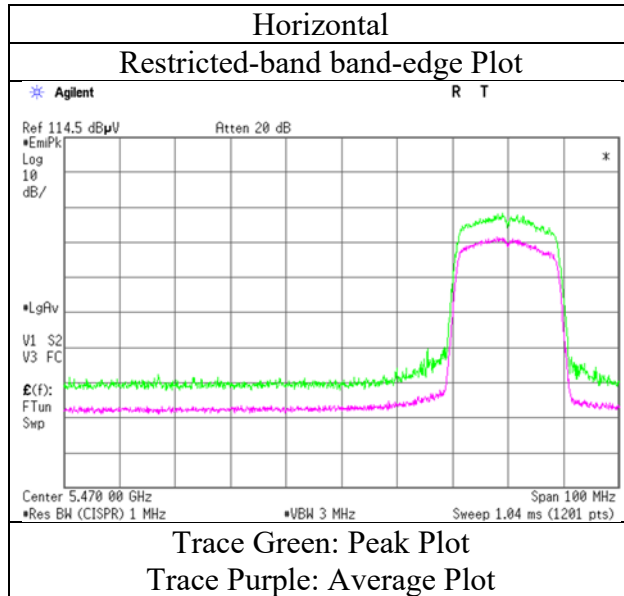

\* Final result of restricted band edge was shown in tabular data.

## Radiated Spurious Emission

Report No. 12219846H  
Test place Ise EMC Lab. No.3 Semi Anechoic Chamber  
Date March 20, 2018 March 23, 2018 March 24, 2018 March 25, 2018  
Temperature / Humidity 21 deg. C / 45 % RH 24 deg. C / 30 % RH 21deg. C / 30 % RH 22 deg. C / 31 % RH  
Engineer Tomoki Matsui Takafumi Noguchi Ken Fujita Takafumi Noguchi  
(1 GHz - 10 GHz) (10 GHz - 18 GHz) (18 GHz - 26.5 GHz) (26.5 GHz - 40 GHz)  
Mode Tx 11ac-20 5580 MHz

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Duty Factor [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Remark      |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|------------------|-----------------|----------------|-------------|-------------|
| Hori     | 3719.857        | PK       | 44.0           | 29.6            | 6.7       | 32.2      | -                | 48.1            | 73.9           | 25.8        |             |
| Hori     | 11160.000       | PK       | 42.5           | 40.4            | -2.1      | 33.6      | -                | 47.2            | 73.9           | 26.7        | Floor noise |
| Hori     | 16740.000       | PK       | 44.3           | 40.0            | 0.0       | 33.0      | -                | 51.3            | 73.9           | 22.6        | Floor noise |
| Hori     | 3719.857        | AV       | 38.1           | 29.6            | 6.7       | 32.2      | -                | 42.2            | 53.9           | 11.7        |             |
| Hori     | 11160.000       | AV       | 34.3           | 40.4            | -2.1      | 33.6      | -                | 39.0            | 53.9           | 14.9        | Floor noise |
| Hori     | 16740.000       | AV       | 35.4           | 40.0            | 0.0       | 33.0      | -                | 42.4            | 53.9           | 11.5        | Floor noise |
| Vert     | 3719.857        | PK       | 44.6           | 29.6            | 6.7       | 32.2      | -                | 48.7            | 73.9           | 25.2        |             |
| Vert     | 11160.000       | PK       | 42.6           | 40.4            | -2.1      | 33.6      | -                | 47.3            | 73.9           | 26.6        | Floor noise |
| Vert     | 16740.000       | PK       | 43.6           | 40.0            | 0.0       | 33.0      | -                | 50.6            | 73.9           | 23.3        | Floor noise |
| Vert     | 3719.857        | AV       | 39.2           | 29.6            | 6.7       | 32.2      | -                | 43.3            | 53.9           | 10.6        |             |
| Vert     | 11160.000       | AV       | 34.4           | 40.4            | -2.1      | 33.6      | -                | 39.1            | 53.9           | 14.8        | Floor noise |
| Vert     | 16740.000       | AV       | 35.3           | 40.0            | 0.0       | 33.0      | -                | 42.3            | 53.9           | 11.6        | Floor noise |

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz  $20\log(4.4 \text{ m} / 3.0 \text{ m}) = 3.33 \text{ dB}$   
10 GHz - 40 GHz  $20\log(1.0 \text{ m} / 3.0 \text{ m}) = -9.5 \text{ dB}$

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## Radiated Spurious Emission

Report No. 12219846H  
Test place Ise EMC Lab. No.3 Semi Anechoic Chamber  
Date March 20, 2018 March 23, 2018 March 24, 2018 March 25, 2018  
Temperature / Humidity 21 deg. C / 45 % RH 24 deg. C / 30 % RH 21deg. C / 30 % RH 22 deg. C / 31 % RH  
Engineer Tomoki Matsui Takafumi Noguchi Ken Fujita Takafumi Noguchi  
(1 GHz - 10 GHz) (10 GHz - 18 GHz) (18 GHz - 26.5 GHz) (26.5 GHz - 40 GHz)  
Mode Tx 11ac-20 5700 MHz

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Duty Factor [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Remark      |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|------------------|-----------------|----------------|-------------|-------------|
| Hori     | 3799.000        | PK       | 45.6           | 29.6            | 6.7       | 32.1      | -                | 49.8            | 73.9           | 24.1        |             |
| Hori     | 5725.000        | PK       | 43.4           | 32.3            | 7.5       | 31.8      | -                | 51.4            | 68.2           | 16.8        |             |
| Hori     | 11400.000       | PK       | 43.0           | 40.1            | -2.1      | 33.5      | -                | 47.5            | 73.9           | 26.4        | Floor noise |
| Hori     | 17100.000       | PK       | 44.6           | 41.4            | 0.1       | 32.9      | -                | 53.2            | 73.9           | 20.7        | Floor noise |
| Hori     | 3799.000        | AV       | 40.6           | 29.6            | 6.7       | 32.1      | -                | 44.8            | 53.9           | 9.1         |             |
| Hori     | 11400.000       | AV       | 34.0           | 40.1            | -2.1      | 33.5      | -                | 38.5            | 53.9           | 15.4        | Floor noise |
| Hori     | 17100.000       | AV       | 36.5           | 41.4            | 0.1       | 32.9      | -                | 45.1            | 53.9           | 8.8         | Floor noise |
| Vert     | 3799.000        | PK       | 43.8           | 29.6            | 6.7       | 32.1      | -                | 48.0            | 73.9           | 25.9        |             |
| Vert     | 5725.000        | PK       | 44.1           | 32.3            | 7.5       | 31.8      | -                | 52.1            | 68.2           | 16.1        |             |
| Vert     | 11400.000       | PK       | 42.0           | 40.1            | -2.1      | 33.5      | -                | 46.5            | 73.9           | 27.4        | Floor noise |
| Vert     | 17100.000       | PK       | 45.2           | 41.4            | 0.1       | 32.9      | -                | 53.8            | 73.9           | 20.1        | Floor noise |
| Vert     | 3799.000        | AV       | 37.2           | 29.6            | 6.7       | 32.1      | -                | 41.4            | 53.9           | 12.5        |             |
| Vert     | 11400.000       | AV       | 34.1           | 40.1            | -2.1      | 33.5      | -                | 38.6            | 53.9           | 15.3        | Floor noise |
| Vert     | 17100.000       | AV       | 36.4           | 41.4            | 0.1       | 32.9      | -                | 45.0            | 53.9           | 8.9         | Floor noise |

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz 20log (4.4 m / 3.0 m) = 3.33 dB  
10 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

**UL Japan, Inc.**

**Ise EMC Lab.**



4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## Radiated Spurious Emission

|                        |   |
|------------------------|---|
| Report No.             | 12219846H                               |
| Test place             | Ise EMC Lab. No.3 Semi Anechoic Chamber |
| Date                   | March 20, 2018                          |
| Temperature / Humidity | 21 deg. C / 45 % RH                     |
| Engineer               | Tomoki Matsui                           |
| Mode                   | Tx 11ac-20 5700 MHz                     |

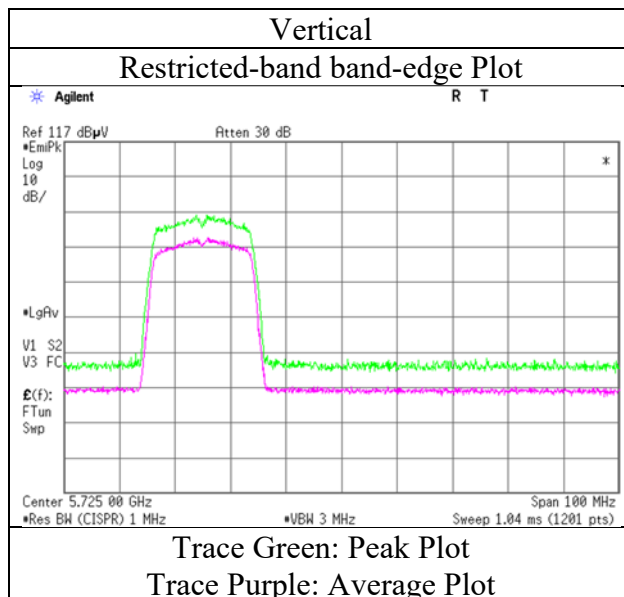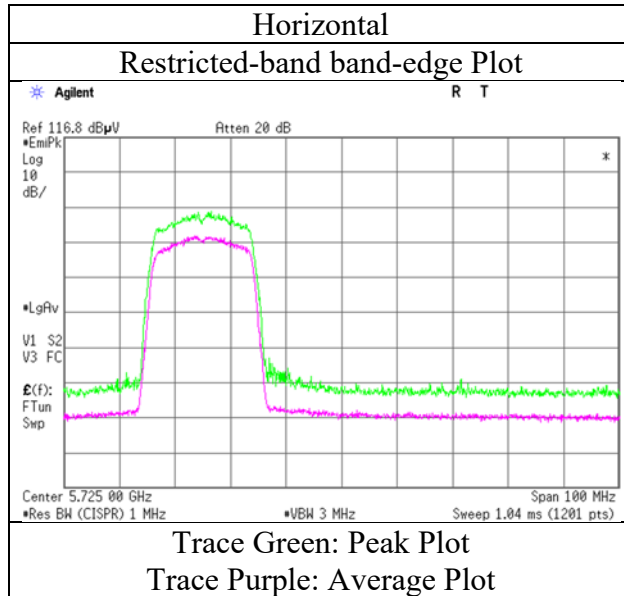

\* Final result of restricted band edge was shown in tabular data.

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## Radiated Spurious Emission

Report No. 12219846H  
Test place Ise EMC Lab. No.3 Semi Anechoic Chamber  
Date March 20, 2018 March 23, 2018 March 24, 2018 March 25, 2018  
Temperature / Humidity 21 deg. C / 45 % RH 24 deg. C / 30 % RH 21deg. C / 30 % RH 22 deg. C / 31 % RH  
Engineer Tomoki Matsui Takafumi Noguchi Ken Fujita Takafumi Noguchi  
(1 GHz - 10 GHz) (10 GHz - 18 GHz) (18 GHz - 26.5 GHz) (26.5 GHz - 40 GHz)  
Mode Tx 11ac-20 5745 MHz

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Duty Factor [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Remark      |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|------------------|-----------------|----------------|-------------|-------------|
| Hori     | 3828.000        | PK       | 43.8           | 29.7            | 6.7       | 32.1      | -                | 48.1            | 73.9           | 25.8        |             |
| Hori     | 5650.000        | PK       | 41.9           | 32.2            | 7.5       | 31.8      | -                | 49.8            | 68.2           | 18.4        |             |
| Hori     | 5700.000        | PK       | 41.1           | 32.3            | 7.5       | 31.8      | -                | 49.1            | 105.2          | 56.1        |             |
| Hori     | 5720.000        | PK       | 43.0           | 32.3            | 7.5       | 31.8      | -                | 51.0            | 110.8          | 59.8        |             |
| Hori     | 5725.000        | PK       | 44.7           | 32.3            | 7.5       | 31.8      | -                | 52.7            | 122.2          | 69.5        |             |
| Hori     | 11490.000       | PK       | 42.0           | 40.1            | -2.0      | 33.5      | -                | 46.6            | 73.9           | 27.3        | Floor noise |
| Hori     | 17235.000       | PK       | 44.7           | 42.2            | 0.1       | 32.9      | -                | 54.1            | 73.9           | 19.8        | Floor noise |
| Hori     | 3828.000        | AV       | 38.5           | 29.7            | 6.7       | 32.1      | -                | 42.8            | 53.9           | 11.1        |             |
| Hori     | 11490.000       | AV       | 34.0           | 40.1            | -2.0      | 33.5      | -                | 38.6            | 53.9           | 15.3        | Floor noise |
| Hori     | 17235.000       | AV       | 36.6           | 42.2            | 0.1       | 32.9      | -                | 46.0            | 53.9           | 7.9         | Floor noise |
| Vert     | 3828.000        | PK       | 42.8           | 29.7            | 6.7       | 32.1      | -                | 47.1            | 73.9           | 26.8        |             |
| Vert     | 5650.000        | PK       | 42.1           | 32.2            | 7.5       | 31.8      | -                | 50.0            | 68.2           | 18.2        |             |
| Vert     | 5700.000        | PK       | 42.2           | 32.3            | 7.5       | 31.8      | -                | 50.2            | 105.2          | 55.0        |             |
| Vert     | 5720.000        | PK       | 43.4           | 32.3            | 7.5       | 31.8      | -                | 51.4            | 110.8          | 59.4        |             |
| Vert     | 5725.000        | PK       | 45.8           | 32.3            | 7.5       | 31.8      | -                | 53.8            | 122.2          | 68.4        |             |
| Vert     | 11490.000       | PK       | 42.8           | 40.1            | -2.0      | 33.5      | -                | 47.4            | 73.9           | 26.5        | Floor noise |
| Vert     | 17235.000       | PK       | 45.3           | 42.2            | 0.1       | 32.9      | -                | 54.7            | 73.9           | 19.2        | Floor noise |
| Vert     | 3828.000        | AV       | 36.4           | 29.7            | 6.7       | 32.1      | -                | 40.7            | 53.9           | 13.2        |             |
| Vert     | 11490.000       | AV       | 34.0           | 40.1            | -2.0      | 33.5      | -                | 38.6            | 53.9           | 15.3        | Floor noise |
| Vert     | 17235.000       | AV       | 36.4           | 42.2            | 0.1       | 32.9      | -                | 45.8            | 53.9           | 8.1         | Floor noise |

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz  $20\log(4.4 \text{ m} / 3.0 \text{ m}) = 3.33 \text{ dB}$   
10 GHz - 40 GHz  $20\log(1.0 \text{ m} / 3.0 \text{ m}) = -9.5 \text{ dB}$

**UL Japan, Inc.**

**Ise EMC Lab.**



4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## Radiated Spurious Emission

|                        |   |
|------------------------|---|
| Report No.             | 12219846H                               |
| Test place             | Ise EMC Lab. No.3 Semi Anechoic Chamber |
| Date                   | March 20, 2018                          |
| Temperature / Humidity | 21 deg. C / 45 % RH                     |
| Engineer               | Tomoki Matsui                           |
| Mode                   | Tx 11ac-20 5745 MHz                     |

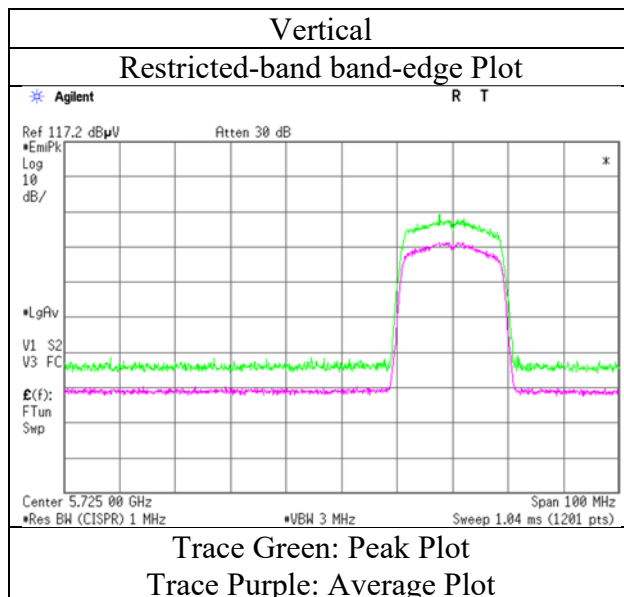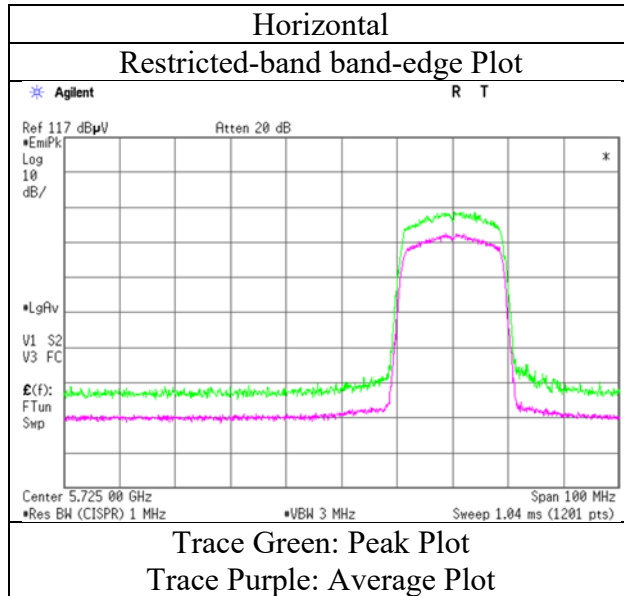

\* Final result of restricted band edge was shown in tabular data.

## Radiated Spurious Emission

Report No. 12219846H  
Test place Ise EMC Lab. No.3 Semi Anechoic Chamber  
Date March 20, 2018 March 23, 2018 March 24, 2018 March 25, 2018  
Temperature / Humidity 21 deg. C / 45 % RH 24 deg. C / 30 % RH 21deg. C / 30 % RH 22 deg. C / 31 % RH  
Engineer Tomoki Matsui Takafumi Noguchi Ken Fujita Takafumi Noguchi  
(1 GHz - 10 GHz) (10 GHz - 18 GHz) (18 GHz - 26.5 GHz) (26.5 GHz - 40 GHz)  
Mode Tx 11ac-20 5785 MHz

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Duty Factor [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Remark      |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|------------------|-----------------|----------------|-------------|-------------|
| Hori     | 3855.184        | PK       | 44.4           | 29.7            | 6.7       | 32.1      | -                | 48.7            | 73.9           | 25.2        |             |
| Hori     | 11570.000       | PK       | 42.3           | 40.0            | -1.9      | 33.5      | -                | 46.9            | 73.9           | 27.0        | Floor noise |
| Hori     | 17355.000       | PK       | 43.6           | 42.9            | 0.2       | 32.9      | -                | 53.8            | 73.9           | 20.1        | Floor noise |
| Hori     | 3855.184        | AV       | 38.6           | 29.7            | 6.7       | 32.1      | -                | 42.9            | 53.9           | 11.0        |             |
| Hori     | 11570.000       | AV       | 34.1           | 40.0            | -1.9      | 33.5      | -                | 38.7            | 53.9           | 15.2        | Floor noise |
| Hori     | 17355.000       | AV       | 36.0           | 42.9            | 0.2       | 32.9      | -                | 46.2            | 53.9           | 7.7         | Floor noise |
| Vert     | 3855.184        | PK       | 43.5           | 29.7            | 6.7       | 32.1      | -                | 47.8            | 73.9           | 26.1        |             |
| Vert     | 11570.000       | PK       | 42.5           | 40.0            | -1.9      | 33.5      | -                | 47.1            | 73.9           | 26.8        | Floor noise |
| Vert     | 17355.000       | PK       | 43.4           | 42.9            | 0.2       | 32.9      | -                | 53.6            | 73.9           | 20.3        | Floor noise |
| Vert     | 3855.184        | AV       | 36.6           | 29.7            | 6.7       | 32.1      | -                | 40.9            | 53.9           | 13.0        |             |
| Vert     | 11570.000       | AV       | 34.2           | 40.0            | -1.9      | 33.5      | -                | 38.8            | 53.9           | 15.1        | Floor noise |
| Vert     | 17355.000       | AV       | 36.1           | 42.9            | 0.2       | 32.9      | -                | 46.3            | 53.9           | 7.6         | Floor noise |

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz  $20\log(4.4 \text{ m} / 3.0 \text{ m}) = 3.33 \text{ dB}$   
10 GHz - 40 GHz  $20\log(1.0 \text{ m} / 3.0 \text{ m}) = -9.5 \text{ dB}$

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124



## Radiated Spurious Emission

Report No. 12219846H  
Test place Ise EMC Lab. No.3 Semi Anechoic Chamber  
Date March 20, 2018 March 23, 2018 March 24, 2018 March 25, 2018  
Temperature / Humidity 21 deg. C / 45 % RH 24 deg. C / 30 % RH 21deg. C / 30 % RH 22 deg. C / 31 % RH  
Engineer Tomoki Matsui Takafumi Noguchi Ken Fujita Takafumi Noguchi  
(1 GHz - 10 GHz) (10 GHz - 18 GHz) (18 GHz - 26.5 GHz) (26.5 GHz - 40 GHz)  
Mode Tx 11ac-20 5825 MHz

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Duty Factor [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Remark      |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|------------------|-----------------|----------------|-------------|-------------|
| Hori     | 3883.240        | PK       | 44.2           | 29.7            | 6.7       | 32.1      | -                | 48.5            | 73.9           | 25.4        |             |
| Hori     | 5850.000        | PK       | 42.7           | 32.5            | 7.5       | 31.8      | -                | 50.9            | 122.2          | 71.3        |             |
| Hori     | 5855.000        | PK       | 41.9           | 32.5            | 7.5       | 31.8      | -                | 50.1            | 110.8          | 60.7        |             |
| Hori     | 5875.000        | PK       | 41.1           | 32.5            | 7.5       | 31.8      | -                | 49.3            | 105.2          | 55.9        |             |
| Hori     | 5925.000        | PK       | 41.2           | 32.6            | 7.6       | 31.8      | -                | 49.6            | 68.2           | 18.6        |             |
| Hori     | 11650.000       | PK       | 43.5           | 39.9            | -1.9      | 33.4      | -                | 48.1            | 73.9           | 25.8        | Floor noise |
| Hori     | 17475.000       | PK       | 44.0           | 43.6            | 0.2       | 32.9      | -                | 54.9            | 73.9           | 19.0        | Floor noise |
| Hori     | 3883.240        | AV       | 38.1           | 29.7            | 6.7       | 32.1      | -                | 42.4            | 53.9           | 11.5        |             |
| Hori     | 11650.000       | AV       | 35.1           | 39.9            | -1.9      | 33.4      | -                | 39.7            | 53.9           | 14.2        | Floor noise |
| Hori     | 17475.000       | AV       | 35.4           | 43.6            | 0.2       | 32.9      | -                | 46.3            | 53.9           | 7.6         | Floor noise |
| Vert     | 3883.240        | PK       | 42.3           | 29.7            | 6.7       | 32.1      | -                | 46.6            | 73.9           | 27.3        |             |
| Vert     | 5850.000        | PK       | 42.7           | 32.5            | 7.5       | 31.8      | -                | 50.9            | 122.2          | 71.3        |             |
| Vert     | 5855.000        | PK       | 42.6           | 32.5            | 7.5       | 31.8      | -                | 50.8            | 110.8          | 60.0        |             |
| Vert     | 5875.000        | PK       | 41.9           | 32.5            | 7.5       | 31.8      | -                | 50.1            | 105.2          | 55.1        |             |
| Vert     | 5925.000        | PK       | 41.0           | 32.6            | 7.6       | 31.8      | -                | 49.4            | 68.2           | 18.8        |             |
| Vert     | 11650.000       | PK       | 44.1           | 39.9            | -1.9      | 33.4      | -                | 48.7            | 73.9           | 25.2        | Floor noise |
| Vert     | 17475.000       | PK       | 44.9           | 43.6            | 0.2       | 32.9      | -                | 55.8            | 73.9           | 18.1        | Floor noise |
| Vert     | 3883.240        | AV       | 35.8           | 29.7            | 6.7       | 32.1      | -                | 40.1            | 53.9           | 13.8        |             |
| Vert     | 11650.000       | AV       | 35.5           | 39.9            | -1.9      | 33.4      | -                | 40.1            | 53.9           | 13.8        | Floor noise |
| Vert     | 17475.000       | AV       | 34.6           | 43.6            | 0.2       | 32.9      | -                | 45.5            | 53.9           | 8.4         | Floor noise |

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz  $20\log(4.4 \text{ m} / 3.0 \text{ m}) = 3.33 \text{ dB}$   
10 GHz - 40 GHz  $20\log(1.0 \text{ m} / 3.0 \text{ m}) = -9.5 \text{ dB}$

**UL Japan, Inc.**

**Ise EMC Lab.**



4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## Radiated Spurious Emission

|                        |   |
|------------------------|---|
| Report No.             | 12219846H                               |
| Test place             | Ise EMC Lab. No.3 Semi Anechoic Chamber |
| Date                   | March 20, 2018                          |
| Temperature / Humidity | 21 deg. C / 45 % RH                     |
| Engineer               | Tomoki Matsui                           |
| Mode                   | Tx 11ac-20 5825 MHz                     |

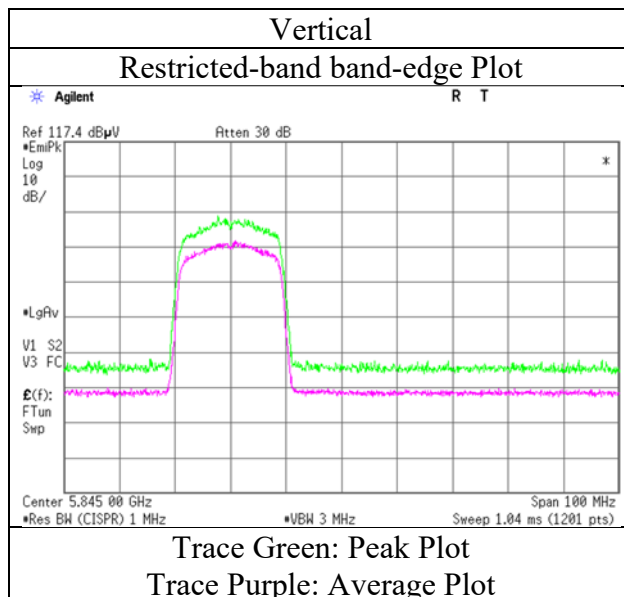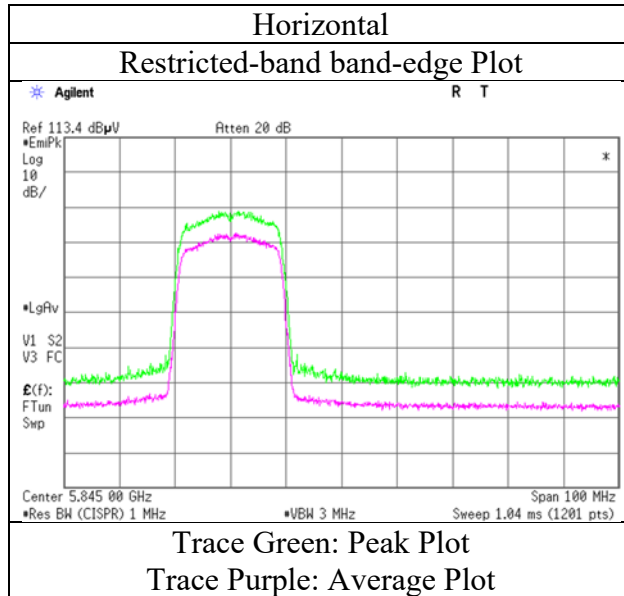

\* Final result of restricted band edge was shown in tabular data.

## Radiated Spurious Emission

Report No. 12219846H  
Test place Ise EMC Lab. No.3 Semi Anechoic Chamber  
Date March 20, 2018 March 23, 2018 March 24, 2018 March 25, 2018  
Temperature / Humidity 21 deg. C / 45 % RH 24 deg. C / 30 % RH 21deg. C / 30 % RH 22 deg. C / 31 % RH  
Engineer Tomoki Matsui Takafumi Noguchi Ken Fujita Takafumi Noguchi  
(1 GHz - 10 GHz) (10 GHz - 18 GHz) (18 GHz - 26.5 GHz) (26.5 GHz - 40 GHz)  
Mode Tx 11ac-40 5190 MHz

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Duty Factor [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Remark      |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|------------------|-----------------|----------------|-------------|-------------|
| Hori     | 5150.000        | PK       | 42.9           | 32.2            | 7.2       | 31.7      | -                | 50.6            | 73.9           | 23.3        |             |
| Hori     | 10380.000       | PK       | 44.2           | 39.5            | -2.3      | 33.5      | -                | 47.9            | 73.9           | 26.0        | Floor noise |
| Hori     | 15570.000       | PK       | 42.3           | 38.9            | -0.4      | 33.0      | -                | 47.8            | 73.9           | 26.1        | Floor noise |
| Hori     | 5150.000        | AV       | 35.1           | 32.2            | 7.2       | 31.7      | -                | 42.8            | 53.9           | 11.1        |             |
| Hori     | 10380.000       | AV       | 35.7           | 39.5            | -2.3      | 33.5      | -                | 39.4            | 53.9           | 14.5        | Floor noise |
| Hori     | 15570.000       | AV       | 34.1           | 38.9            | -0.4      | 33.0      | -                | 39.6            | 53.9           | 14.3        | Floor noise |
| Vert     | 5150.000        | PK       | 43.1           | 32.2            | 7.2       | 31.7      | -                | 50.8            | 73.9           | 23.1        |             |
| Vert     | 10380.000       | PK       | 41.8           | 39.5            | -2.3      | 33.5      | -                | 45.5            | 73.9           | 28.4        | Floor noise |
| Vert     | 15570.000       | PK       | 45.1           | 38.9            | -0.4      | 33.0      | -                | 50.6            | 73.9           | 23.3        | Floor noise |
| Vert     | 5150.000        | AV       | 34.7           | 32.2            | 7.2       | 31.7      | -                | 42.4            | 53.9           | 11.5        |             |
| Vert     | 10380.000       | AV       | 33.9           | 39.5            | -2.3      | 33.5      | -                | 37.6            | 53.9           | 16.3        | Floor noise |
| Vert     | 15570.000       | AV       | 35.5           | 38.9            | -0.4      | 33.0      | -                | 41.0            | 53.9           | 12.9        | Floor noise |

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz  $20\log(4.4 \text{ m} / 3.0 \text{ m}) = 3.33 \text{ dB}$   
10 GHz - 40 GHz  $20\log(1.0 \text{ m} / 3.0 \text{ m}) = -9.5 \text{ dB}$

**UL Japan, Inc.**

**Ise EMC Lab.**



4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## Radiated Spurious Emission

|                        |   |
|------------------------|---|
| Report No.             | 12219846H                               |
| Test place             | Ise EMC Lab. No.3 Semi Anechoic Chamber |
| Date                   | March 20, 2018                          |
| Temperature / Humidity | 21 deg. C / 45 % RH                     |
| Engineer               | Tomoki Matsui                           |
| Mode                   | Tx 11ac-40 5190 MHz                     |

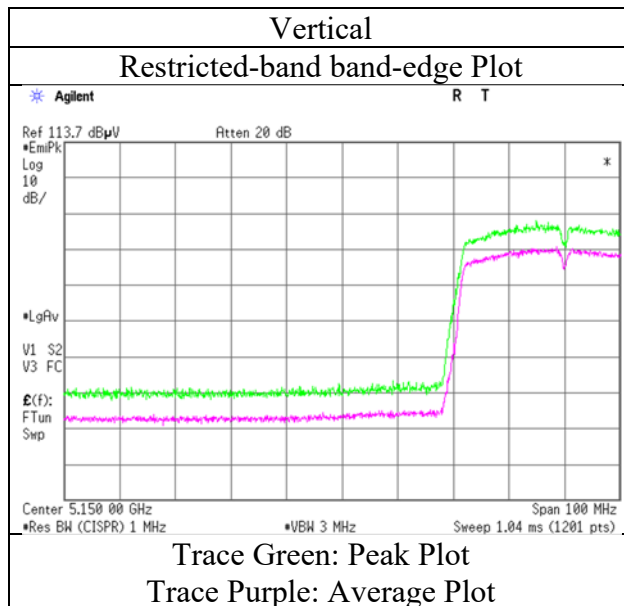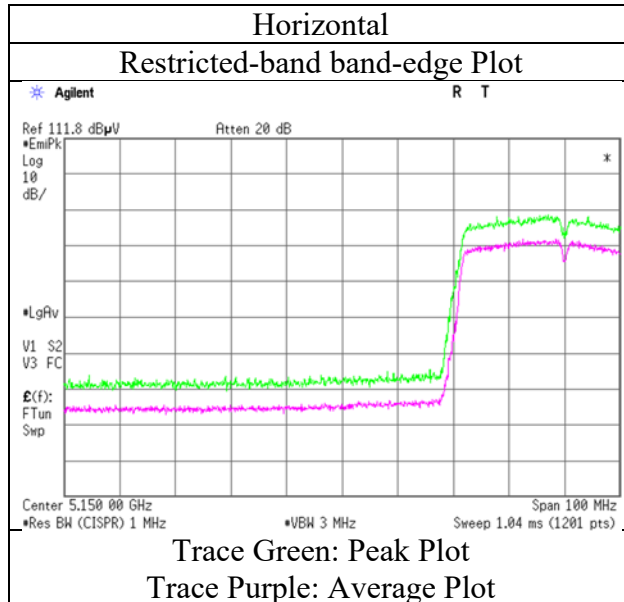

\* Final result of restricted band edge was shown in tabular data.

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## Radiated Spurious Emission

Report No. 12219846H  
Test place Ise EMC Lab. No.3 Semi Anechoic Chamber  
Date March 20, 2018 March 23, 2018 March 24, 2018 March 25, 2018  
Temperature / Humidity 21 deg. C / 45 % RH 24 deg. C / 30 % RH 21deg. C / 30 % RH 22 deg. C / 31 % RH  
Engineer Tomoki Matsui Takafumi Noguchi Ken Fujita Takafumi Noguchi  
(1 GHz - 10 GHz) (10 GHz - 18 GHz) (18 GHz - 26.5 GHz) (26.5 GHz - 40 GHz)  
Mode Tx 11ac-40 5270 MHz

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Duty Factor [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Remark      |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|------------------|-----------------|----------------|-------------|-------------|
| Hori     | 10540.000       | PK       | 42.3           | 39.8            | -2.3      | 33.6      | -                | 46.2            | 73.9           | 27.7        | Floor noise |
| Hori     | 15810.000       | PK       | 43.5           | 38.3            | -0.3      | 33.0      | -                | 48.5            | 73.9           | 25.4        | Floor noise |
| Hori     | 10540.000       | AV       | 33.8           | 39.8            | -2.3      | 33.6      | -                | 37.7            | 53.9           | 16.2        | Floor noise |
| Hori     | 15810.000       | AV       | 35.4           | 38.3            | -0.3      | 33.0      | -                | 40.4            | 53.9           | 13.5        | Floor noise |
| Vert     | 10540.000       | PK       | 42.6           | 39.8            | -2.3      | 33.6      | -                | 46.5            | 73.9           | 27.4        | Floor noise |
| Vert     | 15810.000       | PK       | 43.4           | 38.3            | -0.3      | 33.0      | -                | 48.4            | 73.9           | 25.5        | Floor noise |
| Vert     | 10540.000       | AV       | 34.2           | 39.8            | -2.3      | 33.6      | -                | 38.1            | 53.9           | 15.8        | Floor noise |
| Vert     | 15810.000       | AV       | 35.6           | 38.3            | -0.3      | 33.0      | -                | 40.6            | 53.9           | 13.3        | Floor noise |

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz  $20\log(4.4\text{ m} / 3.0\text{ m}) = 3.33\text{ dB}$   
10 GHz - 40 GHz  $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## Radiated Spurious Emission

Report No. 12219846H  
Test place Ise EMC Lab. No.3 Semi Anechoic Chamber  
Date March 20, 2018 March 23, 2018 March 24, 2018 March 25, 2018  
Temperature / Humidity 21 deg. C / 45 % RH 24 deg. C / 30 % RH 21deg. C / 30 % RH 22 deg. C / 31 % RH  
Engineer Tomoki Matsui Takafumi Noguchi Ken Fujita Takafumi Noguchi  
(1 GHz - 10 GHz) (10 GHz - 18 GHz) (18 GHz - 26.5 GHz) (26.5 GHz - 40 GHz)  
Mode Tx 11ac-40 5310 MHz

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Duty Factor [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Remark      |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|------------------|-----------------|----------------|-------------|-------------|
| Hori     | 5350.000        | PK       | 43.0           | 32.1            | 7.3       | 31.8      | -                | 50.6            | 73.9           | 23.3        |             |
| Hori     | 10620.000       | PK       | 42.9           | 39.9            | -2.3      | 33.6      | -                | 46.9            | 73.9           | 27.0        | Floor noise |
| Hori     | 15930.000       | PK       | 43.5           | 37.9            | -0.2      | 33.0      | -                | 48.2            | 73.9           | 25.7        | Floor noise |
| Hori     | 5350.000        | AV       | 34.7           | 32.1            | 7.3       | 31.8      | -                | 42.3            | 53.9           | 11.6        |             |
| Hori     | 10620.000       | AV       | 34.3           | 39.9            | -2.3      | 33.6      | -                | 38.3            | 53.9           | 15.6        | Floor noise |
| Hori     | 15930.000       | AV       | 35.4           | 37.9            | -0.2      | 33.0      | -                | 40.1            | 53.9           | 13.8        | Floor noise |
| Vert     | 5350.000        | PK       | 44.6           | 32.1            | 7.3       | 31.8      | -                | 52.2            | 73.9           | 21.7        |             |
| Vert     | 10620.000       | PK       | 42.8           | 39.9            | -2.3      | 33.6      | -                | 46.8            | 73.9           | 27.1        | Floor noise |
| Vert     | 15930.000       | PK       | 43.6           | 37.9            | -0.2      | 33.0      | -                | 48.3            | 73.9           | 25.6        | Floor noise |
| Vert     | 5350.000        | AV       | 33.6           | 32.1            | 7.3       | 31.8      | -                | 41.2            | 53.9           | 12.7        |             |
| Vert     | 10620.000       | AV       | 34.2           | 39.9            | -2.3      | 33.6      | -                | 38.2            | 53.9           | 15.7        | Floor noise |
| Vert     | 15930.000       | AV       | 35.4           | 37.9            | -0.2      | 33.0      | -                | 40.1            | 53.9           | 13.8        | Floor noise |

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz  $20\log(4.4 \text{ m} / 3.0 \text{ m}) = 3.33 \text{ dB}$   
10 GHz - 40 GHz  $20\log(1.0 \text{ m} / 3.0 \text{ m}) = -9.5 \text{ dB}$

**UL Japan, Inc.**

**Ise EMC Lab.**



4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## Radiated Spurious Emission

|                        |   |
|------------------------|---|
| Report No.             | 12219846H                               |
| Test place             | Ise EMC Lab. No.3 Semi Anechoic Chamber |
| Date                   | March 20, 2018                          |
| Temperature / Humidity | 21 deg. C / 45 % RH                     |
| Engineer               | Tomoki Matsui                           |
| Mode                   | Tx 11ac-40 5310 MHz                     |

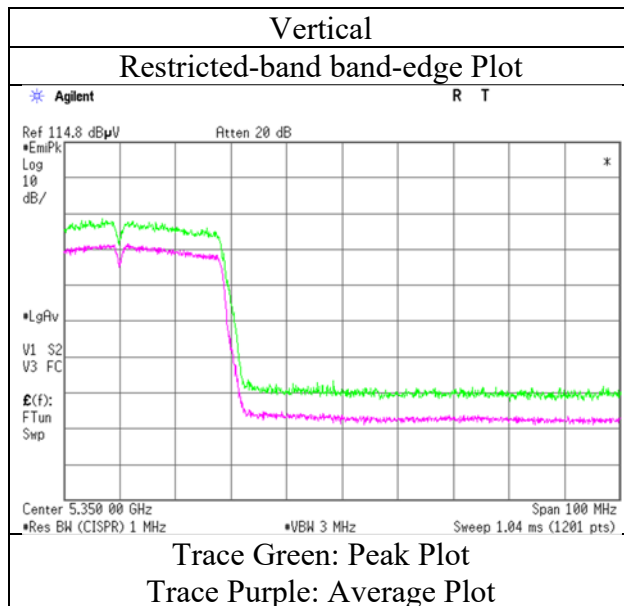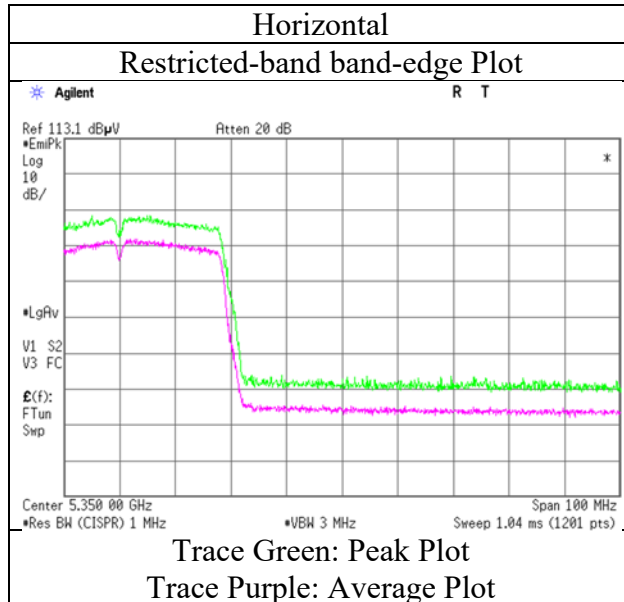

\* Final result of restricted band edge was shown in tabular data.

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## Radiated Spurious Emission

Report No. 12219846H  
Test place Ise EMC Lab. No.3 Semi Anechoic Chamber  
Date March 20, 2018 March 23, 2018 March 24, 2018 March 25, 2018  
Temperature / Humidity 21 deg. C / 45 % RH 24 deg. C / 30 % RH 21deg. C / 30 % RH 22 deg. C / 31 % RH  
Engineer Tomoki Matsui Takafumi Noguchi Ken Fujita Takafumi Noguchi  
(1 GHz - 10 GHz) (10 GHz - 18 GHz) (18 GHz - 26.5 GHz) (26.5 GHz - 40 GHz)  
Mode Tx 11ac-40 5510 MHz

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Duty Factor [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Remark      |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|------------------|-----------------|----------------|-------------|-------------|
| Hori     | 5460.000        | PK       | 43.9           | 32.0            | 7.4       | 31.8      | -                | 51.5            | 73.9           | 22.4        |             |
| Hori     | 5470.000        | PK       | 49.6           | 32.0            | 7.4       | 31.8      | -                | 57.2            | 68.2           | 11.0        |             |
| Hori     | 11020.000       | PK       | 42.3           | 40.5            | -2.2      | 33.6      | -                | 47.0            | 73.9           | 26.9        | Floor noise |
| Hori     | 16530.000       | PK       | 43.6           | 39.4            | 0.0       | 33.0      | -                | 50.0            | 73.9           | 23.9        | Floor noise |
| Hori     | 5460.000        | AV       | 35.3           | 32.0            | 7.4       | 31.8      | -                | 42.9            | 53.9           | 11.0        |             |
| Hori     | 11020.000       | AV       | 34.6           | 40.5            | -2.2      | 33.6      | -                | 39.3            | 53.9           | 14.6        | Floor noise |
| Hori     | 16530.000       | AV       | 35.5           | 39.4            | 0.0       | 33.0      | -                | 41.9            | 53.9           | 12.0        | Floor noise |
| Vert     | 5460.000        | PK       | 44.9           | 32.0            | 7.4       | 31.8      | -                | 52.5            | 73.9           | 21.4        |             |
| Vert     | 5470.000        | PK       | 48.8           | 32.0            | 7.4       | 31.8      | -                | 56.4            | 68.2           | 11.8        |             |
| Vert     | 11020.000       | PK       | 42.7           | 40.5            | -2.2      | 33.6      | -                | 47.4            | 73.9           | 26.5        | Floor noise |
| Vert     | 16530.000       | PK       | 44.0           | 39.4            | 0.0       | 33.0      | -                | 50.4            | 73.9           | 23.5        | Floor noise |
| Vert     | 5460.000        | AV       | 36.0           | 32.0            | 7.4       | 31.8      | -                | 43.6            | 53.9           | 10.3        |             |
| Vert     | 11020.000       | AV       | 34.4           | 40.5            | -2.2      | 33.6      | -                | 39.1            | 53.9           | 14.8        | Floor noise |
| Vert     | 16530.000       | AV       | 35.5           | 39.4            | 0.0       | 33.0      | -                | 41.9            | 53.9           | 12.0        | Floor noise |

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz 20log (4.4 m / 3.0 m) = 3.33 dB  
10 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN



Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124



## Radiated Spurious Emission

|                        |   |
|------------------------|---|
| Report No.             | 12219846H                               |
| Test place             | Ise EMC Lab. No.3 Semi Anechoic Chamber |
| Date                   | March 20, 2018                          |
| Temperature / Humidity | 21 deg. C / 45 % RH                     |
| Engineer               | Tomoki Matsui                           |
| Mode                   | Tx 11ac-40 5510 MHz                     |

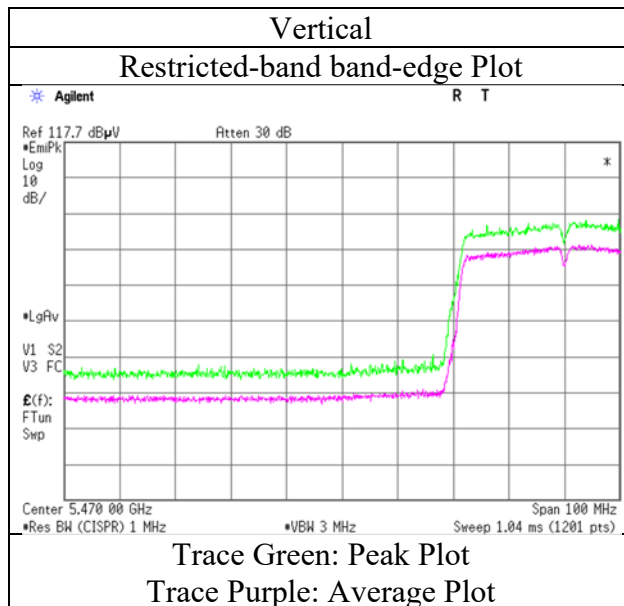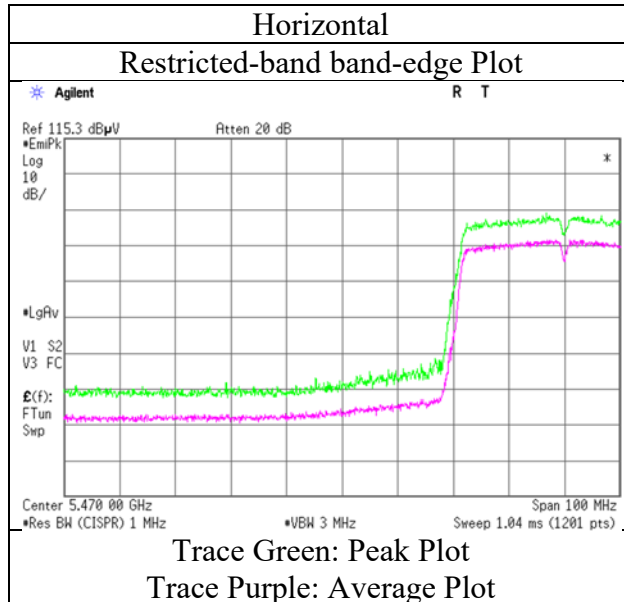

\* Final result of restricted band edge was shown in tabular data.

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## Radiated Spurious Emission

Report No. 12219846H  
Test place Ise EMC Lab. No.3 Semi Anechoic Chamber  
Date March 20, 2018 March 23, 2018 March 24, 2018 March 25, 2018 March 28, 2018  
Temperature / Humidity 21 deg. C / 45 % RH 24 deg. C / 30 % RH 21deg. C / 30 % RH 22 deg. C / 31 % RH 18 deg. C / 42 % RH  
Engineer Tomoki Matsui Takafumi Noguchi Ken Fujita Takafumi Noguchi Takafumi Noguchi  
(1 GHz - 10 GHz) (10 GHz - 18 GHz) (18 GHz - 26.5 GHz) (26.5 GHz - 40 GHz) (Below 1 GHz)  
Mode Tx 11ac-40 5550 MHz

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Duty Factor [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Remark      |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|------------------|-----------------|----------------|-------------|-------------|
| Hori     | 50.145          | QP       | 24.4           | 10.6            | 7.5       | 32.2      | -                | 10.3            | 40.0           | 29.7        |             |
| Hori     | 107.713         | QP       | 38.8           | 11.1            | 8.3       | 32.2      | -                | 26.0            | 43.5           | 17.5        |             |
| Hori     | 130.000         | QP       | 32.7           | 13.6            | 8.5       | 32.2      | -                | 22.6            | 43.5           | 20.9        |             |
| Hori     | 193.144         | QP       | 35.8           | 16.4            | 9.1       | 32.1      | -                | 29.2            | 43.5           | 14.3        |             |
| Hori     | 247.000         | QP       | 37.7           | 11.5            | 9.6       | 32.0      | -                | 26.8            | 46.0           | 19.2        |             |
| Hori     | 271.142         | QP       | 42.5           | 12.3            | 9.8       | 32.0      | -                | 32.6            | 46.0           | 13.4        |             |
| Hori     | 3700.000        | PK       | 44.5           | 29.6            | 6.6       | 32.2      | -                | 48.5            | 73.9           | 25.4        |             |
| Hori     | 11100.000       | PK       | 43.2           | 40.4            | -2.2      | 33.6      | -                | 47.8            | 73.9           | 26.1        | Floor noise |
| Hori     | 16650.000       | PK       | 44.0           | 39.8            | 0.0       | 33.0      | -                | 50.8            | 73.9           | 23.1        | Floor noise |
| Hori     | 3700.000        | AV       | 39.3           | 29.6            | 6.6       | 32.2      | -                | 43.3            | 53.9           | 10.6        |             |
| Hori     | 11100.000       | AV       | 34.5           | 40.4            | -2.2      | 33.6      | -                | 39.1            | 53.9           | 14.8        | Floor noise |
| Hori     | 16650.000       | AV       | 35.1           | 39.8            | 0.0       | 33.0      | -                | 41.9            | 53.9           | 12.0        | Floor noise |
| Vert     | 50.145          | QP       | 35.1           | 10.6            | 7.5       | 32.2      | -                | 21.0            | 40.0           | 19.0        |             |
| Vert     | 107.713         | QP       | 35.3           | 11.1            | 8.3       | 32.2      | -                | 22.5            | 43.5           | 21.0        |             |
| Vert     | 130.000         | QP       | 33.6           | 13.6            | 8.5       | 32.2      | -                | 23.5            | 43.5           | 20.0        |             |
| Vert     | 193.144         | QP       | 31.8           | 16.4            | 9.1       | 32.1      | -                | 25.2            | 43.5           | 18.3        |             |
| Vert     | 247.000         | QP       | 28.3           | 11.5            | 9.6       | 32.0      | -                | 17.4            | 46.0           | 28.6        |             |
| Vert     | 271.142         | QP       | 35.3           | 12.3            | 9.8       | 32.0      | -                | 25.4            | 46.0           | 20.6        |             |
| Vert     | 3700.000        | PK       | 42.9           | 29.6            | 6.6       | 32.2      | -                | 46.9            | 73.9           | 27.0        |             |
| Vert     | 11100.000       | PK       | 42.8           | 40.4            | -2.2      | 33.6      | -                | 47.4            | 73.9           | 26.5        | Floor noise |
| Vert     | 16650.000       | PK       | 43.7           | 39.8            | 0.0       | 33.0      | -                | 50.5            | 73.9           | 23.4        | Floor noise |
| Vert     | 3700.000        | AV       | 36.2           | 29.6            | 6.6       | 32.2      | -                | 40.2            | 53.9           | 13.7        |             |
| Vert     | 11100.000       | AV       | 34.5           | 40.4            | -2.2      | 33.6      | -                | 39.1            | 53.9           | 14.8        | Floor noise |
| Vert     | 16650.000       | AV       | 35.2           | 39.8            | 0.0       | 33.0      | -                | 42.0            | 53.9           | 11.9        | Floor noise |

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz 20log(4.4 m / 3.0 m) = 3.33 dB  
10 GHz - 40 GHz 20log(1.0 m / 3.0 m) = -9.5 dB

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## Radiated Spurious Emission

Report No. 12219846H  
Test place Ise EMC Lab. No.3 Semi Anechoic Chamber  
Date March 20, 2018 March 23, 2018 March 24, 2018 March 25, 2018  
Temperature / Humidity 21 deg. C / 45 % RH 24 deg. C / 30 % RH 21deg. C / 30 % RH 22 deg. C / 31 % RH  
Engineer Tomoki Matsui Takafumi Noguchi Ken Fujita Takafumi Noguchi  
(1 GHz - 10 GHz) (10 GHz - 18 GHz) (18 GHz - 26.5 GHz) (26.5 GHz - 40 GHz)  
Mode Tx 11ac-40 5670 MHz

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Duty Factor [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Remark      |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|------------------|-----------------|----------------|-------------|-------------|
| Hori     | 3780.000        | PK       | 44.6           | 29.6            | 6.7       | 32.1      | -                | 48.8            | 73.9           | 25.1        |             |
| Hori     | 5725.000        | PK       | 43.3           | 32.3            | 7.5       | 31.8      | -                | 51.3            | 68.2           | 16.9        |             |
| Hori     | 11340.000       | PK       | 43.9           | 40.2            | -2.0      | 33.5      | -                | 48.6            | 73.9           | 25.3        | Floor noise |
| Hori     | 17010.000       | PK       | 44.2           | 40.9            | 0.1       | 32.9      | -                | 52.3            | 73.9           | 21.6        | Floor noise |
| Hori     | 3780.000        | AV       | 38.3           | 29.6            | 6.7       | 32.1      | -                | 42.5            | 53.9           | 11.4        |             |
| Hori     | 11340.000       | AV       | 33.7           | 40.2            | -2.0      | 33.5      | -                | 38.4            | 53.9           | 15.5        | Floor noise |
| Hori     | 17010.000       | AV       | 34.1           | 40.9            | 0.1       | 32.9      | -                | 42.2            | 53.9           | 11.7        | Floor noise |
| Vert     | 3780.000        | PK       | 42.7           | 29.6            | 6.7       | 32.1      | -                | 46.9            | 73.9           | 27.0        |             |
| Vert     | 5725.000        | PK       | 43.4           | 32.3            | 7.5       | 31.8      | -                | 51.4            | 68.2           | 16.8        |             |
| Vert     | 11340.000       | PK       | 42.9           | 40.2            | -2.0      | 33.5      | -                | 47.6            | 73.9           | 26.3        | Floor noise |
| Vert     | 17010.000       | PK       | 44.1           | 40.9            | 0.1       | 32.9      | -                | 52.2            | 73.9           | 21.7        | Floor noise |
| Vert     | 3780.000        | AV       | 34.9           | 29.6            | 6.7       | 32.1      | -                | 39.1            | 53.9           | 14.8        |             |
| Vert     | 11340.000       | AV       | 34.0           | 40.2            | -2.0      | 33.5      | -                | 38.7            | 53.9           | 15.2        | Floor noise |
| Vert     | 17010.000       | AV       | 35.9           | 40.9            | 0.1       | 32.9      | -                | 44.0            | 53.9           | 9.9         | Floor noise |

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz 20log (4.4 m / 3.0 m) = 3.33 dB  
10 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

**UL Japan, Inc.**

**Ise EMC Lab.**



4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## Radiated Spurious Emission

|                        |   |
|------------------------|---|
| Report No.             | 12219846H                               |
| Test place             | Ise EMC Lab. No.3 Semi Anechoic Chamber |
| Date                   | March 20, 2018                          |
| Temperature / Humidity | 21 deg. C / 45 % RH                     |
| Engineer               | Tomoki Matsui                           |
| Mode                   | Tx 11ac-40 5670 MHz                     |

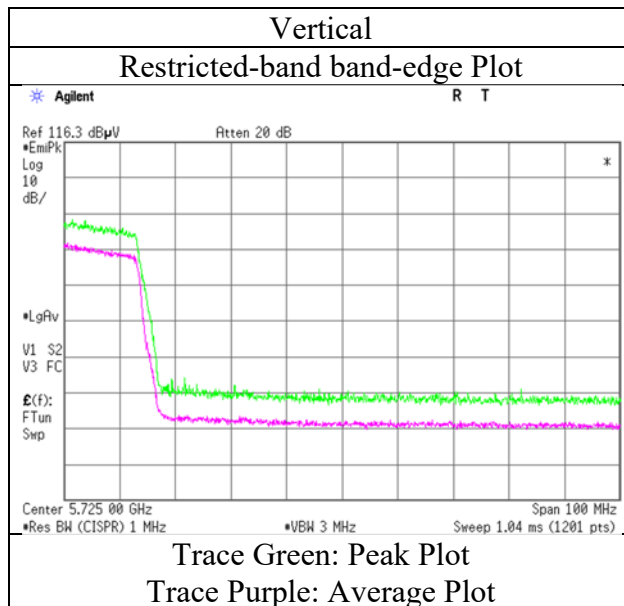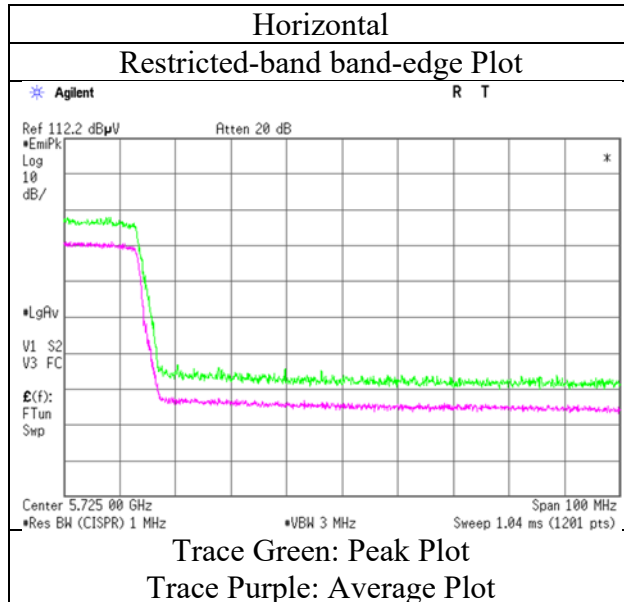

\* Final result of restricted band edge was shown in tabular data.

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## Radiated Spurious Emission

Report No. 12219846H  
Test place Ise EMC Lab. No.3 Semi Anechoic Chamber  
Date March 20, 2018 March 23, 2018 March 24, 2018 March 25, 2018  
Temperature / Humidity 21 deg. C / 45 % RH 24 deg. C / 30 % RH 21deg. C / 30 % RH 22 deg. C / 31 % RH  
Engineer Tomoki Matsui Takafumi Noguchi Ken Fujita Takafumi Noguchi  
(1 GHz - 10 GHz) (10 GHz - 18 GHz) (18 GHz - 26.5 GHz) (26.5 GHz - 40 GHz)  
Mode Tx 11ac-40 5755 MHz

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Duty Factor [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Remark      |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|------------------|-----------------|----------------|-------------|-------------|
| Hori     | 3836.580        | PK       | 43.4           | 29.7            | 6.7       | 32.1      | -                | 47.7            | 73.9           | 26.2        |             |
| Hori     | 5650.000        | PK       | 43.9           | 32.2            | 7.5       | 31.8      | -                | 51.8            | 68.2           | 16.4        |             |
| Hori     | 5700.000        | PK       | 44.3           | 32.3            | 7.5       | 31.8      | -                | 52.3            | 105.2          | 52.9        |             |
| Hori     | 5720.000        | PK       | 45.4           | 32.3            | 7.5       | 31.8      | -                | 53.4            | 110.8          | 57.4        |             |
| Hori     | 5725.000        | PK       | 47.3           | 32.3            | 7.5       | 31.8      | -                | 55.3            | 122.2          | 66.9        |             |
| Hori     | 11550.000       | PK       | 43.5           | 40.0            | -1.9      | 33.5      | -                | 48.1            | 73.9           | 25.8        | Floor noise |
| Hori     | 17325.000       | PK       | 44.6           | 42.7            | 0.2       | 32.9      | -                | 54.6            | 73.9           | 19.3        | Floor noise |
| Hori     | 3836.580        | AV       | 37.7           | 29.7            | 6.7       | 32.1      | -                | 42.0            | 53.9           | 11.9        |             |
| Hori     | 11550.000       | AV       | 34.0           | 40.0            | -1.9      | 33.5      | -                | 38.6            | 53.9           | 15.3        | Floor noise |
| Hori     | 17325.000       | AV       | 35.2           | 42.7            | 0.2       | 32.9      | -                | 45.2            | 53.9           | 8.7         | Floor noise |
| Vert     | 3836.580        | PK       | 43.3           | 29.7            | 6.7       | 32.1      | -                | 47.6            | 73.9           | 26.3        |             |
| Vert     | 5650.000        | PK       | 40.9           | 32.2            | 7.5       | 31.8      | -                | 48.8            | 68.2           | 19.4        |             |
| Vert     | 5700.000        | PK       | 46.7           | 32.3            | 7.5       | 31.8      | -                | 54.7            | 105.2          | 50.5        |             |
| Vert     | 5720.000        | PK       | 47.0           | 32.3            | 7.5       | 31.8      | -                | 55.0            | 110.8          | 55.8        |             |
| Vert     | 5725.000        | PK       | 49.3           | 32.3            | 7.5       | 31.8      | -                | 57.3            | 122.2          | 64.9        |             |
| Vert     | 11550.000       | PK       | 43.2           | 40.0            | -1.9      | 33.5      | -                | 47.8            | 73.9           | 26.1        | Floor noise |
| Vert     | 17325.000       | PK       | 44.7           | 42.7            | 0.2       | 32.9      | -                | 54.7            | 73.9           | 19.2        | Floor noise |
| Vert     | 3836.580        | AV       | 36.8           | 29.7            | 6.7       | 32.1      | -                | 41.1            | 53.9           | 12.8        |             |
| Vert     | 11550.000       | AV       | 34.2           | 40.0            | -1.9      | 33.5      | -                | 38.8            | 53.9           | 15.1        | Floor noise |
| Vert     | 17325.000       | AV       | 35.6           | 42.7            | 0.2       | 32.9      | -                | 45.6            | 53.9           | 8.3         | Floor noise |

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz  $20\log(4.4\text{ m} / 3.0\text{ m}) = 3.33\text{ dB}$   
10 GHz - 40 GHz  $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

**UL Japan, Inc.**

**Ise EMC Lab.**



4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## Radiated Spurious Emission

|                        |   |
|------------------------|---|
| Report No.             | 12219846H                               |
| Test place             | Ise EMC Lab. No.3 Semi Anechoic Chamber |
| Date                   | March 20, 2018                          |
| Temperature / Humidity | 21 deg. C / 45 % RH                     |
| Engineer               | Tomoki Matsui                           |
| Mode                   | Tx 11ac-40 5755 MHz                     |

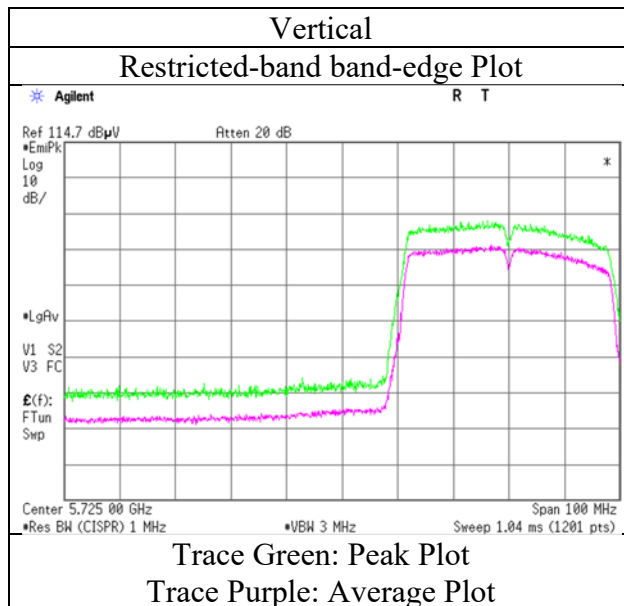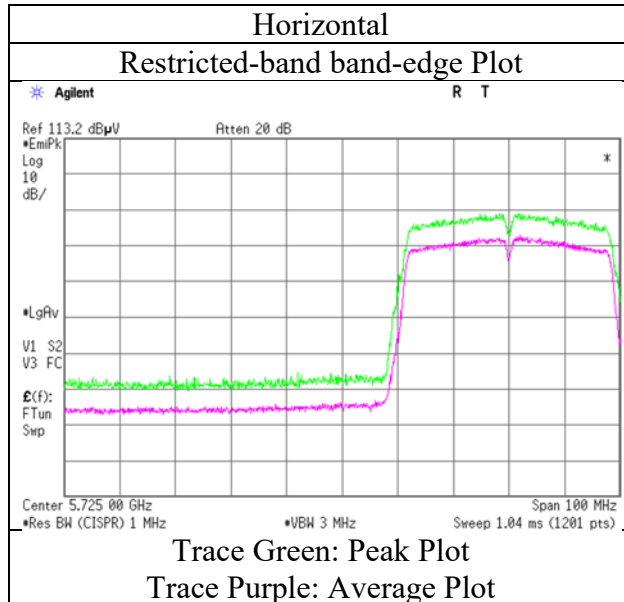

\* Final result of restricted band edge was shown in tabular data.

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## Radiated Spurious Emission

Report No. 12219846H  
Test place Ise EMC Lab. No.3 Semi Anechoic Chamber  
Date March 20, 2018 March 23, 2018 March 24, 2018 March 25, 2018  
Temperature / Humidity 21 deg. C / 45 % RH 24 deg. C / 30 % RH 21deg. C / 30 % RH 22 deg. C / 31 % RH  
Engineer Tomoki Matsui Takafumi Noguchi Ken Fujita Takafumi Noguchi  
(1 GHz - 10 GHz) (10 GHz - 18 GHz) (18 GHz - 26.5 GHz) (26.5 GHz - 40 GHz)  
Mode Tx 11ac-40 5795 MHz

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Duty Factor [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Remark      |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|------------------|-----------------|----------------|-------------|-------------|
| Hori     | 3863.366        | PK       | 43.3           | 29.7            | 6.7       | 32.1      | -                | 47.6            | 73.9           | 26.3        |             |
| Hori     | 5850.000        | PK       | 42.2           | 32.5            | 7.5       | 31.8      | -                | 50.4            | 122.2          | 71.8        |             |
| Hori     | 5855.000        | PK       | 42.0           | 32.5            | 7.5       | 31.8      | -                | 50.2            | 110.8          | 60.6        |             |
| Hori     | 5875.000        | PK       | 41.9           | 32.5            | 7.5       | 31.8      | -                | 50.1            | 105.2          | 55.1        |             |
| Hori     | 5925.000        | PK       | 40.9           | 32.6            | 7.6       | 31.8      | -                | 49.3            | 68.2           | 18.9        |             |
| Hori     | 11590.000       | PK       | 43.5           | 40.0            | -1.9      | 33.5      | -                | 48.1            | 73.9           | 25.8        | Floor noise |
| Hori     | 17385.000       | PK       | 44.3           | 43.1            | 0.2       | 32.9      | -                | 54.7            | 73.9           | 19.2        | Floor noise |
| Hori     | 3863.366        | AV       | 36.8           | 29.7            | 6.7       | 32.1      | -                | 41.1            | 53.9           | 12.8        |             |
| Hori     | 11590.000       | AV       | 34.3           | 40.0            | -1.9      | 33.5      | -                | 38.9            | 53.9           | 15.0        | Floor noise |
| Hori     | 17385.000       | AV       | 34.9           | 43.1            | 0.2       | 32.9      | -                | 45.3            | 53.9           | 8.6         | Floor noise |
| Vert     | 3863.366        | PK       | 41.7           | 29.7            | 6.7       | 32.1      | -                | 46.0            | 73.9           | 27.9        |             |
| Vert     | 5850.000        | PK       | 43.9           | 32.5            | 7.5       | 31.8      | -                | 52.1            | 122.2          | 70.1        |             |
| Vert     | 5855.000        | PK       | 42.3           | 32.5            | 7.5       | 31.8      | -                | 50.5            | 110.8          | 60.3        |             |
| Vert     | 5875.000        | PK       | 41.8           | 32.5            | 7.5       | 31.8      | -                | 50.0            | 105.2          | 55.2        |             |
| Vert     | 5925.000        | PK       | 41.7           | 32.6            | 7.6       | 31.8      | -                | 50.1            | 68.2           | 18.1        |             |
| Vert     | 11590.000       | PK       | 43.2           | 40.0            | -1.9      | 33.5      | -                | 47.8            | 73.9           | 26.1        | Floor noise |
| Vert     | 17385.000       | PK       | 44.4           | 43.1            | 0.2       | 32.9      | -                | 54.8            | 73.9           | 19.1        | Floor noise |
| Vert     | 3863.366        | AV       | 34.9           | 29.7            | 6.7       | 32.1      | -                | 39.2            | 53.9           | 14.7        |             |
| Vert     | 11590.000       | AV       | 34.0           | 40.0            | -1.9      | 33.5      | -                | 38.6            | 53.9           | 15.3        | Floor noise |
| Vert     | 17385.000       | AV       | 34.9           | 43.1            | 0.2       | 32.9      | -                | 45.3            | 53.9           | 8.6         | Floor noise |

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz  $20\log(4.4 \text{ m} / 3.0 \text{ m}) = 3.33 \text{ dB}$   
10 GHz - 40 GHz  $20\log(1.0 \text{ m} / 3.0 \text{ m}) = -9.5 \text{ dB}$

**UL Japan, Inc.**

**Ise EMC Lab.**



4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## Radiated Spurious Emission

|                        |   |
|------------------------|---|
| Report No.             | 12219846H                               |
| Test place             | Ise EMC Lab. No.3 Semi Anechoic Chamber |
| Date                   | March 20, 2018                          |
| Temperature / Humidity | 21 deg. C / 45 % RH                     |
| Engineer               | Tomoki Matsui                           |
| Mode                   | Tx 11ac-40 5795 MHz                     |

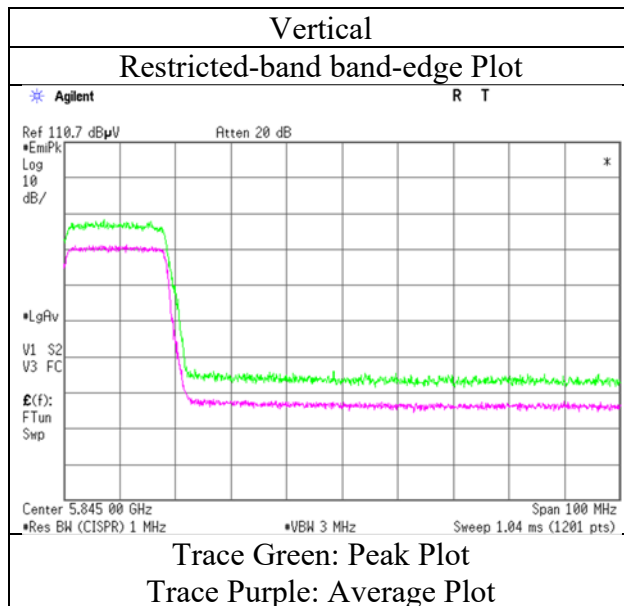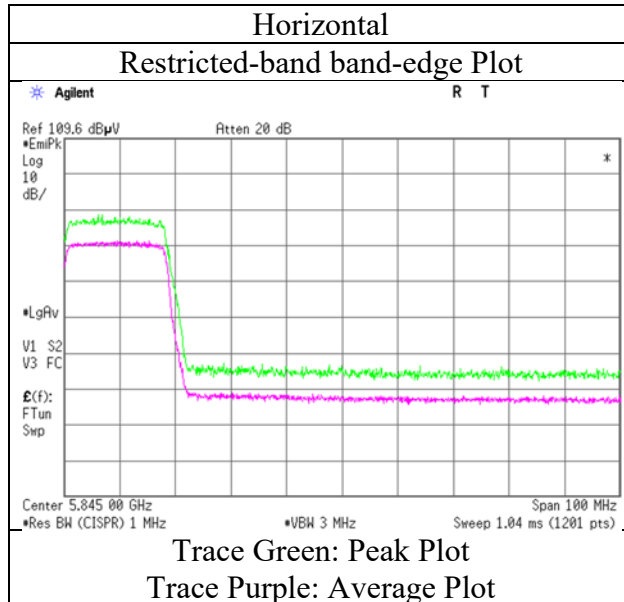

\* Final result of restricted band edge was shown in tabular data.

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124



## Radiated Spurious Emission

Report No. 12219846H  
Test place Ise EMC Lab. No.3 Semi Anechoic Chamber  
Date March 20, 2018 March 23, 2018 March 24, 2018 March 25, 2018  
Temperature / Humidity 21 deg. C / 45 % RH 24 deg. C / 30 % RH 21deg. C / 30 % RH 22 deg. C / 31 % RH  
Engineer Tomoki Matsui Takafumi Noguchi Ken Fujita Takafumi Noguchi  
(1 GHz - 10 GHz) (10 GHz - 18 GHz) (18 GHz - 26.5 GHz) (26.5 GHz - 40 GHz)  
Mode Tx 11ac-80 5210 MHz

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Duty Factor [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Remark      |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|------------------|-----------------|----------------|-------------|-------------|
| Hori     | 5150.000        | PK       | 43.2           | 32.2            | 7.2       | 31.7      | -                | 50.9            | 73.9           | 23.0        |             |
| Hori     | 10420.000       | PK       | 42.5           | 39.6            | -2.3      | 33.5      | -                | 46.3            | 73.9           | 27.6        | Floor noise |
| Hori     | 15630.000       | PK       | 44.1           | 38.8            | -0.4      | 33.0      | -                | 49.5            | 73.9           | 24.4        | Floor noise |
| Hori     | 5150.000        | AV       | 35.2           | 32.2            | 7.2       | 31.7      | -                | 42.9            | 53.9           | 11.0        |             |
| Hori     | 10420.000       | AV       | 33.3           | 39.6            | -2.3      | 33.5      | -                | 37.1            | 53.9           | 16.8        | Floor noise |
| Hori     | 15630.000       | AV       | 35.0           | 38.8            | -0.4      | 33.0      | -                | 40.4            | 53.9           | 13.5        | Floor noise |
| Vert     | 5150.000        | PK       | 44.3           | 32.2            | 7.2       | 31.7      | -                | 52.0            | 73.9           | 21.9        |             |
| Vert     | 10420.000       | PK       | 42.1           | 39.6            | -2.3      | 33.5      | -                | 45.9            | 73.9           | 28.0        | Floor noise |
| Vert     | 15630.000       | PK       | 44.0           | 38.8            | -0.4      | 33.0      | -                | 49.4            | 73.9           | 24.5        | Floor noise |
| Vert     | 5150.000        | AV       | 36.0           | 32.2            | 7.2       | 31.7      | -                | 43.7            | 53.9           | 10.2        |             |
| Vert     | 10420.000       | AV       | 33.1           | 39.6            | -2.3      | 33.5      | -                | 36.9            | 53.9           | 17.0        | Floor noise |
| Vert     | 15630.000       | AV       | 35.3           | 38.8            | -0.4      | 33.0      | -                | 40.7            | 53.9           | 13.2        | Floor noise |

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz  $20\log(4.4\text{ m} / 3.0\text{ m}) = 3.33\text{ dB}$   
10 GHz - 40 GHz  $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

**UL Japan, Inc.**

**Ise EMC Lab.**



4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## Radiated Spurious Emission

|                        |   |
|------------------------|---|
| Report No.             | 12219846H                               |
| Test place             | Ise EMC Lab. No.3 Semi Anechoic Chamber |
| Date                   | March 20, 2018                          |
| Temperature / Humidity | 21 deg. C / 45 % RH                     |
| Engineer               | Tomoki Matsui                           |
| Mode                   | Tx 11ac-80 5210 MHz                     |

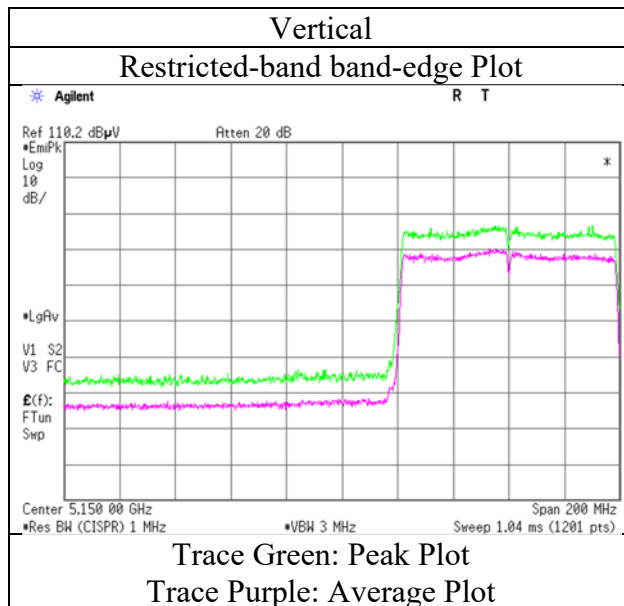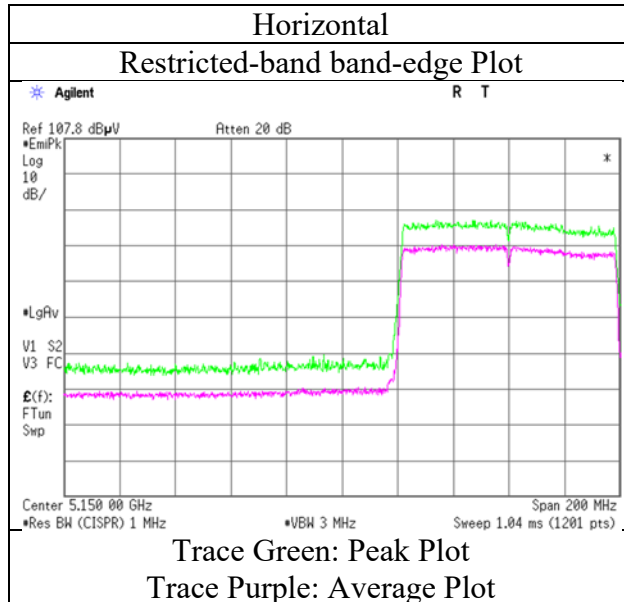

\* Final result of restricted band edge was shown in tabular data.

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## Radiated Spurious Emission

Report No. 12219846H  
Test place Ise EMC Lab. No.3 Semi Anechoic Chamber  
Date March 20, 2018 March 23, 2018 March 24, 2018 March 25, 2018  
Temperature / Humidity 21 deg. C / 45 % RH 24 deg. C / 30 % RH 21deg. C / 30 % RH 22 deg. C / 31 % RH  
Engineer Tomoki Matsui Takafumi Noguchi Ken Fujita Takafumi Noguchi  
(1 GHz - 10 GHz) (10 GHz - 18 GHz) (18 GHz - 26.5 GHz) (26.5 GHz - 40 GHz)  
Mode Tx 11ac-80 5290 MHz

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Duty Factor [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Remark      |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|------------------|-----------------|----------------|-------------|-------------|
| Hori     | 5350.000        | PK       | 44.4           | 32.1            | 7.3       | 31.8      | -                | 52.0            | 73.9           | 21.9        |             |
| Hori     | 10580.000       | PK       | 42.5           | 39.8            | -2.3      | 33.6      | -                | 46.4            | 73.9           | 27.5        | Floor noise |
| Hori     | 15870.000       | PK       | 43.9           | 38.1            | -0.2      | 33.0      | -                | 48.8            | 73.9           | 25.1        | Floor noise |
| Hori     | 5350.000        | AV       | 35.5           | 32.1            | 7.3       | 31.8      | -                | 43.1            | 53.9           | 10.8        |             |
| Hori     | 10580.000       | AV       | 33.6           | 39.8            | -2.3      | 33.6      | -                | 37.5            | 53.9           | 16.4        | Floor noise |
| Hori     | 15870.000       | AV       | 35.2           | 38.1            | -0.2      | 33.0      | -                | 40.1            | 53.9           | 13.8        | Floor noise |
| Vert     | 5350.000        | PK       | 45.6           | 32.1            | 7.3       | 31.8      | -                | 53.2            | 73.9           | 20.7        |             |
| Vert     | 10580.000       | PK       | 42.3           | 39.8            | -2.3      | 33.6      | -                | 46.2            | 73.9           | 27.7        | Floor noise |
| Vert     | 15870.000       | PK       | 43.4           | 38.1            | -0.2      | 33.0      | -                | 48.3            | 73.9           | 25.6        | Floor noise |
| Vert     | 5350.000        | AV       | 37.2           | 32.1            | 7.3       | 31.8      | -                | 44.8            | 53.9           | 9.1         |             |
| Vert     | 10580.000       | AV       | 33.8           | 39.8            | -2.3      | 33.6      | -                | 37.7            | 53.9           | 16.2        | Floor noise |
| Vert     | 15870.000       | AV       | 35.4           | 38.1            | -0.2      | 33.0      | -                | 40.3            | 53.9           | 13.6        | Floor noise |

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz 20log (4.4 m / 3.0 m) = 3.33 dB  
10 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

**UL Japan, Inc.**

**Ise EMC Lab.**



4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## Radiated Spurious Emission

|                        |   |
|------------------------|---|
| Report No.             | 12219846H                               |
| Test place             | Ise EMC Lab. No.3 Semi Anechoic Chamber |
| Date                   | March 20, 2018                          |
| Temperature / Humidity | 21 deg. C / 45 % RH                     |
| Engineer               | Tomoki Matsui                           |
| Mode                   | Tx 11ac-80 5290 MHz                     |

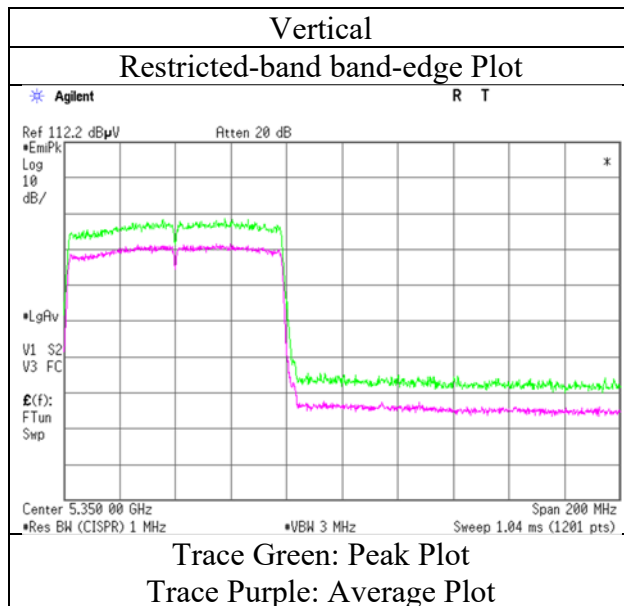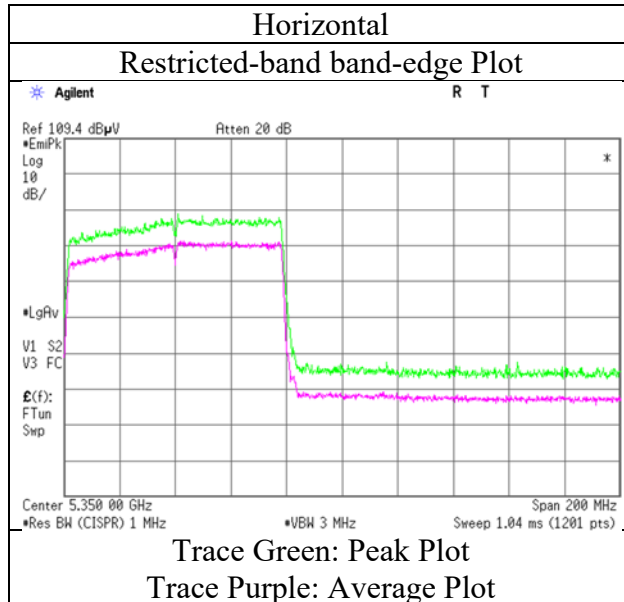

\* Final result of restricted band edge was shown in tabular data.

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## Radiated Spurious Emission

Report No. 12219846H  
Test place Ise EMC Lab. No.3 Semi Anechoic Chamber  
Date March 20, 2018 March 23, 2018 March 24, 2018 March 25, 2018  
Temperature / Humidity 21 deg. C / 45 % RH 24 deg. C / 30 % RH 21deg. C / 30 % RH 22 deg. C / 31 % RH  
Engineer Tomoki Matsui Takafumi Noguchi Ken Fujita Takafumi Noguchi  
(1 GHz - 10 GHz) (10 GHz - 18 GHz) (18 GHz - 26.5 GHz) (26.5 GHz - 40 GHz)  
Mode Tx 11ac-80 5530 MHz

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Duty Factor [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Remark      |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|------------------|-----------------|----------------|-------------|-------------|
| Hori     | 5460.000        | PK       | 49.2           | 32.0            | 7.4       | 31.8      | -                | 56.8            | 73.9           | 17.1        |             |
| Hori     | 5470.000        | PK       | 50.4           | 32.0            | 7.4       | 31.8      | -                | 58.0            | 68.2           | 10.2        |             |
| Hori     | 11060.000       | PK       | 43.0           | 40.5            | -2.2      | 33.6      | -                | 47.7            | 73.9           | 26.2        | Floor noise |
| Hori     | 16590.000       | PK       | 44.6           | 39.6            | 0.0       | 33.0      | -                | 51.2            | 73.9           | 22.7        | Floor noise |
| Hori     | 5460.000        | AV       | 37.9           | 32.0            | 7.4       | 31.8      | -                | 45.5            | 53.9           | 8.4         |             |
| Hori     | 11060.000       | AV       | 35.1           | 40.5            | -2.2      | 33.6      | -                | 39.8            | 53.9           | 14.1        | Floor noise |
| Hori     | 16590.000       | AV       | 35.7           | 39.6            | 0.0       | 33.0      | -                | 42.3            | 53.9           | 11.6        | Floor noise |
| Vert     | 5460.000        | PK       | 50.0           | 32.0            | 7.4       | 31.8      | -                | 57.6            | 73.9           | 16.3        |             |
| Vert     | 5470.000        | PK       | 51.0           | 32.0            | 7.4       | 31.8      | -                | 58.6            | 68.2           | 9.6         |             |
| Vert     | 11060.000       | PK       | 42.8           | 40.5            | -2.2      | 33.6      | -                | 47.5            | 73.9           | 26.4        | Floor noise |
| Vert     | 16590.000       | PK       | 43.8           | 39.6            | 0.0       | 33.0      | -                | 50.4            | 73.9           | 23.5        | Floor noise |
| Vert     | 5460.000        | AV       | 38.8           | 32.0            | 7.4       | 31.8      | -                | 46.4            | 53.9           | 7.5         |             |
| Vert     | 11060.000       | AV       | 34.5           | 40.5            | -2.2      | 33.6      | -                | 39.2            | 53.9           | 14.7        | Floor noise |
| Vert     | 16590.000       | AV       | 35.2           | 39.6            | 0.0       | 33.0      | -                | 41.8            | 53.9           | 12.1        | Floor noise |

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz 20log (4.4 m / 3.0 m) = 3.33 dB  
10 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

**UL Japan, Inc.**

**Ise EMC Lab.**



4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## Radiated Spurious Emission

|                        |   |
|------------------------|---|
| Report No.             | 12219846H                               |
| Test place             | Ise EMC Lab. No.3 Semi Anechoic Chamber |
| Date                   | March 20, 2018                          |
| Temperature / Humidity | 21 deg. C / 45 % RH                     |
| Engineer               | Tomoki Matsui                           |
| Mode                   | Tx 11ac-80 5530 MHz                     |

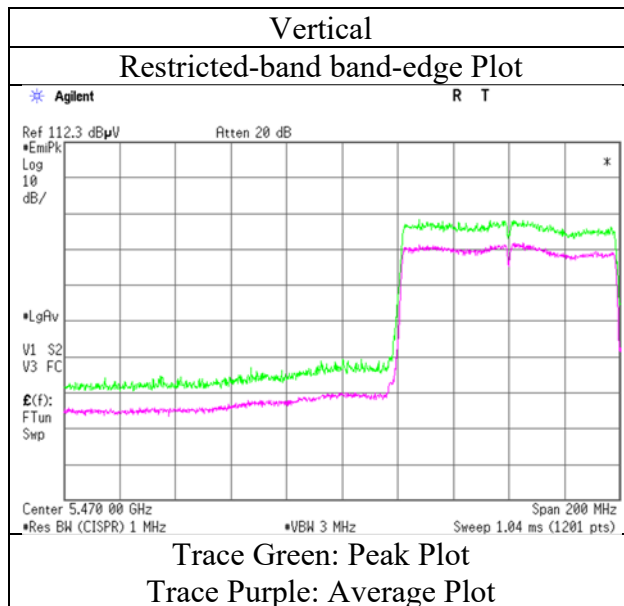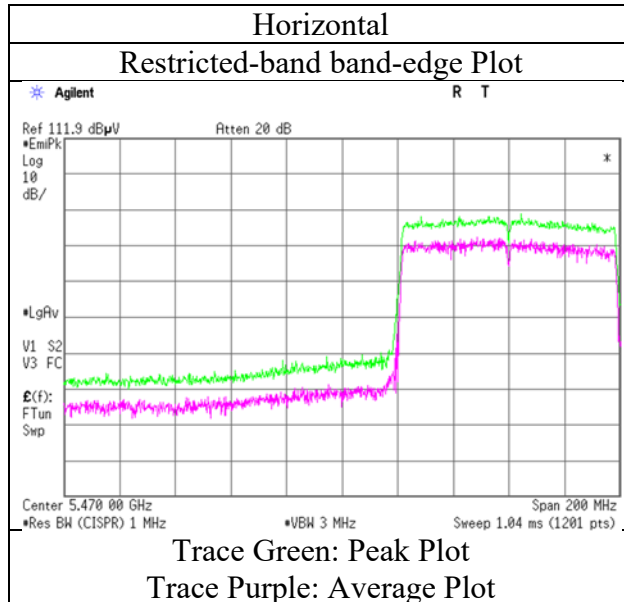

\* Final result of restricted band edge was shown in tabular data.

**UL Japan, Inc.**  
**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN  
Telephone : +81 596 24 8999  
Facsimile : +81 596 24 8124

## Radiated Spurious Emission

Report No. 12219846H  
Test place Ise EMC Lab. No.3 Semi Anechoic Chamber  
Date March 20, 2018 March 23, 2018 March 24, 2018 March 25, 2018  
Temperature / Humidity 21 deg. C / 45 % RH 24 deg. C / 30 % RH 21deg. C / 30 % RH 22 deg. C / 31 % RH  
Engineer Tomoki Matsui Takafumi Noguchi Ken Fujita Takafumi Noguchi  
(1 GHz - 10 GHz) (10 GHz - 18 GHz) (18 GHz - 26.5 GHz) (26.5 GHz - 40 GHz)  
Mode Tx 11ac-80 5610 MHz

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Duty Factor [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Remark      |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|------------------|-----------------|----------------|-------------|-------------|
| Hori     | 5725.000        | PK       | 42.0           | 32.3            | 7.5       | 31.8      | -                | 50.0            | 68.2           | 18.2        |             |
| Hori     | 11220.000       | PK       | 43.3           | 40.3            | -2.1      | 33.6      | -                | 47.9            | 73.9           | 26.0        | Floor noise |
| Hori     | 16830.000       | PK       | 43.5           | 40.3            | 0.1       | 33.0      | -                | 50.9            | 73.9           | 23.0        | Floor noise |
| Hori     | 11220.000       | AV       | 33.8           | 40.3            | -2.1      | 33.6      | -                | 38.4            | 53.9           | 15.5        | Floor noise |
| Hori     | 16830.000       | AV       | 35.5           | 40.3            | 0.1       | 33.0      | -                | 42.9            | 53.9           | 11.0        | Floor noise |
| Vert     | 5725.000        | PK       | 42.2           | 32.3            | 7.5       | 31.8      | -                | 50.2            | 68.2           | 18.0        |             |
| Vert     | 11220.000       | PK       | 42.6           | 40.3            | -2.1      | 33.6      | -                | 47.2            | 73.9           | 26.7        | Floor noise |
| Vert     | 16830.000       | PK       | 43.9           | 40.3            | 0.1       | 33.0      | -                | 51.3            | 73.9           | 22.6        | Floor noise |
| Vert     | 11220.000       | AV       | 33.8           | 40.3            | -2.1      | 33.6      | -                | 38.4            | 53.9           | 15.5        | Floor noise |
| Vert     | 16830.000       | AV       | 35.5           | 40.3            | 0.1       | 33.0      | -                | 42.9            | 53.9           | 11.0        | Floor noise |

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz 20log (4.4 m / 3.0 m) = 3.33 dB  
10 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

**UL Japan, Inc.**

**Ise EMC Lab.**



4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## Radiated Spurious Emission

|                        |   |
|------------------------|---|
| Report No.             | 12219846H                               |
| Test place             | Ise EMC Lab. No.3 Semi Anechoic Chamber |
| Date                   | March 20, 2018                          |
| Temperature / Humidity | 21 deg. C / 45 % RH                     |
| Engineer               | Tomoki Matsui                           |
| Mode                   | Tx 11ac-80 5610 MHz                     |

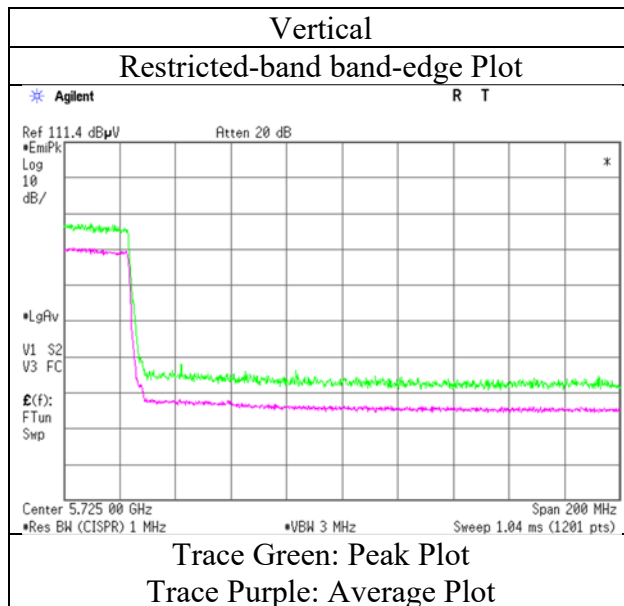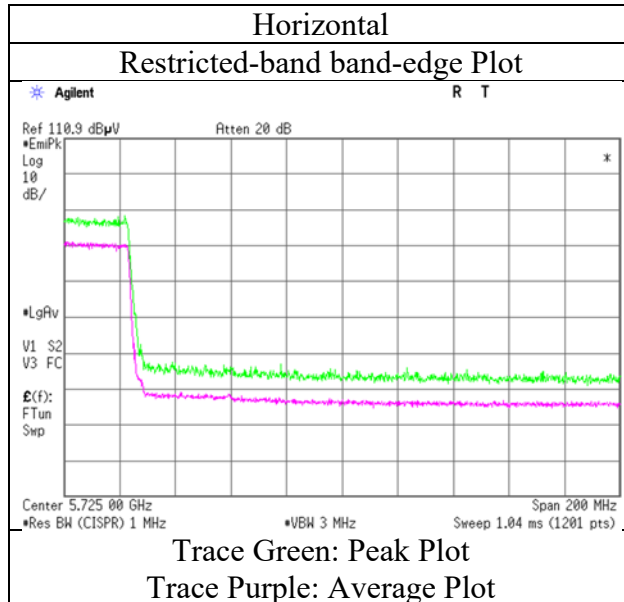

\* Final result of restricted band edge was shown in tabular data.



## Radiated Spurious Emission

Report No. 12219846H  
Test place Ise EMC Lab. No.3 Semi Anechoic Chamber  
Date March 20, 2018 March 23, 2018 March 24, 2018 March 25, 2018  
Temperature / Humidity 21 deg. C / 45 % RH 24 deg. C / 30 % RH 21deg. C / 30 % RH 22 deg. C / 31 % RH  
Engineer Tomoki Matsui Takafumi Noguchi Ken Fujita Takafumi Noguchi  
(1 GHz - 10 GHz) (10 GHz - 18 GHz) (18 GHz - 26.5 GHz) (26.5 GHz - 40 GHz)  
Mode Tx 11ac-80 5775 MHz

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Duty Factor [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Remark      |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|------------------|-----------------|----------------|-------------|-------------|
| Hori     | 5650.000        | PK       | 41.8           | 32.2            | 7.5       | 31.8      | -                | 49.7            | 68.2           | 18.5        |             |
| Hori     | 5700.000        | PK       | 46.1           | 32.3            | 7.5       | 31.8      | -                | 54.1            | 105.2          | 51.1        |             |
| Hori     | 5720.000        | PK       | 46.2           | 32.3            | 7.5       | 31.8      | -                | 54.2            | 110.8          | 56.6        |             |
| Hori     | 5725.000        | PK       | 46.5           | 32.3            | 7.5       | 31.8      | -                | 54.5            | 122.2          | 67.7        |             |
| Hori     | 5850.000        | PK       | 43.4           | 32.5            | 7.5       | 31.8      | -                | 51.6            | 122.2          | 70.6        |             |
| Hori     | 5855.000        | PK       | 42.3           | 32.5            | 7.5       | 31.8      | -                | 50.5            | 110.8          | 60.3        |             |
| Hori     | 5875.000        | PK       | 41.7           | 32.5            | 7.5       | 31.8      | -                | 49.9            | 105.2          | 55.3        |             |
| Hori     | 5925.000        | PK       | 41.6           | 32.6            | 7.6       | 31.8      | -                | 50.0            | 68.2           | 18.2        |             |
| Hori     | 11550.000       | PK       | 43.2           | 40.0            | -1.9      | 33.5      | -                | 47.8            | 73.9           | 26.1        | Floor noise |
| Hori     | 17325.000       | PK       | 44.0           | 42.7            | 0.2       | 32.9      | -                | 54.0            | 73.9           | 19.9        | Floor noise |
| Hori     | 11550.000       | AV       | 33.8           | 40.0            | -1.9      | 33.5      | -                | 38.4            | 53.9           | 15.5        | Floor noise |
| Hori     | 17325.000       | AV       | 35.4           | 42.7            | 0.2       | 32.9      | -                | 45.4            | 53.9           | 8.5         | Floor noise |
| Vert     | 5650.000        | PK       | 42.0           | 32.2            | 7.5       | 31.8      | -                | 49.9            | 68.2           | 18.3        |             |
| Vert     | 5700.000        | PK       | 46.0           | 32.3            | 7.5       | 31.8      | -                | 54.0            | 105.2          | 51.2        |             |
| Vert     | 5720.000        | PK       | 46.2           | 32.3            | 7.5       | 31.8      | -                | 54.2            | 110.8          | 56.6        |             |
| Vert     | 5725.000        | PK       | 47.3           | 32.3            | 7.5       | 31.8      | -                | 55.3            | 122.2          | 66.9        |             |
| Vert     | 5850.000        | PK       | 44.2           | 32.5            | 7.5       | 31.8      | -                | 52.4            | 122.2          | 69.8        |             |
| Vert     | 5855.000        | PK       | 42.4           | 32.5            | 7.5       | 31.8      | -                | 50.6            | 110.8          | 60.2        |             |
| Vert     | 5875.000        | PK       | 41.3           | 32.5            | 7.5       | 31.8      | -                | 49.5            | 105.2          | 55.7        |             |
| Vert     | 5925.000        | PK       | 40.7           | 32.6            | 7.6       | 31.8      | -                | 49.1            | 68.2           | 19.1        |             |
| Vert     | 11550.000       | PK       | 43.0           | 40.0            | -1.9      | 33.5      | -                | 47.6            | 73.9           | 26.3        | Floor noise |
| Vert     | 17325.000       | PK       | 44.7           | 42.7            | 0.2       | 32.9      | -                | 54.7            | 73.9           | 19.2        | Floor noise |
| Vert     | 11550.000       | AV       | 34.0           | 40.0            | -1.9      | 33.5      | -                | 38.6            | 53.9           | 15.3        | Floor noise |
| Vert     | 17325.000       | AV       | 35.6           | 42.7            | 0.2       | 32.9      | -                | 45.6            | 53.9           | 8.3         | Floor noise |

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz  $20\log(4.4\text{ m} / 3.0\text{ m}) = 3.33\text{ dB}$   
10 GHz - 40 GHz  $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

**UL Japan, Inc.**

**Ise EMC Lab.**



4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## Radiated Spurious Emission



|                        |   |
|------------------------|---|
| Report No.             | 12219846H                               |
| Test place             | Ise EMC Lab. No.3 Semi Anechoic Chamber |
| Date                   | March 20, 2018                          |
| Temperature / Humidity | 21 deg. C / 45 % RH                     |
| Engineer               | Tomoki Matsui                           |
| Mode                   | Tx 11ac-80 5775 MHz                     |

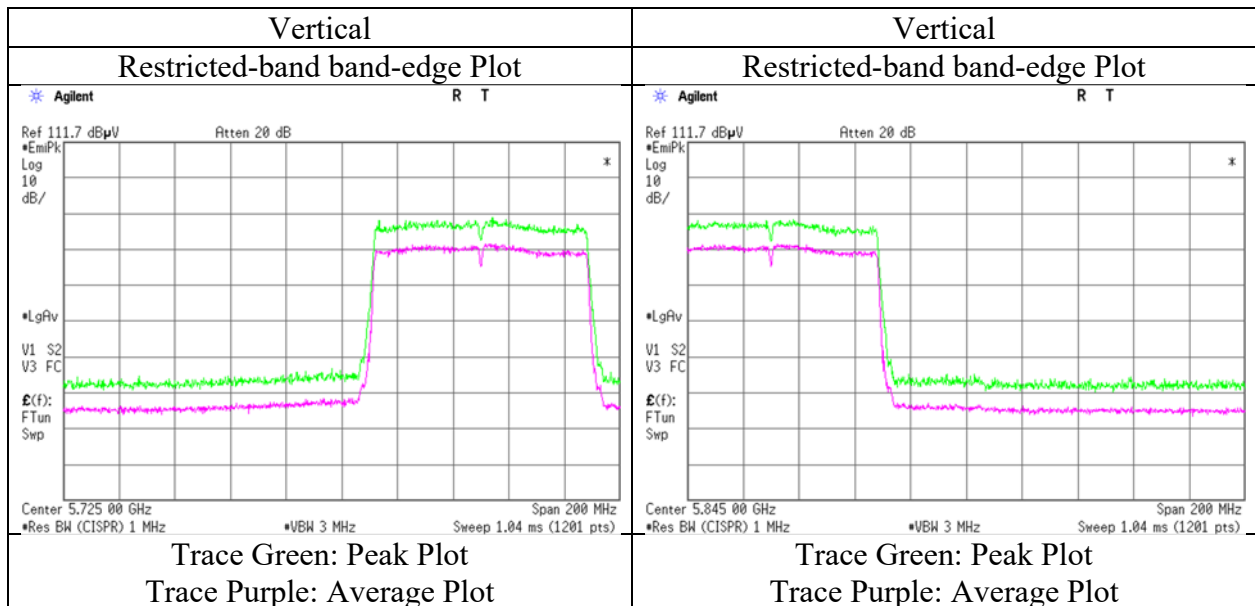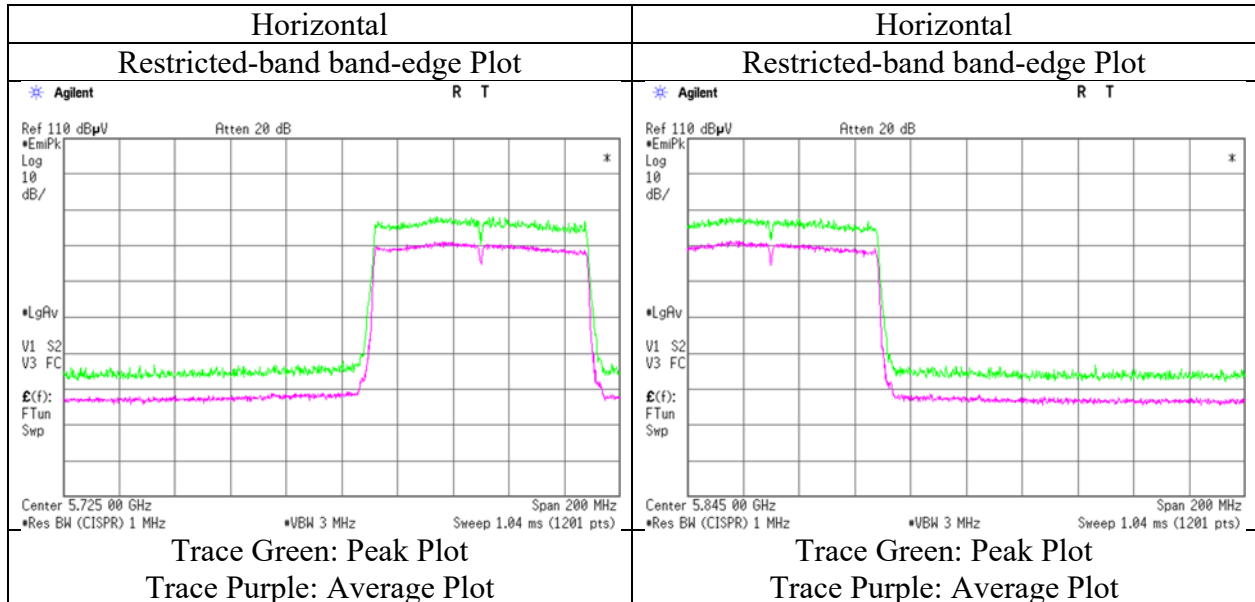

\* Final result of restricted band edge was shown in tabular data.

**Radiated Spurious Emission**  
**(Plot data, Worst case)**

|                        |   |                     |                     |                     |                     |
|------------------------|---|---------------------|---------------------|---------------------|---------------------|
| Report No.             | 12219846H                               |                     |                     |                     |                     |
| Test place             | Ise EMC Lab. No.3 Semi Anechoic Chamber |                     |                     |                     |                     |
| Date                   | March 20, 2018                          | March 23, 2018      | March 24, 2018      | March 25, 2018      | March 28, 2018      |
| Temperature / Humidity | 21 deg. C / 45 % RH                     | 24 deg. C / 30 % RH | 21deg. C / 30 % RH  | 22 deg. C / 31 % RH | 18 deg. C / 42 % RH |
| Engineer               | Tomoki Matsui                           | Takafumi Noguchi    | Ken Fujita          | Takafumi Noguchi    | Takafumi Noguchi    |
|                        | (1 GHz - 10 GHz)                        | (10 GHz - 18 GHz)   | (18 GHz - 26.5 GHz) | (26.5 GHz - 40 GHz) | (Below 1 GHz)       |
| Mode                   | Tx 11ac-40 5550 MHz                     |                     |                     |                     |                     |

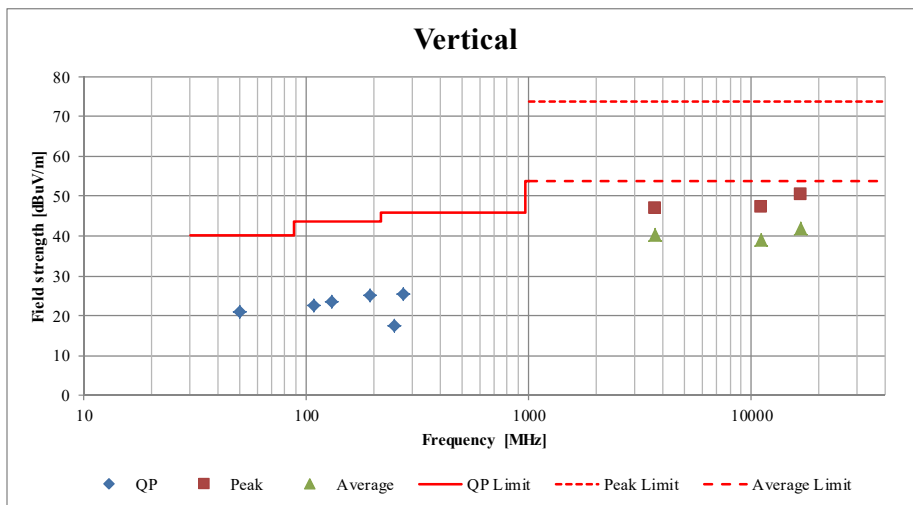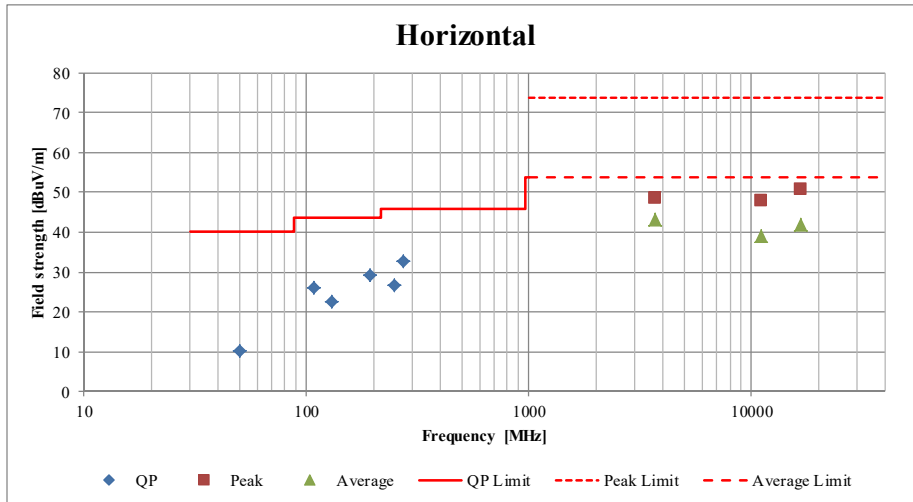

\*These plots data contains sufficient number to show the trend of characteristic features for EUT.

## Radiated Spurious Emission

Report No. 12219846H  
Test place Ise EMC Lab. No.3 Semi Anechoic Chamber  
Date March 20, 2018 March 23, 2018 March 24, 2018 March 25, 2018 March 28, 2018  
Temperature / Humidity 23 deg. C / 40 % RH 24 deg. C / 30 % RH 21 deg. C / 30 % RH 22 deg. C / 31 % RH 18 deg. C / 42 % RH  
Engineer Takumi Shimada Takumi Shimada Ken Fujita Takafumi Noguchi Takafumi Noguchi  
(1 GHz - 10 GHz) (10 GHz - 18 GHz) (18 GHz - 26.5 GHz) (26.5 GHz - 40 GHz) (Below 1 GHz)  
Mode Tx 11ac-80 5530 MHz + Tx 3DH5 Hopping ON

| Polarity | Frequency [MHz] | Detector | Reading [dBuV] | Ant.Fac. [dB/m] | Loss [dB] | Gain [dB] | Duty Factor [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Remark      |
|----------|-----------------|----------|----------------|-----------------|-----------|-----------|------------------|-----------------|----------------|-------------|-------------|
| Hori     | 50.145          | QP       | 23.8           | 10.6            | 7.5       | 32.2      | -                | 9.7             | 40.0           | 30.3        |             |
| Hori     | 107.713         | QP       | 38.9           | 11.1            | 8.3       | 32.2      | -                | 26.1            | 43.5           | 17.4        |             |
| Hori     | 130.000         | QP       | 34.6           | 13.6            | 8.5       | 32.2      | -                | 24.5            | 43.5           | 19.0        |             |
| Hori     | 193.144         | QP       | 36.4           | 16.4            | 9.1       | 32.1      | -                | 29.8            | 43.5           | 13.7        |             |
| Hori     | 247.000         | QP       | 38.1           | 11.5            | 9.6       | 32.0      | -                | 27.2            | 46.0           | 18.8        |             |
| Hori     | 271.142         | QP       | 42.6           | 12.3            | 9.8       | 32.0      | -                | 32.7            | 46.0           | 13.3        |             |
| Hori     | 5460.000        | PK       | 50.8           | 32.0            | 7.4       | 31.8      | -                | 58.4            | 73.9           | 15.5        |             |
| Hori     | 5470.000        | PK       | 51.7           | 32.0            | 7.4       | 31.8      | -                | 59.3            | 68.2           | 8.9         | Floor noise |
| Hori     | 11060.000       | PK       | 43.2           | 40.5            | -2.2      | 33.6      | -                | 47.9            | 73.9           | 26.0        | Floor noise |
| Hori     | 16590.000       | PK       | 44.2           | 39.6            | 0.0       | 33.0      | -                | 50.8            | 73.9           | 23.1        | Floor noise |
| Hori     | 5460.000        | AV       | 39.1           | 32.0            | 7.4       | 31.8      | -                | 46.7            | 53.9           | 7.2         | Floor noise |
| Hori     | 11060.000       | AV       | 35.3           | 40.5            | -2.2      | 33.6      | -                | 40.0            | 53.9           | 13.9        | Floor noise |
| Hori     | 16590.000       | AV       | 35.3           | 39.6            | 0.0       | 33.0      | -                | 41.9            | 53.9           | 12.0        | Floor noise |
| Vert     | 50.145          | QP       | 34.1           | 10.6            | 7.5       | 32.2      | -                | 20.0            | 40.0           | 20.0        |             |
| Vert     | 107.713         | QP       | 35.4           | 11.1            | 8.3       | 32.2      | -                | 22.6            | 43.5           | 20.9        |             |
| Vert     | 130.000         | QP       | 35.5           | 13.6            | 8.5       | 32.2      | -                | 25.4            | 43.5           | 18.1        |             |
| Vert     | 193.144         | QP       | 32.3           | 16.4            | 9.1       | 32.1      | -                | 25.7            | 43.5           | 17.8        |             |
| Vert     | 247.000         | QP       | 28.8           | 11.5            | 9.6       | 32.0      | -                | 17.9            | 46.0           | 28.1        |             |
| Vert     | 271.142         | QP       | 35.3           | 12.3            | 9.8       | 32.0      | -                | 25.4            | 46.0           | 20.6        |             |
| Vert     | 5460.000        | PK       | 49.8           | 32.0            | 7.4       | 31.8      | -                | 57.4            | 73.9           | 16.5        | Floor noise |
| Vert     | 5470.000        | PK       | 51.4           | 32.0            | 7.4       | 31.8      | -                | 59.0            | 68.2           | 9.2         | Floor noise |
| Vert     | 11060.000       | PK       | 42.7           | 40.5            | -2.2      | 33.6      | -                | 47.4            | 73.9           | 26.5        | Floor noise |
| Vert     | 16590.000       | PK       | 44.0           | 39.6            | 0.0       | 33.0      | -                | 50.6            | 73.9           | 23.3        | Floor noise |
| Vert     | 5460.000        | AV       | 38.3           | 32.0            | 7.4       | 31.8      | -                | 45.9            | 53.9           | 8.0         | Floor noise |
| Vert     | 11060.000       | AV       | 34.8           | 40.5            | -2.2      | 33.6      | -                | 39.5            | 53.9           | 14.4        | Floor noise |
| Vert     | 16590.000       | AV       | 35.2           | 39.6            | 0.0       | 33.0      | -                | 41.8            | 53.9           | 12.1        | Floor noise |

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz 20log (4.4 m / 3.0 m) = 3.33 dB  
10 GHz - 40 GHz 20log (1.0 m / 3.0 m) = -9.5 dB

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## **APPENDIX 2: Test instruments**

### **Test equipment**

| <b>Control No.</b> | <b>Instrument</b>                 | <b>Manufacturer</b>  | <b>Model No</b>                             | <b>Serial No</b>            | <b>Test Item</b> | <b>Calibration Date * Interval(month)</b> |
|--------------------|-----------------------------------|----------------------|---|-----------------------------|------------------|---|
| MAEC-03            | Semi Anechoic Chamber(NSA)        | TDK                  | Semi Anechoic Chamber 3m                    | DA-10005                    | RE               | 2017/10/31 * 12                           |
| MOS-13             | Thermo-Hygrometer                 | Custom               | CTH-180                                     | 1301                        | RE               | 2018/01/24 * 12                           |
| MJM-16             | Measure                           | KOMELON              | KMC-36                                      | -                           | RE               | -   |
| COTS-MEMI          | EMI measurement program           | TSJ                  | TEPTO-DV                                    | -                           | RE               | -   |
| MSA-03             | Spectrum Analyzer                 | Agilent              | E4448A                                      | MY44020357                  | RE               | 2017/11/07 * 12                           |
| MHA-20             | Horn Antenna 1-18GHz              | Schwarzbeck          | BBHA9120D                                   | 258                         | RE               | 2017/05/22 * 12                           |
| MCC-167            | Microwave Cable                   | Junkosha             | MWX221                                      | 1404S374(1m) / 1405S074(5m) | RE               | 2017/05/29 * 12                           |
| MPA-11             | MicroWave System Amplifier        | Agilent              | 83017A                                      | MY39500779                  | RE               | 2018/03/13 * 12                           |
| MHA-17             | Horn Antenna 15-40GHz             | Schwarzbeck          | BBHA9170                                    | BBHA9170307                 | RE               | 2017/06/30 * 12                           |
| MMM-08             | DIGITAL HiTESTER                  | Hioki                | 3805  | 051201197                   | RE               | 2018/01/09 * 12                           |
| MHF-22             | High Pass Filter 7-20GHz          | TOKIMEC              | TF37NCCB                                    | 602                         | RE               | 2018/01/18 * 12                           |
| MCC-177            | Microwave Cable                   | Junkosha             | MMX221-00500DMSDMS                          | 1502S304                    | RE               | 2018/03/12 * 12                           |
| MCC-224            | Coaxial Cable                     | Huber+Suhner         | SUCOFLEX 102A                               | MY009/2A                    | RE               | 2017/11/08 * 12                           |
| MHA-29             | Horn Antenna 26.5-40GHz           | ETS LINDGREN         | 3160-10                                     | 00152399                    | RE               | 2017/09/15 * 12                           |
| MPA-22             | Pre Amplifier                     | MITEQ, Inc           | AMF-6F-2600400-33-8P / AMF-4F-2600400-33-8P | 1871355 / 1871328           | RE               | 2017/09/07 * 12                           |
| MTR-08             | Test Receiver                     | Rohde & Schwarz      | ESCI  | 100767                      | RE               | 2017/08/22 * 12                           |
| MBA-03             | Biconical Antenna                 | Schwarzbeck          | BBA9106                                     | 1915                        | RE               | 2017/10/02 * 12                           |
| MLA-22             | Logperiodic Antenna (200-1000MHz) | Schwarzbeck          | VUSLP9111B                                  | 911B-191                    | RE               | 2018/01/30 * 12                           |
| MCC-51             | Coaxial cable                     | UL Japan             | -   | -                           | RE               | 2017/07/12 * 12                           |
| MAT-98             | Attenuator                        | KEYSIGHT             | 8491A                                       | MY52462349                  | RE               | 2017/12/14 * 12                           |
| MPA-13             | Pre Amplifier                     | SONOMA INSTRUMENT    | 310   | 260834                      | RE               | 2017/03/27 * 12                           |
| MPM-17             | Power Meter                       | DARE!! Instruments   | RPR3006W                                    | 14I00048SNO081              | AT               | 2017/11/02 * 12                           |
| MPM-18             | Power Meter                       | DARE!! Instruments   | RPR3006W                                    | 14I00048SNO082              | AT               | 2017/11/02 * 12                           |
| MAT-82             | Attenuator                        | Weinschel Associates | WA1-20-33                                   | 100132                      | AT               | 2017/05/10 * 12                           |
| MAT-83             | Attenuator                        | Weinschel Associates | WA1-20-33                                   | 100133                      | AT               | 2017/05/10 * 12                           |
| MAT-88             | Attenuator                        | Weinschel Associates | WA56-10                                     | 56100304                    | AT               | 2017/06/12 * 12                           |
| MAT-10             | Attenuator(10dB)                  | Weinschel Corp       | 2   | BL1173                      | AT               | 2017/11/14 * 12                           |
| MCC-174            | Microwave Cable                   | Junkosha             | MWX221                                      | 1409S497                    | AT               | 2017/03/13 * 12                           |
| MOS-19             | Thermo-Hygrometer                 | Custom               | CTH-201                                     | 0001                        | AT               | 2017/12/21 * 12                           |

**The expiration date of the calibration is the end of the expired month.**

**All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.**

**As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.**

**Test Item: RE: Radiated Emission  
AT: Antenna Terminal Conducted test**

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124