Specification of Antenna

1. Information

Antenna Type: IFA

Antenna name: ANT3 (PWB printed antenna)


Antenna number: L34RF049-Q

Manufacture LUXSHARE-ICT

Antenna Gain: 2400-2500 MHz 4.0dBi max

5150-5850 MHz 3.5dBi max

Outline:

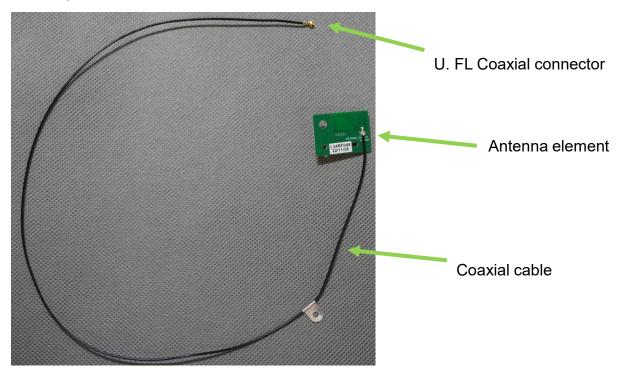

Measurement Location: Sony Interactive Entertainment Inc. Anechoic Chamber

1-7-1 Konan Minato-ku Tokyo Japan

• Measurement date : 2024/8

Test personnel Hiroaki Nagaoka

Equipment : ETS-L Antenna Measurement System

Keysight E5071C(Calibration date: 2023/9)

Measurement Software: EMQuest Data Acquisition and Analysis Software


2. Test Method

Antenna gain is measured in "ETS-L Antenna Measurement anechoic chamber".

This system consists of Dual-polarized antennas arranged in a ring and RF path switch control box. Network analyzer E5071C is connected to this chamber.


DUT is put on a turn table located in center of the chamber as pictured below.

Characteristics of the horizontal and vertical polarization are acquired in all direction by switching antennas and rotation of the turn table.

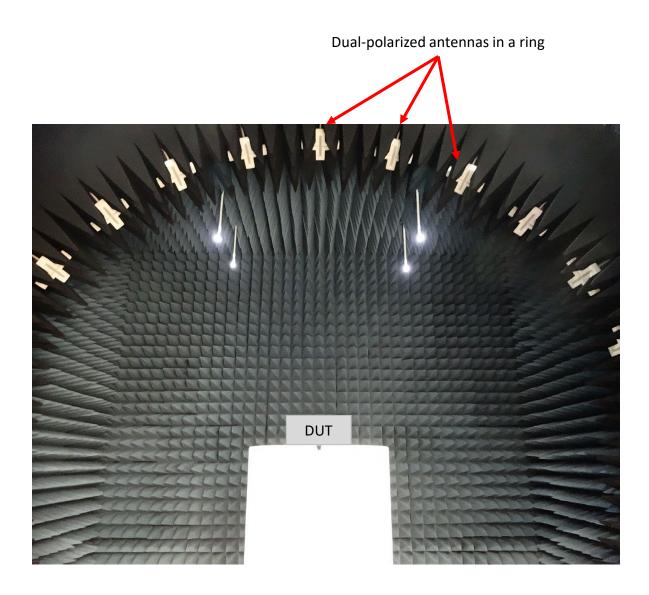

3. Radiation Pattern


XY Plane

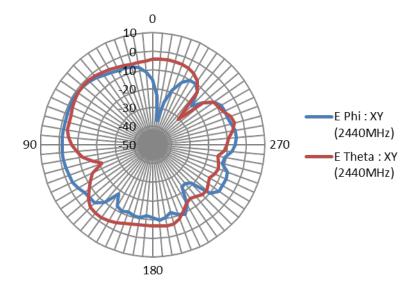






YZ Plane

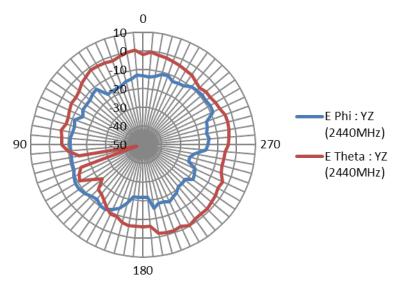


ZX Plane

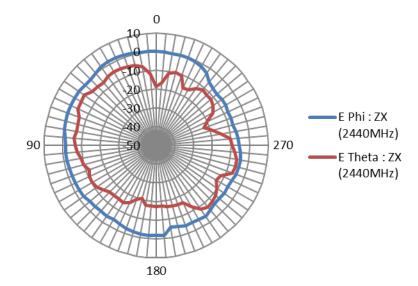

3. Radiation Pattern


XY Plane

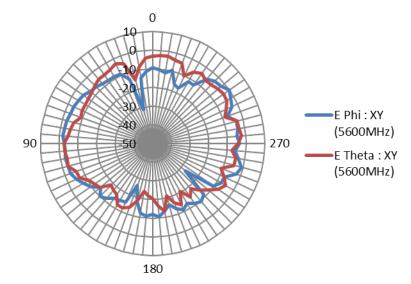





YZ Plane

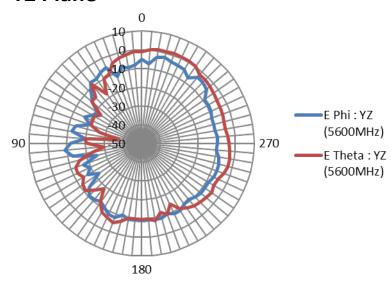

ZX Plane

