




Modulation	ax HE80-OFDMA	Test Freq. (MHz)	5610
Polarization	Vertical		

Test By : Sean Yu Temperature(°C): 25 Humidity(%): 66

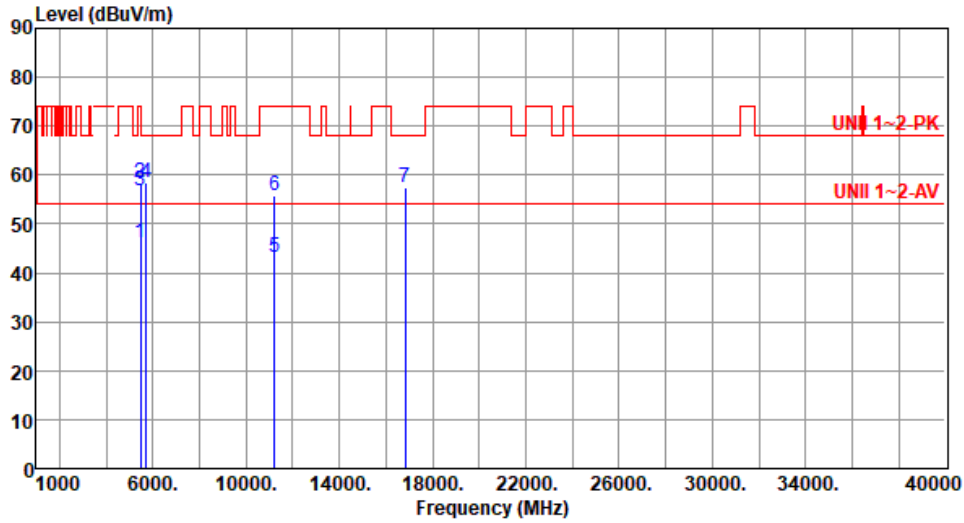

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	46.28	54.00	-7.72	46.31	-0.03	Average	100	14
2	5460.00	58.61	74.00	-15.39	58.64	-0.03	Peak	100	14
3	5470.00	56.63	68.20	-11.57	56.64	-0.01	Peak	100	14
4	5725.00	58.52	68.20	-9.68	58.04	0.48	Peak	100	14
5	11220.00	43.14	54.00	-10.86	36.42	6.72	Average	100	162
6	11220.00	55.93	74.00	-18.07	49.21	6.72	Peak	100	162
7	16830.00	57.44	68.20	-10.76	50.79	6.65	Peak	100	259

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	ax HE80-OFDMA	Test Freq. (MHz)	5690
Polarization	Horizontal		

Test By : Sean Yu Temperature(°C): 25 Humidity(%): 66

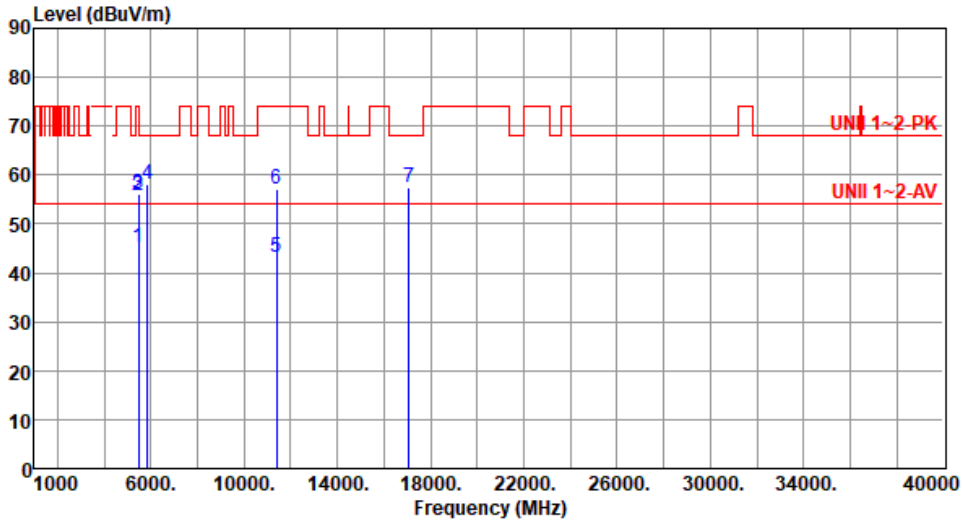

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	45.12	54.00	-8.88	45.15	-0.03	Average	100	357
2	5460.00	55.69	74.00	-18.31	55.72	-0.03	Peak	100	357
3	5470.00	56.22	68.20	-11.98	56.23	-0.01	Peak	100	357
4	5850.00	58.09	68.20	-10.11	57.34	0.75	Peak	100	357
5	11380.00	43.16	54.00	-10.84	36.19	6.97	Average	101	249
6	11380.00	57.14	74.00	-16.86	50.17	6.97	Peak	101	249
7	17070.00	57.29	68.20	-10.91	51.24	6.05	Peak	100	63

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).




Modulation	ax HE80-OFDMA	Test Freq. (MHz)	5690						
Polarization	Vertical								
Test By : Sean Yu		Temperature(°C): 25		Humidity(%): 66					
<p>The spectrum plot displays the emission level in dBuV/m across a frequency range from 1000 to 40000 MHz. A red line represents the emission level, showing several peaks. A horizontal red line at approximately 54 dBuV/m is labeled 'UNII 1-2-AV'. Another horizontal red line at approximately 70 dBuV/m is labeled 'UNII 1-2-PK'. Vertical blue lines indicate specific frequency points: 3, 4, 5, 6, and 7. The plot shows a series of peaks between 1000 and 30000 MHz, with the highest peak at 5460 MHz.</p>									
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	5460.00	44.53	54.00	-9.47	44.56	-0.03	Average	100	13
2	5460.00	55.35	74.00	-18.65	55.38	-0.03	Peak	100	13
3	5470.00	54.26	68.20	-13.94	54.27	-0.01	Peak	100	13
4	5850.00	56.75	68.20	-11.45	56.00	0.75	Peak	100	13
5	11380.00	43.88	54.00	-10.12	36.91	6.97	Average	105	142
6	11380.00	56.19	74.00	-17.81	49.22	6.97	Peak	105	142
7	17070.00	57.45	68.20	-10.75	51.40	6.05	Peak	100	236
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).</p>									



Modulation	ax HE80-OFDMA	Test Freq. (MHz)	5775
Polarization	Horizontal		

Test By : Sean Yu Temperature(°C): 25 Humidity(%): 66

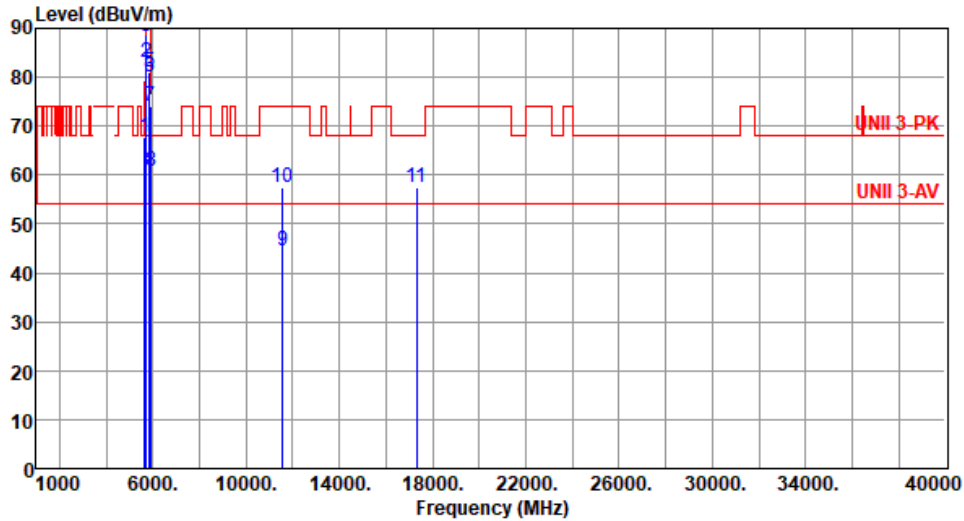

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5650.00	67.89	68.20	-0.31	67.75	0.14	Peak	100	351
2	5700.00	83.01	105.20	-22.19	82.65	0.36	Peak	100	351
3	5720.00	88.37	110.80	-22.43	87.91	0.46	Peak	100	351
4	5725.00	88.79	122.20	-33.41	88.31	0.48	Peak	100	351
5	5850.00	80.89	122.20	-41.31	80.14	0.75	Peak	100	351
6	5855.00	80.05	110.80	-30.75	79.27	0.78	Peak	100	351
7	5875.00	73.91	105.20	-31.29	73.04	0.87	Peak	100	351
8	5925.00	60.62	68.20	-7.58	59.55	1.07	Peak	100	351
9	11550.00	44.46	54.00	-9.54	37.45	7.01	Average	100	271
10	11550.00	57.49	74.00	-16.51	50.48	7.01	Peak	100	271
11	17325.00	57.41	68.20	-10.79	51.31	6.10	Peak	100	209

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	ax HE80-OFDMA	Test Freq. (MHz)	5775						
Polarization	Vertical								
Test By : Sean Yu		Temperature(°C): 25		Humidity(%): 66					
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5650.00	67.58	68.20	-0.62	67.44	0.14	Peak	100	65
2	5700.00	79.71	105.20	-25.49	79.35	0.36	Peak	100	65
3	5720.00	84.82	110.80	-25.98	84.36	0.46	Peak	100	65
4	5725.00	86.79	122.20	-35.41	86.31	0.48	Peak	100	65
5	5850.00	80.89	122.20	-41.31	80.14	0.75	Peak	100	65
6	5855.00	76.44	110.80	-34.36	75.66	0.78	Peak	100	65
7	5875.00	69.02	105.20	-36.18	68.15	0.87	Peak	100	65
8	5925.00	58.29	68.20	-9.91	57.22	1.07	Peak	100	65
9	11550.00	44.51	54.00	-9.49	37.50	7.01	Average	100	192
10	11550.00	56.95	74.00	-17.05	49.94	7.01	Peak	100	192
11	17325.00	58.82	68.20	-9.38	52.72	6.10	Peak	196	341
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).</p>									



Unwanted Emissions (Above 1GHz) for ax HE160-OFDMA

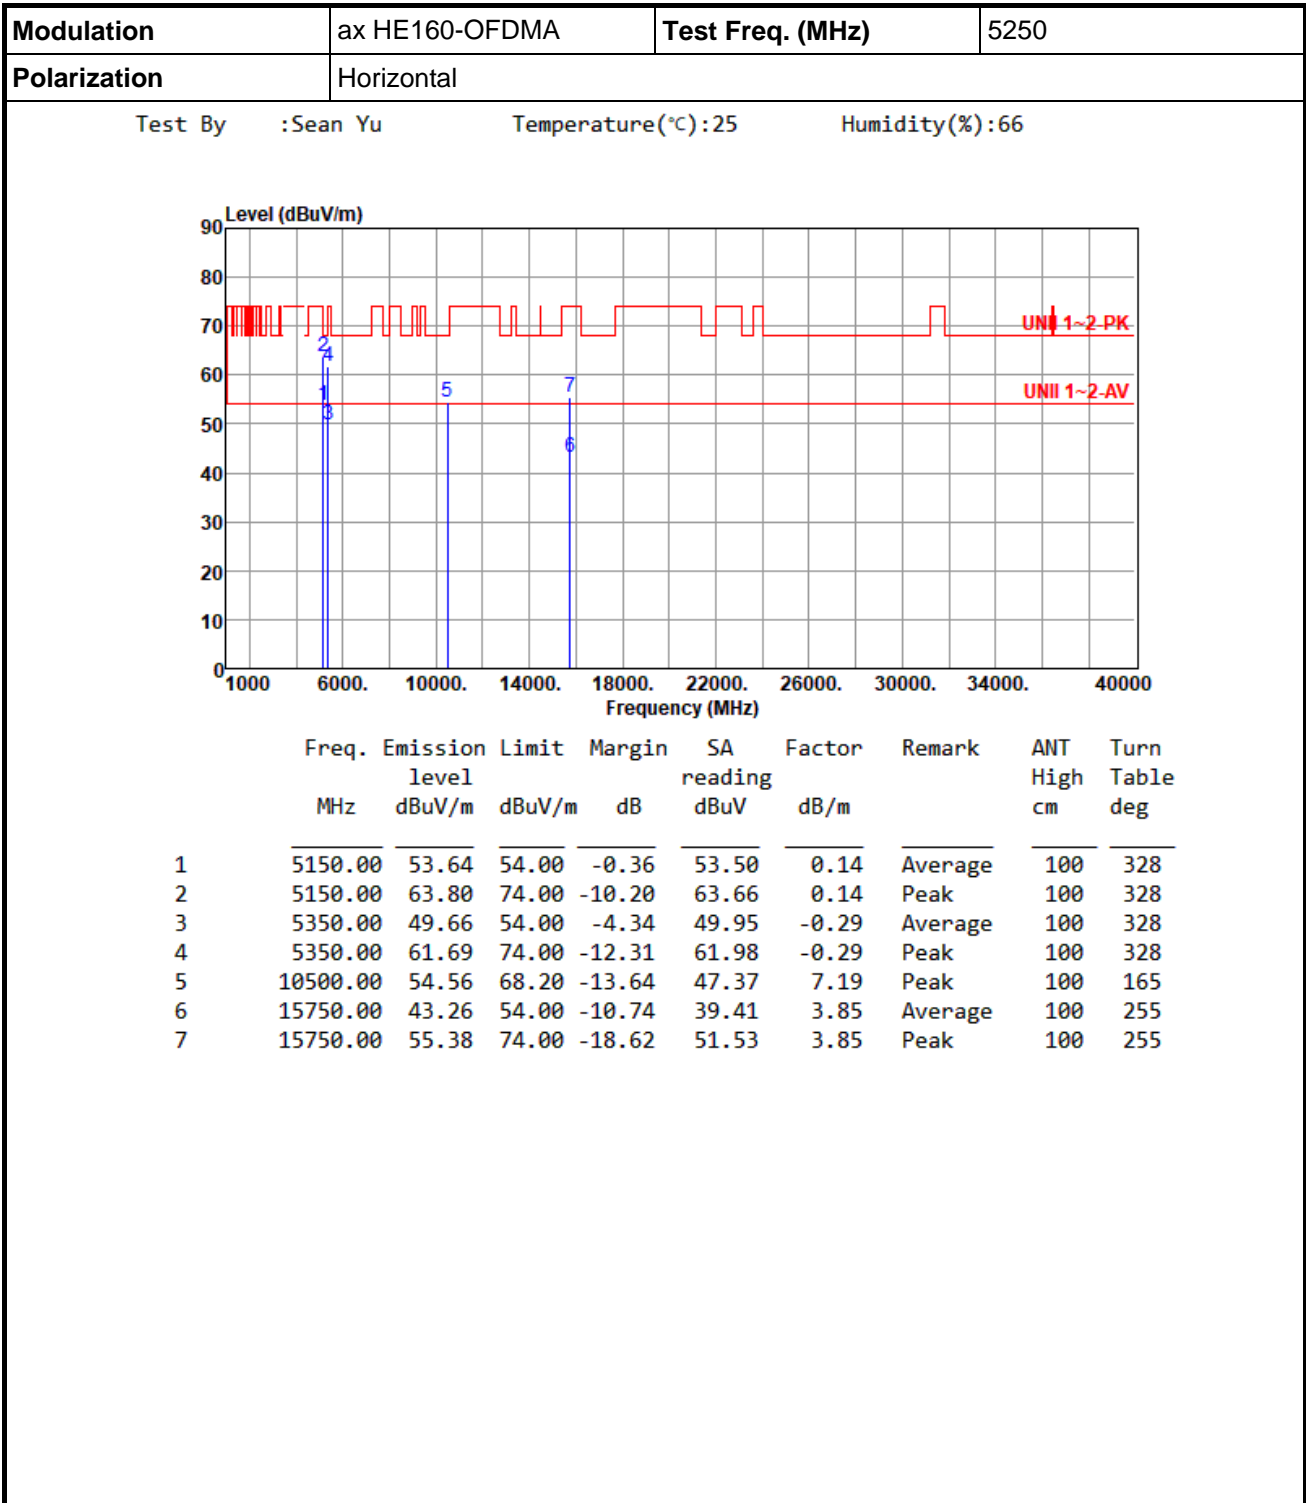

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	ax HE160-OFDMA	Test Freq. (MHz)	5250
Polarization	Vertical		

Test By : Sean Yu Temperature(°C): 25 Humidity(%): 66

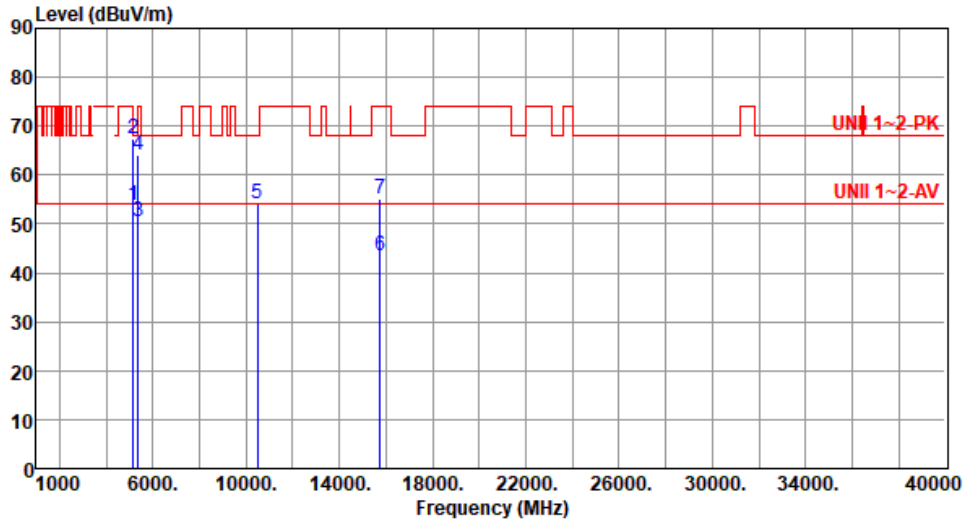

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	53.81	54.00	-0.19	53.67	0.14	Average	100	40
2	5150.00	67.39	74.00	-6.61	67.25	0.14	Peak	100	40
3	5350.00	50.63	54.00	-3.37	50.92	-0.29	Average	100	40
4	5350.00	64.11	74.00	-9.89	64.40	-0.29	Peak	100	40
5	10500.00	54.27	68.20	-13.93	47.08	7.19	Peak	100	153
6	15750.00	43.34	54.00	-10.66	39.49	3.85	Average	100	216
7	15750.00	55.19	74.00	-18.81	51.34	3.85	Peak	100	216

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	ax HE160-OFDMA	Test Freq. (MHz)	5570
Polarization	Horizontal		

Test By : Sean Yu Temperature(°C): 25 Humidity(%): 66

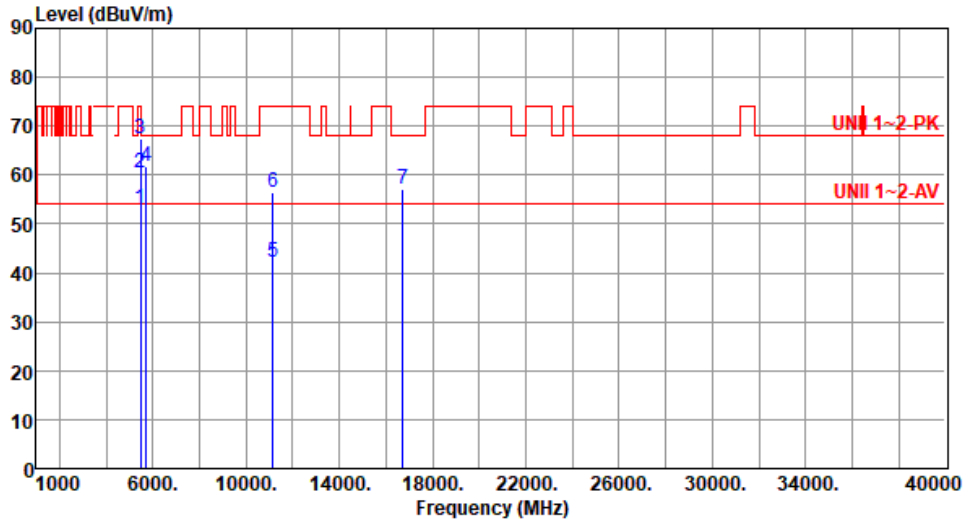

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	53.08	54.00	-0.92	53.11	-0.03	Average	100	359
2	5460.00	60.44	74.00	-13.56	60.47	-0.03	Peak	100	359
3	5470.00	67.48	68.20	-0.72	67.49	-0.01	Peak	100	359
4	5725.00	61.63	68.20	-6.57	61.15	0.48	Peak	100	359
5	11140.00	42.28	54.00	-11.72	35.25	7.03	Average	100	233
6	11140.00	56.31	74.00	-17.69	49.28	7.03	Peak	100	233
7	16710.00	57.26	68.20	-10.94	51.02	6.24	Peak	100	65

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	ax HE160-OFDMA	Test Freq. (MHz)	5570						
Polarization	Vertical								
Test By : Sean Yu		Temperature(°C): 25		Humidity(%): 66					
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	5460.00	53.72	54.00	-0.28	53.75	-0.03	Average	100	21
2	5460.00	62.43	74.00	-11.57	62.46	-0.03	Peak	100	21
3	5470.00	63.54	68.20	-4.66	63.55	-0.01	Peak	100	21
4	5725.00	58.32	68.20	-9.88	57.84	0.48	Peak	100	21
5	11140.00	42.35	54.00	-11.65	35.32	7.03	Average	100	224
6	11140.00	56.11	74.00	-17.89	49.08	7.03	Peak	100	224
7	16710.00	57.15	68.20	-11.05	50.91	6.24	Peak	100	118

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
 *Factor includes antenna factor , cable loss and amplifier gain
 Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Frequency: 5300 MHz	Frequency Drift (ppm)			
Temperature (°C)	0 minute	2 minutes	5 minutes	10 minutes
T20°CVmax	3.36	3.46	3.09	3.71
T20°CVmin	3.97	4.28	4.02	4.37
T50°CVnom	6.23	6.13	6.79	7.09
T40°CVnom	4.05	3.89	4.24	3.64
T30°CVnom	3.10	2.69	3.27	2.94
T20°CVnom	3.45	3.24	2.70	3.23
T10°CVnom	3.14	3.33	2.74	2.56
T0°CVnom	3.71	4.36	3.79	3.45
T-10°CVnom	2.41	2.08	2.60	2.69
T-20°CVnom	1.60	1.02	1.49	1.73
T-30°CVnom	-3.28	-3.21	-2.94	-3.13
Vnom [V]: 120	Vmax [V]: 138		Vmin [V]: 102	
Tnom [°C]: 20	Tmax [°C]: 50		Tmin [°C]: -30	


Frequency: 5785 MHz	Frequency Drift (ppm)			
Temperature (°C)	0 minute	2 minutes	5 minutes	10 minutes
T20°CVmax	3.48	3.80	4.26	3.44
T20°CVmin	3.88	4.21	4.42	3.68
T50°CVnom	5.75	5.60	6.00	6.26
T40°CVnom	3.48	3.43	3.96	3.79
T30°CVnom	2.71	3.19	2.71	2.77
T20°CVnom	3.38	3.16	3.20	4.02
T10°CVnom	2.87	3.50	3.41	2.56
T0°CVnom	3.98	4.04	4.29	4.47
T-10°CVnom	2.20	2.65	2.56	1.99
T-20°CVnom	1.44	1.32	1.97	1.76
T-30°CVnom	-2.89	-2.62	-2.74	-2.28
Vnom [V]: 120	Vmax [V]: 138		Vmin [V]: 102	
Tnom [°C]: 20	Tmax [°C]: 50		Tmin [°C]: -30	



Non-beamforming mode

Modulation Mode	11a	Test Freq. (MHz)	5240
Power Phase	Line		

Test by : Joe Liao Temperature: 25°C Humidity: 66%

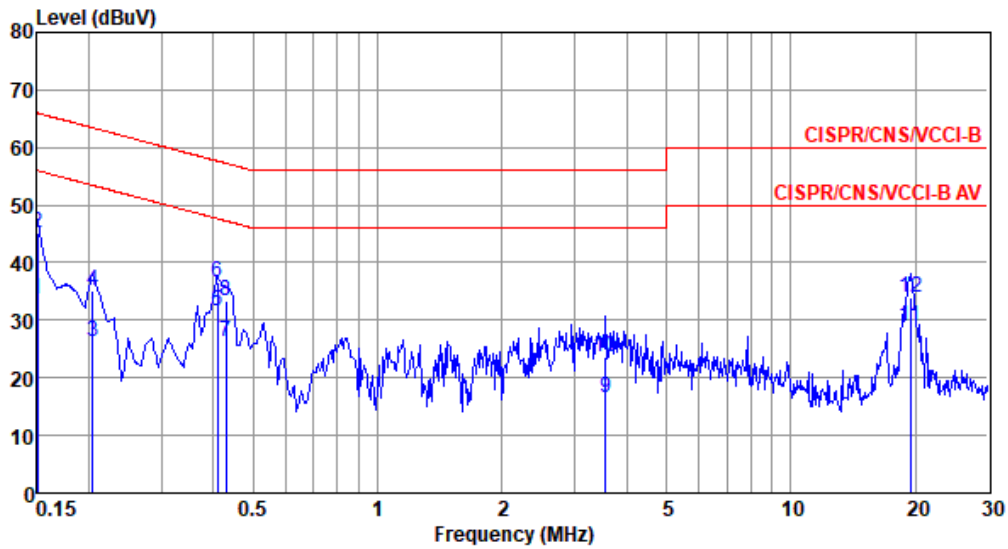


	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.150	33.70	56.00	-22.30	23.78	9.68	0.06	0.18	Average
2	0.150	45.05	66.00	-20.95	35.13	9.68	0.06	0.18	QP
3	0.204	26.23	53.45	-27.22	16.30	9.68	0.06	0.19	Average
4	0.204	35.20	63.45	-28.25	25.27	9.68	0.06	0.19	QP
5*	0.410	31.53	47.64	-16.11	21.50	9.67	0.06	0.30	Average
6	0.410	36.57	57.64	-21.07	26.54	9.67	0.06	0.30	QP
7	0.431	26.31	47.24	-20.93	16.28	9.67	0.06	0.30	Average
8	0.431	33.45	57.24	-23.79	23.42	9.67	0.06	0.30	QP
9	3.565	16.68	46.00	-29.32	6.40	9.70	0.17	0.41	Average
10	3.565	23.64	56.00	-32.36	13.36	9.70	0.17	0.41	QP
11	19.428	28.90	50.00	-21.10	18.15	9.73	0.50	0.52	Average
12	19.428	33.88	60.00	-26.12	23.13	9.73	0.50	0.52	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).
 Note 2: Over Limit (dB) = Level (dBuV) - Limit Line (dBuV).



Modulation Mode	11a	Test Freq. (MHz)	5240
Power Phase	Neutral		

Test by : Joe Liao Temperature: 25°C Humidity: 66%

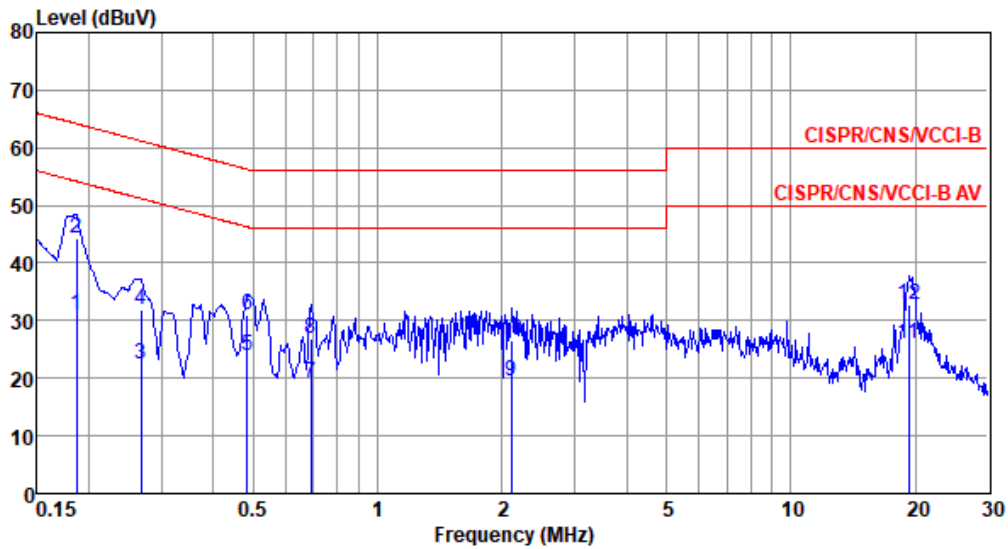


	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.186	31.10	54.20	-23.10	21.24	9.61	0.06	0.19	Average
2*	0.186	44.18	64.20	-20.02	34.32	9.61	0.06	0.19	QP
3	0.267	22.43	51.20	-28.77	12.52	9.61	0.06	0.24	Average
4	0.267	31.84	61.20	-29.36	21.93	9.61	0.06	0.24	QP
5	0.484	23.80	46.27	-22.47	13.81	9.61	0.07	0.31	Average
6	0.484	31.10	56.27	-25.17	21.11	9.61	0.07	0.31	QP
7	0.690	19.26	46.00	-26.74	9.24	9.61	0.09	0.32	Average
8	0.690	26.87	56.00	-29.13	16.85	9.61	0.09	0.32	QP
9	2.110	19.49	46.00	-26.51	9.38	9.62	0.13	0.36	Average
10	2.110	26.58	56.00	-29.42	16.47	9.62	0.13	0.36	QP
11	19.326	25.97	50.00	-24.03	15.16	9.79	0.50	0.52	Average
12	19.326	32.67	60.00	-27.33	21.86	9.79	0.50	0.52	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).
 Note 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).



Modulation Mode	ax HE20-OFDMA	Test Freq. (MHz)	5825
Power Phase	Line		

Test by : Joe Liao Temperature: 25°C Humidity: 66%

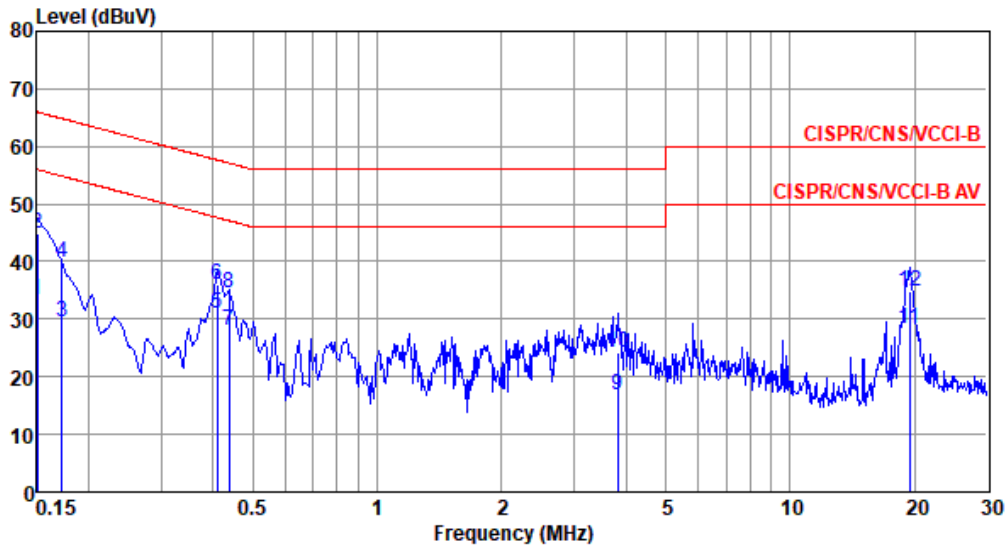


	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.150	33.47	56.00	-22.53	23.55	9.68	0.06	0.18	Average
2	0.150	44.82	66.00	-21.18	34.90	9.68	0.06	0.18	QP
3	0.172	29.60	54.86	-25.26	19.68	9.68	0.06	0.18	Average
4	0.172	39.96	64.86	-24.90	30.04	9.68	0.06	0.18	QP
5*	0.410	31.13	47.64	-16.51	21.10	9.67	0.06	0.30	Average
6	0.410	35.93	57.64	-21.71	25.90	9.67	0.06	0.30	QP
7	0.437	28.17	47.11	-18.94	18.14	9.67	0.06	0.30	Average
8	0.437	34.64	57.11	-22.47	24.61	9.67	0.06	0.30	QP
9	3.820	16.72	46.00	-29.28	6.42	9.70	0.18	0.42	Average
10	3.820	24.10	56.00	-31.90	13.80	9.70	0.18	0.42	QP
11	19.428	28.41	50.00	-21.59	17.66	9.73	0.50	0.52	Average
12	19.428	34.92	60.00	-25.08	24.17	9.73	0.50	0.52	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).
 Note 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).



Modulation Mode	ax HE20-OFDMA	Test Freq. (MHz)	5825
Power Phase	Neutral		

Test by : Joe Liao Temperature: 25°C Humidity: 66%

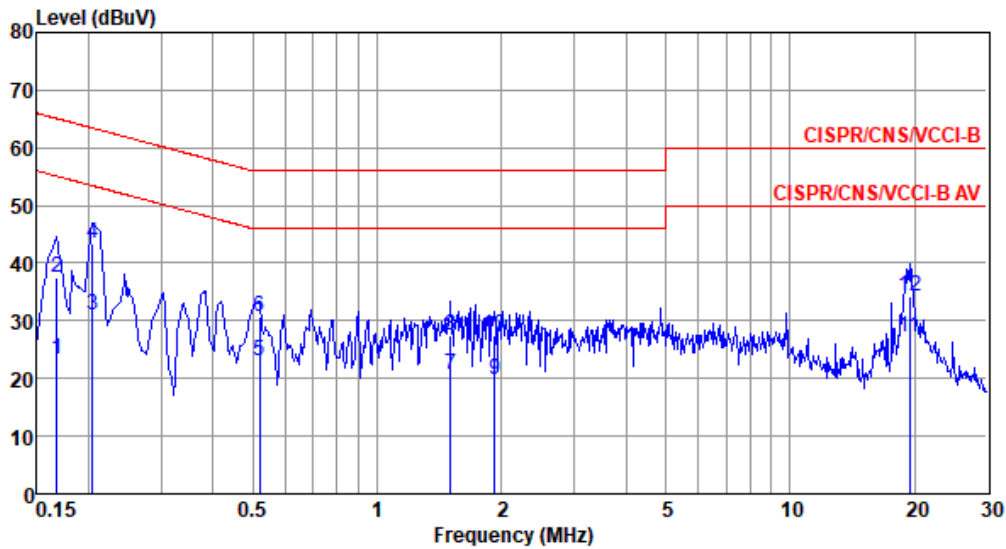

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.168	23.46	55.08	-31.62	13.61	9.61	0.06	0.18	Average
2	0.168	37.61	65.08	-27.47	27.76	9.61	0.06	0.18	QP
3	0.204	30.87	53.45	-22.58	21.01	9.61	0.06	0.19	Average
4*	0.204	43.29	63.45	-20.16	33.43	9.61	0.06	0.19	QP
5	0.518	23.10	46.00	-22.90	13.11	9.61	0.07	0.31	Average
6	0.518	30.84	56.00	-25.16	20.85	9.61	0.07	0.31	QP
7	1.503	20.71	46.00	-25.29	10.62	9.62	0.12	0.35	Average
8	1.503	27.60	56.00	-28.40	17.51	9.62	0.12	0.35	QP
9	1.928	19.91	46.00	-26.09	9.80	9.62	0.13	0.36	Average
10	1.928	27.39	56.00	-28.61	17.28	9.62	0.13	0.36	QP
11	19.428	27.28	50.00	-22.72	16.47	9.79	0.50	0.52	Average
12	19.428	34.11	60.00	-25.89	23.30	9.79	0.50	0.52	QP


Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).
 Note 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).



Beamforming mode

Modulation Mode	ax HE20-OFDMA	Test Freq. (MHz)	5240
Power Phase	Line		

Test by : Joe Liao Temperature: 25°C Humidity: 66%

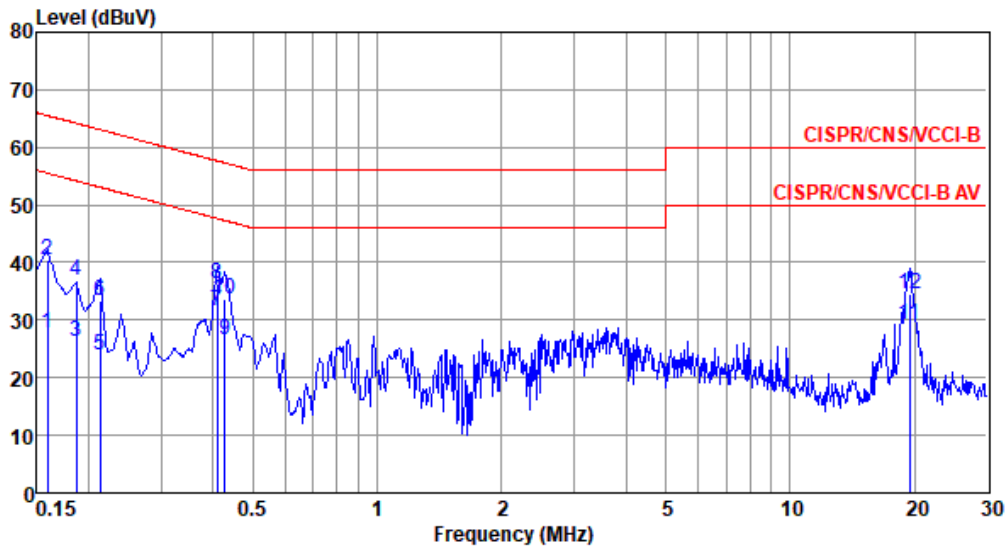


	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.159	27.66	55.52	-27.86	17.74	9.68	0.06	0.18	Average
2	0.159	40.57	65.52	-24.95	30.65	9.68	0.06	0.18	QP
3	0.186	26.36	54.20	-27.84	16.43	9.68	0.06	0.19	Average
4	0.186	36.98	64.20	-27.22	27.05	9.68	0.06	0.19	QP
5	0.213	24.01	53.10	-29.09	14.07	9.68	0.06	0.20	Average
6	0.213	33.27	63.10	-29.83	23.33	9.68	0.06	0.20	QP
7*	0.410	31.50	47.64	-16.14	21.47	9.67	0.06	0.30	Average
8	0.410	36.32	57.64	-21.32	26.29	9.67	0.06	0.30	QP
9	0.428	26.56	47.29	-20.73	16.53	9.67	0.06	0.30	Average
10	0.428	33.75	57.29	-23.54	23.72	9.67	0.06	0.30	QP
11	19.428	29.09	50.00	-20.91	18.34	9.73	0.50	0.52	Average
12	19.428	34.51	60.00	-25.49	23.76	9.73	0.50	0.52	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).
 2: Over Limit (dB) = Level (dBuV) - Limit Line (dBuV).



Modulation Mode	ax HE20-OFDMA	Test Freq. (MHz)	5240
Power Phase	Neutral		

Test by : Joe Liao Temperature: 25°C Humidity: 66%

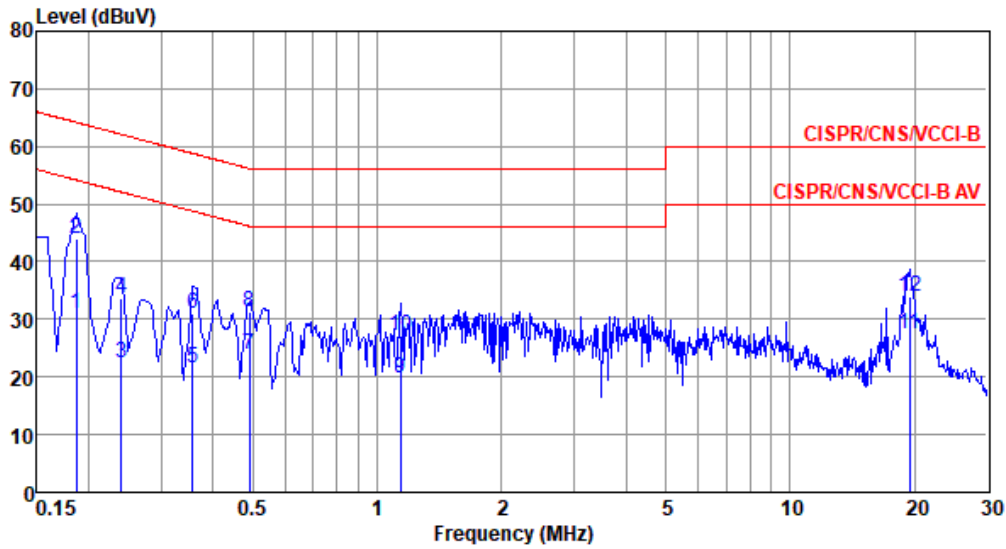


	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.186	31.07	54.20	-23.13	21.21	9.61	0.06	0.19	Average
2*	0.186	44.04	64.20	-20.16	34.18	9.61	0.06	0.19	QP
3	0.240	22.44	52.08	-29.64	12.55	9.61	0.06	0.22	Average
4	0.240	33.59	62.08	-28.49	23.70	9.61	0.06	0.22	QP
5	0.358	21.44	48.78	-27.34	11.49	9.61	0.06	0.28	Average
6	0.358	30.88	58.78	-27.90	20.93	9.61	0.06	0.28	QP
7	0.491	24.01	46.14	-22.13	14.02	9.61	0.07	0.31	Average
8	0.491	31.26	56.14	-24.88	21.27	9.61	0.07	0.31	QP
9	1.141	19.75	46.00	-26.25	9.69	9.61	0.11	0.34	Average
10	1.141	27.24	56.00	-28.76	17.18	9.61	0.11	0.34	QP
11	19.428	27.44	50.00	-22.56	16.63	9.79	0.50	0.52	Average
12	19.428	34.02	60.00	-25.98	23.21	9.79	0.50	0.52	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).
 Note 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).



Modulation Mode	ax HE20-OFDMA	Test Freq. (MHz)	5745
Power Phase	Line		

Test by : Joe Liao Temperature: 25°C Humidity: 66%

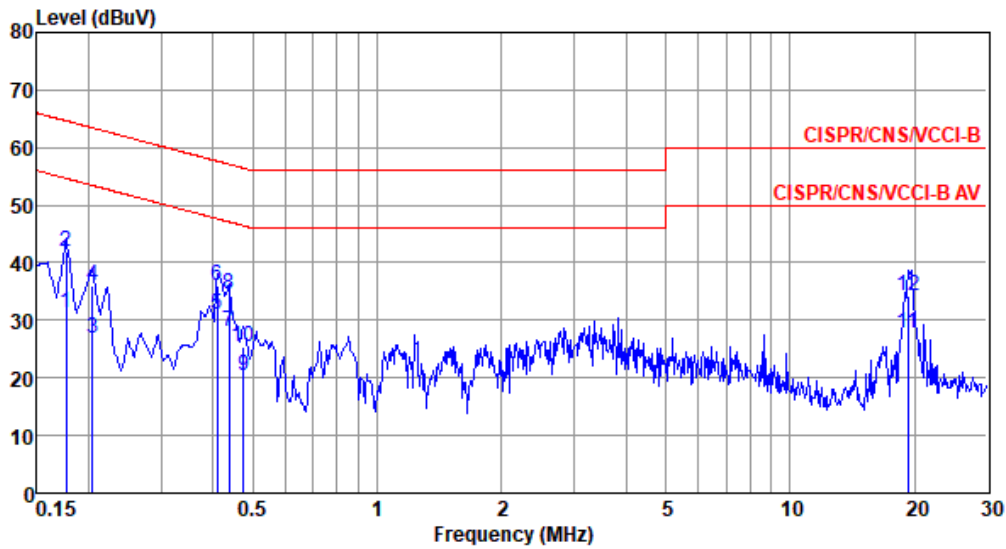


	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.177	31.41	54.64	-23.23	21.48	9.68	0.06	0.19	Average
2	0.177	41.83	64.64	-22.81	31.90	9.68	0.06	0.19	QP
3	0.204	26.94	53.45	-26.51	17.01	9.68	0.06	0.19	Average
4	0.204	36.02	63.45	-27.43	26.09	9.68	0.06	0.19	QP
5*	0.410	30.98	47.64	-16.66	20.95	9.67	0.06	0.30	Average
6	0.410	35.87	57.64	-21.77	25.84	9.67	0.06	0.30	QP
7	0.437	28.08	47.11	-19.03	18.05	9.67	0.06	0.30	Average
8	0.437	34.68	57.11	-22.43	24.65	9.67	0.06	0.30	QP
9	0.474	20.43	46.45	-26.02	10.38	9.67	0.07	0.31	Average
10	0.474	25.36	56.45	-31.09	15.31	9.67	0.07	0.31	QP
11	19.326	27.72	50.00	-22.28	16.97	9.73	0.50	0.52	Average
12	19.326	34.24	60.00	-25.76	23.49	9.73	0.50	0.52	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).
 Note 2: Over Limit (dB) = Level (dBuV) - Limit Line (dBuV).



Modulation Mode	ax HE20-OFDMA	Test Freq. (MHz)	5745
Power Phase	Neutral		

Test by : Joe Liao Temperature: 25°C Humidity: 66%

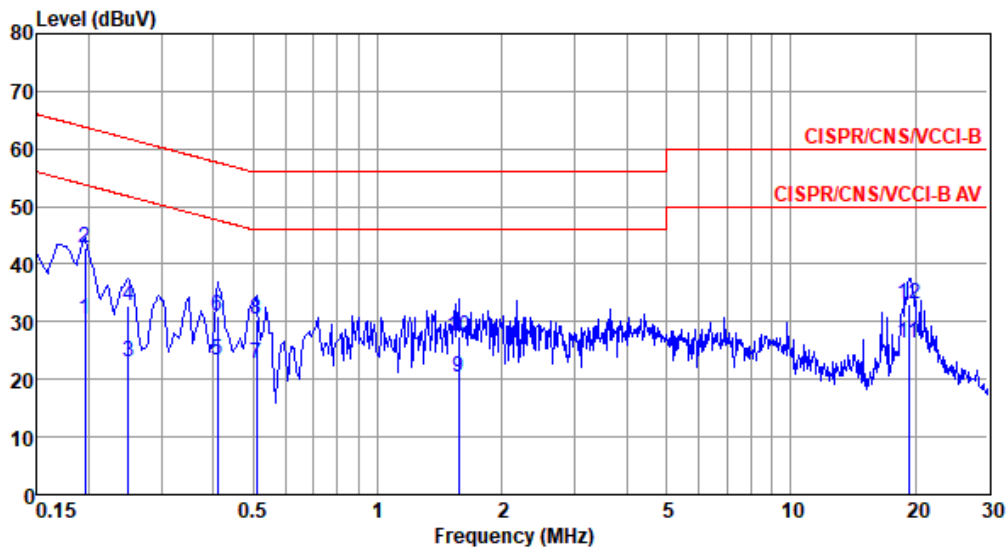

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.195	30.42	53.80	-23.38	20.56	9.61	0.06	0.19	Average
2*	0.195	42.89	63.80	-20.91	33.03	9.61	0.06	0.19	QP
3	0.249	23.15	51.78	-28.63	13.25	9.61	0.06	0.23	Average
4	0.249	32.88	61.78	-28.90	22.98	9.61	0.06	0.23	QP
5	0.410	23.20	47.64	-24.44	13.23	9.61	0.06	0.30	Average
6	0.410	31.03	57.64	-26.61	21.06	9.61	0.06	0.30	QP
7	0.510	22.73	46.00	-23.27	12.74	9.61	0.07	0.31	Average
8	0.510	30.34	56.00	-25.66	20.35	9.61	0.07	0.31	QP
9	1.568	20.50	46.00	-25.50	10.41	9.62	0.12	0.35	Average
10	1.568	27.45	56.00	-28.55	17.36	9.62	0.12	0.35	QP
11	19.326	26.27	50.00	-23.73	15.46	9.79	0.50	0.52	Average
12	19.326	32.97	60.00	-27.03	22.16	9.79	0.50	0.52	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).
 Note 2: Over Limit (dB) = Level (dBuV) - Limit Line (dBuV).