




[ 802.11n (HT40)/ 5510 MHz ]

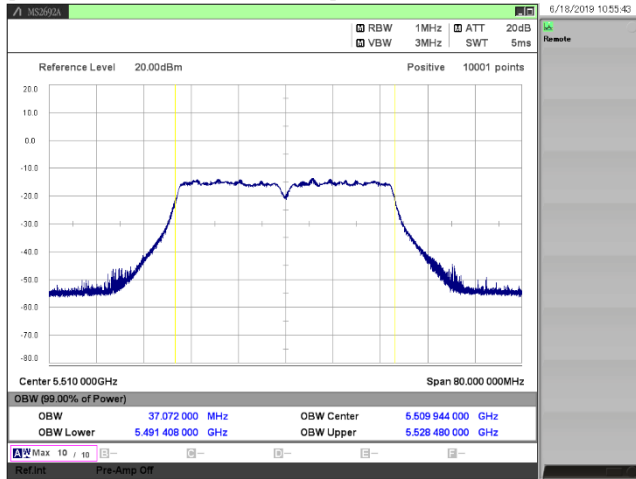


[ 802.11n (HT40)/ 5550 MHz ]

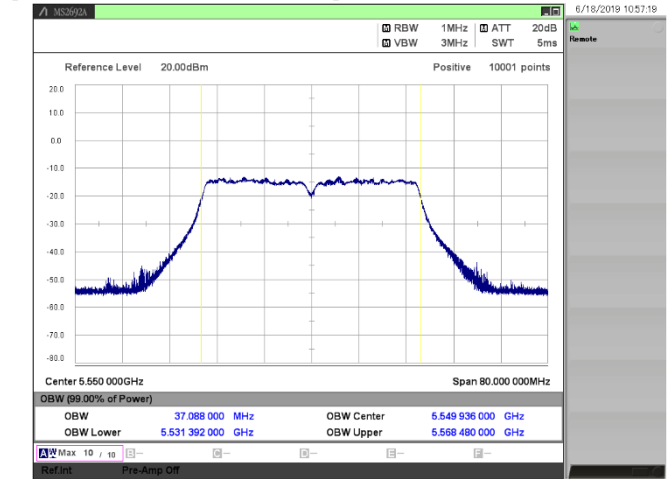


[ 802.11n (HT40)/ 5670 MHz ]

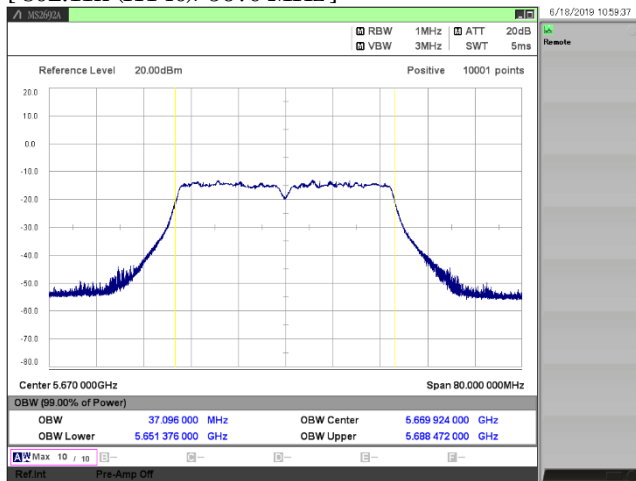


[ 802.11n (HT40)/ 5710 MHz ]

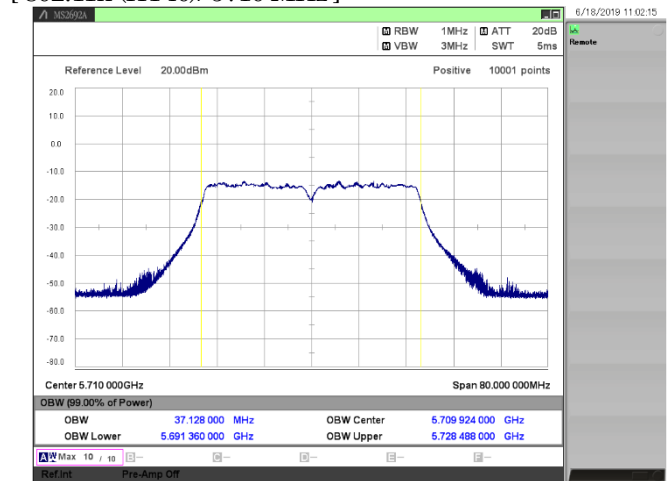


[ 802.11n (HT40)/ 5755 MHz ]

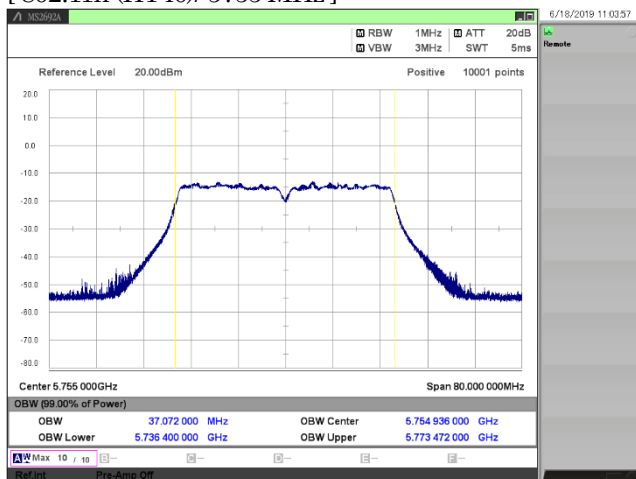


[ 802.11n (HT40)/ 5795 MHz ]

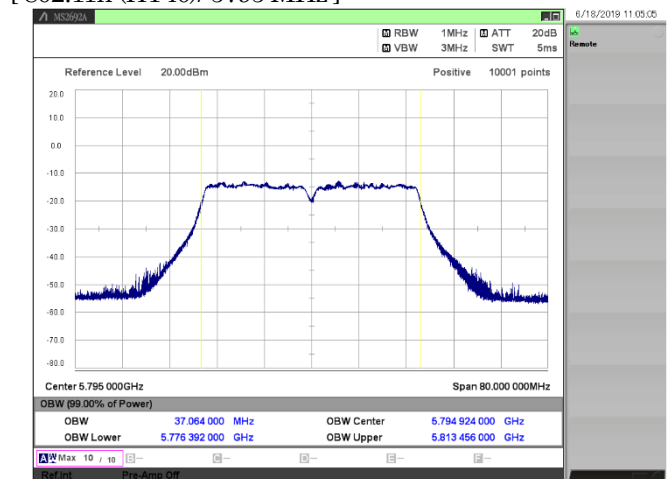


[ 802.11ac (VHT20)/ 5180 MHz ]

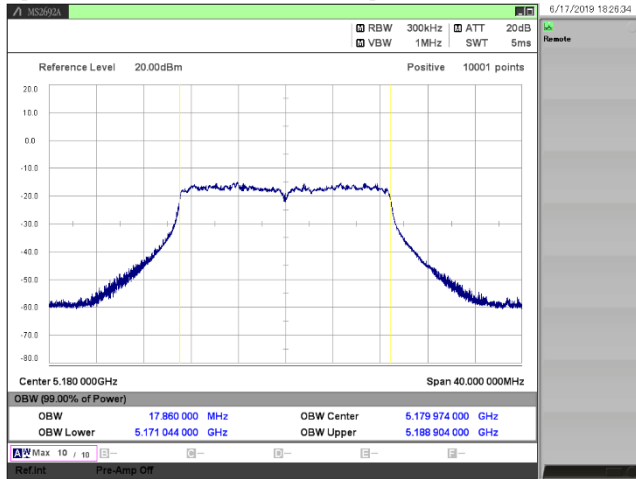


[ 802.11ac (VHT20)/ 5220 MHz ]

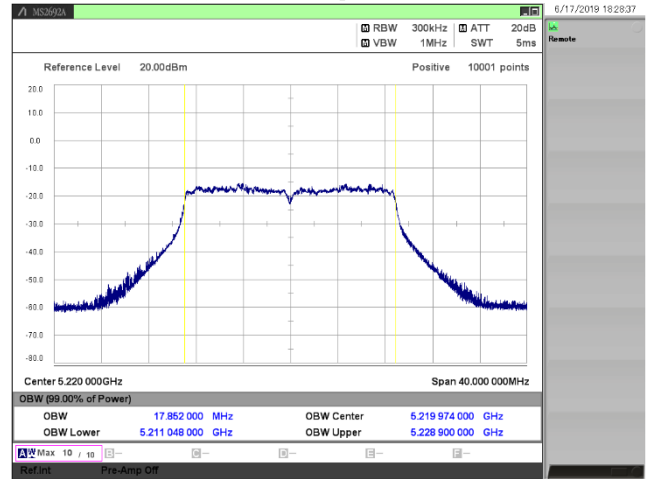


[ 802.11ac (VHT20)/ 5240 MHz ]

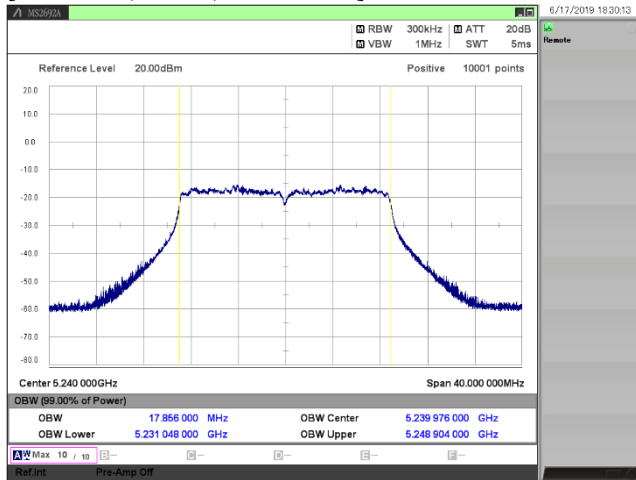


[ 802.11ac (VHT20)/ 5260 MHz ]

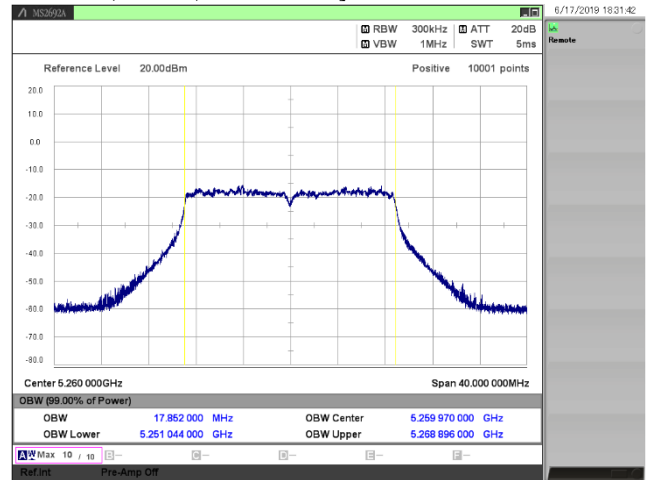


[ 802.11ac (VHT20)/ 5300 MHz ]

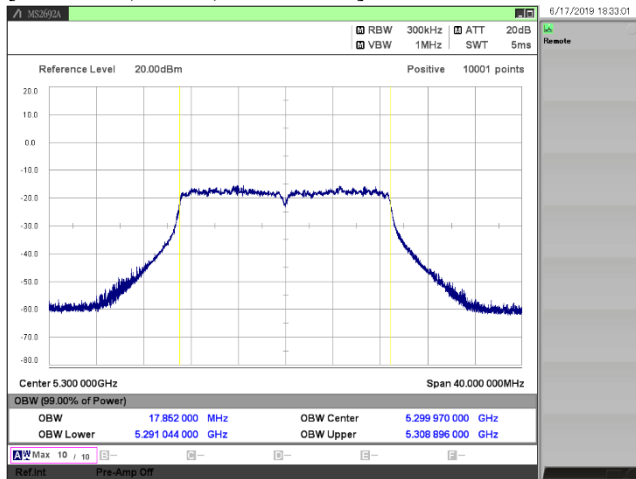


[ 802.11ac (VHT20)/ 5320 MHz ]

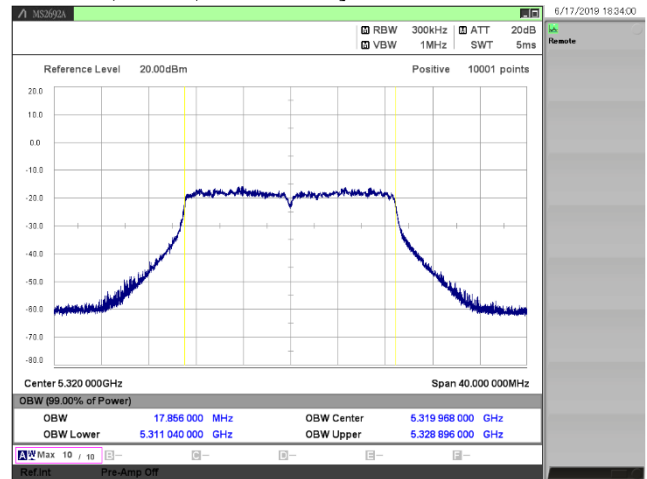


[ 802.11ac (VHT20)/ 5500 MHz ]

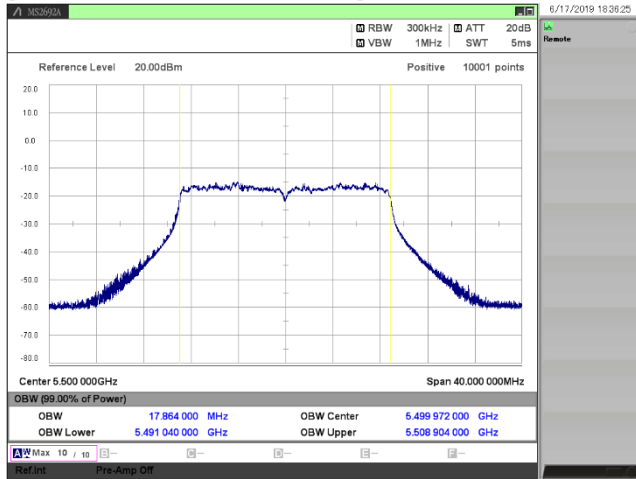


[ 802.11ac (VHT20)/ 5580 MHz ]

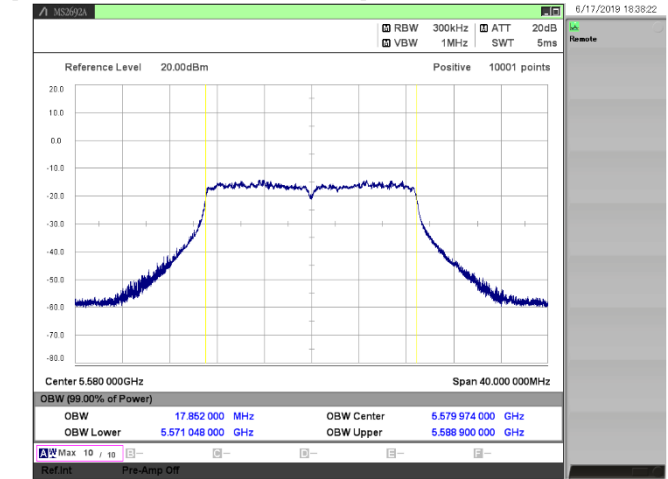


[ 802.11ac (VHT20)/ 5700 MHz ]

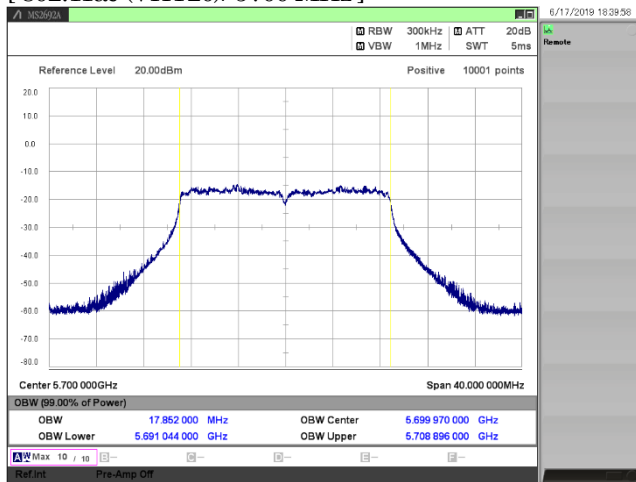


[ 802.11ac (VHT20)/ 5720 MHz ]

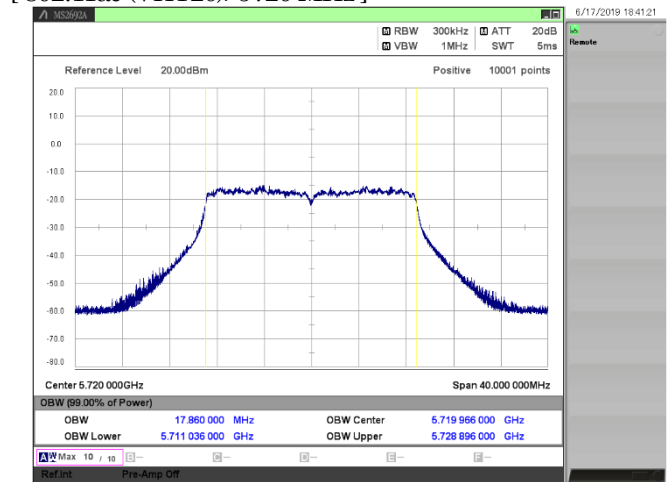


[ 802.11ac (VHT20)/ 5745 MHz ]

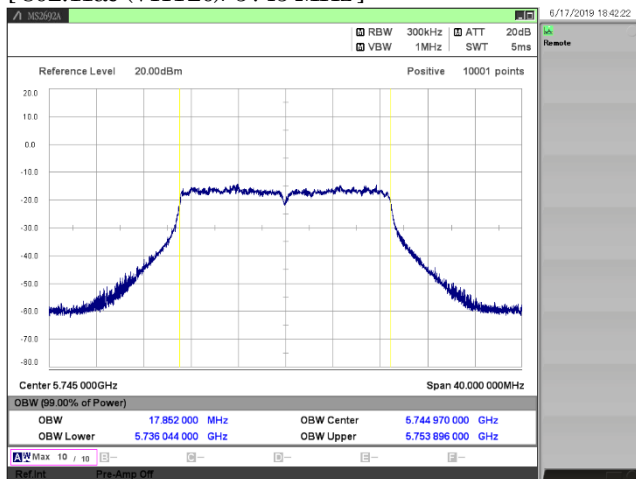


[ 802.11ac (VHT20)/ 5785 MHz ]

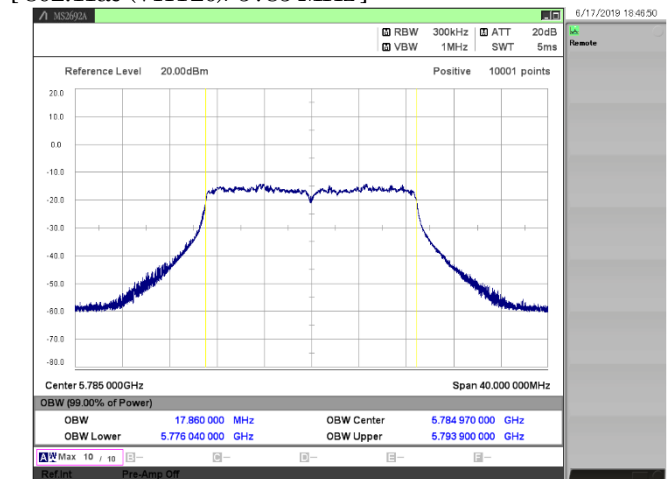


[ 802.11ac (VHT20)/ 5825 MHz ]

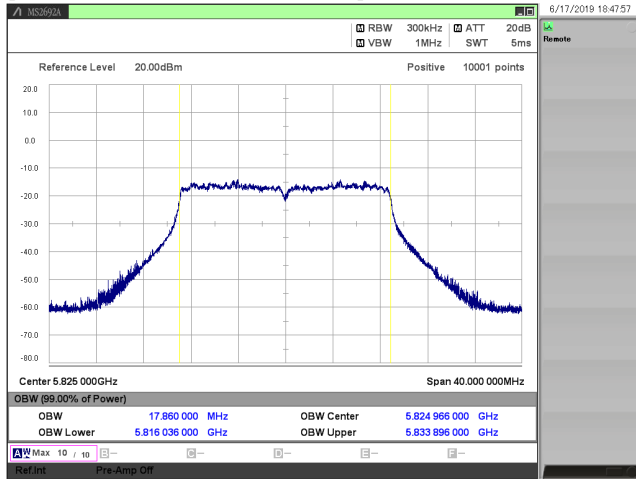


[ 802.11ac (VHT40)/ 5190 MHz ]

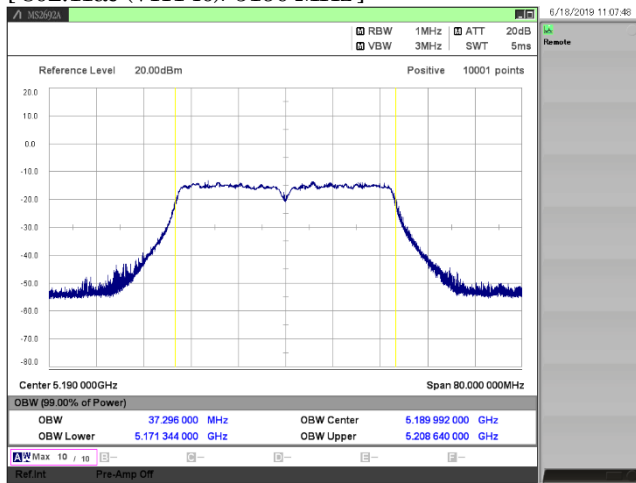


[ 802.11ac (VHT40)/ 5230 MHz ]

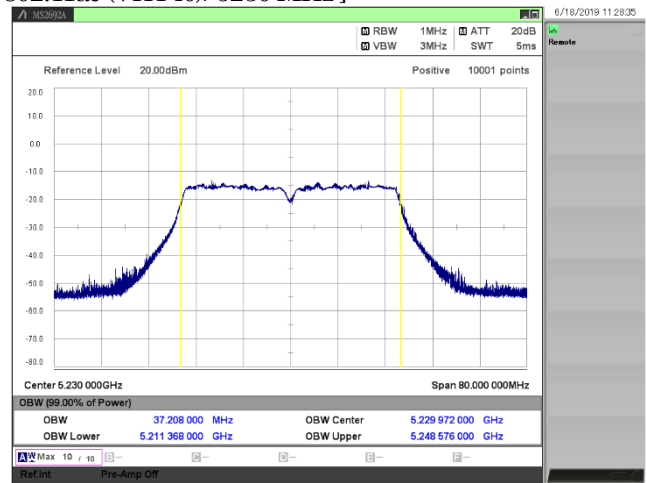


[ 802.11ac (VHT40)/ 5270 MHz ]

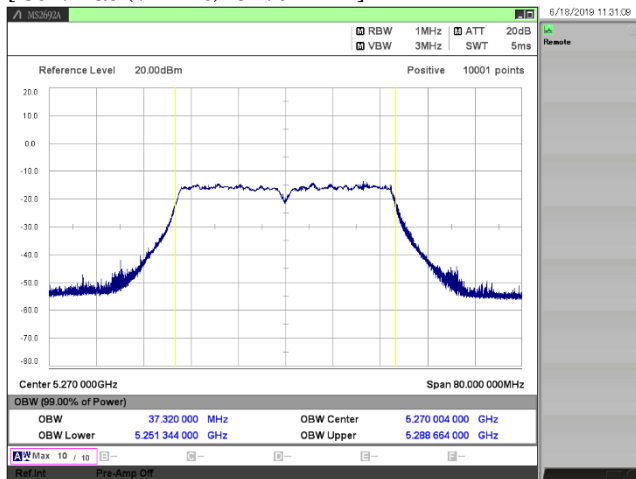


[ 802.11ac (VHT40)/ 5310 MHz ]

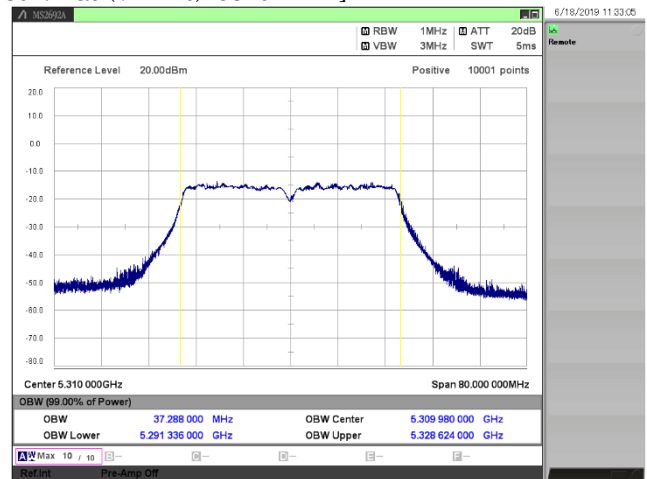


[ 802.11ac (VHT40)/ 5510 MHz ]

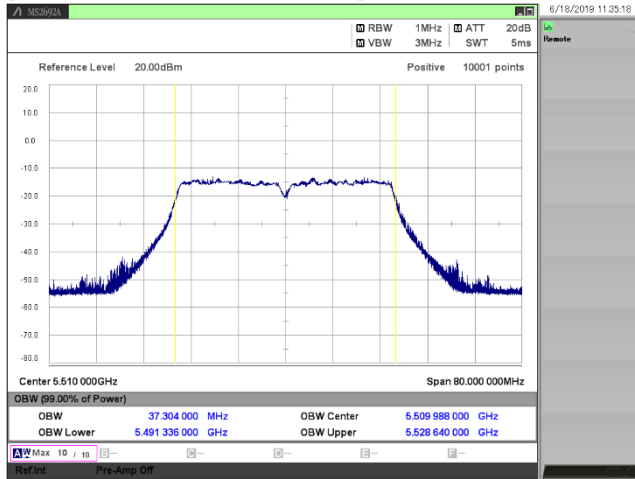


[ 802.11ac (VHT40)/ 5550 MHz ]

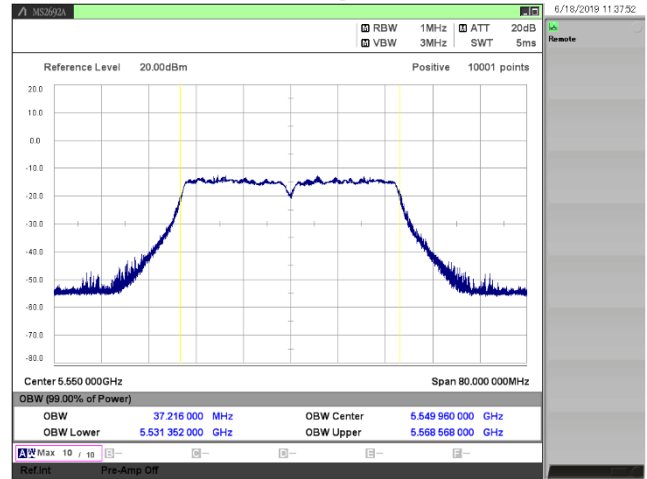


[ 802.11ac (VHT40)/ 5670 MHz ]

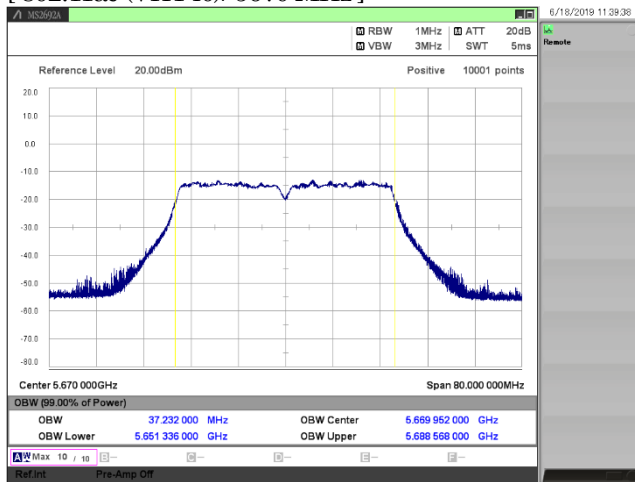


[ 802.11ac (VHT40)/ 5710 MHz ]

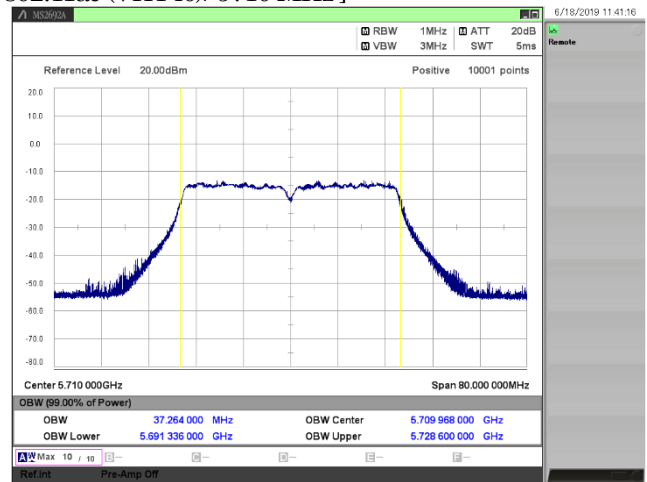


[ 802.11ac (VHT40)/ 5755 MHz ]

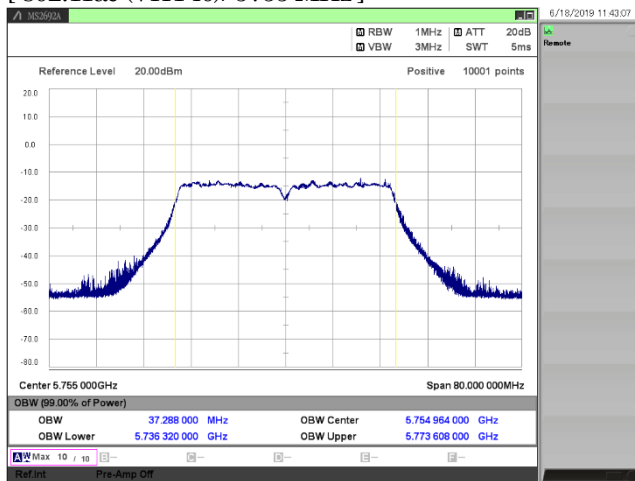


[ 802.11ac (VHT40)/ 5795 MHz ]

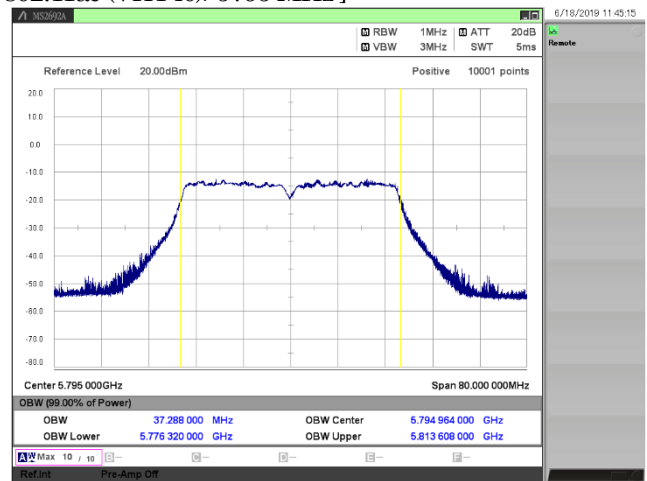


[ 802.11ac (VHT80)/ 5210 MHz ]

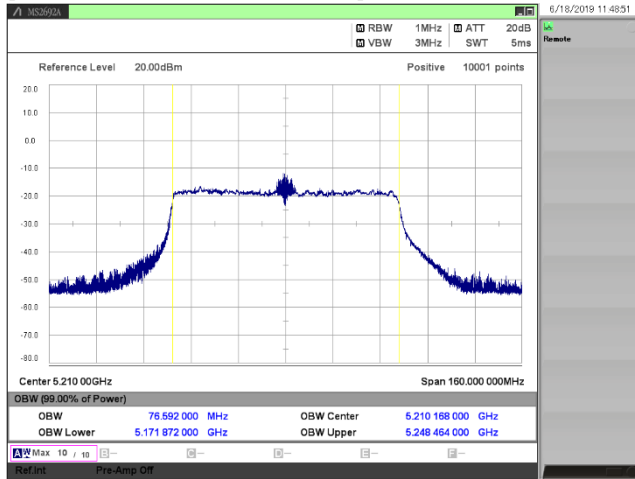


[ 802.11ac (VHT80)/ 5290 MHz ]

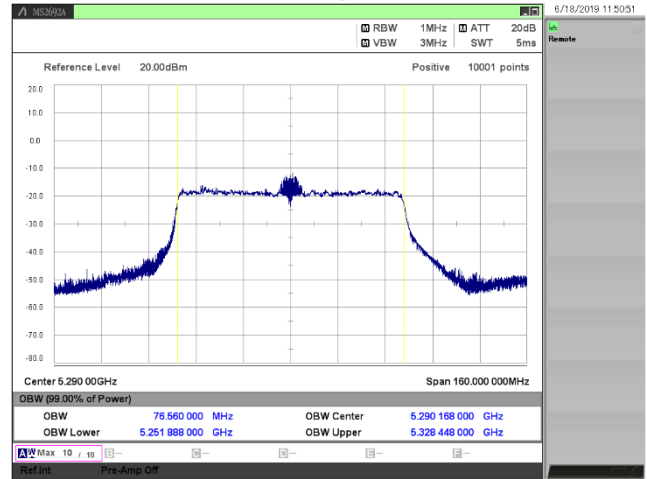


[ 802.11ac (VHT80)/ 5530 MHz ]

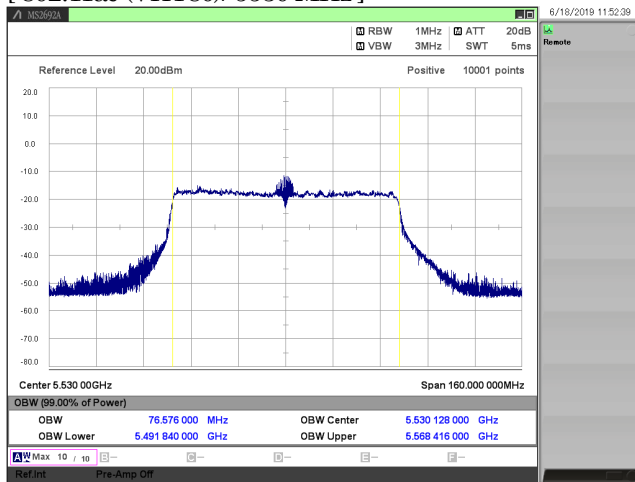

[ 802.11ac (VHT80)/ 5690 MHz ]

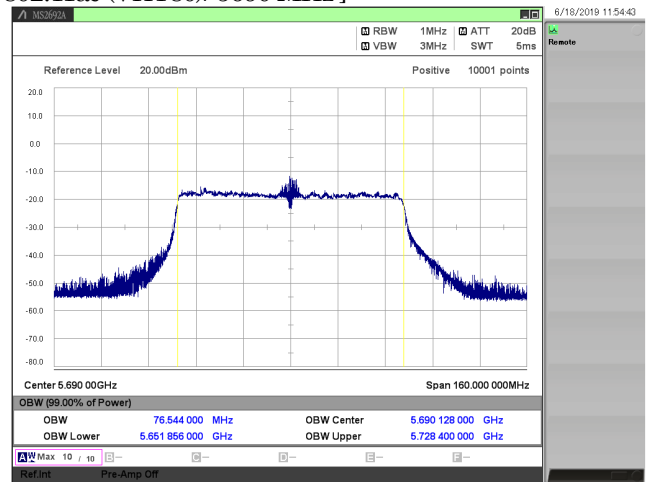

[ 802.11ac (VHT80)/ 5775 MHz ]

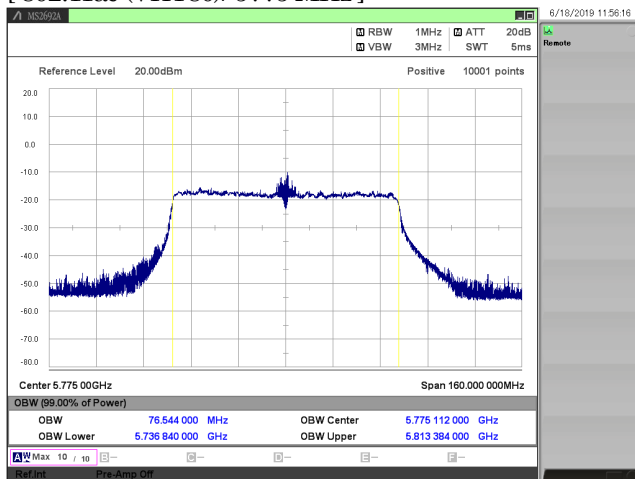

## 3.5. Maximum Conducted Output Power

- 1) Ambient temperature : 25.5 deg.C                      24.3 deg.C  
 2) Relative humidity : 40.5 %                            24.3 %  
 3) Date of measurement : May 30, 2019                May 31, 2019  
 4) Measured by : T.NAKAMURA                      T.NAKAMURA  
 5) Operating mode : Transmitting mode

Mode	Rate [Mbps]	Ch. [MHz]	Reading (AV) [dBm]	C.F. [dB]	Duty Factor [dB]	Ant. Gain [dBi]	Conducted Output Power				Equivalent Isotropically Radiated Power			
							Result (AV) [dBm]	Result (AV) [mW]	Limit [dBm]	Margin [dB]	Result (AV) [dBm]	Result (AV) [mW]	Limit [dBm]	Margin [dB]
11a	18	5180	-3.75	10.66	0.00	3.00	6.91	4.91	23.98	17.07	9.91	9.79	29.98	20.07
		5200	-3.93	10.66	0.00	3.00	6.73	4.71	23.98	17.25	9.73	9.40	29.98	20.25
		5220	-4.00	10.66	0.00	3.00	6.66	4.63	23.98	17.32	9.66	9.25	29.98	20.32
		5240	-4.29	10.66	0.00	3.00	6.37	4.34	23.98	17.61	9.37	8.65	29.98	20.61
		5260	-4.49	10.66	0.00	3.00	6.17	4.14	23.59	17.42	9.17	8.26	29.59	20.42
		5280	-4.14	10.66	0.00	3.00	6.52	4.49	23.59	17.07	9.52	8.95	29.59	20.07
		5300	-4.32	10.66	0.00	3.00	6.34	4.31	23.59	17.25	9.34	8.59	29.59	20.25
		5320	-4.70	10.66	0.00	3.00	5.96	3.94	23.59	17.63	8.96	7.87	29.59	20.63
		5500	-4.25	10.66	0.00	3.00	6.41	4.38	23.59	17.18	9.41	8.73	29.59	20.18
		5580	-4.13	10.66	0.00	3.00	6.53	4.50	23.59	17.06	9.53	8.97	29.59	20.06
		5700	-3.85	10.67	0.00	3.00	6.82	4.81	23.59	16.77	9.82	9.59	29.59	19.77
		5720	-4.51	10.67	0.00	3.00	6.16	4.13	23.59	17.43	9.16	8.24	29.59	20.43
		5745	-4.46	10.67	0.00	3.00	6.21	4.18	30.00	23.79	9.21	8.34	36.00	26.79
5785	-4.36	10.67	0.00	3.00	6.31	4.28	30.00	23.69	9.31	8.53	36.00	26.69		
5825	-5.10	10.67	0.00	3.00	5.57	3.61	30.00	24.43	8.57	7.19	36.00	27.43		
11n (HT20)	MCS6	5180	-3.96	10.66	0.00	3.00	6.70	4.68	23.98	17.28	9.70	9.33	29.98	20.28
		5200	-4.11	10.66	0.00	3.00	6.55	4.52	23.98	17.43	9.55	9.02	29.98	20.43
		5220	-4.40	10.66	0.00	3.00	6.26	4.23	23.98	17.72	9.26	8.43	29.98	20.72
		5240	-4.56	10.66	0.00	3.00	6.10	4.07	23.98	17.88	9.10	8.13	29.98	20.88
		5260	-4.12	10.66	0.00	3.00	6.54	4.51	23.98	17.44	9.54	8.99	29.98	20.44
		5280	-4.36	10.66	0.00	3.00	6.30	4.27	23.98	17.68	9.30	8.51	29.98	20.68
		5300	-4.74	10.66	0.00	3.00	5.92	3.91	23.98	18.06	8.92	7.80	29.98	21.06
		5320	-4.27	10.66	0.00	3.00	6.39	4.36	23.98	17.59	9.39	8.69	29.98	20.59
		5500	-4.31	10.66	0.00	3.00	6.35	4.32	23.98	17.63	9.35	8.61	29.98	20.63
		5580	-3.98	10.66	0.00	3.00	6.68	4.66	23.98	17.30	9.68	9.29	29.98	20.30
		5700	-4.64	10.67	0.00	3.00	6.03	4.01	23.98	17.95	9.03	8.00	29.98	20.95
		5720	-4.40	10.67	0.00	3.00	6.27	4.24	23.98	17.71	9.27	8.45	29.98	20.71
		5745	-5.03	10.67	0.00	3.00	5.64	3.66	30.00	24.36	8.64	7.31	36.00	27.36
5785	-5.15	10.67	0.00	3.00	5.52	3.56	30.00	24.48	8.52	7.11	36.00	27.48		
5825	-5.63	10.67	0.00	3.00	5.04	3.19	30.00	24.96	8.04	6.37	36.00	27.96		
11n (HT40)	MCS4	5190	-4.18	10.66	0.00	3.00	6.48	4.45	23.98	17.50	9.48	8.87	29.98	20.50
		5230	-4.48	10.66	0.00	3.00	6.18	4.15	23.98	17.80	9.18	8.28	29.98	20.80
		5270	-4.92	10.66	0.00	3.00	5.74	3.75	23.98	18.24	8.74	7.48	29.98	21.24
		5310	-4.72	10.66	0.00	3.00	5.94	3.93	23.98	18.04	8.94	7.83	29.98	21.04
		5510	-5.33	10.66	0.00	3.00	5.33	3.41	23.98	18.65	8.33	6.81	29.98	21.65
		5550	-3.80	10.66	0.00	3.00	6.86	4.85	23.98	17.12	9.86	9.68	29.98	20.12
		5670	-4.73	10.67	0.00	3.00	5.94	3.93	23.98	18.04	8.94	7.83	29.98	21.04
		5710	-4.17	10.67	0.00	3.00	6.50	4.47	23.98	17.48	9.50	8.91	29.98	20.48
		5755	-4.67	10.67	0.00	3.00	6.00	3.98	30.00	24.00	9.00	7.94	36.00	27.00
5795	-4.51	10.67	0.00	3.00	6.16	4.13	30.00	23.84	9.16	8.24	36.00	26.84		

Mode	Rate [Mbps]	Ch. [MHz]	Reading (AV) [dBm]	C.F. [dB]	Duty Factor [dB]	Ant. Gain [dBi]	Maximum Conducted Power				Equivalent Isotropically Radiated Power			
							Result (AV) [dBm]	Result (AV) [mW]	Limit [dBm]	Margin [dB]	Result (AV) [dBm]	Result (AV) [mW]	Limit [dBm]	Margin [dB]
11ac (VHT20)	MCS6	5180	-3.90	10.66	0.00	3.00	6.76	4.74	23.98	17.22	9.76	9.46	29.98	20.22
		5200	-4.55	10.66	0.00	3.00	6.11	4.08	23.98	17.87	9.11	8.15	29.98	20.87
		5220	-4.15	10.66	0.00	3.00	6.51	4.48	23.98	17.47	9.51	8.93	29.98	20.47
		5240	-4.37	10.66	0.00	3.00	6.29	4.26	23.98	17.69	9.29	8.49	29.98	20.69
		5260	-4.78	10.66	0.00	3.00	5.88	3.87	23.98	18.10	8.88	7.73	29.98	21.10
		5280	-4.35	10.66	0.00	3.00	6.31	4.28	23.98	17.67	9.31	8.53	29.98	20.67
		5300	-4.28	10.66	0.00	3.00	6.38	4.35	23.98	17.60	9.38	8.67	29.98	20.60
		5320	-4.50	10.66	0.00	3.00	6.16	4.13	23.98	17.82	9.16	8.24	29.98	20.82
		5500	-3.91	10.66	0.00	3.00	6.75	4.73	23.98	17.23	9.75	9.44	29.98	20.23
		5580	-4.05	10.66	0.00	3.00	6.61	4.58	23.98	17.37	9.61	9.14	29.98	20.37
		5700	-3.69	10.67	0.00	3.00	6.98	4.99	23.98	17.00	9.98	9.95	29.98	20.00
		5720	-4.58	10.67	0.00	3.00	6.09	4.06	23.98	17.89	9.09	8.11	29.98	20.89
		5745	-4.25	10.67	0.00	3.00	6.42	4.39	30.00	23.58	9.42	8.75	36.00	26.58
		5785	-5.15	10.67	0.00	3.00	5.52	3.56	30.00	24.48	8.52	7.11	36.00	27.48
5825	-5.65	10.67	0.00	3.00	5.02	3.18	30.00	24.98	8.02	6.34	36.00	27.98		
11ac (VHT40)	MCS4	5190	-4.10	10.66	0.00	3.00	6.56	4.53	23.98	17.42	9.56	9.04	29.98	20.42
		5230	-4.41	10.66	0.00	3.00	6.25	4.22	23.98	17.73	9.25	8.41	29.98	20.73
		5270	-4.86	10.66	0.00	3.00	5.80	3.80	23.98	18.18	8.80	7.59	29.98	21.18
		5310	-4.75	10.66	0.00	3.00	5.91	3.90	23.98	18.07	8.91	7.78	29.98	21.07
		5510	-4.38	10.66	0.00	3.00	6.28	4.25	23.98	17.70	9.28	8.47	29.98	20.70
		5550	-3.83	10.66	0.00	3.00	6.83	4.82	23.98	17.15	9.83	9.62	29.98	20.15
		5670	-4.69	10.67	0.00	3.00	5.98	3.96	23.98	18.00	8.98	7.91	29.98	21.00
		5710	-4.27	10.67	0.00	3.00	6.40	4.37	23.98	17.58	9.40	8.71	29.98	20.58
		5755	-4.76	10.67	0.00	3.00	5.91	3.90	30.00	24.09	8.91	7.78	36.00	27.09
5795	-4.54	10.67	0.00	3.00	6.13	4.10	30.00	23.87	9.13	8.18	36.00	26.87		
11ac (VHT80)	MCS6	5210	-4.17	10.66	0.00	3.00	6.49	4.46	23.98	17.49	9.49	8.89	29.98	20.49
		5290	-4.43	10.66	0.00	3.00	6.23	4.20	23.98	17.75	9.23	8.38	29.98	20.75
		5530	-4.49	10.66	0.00	3.00	6.17	4.14	23.98	17.81	9.17	8.26	29.98	20.81
		5690	-4.66	10.67	0.00	3.00	6.01	3.99	23.98	17.97	9.01	7.96	29.98	20.97
		5775	-4.59	10.67	0.00	3.00	6.08	4.06	30.00	23.92	9.08	8.09	36.00	26.92



## Worst Data Rate check

Mode	Rate [Mbps]	Channel [MHz]	Reading(AV) [dBm]	C.F [dB]	Result(AV) [dBm]
11a	6	5180	-3.89	10.66	6.77
	9	5180	-4.08	10.66	6.58
	12	5180	-4.05	10.66	6.61
	18	5180	-3.75	10.66	6.91
	24	5180	-4.06	10.66	6.60
	36	5180	-4.11	10.66	6.55
	48	5180	-3.96	10.66	6.70
11n (HT20)	54	5180	-4.12	10.66	6.54
	MCS0	5180	-4.14	10.66	6.52
	MCS1	5180	-4.20	10.66	6.46
	MCS2	5180	-4.09	10.66	6.57
	MCS3	5180	-4.04	10.66	6.62
	MCS4	5180	-3.98	10.66	6.68
	MCS5	5180	-3.98	10.66	6.68
11n (HT40)	MCS6	5180	-3.96	10.66	6.70
	MCS7	5180	-4.11	10.66	6.55
	MCS0	5190	-4.40	10.66	6.26
	MCS1	5190	-4.27	10.66	6.39
	MCS2	5190	-4.32	10.66	6.34
	MCS3	5190	-4.30	10.66	6.36
	MCS4	5190	-4.18	10.66	6.48
11ac (VHT20)	MCS5	5190	-4.25	10.66	6.41
	MCS6	5190	-4.23	10.66	6.43
	MCS7	5190	-4.22	10.66	6.44
	MCS0	5180	-4.16	10.66	6.50
	MCS1	5180	-4.27	10.66	6.39
	MCS2	5180	-4.01	10.66	6.65
	MCS3	5180	-4.05	10.66	6.61
11ac (VHT40)	MCS4	5180	-3.92	10.66	6.74
	MCS5	5180	-4.03	10.66	6.63
	MCS6	5180	-3.90	10.66	6.76
	MCS7	5180	-4.02	10.66	6.64
	MCS0	5190	-4.38	10.66	6.28
	MCS1	5190	-4.34	10.66	6.32
	MCS2	5190	-4.36	10.66	6.30
	MCS3	5190	-4.26	10.66	6.40
	MCS4	5190	-4.10	10.66	6.56
11ac (VHT80)	MCS5	5190	-4.17	10.66	6.49
	MCS6	5190	-4.16	10.66	6.50
	MCS7	5190	-4.19	10.66	6.47
	MCS8	5190	-4.20	10.66	6.46
	MCS9	5190	-4.21	10.66	6.45
	MCS0	5210	-4.41	10.66	6.25
	MCS1	5210	-4.26	10.66	6.40
	MCS2	5210	-4.22	10.66	6.44
	MCS3	5210	-4.19	10.66	6.47
MCS4	5210	-4.28	10.66	6.38	
MCS5	5210	-4.26	10.66	6.40	
MCS6	5210	-4.17	10.66	6.49	
MCS7	5210	-4.28	10.66	6.38	
MCS8	5210	-4.26	10.66	6.40	
MCS9	5210	-4.27	10.66	6.39	

### 3.6. Maximum Power Spectral Density


- 1) Ambient temperature : 19.6 deg.C
- 2) Relative humidity : 55.9 %
- 3) Date of measurement : June 14, 2019
- 4) Measured by : H.WAKI
- 5) Operating mode : Transmitting mode

Mode	Rate [Mbps]	Ch. [MHz]	Reading (RMS) [dBm/MHz]	C.F. [dB]	RBW Factor [dB]	Ant. Gain [dBi]	Power Spectral Density			Power Spectral Density (EIRP)		
							Result (RMS) [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]	Result (RMS) [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
11a	18	5180	-9.27	11.23	-	3.00	1.96	11.0	9.04	4.96	17.00	12.04
		5220	-9.55	11.23	-	3.00	1.68	11.0	9.32	4.68	17.00	12.32
		5240	-9.76	11.24	-	3.00	1.48	11.0	9.52	4.48	17.00	12.52
		5260	-9.89	11.24	-	3.00	1.35	11.0	9.65	4.35	17.00	12.65
		5300	-9.69	11.24	-	3.00	1.55	11.0	9.45	4.55	17.00	12.45
		5320	-9.87	11.25	-	3.00	1.38	11.0	9.62	4.38	17.00	12.62
		5500	-9.22	11.27	-	3.00	2.05	11.0	8.95	5.05	17.00	11.95
		5580	-8.53	11.28	-	3.00	2.75	11.0	8.25	5.75	17.00	11.25
		5700	-9.24	11.30	-	3.00	2.06	11.0	8.94	5.06	17.00	11.94
		5720	-9.22	11.30	-	3.00	2.08	11.0	8.92	5.08	17.00	11.92
		5745	-16.46	11.31	6.99	3.00	1.84	30.0	28.16	4.84	36.00	31.16
		5785	-16.29	11.31	6.99	3.00	2.01	30.0	27.99	5.01	36.00	30.99
5825	-16.27	11.32	6.99	3.00	2.04	30.0	27.96	5.04	36.00	30.96		
11n (HT20)	MCS6	5180	-10.52	11.23	-	3.00	0.71	11.0	10.29	3.71	17.00	13.29
		5220	-10.67	11.23	-	3.00	0.56	11.0	10.44	3.56	17.00	13.44
		5240	-10.30	11.24	-	3.00	0.94	11.0	10.06	3.94	17.00	13.06
		5260	-11.09	11.24	-	3.00	0.15	11.0	10.85	3.15	17.00	13.85
		5300	-10.73	11.24	-	3.00	0.51	11.0	10.49	3.51	17.00	13.49
		5320	-10.91	11.25	-	3.00	0.34	11.0	10.66	3.34	17.00	13.66
		5500	-10.00	11.27	-	3.00	1.27	11.0	9.73	4.27	17.00	12.73
		5580	-9.35	11.28	-	3.00	1.93	11.0	9.07	4.93	17.00	12.07
		5700	-9.88	11.30	-	3.00	1.42	11.0	9.58	4.42	17.00	12.58
		5720	-10.27	11.30	-	3.00	1.03	11.0	9.97	4.03	17.00	12.97
		5745	-17.14	11.31	6.99	3.00	1.16	30.0	28.84	4.16	36.00	31.84
		5785	-17.06	11.31	6.99	3.00	1.24	30.0	28.76	4.24	36.00	31.76
5825	-17.02	11.32	6.99	3.00	1.29	30.0	28.71	4.29	36.00	31.71		
11ac (VHT20)	MCS6	5180	-10.02	11.23	-	3.00	1.21	11.0	9.79	4.21	17.00	12.79
		5220	-10.72	11.23	-	3.00	0.51	11.0	10.49	3.51	17.00	13.49
		5240	-10.83	11.24	-	3.00	0.41	11.0	10.59	3.41	17.00	13.59
		5260	-11.13	11.24	-	3.00	0.11	11.0	10.89	3.11	17.00	13.89
		5300	-10.75	11.24	-	3.00	0.49	11.0	10.51	3.49	17.00	13.51
		5320	-11.09	11.25	-	3.00	0.16	11.0	10.84	3.16	17.00	13.84
		5500	-10.44	11.27	-	3.00	0.83	11.0	10.17	3.83	17.00	13.17
		5580	-9.43	11.28	-	3.00	1.85	11.0	9.15	4.85	17.00	12.15
		5700	-9.91	11.30	-	3.00	1.39	11.0	9.61	4.39	17.00	12.61
		5720	-10.30	11.30	-	3.00	1.00	11.0	10.00	4.00	17.00	13.00
		5745	-17.33	11.31	6.99	3.00	0.97	30.0	29.03	3.97	36.00	32.03
		5785	-17.14	11.31	6.99	3.00	1.16	30.0	28.84	4.16	36.00	31.84
5825	-17.06	11.32	6.99	3.00	1.25	30.0	28.75	4.25	36.00	31.75		


Mode	Rate [Mbps]	Ch. [MHz]	Reading (RMS) [dBm/MHz]	C.F. [dB]	RBW Factor [dB]	Ant. Gain [dBi]	Power Spectral Density			Power Spectral Density (EIRP)		
							Result (RMS) [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]	Result (RMS) [dBm/MHz]	Limit [dBm/MHz]	Margin [dB]
11n (HT40)	MCS4	5190	-14.18	11.23	-	3.00	-2.95	11.0	13.95	0.05	17.00	16.95
		5230	-14.42	11.23	-	3.00	-3.19	11.0	14.19	-0.19	17.00	17.19
		5270	-14.77	11.24	-	3.00	-3.53	11.0	14.53	-0.53	17.00	17.53
		5310	-14.56	11.25	-	3.00	-3.31	11.0	14.31	-0.31	17.00	17.31
		5510	-13.99	11.27	-	3.00	-2.72	11.0	13.72	0.28	17.00	16.72
		5550	-13.55	11.28	-	3.00	-2.27	11.0	13.27	0.73	17.00	16.27
		5670	-13.60	11.30	-	3.00	-2.30	11.0	13.30	0.70	17.00	16.30
		5710	-13.89	11.30	-	3.00	-2.59	11.0	13.59	0.41	17.00	16.59
		5755	-21.57	11.31	6.99	3.00	-3.27	30.0	33.27	-0.27	36.00	36.27
5795	-21.44	11.31	6.99	3.00	-3.14	30.0	33.14	-0.14	36.00	36.14		
11ac (VHT40)	MCS4	5190	-14.14	11.23	-	3.00	-2.91	11.0	13.91	0.09	17.00	16.91
		5230	-14.44	11.23	-	3.00	-3.21	11.0	14.21	-0.21	17.00	17.21
		5270	-15.05	11.24	-	3.00	-3.81	11.0	14.81	-0.81	17.00	17.81
		5310	-14.59	11.25	-	3.00	-3.34	11.0	14.34	-0.34	17.00	17.34
		5510	-14.05	11.27	-	3.00	-2.78	11.0	13.78	0.22	17.00	16.78
		5550	-13.63	11.28	-	3.00	-2.35	11.0	13.35	0.65	17.00	16.35
		5670	-13.29	11.30	-	3.00	-1.99	11.0	12.99	1.01	17.00	15.99
		5710	-13.48	11.30	-	3.00	-2.18	11.0	13.18	0.82	17.00	16.18
		5755	-21.52	11.31	6.99	3.00	-3.22	30.0	33.22	-0.22	36.00	36.22
5795	-21.35	11.31	6.99	3.00	-3.05	30.0	33.05	-0.05	36.00	36.05		
11ac (VHT80)	MCS6	5210	-14.30	11.23	-	3.00	-3.07	11.0	14.07	-0.07	17.00	17.07
		5290	-13.09	11.24	-	3.00	-1.85	11.0	12.85	1.15	17.00	15.85
		5530	-12.94	11.28	-	3.00	-1.66	11.0	12.66	1.34	17.00	15.66
		5690	-12.95	11.30	-	3.00	-1.65	11.0	12.65	1.35	17.00	15.65
		5775	-24.27	11.31	6.99	3.00	-5.97	30.0	35.97	-2.97	36.00	38.97

Note For the U-NII-3 Band, the power spectral density is based on any 500 kHz band.


[ 802.11a/ 5180 MHz ]

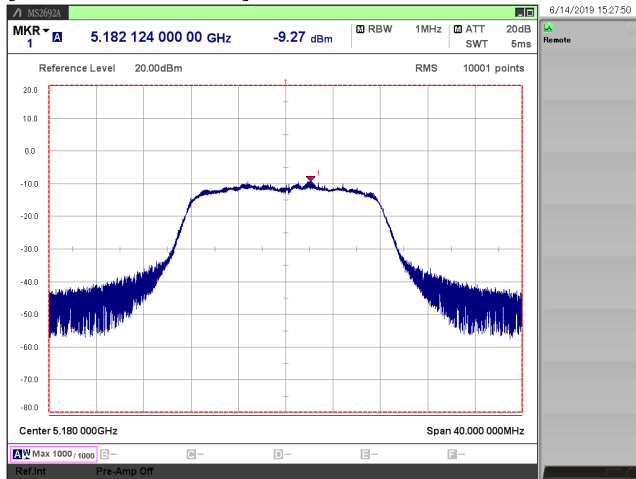


[ 802.11a/ 5220 MHz ]

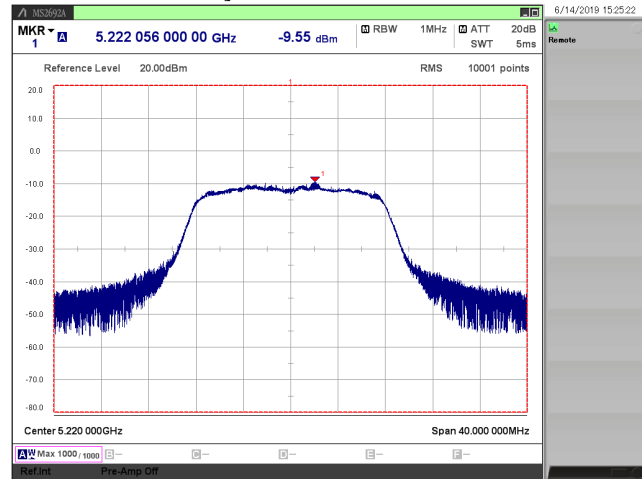


[ 802.11a/ 5240 MHz ]

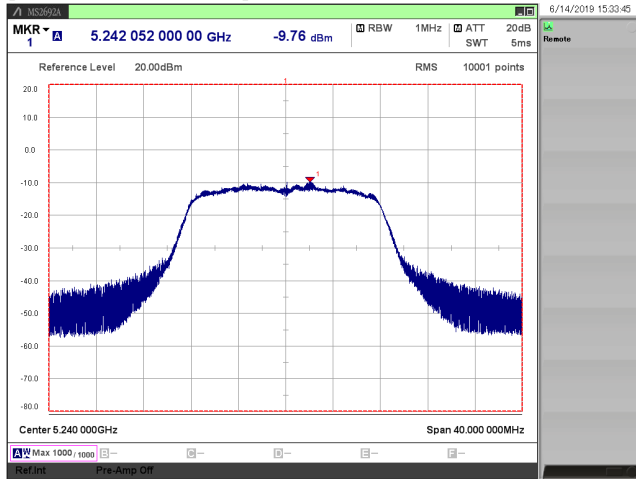


[ 802.11a/ 5260 MHz ]

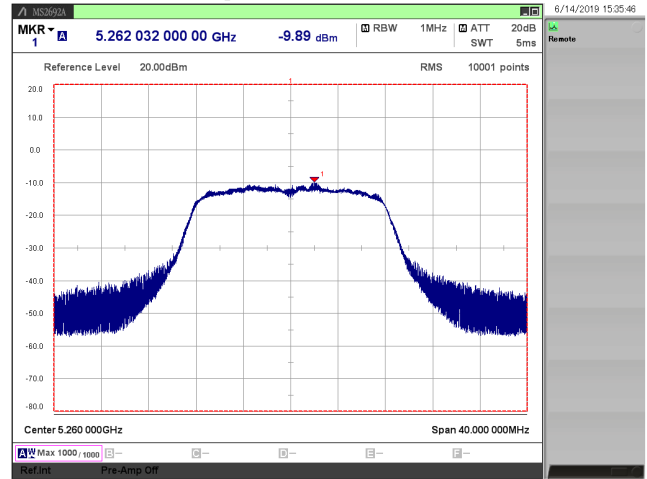


[ 802.11a/ 5300 MHz ]

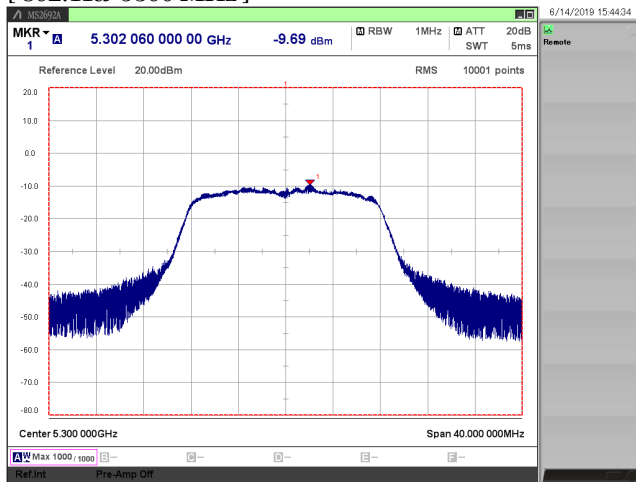


[ 802.11a/ 5320 MHz ]

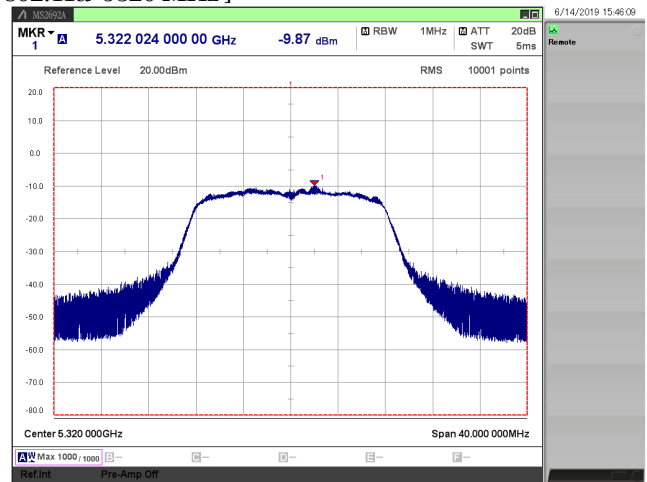


[ 802.11a/ 5500 MHz ]

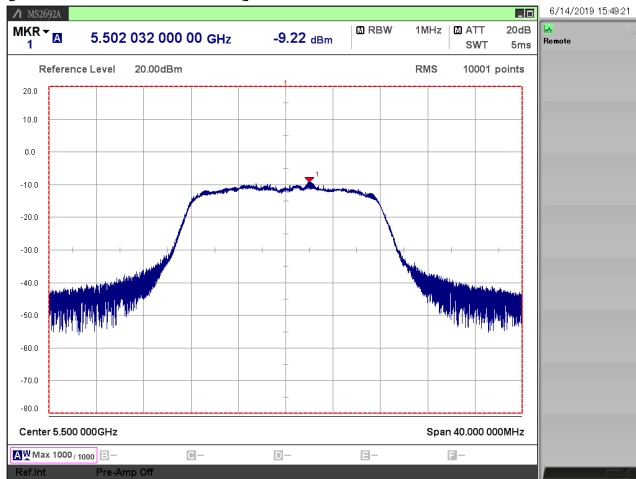


[ 802.11a/ 5580 MHz ]

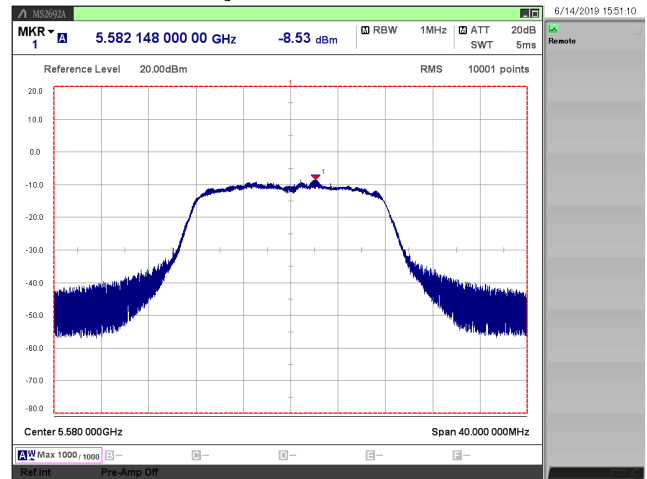


[ 802.11a/ 5700 MHz ]

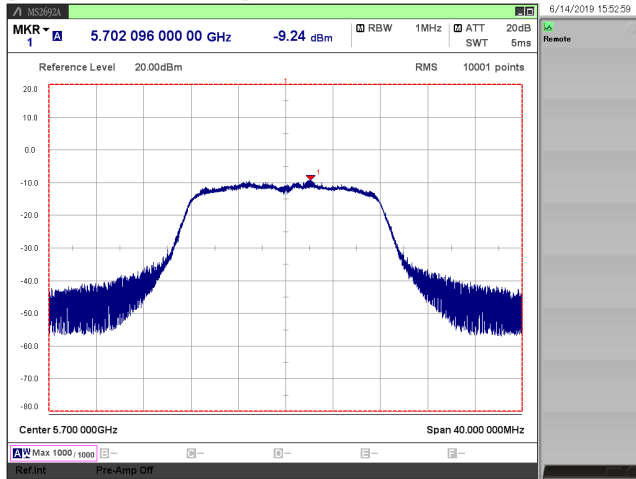


[ 802.11a/ 5720 MHz ]

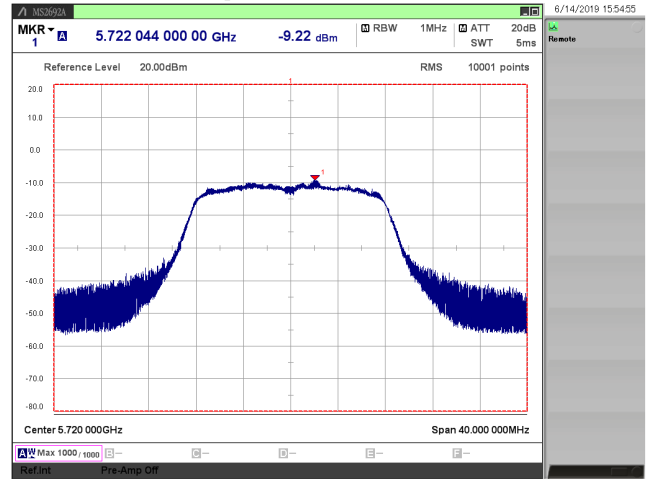


[ 802.11a/ 5745 MHz ]

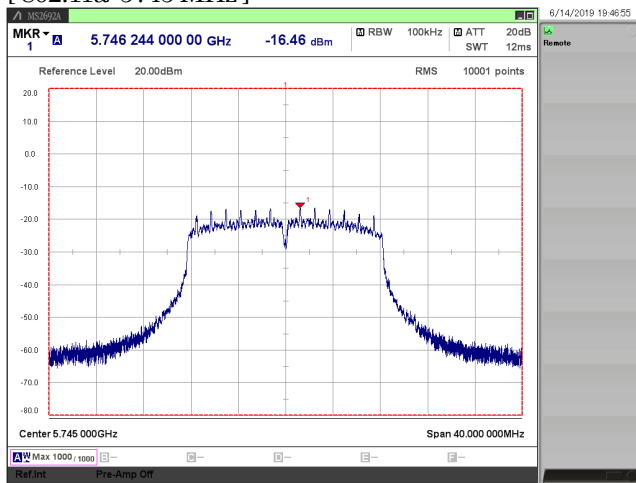


[ 802.11a/ 5785 MHz ]

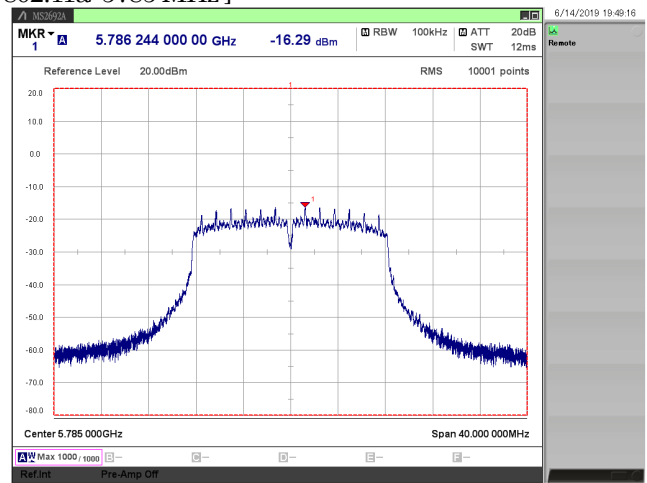


[ 802.11a/ 5825 MHz ]

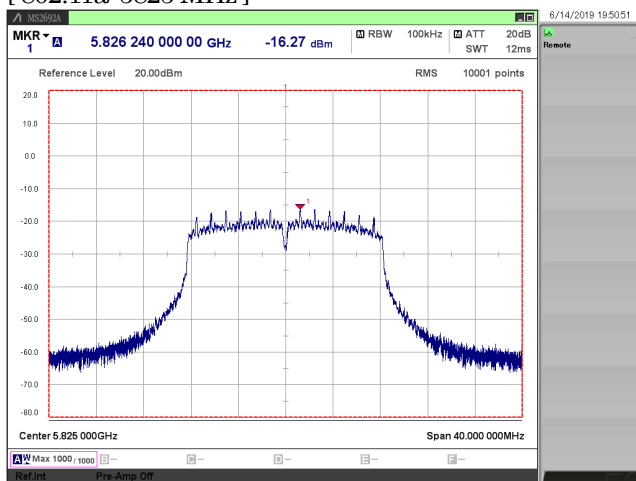


[ 802.11n (HT20)/ 5180 MHz ]

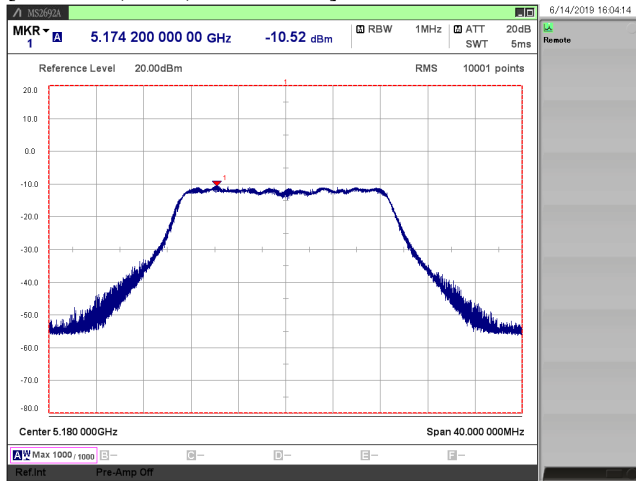


[ 802.11n (HT20)/ 5220 MHz ]

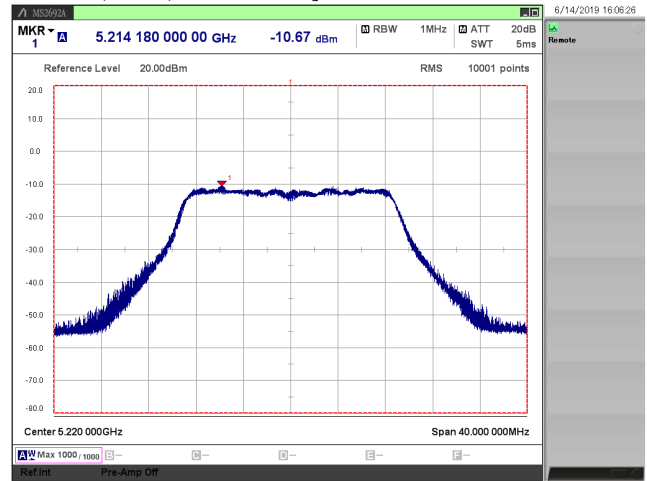


[ 802.11n (HT20)/ 5240 MHz ]

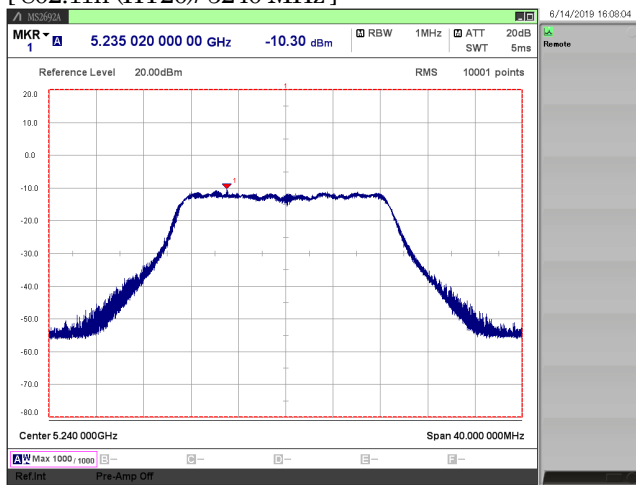


[ 802.11n (HT20)/ 5260 MHz ]

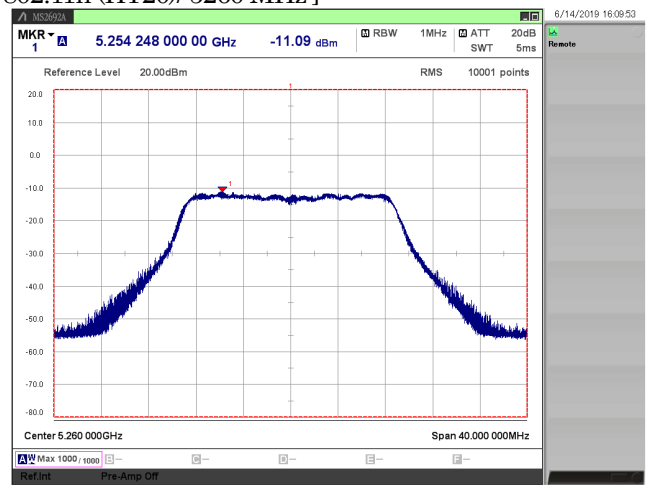


[ 802.11n (HT20)/ 5300 MHz ]

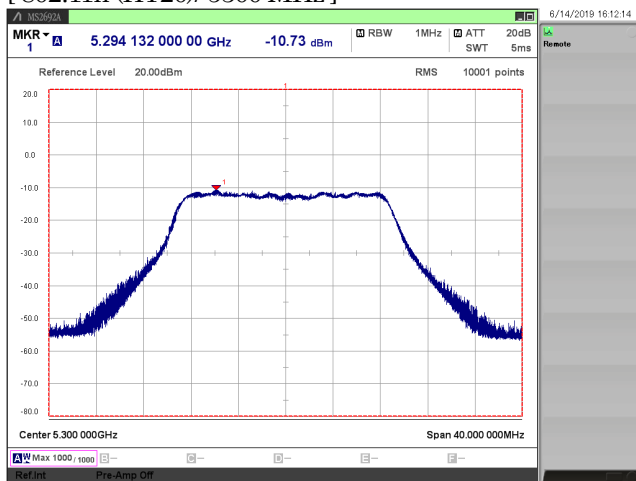


[ 802.11n (HT20)/ 5320 MHz ]

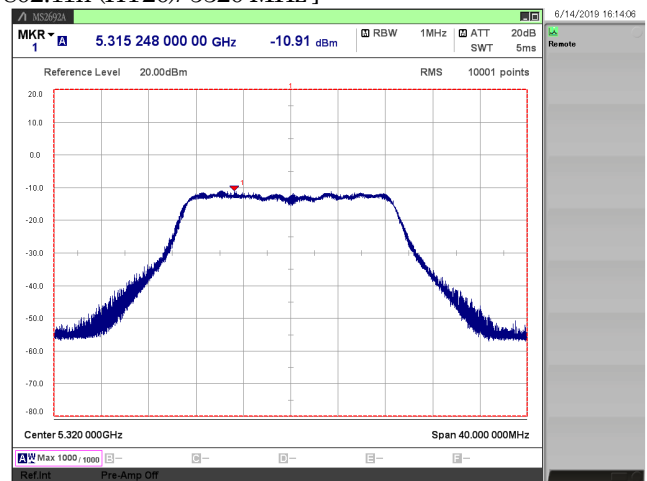


[ 802.11n (HT20)/ 5500 MHz ]

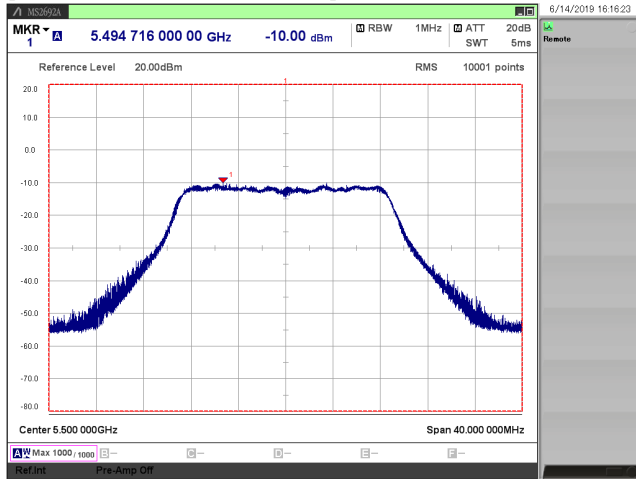


[ 802.11n (HT20)/ 5580 MHz ]

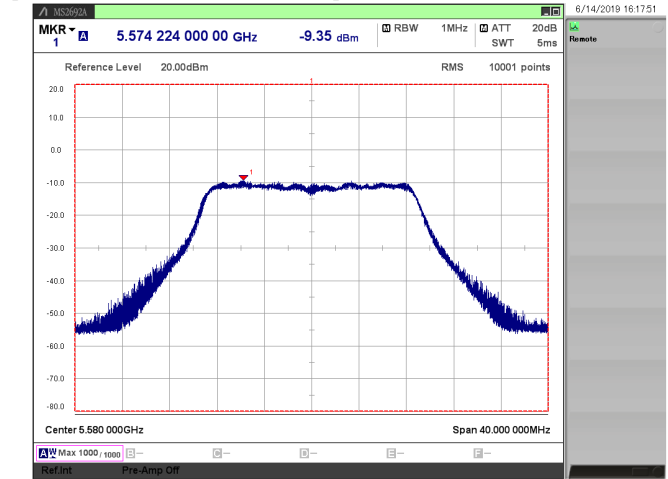


[ 802.11n (HT20)/ 5700 MHz ]

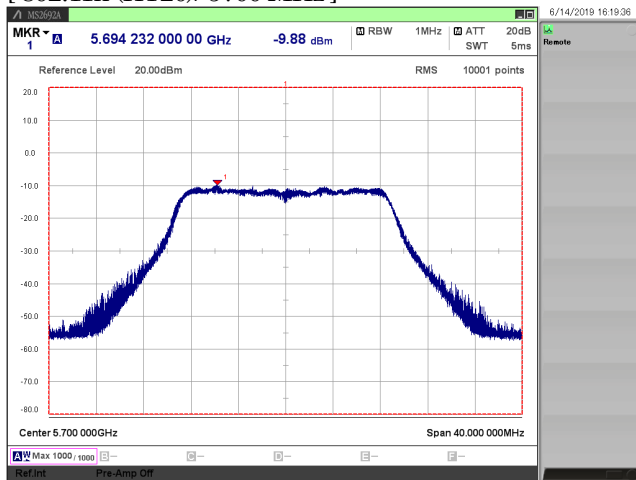


[ 802.11n (HT20)/ 5720 MHz ]

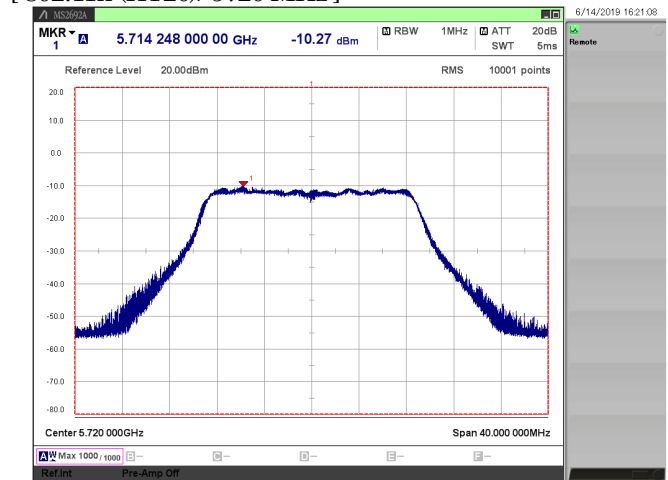


[ 802.11n (HT20)/ 5745 MHz ]

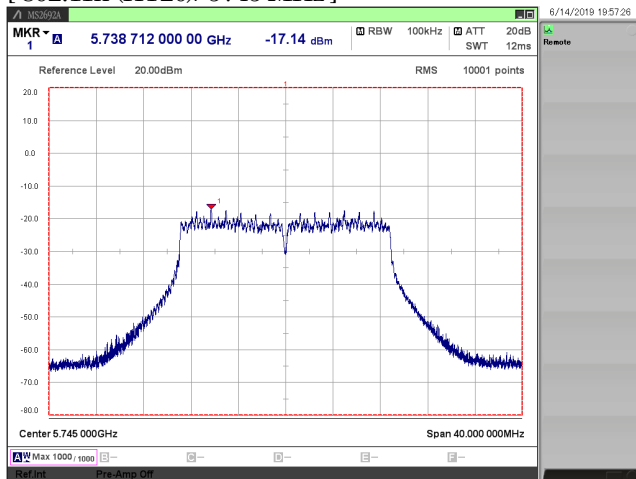


[ 802.11n (HT20)/ 5785 MHz ]

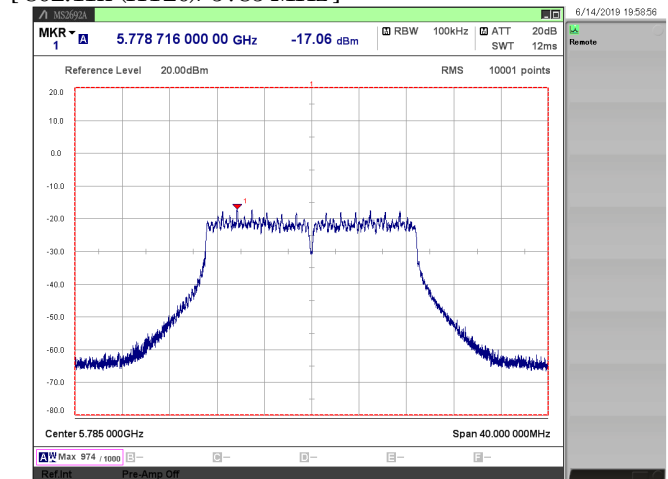


[ 802.11n (HT20)/ 5825 MHz ]

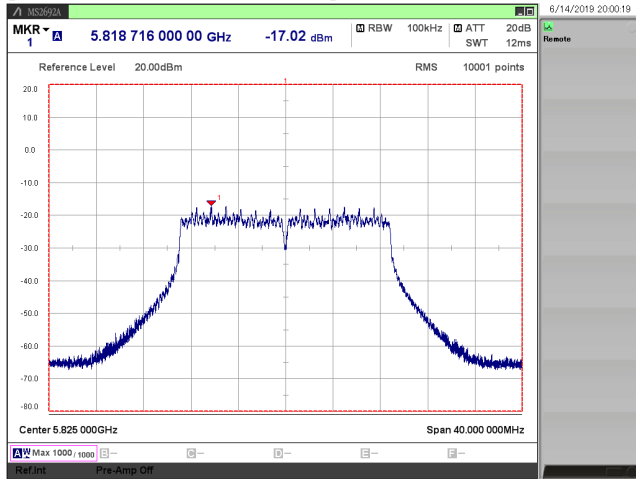


[ 802.11ac (VHT20)/ 5180 MHz ]

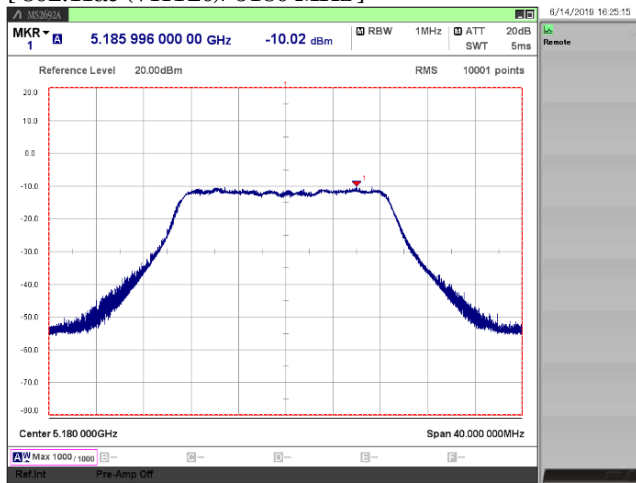


[ 802.11ac (VHT20)/ 5220 MHz ]

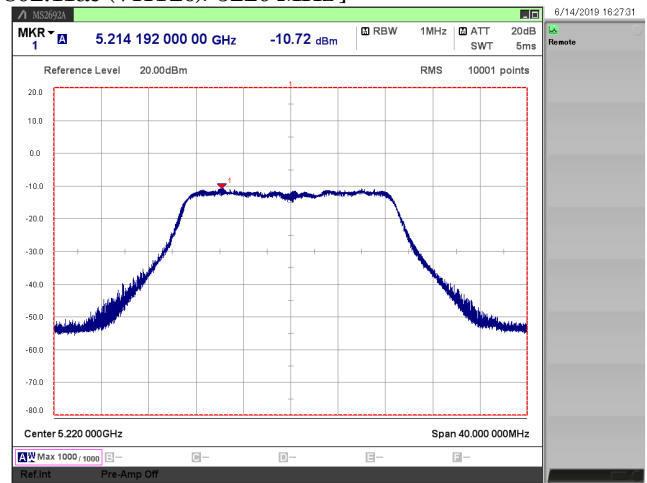

[ 802.11ac (VHT20)/ 5240 MHz ]

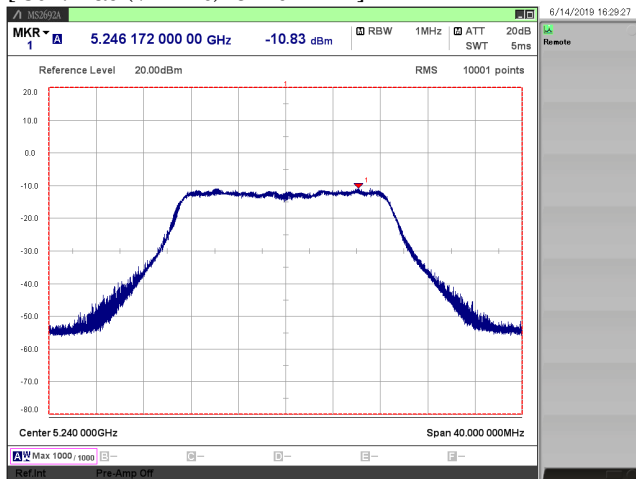


[ 802.11ac (VHT20)/ 5260 MHz ]

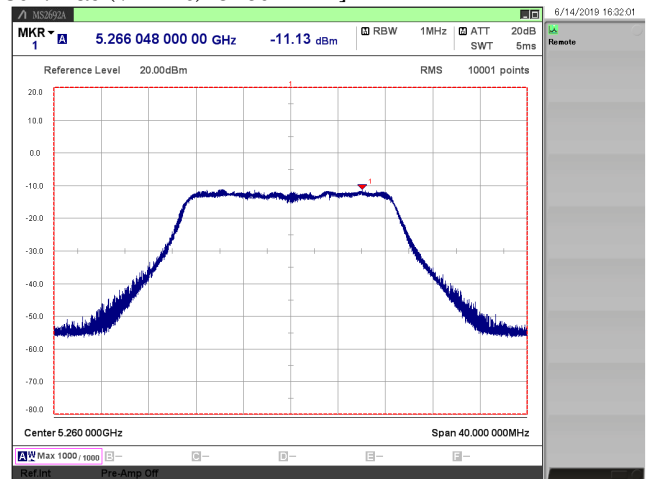





[ 802.11ac (VHT20)/ 5300 MHz ]

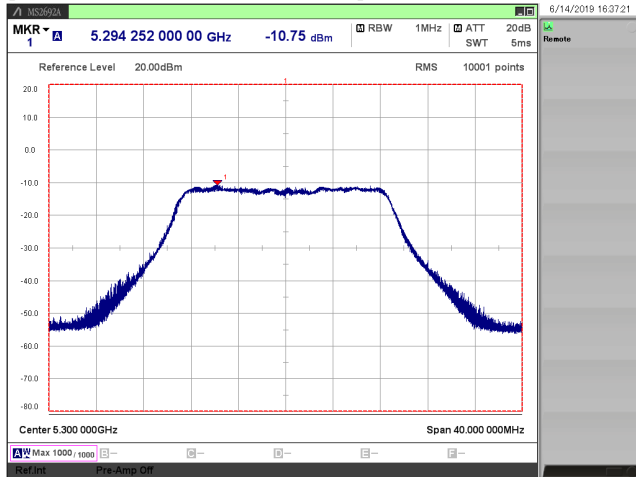


[ 802.11ac (VHT20)/ 5320 MHz ]

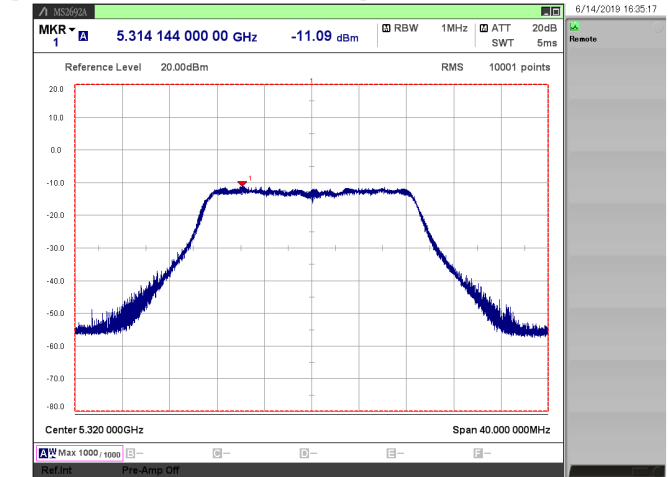


[ 802.11ac (VHT20)/ 5500 MHz ]

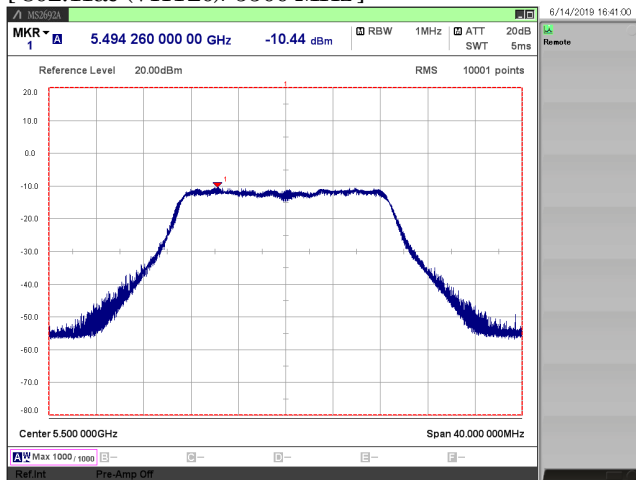


[ 802.11ac (VHT20)/ 5580 MHz ]

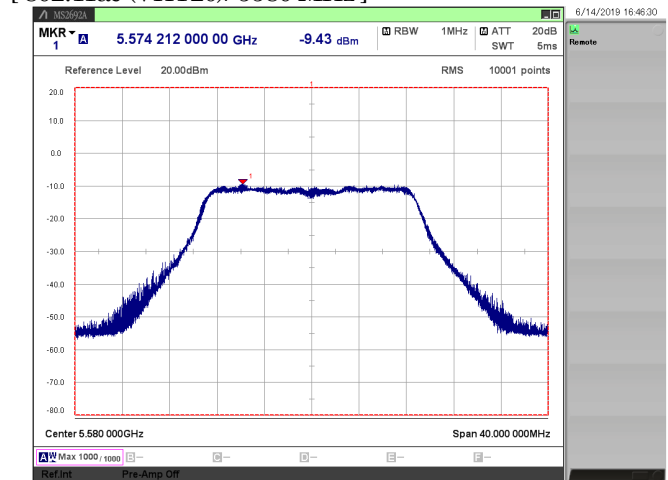


[ 802.11ac (VHT20)/ 5700 MHz ]

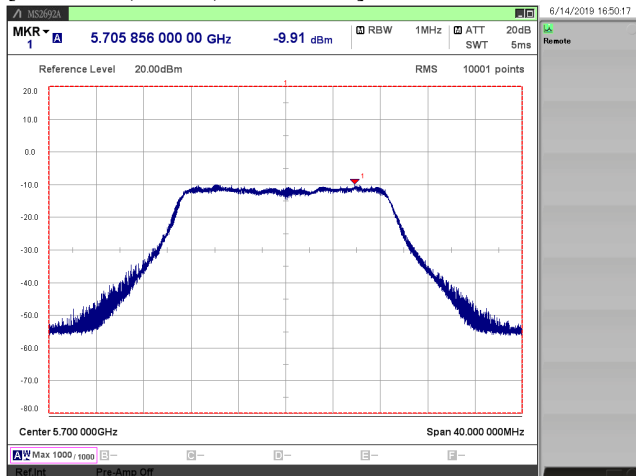


[ 802.11ac (VHT20)/ 5720 MHz ]

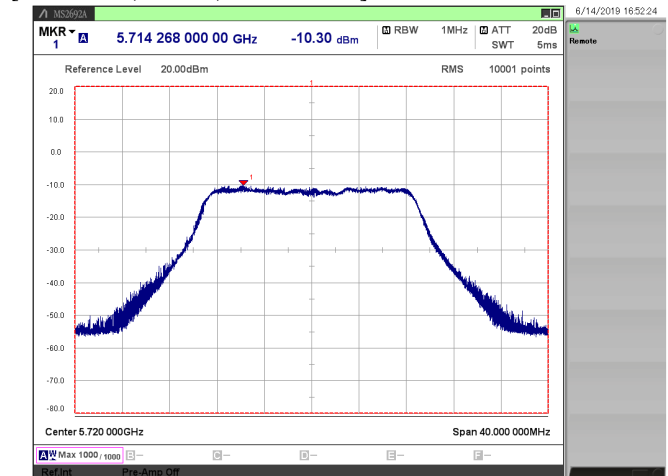


[ 802.11ac (VHT20)/ 5745 MHz ]

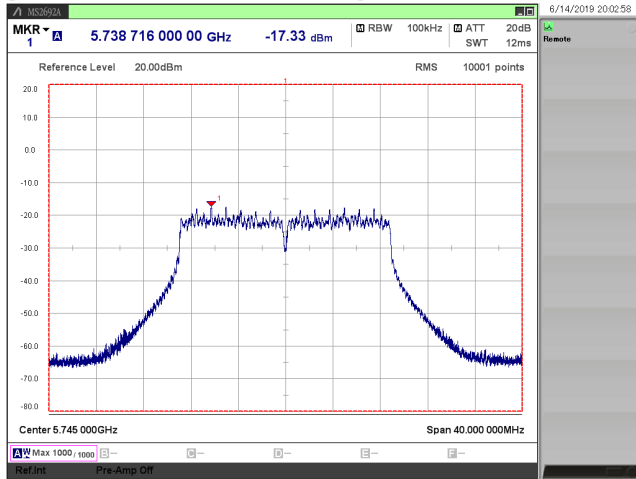


[ 802.11ac (VHT20)/ 5785 MHz ]

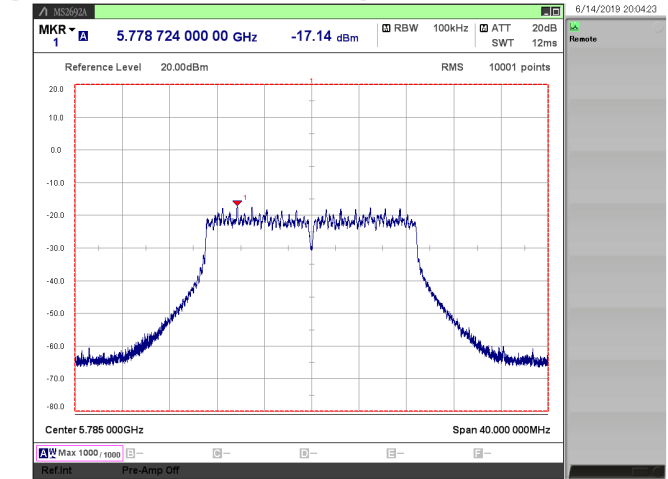


[ 802.11ac (VHT20)/ 5825 MHz ]

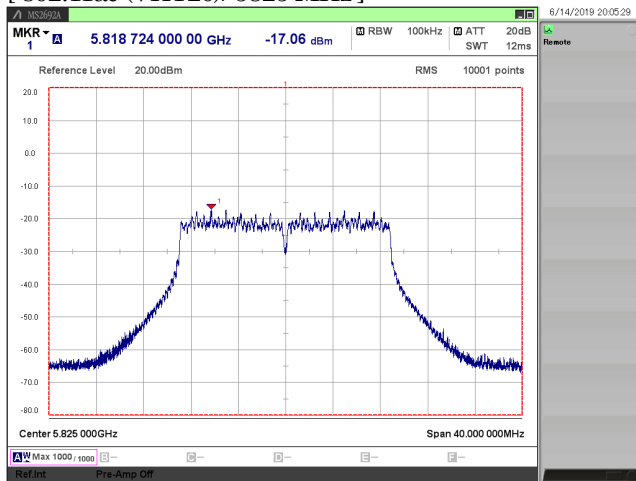


[ 802.11n (HT40)/ 5190 MHz ]

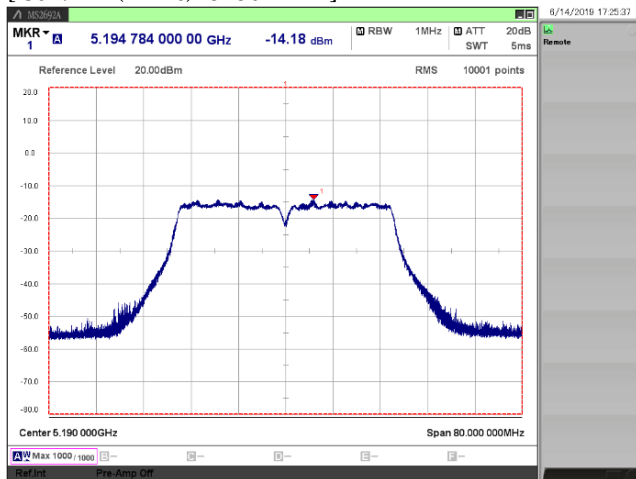


[ 802.11n (HT40)/ 5230 MHz ]

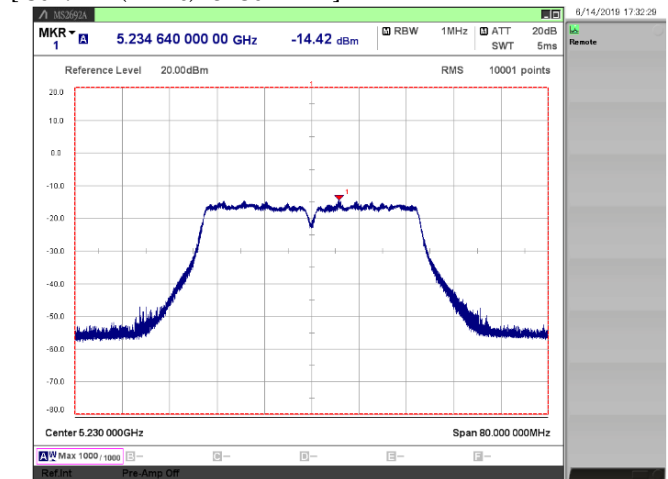


[ 802.11n (HT40)/ 5270 MHz ]

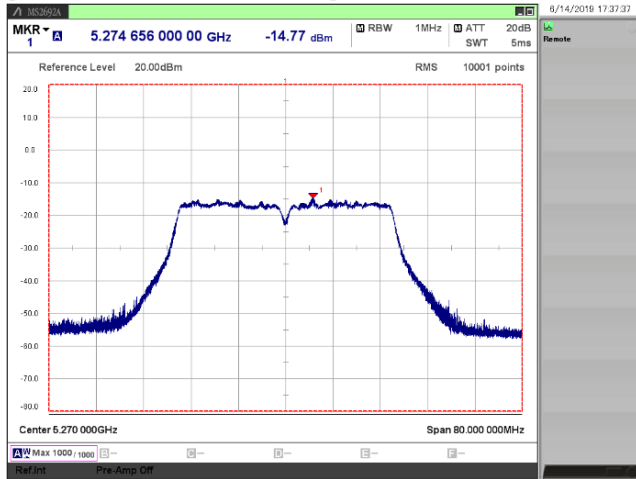


[ 802.11n (HT40)/ 5310 MHz ]

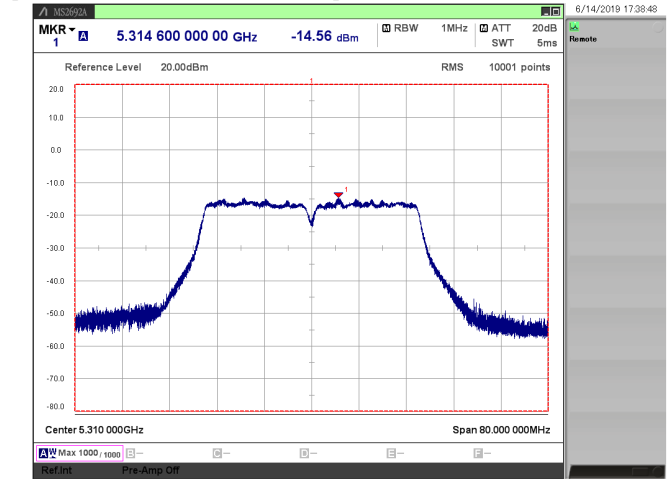


[ 802.11n (HT40)/ 5510 MHz ]

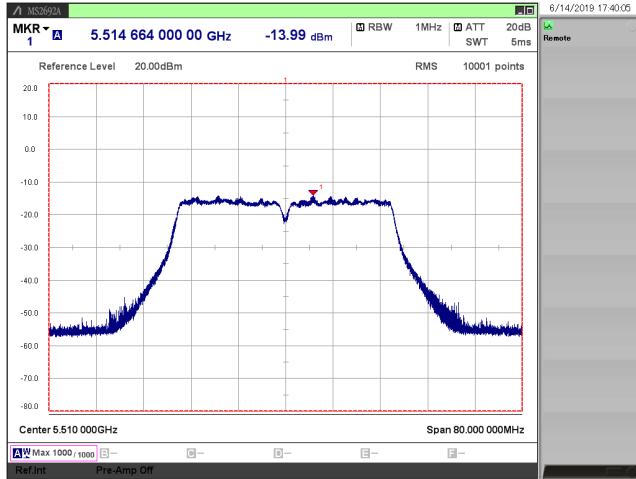


[ 802.11n (HT40)/ 5550 MHz ]

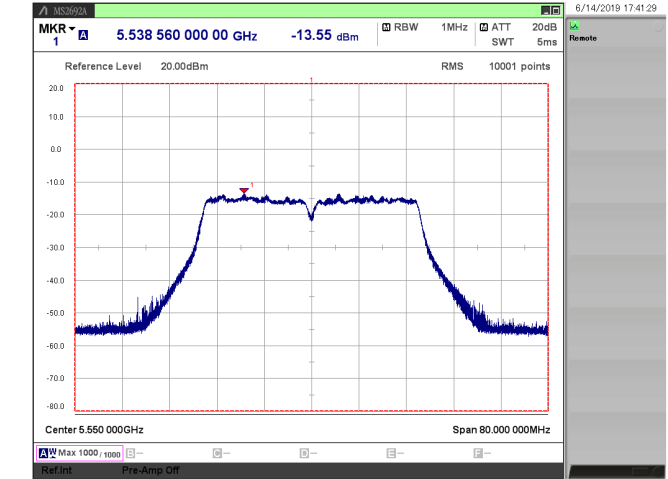


[ 802.11n (HT40)/ 5670 MHz ]

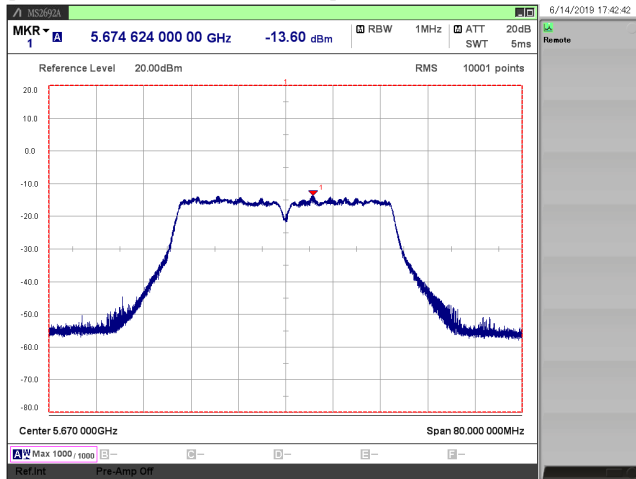


[ 802.11n (HT40)/ 5710 MHz ]

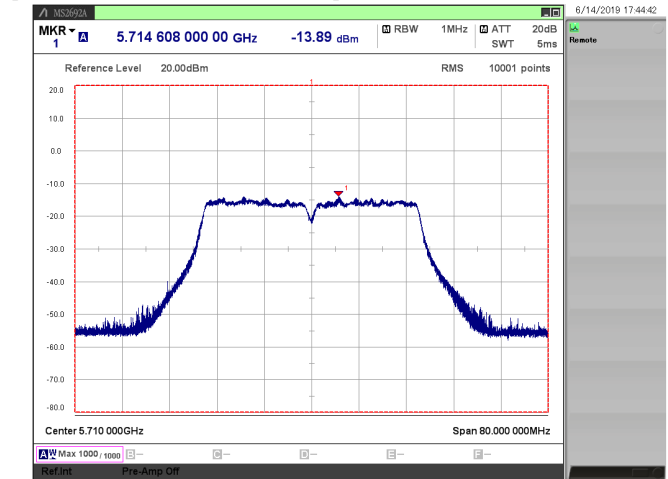


[ 802.11n (HT40)/ 5755 MHz ]

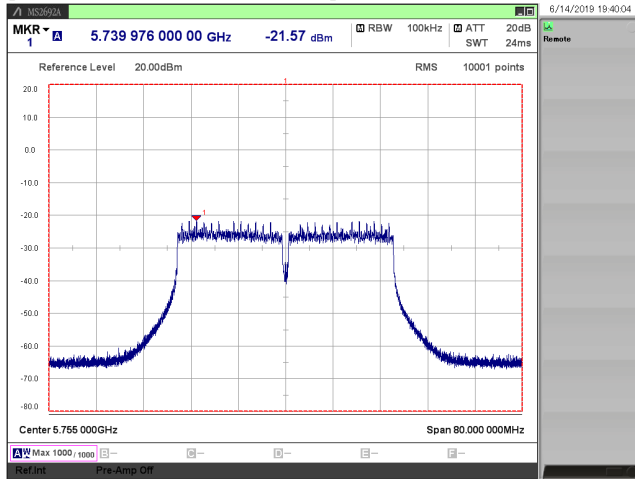


[ 802.11n (HT40)/ 5795 MHz ]

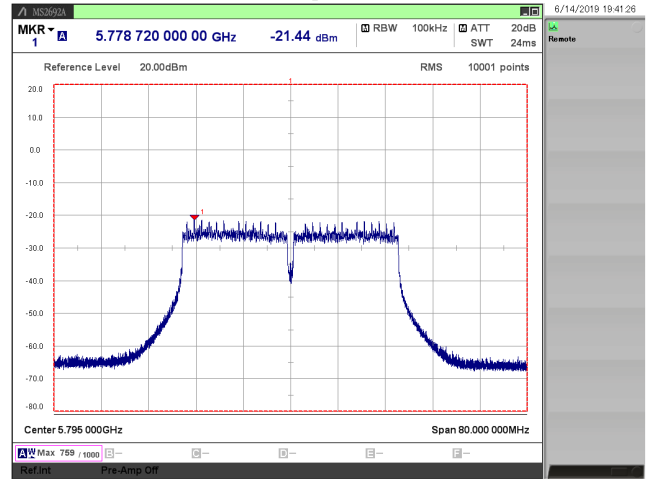


[ 802.11ac (VHT40)/ 5190 MHz ]

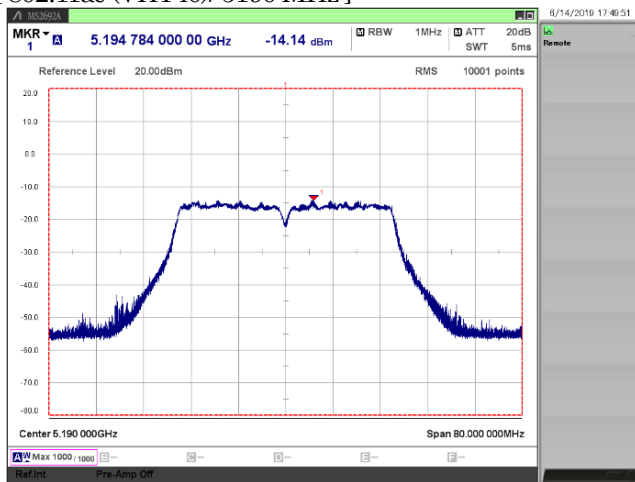

[ 802.11ac (VHT40)/ 5230 MHz ]

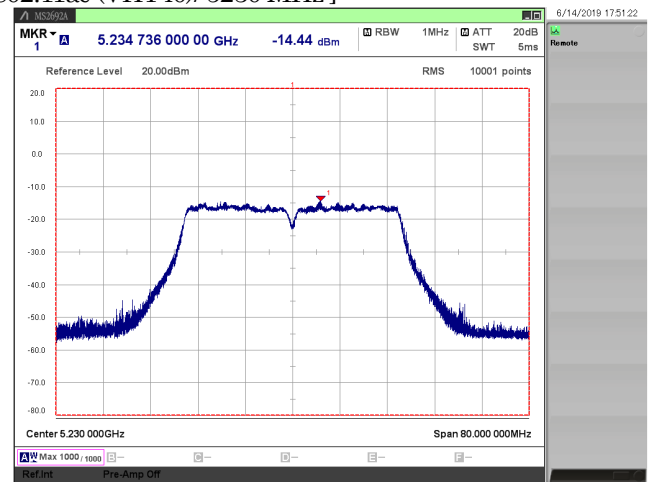

[ 802.11ac (VHT40)/ 5270 MHz ]

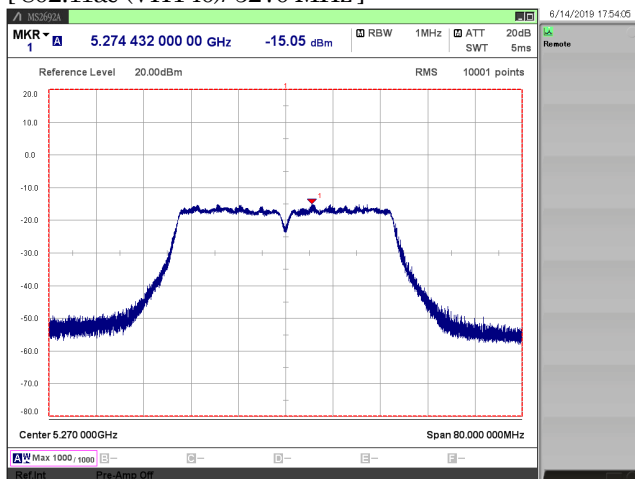

[ 802.11ac (VHT40)/ 5310 MHz ]

