

RADIO TEST REPORT

(for NFC)

Project No. : JB-Z0399
 Client : Sony Corporation
 Address : 1-7-1 Konan Minato-ku Tokyo, 108-0075 Japan
 Type of Equipment : Digital Music Player
 Model No. : NW-A55
 FCC ID : AK8NWA50
 Regulation Applied : 47 CFR Part 15 Subpart C
Final Judgment : Passed
 Sample Receipt : April 3, 2018
 Testing : April 17, 2018 - April 24, 2018
 Reported : April 24, 2018

Reported by :

Approved Signatory :




Takanori Oho
 Technical Manager
 EMC/ RF Test Laboratory Main Lab.
 Design Technology Division
 Sony Global Manufacturing & Operations Corporation

Teruki Kurihara
 Technical Manager
 EMC/ RF Test Laboratory Main Lab.
 Design Technology Division
 Sony Global Manufacturing & Operations Corporation

Notice

- * These test results relate only to the items (combination equipment, test configuration, operation condition etc.) tested.
- * This report shall not be reproduced except in full, without written approval of the laboratory.
- * This report must not be used by the client to claim product endorsement by A2LA or any agency of the U.S. Government.
- * All test results are traceable to the national and / or international standards.

The testing in which "Non-accreditation" is displayed is outside the accreditation scopes in Sony Global Manufacturing & Operations Corporation EMC/ RF Test Laboratory.



Sony Global Manufacturing & Operations Corporation EMC/RF Test Laboratory, Main Lab.

A2LA Cert. #3203.01

Kisarazu Site 8-4 Shiomi Kisarazu-shi Chiba, 292-0834 Japan
 PHONE +81-(438) 37-2750 FAX +81-(438) 37-1021

TABLE OF CONTENTS

- 1. General Information..... 3**
 - 1.1. Description of Equipment Under Test (EUT)..... 3
 - 1.2. Summary of Test Result..... 3
 - 1.3. Tested Methodology 4
 - 1.4. Measurement Procedures 4
 - 1.5. Test Facility..... 7
 - 1.6. Uncertainty 7
- 2. System Test Configuration 8**
 - 2.1. Validation 8
 - 2.2. Test Operating Conditions 8
 - 2.3. EUT Modifications 8
 - 2.4. Configuration of Tested System 9
- 3. Test Data..... 12**
 - 3.1. AC Power-line Conducted Emissions 12
 - 3.2. 20dB Bandwidth..... 13
 - 3.3. Frequency Tolerance..... 14
 - 3.4. Electric field strength (Fundamental and Spurious emissions)..... 15
- 4. Method of Calculation 19**
 - 4.1. AC Power-line Conducted Emissions Measurement..... 19
 - 4.2. Frequency Tolerance Measurement 19
 - 4.3. Electric field strength Measurement 19
- 5. List of Test Equipment..... 20**
 - 5.1. AC Power-line Conducted Emissions 20
 - 5.2. 20dB Bandwidth / Frequency Tolerance..... 20
 - 5.3. Electric field strength (Fundamental and Spurious emissions)..... 20
- 6. Photographs of test setup..... 21**
 - 6.1. AC Power-line Conducted Emissions Measurements Photo(s)..... 21
 - 6.2. 20dB Bandwidth / Frequency Tolerance Measurements Photo(s) 21
 - 6.3. Electric field strength Measurement Photo(s)..... 22

Note

- indicates that the listed condition, standard or equipment is applicable for this report.
- indicates that the listed condition, standard or equipment is not applicable for this report.

1. General Information

1.1. Description of Equipment Under Test (EUT)

General specification

Test Sample Condition : Prototype Pre-production Mass-production
 Type of Equipment : Digital Music Player
 Trade Name : SONY
 Model No. : NW-A55
 Serial No. : 3, 5
 Power Rating : DC 3.7V (The EUT was supplied with the power from built-in battery)

Similar model(s) to be covered by this report

Model No. :

Model No.	Point of Difference
NW-A55	Memory size only. (16 GB) *EUT
NW-A56	Memory size only. (32 GB)
NW-A57	Memory size only. (64 GB)

These points of difference do not affect the measurement results.
 Total 3 models are covered by this report.

Radio specification

Function of the Equipment : Transceiver
 Operating Frequency : 13.56 MHz
 Modulation Type : ASK
 Antenna Type : Loop antenna
 Operating Temperature : +5 to +35 deg.C

1.2. Summary of Test Result

Test Item	Worst Margin	Test Frequency band	Results
AC Power-line Conducted Emissions	14.3 dB (QP) 0.583 MHz L1	150 kHz - 30 MHz	Complied
Electric field strength of fundamental emissions	76.3 dB (QP) 13.56 MHz Vertical	13.553 - 13.567 MHz	Complied
Electric field strength of Spurious emissions within 13.110 - 14.010 MHz	47.6 dB (QP) 13.773 MHz Vertical	13.110 - 14.010 MHz (excluding 13.553 - 13.567 MHz band)	Complied
Electric field strength of Spurious emissions outside 13.110 - 14.010 MHz	22.9 dB (QP) 956.760 MHz Vertical	9 kHz - 1 GHz (excluding 13.110 - 14.010 MHz band)	Complied
20dB Bandwidth	Refer to the test data	Carrier	Complied
Frequency Tolerance	Refer to the test data	Carrier	Complied

Other requirements

Part 15.31(e) Supply voltage requirement
 : Complied (The EUT was tested with a new battery)
 Part 15.203 / 212 Antenna requirement
 : Complied (The EUT has an internal antenna which cannot be replaced by users)

AC Power-line Conducted Emissions

1. The non-conductive table (EUT table) made of (FRP, wood, other non-conductive material) was placed 0.4 m from its rear to the vertical reference ground plane.
2. The EUT was placed on the center of tabletop and its rear was flush with the rear of the table, connected through a LISN to the input power mains.
3. The LISN was placed in 80 cm from the nearest part of the EUT chassis.
4. The excess length of the AC cable between the EUT and the LISN receptacle, or an adaptor or extension cable connected to and measured with LISN, was folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
5. The connection of the all other equipment to the second LISN was performed. The second LISN was terminated with a 50-ohm terminator.
6. Interconnecting cables that hang closer than 40 cm to the horizontal reference ground plane was folded back and forth forming a bundle 30 to 40 cm long, hanging approximately in the middle between the horizontal reference ground plane and the tabletop.
7. Find the worst mode and arrangement of the EUT according to the follows:
 - Connecting all peripherals and change the position of peripherals and cables.
 - Changing the all test operation modes of the EUT.
 - On every condition, exploring the highest emissions with the spectrum analyzer.
(150 kHz - 30 MHz, peak detector, RBW: 10 kHz)
8. On the worst condition of the EUT found in above, choose the 6 highest emissions on the spectrum data. The final measurements carried out on these emissions with EMI test receiver.
(quasi-peak and average detector, RBW: 9 kHz)

Electric field strength (Fundamental and Spurious emissions)

1. The non-conductive table (EUT table) made of (FRP, Styrene Foam, other non-conductive material) was placed in the center of the turntable.
2. The EUT was placed on the center of the tabletop.
3. The test antenna was placed away from the EUT at test distance.
4. Find the worst arrangement of the EUT according to follows;
 - Rotating the turntable and/or scanning the antenna.
 - On every condition, exploring the highest emissions with the spectrum analyzer. (9 kHz - 1 GHz, peak detector)
5. On the worst arrangement of the EUT found in above, choose the fundamental emissions and three highest harmonics or spurious emissions on the spectrum data.

The final measurements of all test operating modes carried out on these emissions as follows:

The test antenna and the turntable were performed with follows:

	9kHz - 30 MHz	30 MHz - 1000 MHz
Antenna	Loop Antenna	Bi-conical Antenna, Log-periodic Antenna
Antenna scanning range	1m, Vertical, 360 degrees	1 - 4m, Horizontal and Vertical
Turntable rotating range	360 degrees	360 degrees

Instruments settings were carried out with follows:

	9 kHz - 90 kHz 110 kHz - 490 kHz	90 kHz- 110 kHz 490 kHz - 30 MHz	30 MHz - 1000 MHz
Detector	Peak / Average	Quasi-Peak	Quasi-Peak
RBW	200 Hz (6dB) or 9 kHz (6dB) *1	200 Hz (6dB) or 9 kHz (6dB) *1	120 kHz (6dB)
Instrument	EMI test receiver	EMI test receiver	EMI test receiver

*1: When the measurement frequencies below 150 kHz, RBW: 200 Hz was used.

6. The measurement values were compensated the distance factor with follows;

$$9 \text{ kHz} - 490 \text{ kHz} [\text{value at } 300\text{m}] = [\text{value at } 3\text{m}] + 40\log(3[\text{m}] / 300[\text{m}])$$

$$490 \text{ kHz} - 30 \text{ MHz} [\text{value at } 30\text{m}] = [\text{value at } 3\text{m}] + 40\log(3[\text{m}] / 30[\text{m}])$$
7. Although these tests were performed other than open field area test site, adequate comparison measurements were confirmed against 30 m open field area test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788 D01.

1.5. Test Facility

Address of Test Facility

Test Facility Name : Sony Global Manufacturing & Operations Corporation
EMC/ RF Test Laboratory, Main Lab.
Address : Kisarazu Site 8-4 Shiomi Kisarazu-shi Chiba, 292-0834 Japan
Phone : +81 438 37 2750

AC Power-line Conducted Emissions

Shielded Room

4th Site EMC Site

20dB Bandwidth

Shielded Room

4th Site SR1

Frequency Tolerance

Shielded Room

4th Site SR1

Electric field strength (Fundamental and Spurious emissions)

Semi-Anechoic chamber

4th Site EMC Site

A2LA Accreditation for Test Facility

The above test facility has been fully reported to A2LA and accepted as follows:

A2LA Certificate No. : 3203.01
Cert. Validated Date : 31 Oct 2019

1.6. Uncertainty

Test Item	4th Site SR1
Frequency Tolerance	$\pm 1.77 * 10^{-6}$

Test Item	Frequency	4th Site	EMC Site
AC Power-line Conducted Emissions	150 kHz - 30 MHz	± 3.34 dB	± 3.35 dB
Radiated Emissions (EUT height 0.8m)	9 kHz - 30 MHz	± 2.59 dB	± 3.12 dB
	30 - 300 MHz	± 4.18 dB	± 5.26 dB
	300 - 1000 MHz	± 4.04 dB	± 4.37 dB

2. System Test Configuration

2.1. Validation

The system was configured for testing in a typical (as a customer would normally use it).
The tests were conducted with the worst case modes as follows.

2.2. Test Operating Conditions

The tests have been carried out the following conditions.

Test Items	Operating Mode*1	Data Rate	Test Channels
AC Power-line Conducted Emissions	Type A (without Tag) *2, 3	106kbps	13.56MHz
Electric field strength (Fundamental and Spurious emissions), 20dB Bandwidth	Type A (without Tag) *2	106kbps	13.56 MHz
	Type F (without Tag) *2	212kbps	
Frequency Tolerance	Unmodulated	-	13.56 MHz

Note:

*1: The operating mode(s) has been configured by the software: Diagnosis Ver.3.02.02

*2: The operating with Tag mode was performed while exploratory testing.

*3: The final test was performed with the representative mode that had been found as the worst emission mode while exploratory testing.

Extreme test condition:

Test Items	Test Temperature	Test Voltage
Frequency Tolerance	-20 deg.C to +50 deg.C	3.7V
	+20 deg.C	3.15V and 4.26V

Special accessories needed for connecting the EUT to achieve compliance:

Item	Manufacturer	Model No.	Serial No.	Remark
Tag (Type A)	SONY	-	-	-
Tag (Type F)	SONY	-	-	-

2.3. EUT Modifications

- No equipment modification to achieve compliance to the standard levels was done during the tests.
 Equipment was modified to achieve compliance to the standard level as below.

Responsible Party Signature

Typed/ Print Name :
Responsible Party :
Position :
Date :

2.4. Configuration of Tested System

Electric field strength Measurement

The equipment under test (EUT)

Symbol	Item	Manufacturer	Model No.	Serial No.
A-1	Digital Music Player	SONY	NW-A55	3

Support equipment for operation

Symbol	Item	Manufacturer	Model No.	Serial No.
-	-	-	-	-

Type of cable

Symbol	Description	Identification (Manufacturer etc.)	Shielded YES / NO	Ferrite Core	Bundled	Length (m)
-	-	-	-	-	-	-

System configuration

*: EUT



20dB Bandwidth / Frequency Tolerance Measurements

The equipment under test (EUT)

Symbol	Item	Manufacturer	Model No.	Serial No.
A-2	Digital Music Player	SONY	NW-A55	5

Support equipment for operation


Symbol	Item	Manufacturer	Model No.	Serial No.
B	Regulated DC Power Supply	KENWOOD	PW18-1.3AT	08046429

Type of cable

Symbol	Description	Identification (Manufacturer etc.)	Shielded YES / NO	Ferrite Core	Bundled	Length (m)
1	DC cable	-	NO	NO	NO	1.8
2	AC cable	-	NO	NO	NO	0.9

System configuration

*: EUT

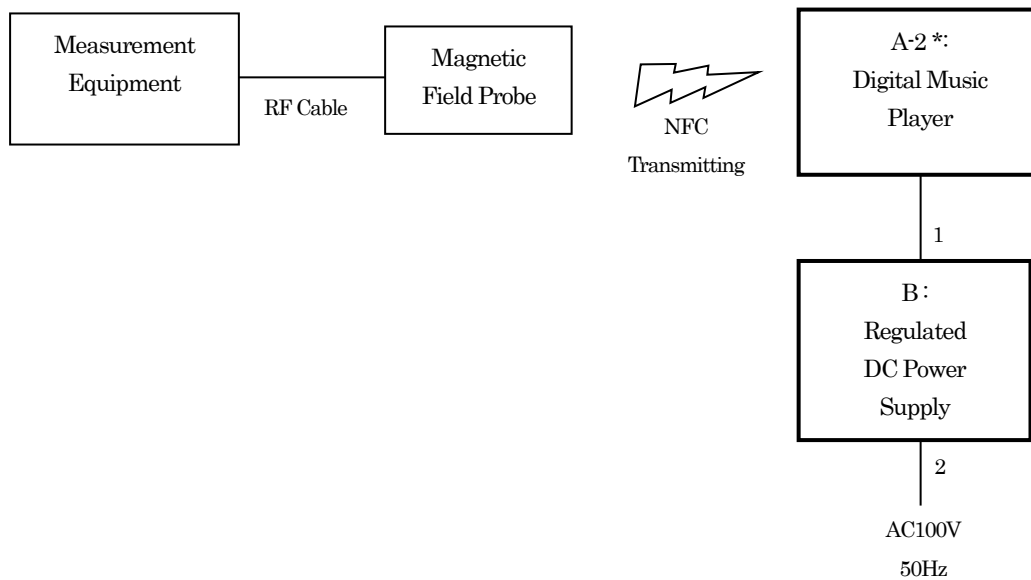

AC Power-line Conducted Emissions Measurement

The equipment under test (EUT)

Symbol	Item	Manufacturer	Model No.	Serial No.
A-1	Digital Music Player	SONY	NW-A55	3

Support equipment for operation


Symbol	Item	Manufacturer	Model No.	Serial No.
B	Personal Computer	SONY	PCG-71611N	1006554
C	AC Adaptor	SONY	VGP-AC19V41	148753032 0255555

Type of cable

Symbol	Description	Identification (Manufacturer etc.)	Shielded YES / NO	Ferrite Core	Length (m)	Bundled
1	USB cable	SONY	YES	NO	1.0	-
2	DC cable	-	NO	NO	1.7	-
3	AC cable	-	NO	NO	0.7	-
4	AC Extension Cable	lian dung	NO	NO	0.1	-

System configuration

*: EUT

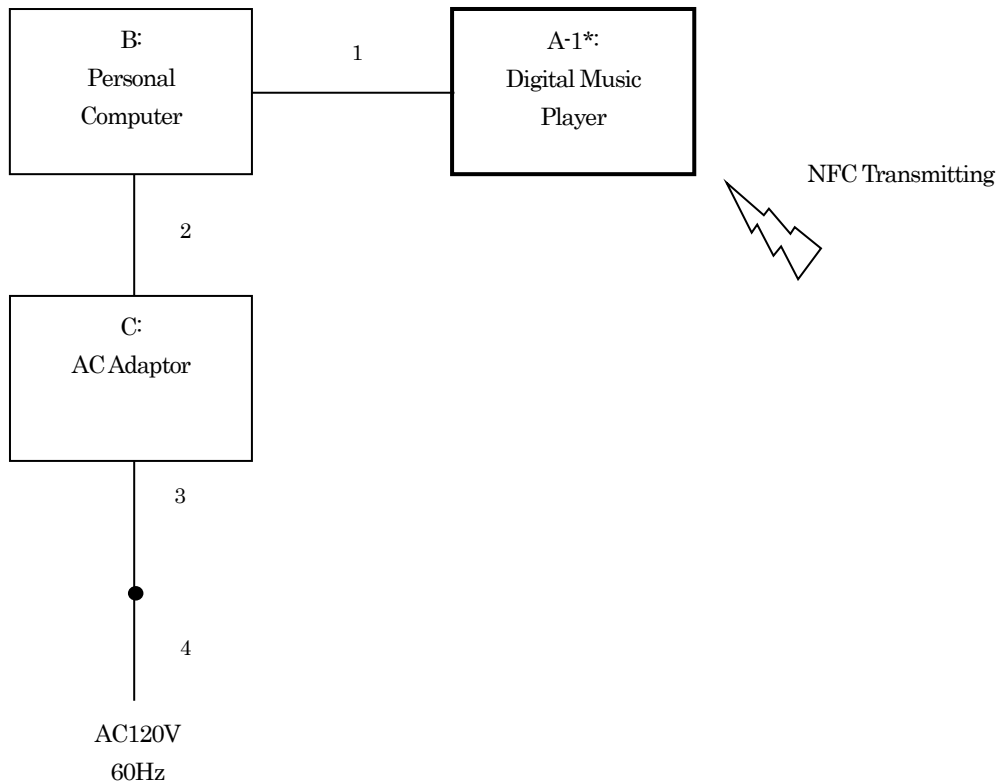


3. Test Data

3.1. AC Power-line Conducted Emissions

1)Date of measurement : April 24, 2018

[Type A]

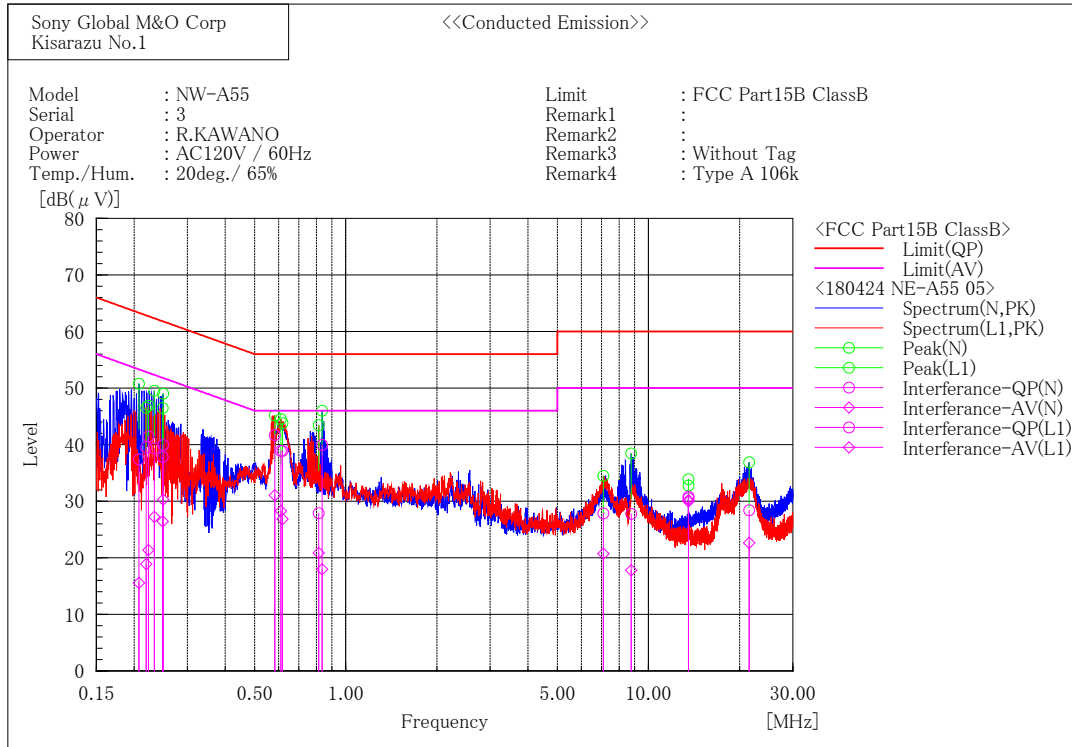

Final Result

--- N Phase ---

No.	Frequency [MHz]	Reading QP [dB(μV)]	Reading AV [dB(μV)]	c. f [dB]	Result QP [dB(μV)]	Result AV [dB(μV)]	Limit QP [dB(μV)]	Limit AV [dB(μV)]	Margin QP [dB]	Margin AV [dB]
1	0.208	21.5	-0.3	15.9	37.4	15.6	63.3	53.3	25.9	37.7
2	0.233	23.6	11.5	15.7	39.3	27.2	62.3	52.3	23.0	25.1
3	0.250	24.2	14.6	15.7	39.9	30.3	61.8	51.8	21.9	21.5
4	0.618	22.8	10.8	16.1	38.9	26.9	56.0	46.0	17.1	19.1
5	0.836	23.9	1.9	16.0	39.9	17.9	56.0	46.0	16.1	28.1
6	8.769	11.7	1.7	16.1	27.8	17.8	60.0	50.0	32.2	32.2
7	13.561	14.6	13.8	16.2	30.8	30.0	60.0	50.0	29.2	20.0
8	21.500	12.0	6.3	16.4	28.4	22.7	60.0	50.0	31.6	27.3

--- L1 Phase ---

No.	Frequency [MHz]	Reading QP [dB(μV)]	Reading AV [dB(μV)]	c. f [dB]	Result QP [dB(μV)]	Result AV [dB(μV)]	Limit QP [dB(μV)]	Limit AV [dB(μV)]	Margin QP [dB]	Margin AV [dB]
1	0.219	23.7	3.1	15.8	39.5	18.9	62.9	52.9	23.4	34.0
2	0.223	25.8	5.7	15.7	41.5	21.4	62.7	52.7	21.2	31.3
3	0.249	22.1	10.7	15.7	37.8	26.4	61.8	51.8	24.0	25.4
4	0.583	25.6	14.9	16.1	41.7	31.0	56.0	46.0	14.3	15.0
5	0.611	22.8	12.2	16.1	38.9	28.3	56.0	46.0	17.1	17.7
6	0.814	11.9	4.9	16.0	27.9	20.9	56.0	46.0	28.1	25.1
7	7.094	11.8	4.7	16.0	27.8	20.7	60.0	50.0	32.2	29.3
8	13.560	14.3	14.0	16.2	30.5	30.2	60.0	50.0	29.5	19.8

3.2. 20dB Bandwidth


- 1) Ambient temperature : 22.7 deg.C
- 2) Relative humidity : 57.0 %
- 3) Date of measurement : April 23, 2018
- 4) Measured by : M.KOUGA
- 5) Operating mode : Transmitting mode

Mode		Channel [MHz]	Result [kHz]	Limit [kHz]
Type A	106 kbps	13.56	554.800	-
Type F	212 kbps	13.56	76.600	-

[Type A / 106kbps]



[Type F / 212kbps]

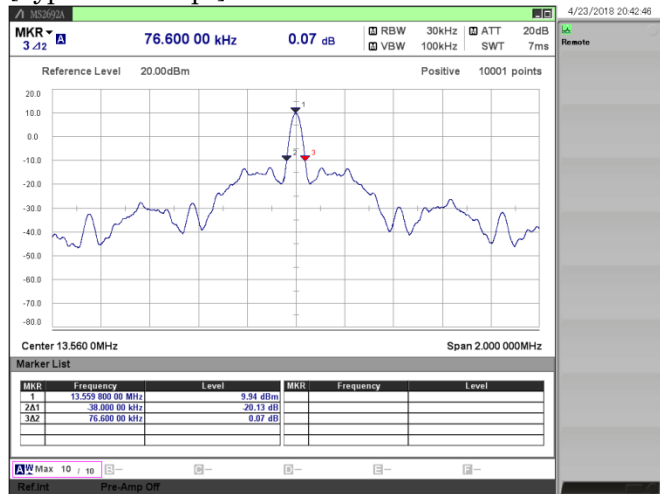

3.3. Frequency Tolerance

- 1) Ambient temperature : 22.7 deg.C
 2) Relative humidity : 57.0 %
 3) Date of measurement : April 23, 2018
 4) Measured by : M.KOUGA
 5) Operating mode : Transmitting mode (Unmodulated)

Test Temperature	Test Voltage	Test Conditions	Frequency [MHz]	Reading [MHz]	Tolerance [MHz]	Tolerance [%]	Limit [%]
50deg.C	3.700V	Start up	13.56	13.559876	-0.000124	-0.000914	± 0.01
		After 2min	13.56	13.559876	-0.000124	-0.000914	± 0.01
		After 5min	13.56	13.559877	-0.000123	-0.000907	± 0.01
		After 10min	13.56	13.559879	-0.000121	-0.000892	± 0.01
40deg.C	3.700V	Start up	13.56	13.559881	-0.000119	-0.000878	± 0.01
		After 2min	13.56	13.559878	-0.000122	-0.000900	± 0.01
		After 5min	13.56	13.559877	-0.000123	-0.000907	± 0.01
		After 10min	13.56	13.559878	-0.000122	-0.000900	± 0.01
30deg.C	3.700V	Start up	13.56	13.559915	-0.000085	-0.000627	± 0.01
		After 2min	13.56	13.559903	-0.000097	-0.000715	± 0.01
		After 5min	13.56	13.559894	-0.000106	-0.000782	± 0.01
		After 10min	13.56	13.559890	-0.000110	-0.000811	± 0.01
20deg.C	3.700V	Start up	13.56	13.559916	-0.000084	-0.000619	± 0.01
		After 2min	13.56	13.559914	-0.000086	-0.000634	± 0.01
		After 5min	13.56	13.559914	-0.000086	-0.000634	± 0.01
		After 10min	13.56	13.559914	-0.000086	-0.000634	± 0.01
10deg.C	3.700V	Start up	13.56	13.559936	-0.000064	-0.000472	± 0.01
		After 2min	13.56	13.559938	-0.000062	-0.000457	± 0.01
		After 5min	13.56	13.559942	-0.000058	-0.000428	± 0.01
		After 10min	13.56	13.559945	-0.000055	-0.000406	± 0.01
0deg.C	3.700V	Start up	13.56	13.559953	-0.000047	-0.000347	± 0.01
		After 2min	13.56	13.559954	-0.000046	-0.000339	± 0.01
		After 5min	13.56	13.559956	-0.000044	-0.000324	± 0.01
		After 10min	13.56	13.559957	-0.000043	-0.000317	± 0.01
-10deg.C	3.700V	Start up	13.56	13.559955	-0.000045	-0.000332	± 0.01
		After 2min	13.56	13.559953	-0.000047	-0.000347	± 0.01
		After 5min	13.56	13.559949	-0.000051	-0.000376	± 0.01
		After 10min	13.56	13.559946	-0.000054	-0.000398	± 0.01
-20deg.C	3.700V	Start up	13.56	13.559936	-0.000064	-0.000472	± 0.01
		After 2min	13.56	13.559929	-0.000071	-0.000524	± 0.01
		After 5min	13.56	13.559915	-0.000085	-0.000627	± 0.01
		After 10min	13.56	13.559906	-0.000094	-0.000693	± 0.01
20deg.C	4.255V	Start up	13.56	13.559917	-0.000083	-0.000612	± 0.01
		After 2min	13.56	13.559912	-0.000088	-0.000649	± 0.01
		After 5min	13.56	13.559912	-0.000088	-0.000649	± 0.01
		After 10min	13.56	13.559912	-0.000088	-0.000649	± 0.01
20deg.C	3.145V	Start up	13.56	13.559918	-0.000082	-0.000605	± 0.01
		After 2min	13.56	13.559916	-0.000084	-0.000619	± 0.01
		After 5min	13.56	13.559917	-0.000083	-0.000612	± 0.01
		After 10min	13.56	13.559917	-0.000083	-0.000612	± 0.01


3.4. Electric field strength (Fundamental and Spurious emissions)

1) Date of measurement

9kHz - 30MHz : April 17, 2018 (all mode)
 30MHz - 1000MHz : April 17, 2018 (all mode)

9 kHz - 30 MHz

[Type A (106kbps)]

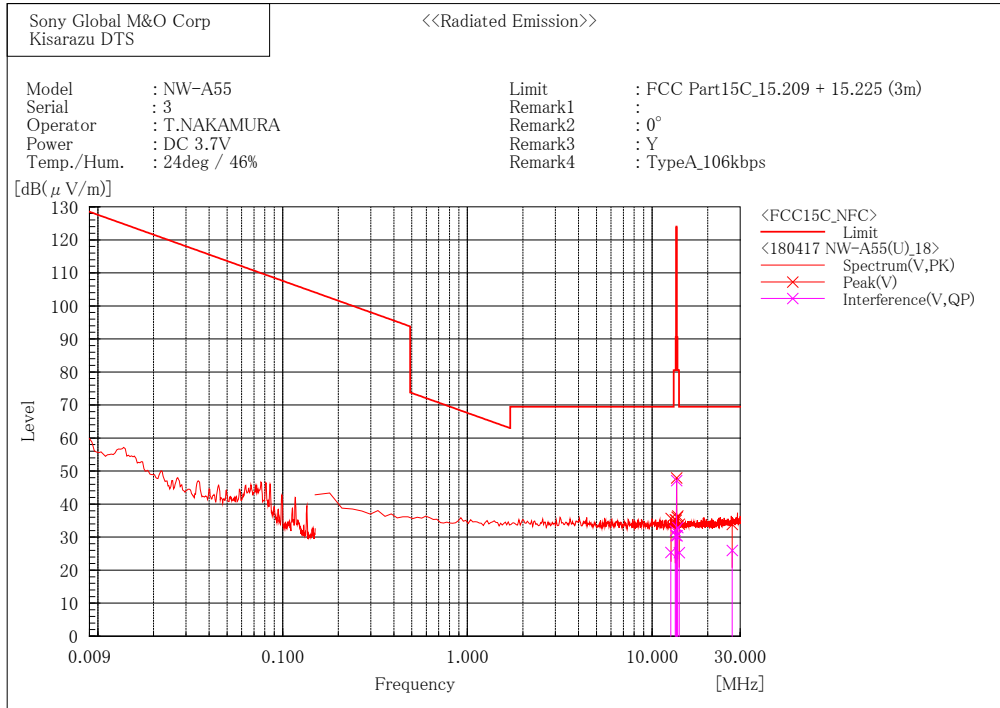


Final Result

--- Vertical Polarization (QP)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	12.647	5.3	20.1	25.4	69.5	44.1	100.0	64.2
2	13.347	11.9	20.0	31.9	80.5	48.6	100.0	270.3
3	13.455	10.5	20.0	30.5	90.5	60.0	100.0	288.1
4	13.560	27.2	20.0	47.2	124.0	76.8	100.0	278.6
5	13.665	10.4	20.0	30.4	90.5	60.1	100.0	92.5
6	13.773	12.9	20.0	32.9	80.5	47.6	100.0	271.3
7	14.047	5.4	19.9	25.3	69.5	44.2	100.0	123.8
8	27.120	5.3	20.7	26.0	69.5	43.5	100.0	256.7

Mode	Frequency [MHz]	Polar.	Result (3m) [dBuV/m]	Distance Factor [dB]	Result(30m) [dBuV/m]	Limit (30m) [dBuV/m]	Margin [dB]
Type A 106kbps	12.647	V	25.40	-40.00	-14.60	29.54	44.14
	13.347	V	31.90	-40.00	-8.10	40.51	48.61
	13.455	V	30.50	-40.00	-9.50	50.47	59.97
	13.560	V	47.20	-40.00	7.20	84.00	76.80
	13.665	V	30.40	-40.00	-9.60	50.47	60.07
	13.773	V	32.90	-40.00	-7.10	40.51	47.61
	14.047	V	25.30	-40.00	-14.70	29.54	44.24
	27.120	V	26.00	-40.00	-14.00	29.54	43.54

[Type F (212kbps)]

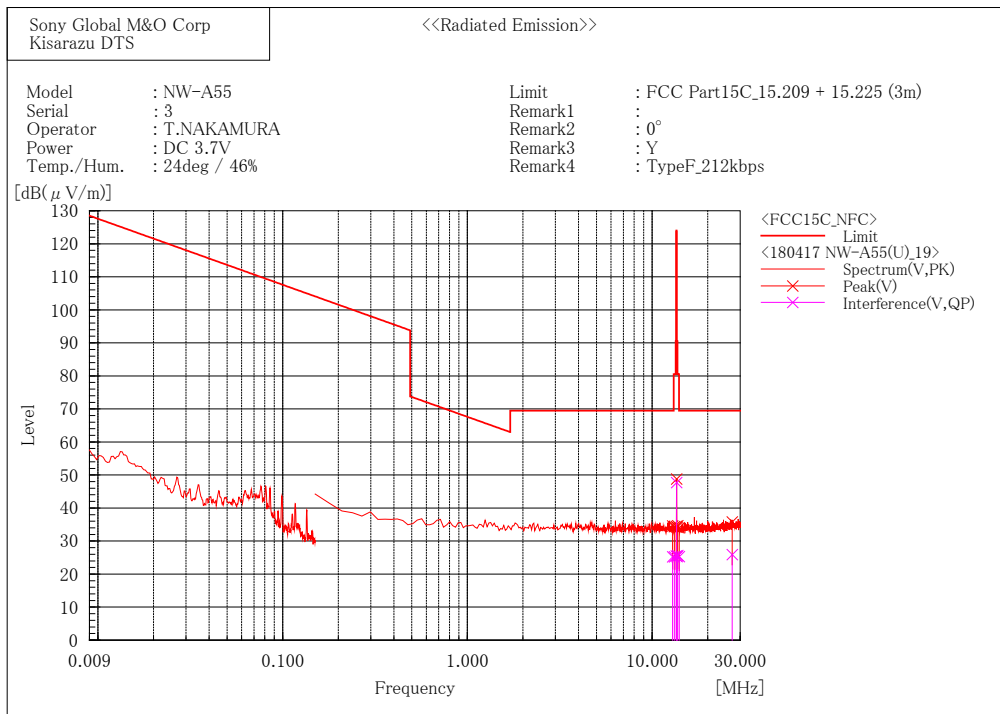


Final Result

--- Vertical Polarization (QP)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	12.927	5.2	20.0	25.2	69.5	44.3	100.0	126.2
2	13.217	5.2	20.0	25.2	80.5	55.3	100.0	328.1
3	13.486	5.5	20.0	25.5	90.5	65.0	100.0	83.2
4	13.560	27.7	20.0	47.7	124.0	76.3	100.0	281.2
5	13.642	5.3	20.0	25.3	90.5	65.2	100.0	41.3
6	13.749	5.6	20.0	25.6	80.5	54.9	100.0	297.3
7	14.043	5.4	19.9	25.3	69.5	44.2	100.0	342.4
8	27.120	5.2	20.7	25.9	69.5	43.6	100.0	219.0

Mode		Frequency [MHz]	Polar.	Result (3m) [dBuV/m]	Distance Factor [dB]	Result(30m) [dBuV/m]	Limit (30m) [dBuV/m]	Margin [dB]
Type F	212kbps	12.927	V	25.20	-40.00	-14.80	29.54	44.34
		13.217	V	25.20	-40.00	-14.80	40.51	55.31
		13.486	V	25.50	-40.00	-14.50	50.47	64.97
		13.560	V	47.70	-40.00	7.70	84.00	76.30
		13.642	V	25.30	-40.00	-14.70	50.47	65.17
		13.749	V	25.60	-40.00	-14.40	40.51	54.91
		14.043	V	25.30	-40.00	-14.70	29.54	44.24
		27.120	V	25.90	-40.00	-14.10	29.54	43.64

30 MHz - 1000 MHz
[Type A (106kbps)]

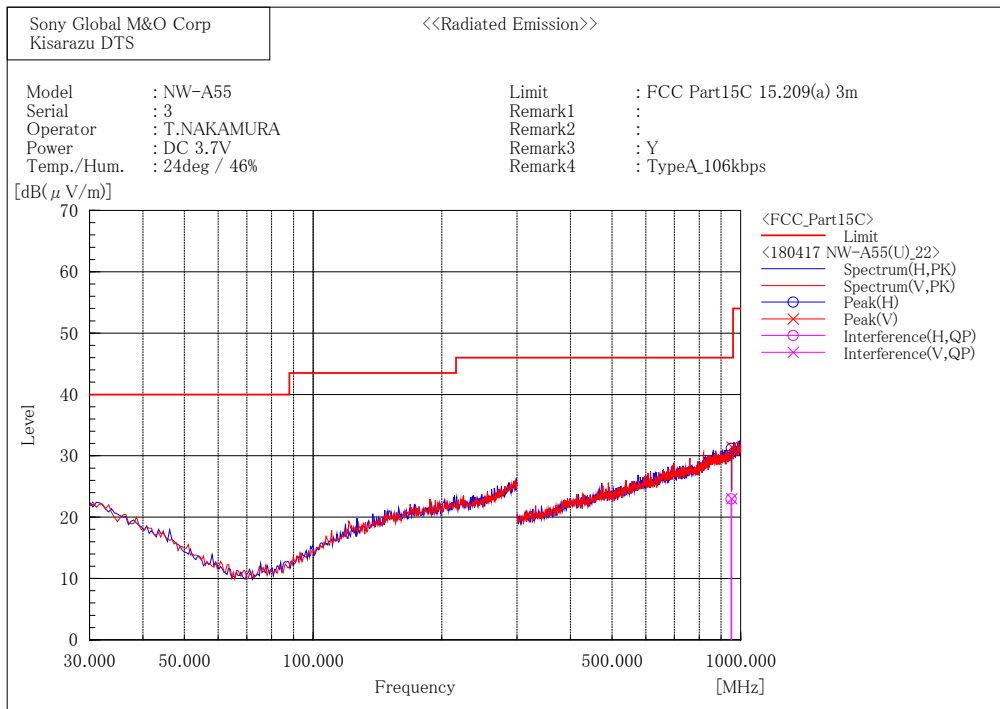

Final Result


--- Horizontal Polarization (QP)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	950.280	24.1	-1.1	23.0	46.0	23.0	253.6	74.2

--- Vertical Polarization (QP)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	952.820	24.1	-1.1	23.0	46.0	23.0	254.8	293.1

[Type F (212kbps)]

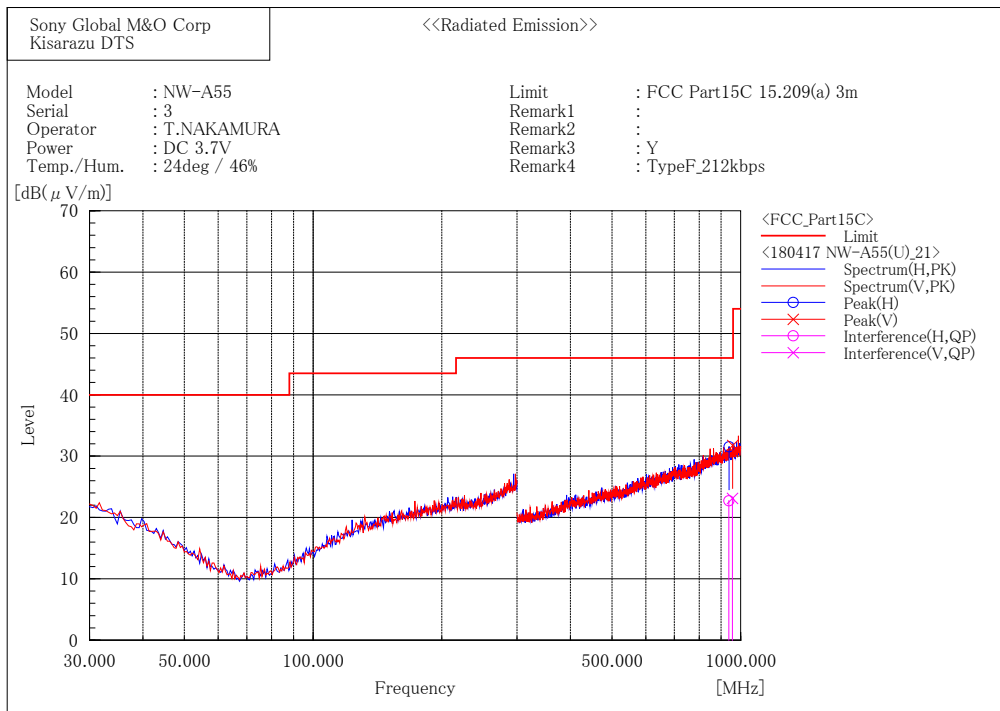

Final Result

--- Horizontal Polarization (QP)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	938.080	24.1	-1.4	22.7	46.0	23.3	261.2	355.2

--- Vertical Polarization (QP)---

No.	Frequency [MHz]	Reading [dB(μV)]	c.f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	956.760	24.1	-1.0	23.1	46.0	22.9	249.2	96.2

4. Method of Calculation

4.1. AC Power-line Conducted Emissions Measurement

Method of calculation : Software
 The Software for Calculation Name : EP5/CE
 Version : Ver5.0.0

$$\text{Test Result [dBuV]} = \text{Meter Reading [dBuV]} + \text{C.F. [dB]}$$

Notes :

- (a) Meter Reading : Reading of the EMI test receiver or spectrum analyzer.
- (b) C.F. : System Loss + Correction Factor of LISN.

4.2. Frequency Tolerance Measurement

Method of calculation : Software
 The Software for Calculation Name : SW-310
 Version : Ver. 2.2

$$\text{Test Result [\%]} = (\text{Meter Reading [MHz]} - 13.56 \text{ [MHz]}) / 13.56 \text{ [MHz]} * 100$$

Notes :

- (a) Meter Reading : Reading Frequency of the spectrum analyzer.

4.3. Electric field strength Measurement

Method of calculation : Software
 The Software for Calculation Name : V-Scan
 Version : Ver. 4.0.30

$$\text{Test Result [dBuV/m]} = \text{Meter Reading [dBuV]} + \text{C.F. [dB/m]}$$

Notes :

- (a) Meter Reading : Reading of the EMI test receiver or spectrum analyzer.
- (b) C.F. : Antenna Factor (including Balun Loss) + System GainLoss
 : Antenna Factor (including Balun Loss) + System GainLoss + 20 log (3 m/ 10 m)

5. List of Test Equipment

All test results are traceable to the national and/or international standards.

5.1. AC Power-line Conducted Emissions

EMC Site Shielded Room

	Ctrl.#	Equipment	Model No.	Serial No.	Manufacturer	Cal.Int.	Last Cal.
x	-	Shielded Room	-	-	Otsuka Science	-	-
x	M0484	EMI Receiver	ESCI	100607	Rohde & Schwarz	12	18.02.15
x	CS0015	N-CE Cable System	-	-	EMC/RF Test Lab.	12	17.11.17
x	M0569	HIGH FREQUENCY FUSE	MP612A	-	Anritsu	12	17.11.17
x	M0663	6dB Attenuator	6806.01.A	-	Anritsu	12	17.11.17
x	M0130	RF Selector	NS4903	0109001	TOYO Corp.	12	17.11.17
x	M0605	LISN (for EUT)	ENV216	101305	Rohde & Schwarz	12	17.10.02
x	M0688	Thermo Meter	AD-5640A	201302	A&D	12	17.10.16

5.2. 20dB Bandwidth / Frequency Tolerance

4th Site Shielded Room 1

	Control No.	Equipment	Model No.	Serial No.	Manufacturer	Cal. Int.	Last Cal.
x	-	Shield Room	B83117-B2432-T161	P26428	Albatross Project	-	-
x	W0054	TEMP & HUMID CHAMBER	SH-240	91006788	ESPEC CORP.	-	-
x	W0101	Signal Analyzer	MS2692A	6201338955	Anritsu	12	18.04.19
x	W0057	EMI Probe	MA2601C	No.1	Anritsu	12	17.10.25
-	W0029	10dB Attenuator	8493C	76549	Keysight Technologies	12	17.08.03
x	W0106	Digital Multimeter	R6452A	120600443	ADVANTEST	12	17.07.27
-	M0719	Thermo Meter	TH-321	140053	AS ONE	12	17.04.28
x	M0722	Thermo Meter	TM-305	140005	AS ONE	12	17.07.20
		Thermo Sensor	LP-200	002	AS ONE	12	17.07.20

5.3. Electric field strength (Fundamental and Spurious emissions)

4th Site 10m Semi-Anechoic Chamber

	Ctrl.#	Equipment	Model No.	Serial No.	Manufacturer	Cal.Int.	Last Cal.
x	M0506	EMC Chamber	10m	-	TDK	12	17.07.10
x	M0575	EMI Receiver	ESCI	100161	Rohde & Schwarz	12	17.04.19
-	M0669	EMI Receiver	N9038A	MY51210223	Keysight Technologies	12	17.06.28
x	A0073	Loop Antenna	HFH2-Z2	100171	Rohde & Schwarz	12	17.11.01
x	A0043	Biconical Antenna	BBA9106	V5(91032598)	Schwarzbeck	12	17.11.13
x	A0046	Log periodic Antenna	UHALP9108A1	0830	Schwarzbeck	12	17.11.13
x	CS0039	4th Site RE Cable SYS3	-	-	EMC/RF Test Lab.	12	17.11.19
x	CS0054	4th Site EMF Cable SYS	-	-	SKZ Lab.	12	17.11.19
x	M0706	3dB Attenuator	8491A	MY39267782	Keysight Technologies	12	17.11.19
x	M0510	RF Selector	NS4900	0802-226	TOYO Corp.	12	17.11.19
x	M0620	RF Pre-Amp	8447D	2944A10720	Keysight Technologies	12	17.11.19
x	M0688	Thermo Meter	AD-5640A	201302	A&D	12	17.10.16

About calibration interval

Valid until the end of the month listed in "Cal. Int." column.