




System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	4/19/2006 9:58:44 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	850
Device Under Test:	Sony Electronics	Relative Permittivity:	56.12
Relative Humidity:	30%	Conductivity:	0.982
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	6.00 mm
DUT Position:	pouch back towards phantom	Max SAR Y-axis Location:	1.00 mm
Antenna Configuration:	closed position	Max E Field:	19.71 V/m
Test Frequency:	836.6MHz	SAR 1g:	0.438 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.248 W/kg
Conversion Factors:	.384 / .384 / .384	SAR Start:	0.093 W/kg
Type of Modulation:		SAR End:	0.090 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-3.61 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	4/19/2006
Input Power Level:	max 2 timeslots TX	Extrapolation:	poly4

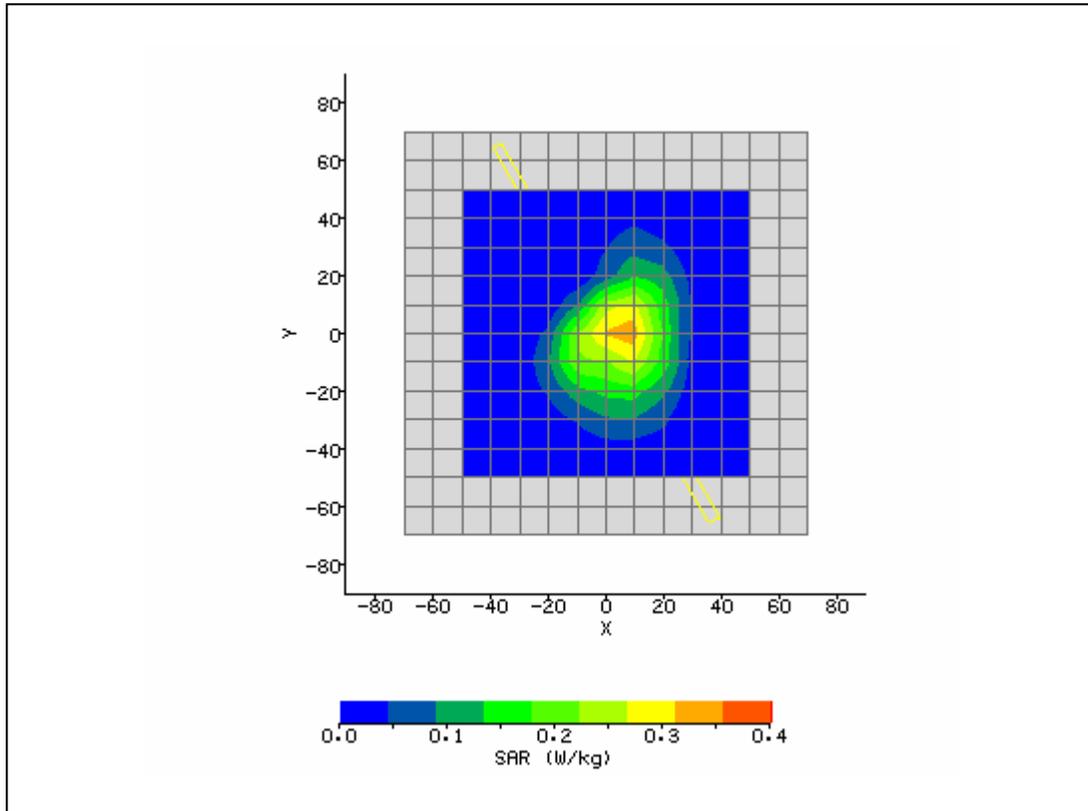


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	4/19/2006 11:39:41 AM	DUT Battery Model/No:	
Filename:	190pos3_3d.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	850
Device Under Test:	Sony Electronics	Relative Permittivity:	56.12
Relative Humidity:	30%	Conductivity:	0.982
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	20.00 mm
DUT Position:	pouch back towards phantom	Max SAR Y-axis Location:	-5.00 mm
Antenna Configuration:	extended	Max E Field:	25.48 V/m
Test Frequency:	836.6MHz	SAR 1g:	0.772 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.479 W/kg
Conversion Factors:	.384 / .384 / .384	SAR Start:	0.149 W/kg
Type of Modulation:		SAR End:	0.151 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	1.89 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	4/19/2006
Input Power Level:	max 2 timeslots TX	Extrapolation:	poly4

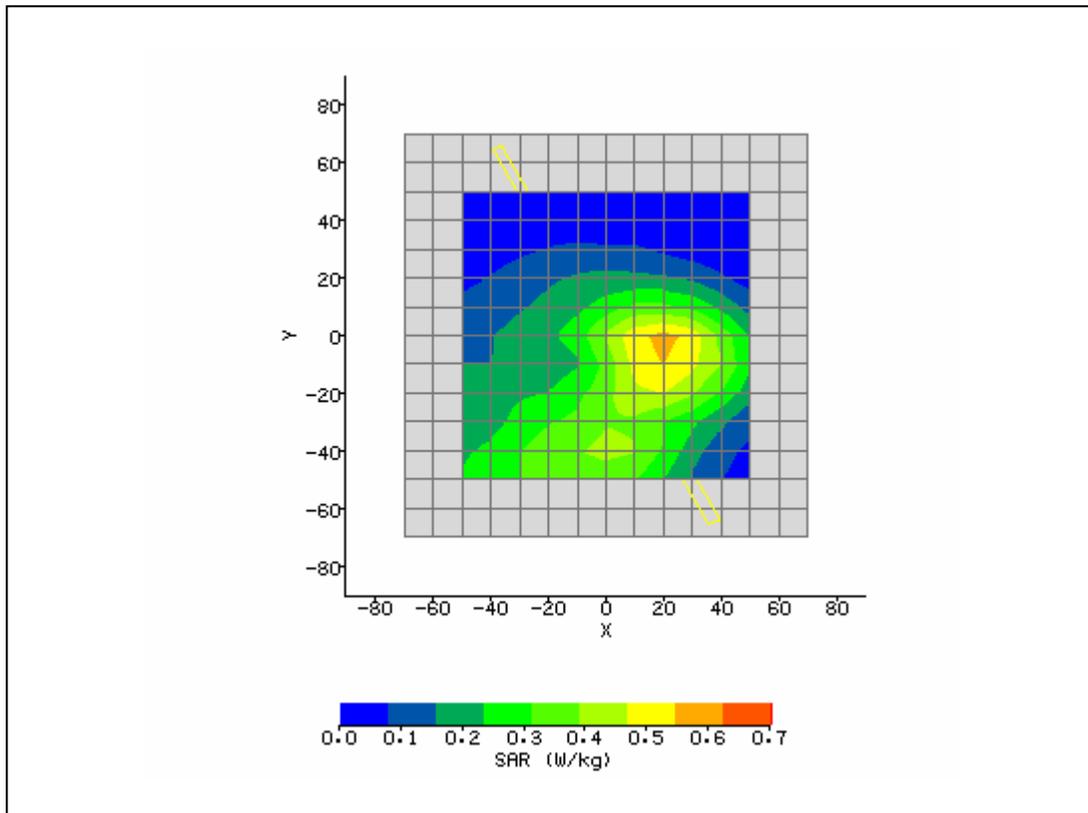


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	4/19/2006 11:10:43 AM	DUT Battery Model/No:	
Filename:	190pos2_3d.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	850
Device Under Test:	Sony Electronics	Relative Permittivity:	56.12
Relative Humidity:	30%	Conductivity:	0.982
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-30.00 mm
DUT Position:	pouch back towards phantom	Max SAR Y-axis Location:	-5.00 mm
Antenna Configuration:	45 degree	Max E Field:	29.70 V/m
Test Frequency:	836.6MHz	SAR 1g:	1.039 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.673 W/kg
Conversion Factors:	.384 / .384 / .384	SAR Start:	0.217 W/kg
Type of Modulation:		SAR End:	0.225 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	3.82 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	4/19/2006
Input Power Level:	max 2 timeslots TX	Extrapolation:	poly4

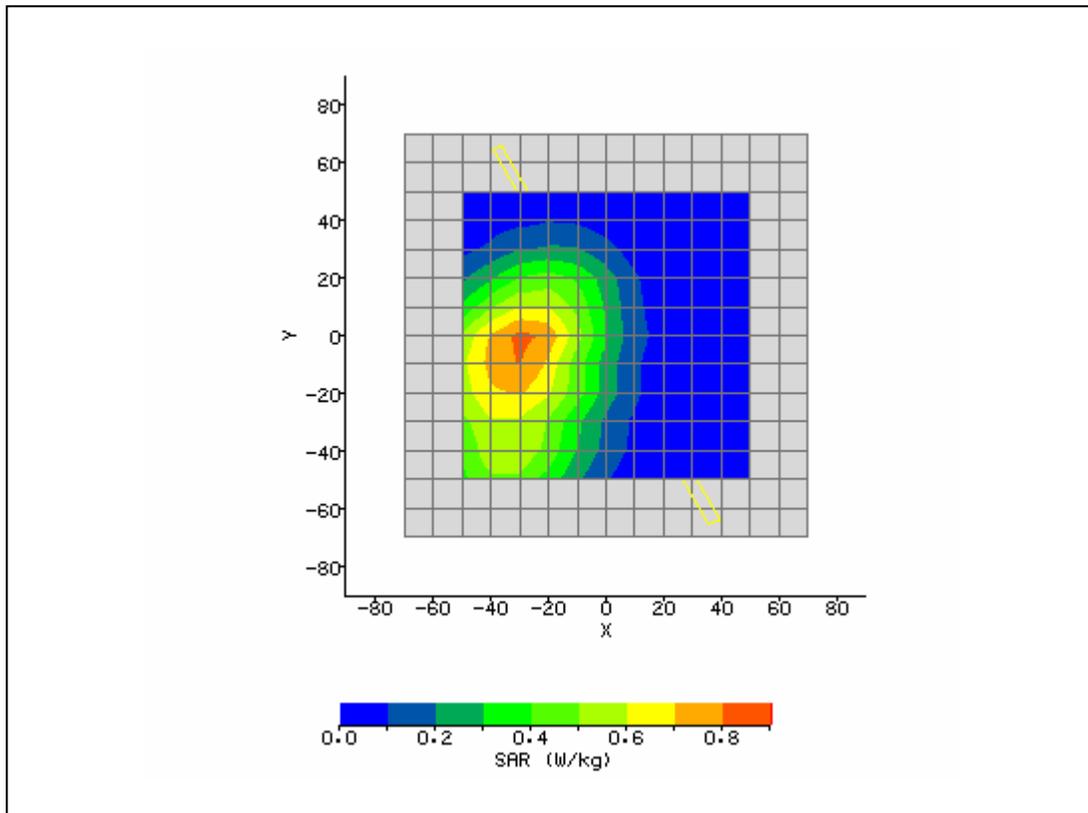


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	4/19/2006 12:13:07 PM	DUT Battery Model/No:	
Filename:	190pos3_3d.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	850
Device Under Test:	Sony Electronics	Relative Permittivity:	56.55
Relative Humidity:	30%	Conductivity:	0.979
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-10.00 mm
DUT Position:	pouch back towards phantom	Max SAR Y-axis Location:	-1.00 mm
Antenna Configuration:	45 degree	Max E Field:	27.06 V/m
Test Frequency:	824.2MHz	SAR 1g:	0.893 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.578 W/kg
Conversion Factors:	.384 / .384 / .384	SAR Start:	0.183 W/kg
Type of Modulation:		SAR End:	0.192 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	4.74 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	4/19/2006
Input Power Level:	max 2 timeslots TX	Extrapolation:	poly4

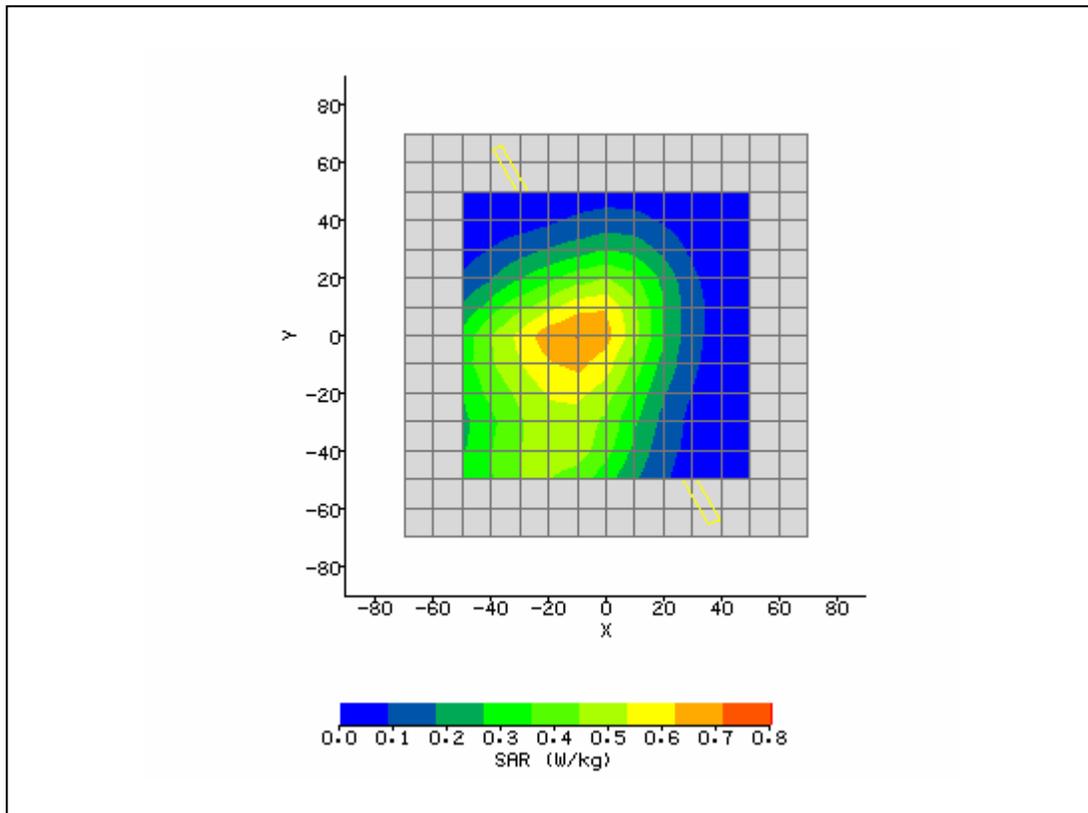


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	4/19/2006 1:20:07 PM	DUT Battery Model/No:	
Filename:	128pos3_3d.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	850
Device Under Test:	Sony Electronics	Relative Permittivity:	55.87
Relative Humidity:	30%	Conductivity:	0.987
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-10.00 mm
DUT Position:	pouch back towards phantom	Max SAR Y-axis Location:	-3.00 mm
Antenna Configuration:	45 degree	Max E Field:	26.38 V/m
Test Frequency:	848.8MHz	SAR 1g:	0.897 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.549 W/kg
Conversion Factors:	.384 / .384 / .384	SAR Start:	0.161 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	4.74 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	4/19/2006
Input Power Level:	max 2 timeslots TX	Extrapolation:	poly4

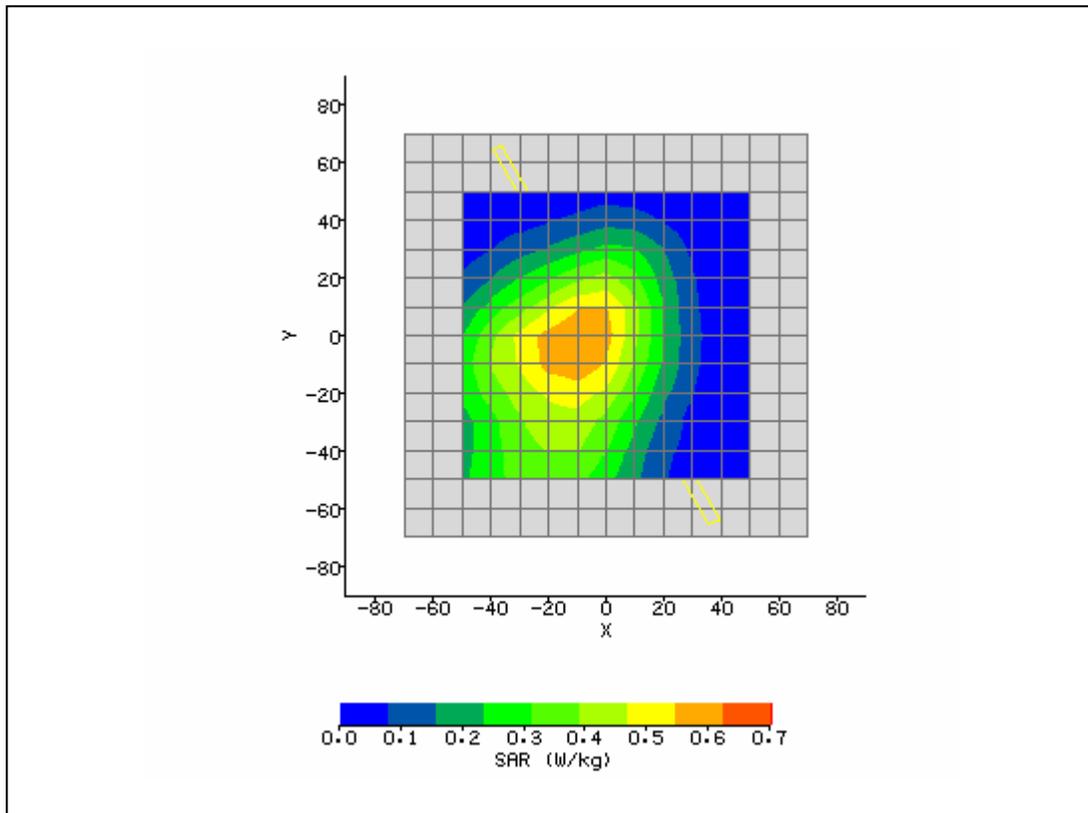


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	4/19/2006 2:06:26 PM	DUT Battery Model/No:	
Filename:	190pos3_3d.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	850
Device Under Test:	Sony Electronics	Relative Permittivity:	56.12
Relative Humidity:	30%	Conductivity:	0.982
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	6.00 mm
DUT Position:	pouch back towards phantom	Max SAR Y-axis Location:	-4.00 mm
Antenna Configuration:	45 degree	Max E Field:	28.53 V/m
Test Frequency:	836.6MHz & BT 2441	SAR 1g:	0.998 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.662 W/kg
Conversion Factors:	.384 / .384 / .384	SAR Start:	0.230 W/kg
Type of Modulation:		SAR End:	0.237 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	3.04 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	4/19/2006
Input Power Level:	max 2 timeslots TX	Extrapolation:	poly4

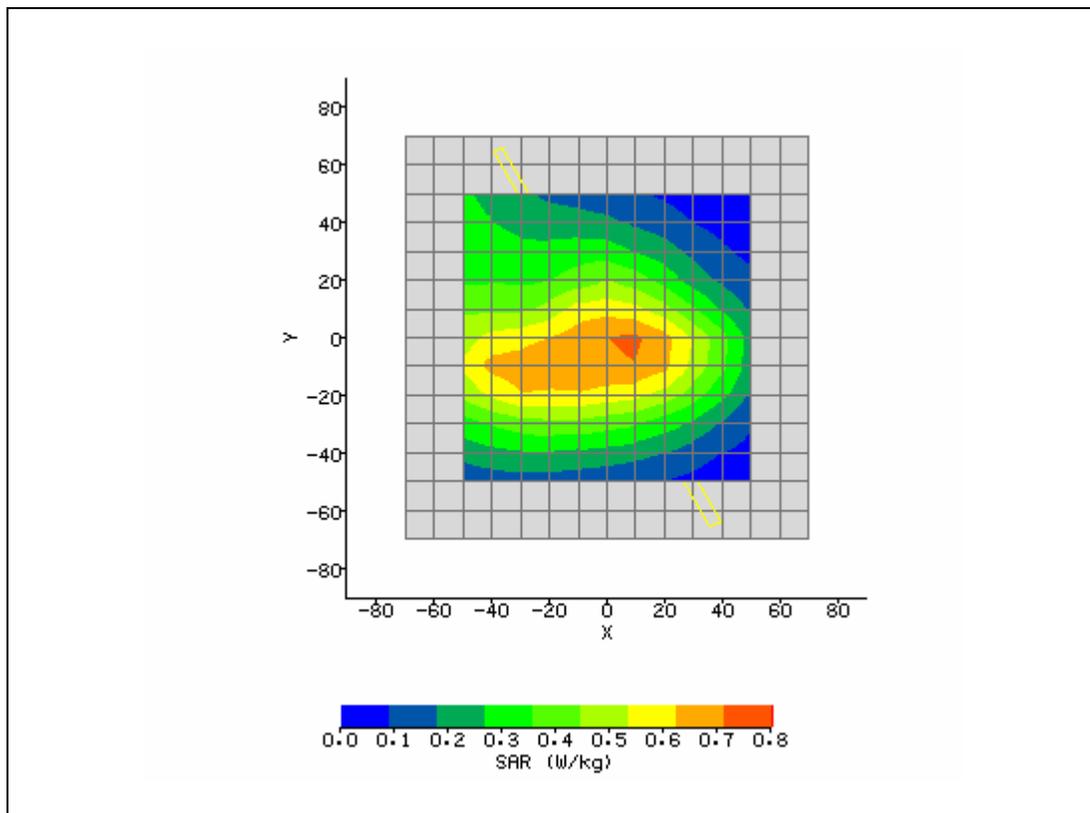


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	4/20/2006 9:52:54 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	1900
Device Under Test:	Sony handheld	Relative Permittivity:	52.78
Relative Humidity:	30%	Conductivity:	1.568
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	8.00 mm
DUT Position:	pouch back towards phantom	Max SAR Y-axis Location:	-5.00 mm
Antenna Configuration:	closed position	Max E Field:	22.22 V/m
Test Frequency:	1880MHz	SAR 1g:	0.979 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.513 W/kg
Conversion Factors:	.473 / .473 / .473	SAR Start:	0.134 W/kg
Type of Modulation:		SAR End:	0.138 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	3.13 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	4/19/2006
Input Power Level:	max 2 timesots TX	Extrapolation:	poly4

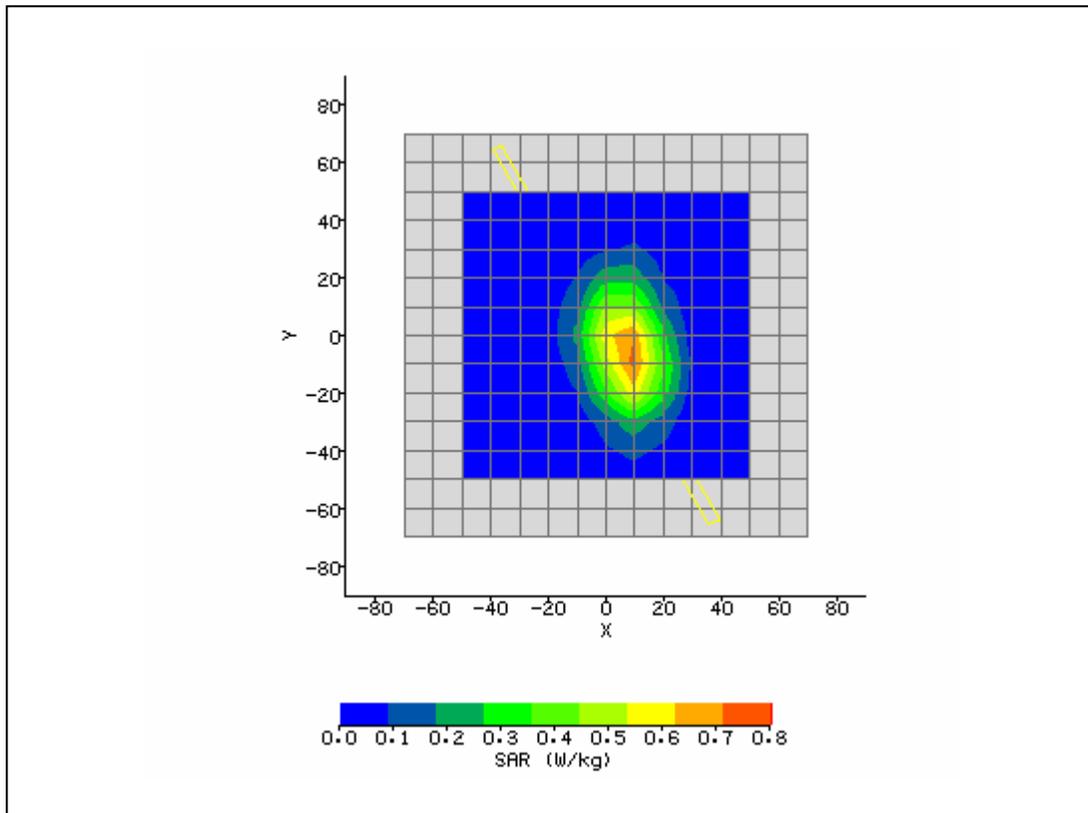


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	4/20/2006 10:16:11 AM	DUT Battery Model/No:	
Filename:	661pos1_3d.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	1900
Device Under Test:	Sony handheld	Relative Permittivity:	52.78
Relative Humidity:	30%	Conductivity:	1.568
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	29.00 mm
DUT Position:	pouch back towards phantom	Max SAR Y-axis Location:	-4.00 mm
Antenna Configuration:	extended	Max E Field:	14.99 V/m
Test Frequency:	1880MHz	SAR 1g:	0.459 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.240 W/kg
Conversion Factors:	.473 / .473 / .473	SAR Start:	0.047 W/kg
Type of Modulation:		SAR End:	0.049 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	3.06 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	4/19/2006
Input Power Level:	max 2 timesots TX	Extrapolation:	poly4

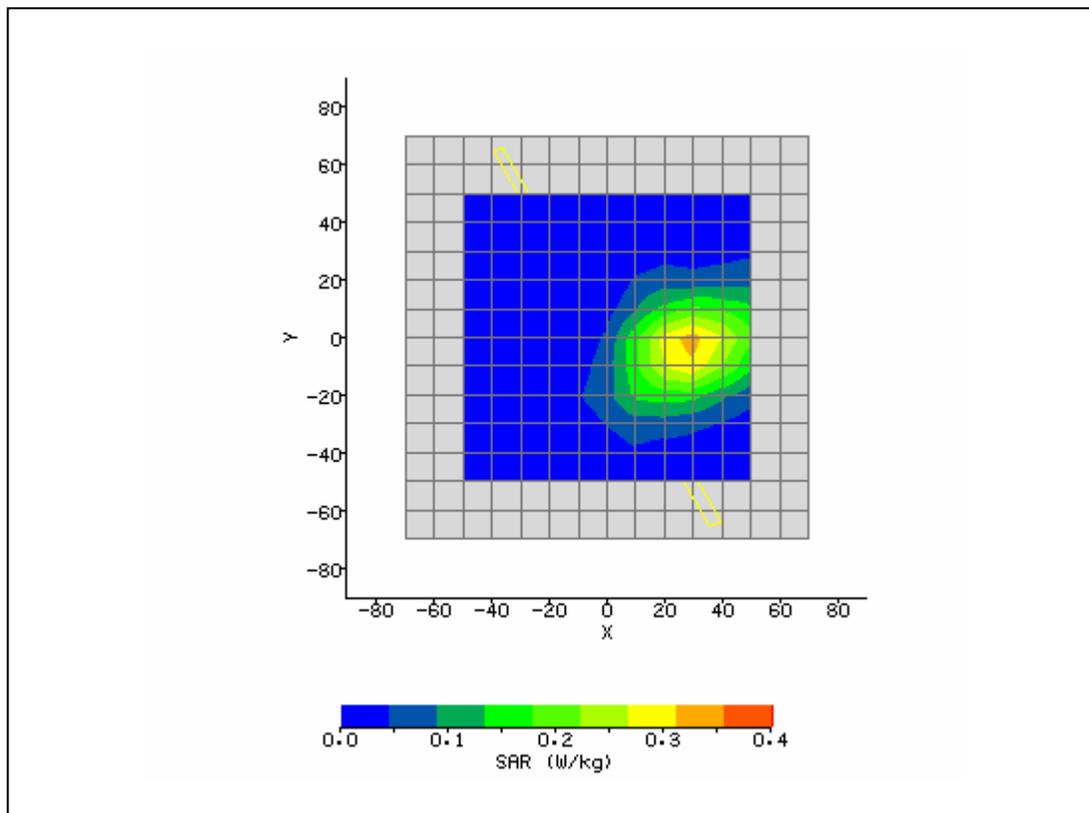


System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	4/20/2006 10:34:30 AM	DUT Battery Model/No:	
Filename:	661pos2_3d.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	1900
Device Under Test:	Sony handheld	Relative Permittivity:	52.78
Relative Humidity:	30%	Conductivity:	1.568
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	12.00 mm
DUT Position:	pouch back towards phantom	Max SAR Y-axis Location:	-14.00 mm
Antenna Configuration:	45 degrees	Max E Field:	14.36 V/m
Test Frequency:	1880MHz	SAR 1g:	0.440 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.233 W/kg
Conversion Factors:	.473 / .473 / .473	SAR Start:	0.236 W/kg
Type of Modulation:		SAR End:	0.045 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	1.29 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	4/19/2006
Input Power Level:	max 2 timesots TX	Extrapolation:	poly4

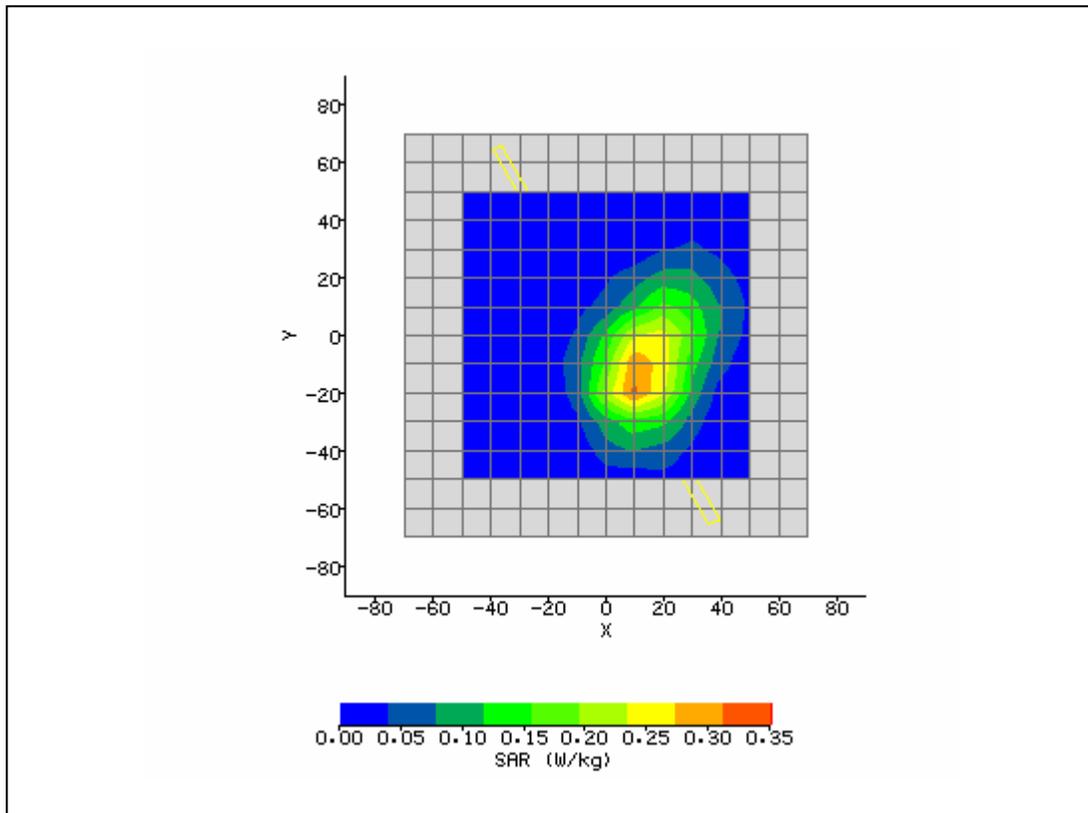

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	4/20/2006 11:01:31 AM	DUT Battery Model/No:	
Filename:	661pos3_3d.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	1900
Device Under Test:	Sony handheld	Relative Permittivity:	53.13
Relative Humidity:	30%	Conductivity:	1.545
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	26.00 mm
DUT Position:	pouch back towards phantom	Max SAR Y-axis Location:	-6.00 mm
Antenna Configuration:	closed position	Max E Field:	22.86 V/m
Test Frequency:	1850.2MHz	SAR 1g:	0.944 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.478 W/kg
Conversion Factors:	.473 / .473 / .473	SAR Start:	0.128 W/kg
Type of Modulation:		SAR End:	0.130 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	1.56 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	4/19/2006
Input Power Level:	max 2 timesots TX	Extrapolation:	poly4

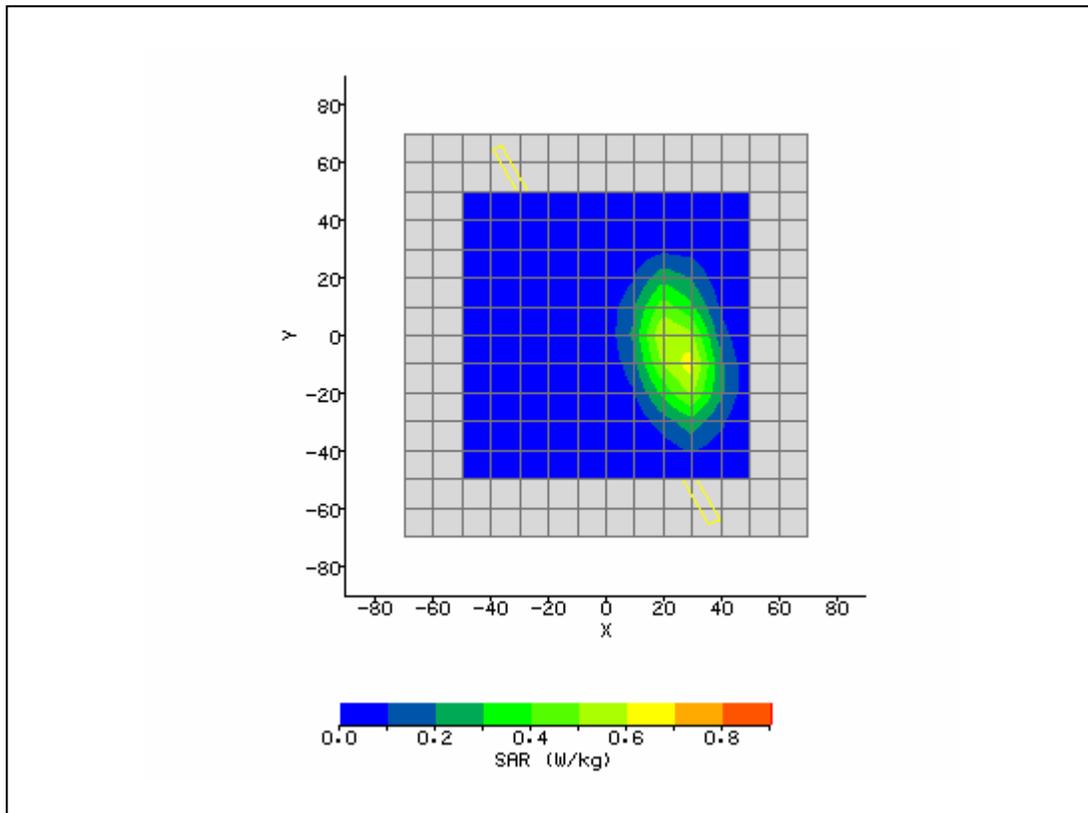

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	4/20/2006 11:19:47 AM	DUT Battery Model/No:	
Filename:	512pos1_3d.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	1900
Device Under Test:	Sony handheld	Relative Permittivity:	52.69
Relative Humidity:	30%	Conductivity:	1.586
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	27.00 mm
DUT Position:	pouch back towards phantom	Max SAR Y-axis Location:	-12.00 mm
Antenna Configuration:	closed position	Max E Field:	19.11 V/m
Test Frequency:	1909.8MHz	SAR 1g:	0.691 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.352 W/kg
Conversion Factors:	.473 / .473 / .473	SAR Start:	0.086 W/kg
Type of Modulation:		SAR End:	0.089 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	3.49 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	4/19/2006
Input Power Level:	max 2 timesots TX	Extrapolation:	poly4

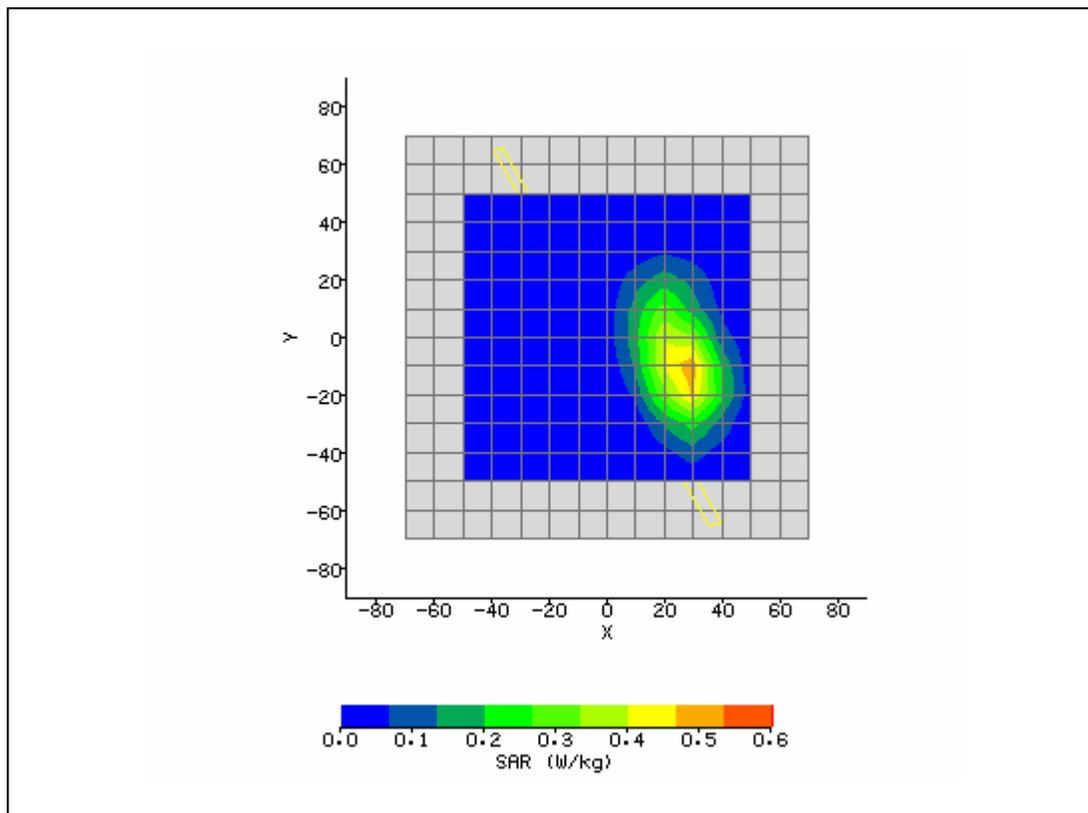

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	4/20/2006 11:19:47 AM	DUT Battery Model/No:	
Filename:	512pos1_3d.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	1900
Device Under Test:	Sony handheld	Relative Permittivity:	52.78
Relative Humidity:	30%	Conductivity:	1.568
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	26.00 mm
DUT Position:	pouch back towards phantom	Max SAR Y-axis Location:	-9.00 mm
Antenna Configuration:	closed position	Max E Field:	22.36 V/m
Test Frequency:	1880MHz & BT 2441	SAR 1g:	0.985 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.519 W/kg
Conversion Factors:	.473 / .473 / .473	SAR Start:	0.136 W/kg
Type of Modulation:		SAR End:	0.136 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.11 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	4/19/2006
Input Power Level:	max 2 timesots TX	Extrapolation:	poly4

