




System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	4/12/2006 8:21:55 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	Sony Electronics	Relative Permittivity:	51.33
Relative Humidity:	30%	Conductivity:	1.948
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	31.00 mm
DUT Position:	In pouch back towards phantom	Max SAR Y-axis Location:	50.00 mm
Antenna Configuration:	integral	Max E Field:	5.04 V/m
Test Frequency:	2412MHz	SAR 1g:	0.027 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.011 W/kg
Conversion Factors:	.490 / .490 / .490	SAR Start:	0.009 W/kg
Type of Modulation:		SAR End:	0.009 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	2.36 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	3/20/2006
Input Power Level:	max	Extrapolation:	poly4

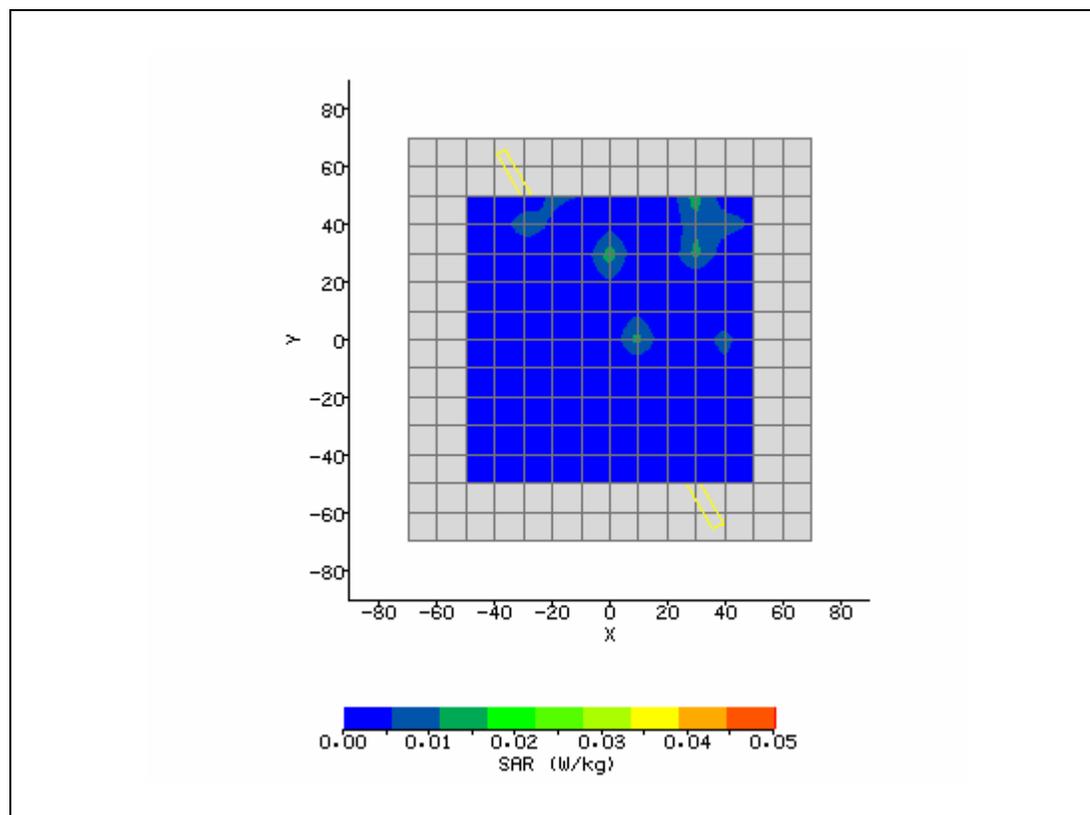

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	4/12/2006 9:27:03 AM	DUT Battery Model/No:	
Filename:	1deg10_3d.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	Sony Electronics	Relative Permittivity:	51.70
Relative Humidity:	30%	Conductivity:	1.959
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-6.00 mm
DUT Position:	In pouch back towards phantom	Max SAR Y-axis Location:	48.00 mm
Antenna Configuration:	integral	Max E Field:	4.17 V/m
Test Frequency:	2437MHz	SAR 1g:	0.015 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.004 W/kg
Conversion Factors:	.490 / .490 / .490	SAR Start:	0.008 W/kg
Type of Modulation:		SAR End:	0.008 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	1.84 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	3/20/2006
Input Power Level:	max	Extrapolation:	poly4

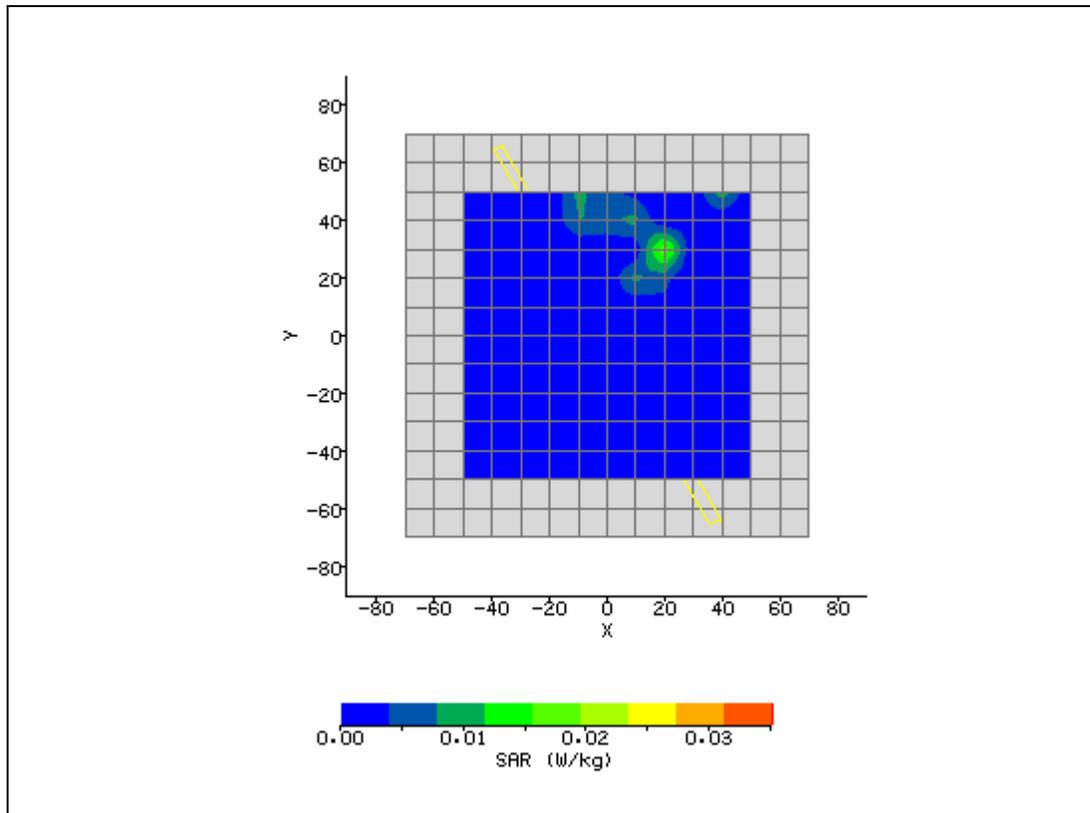

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	4/12/2006 10:38:27 AM	DUT Battery Model/No:	
Filename:	6deg10_3d.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	Sony Electronics	Relative Permittivity:	51.07
Relative Humidity:	30%	Conductivity:	1.96
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	34.00 mm
DUT Position:	In pouch back towards phantom	Max SAR Y-axis Location:	30.00 mm
Antenna Configuration:	integral	Max E Field:	3.71 V/m
Test Frequency:	2462MHz	SAR 1g:	0.024 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.007 W/kg
Conversion Factors:	.490 / .490 / .490	SAR Start:	0.005 W/kg
Type of Modulation:		SAR End:	0.005 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	3.09 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	3/20/2006
Input Power Level:	max	Extrapolation:	poly4

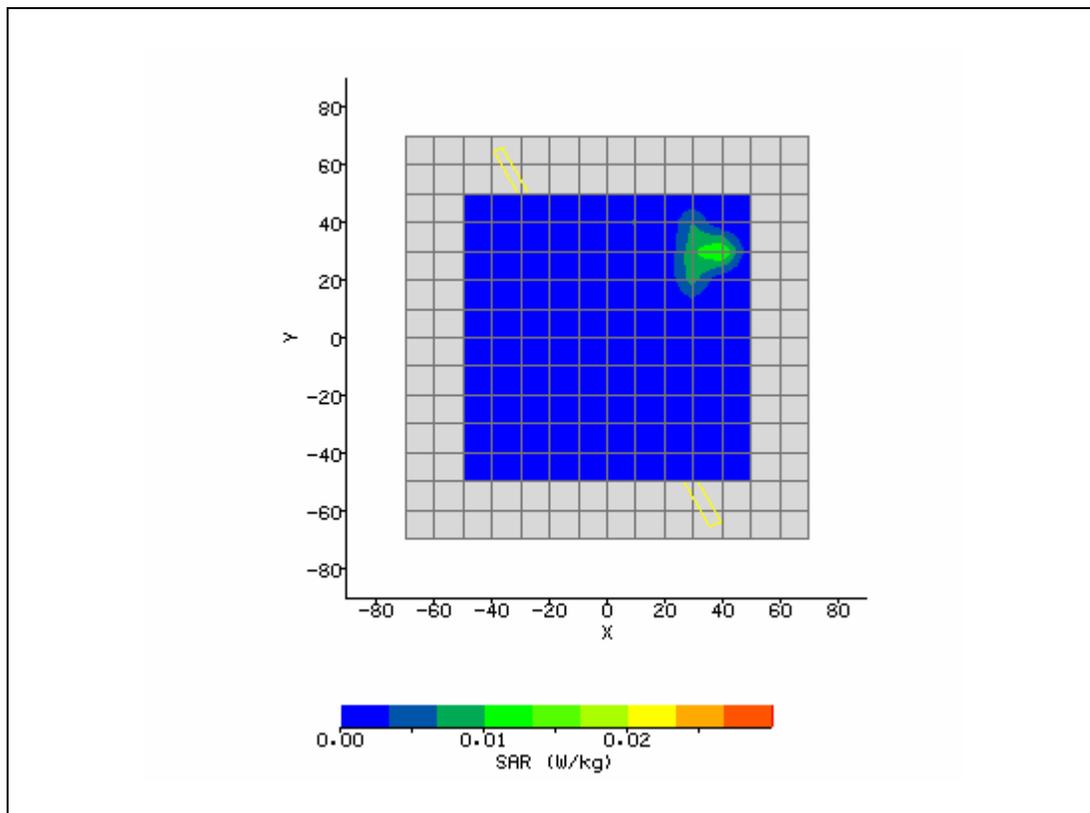

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	4/12/2006 4:41:03 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	Sony Electronics	Relative Permittivity:	51.33
Relative Humidity:	30%	Conductivity:	1.948
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	31.00 mm
DUT Position:	In pouch back towards phantom	Max SAR Y-axis Location:	50.00 mm
Antenna Configuration:	integral	Max E Field:	5.04 V/m
Test Frequency:	2412MHz & BT 2441	SAR 1g:	0.027 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.011 W/kg
Conversion Factors:	.490 / .490 / .490	SAR Start:	0.013W/kg
Type of Modulation:		SAR End:	0.013 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	1.21 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	3/20/2006
Input Power Level:	max	Extrapolation:	poly4

