



Test Report

FCC Part 15.247

Industry Canada RSS210

DTS Devices Operating in range 2400-2483.5MHz

Model #: PCG-1P1L

**SONY Corporation
1-7-1 Konan, Minato-ku,
Tokyo, 108-0075
Japan**

**FCC ID: AK8PCG1P1L
IC ID: 409B-PCG1P1L**

**TEST REPORT #: EMC_SONYE_025_08001_15_247_PCG1P1L
DATE: 2008-10-24**



**Bluetooth Qualification
Test Facility
(BQTF)**



**FCC listed:
A2LA
accredited**

**IC recognized #
3462B**

CETECOM Inc.

411 Dixon Landing Road • Milpitas, CA 95035 • U.S.A.

Phone: + 1 (408) 586 6200 • Fax: + 1 (408) 586 6299 • E-mail: info@cetecomusa.com • <http://www.cetecom.com>

CETECOM Inc. is a Delaware Corporation with Corporation number: 2113686

Board of Directors: Dr. Harald Ansorge, Dr. Klaus Matkey, Hans Peter May

1	ASSESSMENT	4
2	ADMINISTRATIVE DATA	5
2.1	Identification of the Testing Laboratory Issuing the EMC Test Report	5
2.2	Identification of the Client	5
2.3	Identification of the Manufacturer	5
3	EQUIPMENT UNDER TEST (EUT)	6
3.1	Specification of the Equipment under Test	6
3.2	Identification of the Equipment under Test (EUT)	7
3.3	Identification of Accessory equipment	7
4	SUBJECT OF INVESTIGATION	7
5	RADIATED MEASUREMENTS	8
5.1	Maximum Peak Output Power § 15.247 (b)(1) (Radiated)	8
5.1.1	Limits	8
5.1.2	Results:	8
5.2	Restricted Band Edge Compliance §15.247/15.205	9
5.2.1	Limits	9
5.2.2	Sub-band 1 802.11b MODE	10
5.2.3	Sub-band 1 802.11g MODE	14
5.2.4	Sub-band 1 802.11n HT20 MODE	18
5.2.5	Sub-band 1 802.11n HT40 MODE	22
5.3	Transmitter Spurious Emission § 15.247/15.205/15.209	26
5.3.1	Limits	26
5.3.2	RESULTS Sub-band 1 802.11b/g MODE	27
5.3.3	RESULTS Sub-band 1 802.11n HT20 MODE	36
5.3.4	RESULTS Sub-band 1 802.11n HT40 MODE	45
5.4	Receiver Spurious Emission § 15.209/RSS210	54
5.4.1	Limits	54
5.4.2	RESULTS Chain AB	55
6	CONDUCTED MEASUREMENTS	60
6.1	6dB bandwidth and 99% bandwidth.	60
6.1.1	Limit	60
6.1.2	Measurement Result:	60

6.2	Conducted Power Measurement	61
6.2.1	Limit	61
6.2.2	Results	61
6.3	Power Spectral Density	61
6.3.1	Limit	61
6.3.2	Results	61
6.4	Conducted Spurious Emission	62
6.4.1	Limit	62
6.4.2	Results:	62
6.5	AC POWER LINE CONDUCTED EMISSIONS § 15.107/207	63
6.5.1	LIMITS	63
6.5.2	RESULTS Sub-band 1 802.11g Line:	64
6.5.3	RESULTS Sub-band 1 802.11g Neutral:	66
6.5.4	RESULTS Sub-band 1 802.11n HT40 Line:	68
6.5.5	RESULTS Sub-band 1 802.11n HT40 Neutral:	70
6.5.6	RESULTS Receiver mode Line:	72
6.5.7	RESULTS Receiver mode Neutral:	74
7	TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS	76
8	BLOCK DIAGRAMS	77
9	REVISION HISTORY	78



1 Assessment

The following is in compliance with the applicable criteria specified in FCC rules Part 15.247 of the Code of Federal Regulations.

Company	Description	Model #
SONY Corporation	Notebook PC	PCG-1P1L

This report is reviewed by:

Lothar Schmidt
 (Director Regulatory and
 Antenna Services)

2008-10-24 EMC & Radio

Date	Section	Name	Signature
------	---------	------	-----------

This report is prepared by:

Peter Mu
 (EMC Project Engineer)

2008-10-24 EMC & Radio

Date	Section	Name	Signature
------	---------	------	-----------

The test results of this test report relate exclusively to the test item specified in Identification of the Equipment under Test. The CETECOM Inc. USA does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM Inc USA.

2 Administrative Data**2.1 Identification of the Testing Laboratory Issuing the EMC Test Report**

Company Name:	CETECOM Inc.
Department:	EMC
Address:	411 Dixon Landing Road Milpitas, CA 95035 U.S.A.
Telephone:	+1 (408) 586 6200
Fax:	+1 (408) 586 6299
Responsible Test Lab Manager:	Lothar Schmidt
Responsible Project Leader:	Peter Mu
Date of test:	2008-10-17 to 2008-10-22

2.2 Identification of the Client

APPLICANT	
Applicant (Company Name)	SONY Corporation
Street Address	1-7-1 Konan, Minato-ku,
City/Zip Code	Tokyo, 108-0075
Country	Japan
Contact Person	Michio Kobayashi
Telephone	+81-263-72-5696
Fax	+81-263-72-9755
e-mail	<u>Michio.Kobayashi@jp.sony.com</u>

2.3 Identification of the Manufacturer

MANUFACTURER (If different from Applicant)	
Applicant (Firm Name):	Sony EMCS Corporation
Contact Person:	Michio Kobayashi
Telephone:	+81-263-72-5696
Fax:	+81-263-72-9755
Address Line 1:	5432 Toyoshima,
City:	Azumino-shi, Nagano
Postal Code:	399-8282,
Country:	Japan
e-mail:	<u>Michio.Kobayashi@jp.sony.com</u>

3 Equipment under Test (EUT)

3.1 Specification of the Equipment under Test

EUT	
Marketing Name of EUT (if not same as Model No.):	PCG-1P1L
Description:	Notebook PC
Model No:	PCG-1P1L
FCC ID:	AK8PCG1P1L
IC ID:	409B-PCG1P1L

Frequency Range:	2400-2483.5MHz Channel 1, 6, 11 for 802.11b/g and 802.11n HT20 mode Channel 2, 6, 10 for 802.11n HT40 mode
Type(s) of Modulation:	OFDM
Antenna Type:	Monopole Peak Gain 2400-2483.5MHz: 2.90dBi.
Max Output Power:	Sub-band 1, 2400-2483.5MHz 802.11b: Radiated: 25.68dBm (370mW) EIRP Conducted: 22.78dBm (190mW) Sub-band 1, 2400-2483.5MHz 802.11g: Radiated: 28.87dBm (771mW) EIRP Conducted: 25.97dBm (395mW) Sub-band 1, 2400-2483.5MHz 802.11n HT20: Radiated: 28.15dBm (653mW) EIRP Conducted: 25.25dBm (335mW) Sub-band 1, 2400-2483.5MHz 802.11n HT40: Radiated: 28.96dBm (787mW) EIRP Conducted: 26.06dBm (404mW)

3.2 Identification of the Equipment under Test (EUT)

EUT #	TYPE	MANF.	MODEL	SERIAL #
1	EUT	SONY Corporation	PCG-1P1L	FCC1

3.3 Identification of Accessory equipment

AE #	TYPE	MANF.	MODEL	SERIAL #
1	AC/DC ADAPTER	SONY Corporation	VGP-AC20V2	0000241

4 Subject Of Investigation

All testing was performed on the product referred to in Section 3 as EUT. EUT operates in the band 2400-2483.5MHz in legacy 802.11b/g and 802,11n mode.

The objective of the measurements done by Cetecom Inc. was to measure the performance of the EUT operating under all operating modes as specified by Sony per requirements listed in FCC rules Part 15.247 of Title 47 of the Code of Federal Regulations. The maximization of portable equipment is conducted in accordance with ANSI C63.4

5 Radiated Measurements

5.1 Maximum Peak Output Power § 15.247 (b)(1) (Radiated)

5.1.1 Limits

FCC15.247 (b) (1): 4W (36dBm), with antenna gain < 6dBi.

RSS-210 A8.4 (4): 4W (36dBm)

EIRP is calculated as $EIRP = \text{Conducted Peak Power (dBm)} + \text{Peak Antenna Gain (dBi)}$

5.1.2 Results:

EIRP 802.11 a/b/g Mode:

TEST CONDITIONS $T_{nom}(23)^{\circ}C, V_{nom}VDC$	Channel Frequency	EIRP (dBm)	EIRP (mW)	Verdict
Sub-band 1: 2400-2483.5MHz (802.11b)	2412	22.97	198.15	PASS
	2437	25.68	369.83	PASS
	2462	20.90	123.03	PASS
Sub-band 1: 2400-2483.5MHz (802.11g)	2412	24.90	309.03	PASS
	2437	28.87	770.90	PASS
	2462	22.62	182.81	PASS

EIRP 802.11n HT20 MODE:

TEST CONDITIONS $T_{nom}(23)^{\circ}C, V_{nom}VDC$	Channel Frequency	EIRP (dBm)	EIRP (mW)	Verdict
Sub-band 1: 2400-2483.5MHz	2412	23.40	218.78	PASS
	2437	28.15	653.13	PASS
	2462	22.49	177.42	PASS

EIRP 802.11n HT40 MODE:

TEST CONDITIONS $T_{nom}(23)^{\circ}C, V_{nom}VDC$	Channel Frequency	EIRP (dBm)	EIRP (mW)	Margin (mW)
Sub-band 1: 2400-2483.5MHz	2422	22.32	170.61	PASS
	2437	28.96	787.05	PASS
	2452	22.44	175.39	PASS

5.2 Restricted Band Edge Compliance §15.247/15.205

5.2.1 Limits

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

***PEAK LIMIT= 74dBuV/m**

***AVG. LIMIT= 54dBuV/m**

Notes:

1. Radiated emissions are maximized by rotating the EUT 360° at 0.5 meter height increments between 1 and 4 meters.
2. Measurements were performed with the EUT in X, Y and Z orientations with the measurement antenna in both horizontal and vertical polarity. The plots below show the results of the worst case orientation and polarity.


5.2.2 Sub-band 1 802.11b MODE

Lower band edge PEAK

EUT: IRX-4300-FCC1
 Customer:: Sony Electronics
 Test Mode: 802.11b; Ch 1
 ANT Orientation: H
 EUT Orientation: H
 Test Engineer: Chris
 Voltage: AC
 Comments:

SWEEP TABLE: "FCC15.247 LBE_PK"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
2.3 GHz	2.4 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

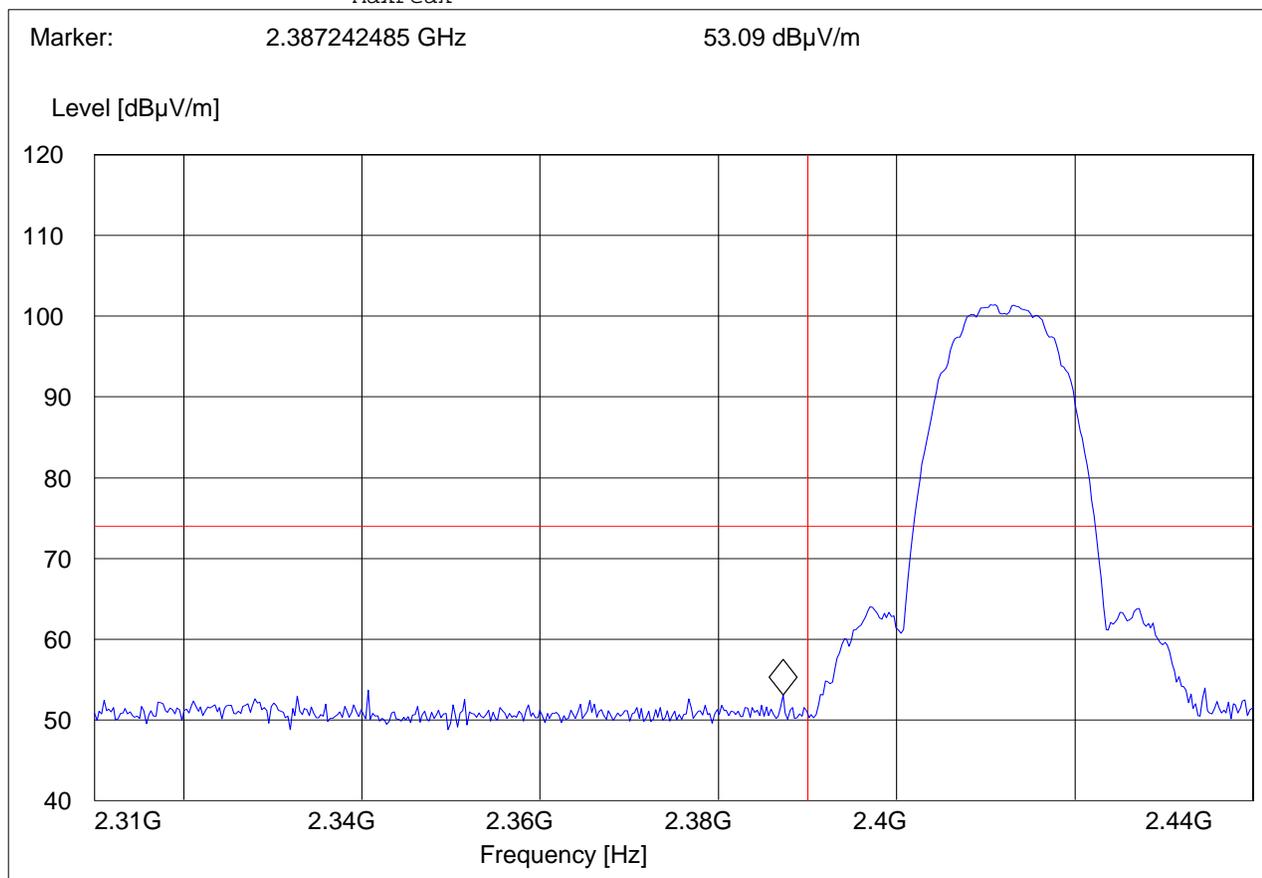


Lower band edge Average

EUT: IRX-4300-FCC1
Customer:: Sony Electronics
Test Mode: 802.11b; Ch 1
ANT Orientation: H
EUT Orientation: H
Test Engineer: Chris
Voltage: AC
Comments:

SWEEP TABLE: "FCC15.247 LBE_AVG"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
2.3 GHz	2.4 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

Marker: 2.389799599 GHz 40.78 dB μ V/m

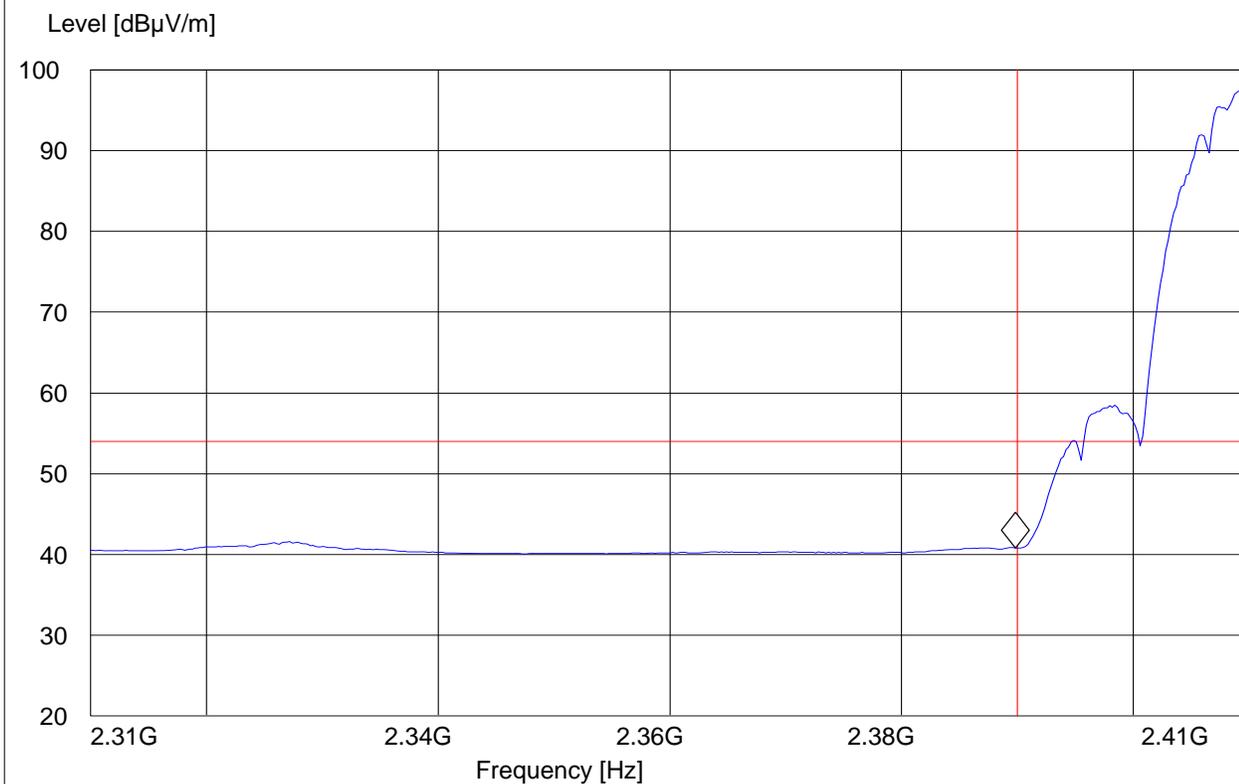


High band edge PEAK

EUT: IRX-4300-FCC1
Customer:: Sony Electronics
Test Mode: 802.11b; Ch 11
ANT Orientation: H
EUT Orientation: H
Test Engineer: Chris
Voltage: AC
Comments:

SWEEP TABLE: "FCC15.247 HBE_PK"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
2.5 GHz	2.5 GHz	MaxPeak MaxPeak	Coupled	1 MHz	#326horn_AF_vert

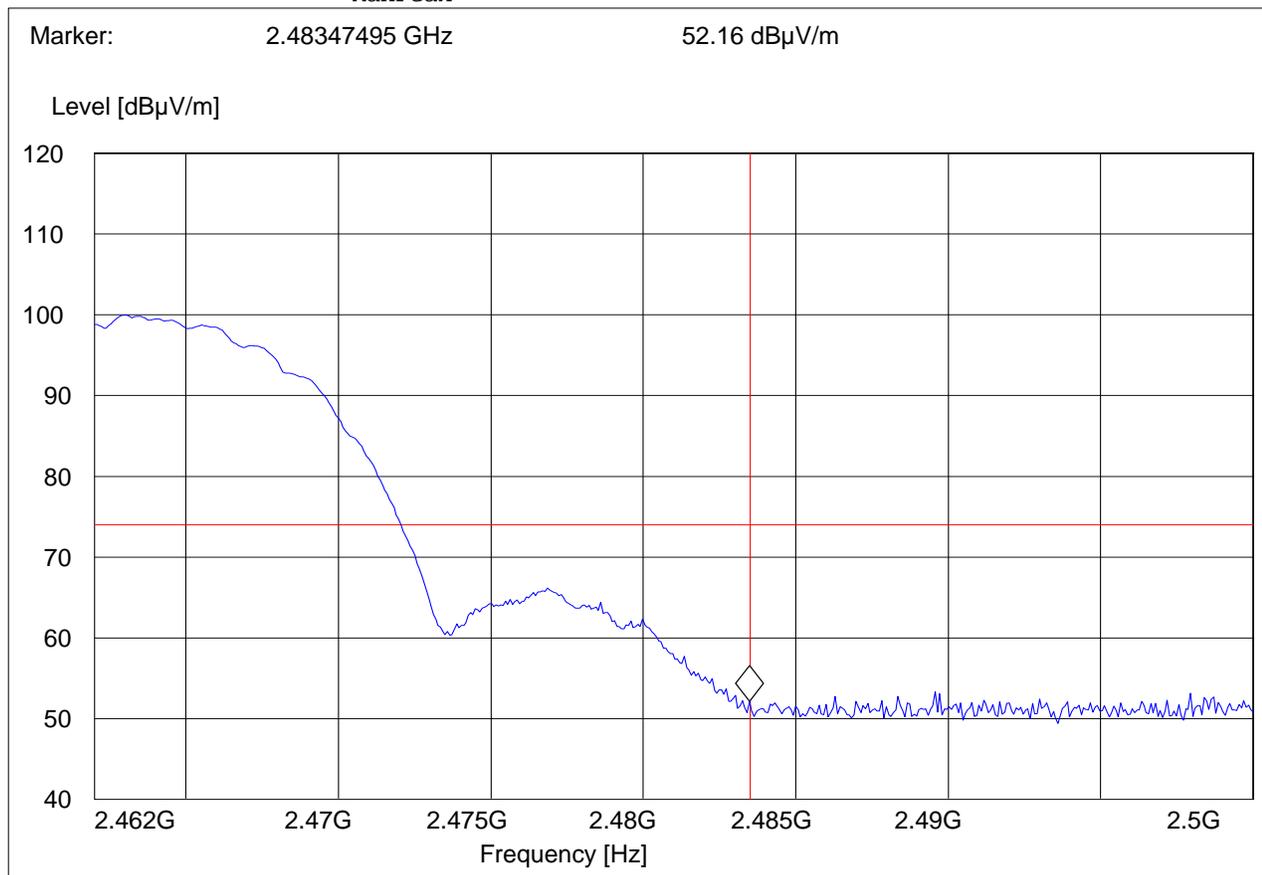


High band edge Average

EUT: IRX-4300-FCC1
Customer:: Sony Electronics
Test Mode: 802.11b; Ch 11
ANT Orientation: H
EUT Orientation: H
Test Engineer: Chris
Voltage: AC
Comments:

SWEEP TABLE: "FCC15.247 HBE_AVG"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
2.5 GHz	2.5 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_horz

Marker: 2.483450902 GHz 41.11 dB μ V/m

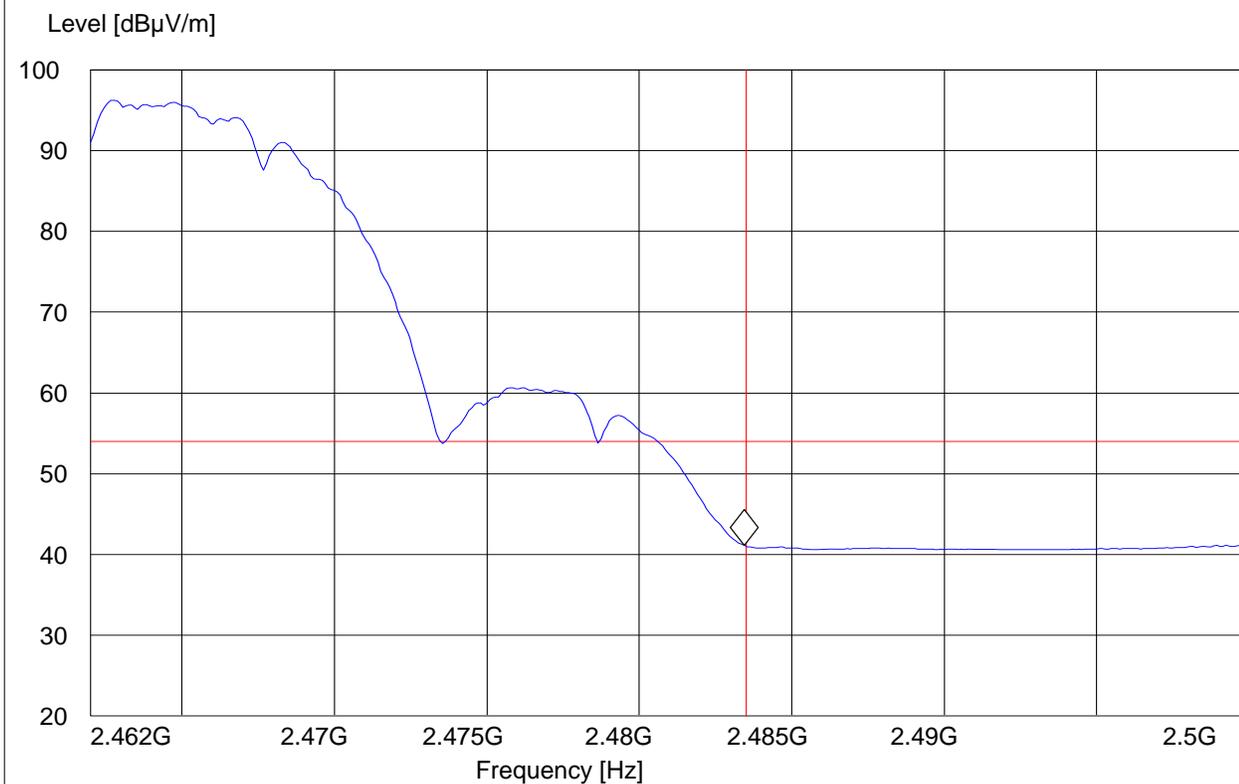


5.2.3 Sub-band 1 802.11g MODE

Lower band edge PEAK

EUT: IRX-4300-FCC1
Customer:: Sony Electronics
Test Mode: 802.11g; Ch 1
ANT Orientation: H
EUT Orientation: H
Test Engineer: Chris
Voltage: AC
Comments:

SWEEP TABLE: "FCC15.247 LBE_PK"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
2.3 GHz	2.4 GHz	MaxPeak MaxPeak	Coupled	1 MHz	#326horn_AF_vert

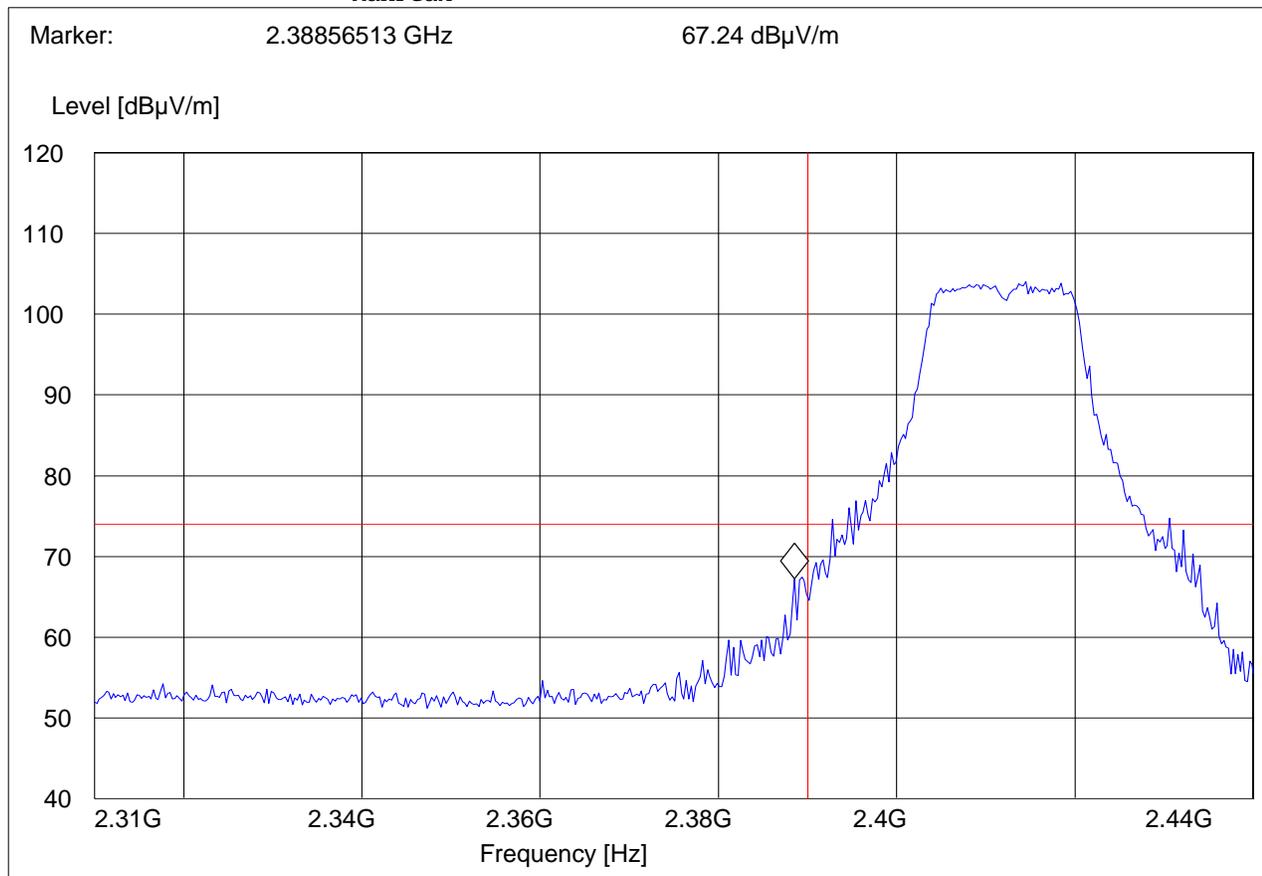


Lower band edge Average

EUT: IRX-4300-FCC1
Customer:: Sony Electronics
Test Mode: 802.11g; Ch 1
ANT Orientation: H
EUT Orientation: H
Test Engineer: Chris
Voltage: AC
Comments:

SWEEP TABLE: "FCC15.247 LBE_AVG"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
2.3 GHz	2.4 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

Marker: 2.389799599 GHz 47.69 dB μ V/m

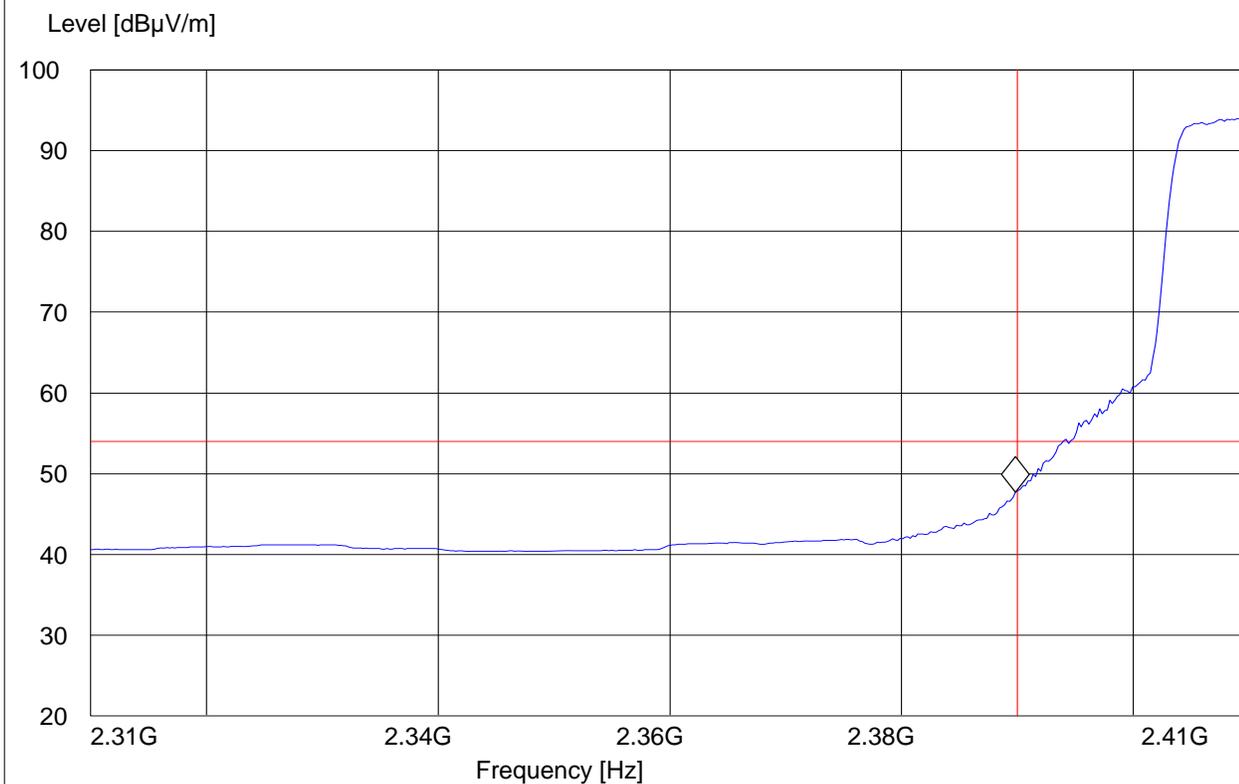


High band edge PEAK

EUT: IRX-4300-FCC1
 Customer:: Sony Electronics
 Test Mode: 802.11g; Ch 11
 ANT Orientation: H
 EUT Orientation: H
 Test Engineer: Chris
 Voltage: AC
 Comments:

SWEEP TABLE: "FCC15.247 HBE_PK"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
2.5 GHz	2.5 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert
		MaxPeak			

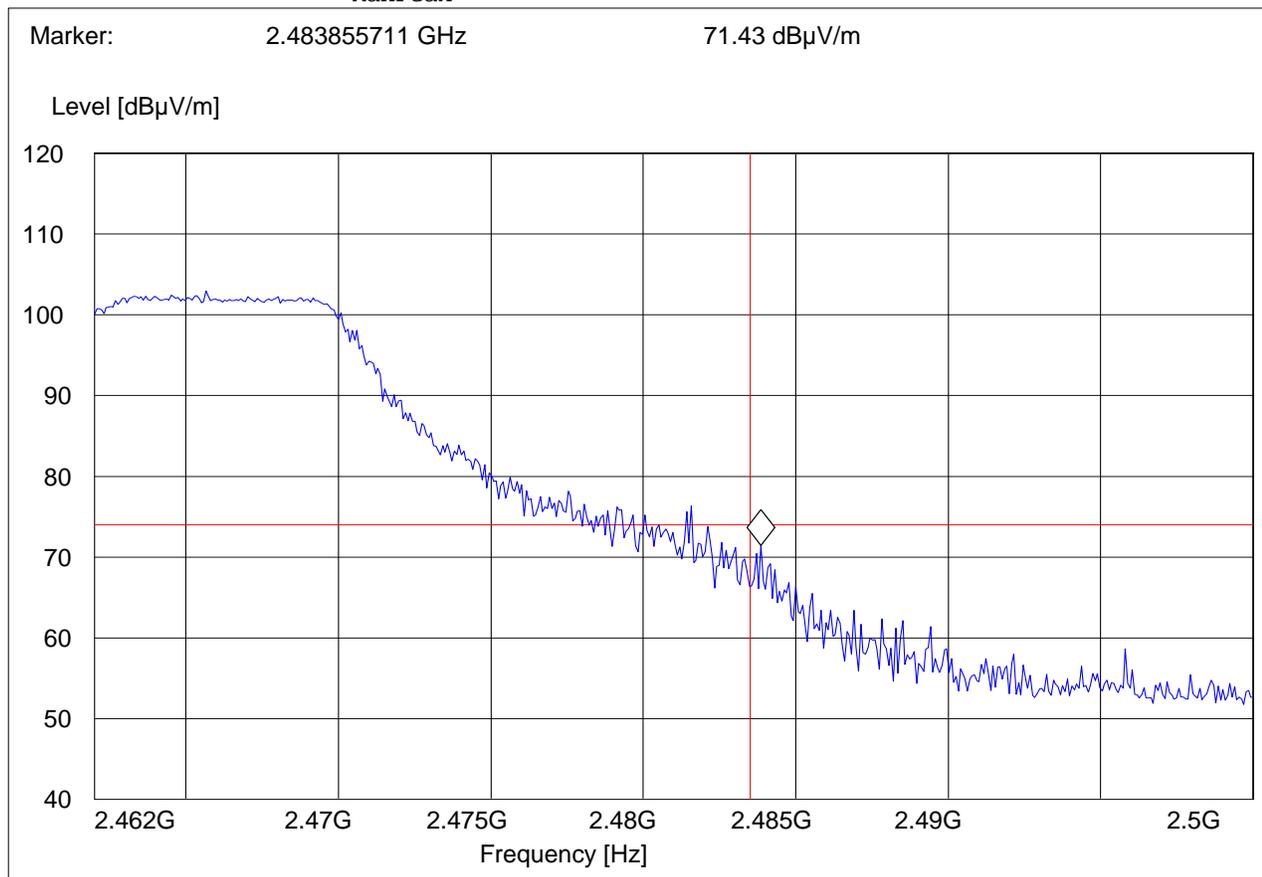


High band edge Average

EUT: IRX-4300-FCC1
Customer:: Sony Electronics
Test Mode: 802.11g; Ch 11
ANT Orientation: H
EUT Orientation: H
Test Engineer: Chris
Voltage: AC
Comments:

SWEEP TABLE: "FCC15.247 HBE_AVG"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
2.5 GHz	2.5 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_horz

Marker: 2.483547094 GHz 49.92 dB μ V/m

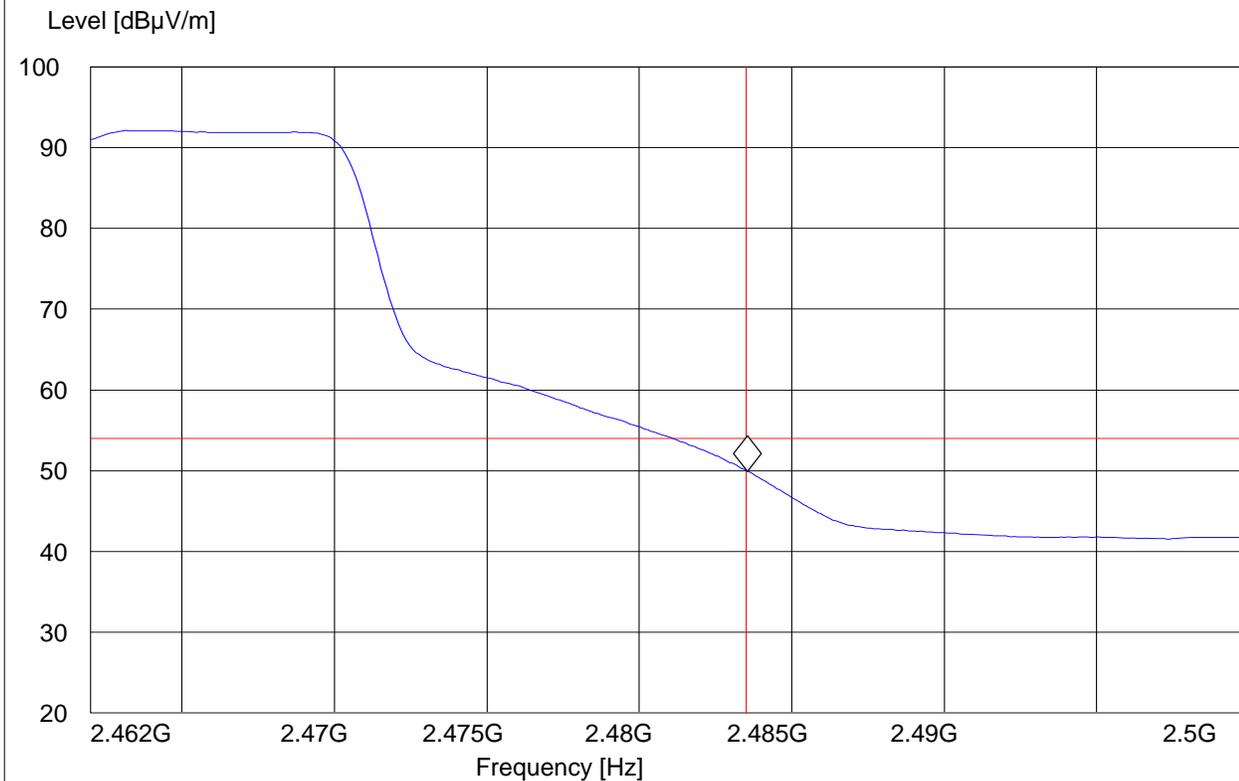


5.2.4 Sub-band 1 802.11n HT20 MODE

Lower band edge PEAK

EUT: IRX-4300-FCC1
Customer:: Sony Electronics
Test Mode: 802.11n20; Ch 1
ANT Orientation: H
EUT Orientation: H
Test Engineer: Chris
Voltage: AC
Comments:

SWEEP TABLE: "FCC15.247 LBE_PK"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
2.3 GHz	2.4 GHz	MaxPeak MaxPeak	Coupled	1 MHz	#326horn_AF_vert

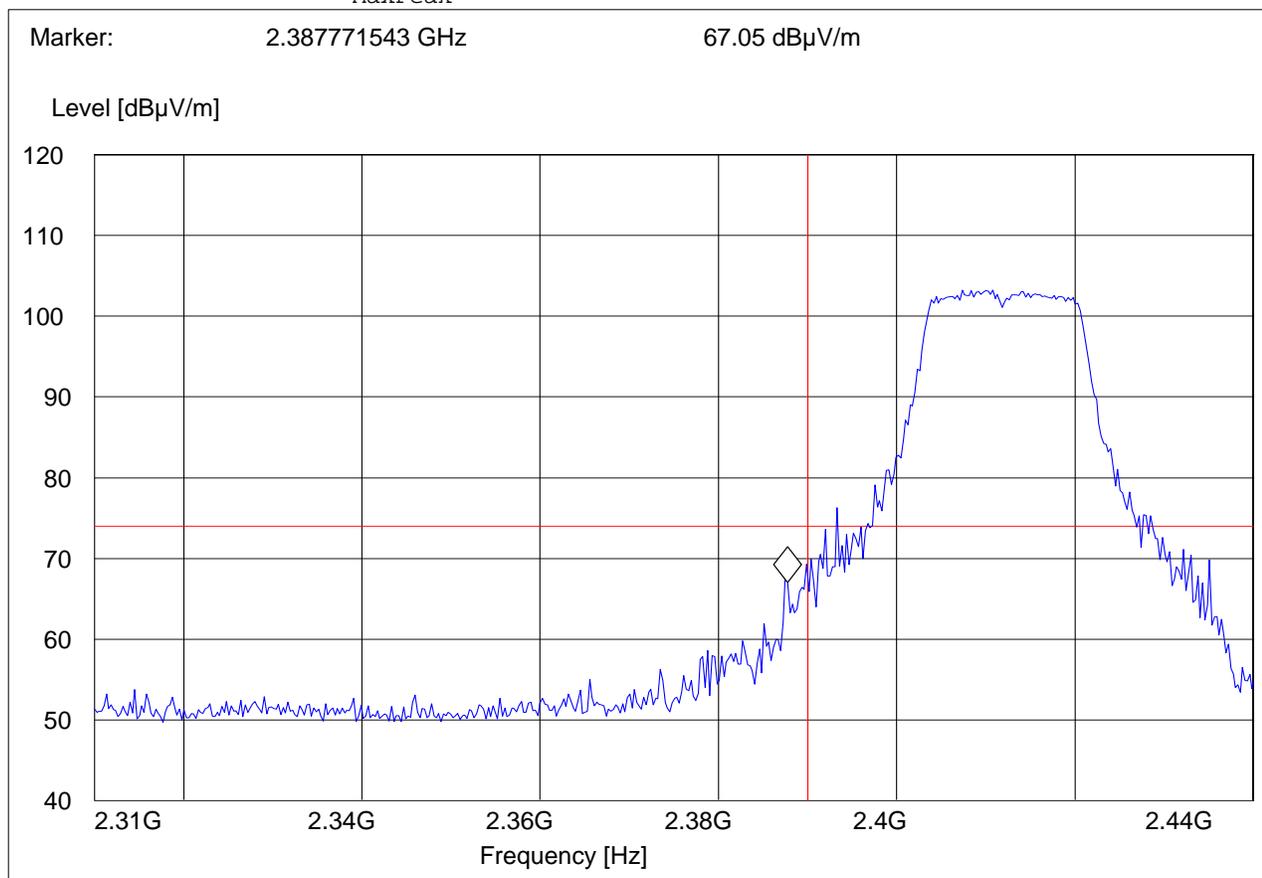


Lower band edge Average

EUT: IRX-4300-FCC1
Customer:: Sony Electronics
Test Mode: 802.11n20; Ch 1
ANT Orientation: H
EUT Orientation: H
Test Engineer: Chris
Voltage: AC
Comments:

SWEEP TABLE: "FCC15.247 LBE_AVG"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
2.3 GHz	2.4 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

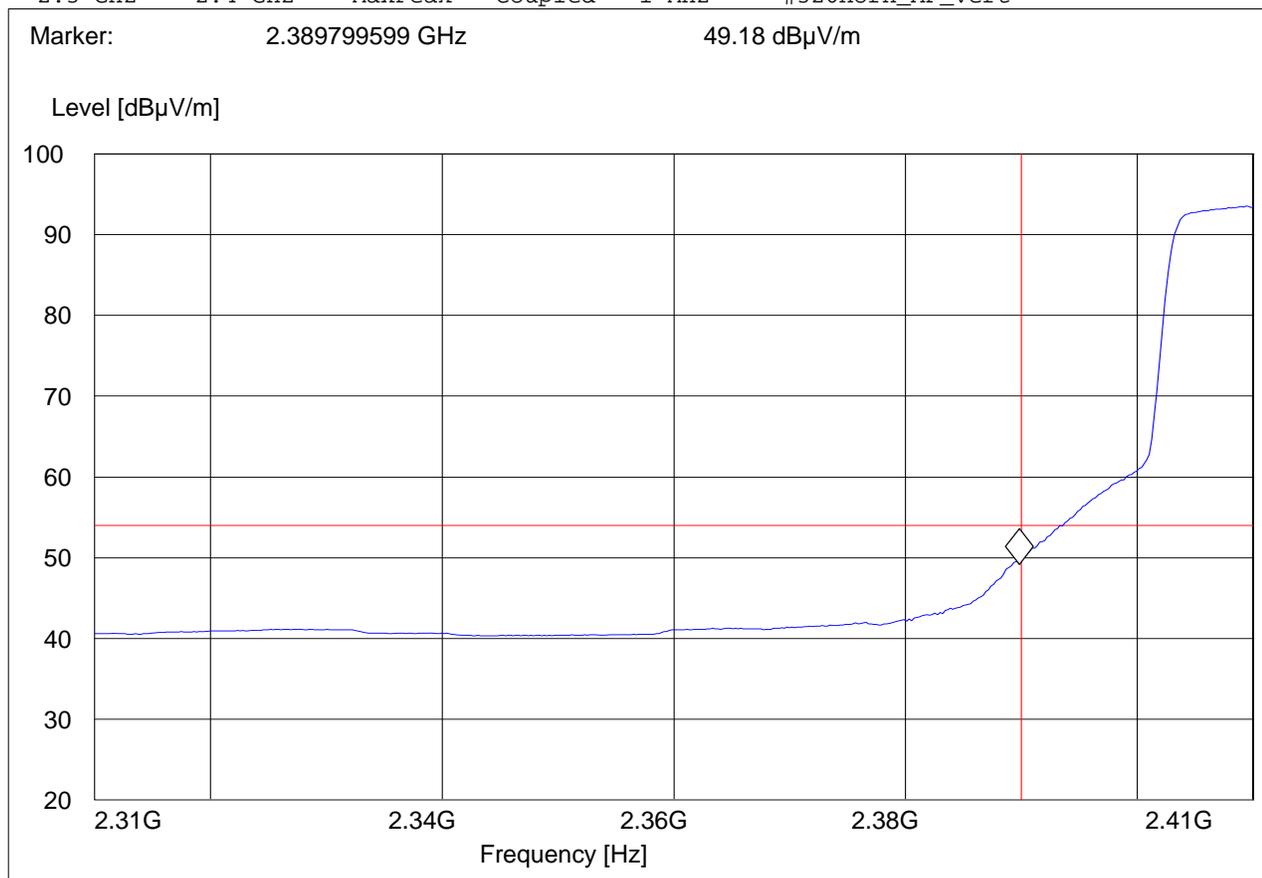


High band edge PEAK

EUT: IRX-4300-FCC1
 Customer:: Sony Electronics
 Test Mode: 802.11n20; Ch 11
 ANT Orientation: H
 EUT Orientation: H
 Test Engineer: Chris
 Voltage: AC
 Comments:

SWEEP TABLE: "FCC15.247 HBE_PK"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
2.5 GHz	2.5 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert
		MaxPeak			

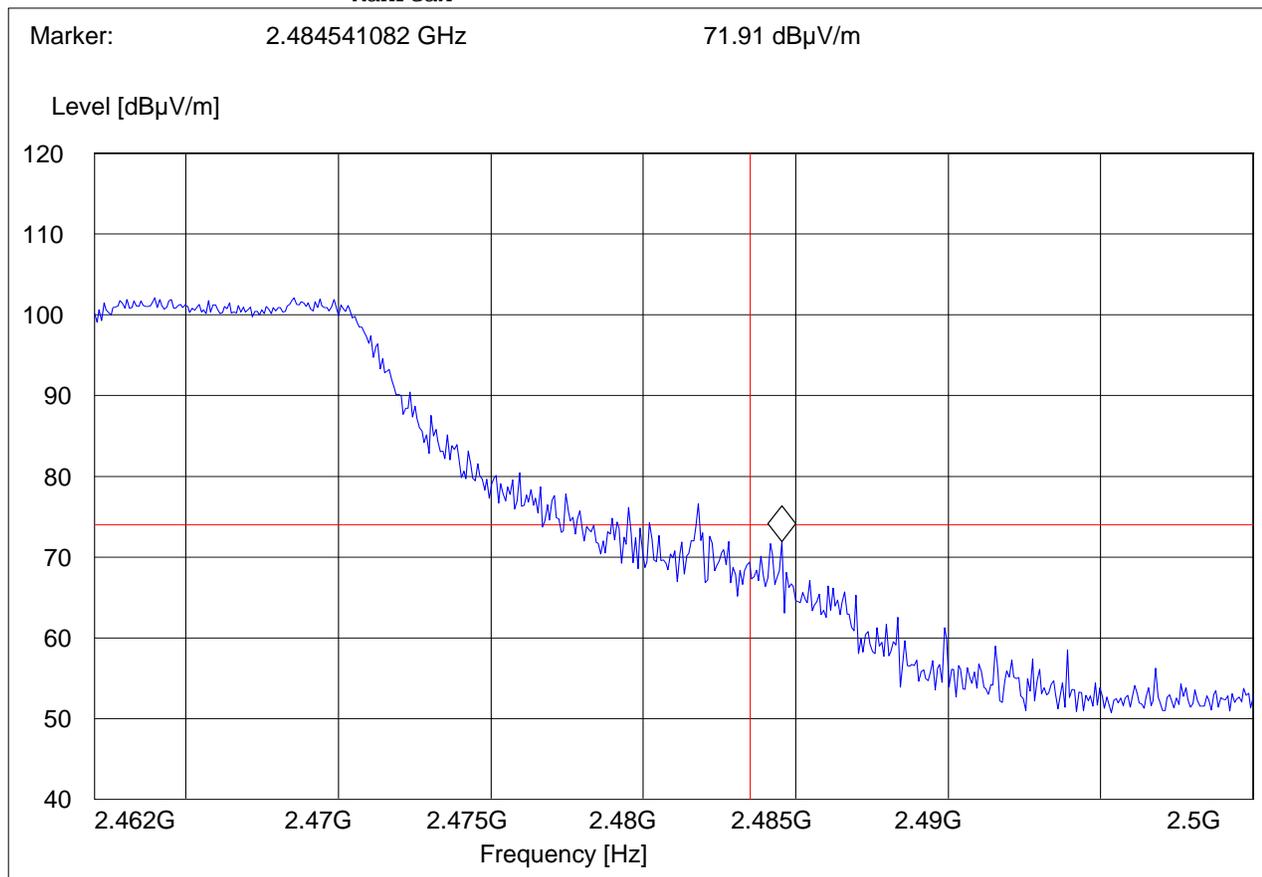


High band edge Average

EUT: IRX-4300-FCC1
Customer:: Sony Electronics
Test Mode: 802.11n20; Ch 11
ANT Orientation: H
EUT Orientation: H
Test Engineer: Chris
Voltage: AC
Comments:

SWEEP TABLE: "FCC15.247 HBE_AVG"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
2.5 GHz	2.5 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_horz

Marker: 2.483547094 GHz 52.21 dB μ V/m

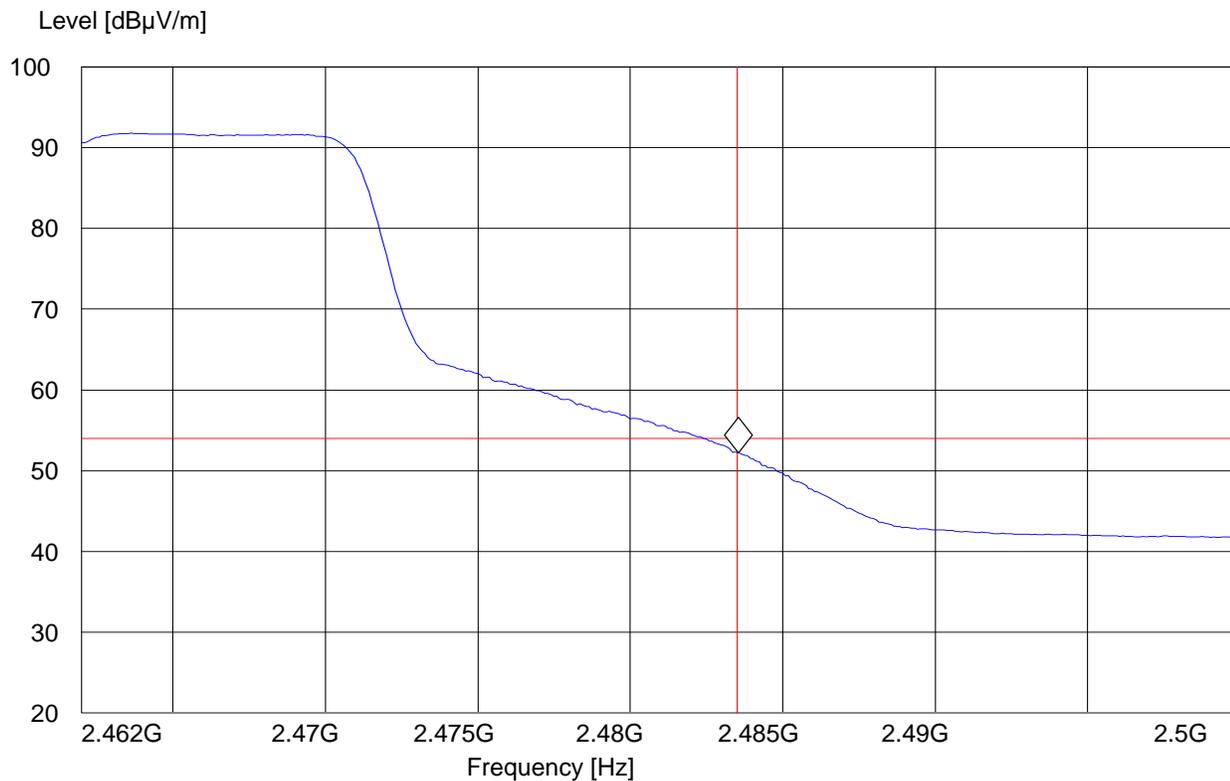


5.2.5 Sub-band 1 802.11n HT40 MODE

Lower band edge PEAK

EUT: IRX-4300-FCC1
 Customer:: Sony Electronics
 Test Mode: 802.11n40; Ch 1
 ANT Orientation: H
 EUT Orientation: H
 Test Engineer: Chris
 Voltage: AC
 Comments:

SWEEP TABLE: "FCC15.247 LBE_PK"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
2.3 GHz	2.4 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

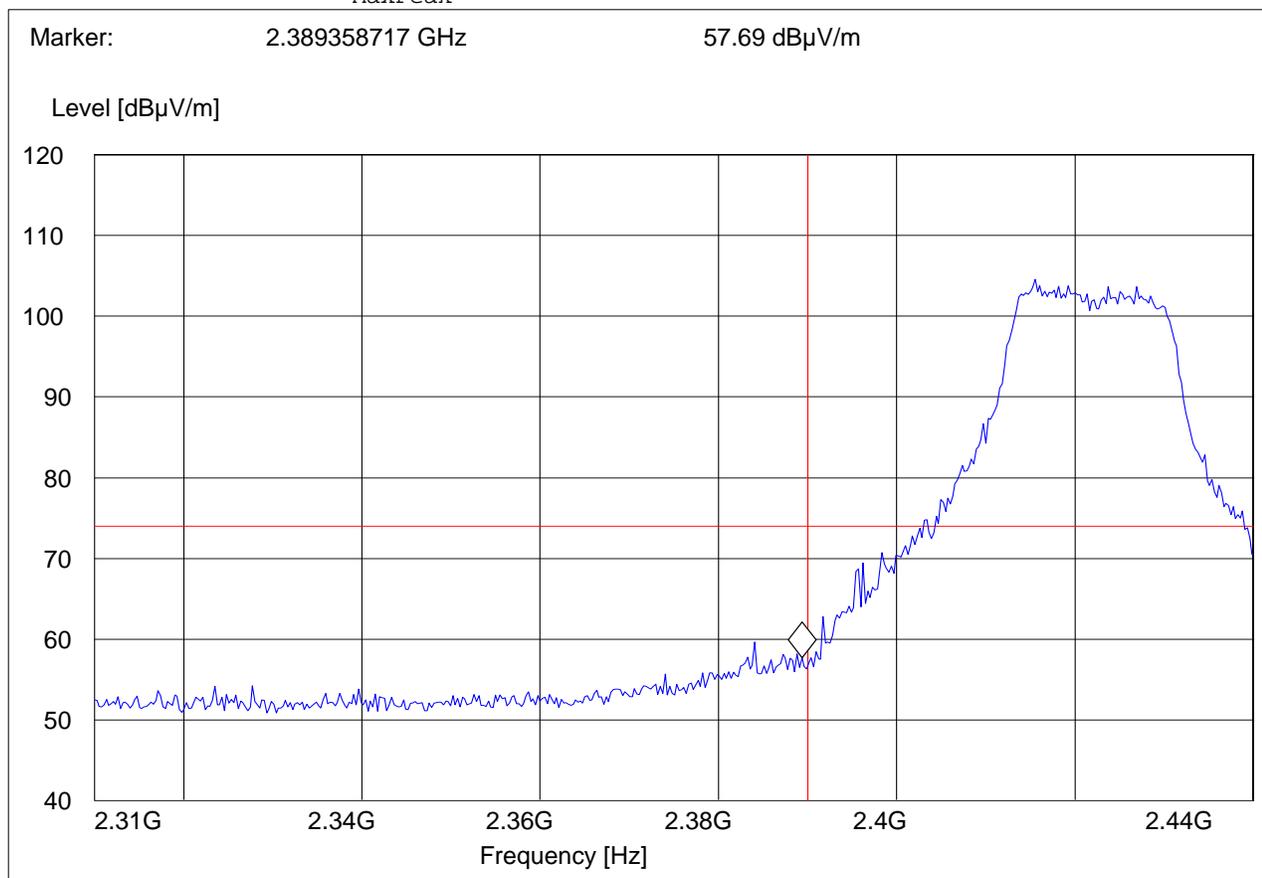


Lower band edge Average

EUT: IRX-4300-FCC1
Customer:: Sony Electronics
Test Mode: 802.11n40; Ch 1
ANT Orientation: H
EUT Orientation: H
Test Engineer: Chris
Voltage: AC
Comments:

SWEEP TABLE: "FCC15.247 LBE_AVG"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
2.3 GHz	2.4 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

Marker: 2.389799599 GHz 44.63 dB μ V/m

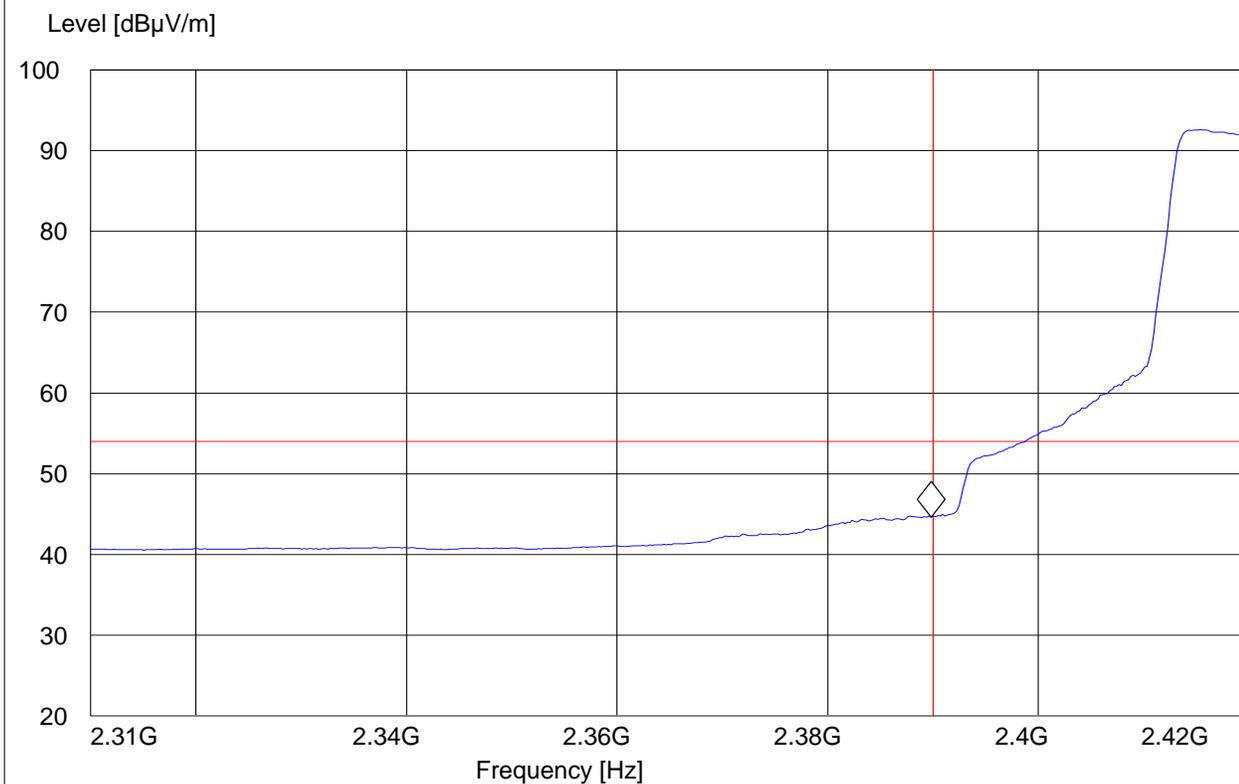


High band edge PEAK

EUT: IRX-4300-FCC1
 Customer:: Sony Electronics
 Test Mode: 802.11n40
 ANT Orientation: H
 EUT Orientation: H
 Test Engineer: Chris
 Voltage: AC
 Comments:

SWEEP TABLE: "FCC15.247 HBE_PK"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
2.5 GHz	2.5 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert
		MaxPeak			

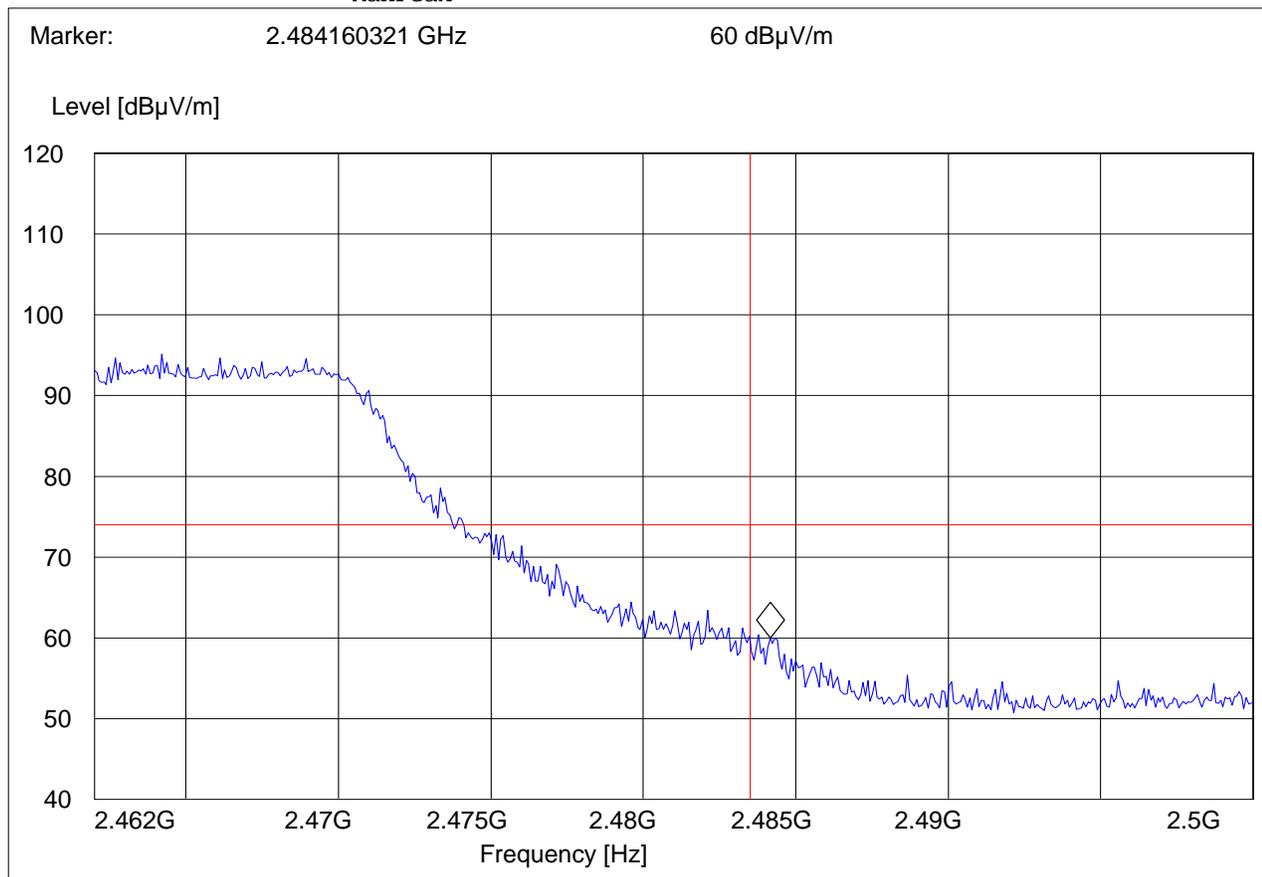


High band edge Average

EUT: IRX-4300-FCC1
Customer:: Sony Electronics
Test Mode: 802.11n40
ANT Orientation: H
EUT Orientation: H
Test Engineer: Chris
Voltage: AC
Comments:

SWEEP TABLE: "FCC15.247 HBE_AVG"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
2.5 GHz	2.5 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_horz

Marker: 2.483547094 GHz 44.49 dB μ V/m

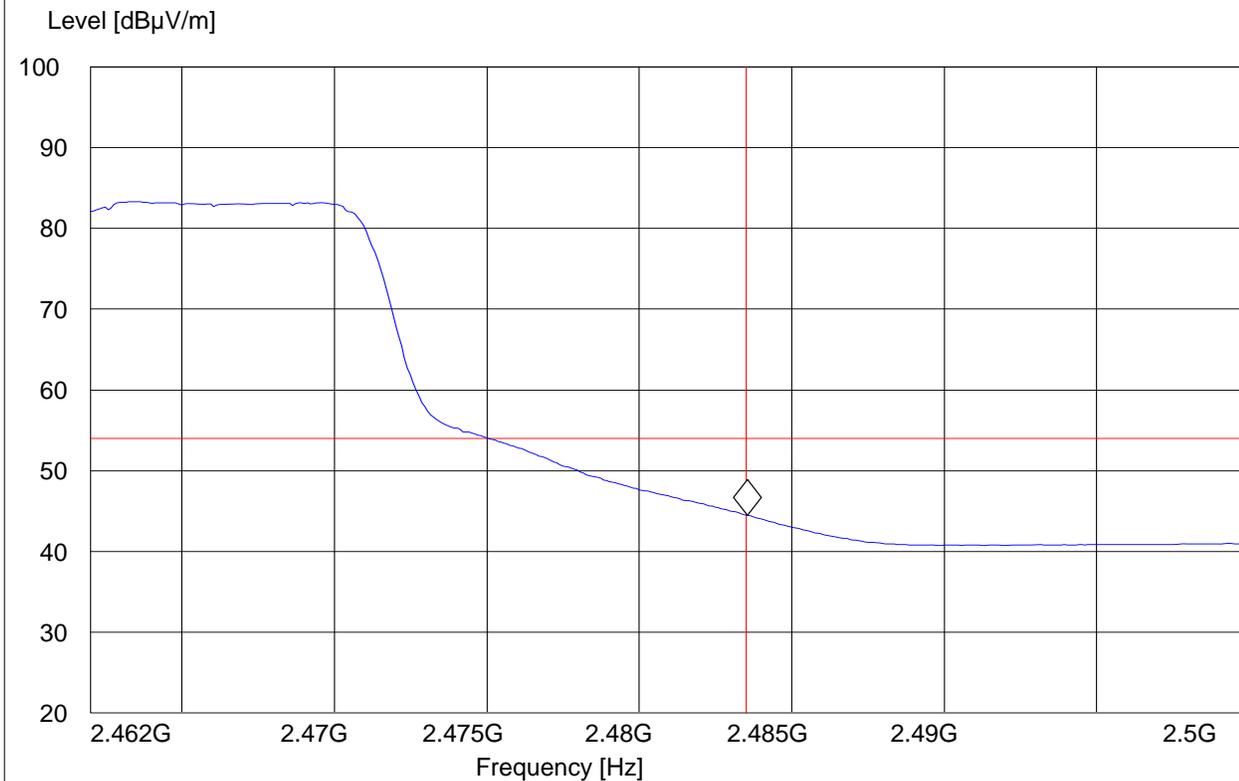

5.3 Transmitter Spurious Emission § 15.247/15.205/15.209

5.3.1 Limits

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

*PEAK LIMIT= 74dBuV/m

*AVG. LIMIT= 54dBuV/m

Notes:

1. The radiated emissions were done with different settings, using the relevant pre-amplifiers for the relevant frequency ranges. This is the reason that the graphs show different noise levels. In the range between 3 and 25 GHz very short cable connections to the antenna was used to minimize the noise level.
2. All measurements are done in peak mode using an average limit, unless specified with the plots.
3. Radiated emissions are maximized by rotating the EUT 360° at 0.5 meter height increments between 1 and 4 meters.
4. Measurements were performed with the EUT in X, Y and Z orientations with the measurement antenna in both horizontal and vertical polarity. The plots below show the results of the worst case orientation and polarity

Results for the radiated measurements below 30MHz according § 15.33

Frequency	Measured values	Remarks
9KHz – 30MHz	No emissions found, caused by the EUT	This is valid for all the tested channels

5.3.2 RESULTS Sub-band 1 802.11b/g MODE

Transmitter spurious emission for 802.11b/g mode is measured in 802.11g mode, which has higher radiated power, and verified in 802.11b mode. All emissions reported here are worse cases.


30MHz – 1GHz, Antenna: Vertical

Note: This plot is valid for low, mid, high channels (worst-case plot).

EUT: IRX-4300-FCC1
 Customer:: Sony Electronics
 Test Mode: 802.11g; Ch. 11
 ANT Orientation: V
 EUT Orientation: H
 Test Engineer: Chris
 Voltage: AC
 Comments:

SWEEP TABLE: "FCC15.247_30M-1G_Ver"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	3141-#1186_Vert

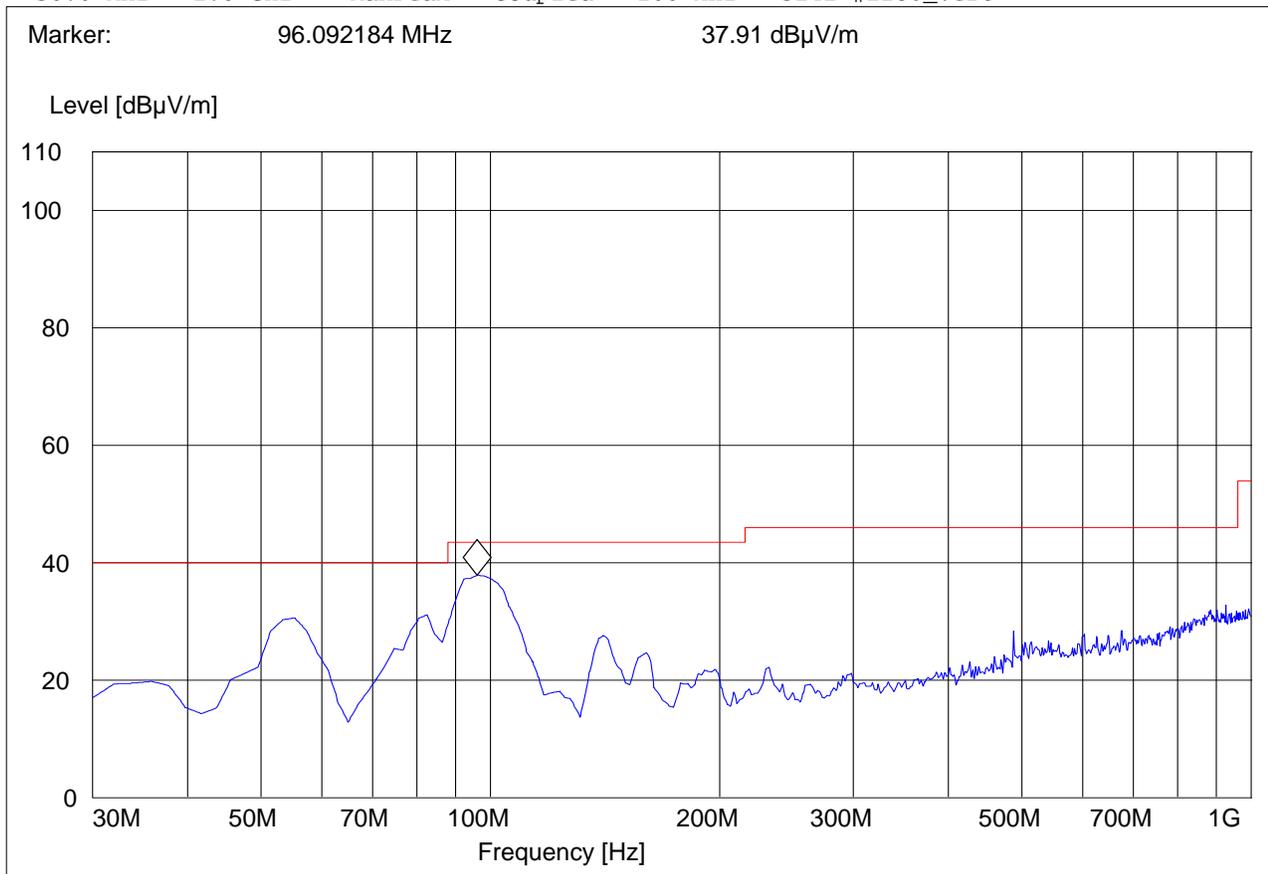


30MHz – 1GHz, Antenna: Horizontal

Note: This plot is valid for low, mid, high channels (worst-case plot).

EUT: IRX-4300-FCC1
 Customer:: Sony Electronics
 Test Mode: 802.11g; Ch. 11
 ANT Orientation: H
 EUT Orientation: H
 Test Engineer: Chris
 Voltage: AC
 Comments:

SWEEP TABLE: "FCC15.247_30M-1G_Hor"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	3141-#1186_Horz

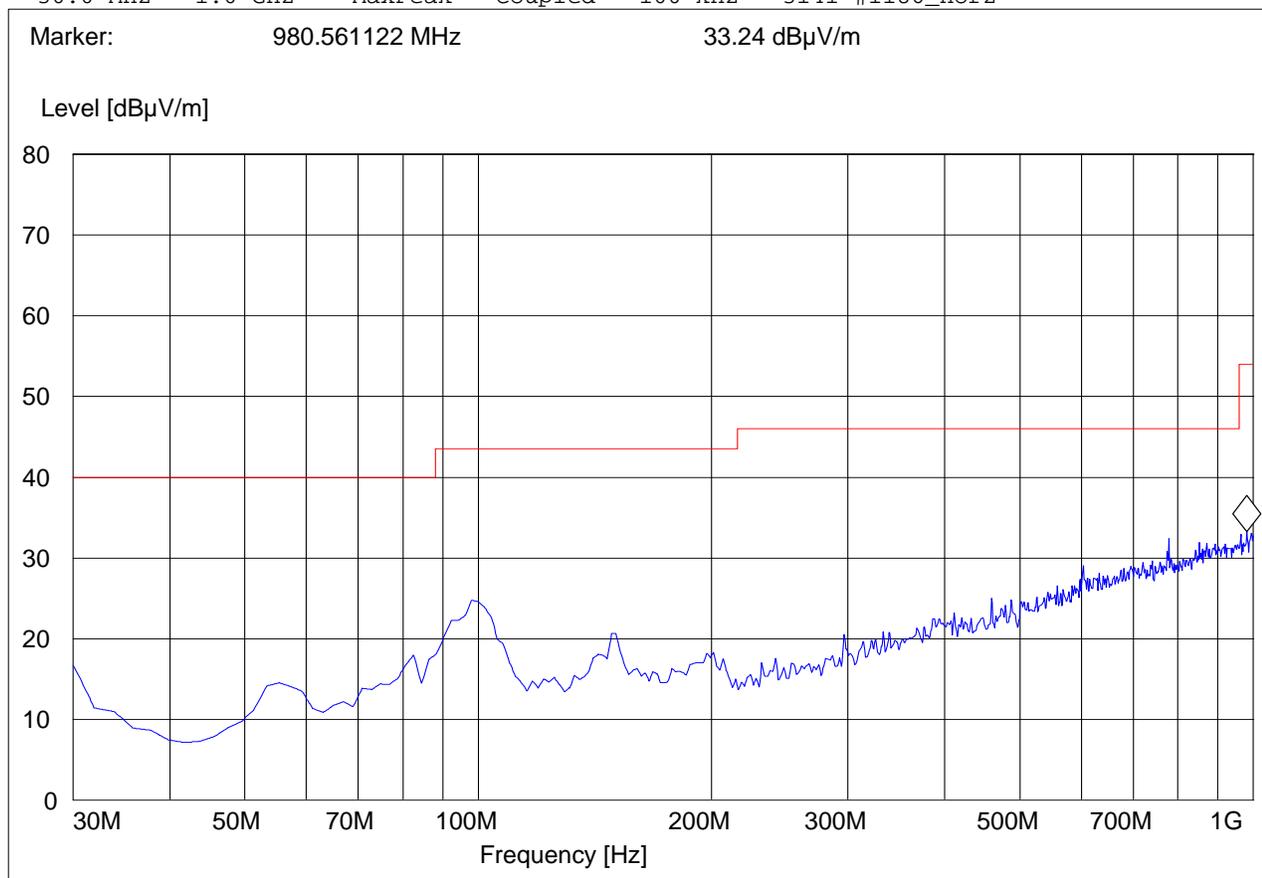

1-3GHz (2412MHz)


Note: The peak above the limit line is the carrier freq.

Note: Peak Reading vs. Average limit

EUT: IRX-4300-FC1
Customer:: Sony Electronics
Test Mode: 802.11g; Ch. 1
ANT Orientation: H
EUT Orientation: H
Test Engineer: Chris
Voltage: AC
Comments:

SWEEP TABLE: "FCC15.247_1-3G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

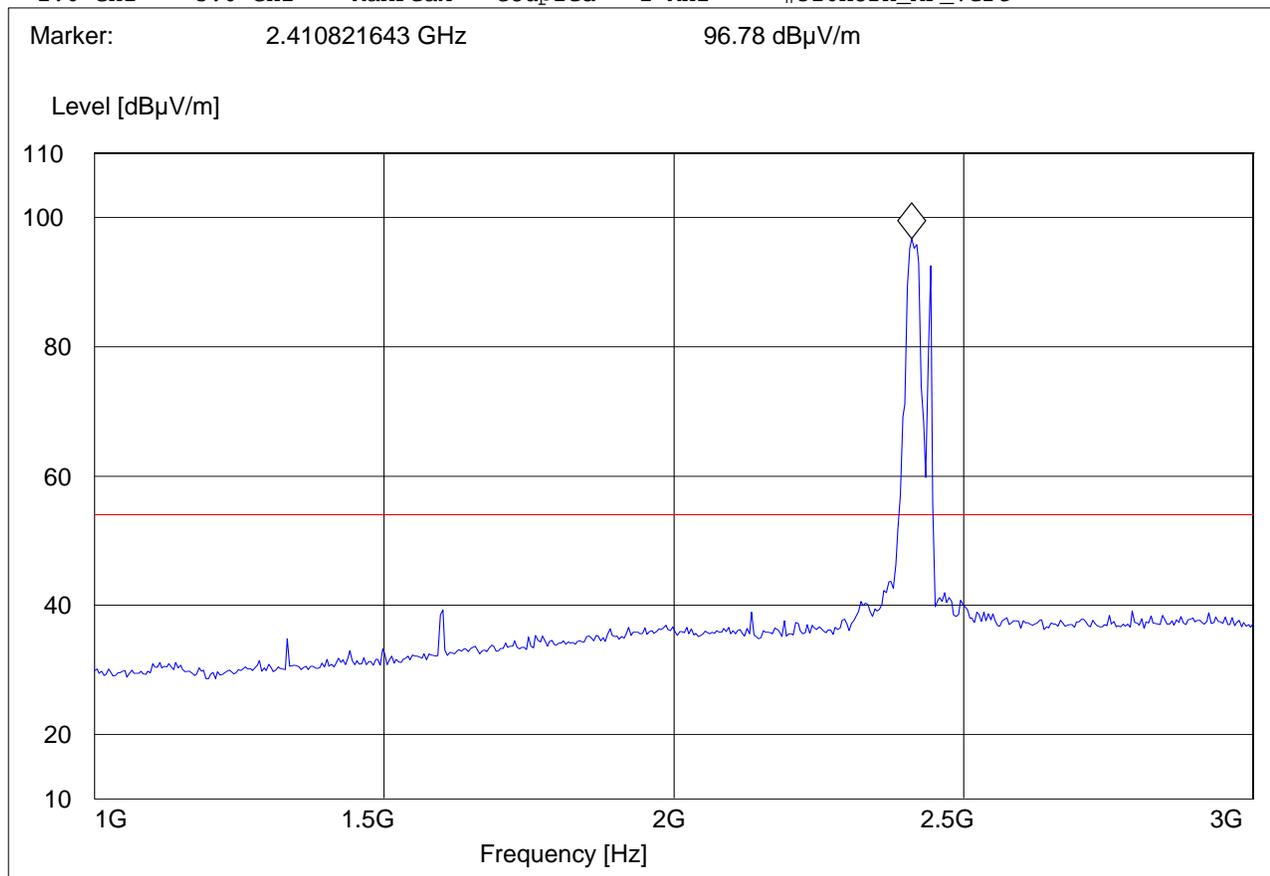

1-3GHz (2437MHz)


Note: The peak above the limit line is the carrier freq.

Note: Peak Reading vs. Average limit

EUT: IRX-4300-FCC1
Customer:: Sony Electronics
Test Mode: 802.11g; CH. 6
ANT Orientation: H
EUT Orientation: H
Test Engineer: Chris
Voltage: AC
Comments:

SWEEP TABLE: "FCC15.247_1-3G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

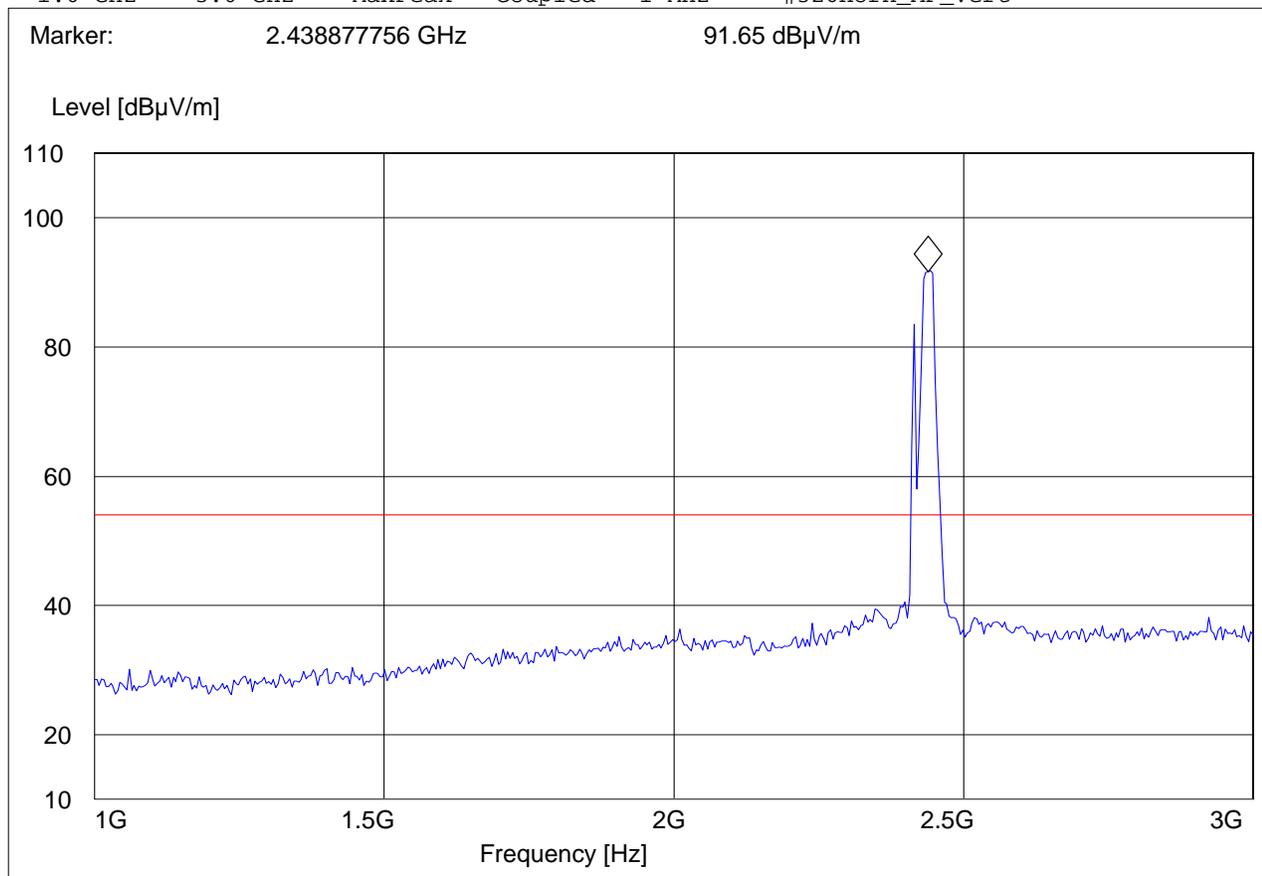

1-3GHz (2462MHz)


Note: The peak above the limit line is the carrier freq.

Note: Peak Reading vs. Average limit

EUT: IRX-4300-FC1
Customer:: Sony Electronics
Test Mode: 802.11g; CH. 11
ANT Orientation: H
EUT Orientation: H
Test Engineer: Chris
Voltage: AC
Comments:

SWEEP TABLE: "FCC15.247_1-3G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

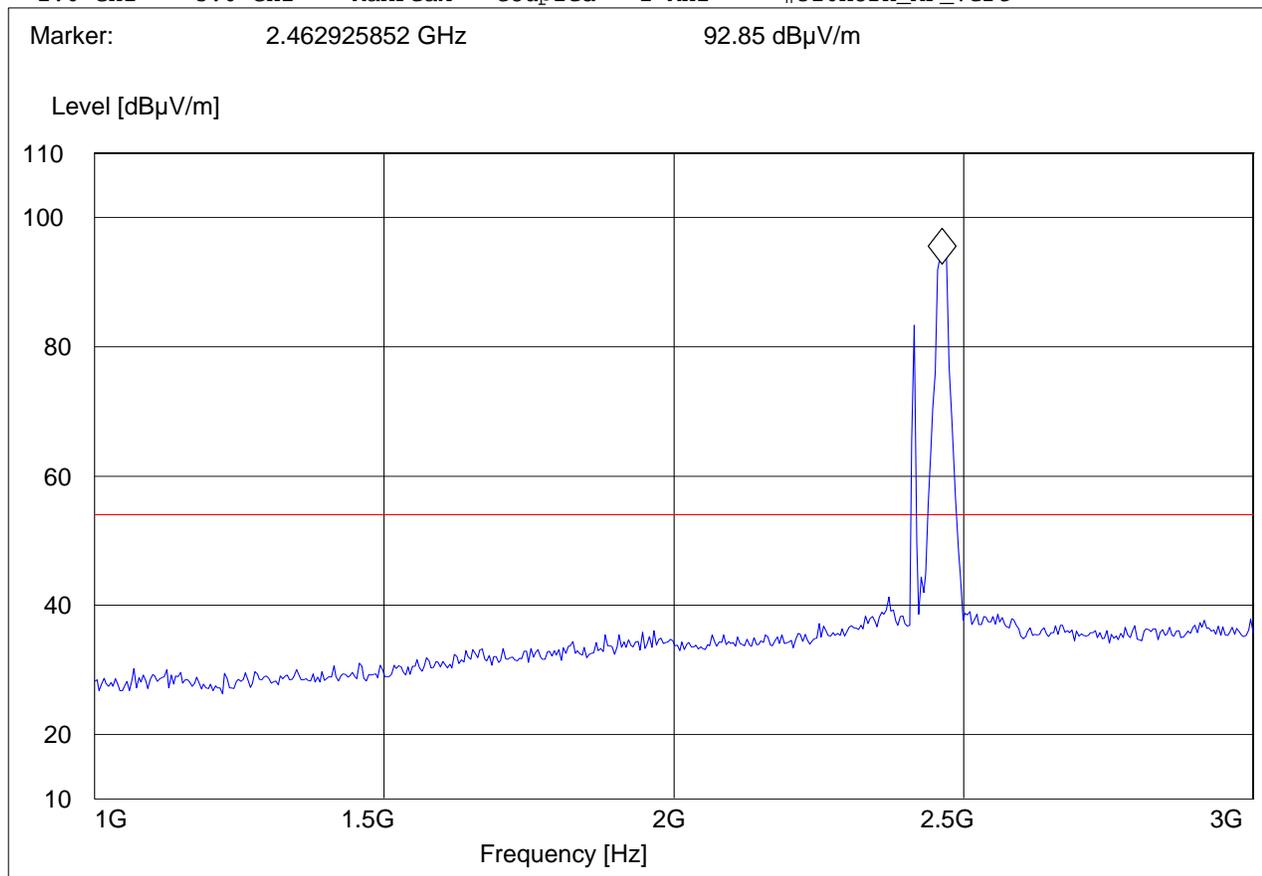


3-18GHz (2412MHz)

Note: Peak Reading vs. Average limit

EUT: IRX-4300-FCC1
Customer:: Sony Electronics
Test Mode: 802.11g; Ch. 1
ANT Orientation: H
EUT Orientation: H
Test Engineer: Chris
Voltage: AC
Comments: With 2.4 GHz notch filter

SWEEP TABLE: "FCC15.247_3-18G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
3.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

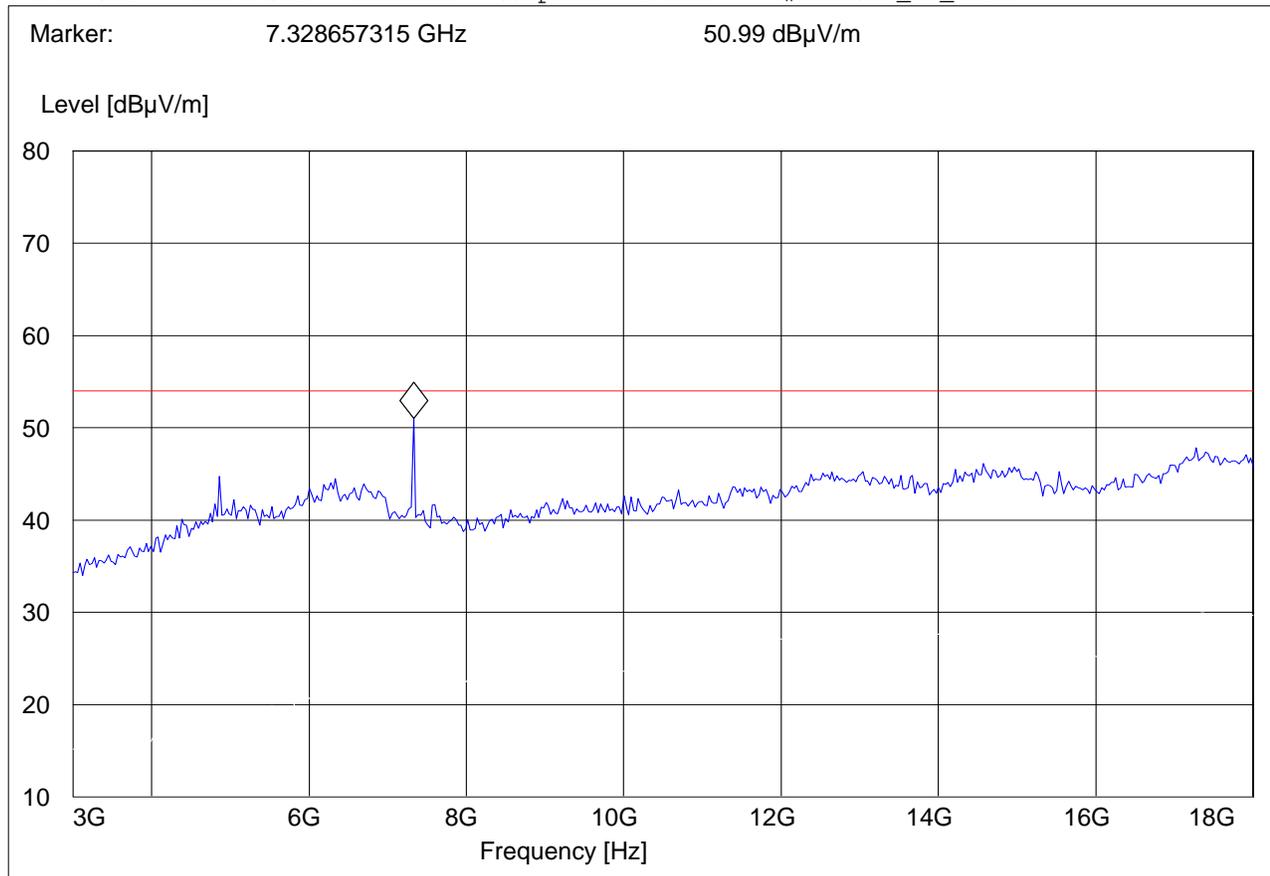


3-18GHz (2437MHz)

Note: Peak Reading vs. Average limit

EUT: IRX-4300-FCC1
Customer:: Sony Electronics
Test Mode: 802.11g; Ch. 6
ANT Orientation: H
EUT Orientation: H
Test Engineer: Chris
Voltage: AC
Comments: With 2.4 GHz notch filter

SWEEP TABLE: "FCC15.247_3-18G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
3.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

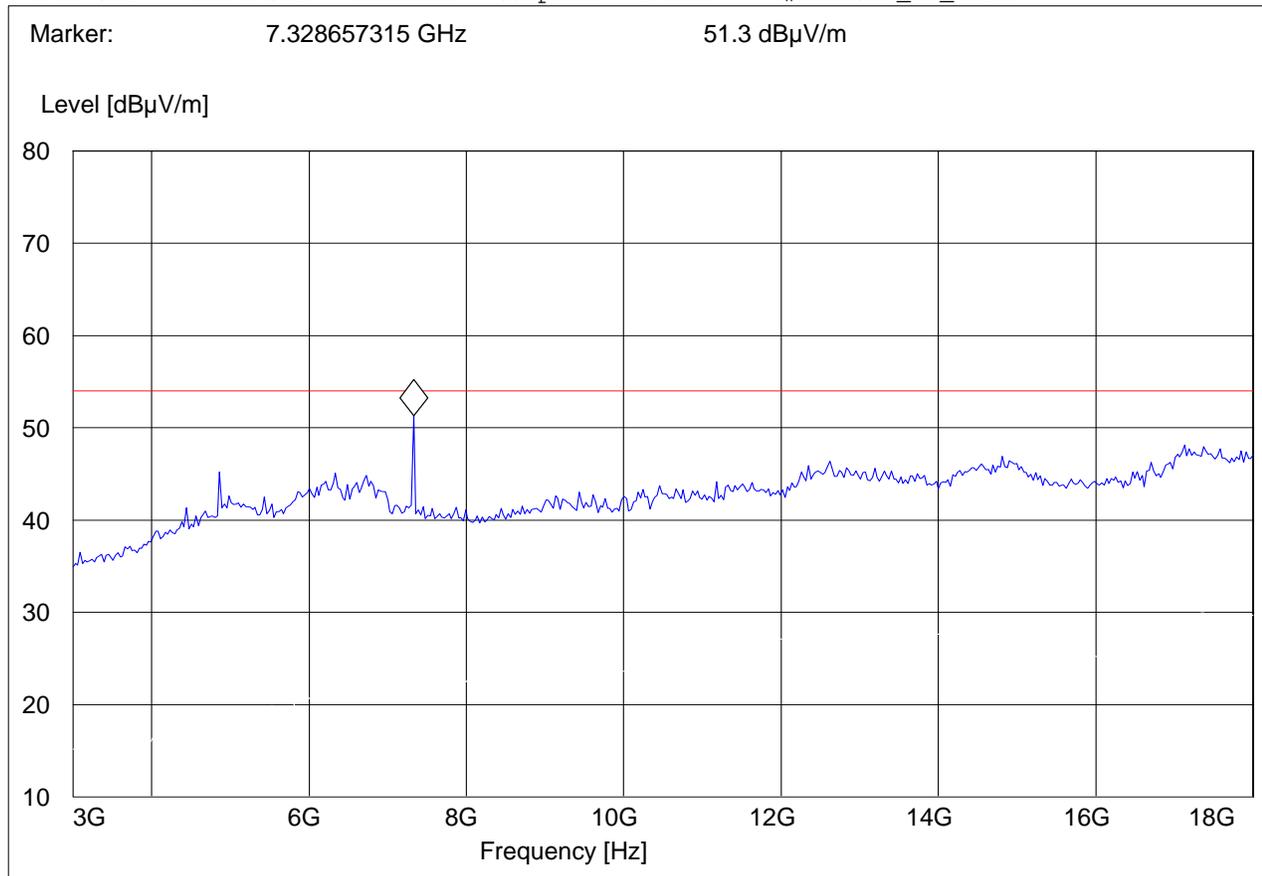

3-18GHz (2462MHz)


Note: Peak Reading vs. Average limit

EUT: IRX-4300-FC1
Customer:: Sony Electronics
Test Mode: 802.11g; Ch. 11
ANT Orientation: H
EUT Orientation: H
Test Engineer: Chris
Voltage: AC
Comments: With 2.4 GHz notch filter

SWEEP TABLE: "FCC15.247_3-18G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
3.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

Marker: 7.328657315 GHz 51.24 dBμV/m

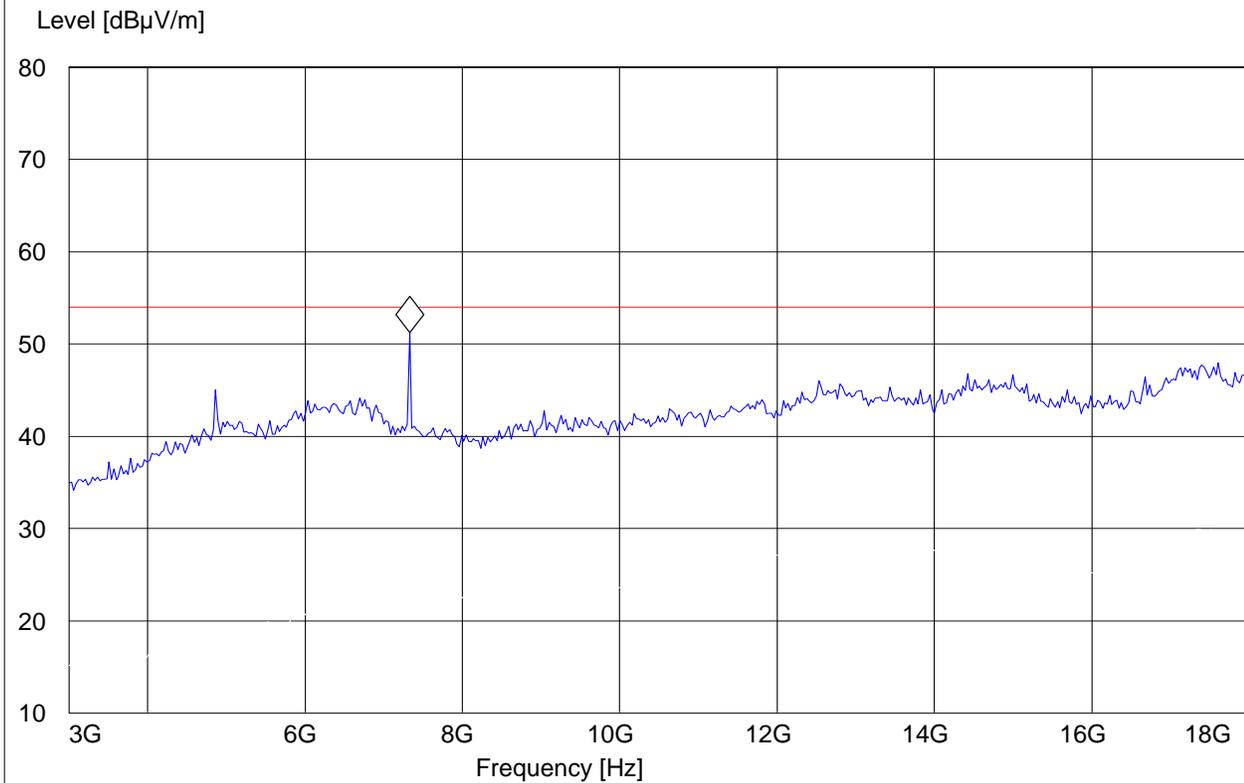

18-25GHz


Note: This plot is valid for low, mid, high channels (worst-case plot).

Note: Peak Reading vs. Average limit

EUT: IRX-4300-FCC1
Customer:: Sony Electronics
Test Mode: 802.11g; Ch. 6
ANT Orientation: H
EUT Orientation: H
Test Engineer: Chris
Voltage: AC
Comments:

SWEEP TABLE: "FCC15.247_18-26.5G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
18.0 GHz	26.5 GHz	MaxPeak MaxPeak	Coupled	100 kHz	Horn # 3116_18-40G

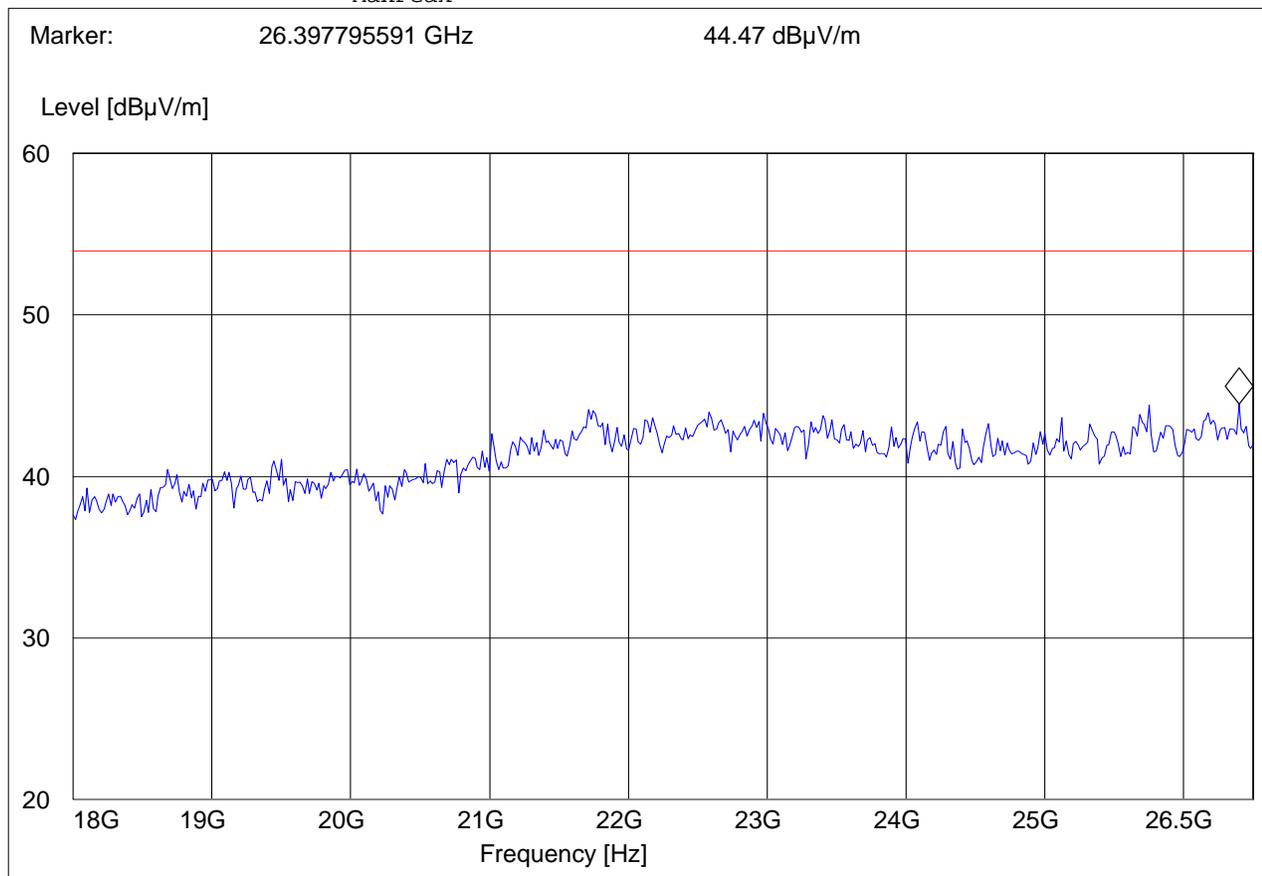

**5.3.3 RESULTS Sub-band 1 802.11n HT20 MODE
30MHz – 1GHz, Antenna: Vertical**


Note: This plot is valid for low, mid, high channels (worst-case plot).

EUT: IRX-4300-FCC1
 Customer:: Sony Electronics
 Test Mode: 802.11n20; Ch. 11
 ANT Orientation: V
 EUT Orientation: H
 Test Engineer: Chris
 Voltage: AC
 Comments:

SWEEP TABLE: "FCC15.247_30M-1G_Ver"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	3141-#1186_Vert

Marker: 98.036072 MHz 37.96 dBµV/m

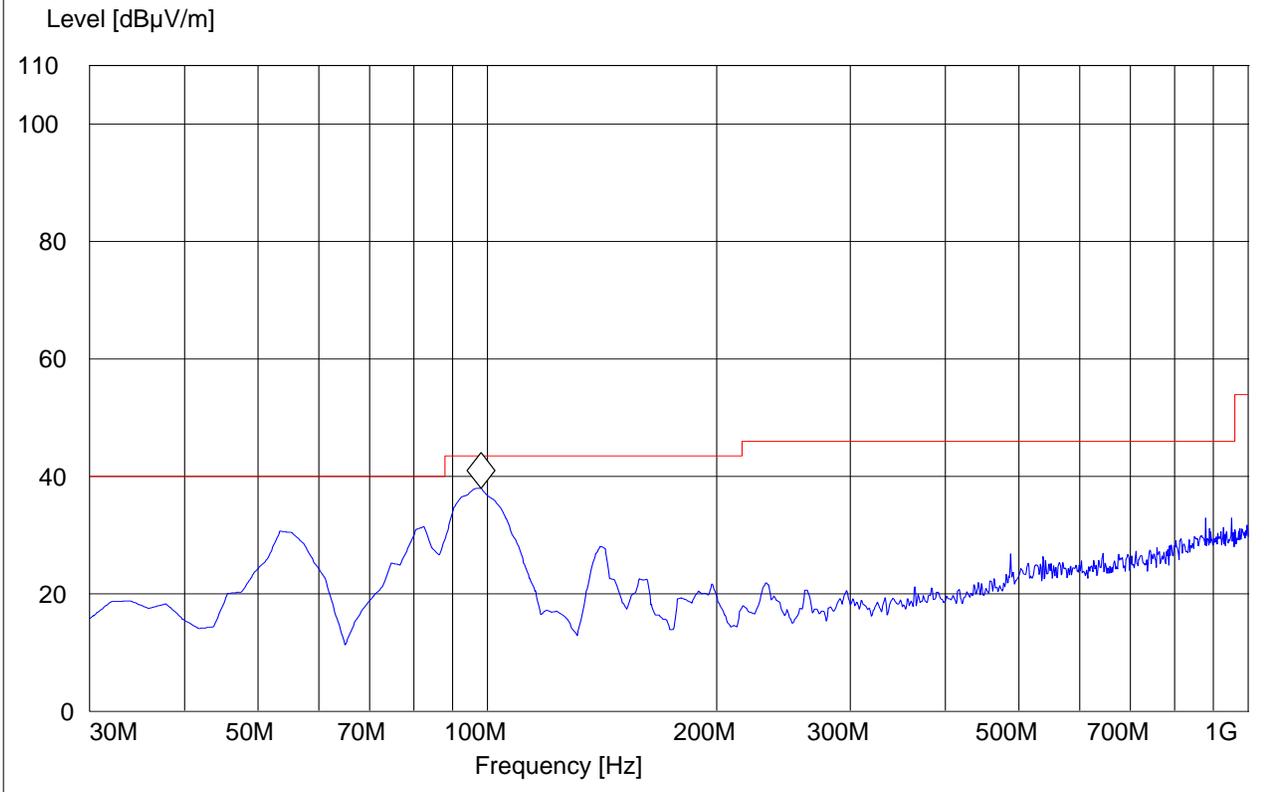


30MHz – 1GHz, Antenna: Horizontal

Note: This plot is valid for low, mid, high channels (worst-case plot).

EUT: IRX-4300-FCC1
Customer:: Sony Electronics
Test Mode: 802.11n20; CH. 11
ANT Orientation: H
EUT Orientation: H
Test Engineer: Chris
Voltage: AC
Comments:

SWEEP TABLE: "FCC15.247_30M-1G_Horz"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	3141-#1186_Horz

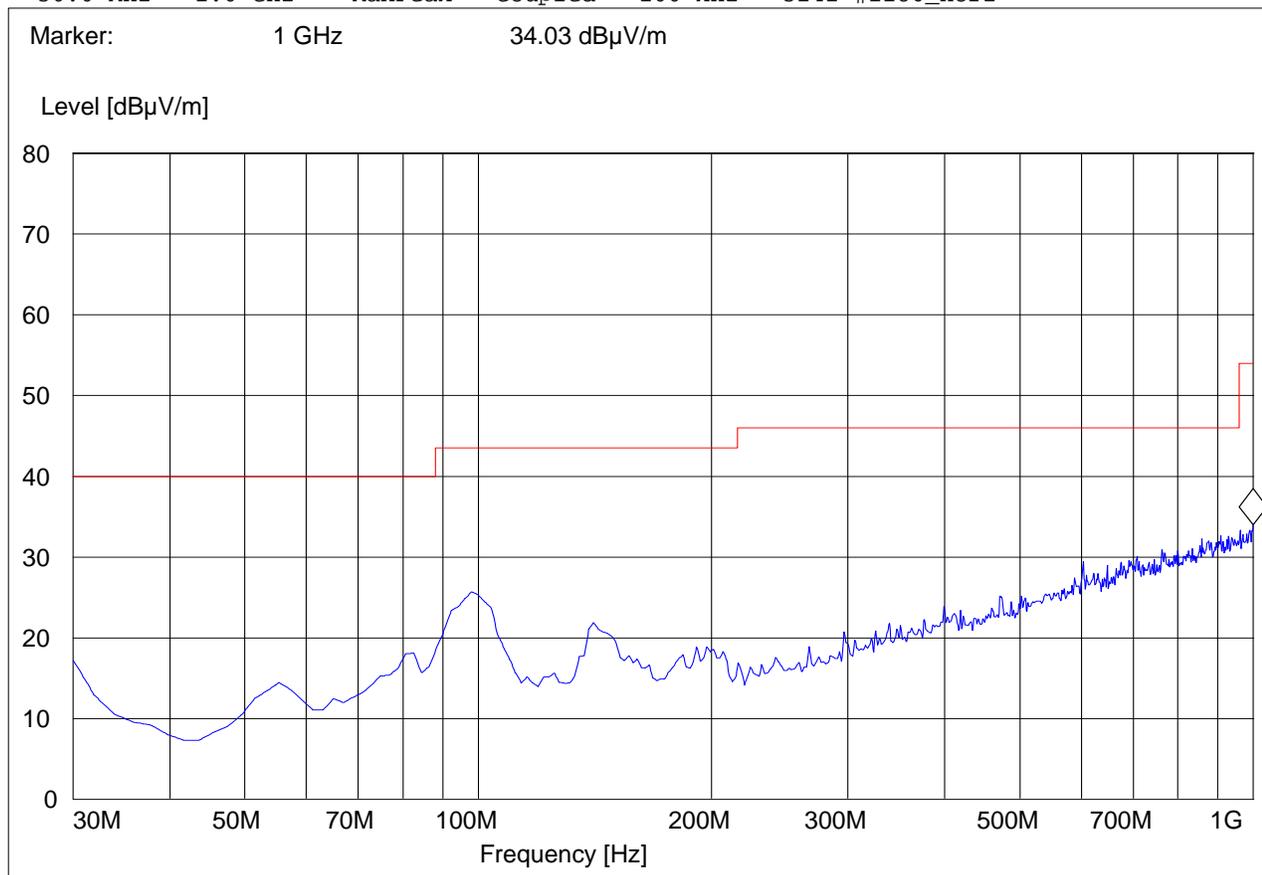

1-3GHz (2412MHz)


Note: The peak above the limit line is the carrier freq.

Note: Peak Reading vs. Average limit

EUT: IRX-4300-FCC1
Customer:: Sony Electronics
Test Mode: 802.11n20; CH. 1
ANT Orientation: H
EUT Orientation: H
Test Engineer: Chris
Voltage: AC
Comments:

SWEEP TABLE: "FCC15.247_1-3G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

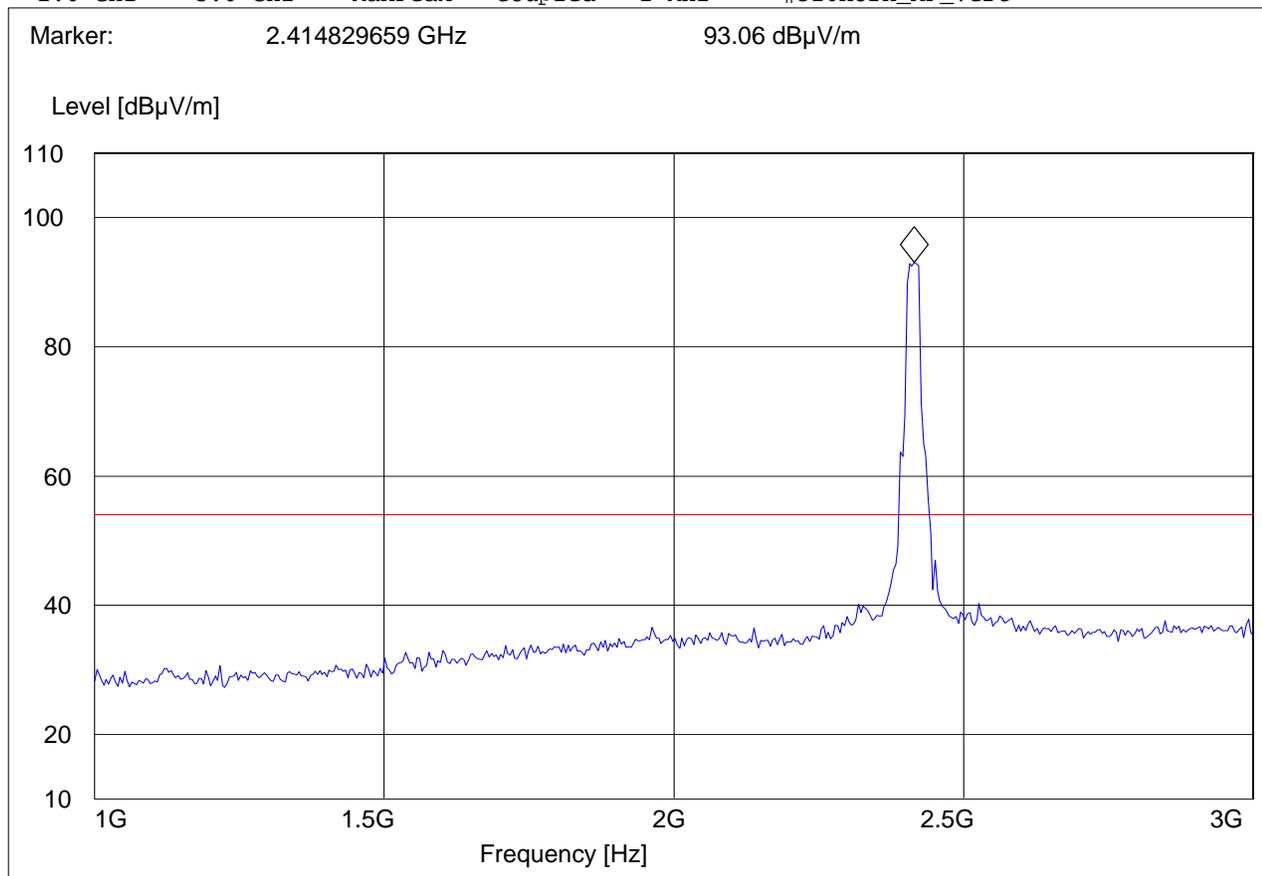

1-3GHz (2437MHz)


Note: The peak above the limit line is the carrier freq.

Note: Peak Reading vs. Average limit

EUT: IRX-4300-FCC1
Customer:: Sony Electronics
Test Mode: 802.11n20; CH. 6
ANT Orientation: H
EUT Orientation: H
Test Engineer: Chris
Voltage: AC
Comments:

SWEEP TABLE: "FCC15.247_1-3G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

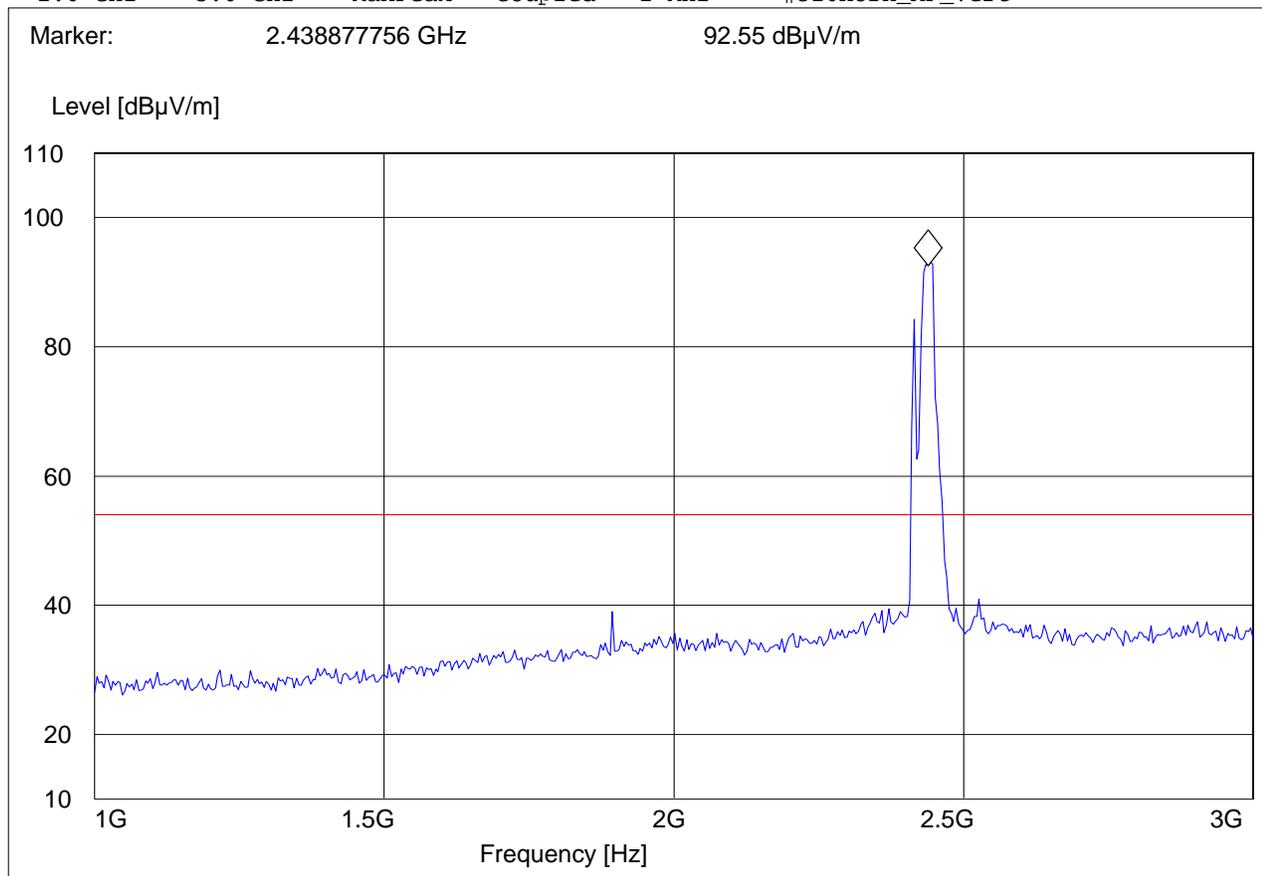

1-3GHz (2462MHz)


Note: The peak above the limit line is the carrier freq.

Note: Peak Reading vs. Average limit

EUT: IRX-4300-FCC1
Customer:: Sony Electronics
Test Mode: 802.11n20; CH. 11
ANT Orientation: H
EUT Orientation: H
Test Engineer: Chris
Voltage: AC
Comments:

SWEEP TABLE: "FCC15.247_1-3G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

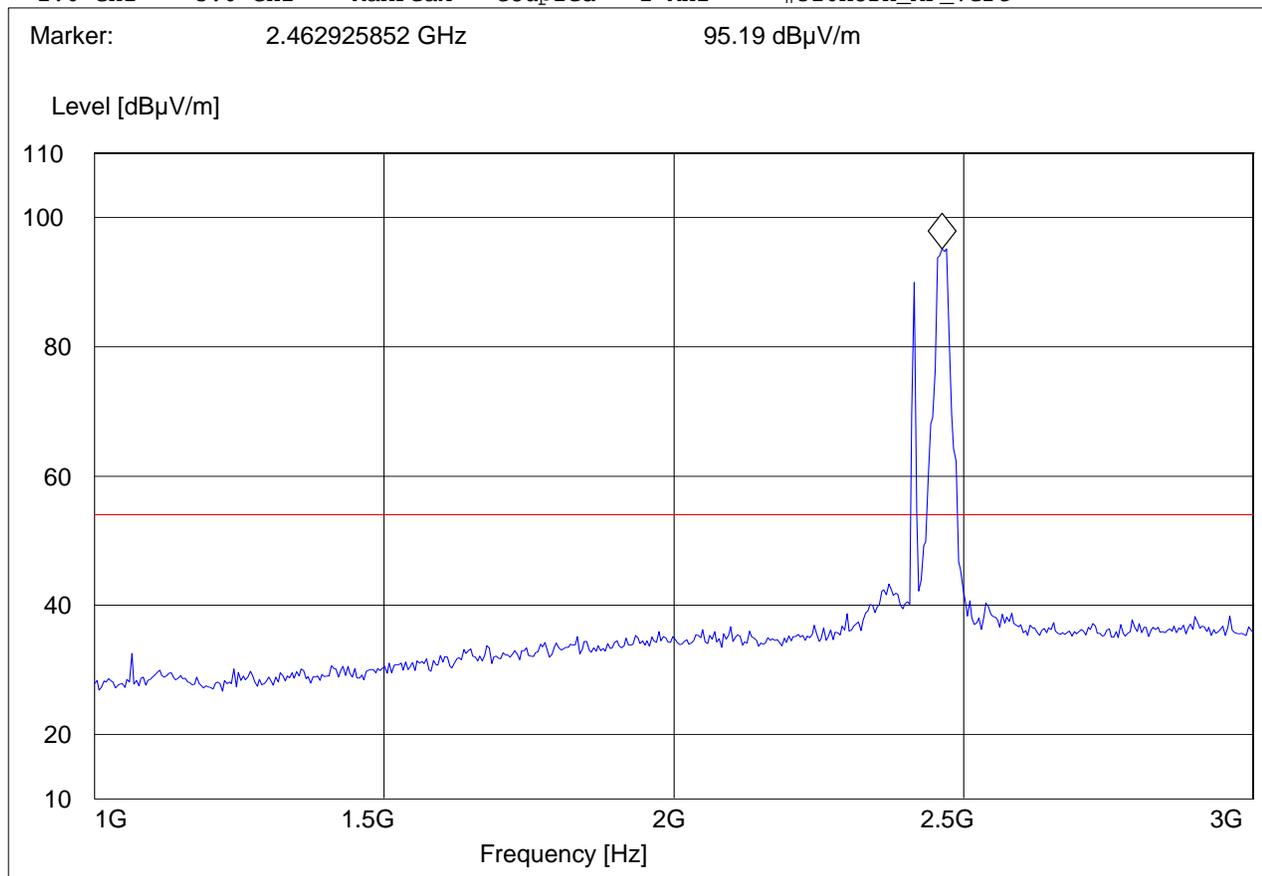

3-18GHz (2412MHz)


Note: Peak Reading vs. Average limit

EUT: IRX-4300-FCC1
Customer:: Sony Electronics
Test Mode: 802.11n20; CH. 1
ANT Orientation: H
EUT Orientation: H
Test Engineer: Chris
Voltage: AC
Comments: With 2.4 GHz notch filter

SWEEP TABLE: "FCC15.247_3-18G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
3.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

Marker: 17.218436874 GHz 46.66 dBμV/m

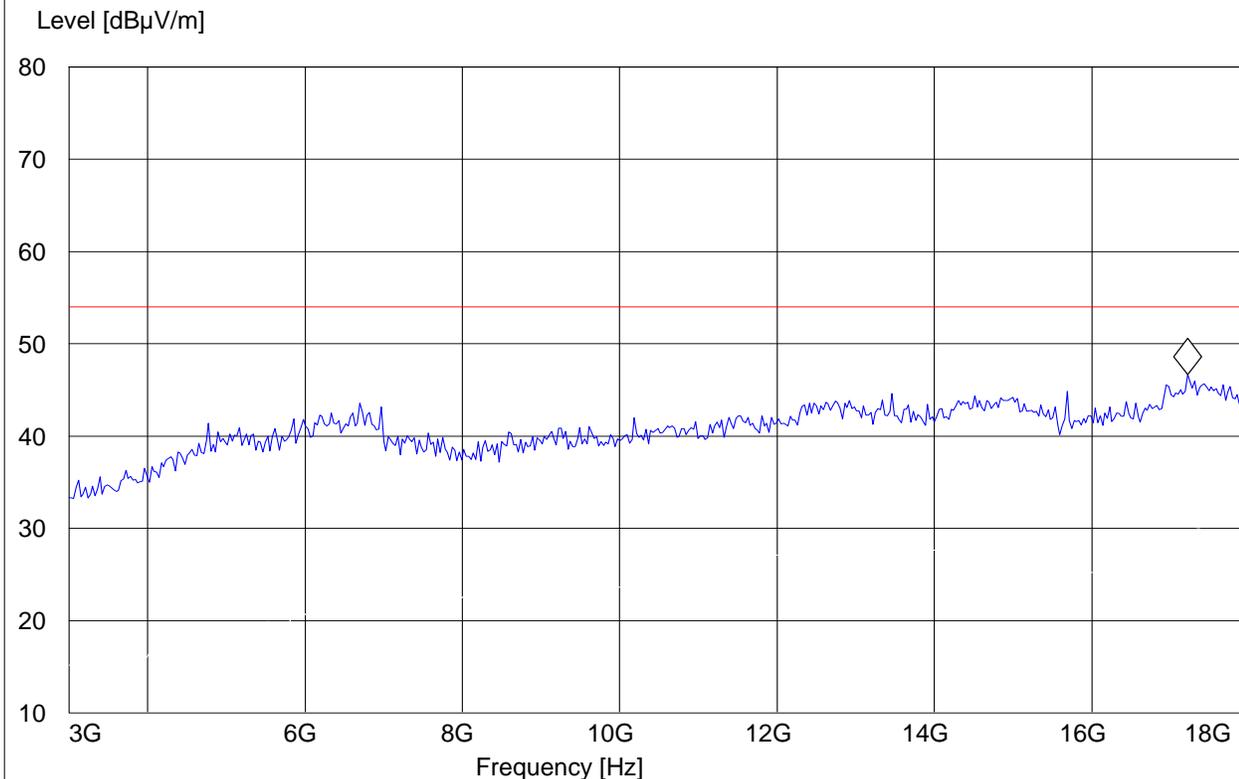


1-18GHz (2437MHz)

Note: Peak Reading vs. Average limit

EUT: IRX-4300-FCC1
Customer:: Sony Electronics
Test Mode: 802.11n20; CH. 6
ANT Orientation: H
EUT Orientation: H
Test Engineer: Chris
Voltage: AC
Comments: With 2.4 GHz notch filter

SWEEP TABLE: "FCC15.247_3-18G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
3.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

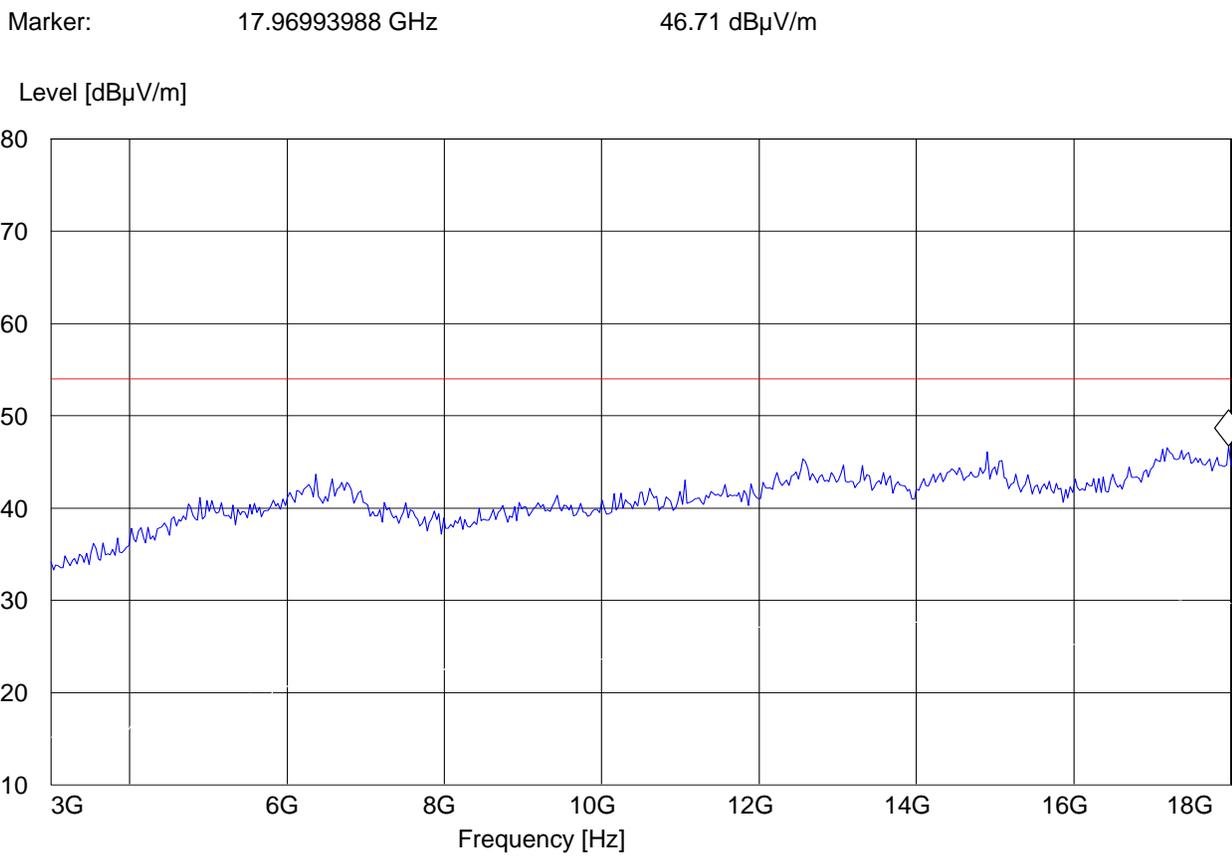

3-18GHz (2462MHz)


Note: Peak Reading vs. Average limit

EUT: IRX-4300-FCC1
Customer:: Sony Electronics
Test Mode: 802.11n20; CH. 11
ANT Orientation: H
EUT Orientation: H
Test Engineer: Chris
Voltage: AC
Comments:

SWEEP TABLE: "FCC15.247_3-18G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
3.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

Marker: 17.96993988 GHz 46.71 dB μ V/m

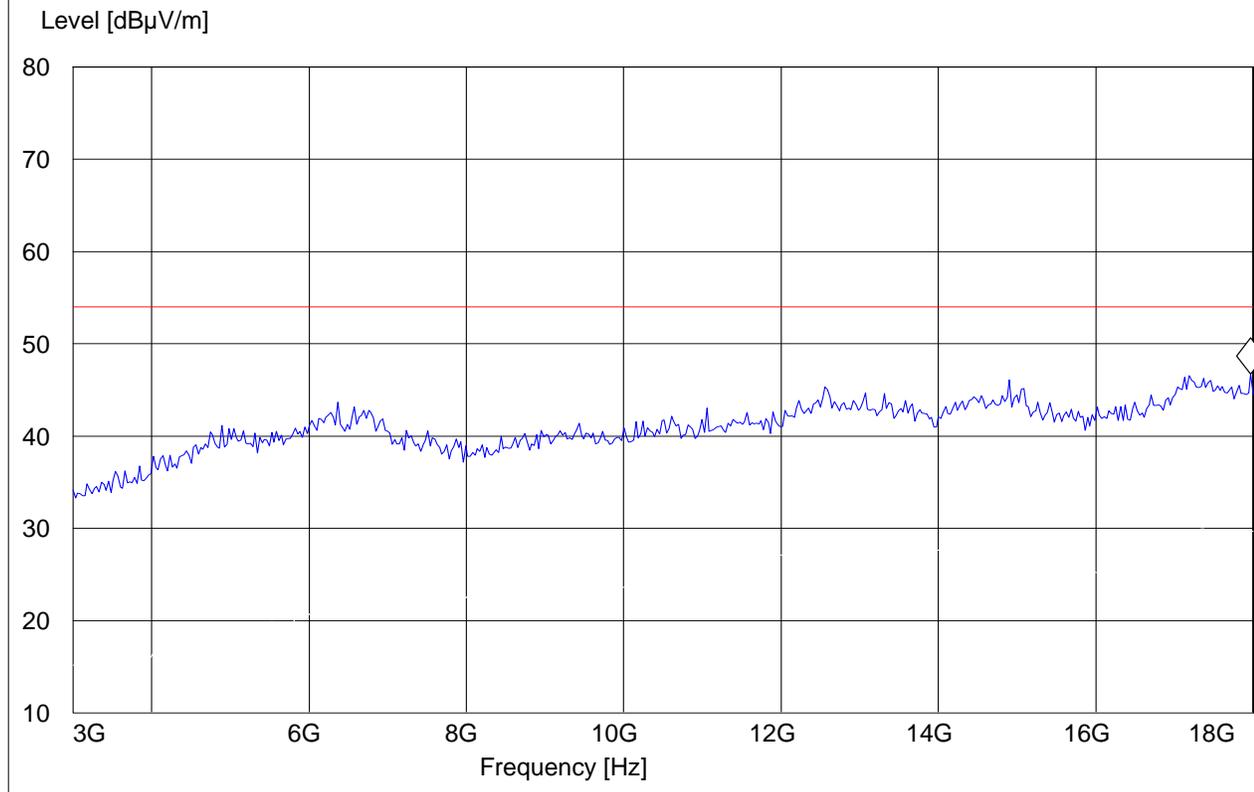

18-25GHz


Note: This plot is valid for low, mid, high channels (worst-case plot).

Note: Peak Reading vs. Average limit

EUT: IRX-4300-FCC1
Customer:: Sony Electronics
Test Mode: 802.11n20; CH. 1
ANT Orientation: H
EUT Orientation: H
Test Engineer: Chris
Voltage: AC
Comments:

SWEEP TABLE: "FCC15.247_18-26.5G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
18.0 GHz	26.5 GHz	MaxPeak	Coupled	100 kHz	Horn # 3116_18-40G

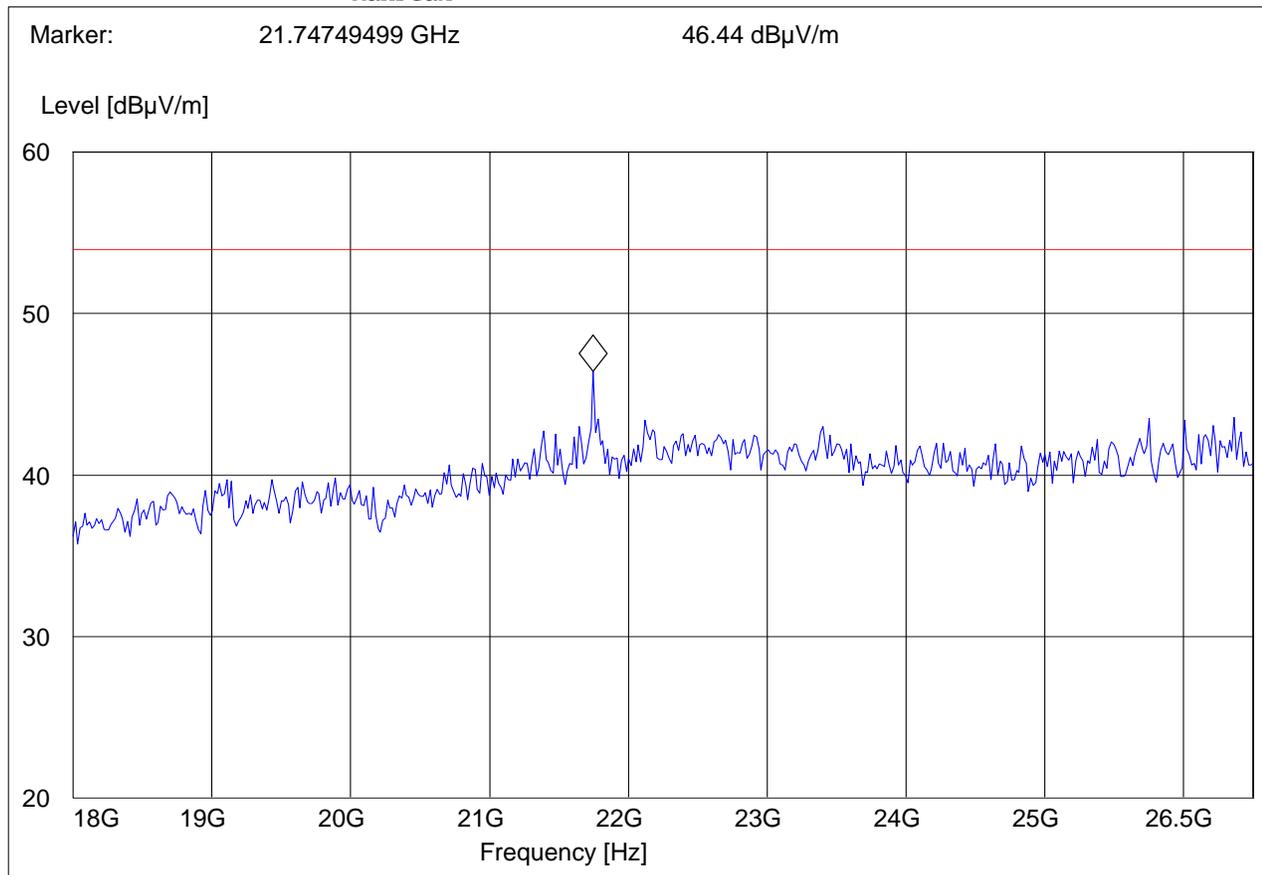

5.3.4 RESULTS Sub-band 1 802.11n HT40 MODE


30MHz – 1GHz, Antenna: Vertical

Note: This plot is valid for low, mid, high channels (worst-case plot).

EUT: IRX-4300-FCC1
 Customer:: Sony Electronics
 Test Mode: 802.11n40; Ch. 1
 ANT Orientation: V
 EUT Orientation: H
 Test Engineer: Chris
 Voltage: AC
 Comments:

SWEEP TABLE: "FCC15.247_30M-1G_Ver"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	3141-#1186_Vert

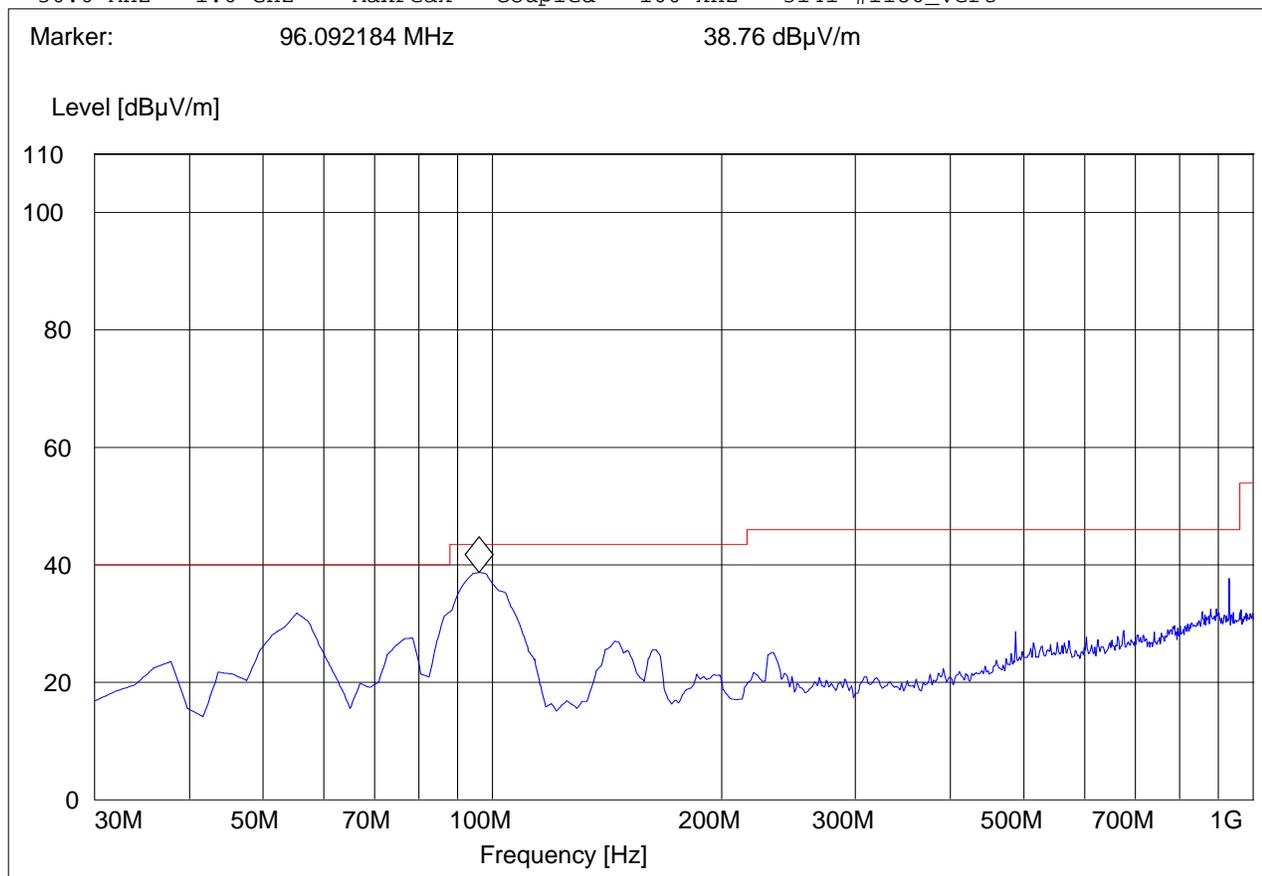


30MHz – 1GHz, Antenna: Horizontal

Note: This plot is valid for low, mid, high channels (worst-case plot).

EUT: IRX-4300-FCC1
 Customer:: Sony Electronics
 Test Mode: 802.11n40; Ch. 1
 ANT Orientation: H
 EUT Orientation: H
 Test Engineer: Chris
 Voltage: AC
 Comments:

SWEEP TABLE: "FCC15.247_30M-1G_Hor"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	3141-#1186_Horz

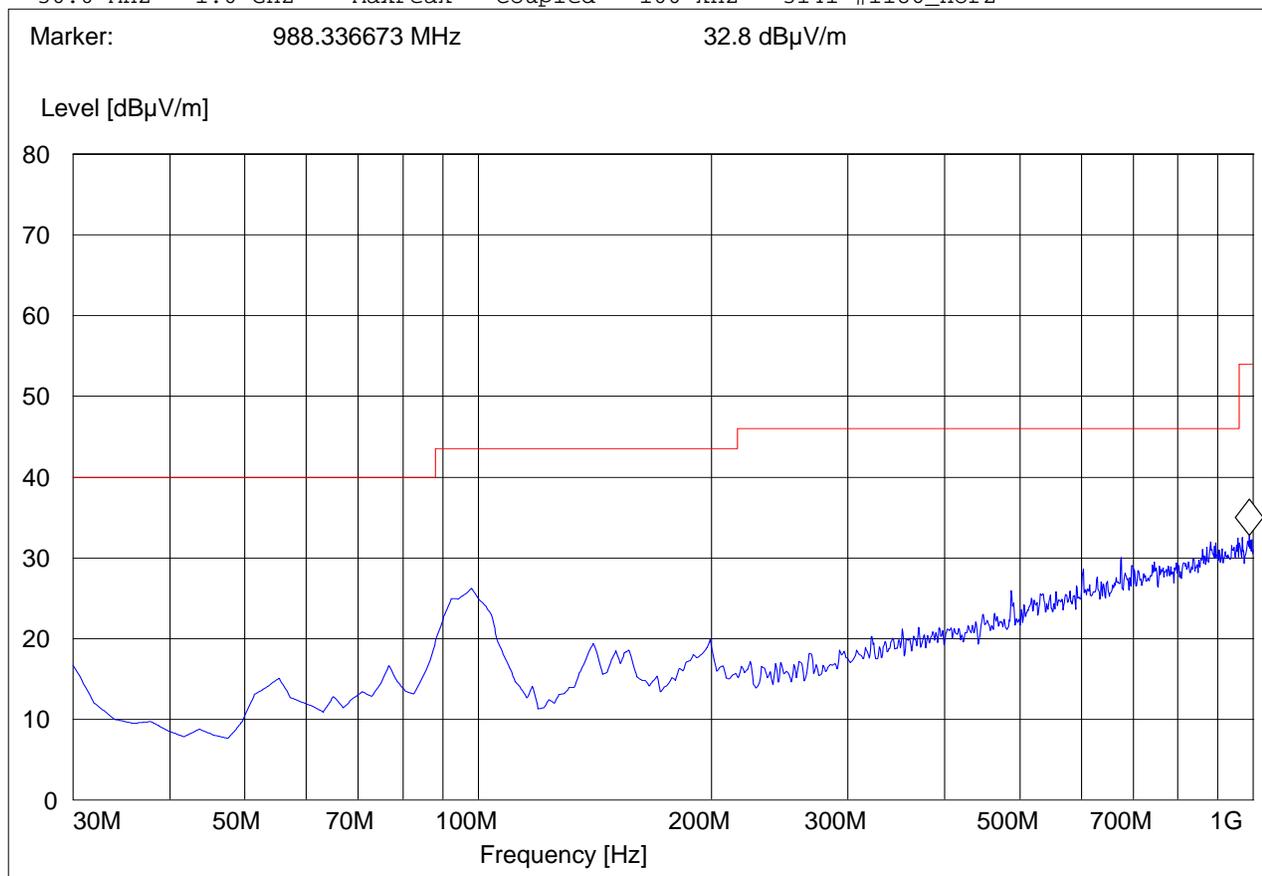

1-3GHz (2422MHz)


Note: The peak above the limit line is the carrier freq.

Note: Peak Reading vs. Average limit

EUT: IRX-4300-FCC1
 Customer:: Sony Electronics
 Test Mode: 802.11n40; CH. 1
 ANT Orientation: H
 EUT Orientation: H
 Test Engineer: Chris
 Voltage: AC
 Comments:

SWEEP TABLE: "FCC15.247_1-3G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

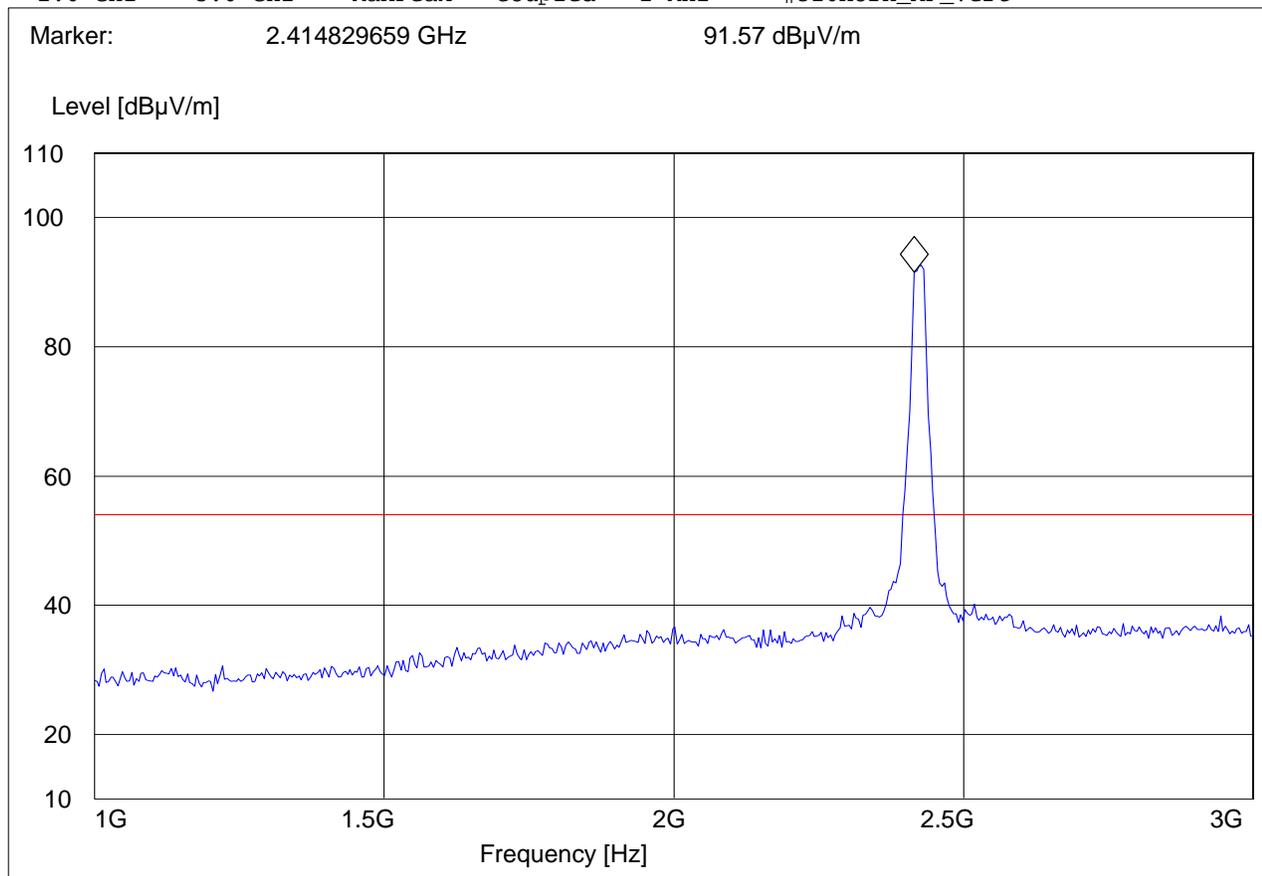

1-3GHz (2437MHz)


Note: The peak above the limit line is the carrier freq.

Note: Peak Reading vs. Average limit

EUT: IRX-4300-FCC1
 Customer:: Sony Electronics
 Test Mode: 802.11n40; CH. 6
 ANT Orientation: H
 EUT Orientation: H
 Test Engineer: Chris
 Voltage: AC
 Comments:

SWEEP TABLE: "FCC15.247_1-3G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

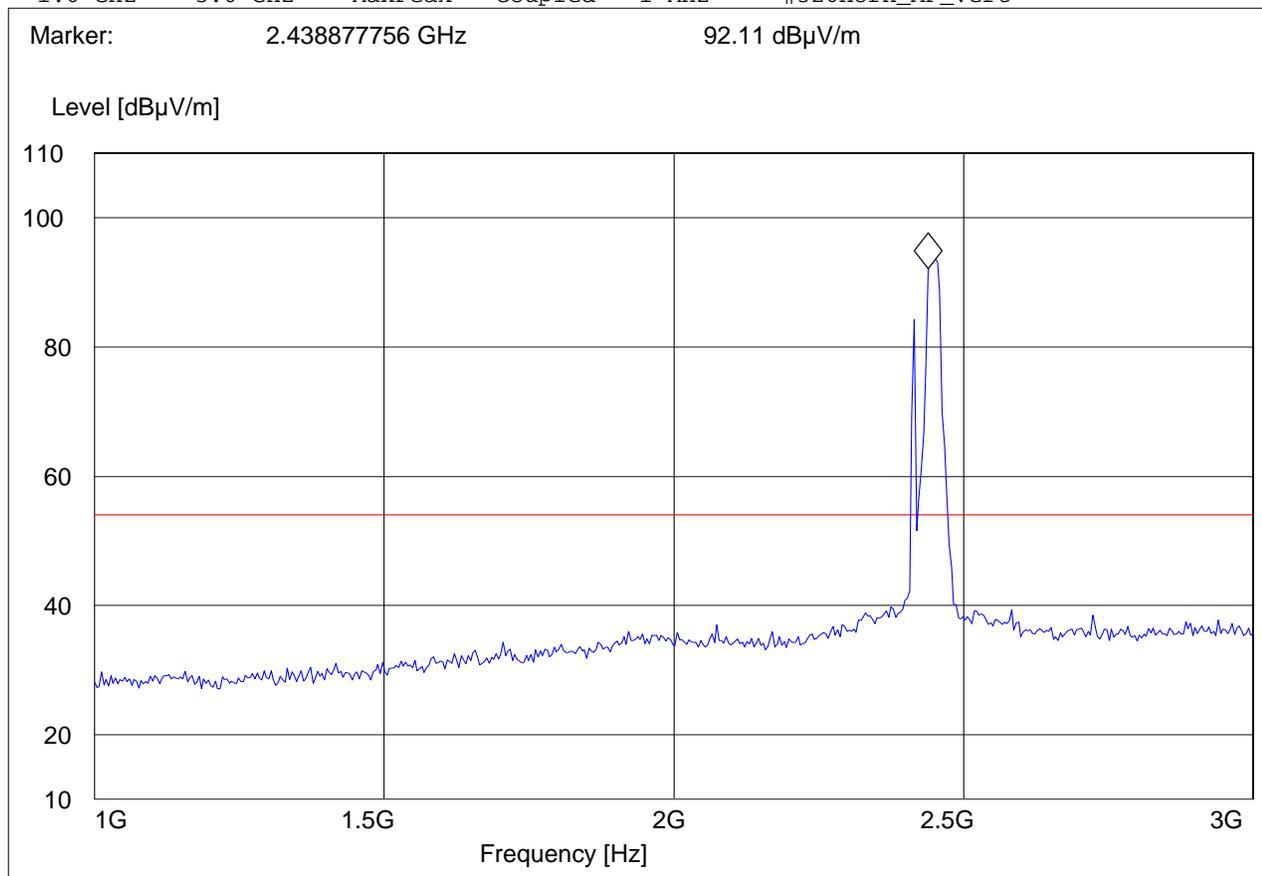

1-3GHz (2452MHz)


Note: The peak above the limit line is the carrier freq.

Note: Peak Reading vs. Average limit

EUT: IRX-4300-FCC1
 Customer:: Sony Electronics
 Test Mode: 802.11n40; CH. 10
 ANT Orientation: H
 EUT Orientation: H
 Test Engineer: Chris
 Voltage: AC
 Comments:

SWEEP TABLE: "FCC15.247_1-3G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

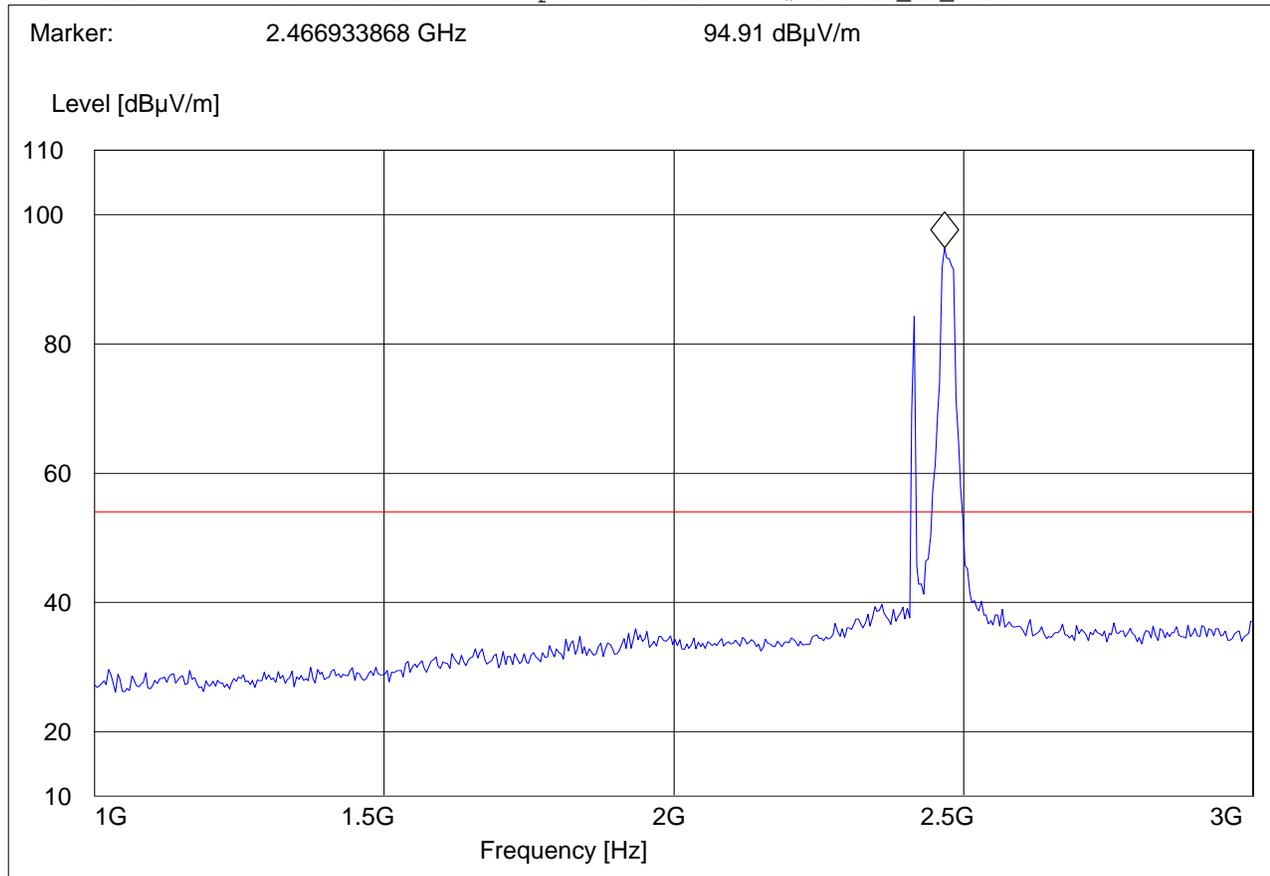


3-18GHz (2422MHz)

Note: Peak Reading vs. Average limit

EUT: IRX-4300-FCC1
 Customer:: Sony Electronics
 Test Mode: 802.11n40; CH. 1
 ANT Orientation: H
 EUT Orientation: H
 Test Engineer: Chris
 Voltage: AC
 Comments: With 2.4 GHz notch filter

SWEEP TABLE: "FCC15.247_3-18G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
3.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

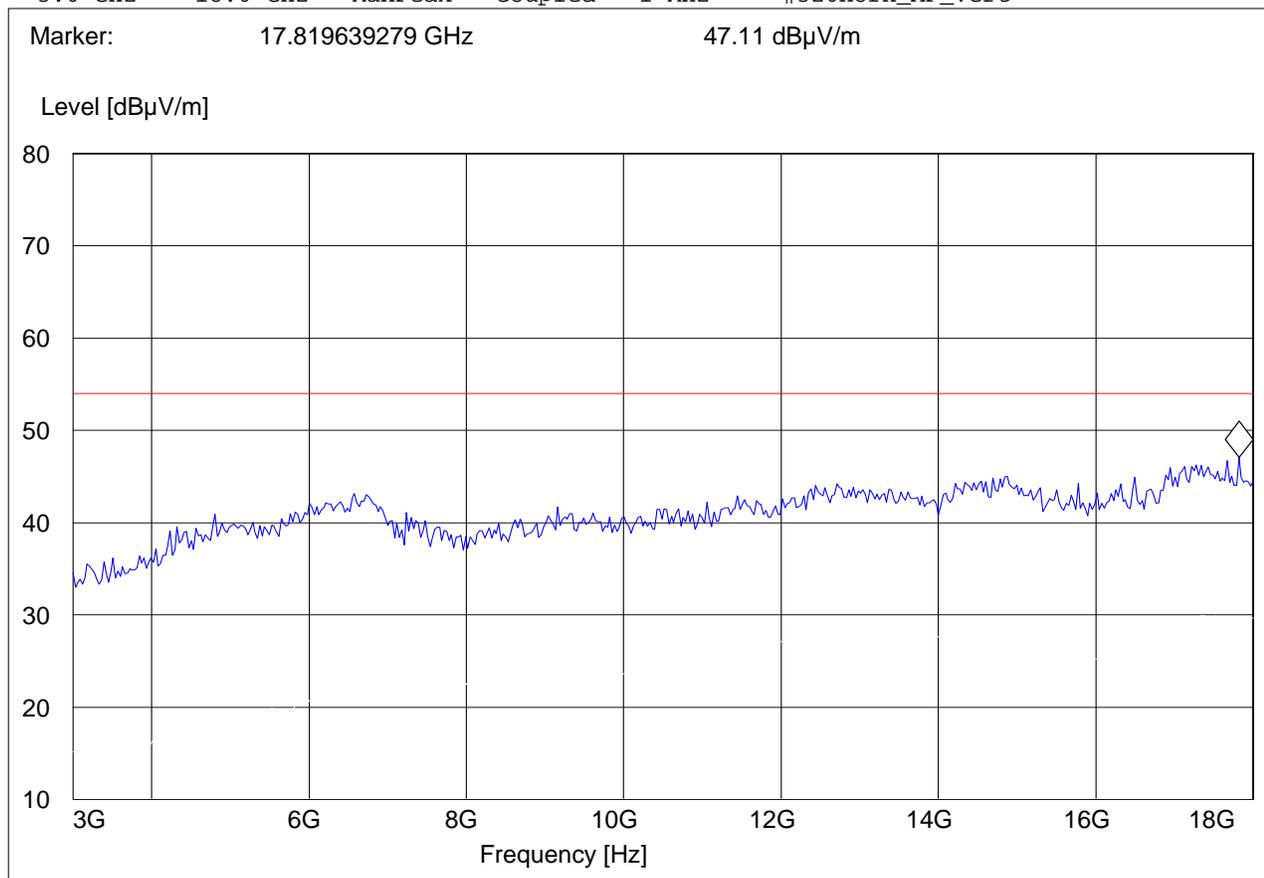

3-18GHz (2437MHz)

Note: Peak Reading vs. Average limit


EUT: IRX-4300-FCC1
Customer:: Sony Electronics
Test Mode: 802.11n40; CH. 6
ANT Orientation: H
EUT Orientation: H
Test Engineer: Chris
Voltage: AC
Comments: With 2.4 GHz notch filter

SWEEP TABLE: "FCC15.247_3-18G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
3.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

Marker: 17.188376754 GHz 47.16 dB μ V/m

Level [dB μ V/m]

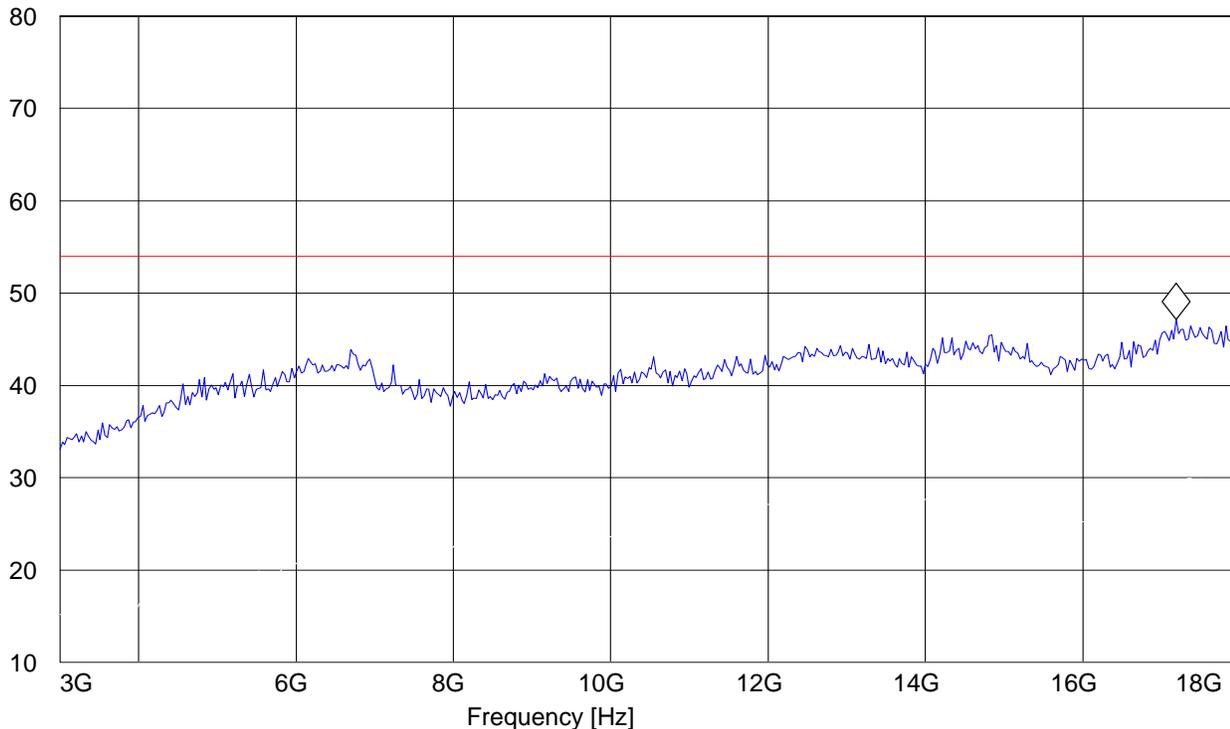

3-18GHz (2452MHz)


Note: Peak Reading vs. Average limit

EUT: IRX-4300-FCC1
Customer:: Sony Electronics
Test Mode: 802.11n40; CH. 10
ANT Orientation: H
EUT Orientation: H
Test Engineer: Chris
Voltage: AC
Comments: With 2.4 GHz notch filter

SWEEP TABLE: "FCC15.247_3-18G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
3.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

Marker: 17.819639279 GHz 46.87 dB μ V/m

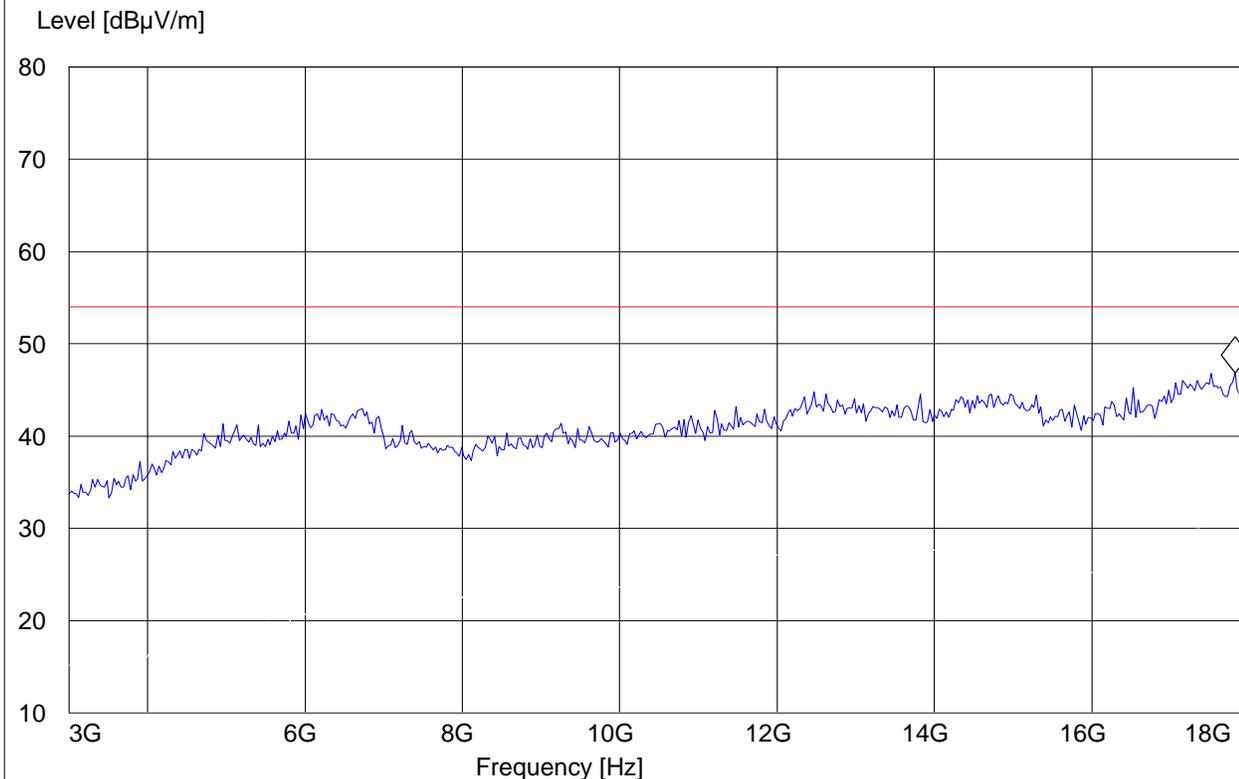

18-26.5GHz


Note: This plot is valid for low, mid, high channels (worst-case plot)

Note: Peak Reading vs. Average limit

EUT: IRX-4300-FCC1
Customer:: Sony Electronics
Test Mode: 802.11n40; CH. 6
ANT Orientation: H
EUT Orientation: H
Test Engineer: Chris
Voltage: AC
Comments:

SWEEP TABLE: "FCC15.247_18-26.5G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
18.0 GHz	26.5 GHz	MaxPeak	Coupled	100 kHz	Horn # 3116_18-40G
		MaxPeak			

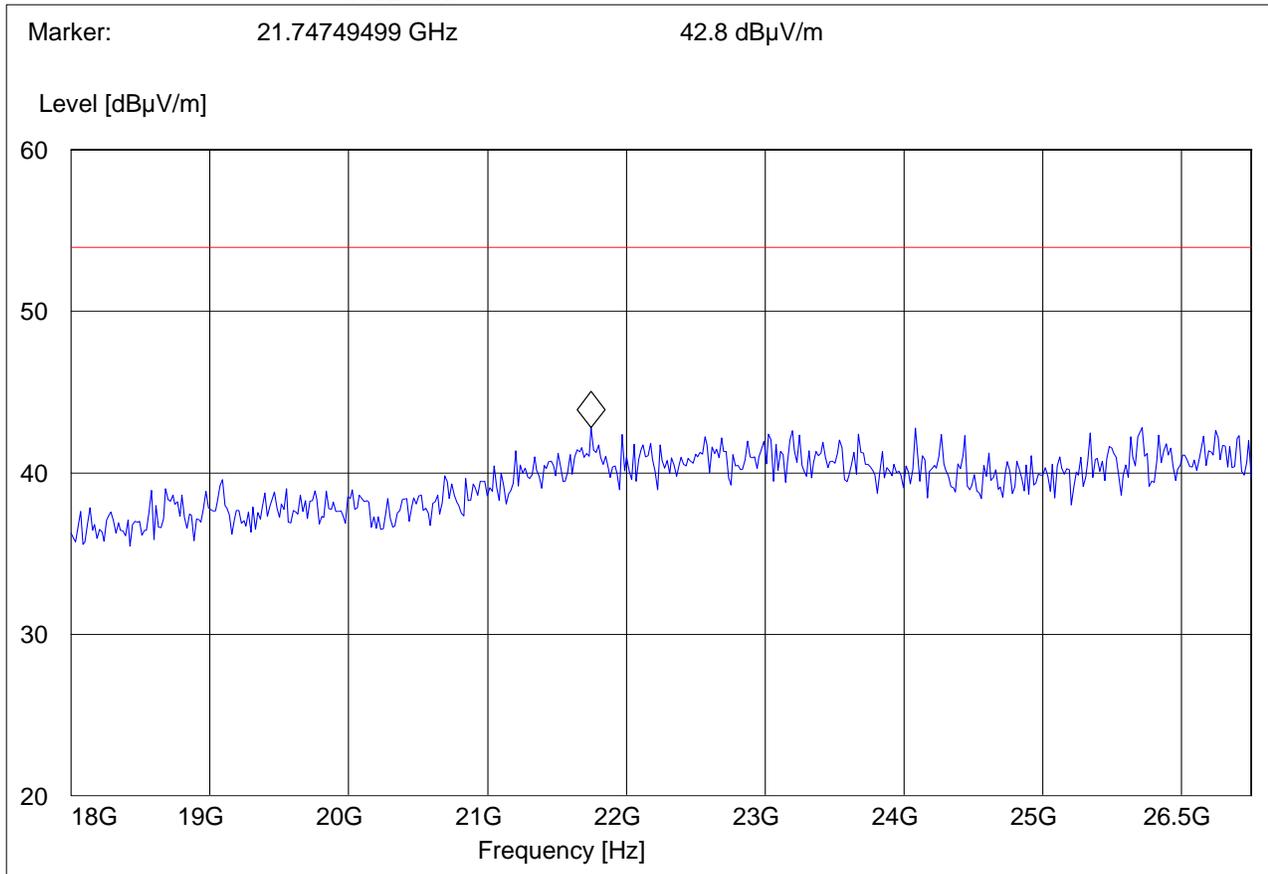

5.4 Receiver Spurious Emission § 15.209/RSS210

5.4.1 Limits

Frequency (MHz)	Field strength ($\mu\text{V/m}$)	Measurement distance (m)
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
above 960	500	3

NOTE:

1. The radiated emissions were done with different settings, using the relevant pre-amplifiers for the relevant frequency ranges. This is the reason that the graphs show different noise levels. In the range between 3 and 25 GHz very short cable connections to the antenna was used to minimize the noise level.
2. All measurements are done in peak mode using an average limit unless specified with the plots.
3. There are no measurable emissions up to 18GHz in Rx mode.
4. Receiver spurious emissions reported here are the worse case emissions for all receiver modes and between two receiving chains.


5.4.2 RESULTS Chain AB
30MHz – 1GHz, Antenna: Vertical

Note: This plot is valid for low, mid, high channels (worst-case plot).

EUT: IRX-4300-FCC1
 Customer:: Sony Electronics
 Test Mode: 802.11 RX
 ANT Orientation: V
 EUT Orientation: H
 Test Engineer: Chris
 Voltage: AC
 Comments:

SWEEP TABLE: "FCC15.247_30M-1G_Ver"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	3141-#1186_Vert

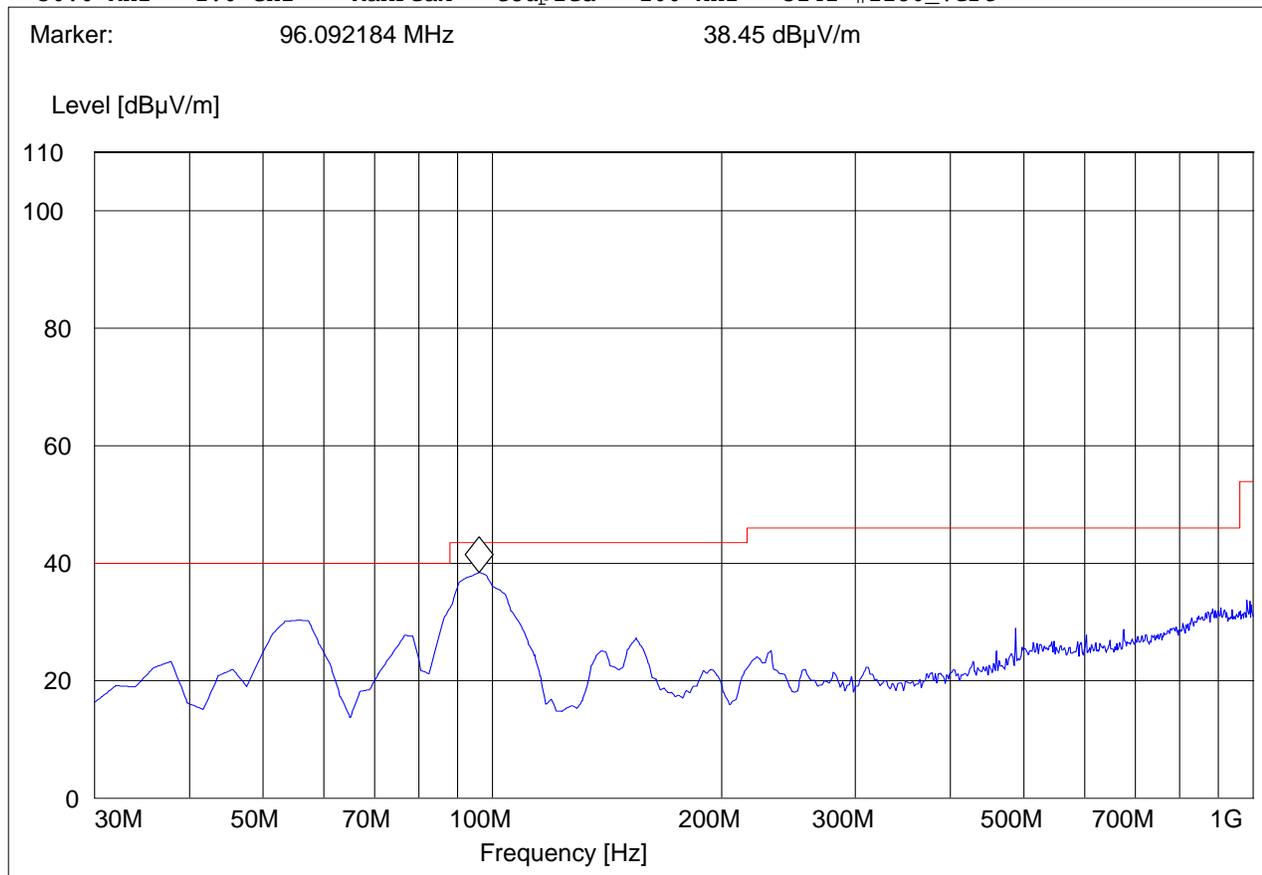


30MHz – 1GHz, Antenna: Horizontal

Note: This plot is valid for low, mid, high channels (worst-case plot).

EUT: IRX-4300-FCC1
Customer:: Sony Electronics
Test Mode: 802.11 RX
ANT Orientation: H
EUT Orientation: H
Test Engineer: Chris
Voltage: AC
Comments:

SWEEP TABLE: "FCC15.247_30M-1G_Hor"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	3141-#1186_Horz

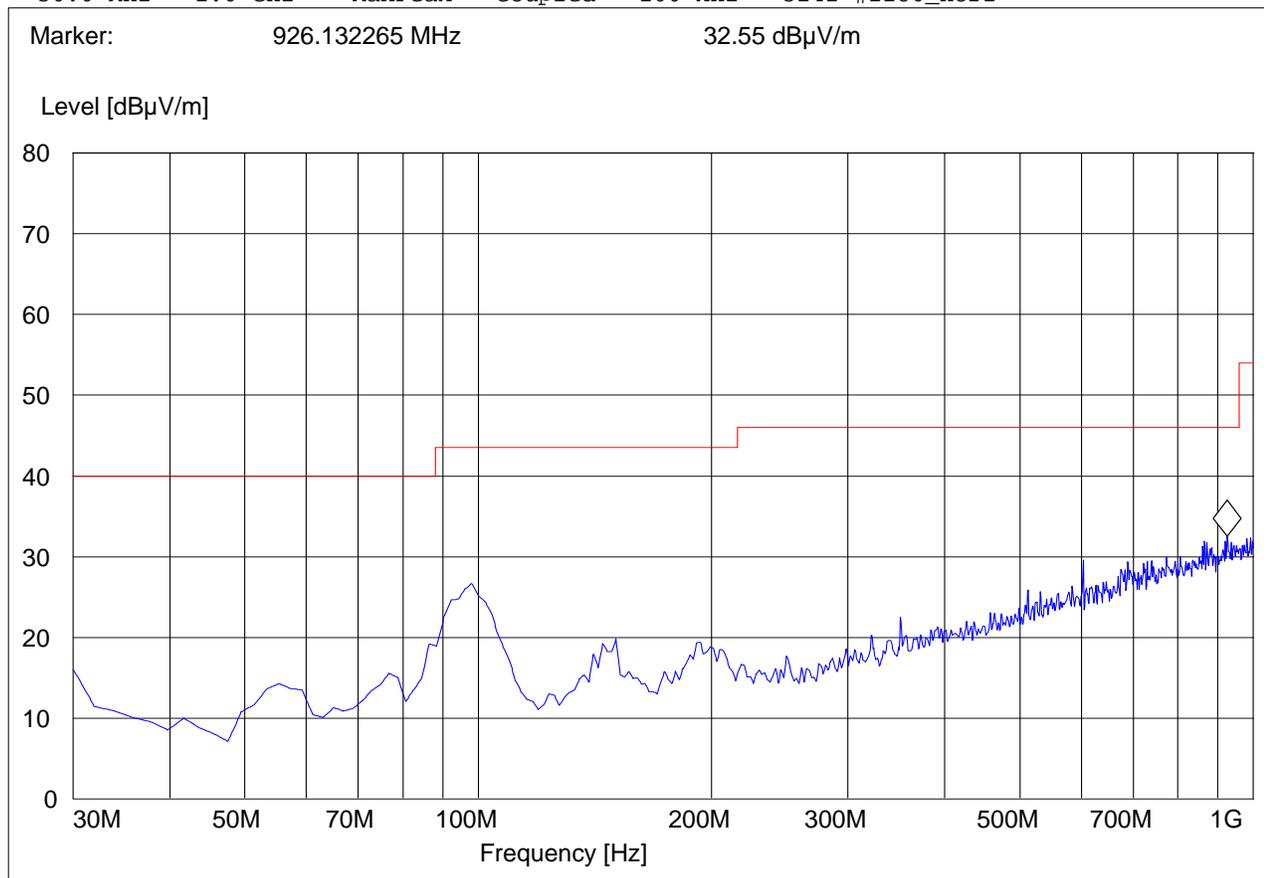


1-18GHz

Note: Peak Reading vs. Average limit

EUT / Description: IRX-4300-FCC1
Manufacturer: Sony
Operation Mode: 802.11b RX
ANT Orientation: : H
EUT Orientation:: H
Test Engineer: Chris
Voltage: AC Adapter
Comments::

SWEEP TABLE: "FCC15.247_1-18G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_horz

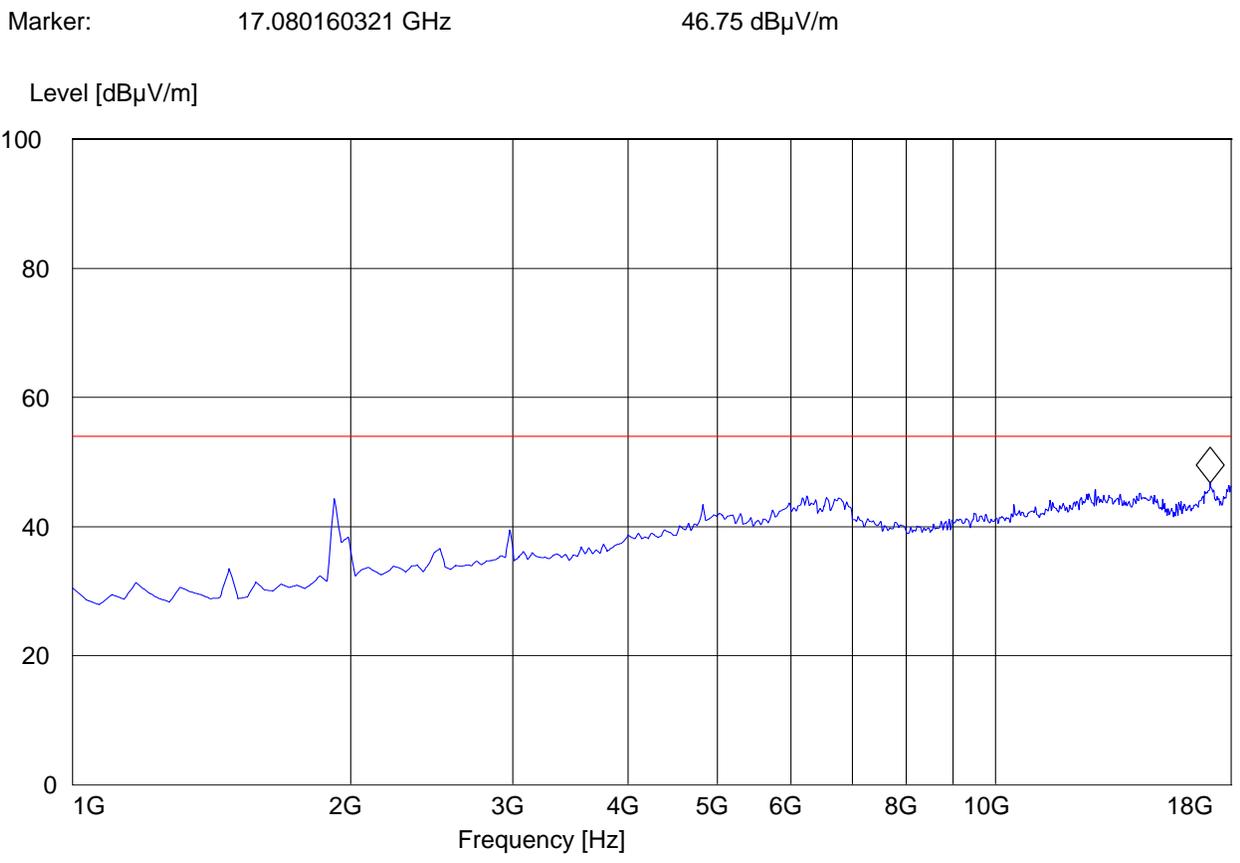


18-26.5GHz

Note: Peak Reading vs. Average limit

EUT: IRX-4300-FCC1
Customer:: Sony Electronics
Test Mode: 802.11 RX
ANT Orientation: H
EUT Orientation: H
Test Engineer: Chris
Voltage: AC
Comments:

SWEEP TABLE: "FCC15.247_18-26.5G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
18.0 GHz	26.5 GHz	MaxPeak	Coupled	100 kHz	Horn # 3116_18-40G

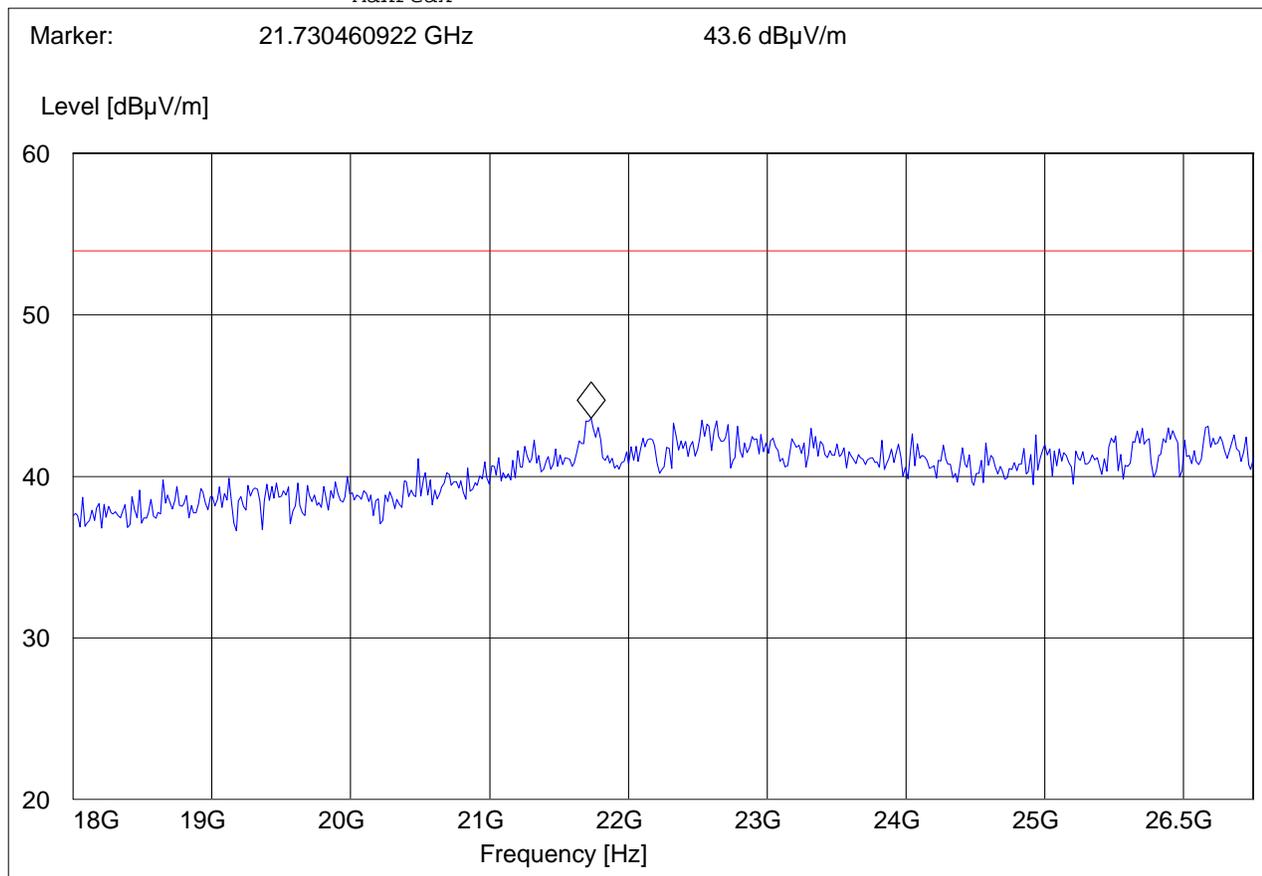


26.5-40GHz

Note: Peak Reading vs. Average limit

EUT / Description: IRX-4300-FCC1
 Customer: Sony Electronics
 Operation Mode: 802.11 RX
 ANT Orientation: : H
 EUT Orientation:: H
 Test Engineer: Chris
 Voltage: AC
 Comments::

SWEEP TABLE: "FCC15.247_26.5-40G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
26.5 GHz	40.0 GHz	MaxPeak	Coupled	1 MHz	Horn # 3116_18-40G

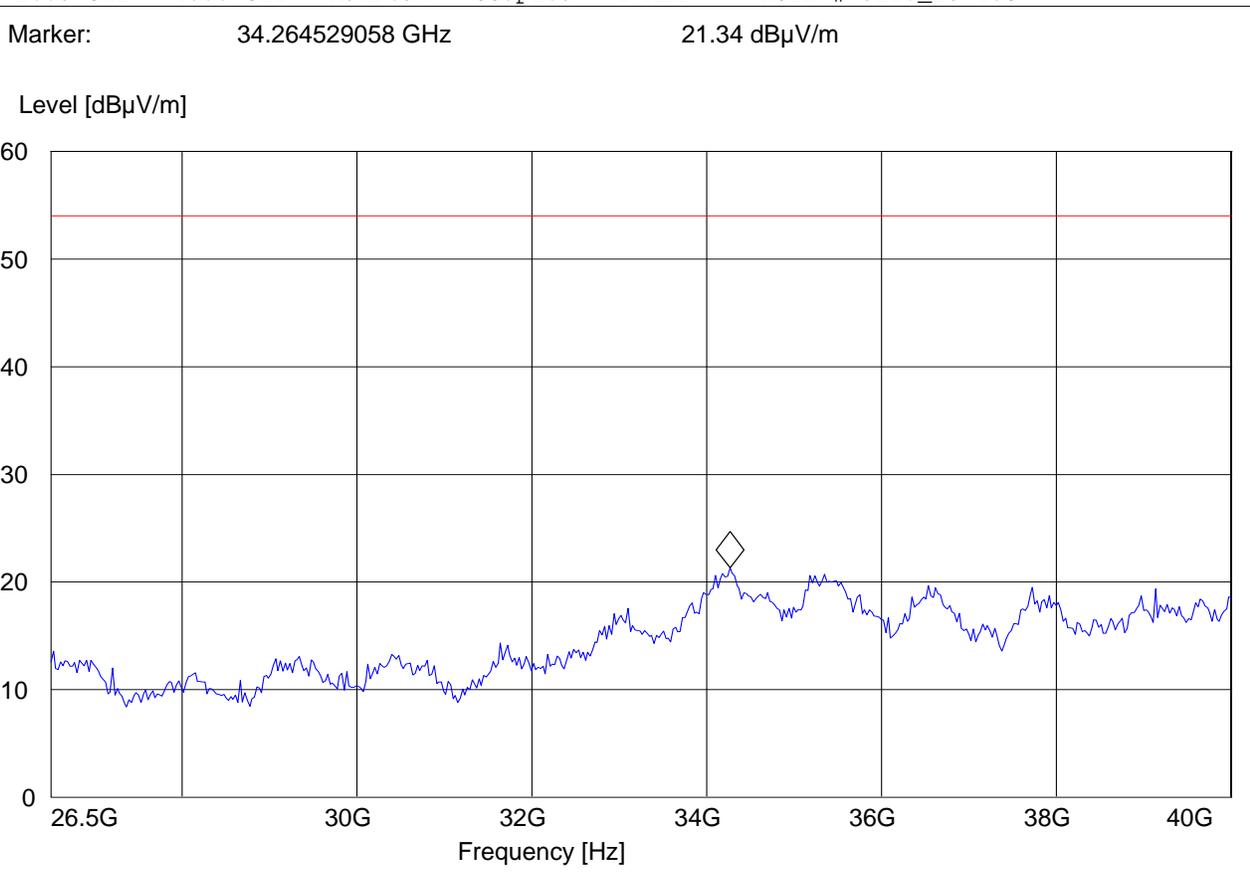

6 Conducted Measurements

6.1 6dB bandwidth and 99% bandwidth.

6.1.1 Limit

FCC15.247(a)(2) Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

RSS210 A8.2 (a): The minimum 6 dB bandwidth shall be at least 500 kHz.

6.1.2 Measurement Result:

Test Not conducted. The EUT integrates an FCC approved module. All conducted measurements are referenced from the original report for the module.

6.2 Conducted Power Measurement

6.2.1 Limit

FCC15.247 (b)(3): For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt

RSS210 A8.4(4): For systems employing digital modulation techniques operating in the bands 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz, the maximum peak conducted output power shall not exceed 1 W. Except as provided in Section A8.4(5), the e.i.r.p. shall not exceed 4 W.

6.2.2 Results

Test Not conducted. The EUT integrates an FCC approved module. All conducted measurements are referenced from the original report for the module.

6.3 Power Spectral Density

6.3.1 Limit

FCC 15.247 (e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

6.3.2 Results

Test Not conducted. The EUT integrates an FCC approved module. All conducted measurements are referenced from the original report for the module.

6.4 Conducted Spurious Emission

6.4.1 Limit

§15.247(d) & RSS-210 (A8.5): -30dBc

6.4.2 Results:

Test Not conducted. The EUT integrates an FCC approved module. All conducted measurements are referenced from the original report for the module.

6.5 AC POWER LINE CONDUCTED EMISSIONS § 15.107/207

6.5.1 LIMITS

Technical specification: 15.107 / 15.207 (Revised as of August 20, 2002)

§15.107 (a) Except for Class A digital devices, for equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μH/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Limit

Frequency of Emission (MHz)	Conducted Limit (dBμV)	
	Quasi-Peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50


* Decreases with logarithm of the frequency

ANALYZER SETTINGS: RBW = 10KHz VBW = 10KHz

Note: AC Line Conducted Emission reported here are the worse cases among all operating modes.

6.5.2 RESULTS Sub-band 1 802.11g Line:

EUT: IRX-4300-FCC1
 Manufacturer: Sony Electronics
 Test Mode: 802.11g; Ch.6
 ANT Orientation:: N/A
 EUT Orientation:: H
 Test Engineer:: Chris
 Power Supply: : AC
 Comments: : Line

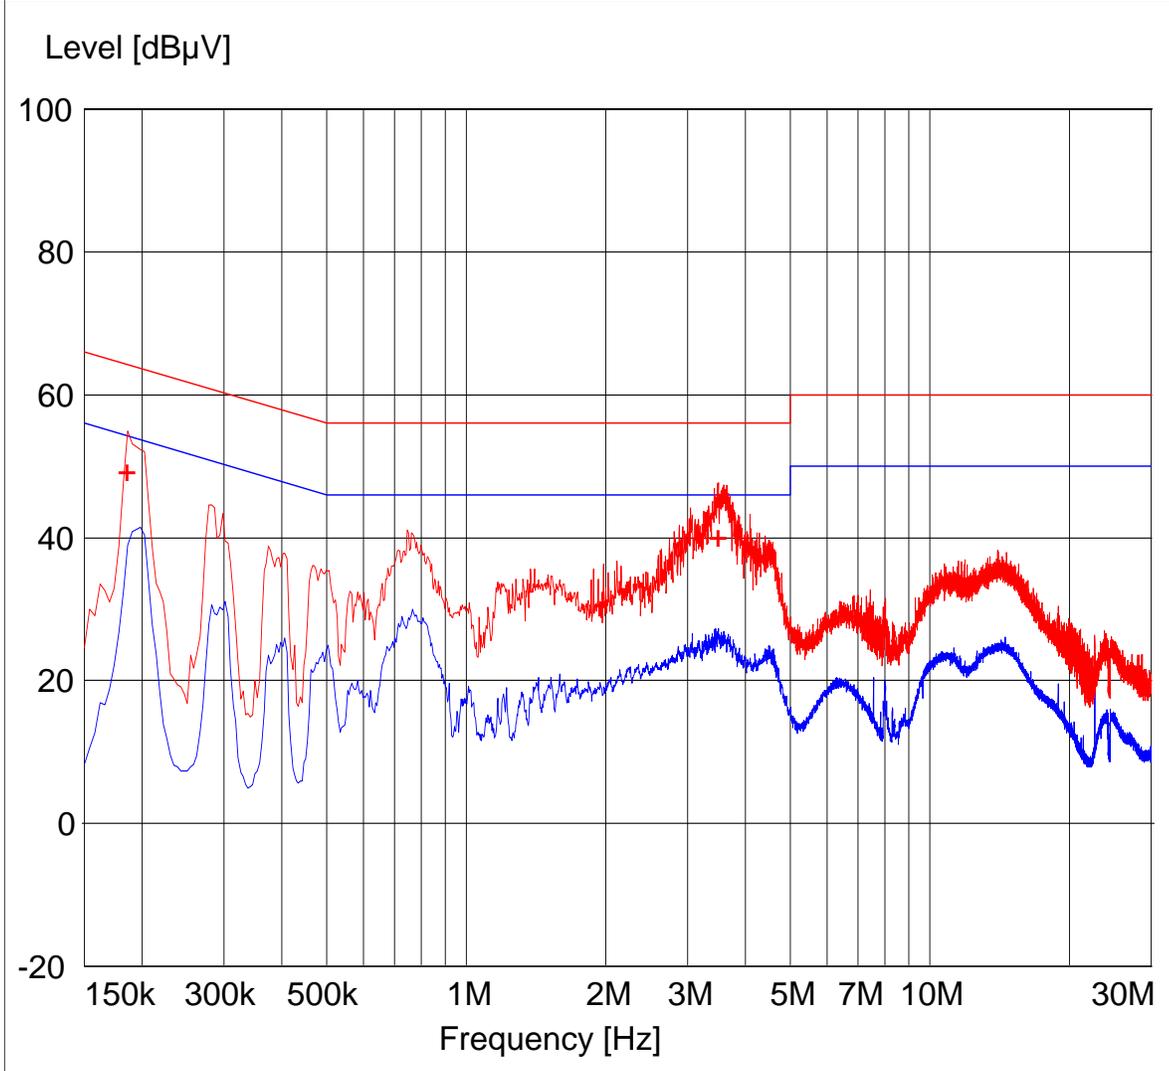

- + MES 55022 V AV QPk
- MES 55022 cond MaxPk
- MES 55022 cond Avg
- LIM EN 55022 V QP Voltage QP Limit
- LIM EN 55022 V AV Voltage AV Limit



MEASUREMENT RESULT: "55022 V AV QPk"

10/21/2008 2:42PM

Frequency	Level	Transd	Limit	Margin	Line	PE	AUX STATE
MHz	dBµV	dB	dBµV	dB			
0.186000	49.40	0.1	64	14.8	1	---	OFF
3.498000	40.30	0.3	56	15.7	1	---	OFF

LIMIT LINE: "EN 55022 V AV"

Short Description: Voltage AV Limit
4/27/1998 2:24PM

Frequency	Level
MHz	dBµV
0.150000	56.00
0.500000	46.00
5.000000	46.00
5.000000	50.00
30.000000	50.00


LIMIT LINE: "EN 55022 V QP"

Short Description: Voltage QP Limit
4/27/1998 2:24PM

Frequency	Level
MHz	dBµV
0.150000	66.00
0.500000	56.00
5.000000	56.00
5.000000	60.00
30.000000	60.00

6.5.3 RESULTS Sub-band 1 802.11g Neutral:

EUT: IRX-4300-FCC1
Manufacturer: Sony Electronics
Test Mode: 802.11g; Ch.6
ANT Orientation:: N/A
EUT Orientation:: H
Test Engineer:: Chris
Power Supply: : AC
Comments: : NEUTRAL

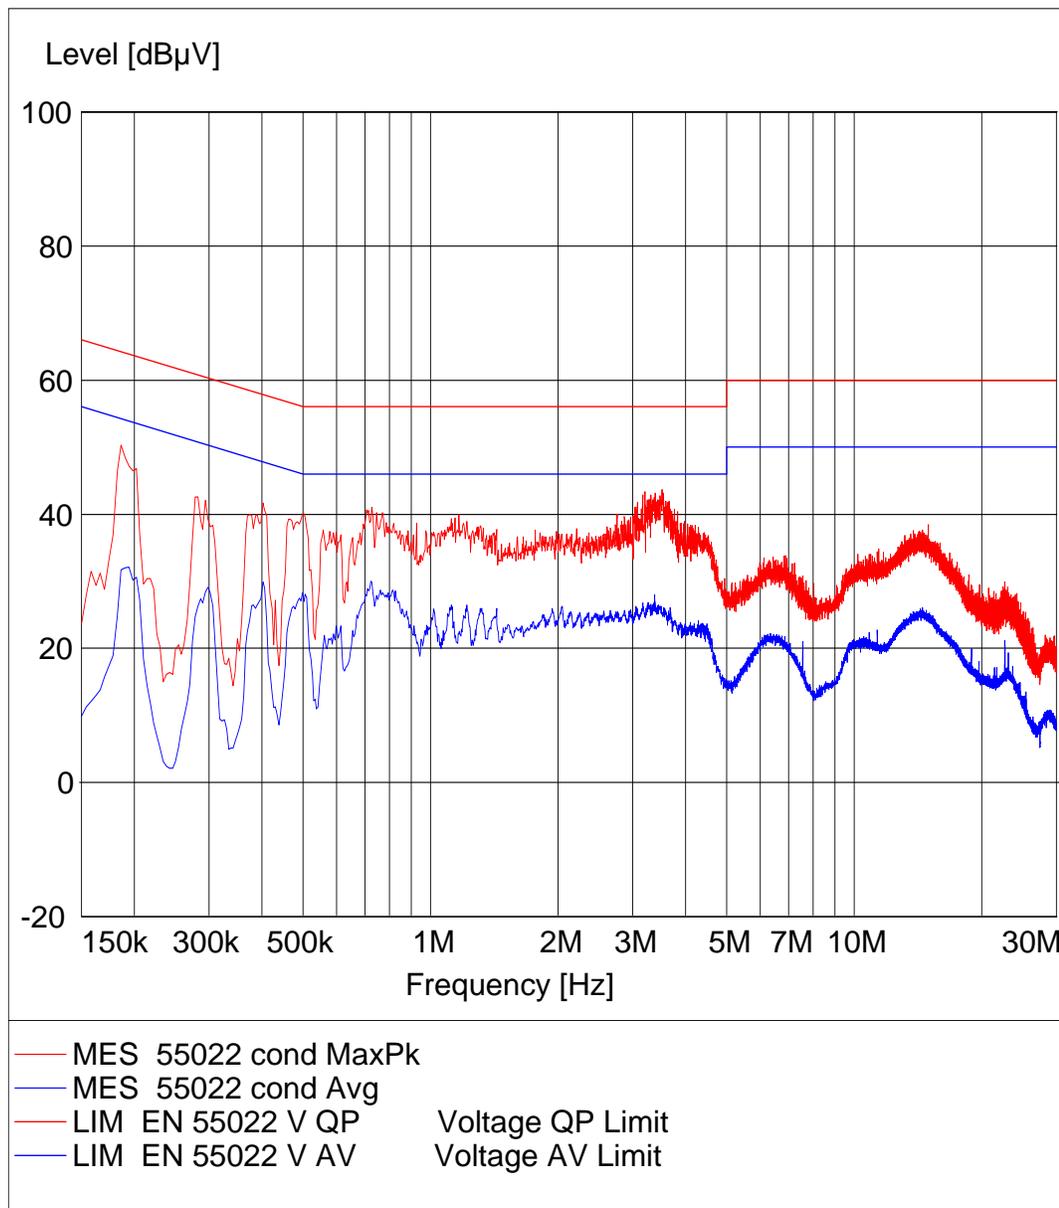

LIMIT LINE: "EN 55022 V AV"


Short Description:		Voltage AV Limit
4/27/1998 2:24PM		
Frequency	Level	
	MHz	dBuV
0.150000	56.00	
0.500000	46.00	
5.000000	46.00	
5.000000	50.00	
30.000000	50.00	

LIMIT LINE: "EN 55022 V QP"

Short Description:		Voltage QP Limit
4/27/1998 2:24PM		
Frequency	Level	
	MHz	dBuV
0.150000	66.00	
0.500000	56.00	
5.000000	56.00	
5.000000	60.00	
30.000000	60.00	

6.5.4 RESULTS Sub-band 1 802.11n HT40 Line:

EUT: IRX-4300-FCC1
 Manufacturer: Sony Electronics
 Test Mode: 802.11n40; Ch.6
 ANT Orientation:: N/A
 EUT Orientation:: H
 Test Engineer:: Chris
 Power Supply: : AC
 Comments: : Line

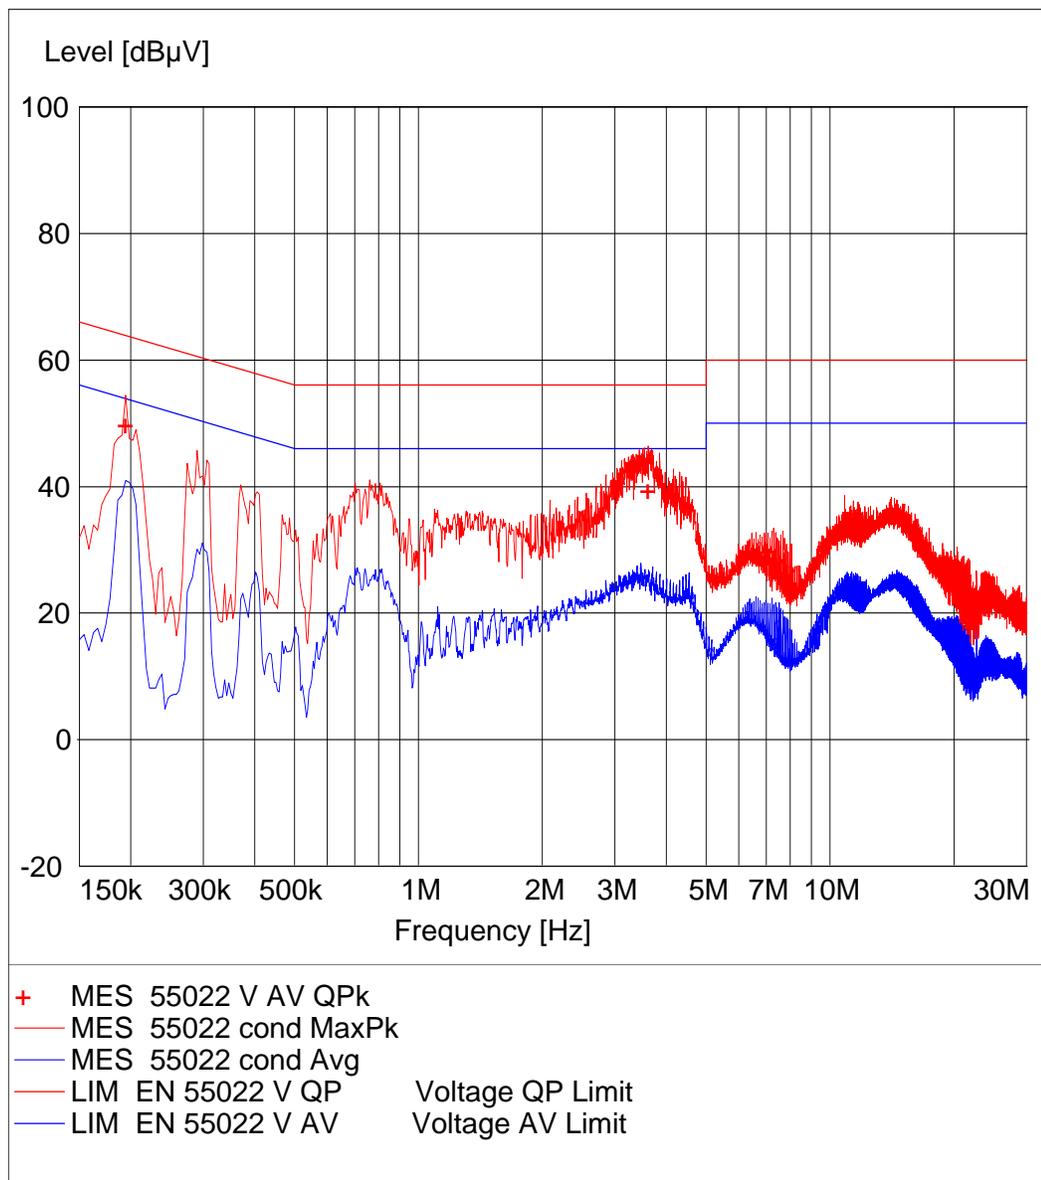



MEASUREMENT RESULT: "55022 V AV QPk"

10/21/2008 2:50PM

Frequency	Level	Transd	Limit	Margin	Line	PE	AUX STATE
MHz	dBµV	dB	dBµV	dB			
0.194000	49.80	0.1	64	14.1	1	---	OFF
3.614000	39.50	0.3	56	16.5	1	---	OFF

LIMIT LINE: "EN 55022 V AV"

Short Description: Voltage AV Limit

4/27/1998 2:24PM

Frequency	Level
MHz	dBµV
0.150000	56.00
0.500000	46.00
5.000000	46.00
5.000000	50.00
30.000000	50.00

LIMIT LINE: "EN 55022 V QP"


Short Description: Voltage QP Limit

4/27/1998 2:24PM

Frequency	Level
MHz	dBµV
0.150000	66.00
0.500000	56.00
5.000000	56.00
5.000000	60.00
30.000000	60.00

6.5.5 RESULTS Sub-band 1 802.11n HT40 Neutral:

EUT: IRX-4300-FCC1
Manufacturer: Sony Electronics
Test Mode: 802.11n40; Ch.6
ANT Orientation:: N/A
EUT Orientation:: H
Test Engineer:: Chris
Power Supply: : AC
Comments: : Neutral

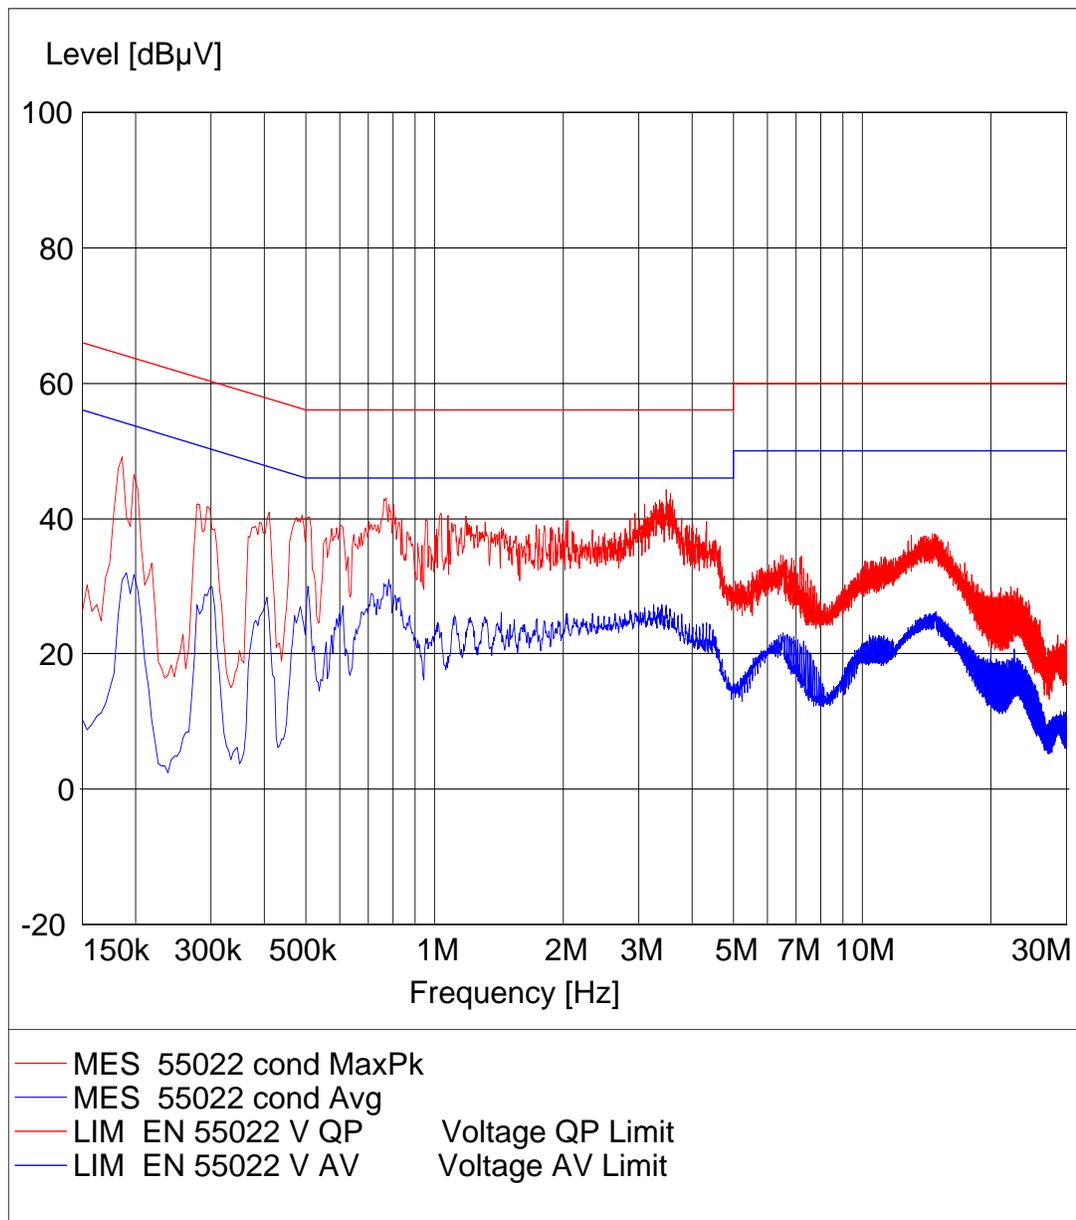

LIMIT LINE: "EN 55022 V AV"


Short Description:		Voltage AV Limit
4/27/1998 2:24PM		
Frequency	Level	
	MHz	dBuV
0.150000	56.00	
0.500000	46.00	
5.000000	46.00	
5.000000	50.00	
30.000000	50.00	

LIMIT LINE: "EN 55022 V QP"

Short Description:		Voltage QP Limit
4/27/1998 2:24PM		
Frequency	Level	
	MHz	dBuV
0.150000	66.00	
0.500000	56.00	
5.000000	56.00	
5.000000	60.00	
30.000000	60.00	

6.5.6 RESULTS Receiver mode Line:

EUT: IRX-4300-FCC1
 Manufacturer: Sony Electronics
 Test Mode: 802.11 RX
 ANT Orientation:: N/A
 EUT Orientation:: H
 Test Engineer:: Chris
 Power Supply: : AC
 Comments: : Line

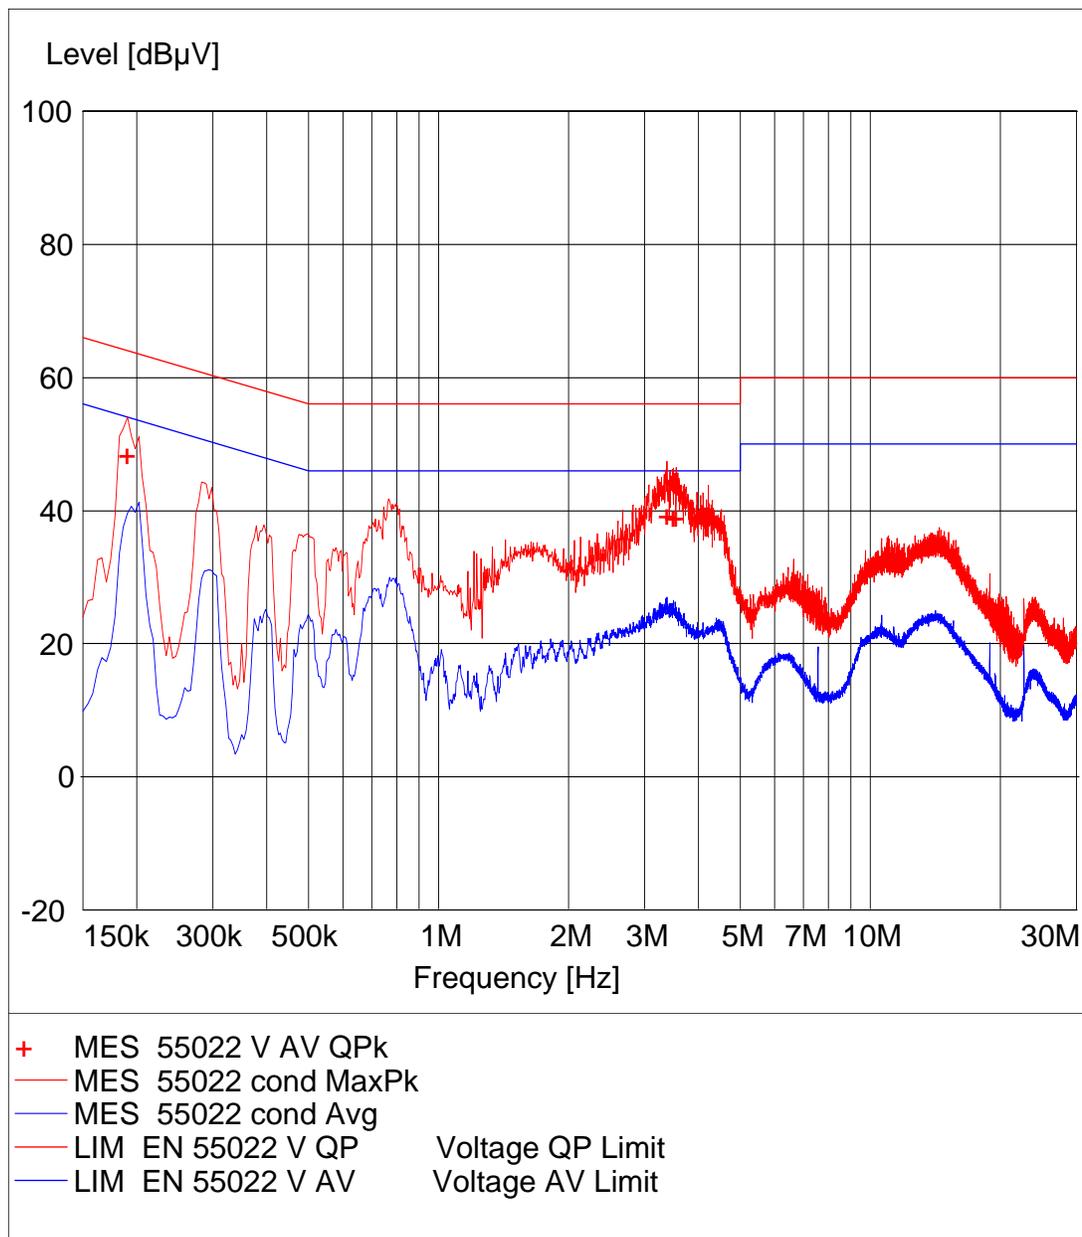



MEASUREMENT RESULT: "55022 V AV QPk"

10/21/2008 3:04PM

Frequency	Level	Transd	Limit	Margin	Line	PE	AUX STATE
MHz	dBµV	dB	dBµV	dB			
0.190000	48.50	0.1	64	15.5	1	---	OFF
3.378000	39.40	0.2	56	16.6	1	---	OFF
3.502000	39.10	0.3	56	16.9	1	---	OFF
3.550000	39.00	0.3	56	17.0	1	---	OFF

LIMIT LINE: "EN 55022 V AV"

Short Description: Voltage AV Limit

4/27/1998 2:24PM

Frequency	Level
MHz	dBµV
0.150000	56.00
0.500000	46.00
5.000000	46.00
5.000000	50.00
30.000000	50.00

LIMIT LINE: "EN 55022 V QP"


Short Description: Voltage QP Limit

4/27/1998 2:24PM

Frequency	Level
MHz	dBµV
0.150000	66.00
0.500000	56.00
5.000000	56.00
5.000000	60.00
30.000000	60.00

6.5.7 RESULTS Receiver mode Neutral:

EUT: IRX-4300-FCC1
Manufacturer: Sony Electronics
Test Mode: 802.11 RX
ANT Orientation:: N/A
EUT Orientation:: H
Test Engineer:: Chris
Power Supply: : AC
Comments: : Neutral

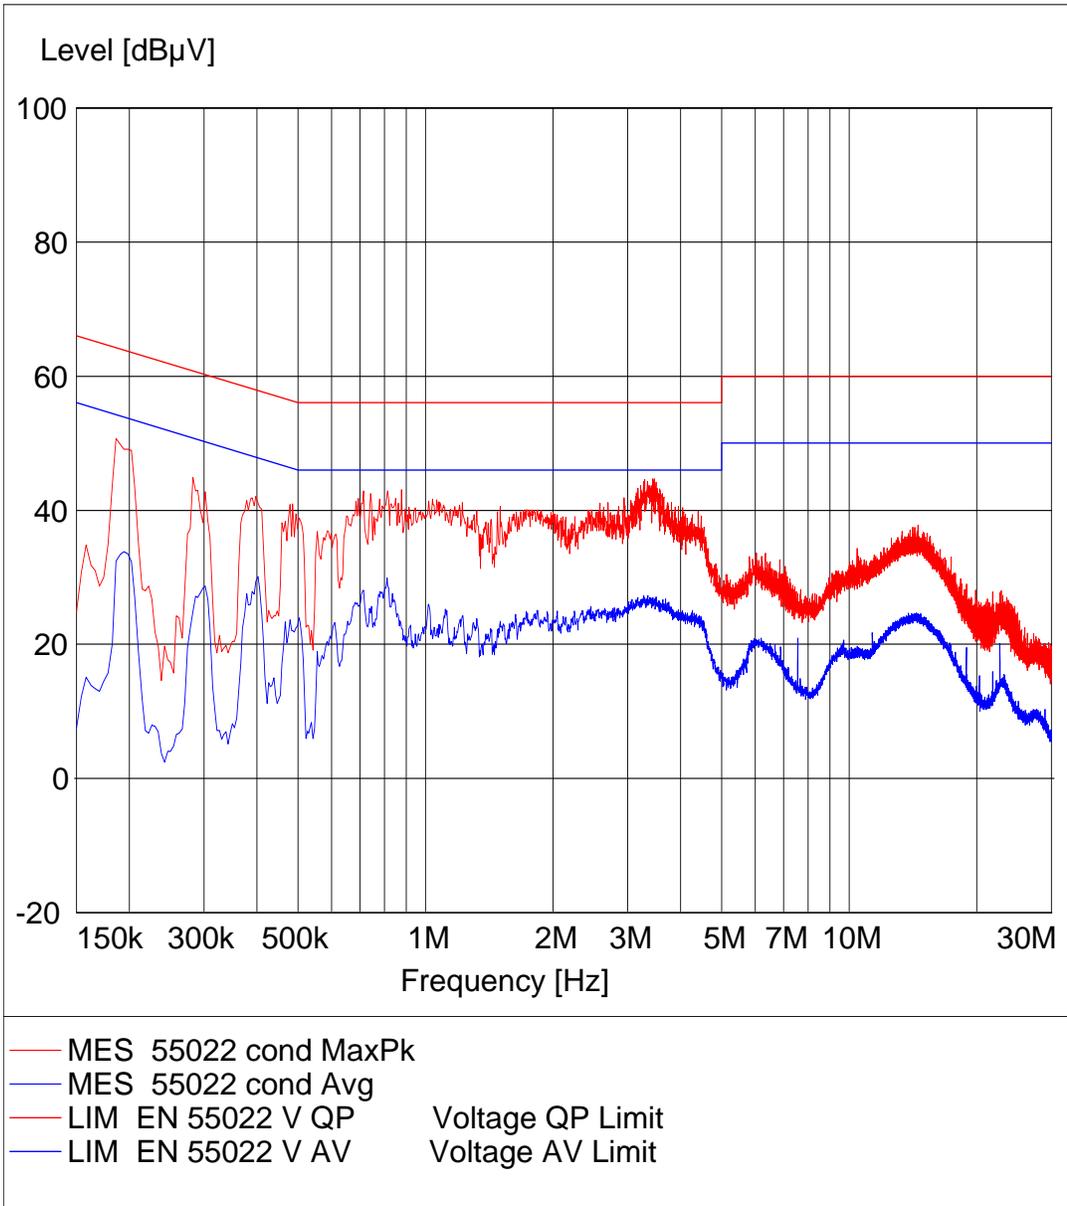

LIMIT LINE: "EN 55022 V AV"

Short Description:		Voltage AV Limit
4/27/1998 2:24PM		
Frequency	Level	
	MHz	dBuV
0.150000	56.00	
0.500000	46.00	
5.000000	46.00	
5.000000	50.00	
30.000000	50.00	

LIMIT LINE: "EN 55022 V QP"

Short Description:		Voltage QP Limit
4/27/1998 2:24PM		
Frequency	Level	
	MHz	dBuV
0.150000	66.00	
0.500000	56.00	
5.000000	56.00	
5.000000	60.00	
30.000000	60.00	


7 TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS

No	Instrument/Ancillary	Type	Manufacturer	Serial No.	Cal Due	Interval
01	Spectrum Analyzer	ESIB 40	Rohde & Schwarz	100107	May 2009	1 year
02	Spectrum Analyzer	FSEM 30	Rohde & Schwarz	100017	August 2009	1 year
03	Signal Generator	SMY02	Rohde & Schwarz	836878/011	May 2009	1 year
04	Power-Meter	NRVD	Rohde & Schwarz	0857.8008.02	May 2009	1 year
05	Biconilog Antenna	3141	EMCO	0005-1186	June 2009	1 year
06	Horn Antenna (1-18GHz)	SAS-200/571	AH Systems	325	June 2009	1 year
07	Horn Antenna (18-26.5GHz)	3160-09	EMCO	1240	June 2009	1 year
08	Power Splitter	11667B	Hewlett Packard	645348	n/a	n/a
09	Climatic Chamber	VT4004	Voltsch	G1115	May 2009	1 year
10	High Pass Filter	5HC2700	Trilithic Inc.	9926013	n/a	n/a
11	High Pass Filter	4HC1600	Trilithic Inc.	9922307	n/a	n/a
12	Pre-Amplifier	JS4-00102600	Miteq	00616	May 2009	1 year
13	Power Sensor	URV5-Z2	Rohde & Schwarz	DE30807	May 2009	1 year
14	Digital Radio Comm. Tester	CMD-55	Rohde & Schwarz	847958/008	May 2009	1 year
15	Universal Radio Comm. Tester	CMU 200	Rohde & Schwarz	832221/06	May 2009	1 year
16	LISN	ESH3-Z5	Rohde & Schwarz	836679/003	May 2009	1 year
17	Loop Antenna	6512	EMCO	00049838	July 2009	2 years

8 BLOCK DIAGRAMS

Radiated Testing

ANECHOIC CHAMBER

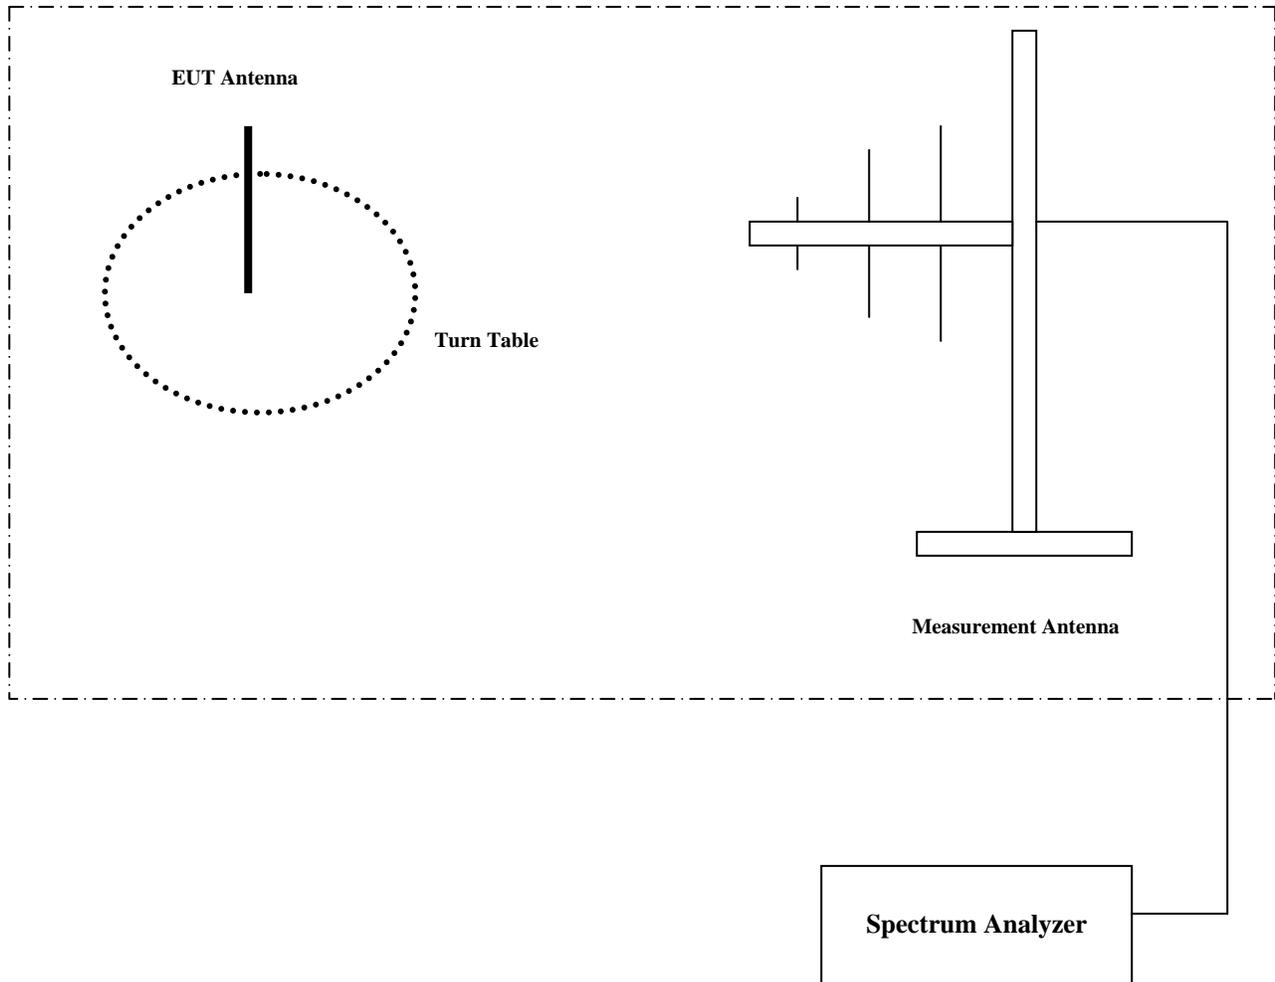

Test Report #: EMC_SONYE_025_08001_15_247_PCG1P1L



Date of Report: 2008-10-24

Page 78 of 78

9 Revision History

2008-10-24: First Issue