




System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	10/22/2008 5:03:19 PM	DUT Battery Model/No:	
Filename:	lap_384.txt	Probe Serial Number:	L0116
Ambient Temperature:	21.7°C	Liquid Simulant:	850
Device Under Test:	Sony	Relative Permittivity:	54.41
Relative Humidity:	45.6%	Conductivity:	0.982
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	180°	Max SAR X-axis Location:	12.00 mm
DUT Position:	Lap	Max SAR Y-axis Location:	34.00 mm
Antenna Configuration:	Integral	Max E Field:	9.16 V/m
Test Frequency:	836.52MHz	SAR 1g:	0.083 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	
Conversion Factors:	.486 / .486 / .486	SAR Start:	0.017 W/kg
Type of Modulation:		SAR End:	0.017 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-4.38 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	10/15/08
Input Power Level:	All Bits up	Extrapolation:	poly4

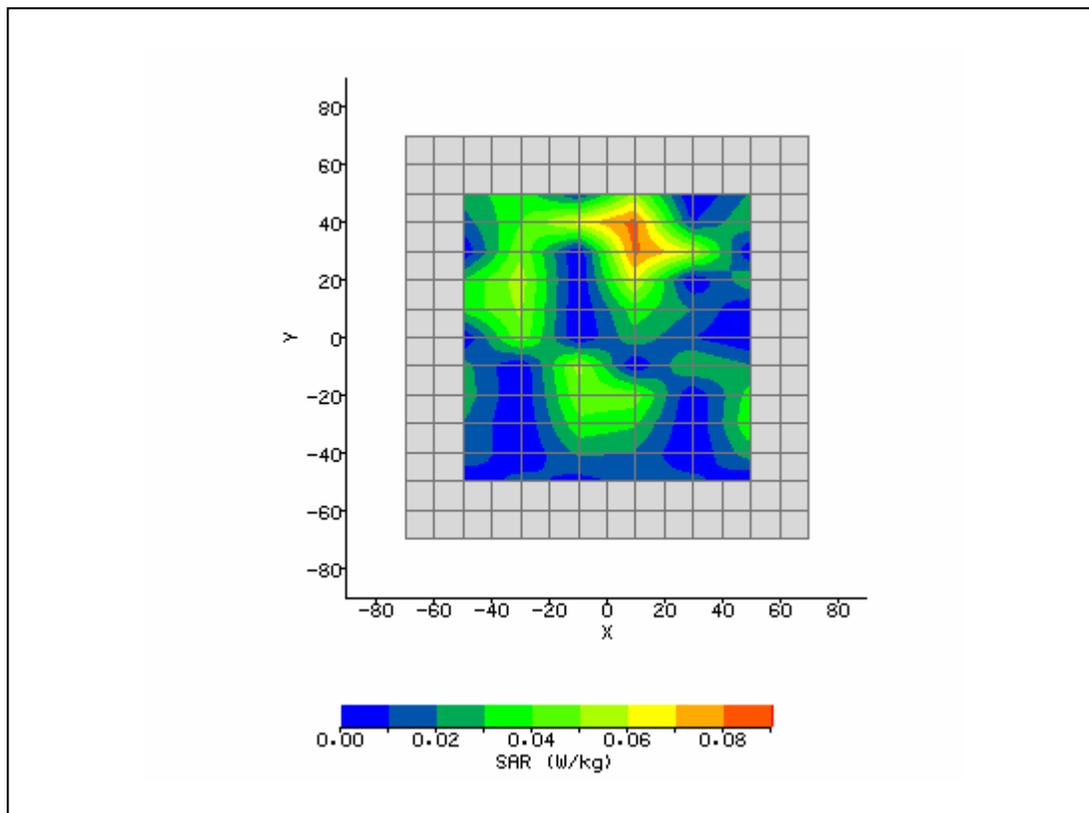


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	10/22/2008 5:20:46 PM	DUT Battery Model/No:	
Filename:	front_384.txt	Probe Serial Number:	L0116
Ambient Temperature:	21.7°C	Liquid Simulant:	850
Device Under Test:	Sony	Relative Permittivity:	54.41
Relative Humidity:	45.6%	Conductivity:	0.982
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	180°	Max SAR X-axis Location:	-50.00 mm
DUT Position:	Front	Max SAR Y-axis Location:	-25.00 mm
Antenna Configuration:	Integral	Max E Field:	7.40 V/m
Test Frequency:	836.52MHz	SAR 1g:	0.067 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	
Conversion Factors:	.486 / .486 / .486	SAR Start:	0.012 W/kg
Type of Modulation:		SAR End:	0.012 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	3.27 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	10/15/08
Input Power Level:	All Bits up	Extrapolation:	poly4

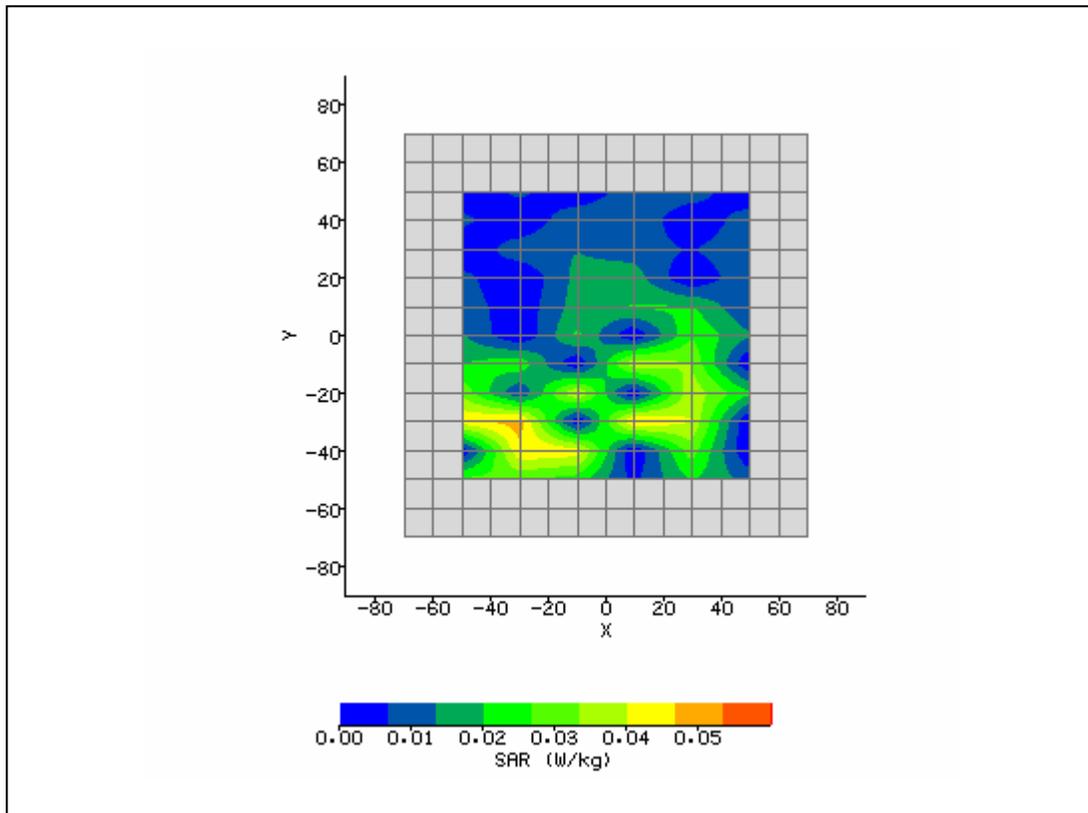


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	10/22/2008 1:16:46 PM	DUT Battery Model/No:	
Filename:	front_600.txt	Probe Serial Number:	L0116
Ambient Temperature:	21.7°C	Liquid Simulant:	1900
Device Under Test:	Sony	Relative Permittivity:	52.96
Relative Humidity:	45.6%	Conductivity:	1.513
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	180°	Max SAR X-axis Location:	18.00 mm
DUT Position:	Lap	Max SAR Y-axis Location:	10.00 mm
Antenna Configuration:	Integral	Max E Field:	18.08 V/m
Test Frequency:	1880MHz	SAR 1g:	0.596 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	
Conversion Factors:	.610 / .610 / .610	SAR Start:	0.030 W/kg
Type of Modulation:		SAR End:	0.031 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	3.19 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	10/15/08
Input Power Level:	All Bits up	Extrapolation:	poly4

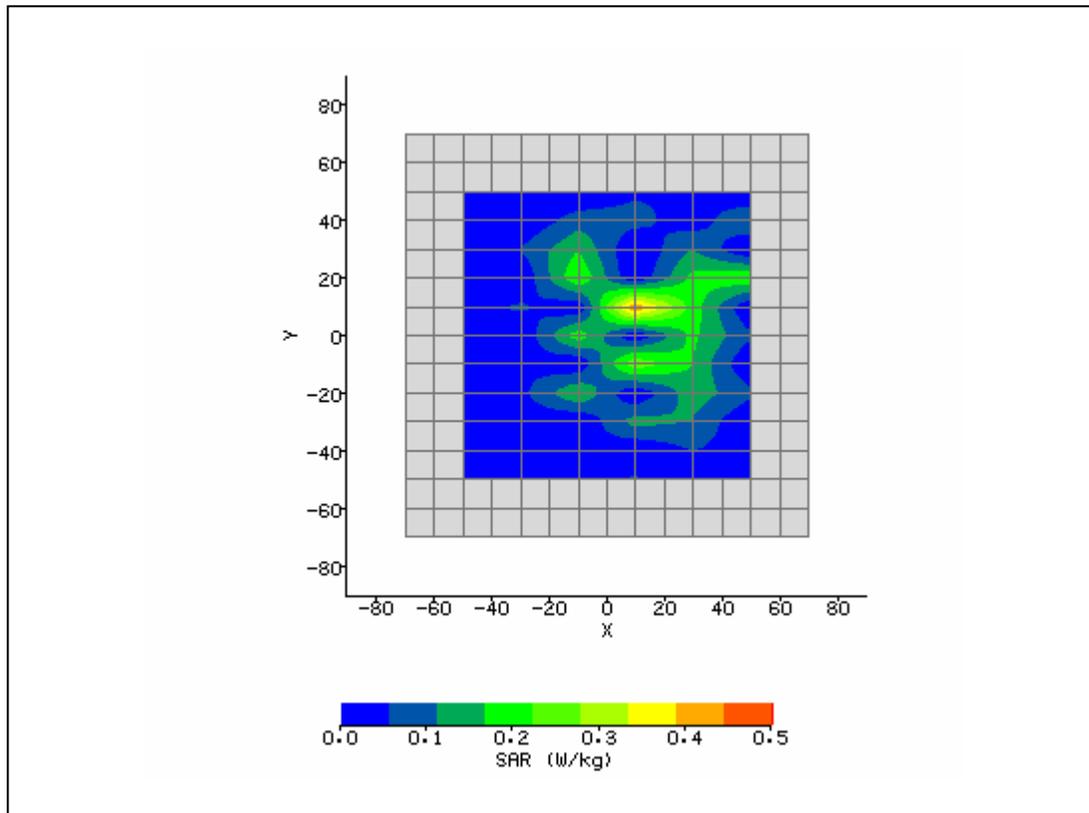


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	10/22/2008 3:45:20 PM	DUT Battery Model/No:	
Filename:	front_600.txt	Probe Serial Number:	L0116
Ambient Temperature:	21.7°C	Liquid Simulant:	1900
Device Under Test:	Sony	Relative Permittivity:	52.96
Relative Humidity:	45.6%	Conductivity:	1.513
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	180°	Max SAR X-axis Location:	22.00 mm
DUT Position:	Front	Max SAR Y-axis Location:	-29.00 mm
Antenna Configuration:	Integral	Max E Field:	5.88 V/m
Test Frequency:	1880MHz	SAR 1g:	0.057 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	
Conversion Factors:	.610 / .610 / .610	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	10/15/08
Input Power Level:	All Bits up	Extrapolation:	poly4

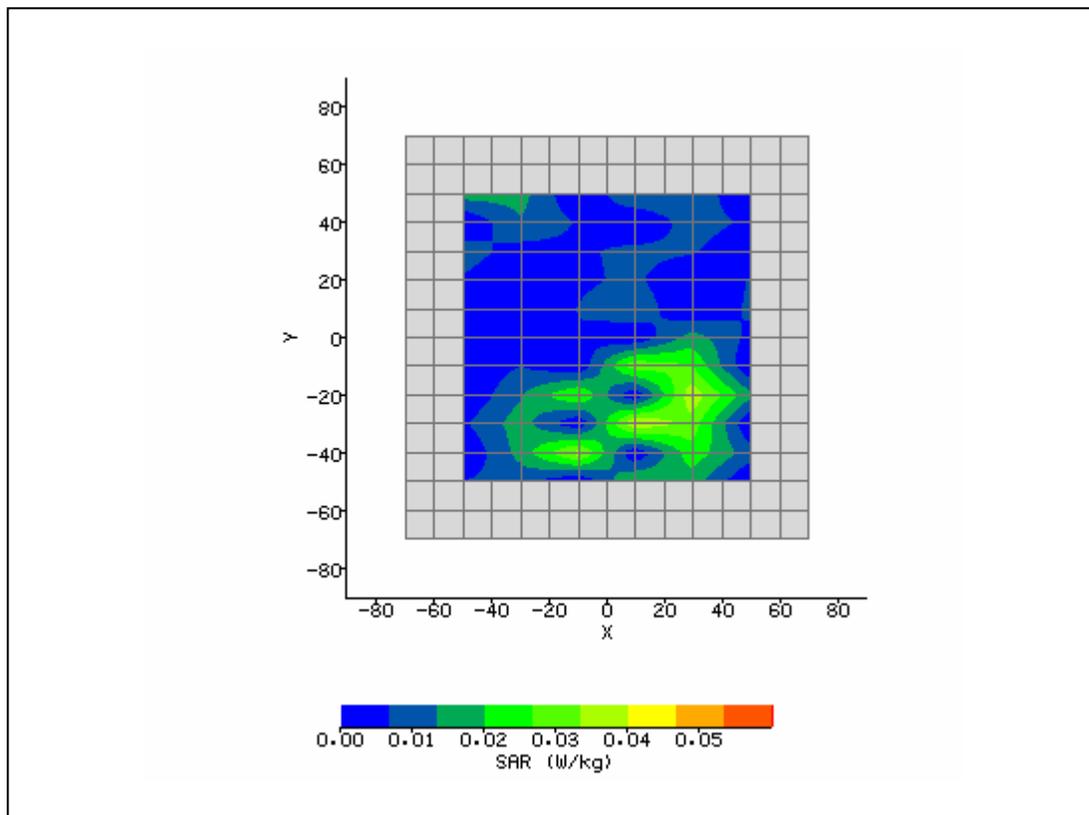


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	10/17/2008 1:33:12 PM	DUT Battery Model/No:	
Filename:	lap_6.txt	Probe Serial Number:	L0116
Ambient Temperature:	21.7°C	Liquid Simulant:	2450
Device Under Test:	Sony	Relative Permittivity:	48.16
Relative Humidity:	45.6%	Conductivity:	1.884
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	180°	Max SAR X-axis Location:	-16.00 mm
DUT Position:	Lap	Max SAR Y-axis Location:	26.00 mm
Antenna Configuration:	Integral	Max E Field:	4.91 V/m
Test Frequency:	2437MHz	SAR 1g:	0.058 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	
Conversion Factors:	.635 / .635 / .635	SAR Start:	0.004 W/kg
Type of Modulation:		SAR End:	0.004 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-3.67 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	10/15/08
Input Power Level:	Set by power table	Extrapolation:	poly4

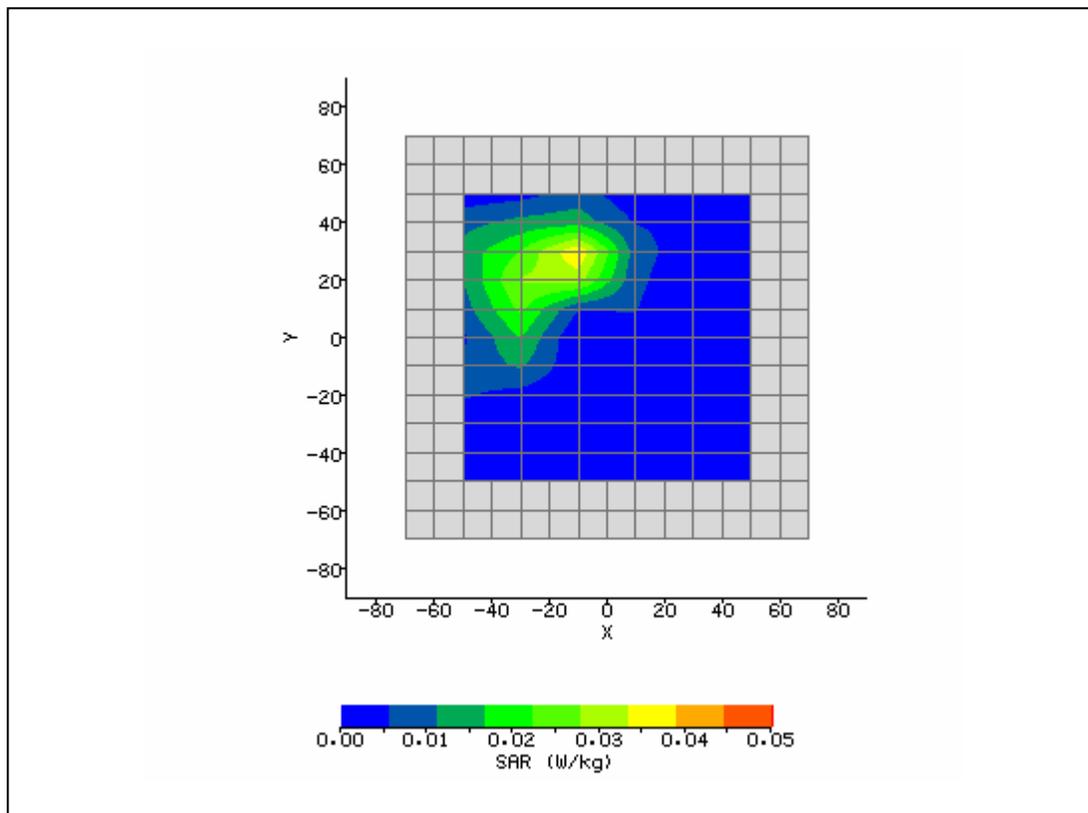


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	10/17/2008 2:05:05 PM	DUT Battery Model/No:	
Filename:	front_6.txt	Probe Serial Number:	L0116
Ambient Temperature:	21.7°C	Liquid Simulant:	2450
Device Under Test:	Sony	Relative Permittivity:	48.16
Relative Humidity:	45.6%	Conductivity:	1.884
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	180°	Max SAR X-axis Location:	50.00 mm
DUT Position:	Front	Max SAR Y-axis Location:	10.00 mm
Antenna Configuration:	Integral	Max E Field:	0.91 V/m
Test Frequency:	2437MHz	SAR 1g:	0.000 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	
Conversion Factors:	.635 / .635 / .635	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	10/15/08
Input Power Level:	Set by power table	Extrapolation:	poly4

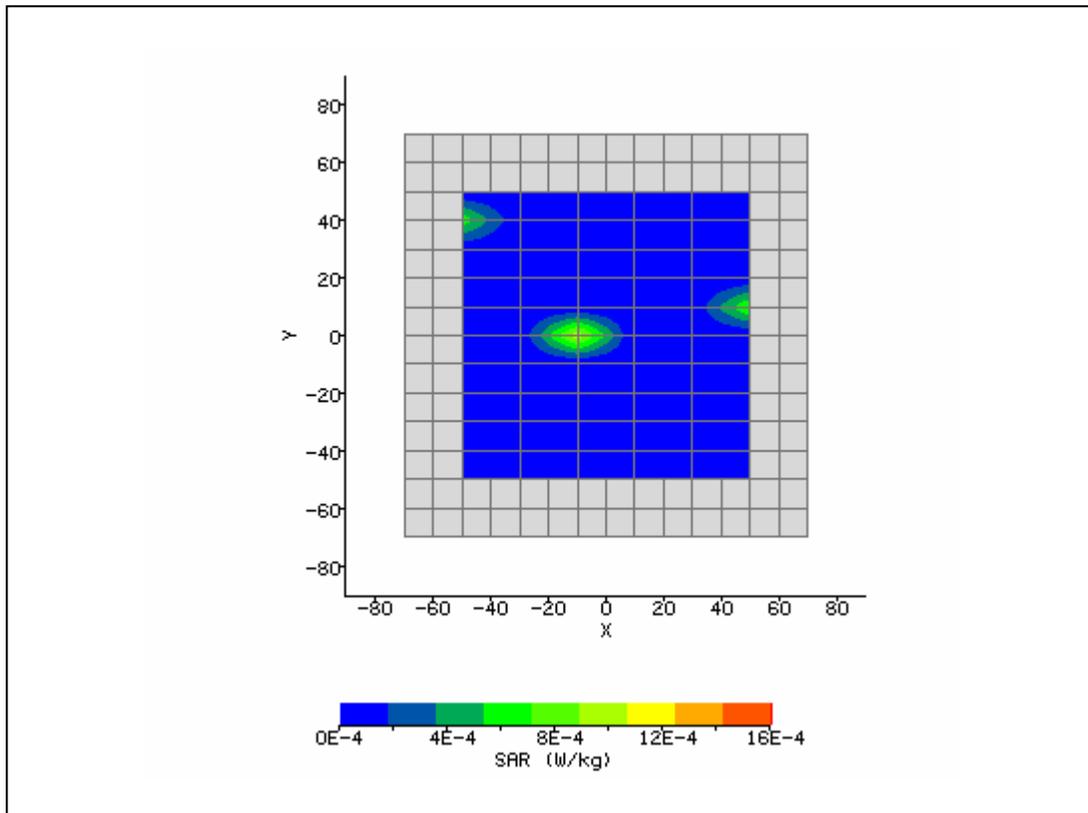


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	10/17/2008 2:31:34 PM	DUT Battery Model/No:	
Filename:	lap_6.txt	Probe Serial Number:	L0116
Ambient Temperature:	21.7°C	Liquid Simulant:	2450
Device Under Test:	Sony	Relative Permittivity:	48.16
Relative Humidity:	45.6%	Conductivity:	1.884
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	180°	Max SAR X-axis Location:	-10.00 mm
DUT Position:	Lap	Max SAR Y-axis Location:	18.00 mm
Antenna Configuration:	Integral	Max E Field:	5.08 V/m
Test Frequency:	2437MHz	SAR 1g:	0.066 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	
Conversion Factors:	.635 / .635 / .635	SAR Start:	0.003 W/kg
Type of Modulation:		SAR End:	0.003 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-3.41 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	10/15/08
Input Power Level:	Set by power table	Extrapolation:	poly4

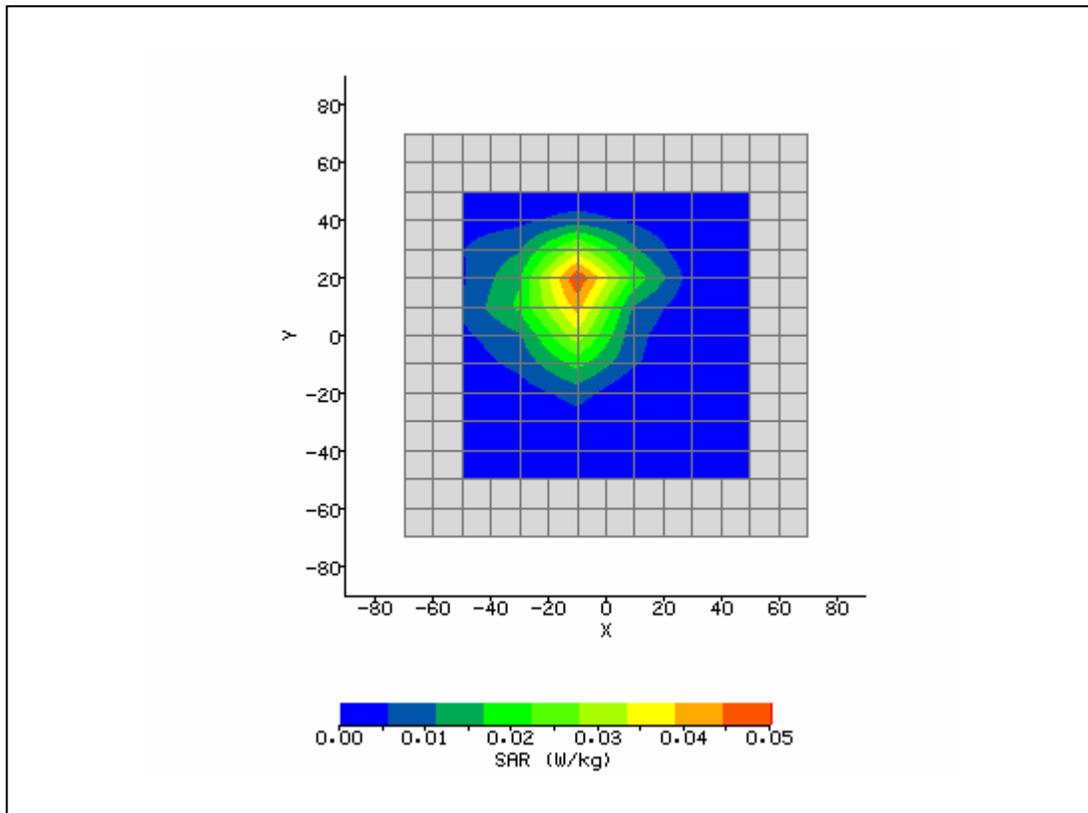


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	10/17/2008 3:12:49 PM	DUT Battery Model/No:	
Filename:	front_6.txt	Probe Serial Number:	L0116
Ambient Temperature:	21.7°C	Liquid Simulant:	2450
Device Under Test:	Sony	Relative Permittivity:	48.16
Relative Humidity:	45.6%	Conductivity:	1.884
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	180°	Max SAR X-axis Location:	10.00 mm
DUT Position:	Front	Max SAR Y-axis Location:	30.00 mm
Antenna Configuration:	Integral	Max E Field:	0.74 V/m
Test Frequency:	2437MHz	SAR 1g:	0.000 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	
Conversion Factors:	.635 / .635 / .635	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	10/15/08
Input Power Level:	Set by power table	Extrapolation:	poly4

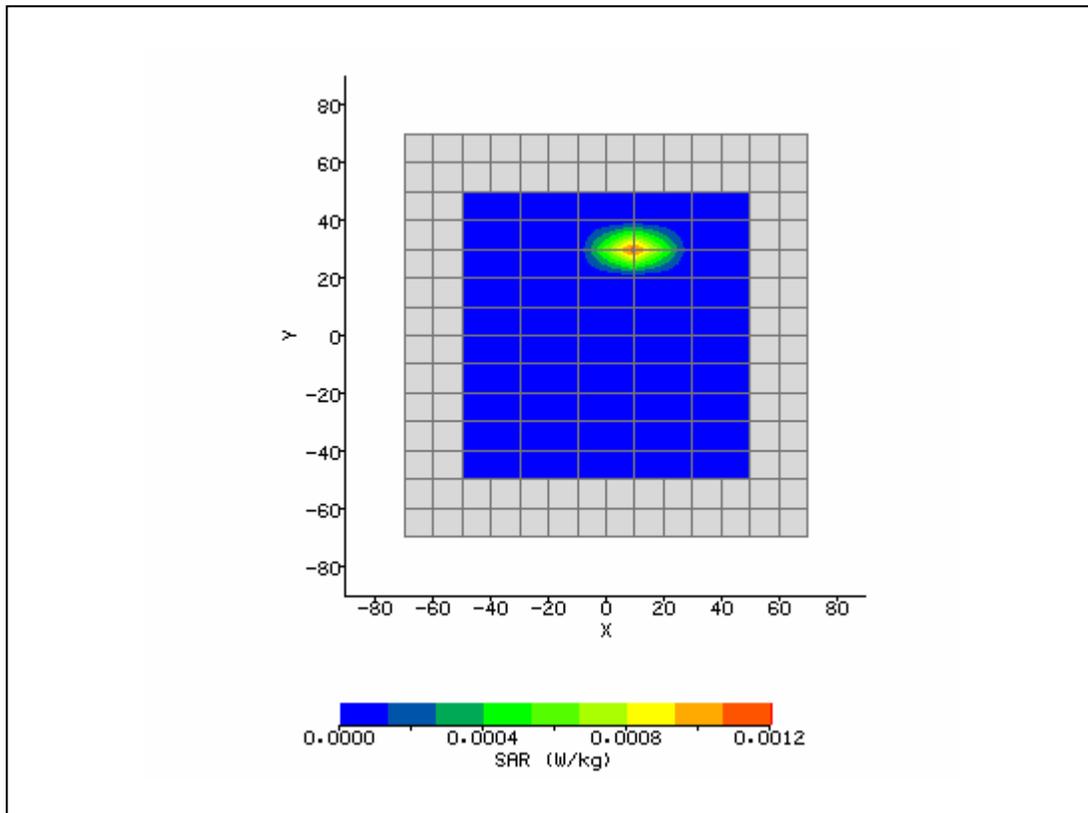


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	1/6/2009 2:34:34 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	L0116
Ambient Temperature:	22.2°C	Liquid Simulant:	2450
Device Under Test:	PCG1P1L	Relative Permittivity:	51.34
Relative Humidity:	38.3%	Conductivity:	1.879
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-4.00 mm
DUT Position:	Touch	Max SAR Y-axis Location:	3.20 mm
Antenna Configuration:	Integral	Max E Field:	5.43 V/m
Test Frequency:	2437MHz	SAR 1g:	0.068 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	
Conversion Factors:	.635 / .635 / .635	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	01/06/09
Input Power Level:	Set by power table	Extrapolation:	poly4

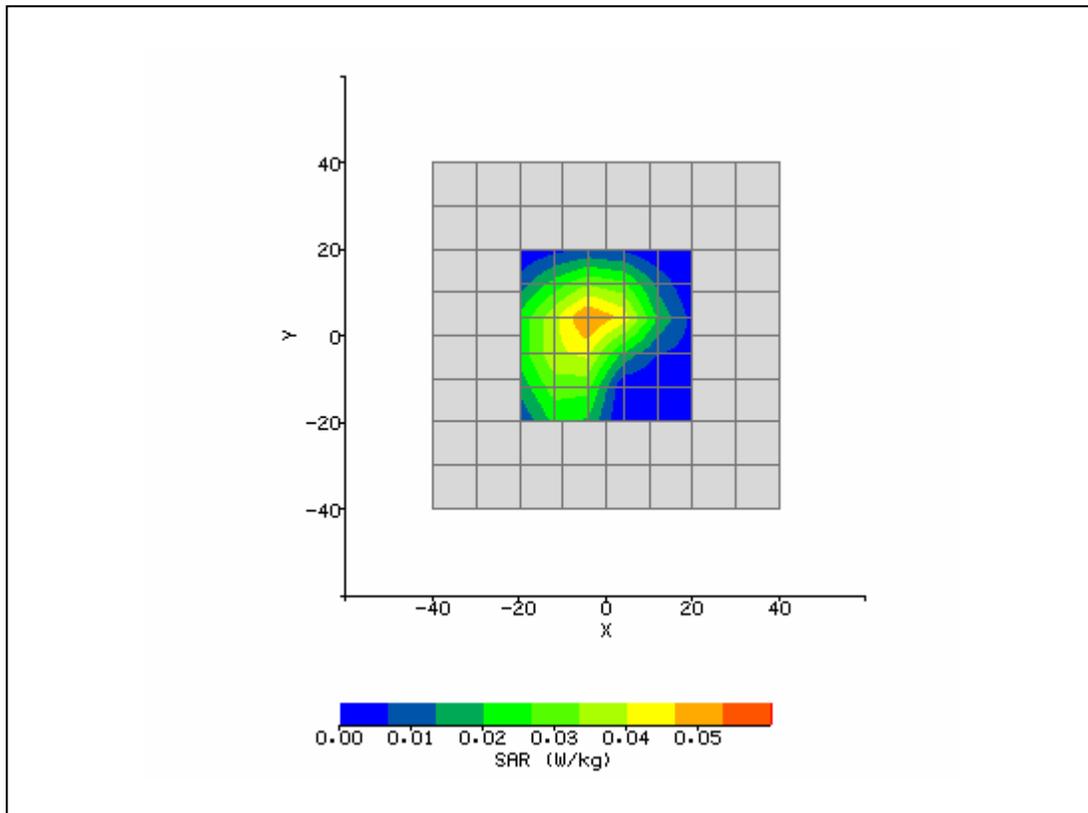


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	10/22/2008 9:48:29 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	L0116
Ambient Temperature:	21.7°C	Liquid Simulant:	850
Device Under Test:	System	Relative Permittivity:	40.83
Relative Humidity:	45.6%	Conductivity:	0.904
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	180°	Max SAR X-axis Location:	-6.00 mm
DUT Position:	15 mm	Max SAR Y-axis Location:	14.00 mm
Antenna Configuration:	Dipole	Max E Field:	92.66 V/m
Test Frequency:	835MHz	SAR 1g:	9.696 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	6.240 W/kg
Conversion Factors:	.457 / .457 / .457	SAR Start:	2.103 W/kg
Type of Modulation:		SAR End:	2.105 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.06 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	10/15/08
Input Power Level:	1 W	Extrapolation:	poly4

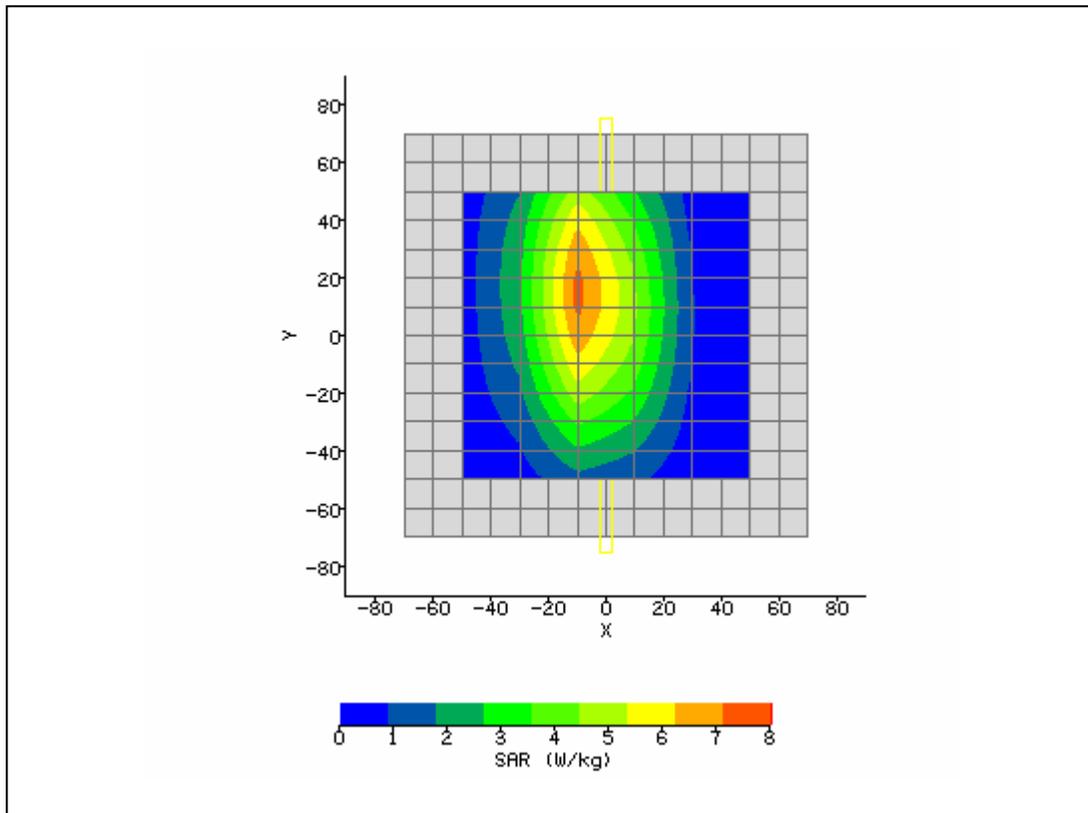

System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	10/22/2008 7:47:55 AM	DUT Battery Model/No:	
Filename:	nl_3d.txt	Probe Serial Number:	L0116
Ambient Temperature:	23.1°C	Liquid Simulant:	1900 / 2100
Device Under Test:	System	Relative Permittivity:	40.02
Relative Humidity:	36.8%	Conductivity:	1.387
Phantom S/No:	Head04_37.csv	Liquid Temperature:	23.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-10.00 mm
DUT Position:	8mm	Max SAR Y-axis Location:	10.00 mm
Antenna Configuration:	Dipole	Max E Field:	147.69 V/m
Test Frequency:	1900MHz	SAR 1g:	39.315 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	20.760 W/kg
Conversion Factors:	.551 / .551 / .551	SAR Start:	4.852 W/kg
Type of Modulation:		SAR End:	4.776 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-1.56 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	10/15/08
Input Power Level:	1W	Extrapolation:	poly4

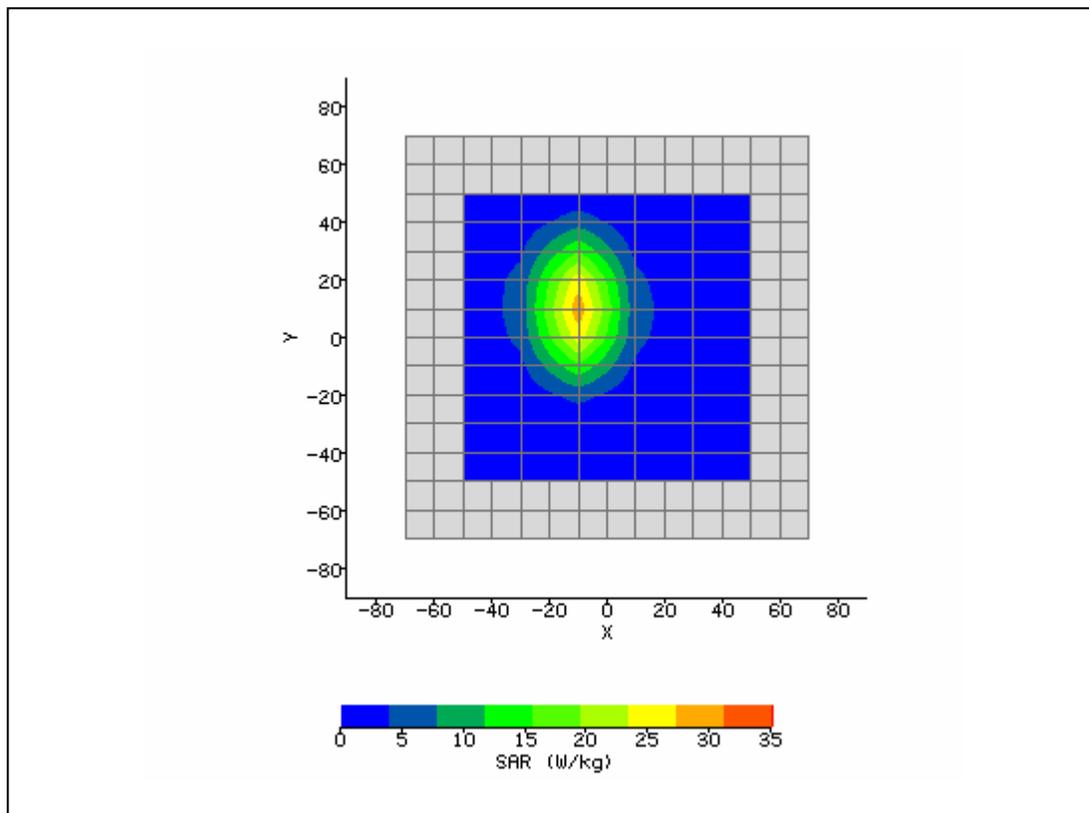

System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	10/17/2008 10:16:27 AM	DUT Battery Model/No:	
Filename:	right_tilt_384.txt	Probe Serial Number:	L0116
Ambient Temperature:	21.7°C	Liquid Simulant:	2450
Device Under Test:	System	Relative Permittivity:	39.96
Relative Humidity:	45.6%	Conductivity:	1.868
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	180°	Max SAR X-axis Location:	-12.00 mm
DUT Position:	10mm	Max SAR Y-axis Location:	9.60 mm
Antenna Configuration:	Dipole	Max E Field:	132.32 V/m
Test Frequency:	2450MHz	SAR 1g:	48.544 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	22.129 W/kg
Conversion Factors:	.569 / .569 / .569	SAR Start:	2.981 W/kg
Type of Modulation:		SAR End:	3.006 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.86 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	10/15/08
Input Power Level:	1W	Extrapolation:	poly4

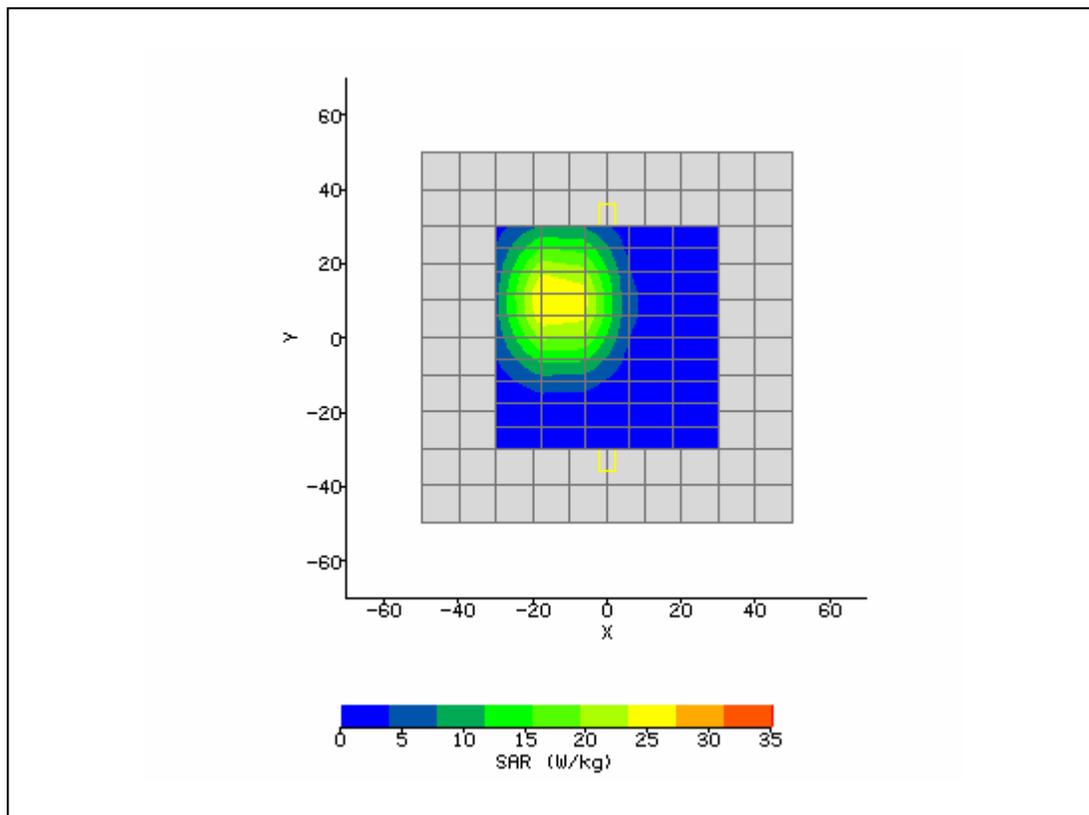

System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	1/6/2009 1:28:57 PM	DUT Battery Model/No:	
Filename:	WLAN_Left_Touch_H.txt	Probe Serial Number:	L0116
Ambient Temperature:	22.2°C	Liquid Simulant:	2450
Device Under Test:	System	Relative Permittivity:	40.27
Relative Humidity:	38.3%	Conductivity:	1.872
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	8.80 mm
DUT Position:	10mm	Max SAR Y-axis Location:	-1.60 mm
Antenna Configuration:	Dipole	Max E Field:	139.57 V/m
Test Frequency:	2450MHz	SAR 1g:	52.766 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	26.311 W/kg
Conversion Factors:	.569 / .569 / .569	SAR Start:	1.621 W/kg
Type of Modulation:		SAR End:	1.590 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-1.89 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	01/06/09
Input Power Level:	1W	Extrapolation:	poly4

