




System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	3/3/2005 11:00:11 AM	DUT Battery Model/No:	
Filename:	lap128_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	850
Device Under Test:	Sony PCG-4E1L	Relative Permittivity:	55.72
Relative Humidity:	50%	Conductivity:	0.982
Phantom S/No:	HeadBox_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-3.00 mm
DUT Position:	lap	Max SAR Z-axis Location:	-171.00 mm
Antenna Configuration:	integral	Max E Field:	12.31 V/m
Test Frequency:	836.6MHz	SAR 1g:	0.132 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.090 W/kg
Conversion Factors:	.522 / .522 / .522	SAR Start:	0.056 W/kg
Type of Modulation:		SAR End:	0.055 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.02 dB
Diode Compression Factors (V*200):	11.9 / 12.3 / 10	Probe battery last changed:	3/1/05
Input Power Level:	max 2 timeslots TX	Extrapolation:	poly4

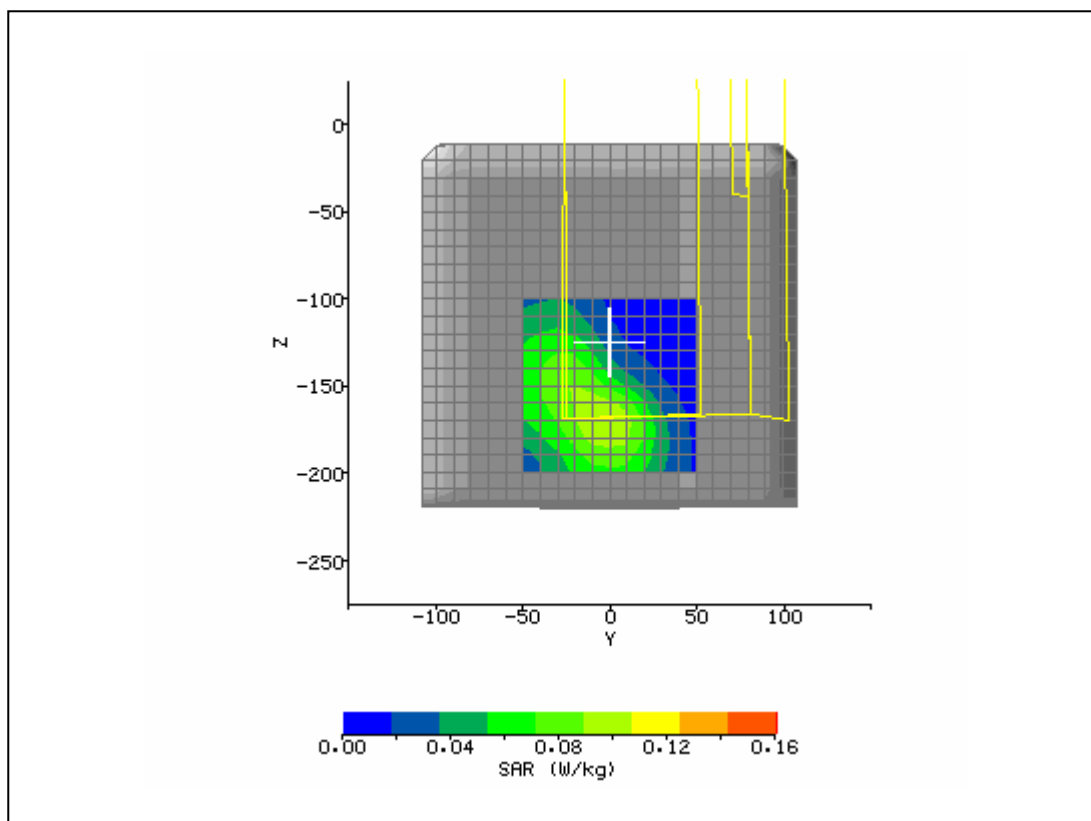


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	3/3/2005 10:17:57 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	850
Device Under Test:	Sony PCG-4E1L	Relative Permittivity:	56.01
Relative Humidity:	50%	Conductivity:	0.973
Phantom S/No:	HeadBox_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-4.00 mm
DUT Position:	lap	Max SAR Z-axis Location:	-169.00 mm
Antenna Configuration:	integral	Max E Field:	12.52 V/m
Test Frequency:	824.2MHz	SAR 1g:	0.134 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.091 W/kg
Conversion Factors:	.522 / .522 / .522	SAR Start:	0.054 W/kg
Type of Modulation:		SAR End:	0.055 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.04 dB
Diode Compression Factors (V*200):	11.9 / 12.3 / 10	Probe battery last changed:	3/1/05
Input Power Level:	max 2 timeslots TX	Extrapolation:	poly4

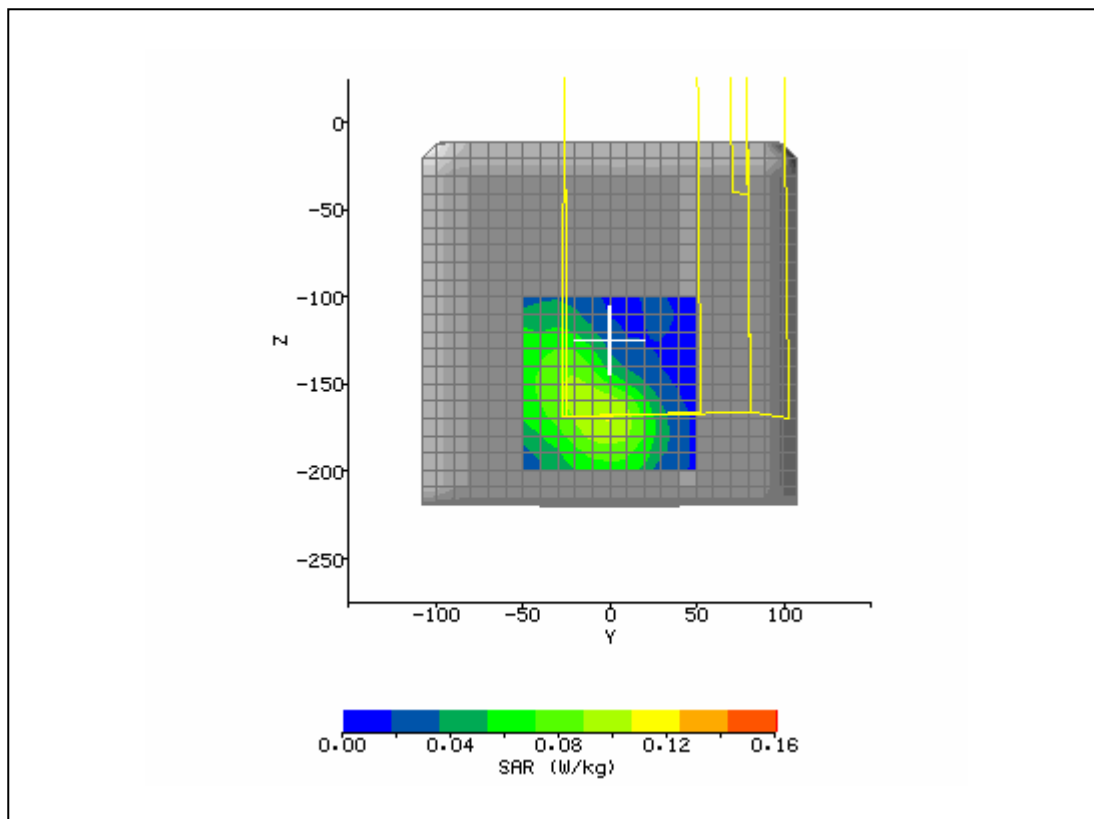


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	3/3/2005 11:31:51 AM	DUT Battery Model/No:	
Filename:	lap190_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	850
Device Under Test:	Sony PCG-4E1L	Relative Permittivity:	55.56
Relative Humidity:	50%	Conductivity:	0.991
Phantom S/No:	HeadBox_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-3.00 mm
DUT Position:	lap	Max SAR Z-axis Location:	-172.00 mm
Antenna Configuration:	integral	Max E Field:	12.38 V/m
Test Frequency:	848.8MHz	SAR 1g:	0.134 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.090 W/kg
Conversion Factors:	.522 / .522 / .522	SAR Start:	0.054 W/kg
Type of Modulation:		SAR End:	0.054 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.01 dB
Diode Compression Factors (V*200):	11.9 / 12.3 / 10	Probe battery last changed:	3/1/05
Input Power Level:	max 2 timeslots TX	Extrapolation:	poly4

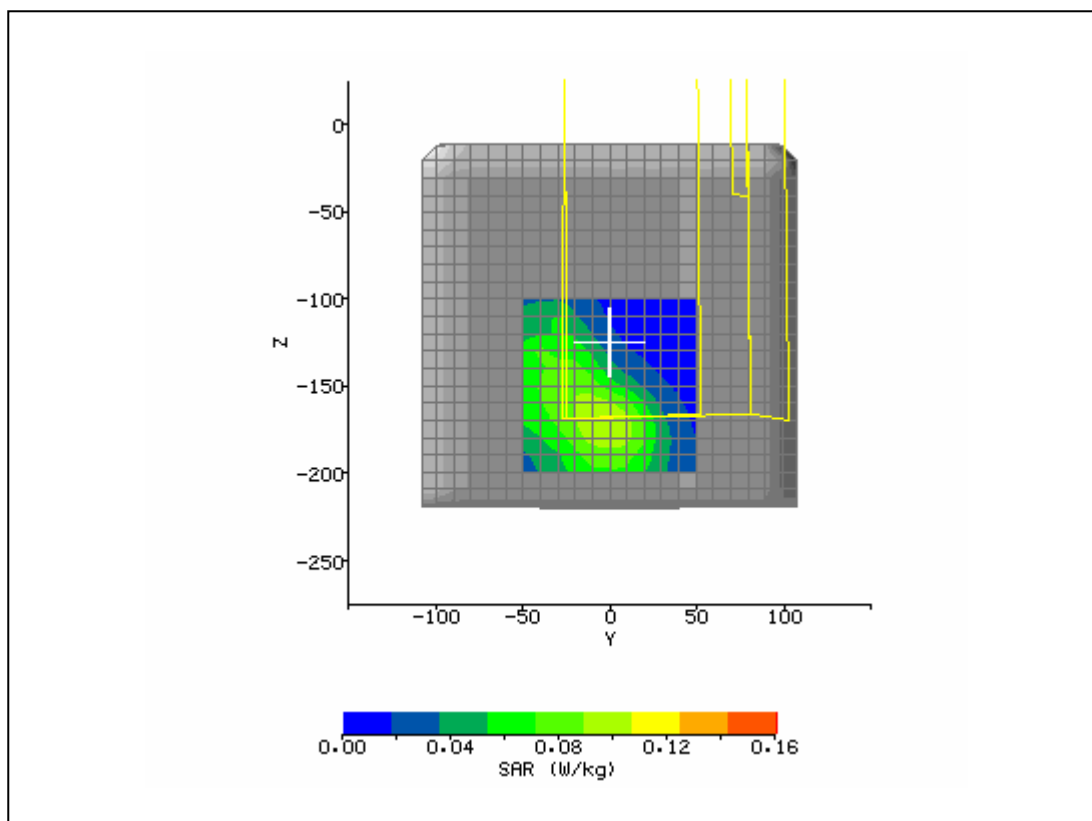

System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	3/4/2005 11:56:37 AM	DUT Battery Model/No:	
Filename:	lap512_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	1900
Device Under Test:	Sony PCG-4E1L	Relative Permittivity:	53.21
Relative Humidity:	50%	Conductivity:	1.581
Phantom S/No:	HeadBox_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-14.00 mm
DUT Position:	lap	Max SAR Z-axis Location:	-171.00 mm
Antenna Configuration:	integral	Max E Field:	10.50 V/m
Test Frequency:	1880MHz	SAR 1g:	0.149 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.089 W/kg
Conversion Factors:	0.666 / 0.666 / 0.666	SAR Start:	0.045 W/kg
Type of Modulation:		SAR End:	0.044 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.11 dB
Diode Compression Factors (V*200):	11.9 / 12.3 / 10	Probe battery last changed:	3/1/05
Input Power Level:	max 2 timeslots TX	Extrapolation:	poly4

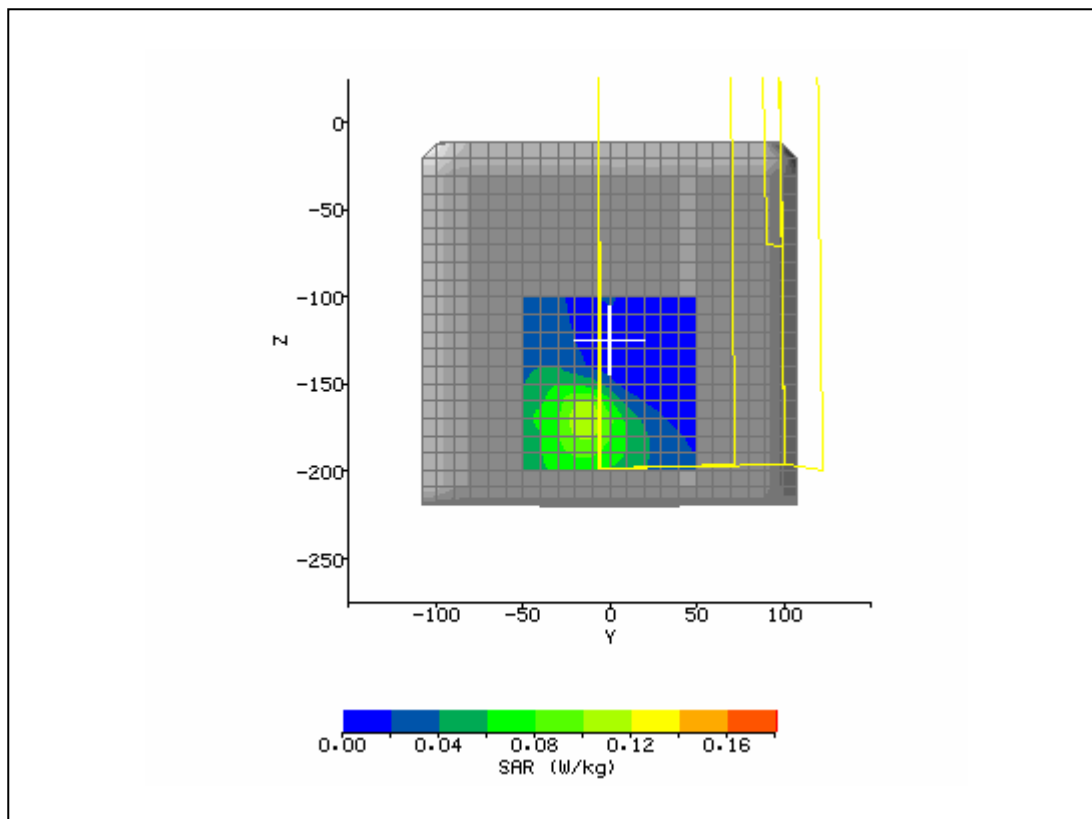

System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	3/4/2005 11:25:03 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	1900
Device Under Test:	Sony PCG-4E1L	Relative Permittivity:	53.33
Relative Humidity:	50%	Conductivity:	1.565
Phantom S/No:	HeadBox_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-14.00 mm
DUT Position:	lap	Max SAR Z-axis Location:	-171.00 mm
Antenna Configuration:	integral	Max E Field:	9.62 V/m
Test Frequency:	1850.2MHz	SAR 1g:	0.123 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.074 W/kg
Conversion Factors:	0.666 / 0.666 / 0.666	SAR Start:	0.037 W/kg
Type of Modulation:		SAR End:	0.037 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.08 dB
Diode Compression Factors (V*200):	11.9 / 12.3 / 10	Probe battery last changed:	3/1/05
Input Power Level:	max 2 timeslots TX	Extrapolation:	poly4

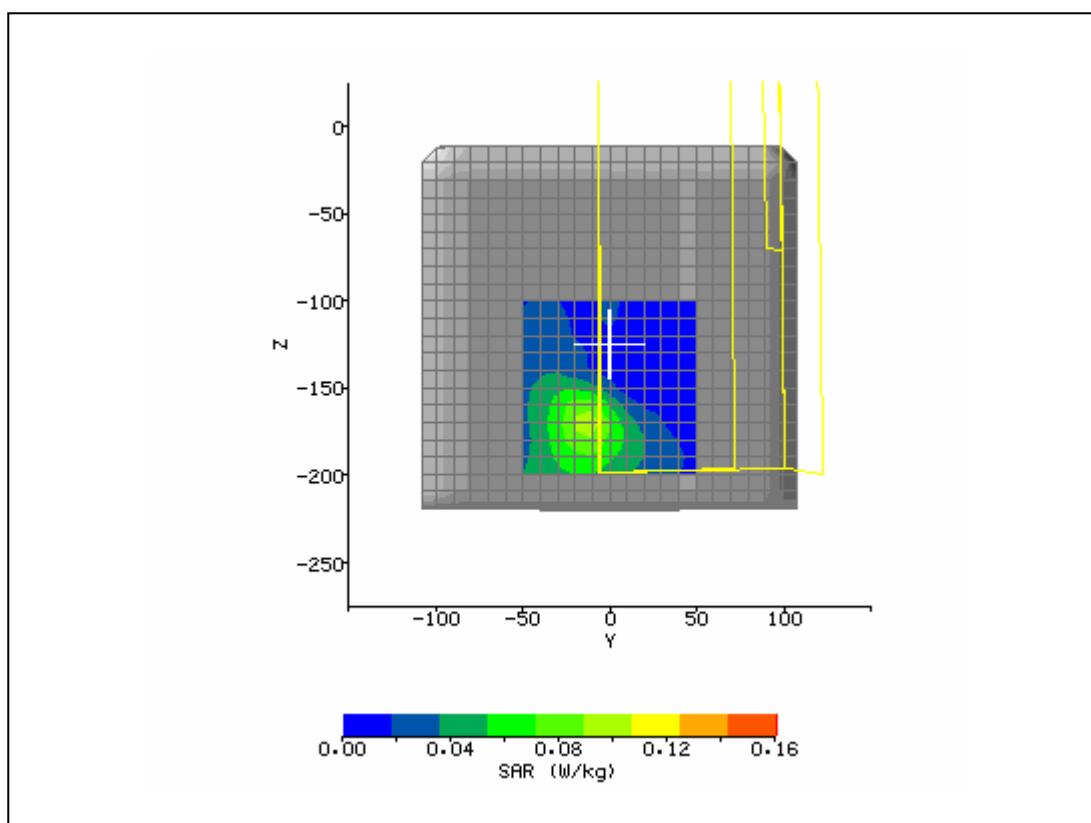

System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	3/4/2005 12:42:17 PM	DUT Battery Model/No:	
Filename:	lap661_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	1900
Device Under Test:	Sony PCG-4E1L	Relative Permittivity:	53.01
Relative Humidity:	50%	Conductivity:	1.577
Phantom S/No:	HeadBox_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-14.00 mm
DUT Position:	lap	Max SAR Z-axis Location:	-169.00 mm
Antenna Configuration:	integral	Max E Field:	11.43 V/m
Test Frequency:	1909.8MHz	SAR 1g:	0.176 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.105 W/kg
Conversion Factors:	0.666 / 0.666 / 0.666	SAR Start:	0.053 W/kg
Type of Modulation:		SAR End:	0.052 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.06 dB
Diode Compression Factors (V*200):	11.9 / 12.3 / 10	Probe battery last changed:	3/1/05
Input Power Level:	max 2 timeslots TX	Extrapolation:	poly4

