

SAR Test Report No.:


SAR_SONY_008_06002_FCC_850_1900_2450_5000

Date of Report: 07/12/2006

Appendix A Plots

Page 1 of 37

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	6/27/2006 2:41:24 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	850
Device Under Test:	F series laptop	Relative Permittivity:	55.72
Relative Humidity:	30%	Conductivity:	0.988
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-50.00 mm
DUT Position:	lap touching	Max SAR Y-axis Location:	-50.00 mm
Antenna Configuration:	vertical	Max E Field:	11.11 V/m
Test Frequency:	836.6MHz	SAR 1g:	0.148 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.103 W/kg
Conversion Factors:	.384 / .384 / .384	SAR Start:	0.027 W/kg
Type of Modulation:		SAR End:	0.027 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.02 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	6/27/06
Input Power Level:	max	Extrapolation:	poly4

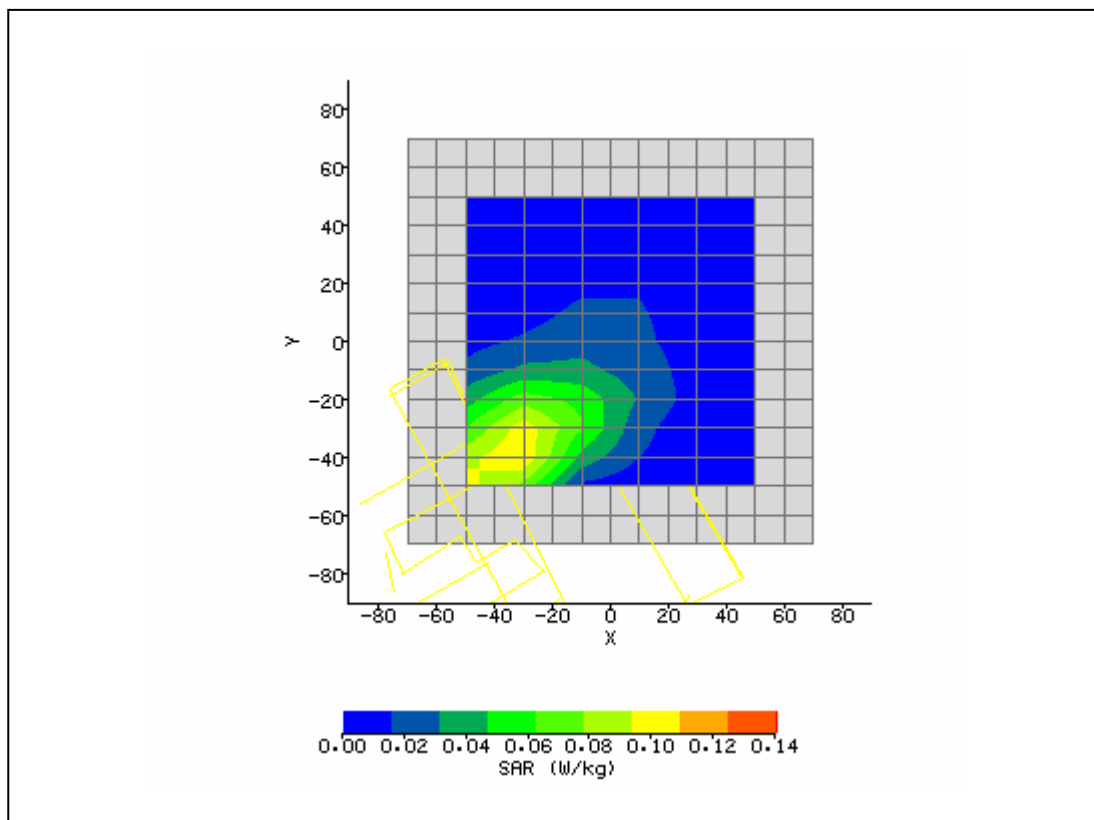

SAR Test Report No.:


SAR_SONY_008_06002_FCC_850_1900_2450_5000

Date of Report: 07/12/2006

Appendix A Plots

Page 2 of 37

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	6/27/2006 3:09:34 PM	DUT Battery Model/No:	
Filename:	lapv384.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	850
Device Under Test:	F series laptop	Relative Permittivity:	55.72
Relative Humidity:	30%	Conductivity:	0.988
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-34.00 mm
DUT Position:	lap touching	Max SAR Y-axis Location:	-41.00 mm
Antenna Configuration:	horizontal	Max E Field:	7.68 V/m
Test Frequency:	836.6MHz	SAR 1g:	0.073 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.046 W/kg
Conversion Factors:	.384 / .384 / .384	SAR Start:	0.017 W/kg
Type of Modulation:		SAR End:	0.017 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.02 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	6/27/06
Input Power Level:	max	Extrapolation:	poly4

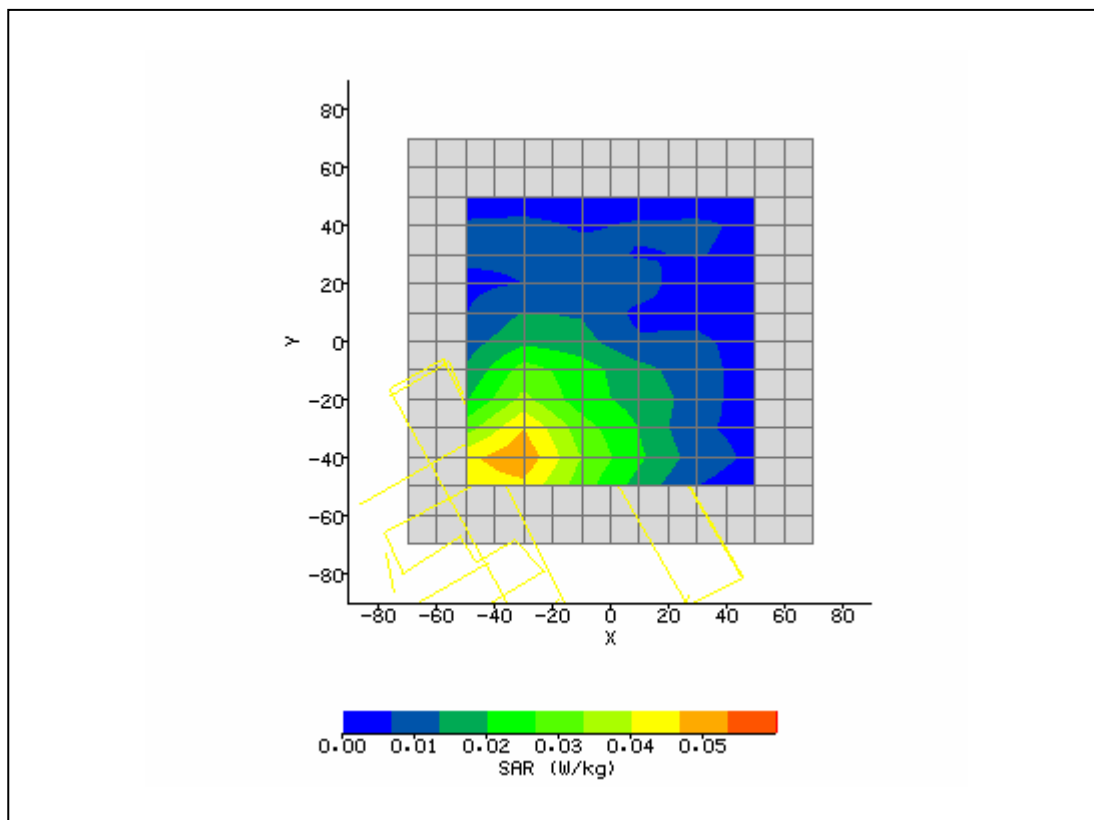

SAR Test Report No.:


SAR_SONY_008_06002_FCC_850_1900_2450_5000

Date of Report: 07/12/2006

Appendix A Plots

Page 3 of 37

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	6/27/2006 3:26:33 PM	DUT Battery Model/No:	
Filename:	laph384.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	850
Device Under Test:	F series laptop	Relative Permittivity:	55.72
Relative Humidity:	30%	Conductivity:	0.988
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-38.00 mm
DUT Position:	lap touching	Max SAR Y-axis Location:	-39.00 mm
Antenna Configuration:	45 degrees	Max E Field:	9.67 V/m
Test Frequency:	836.6MHz	SAR 1g:	0.110 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.071 W/kg
Conversion Factors:	.384 / .384 / .384	SAR Start:	0.028 W/kg
Type of Modulation:		SAR End:	0.029 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	3.57 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	6/27/06
Input Power Level:	max	Extrapolation:	poly4

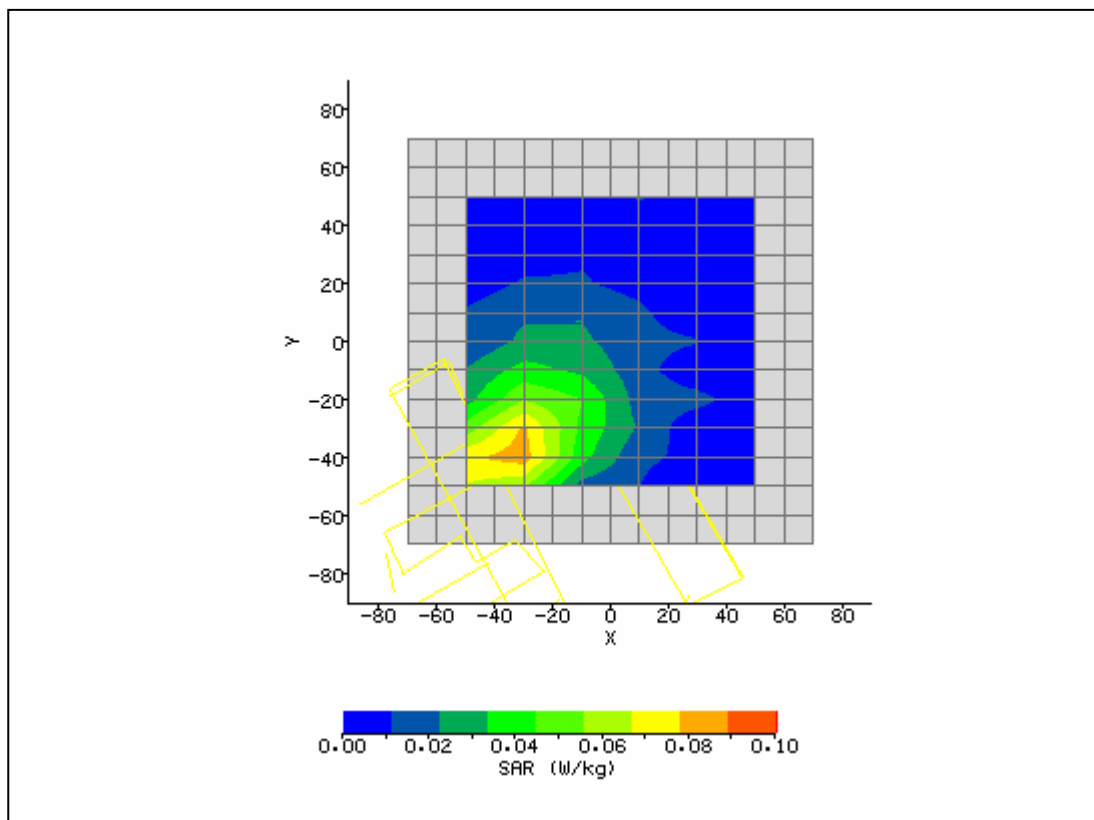

SAR Test Report No.:


SAR_SONY_008_06002_FCC_850_1900_2450_5000

Date of Report: 07/12/2006

Appendix A Plots

Page 4 of 37

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	6/27/2006 3:53:05 PM	DUT Battery Model/No:	
Filename:	lap45_384.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	850
Device Under Test:	F series laptop	Relative Permittivity:	55.72
Relative Humidity:	30%	Conductivity:	0.988
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	0.00 mm
DUT Position:	side bystander 2.0 cm	Max SAR Y-axis Location:	-21.00 mm
Antenna Configuration:	45 degrees	Max E Field:	6.38 V/m
Test Frequency:	836.6MHz	SAR 1g:	0.050 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.033 W/kg
Conversion Factors:	.384 / .384 / .384	SAR Start:	0.016 W/kg
Type of Modulation:		SAR End:	0.016 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-1.33 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	6/27/06
Input Power Level:	max	Extrapolation:	poly4

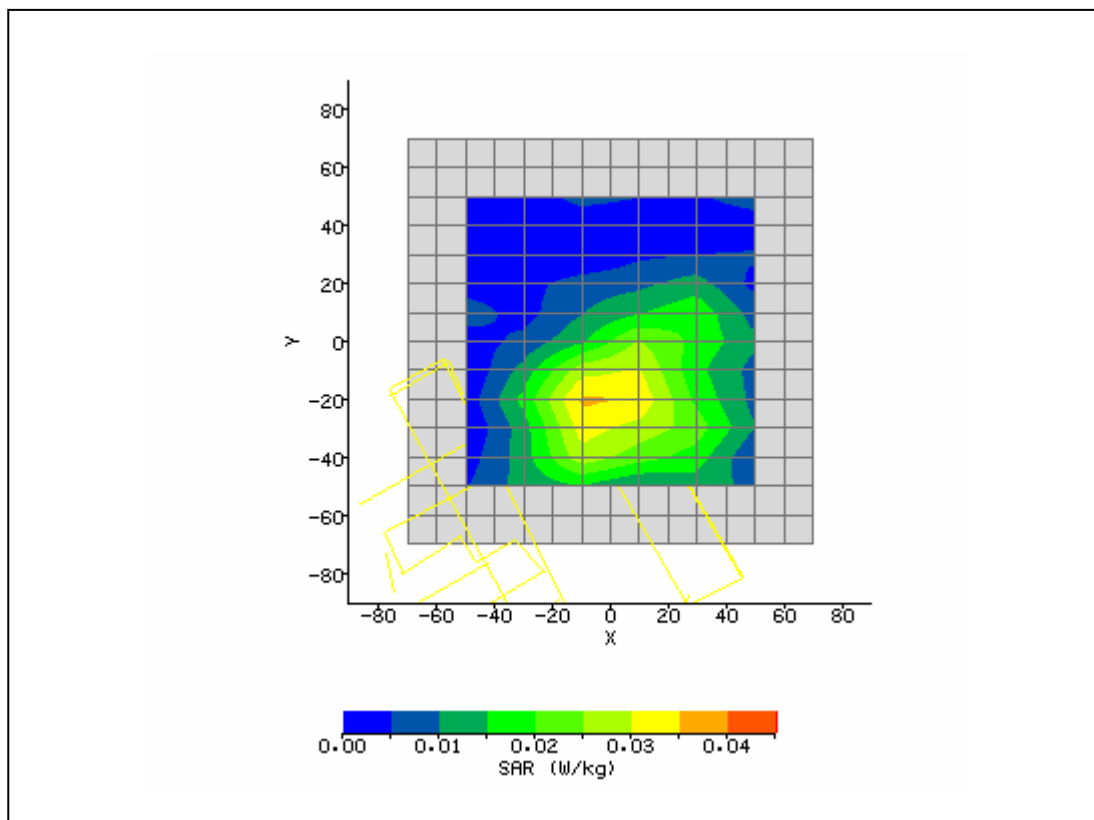

SAR Test Report No.:


SAR_SONY_008_06002_FCC_850_1900_2450_5000

Date of Report: 07/12/2006

Appendix A Plots

Page 5 of 37

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	6/27/2006 4:25:03 PM	DUT Battery Model/No:	
Filename:	bystand384.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	850
Device Under Test:	F series laptop	Relative Permittivity:	56.07
Relative Humidity:	30%	Conductivity:	0.973
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-50.00 mm
DUT Position:	lap touching	Max SAR Y-axis Location:	-33.00 mm
Antenna Configuration:	vertical	Max E Field:	9.94 V/m
Test Frequency:	824.7 MHz	SAR 1g:	0.114 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.080 W/kg
Conversion Factors:	.384 / .384 / .384	SAR Start:	0.023 W/kg
Type of Modulation:		SAR End:	0.023 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	1.37 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	6/27/06
Input Power Level:	max	Extrapolation:	poly4

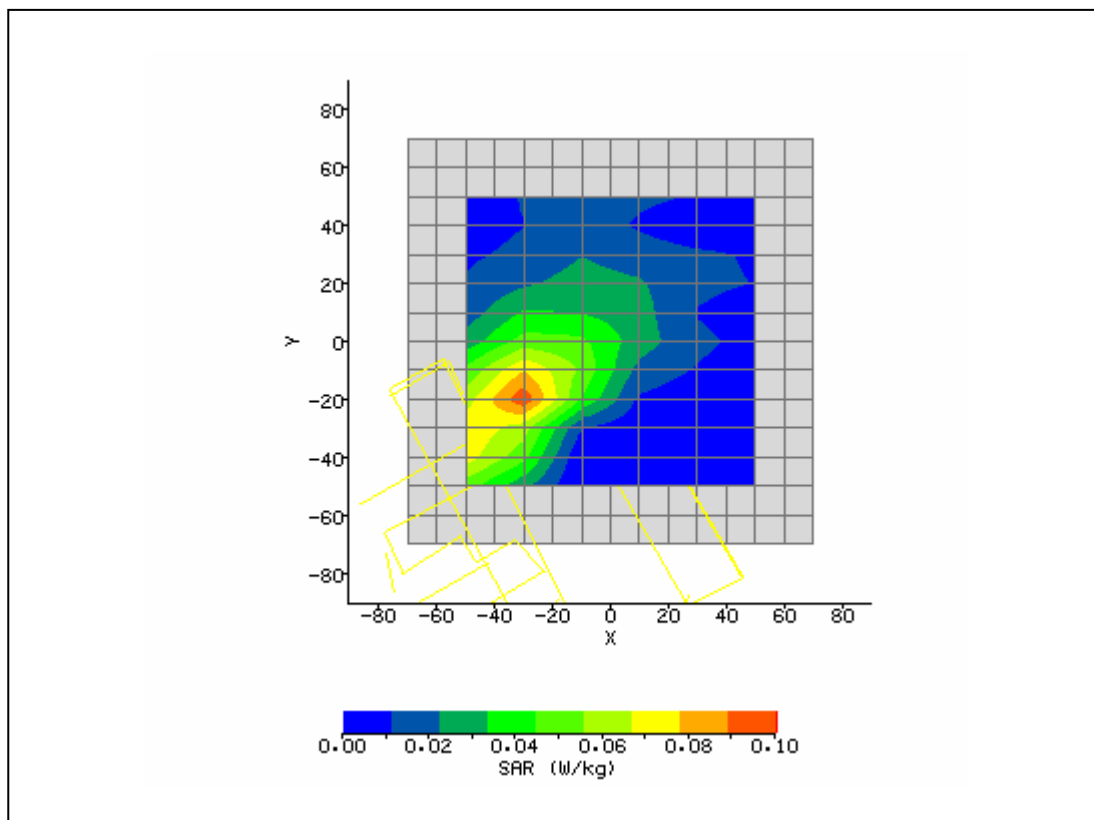

SAR Test Report No.:


SAR_SONY_008_06002_FCC_850_1900_2450_5000

Date of Report: 07/12/2006

Appendix A Plots

Page 6 of 37

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	6/27/2006 5:13:38 PM	DUT Battery Model/No:	
Filename:	lapv25.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	850
Device Under Test:	F series laptop	Relative Permittivity:	55.45
Relative Humidity:	30%	Conductivity:	0.983
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-28.00 mm
DUT Position:	lap touching	Max SAR Y-axis Location:	-21.00 mm
Antenna Configuration:	vertical	Max E Field:	11.86 V/m
Test Frequency:	848.31 MHz	SAR 1g:	0.168 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.109 W/kg
Conversion Factors:	.384 / .384 / .384	SAR Start:	0.039 W/kg
Type of Modulation:		SAR End:	0.040 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	1.59 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	6/27/06
Input Power Level:	max	Extrapolation:	poly4

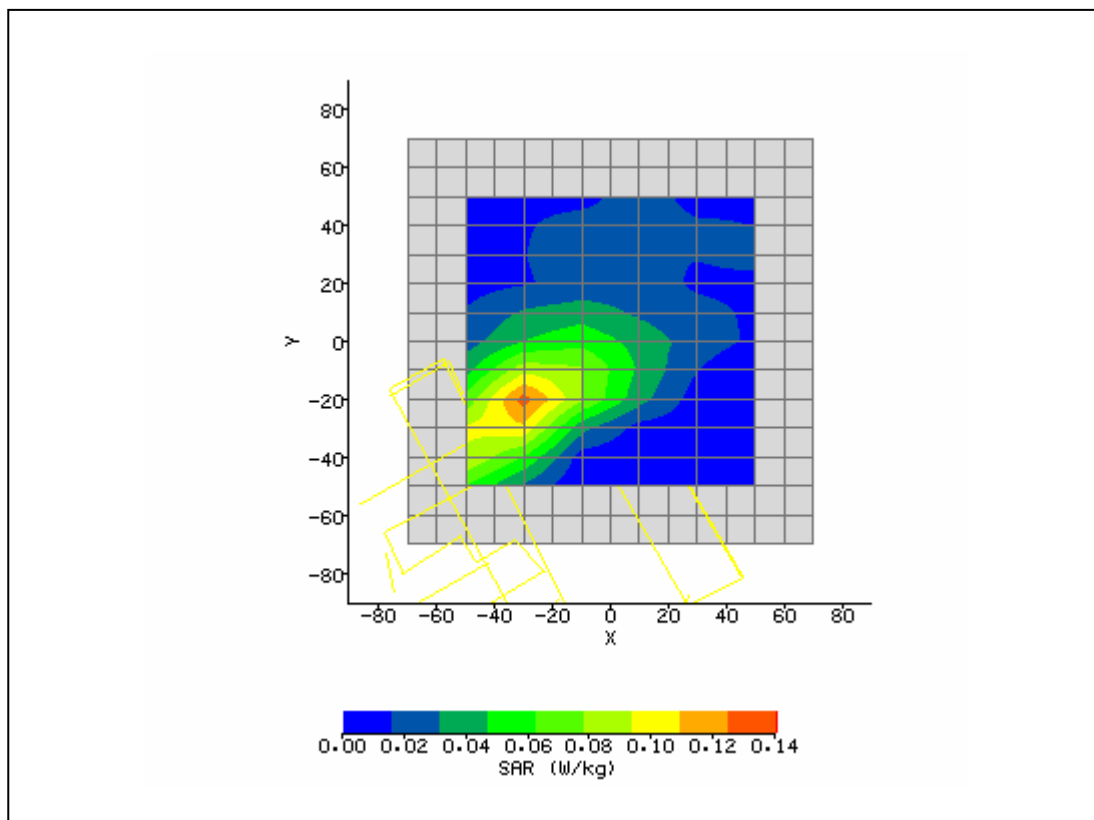

SAR Test Report No.:


SAR_SONY_008_06002_FCC_850_1900_2450_5000

Date of Report: 07/12/2006

Appendix A Plots

Page 7 of 37

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	6/28/2006 7:45:08 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	1900
Device Under Test:	F series laptop	Relative Permittivity:	53.18
Relative Humidity:	30%	Conductivity:	1.576
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-10.00 mm
DUT Position:	lap touching	Max SAR Y-axis Location:	-28.00 mm
Antenna Configuration:	vertical	Max E Field:	7.49 V/m
Test Frequency:	1880MHz	SAR 1g:	0.115 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.060 W/kg
Conversion Factors:	.473 / .473 / .473	SAR Start:	0.015 W/kg
Type of Modulation:		SAR End:	0.015 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.42 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	6/27/06
Input Power Level:	max	Extrapolation:	poly4

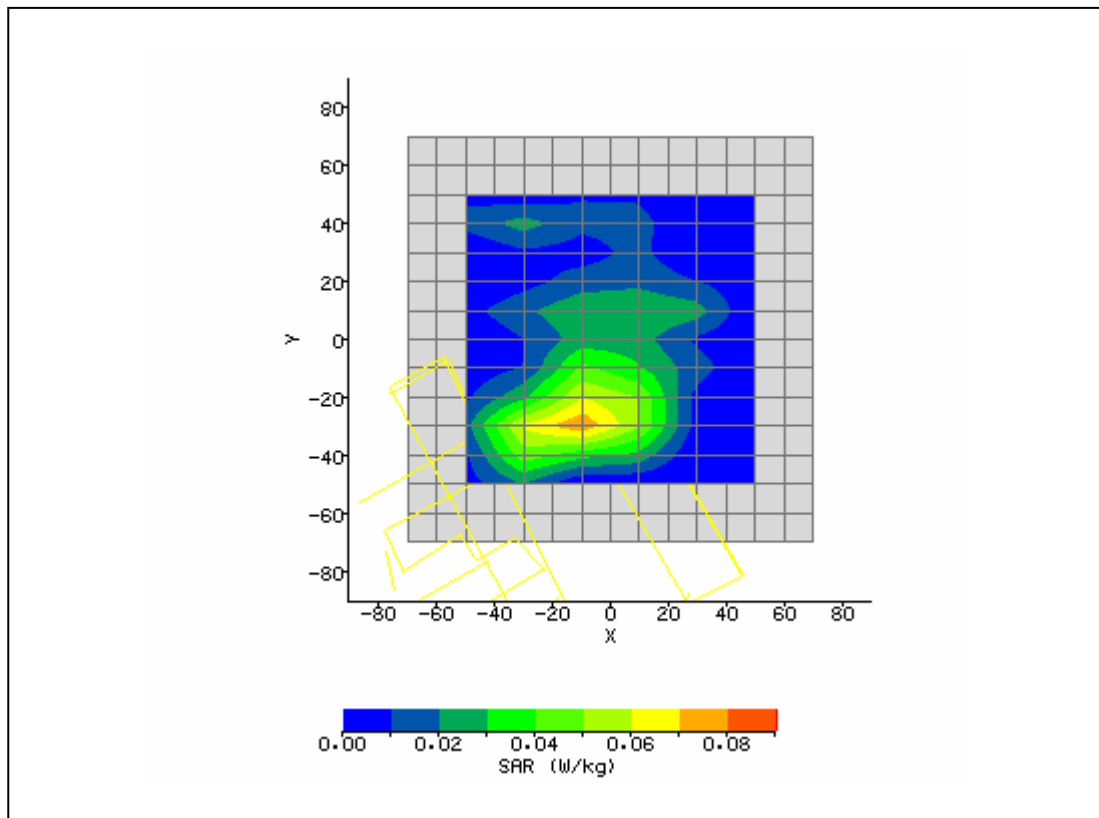

SAR Test Report No.:


SAR_SONY_008_06002_FCC_850_1900_2450_5000

Date of Report: 07/12/2006

Appendix A Plots

Page 8 of 37

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	6/28/2006 8:03:30 AM	DUT Battery Model/No:	
Filename:	lapv600.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	1900
Device Under Test:	F series laptop	Relative Permittivity:	53.18
Relative Humidity:	30%	Conductivity:	1.576
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-2.00 mm
DUT Position:	lap touching	Max SAR Y-axis Location:	-11.00 mm
Antenna Configuration:	horizontal	Max E Field:	7.86 V/m
Test Frequency:	1880MHz	SAR 1g:	0.128 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.060 W/kg
Conversion Factors:	.473 / .473 / .473	SAR Start:	0.032 W/kg
Type of Modulation:		SAR End:	0.031 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-3.13 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	6/27/06
Input Power Level:	max	Extrapolation:	poly4

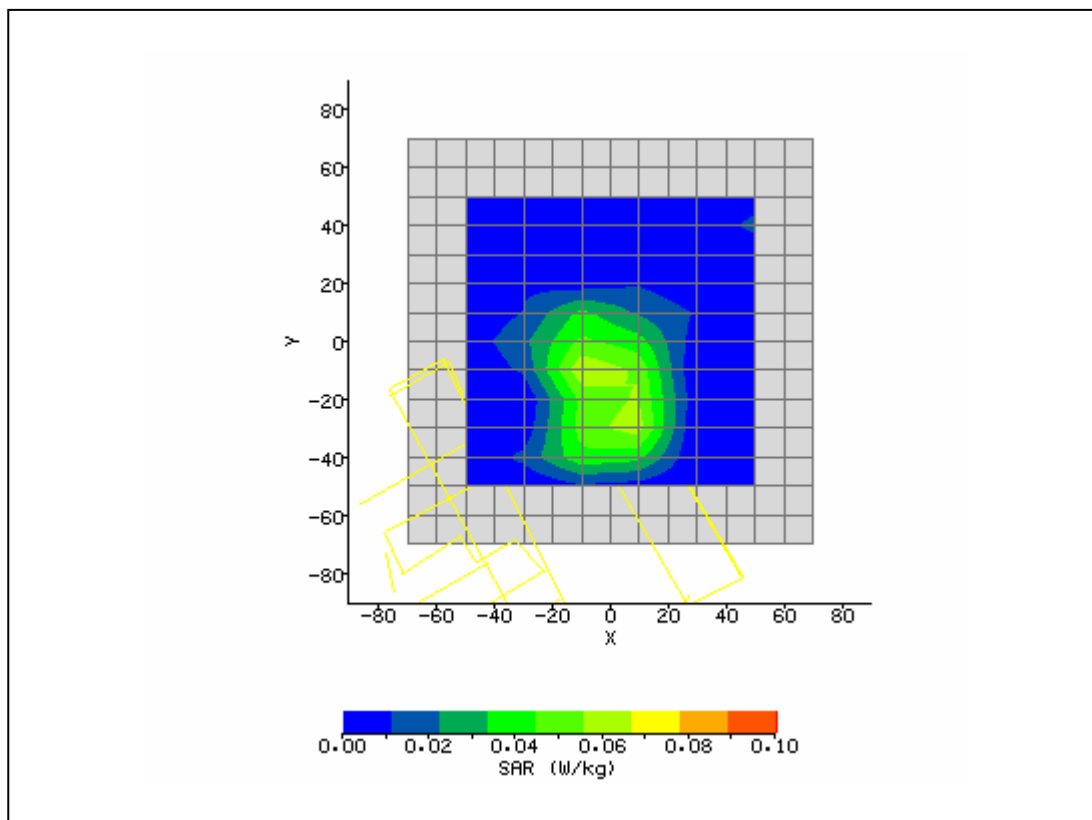

SAR Test Report No.:


SAR_SONY_008_06002_FCC_850_1900_2450_5000

Date of Report: 07/12/2006

Appendix A Plots

Page 9 of 37

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	6/28/2006 9:44:38 AM	DUT Battery Model/No:	
Filename:	laph600.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	1900
Device Under Test:	F series laptop	Relative Permittivity:	53.18
Relative Humidity:	30%	Conductivity:	1.576
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	2.00 mm
DUT Position:	lap touching	Max SAR Y-axis Location:	-29.00 mm
Antenna Configuration:	45 degrees	Max E Field:	6.90 V/m
Test Frequency:	1880MHz	SAR 1g:	0.113 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.056 W/kg
Conversion Factors:	.473 / .473 / .473	SAR Start:	0.021 W/kg
Type of Modulation:		SAR End:	0.021 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.81 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	6/27/06
Input Power Level:	max	Extrapolation:	poly4

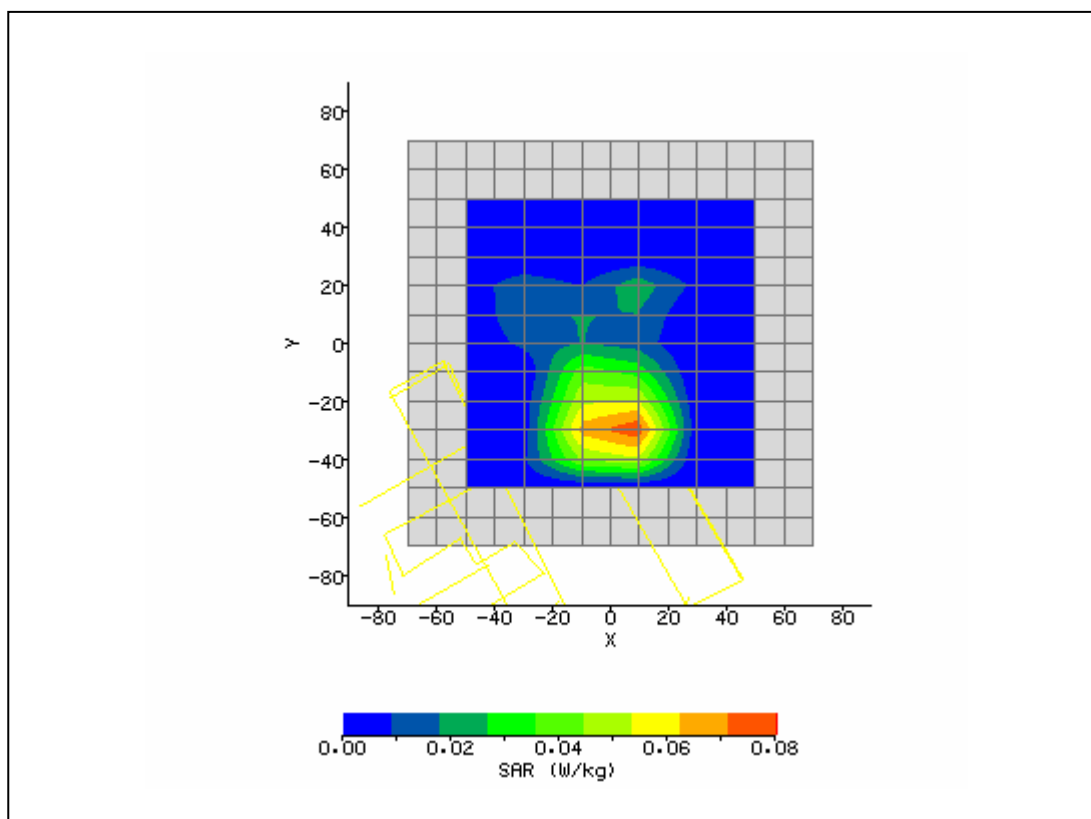

SAR Test Report No.:


SAR_SONY_008_06002_FCC_850_1900_2450_5000

Date of Report: 07/12/2006

Appendix A Plots

Page 10 of 37

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	6/28/2006 10:43:22 AM	DUT Battery Model/No:	
Filename:	bystand25.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	1900
Device Under Test:	F series laptop	Relative Permittivity:	52.98
Relative Humidity:	30%	Conductivity:	1.581
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	10.00 mm
DUT Position:	bystander side 2.0 cm	Max SAR Y-axis Location:	-11.00 mm
Antenna Configuration:	45 degrees	Max E Field:	9.95 V/m
Test Frequency:	1908.75MHz	SAR 1g:	0.205 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.107 W/kg
Conversion Factors:	.473 / .473 / .473	SAR Start:	0.013 W/kg
Type of Modulation:		SAR End:	0.013 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.31 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	6/27/06
Input Power Level:	max	Extrapolation:	poly4

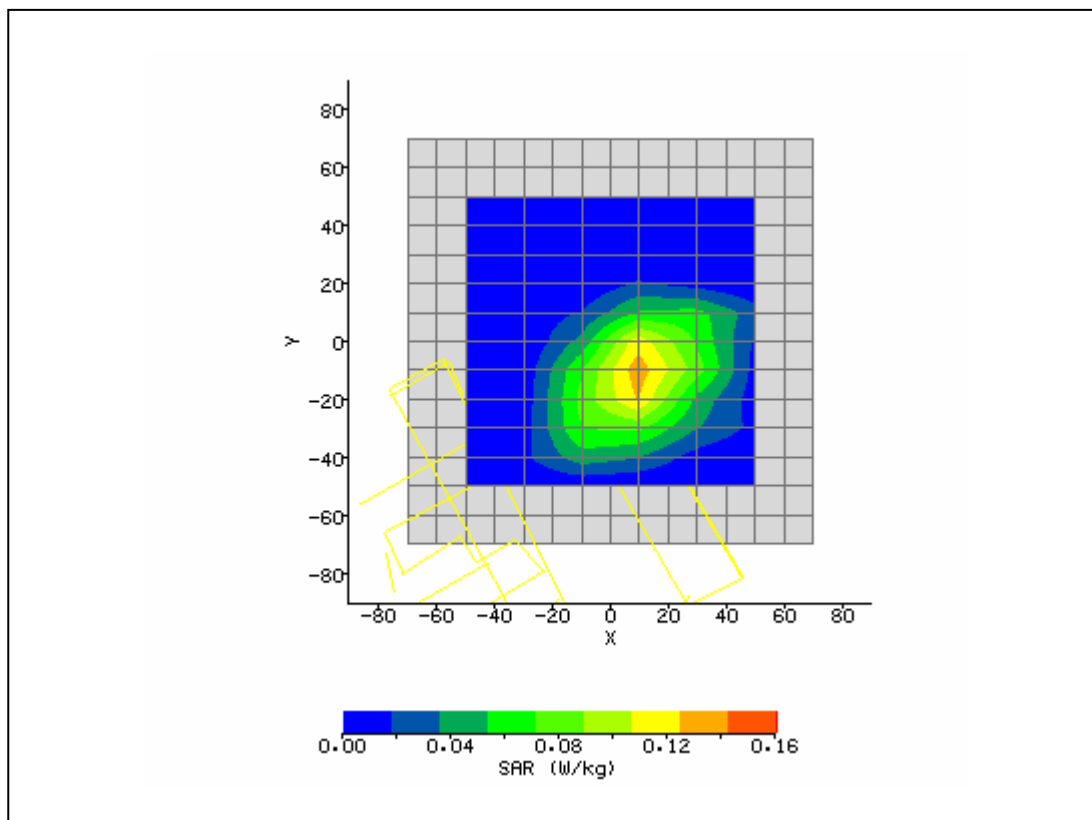

SAR Test Report No.:


SAR_SONY_008_06002_FCC_850_1900_2450_5000

Date of Report: 07/12/2006

Appendix A Plots

Page 11 of 37

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	6/28/2006 10:24:20 AM	DUT Battery Model/No:	
Filename:	bystand600.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	1900
Device Under Test:	F series laptop	Relative Permittivity:	53.32
Relative Humidity:	30%	Conductivity:	1.563
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	4.00 mm
DUT Position:	bystander side 2.0 cm	Max SAR Y-axis Location:	-9.00 mm
Antenna Configuration:	45 degrees	Max E Field:	9.39 V/m
Test Frequency:	1850.2MHz	SAR 1g:	0.174 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.097 W/kg
Conversion Factors:	.473 / .473 / .473	SAR Start:	0.015 W/kg
Type of Modulation:		SAR End:	0.015 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.16 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	6/27/06
Input Power Level:	max	Extrapolation:	poly4

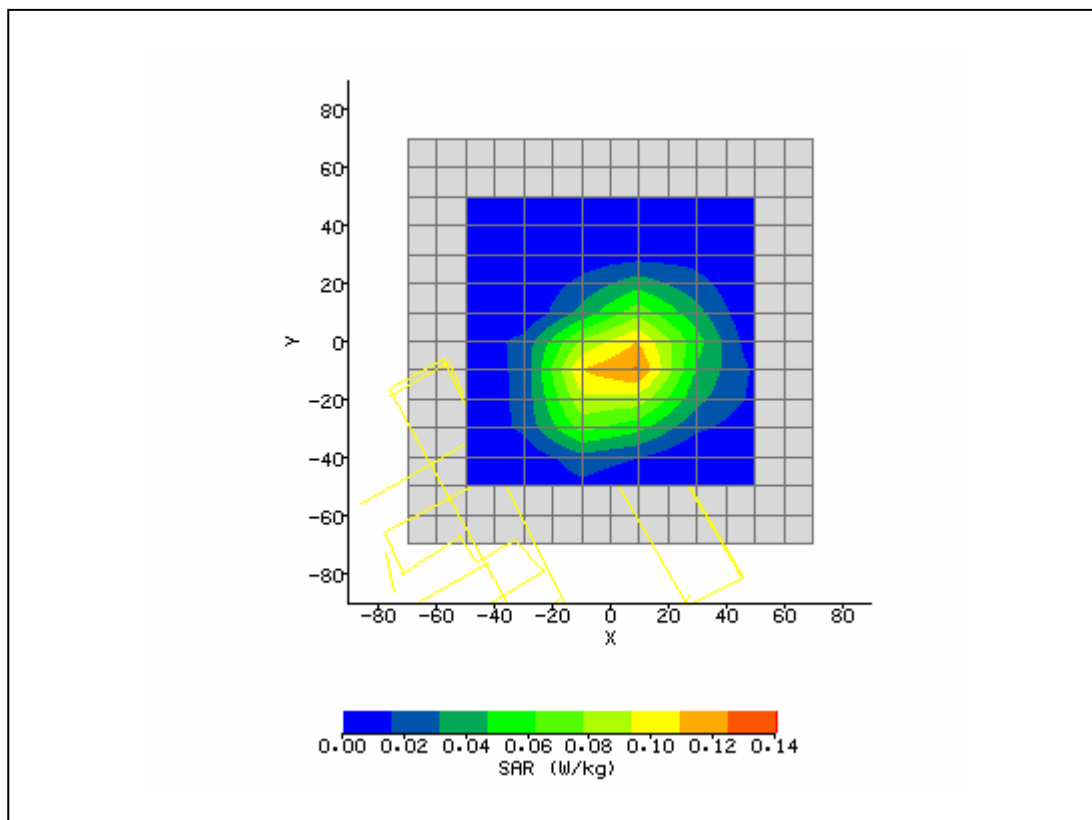

SAR Test Report No.:


SAR_SONY_008_06002_FCC_850_1900_2450_5000

Date of Report: 07/12/2006

Appendix A Plots

Page 12 of 37

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	6/28/2006 10:43:22 AM	DUT Battery Model/No:	
Filename:	bystand25.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	1900
Device Under Test:	F series laptop	Relative Permittivity:	52.98
Relative Humidity:	30%	Conductivity:	1.581
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	10.00 mm
DUT Position:	bystander side 2.0 cm	Max SAR Y-axis Location:	-11.00 mm
Antenna Configuration:	45 degrees	Max E Field:	9.95 V/m
Test Frequency:	1908.75MHz	SAR 1g:	0.205 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.107 W/kg
Conversion Factors:	.473 / .473 / .473	SAR Start:	0.013 W/kg
Type of Modulation:		SAR End:	0.013 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	1.31 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	6/27/06
Input Power Level:	max	Extrapolation:	poly4

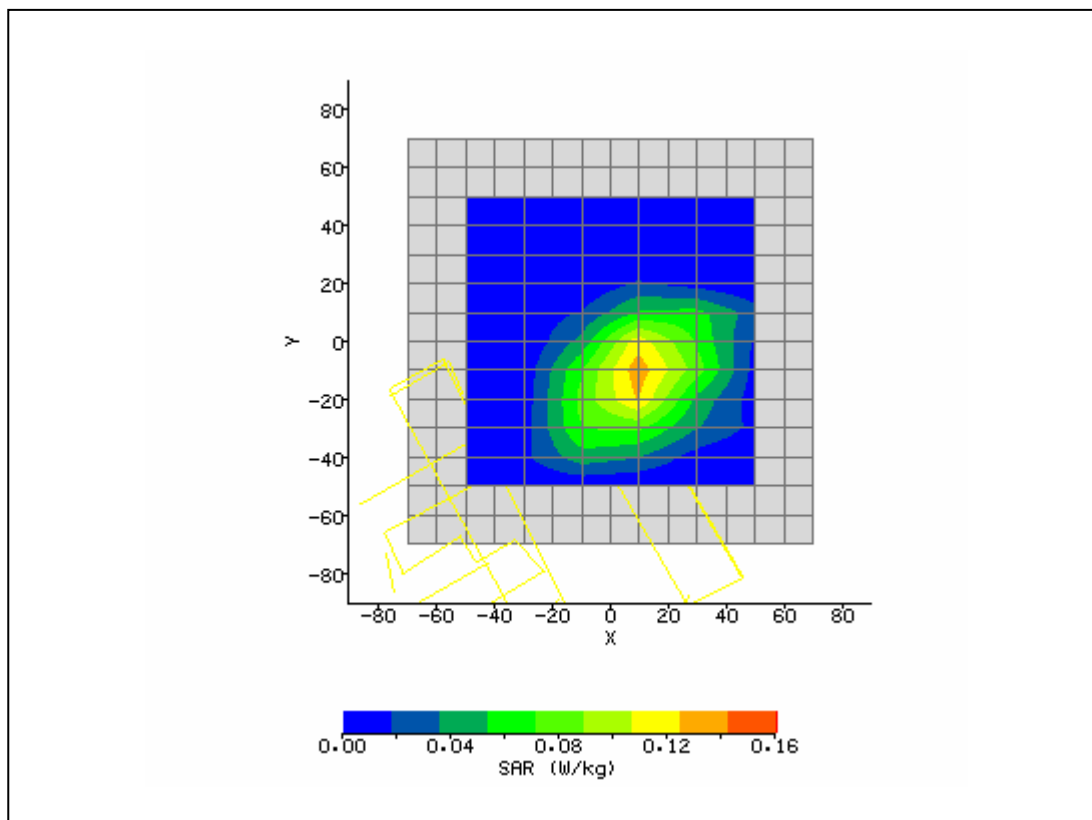

SAR Test Report No.:


SAR_SONY_008_06002_FCC_850_1900_2450_5000

Date of Report: 07/12/2006

Appendix A Plots

Page 13 of 37

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	6/30/2006 10:03:08 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	2540
Device Under Test:	Sony F series	Relative Permittivity:	51.70
Relative Humidity:	30%	Conductivity:	1.959
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-14.00 mm
DUT Position:	rear bystander 2.0 cm	Max SAR Y-axis Location:	-31.00 mm
Antenna Configuration:	main	Max E Field:	8.10 V/m
Test Frequency:	2437MHz	SAR 1g:	0.144 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.121 W/kg
Conversion Factors:	.490 / .490 / .490	SAR Start:	0.112 W/kg
Type of Modulation:		SAR End:	0.112 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.95 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	6/27/06
Input Power Level:	max	Extrapolation:	poly4

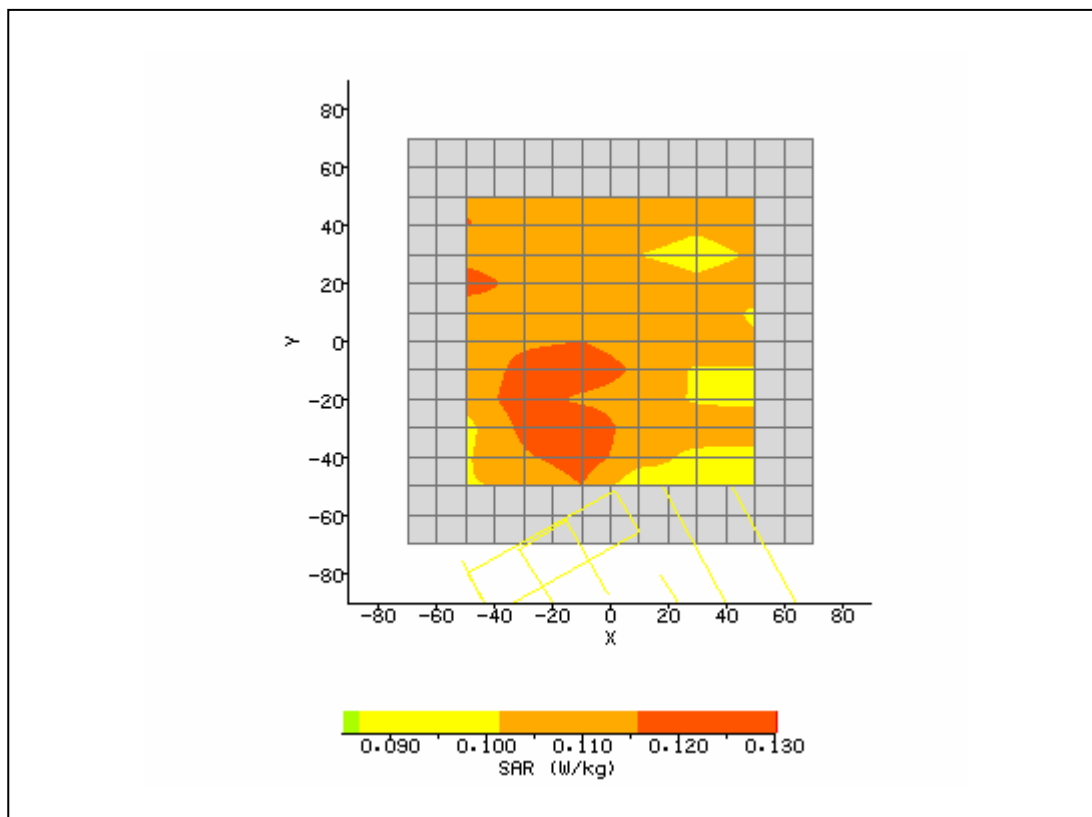

SAR Test Report No.:


SAR_SONY_008_06002_FCC_850_1900_2450_5000

Date of Report: 07/12/2006

Appendix A Plots

Page 14 of 37

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	6/30/2006 11:05:29 AM	DUT Battery Model/No:	
Filename:	side6aux.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	2540
Device Under Test:	Sony F series	Relative Permittivity:	51.70
Relative Humidity:	30%	Conductivity:	1.959
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	8.00 mm
DUT Position:	side bystander 2.0 cm	Max SAR Y-axis Location:	-4.00 mm
Antenna Configuration:	Main	Max E Field:	8.25 V/m
Test Frequency:	2437MHz	SAR 1g:	0.154 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.130 W/kg
Conversion Factors:	.490 / .490 / .490	SAR Start:	0.106 W/kg
Type of Modulation:		SAR End:	0.106 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.11 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	6/27/06
Input Power Level:	max	Extrapolation:	poly4

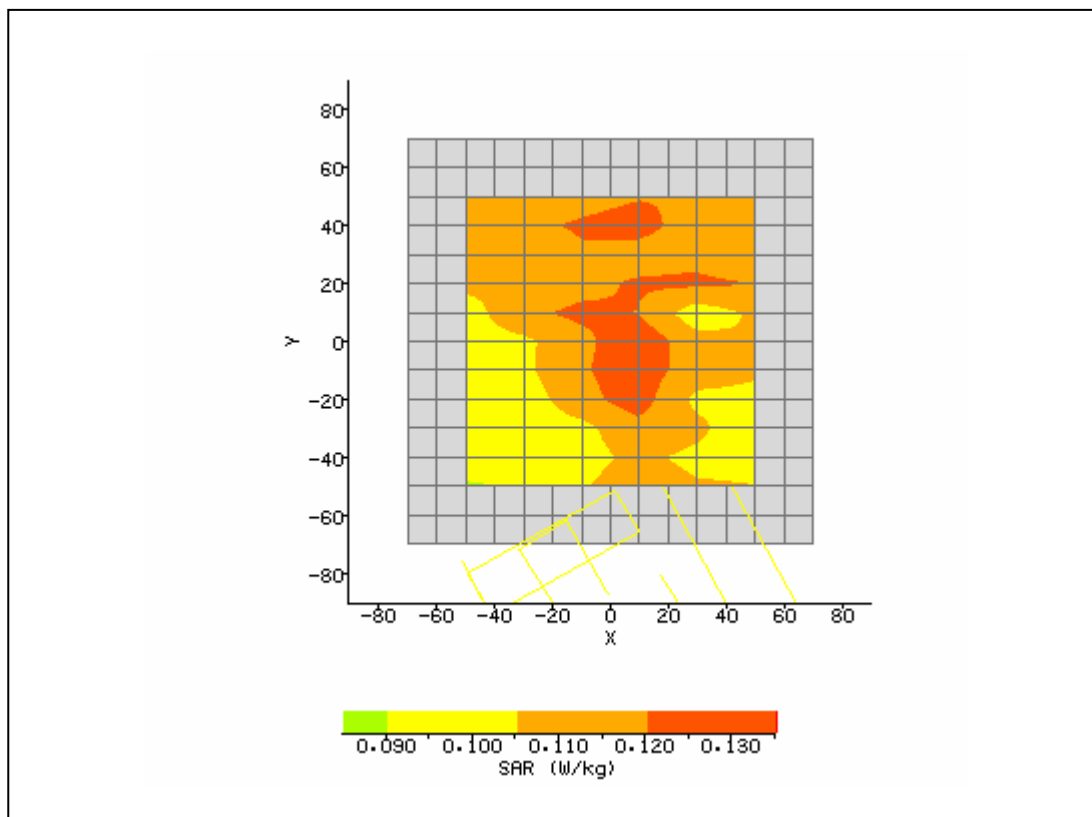

SAR Test Report No.:


SAR_SONY_008_06002_FCC_850_1900_2450_5000

Date of Report: 07/12/2006

Appendix A Plots

Page 15 of 37

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	6/30/2006 10:31:04 AM	DUT Battery Model/No:	
Filename:	bystd6main.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	2540
Device Under Test:	Sony F series	Relative Permittivity:	51.70
Relative Humidity:	30%	Conductivity:	1.959
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	8.00 mm
DUT Position:	rear bystander 2.0 cm	Max SAR Y-axis Location:	-11.00 mm
Antenna Configuration:	Auxillary	Max E Field:	8.39 V/m
Test Frequency:	2437MHz	SAR 1g:	0.148 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.126 W/kg
Conversion Factors:	.490 / .490 / .490	SAR Start:	0.105 W/kg
Type of Modulation:		SAR End:	0.109 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	4.47 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	6/27/06
Input Power Level:	max	Extrapolation:	poly4

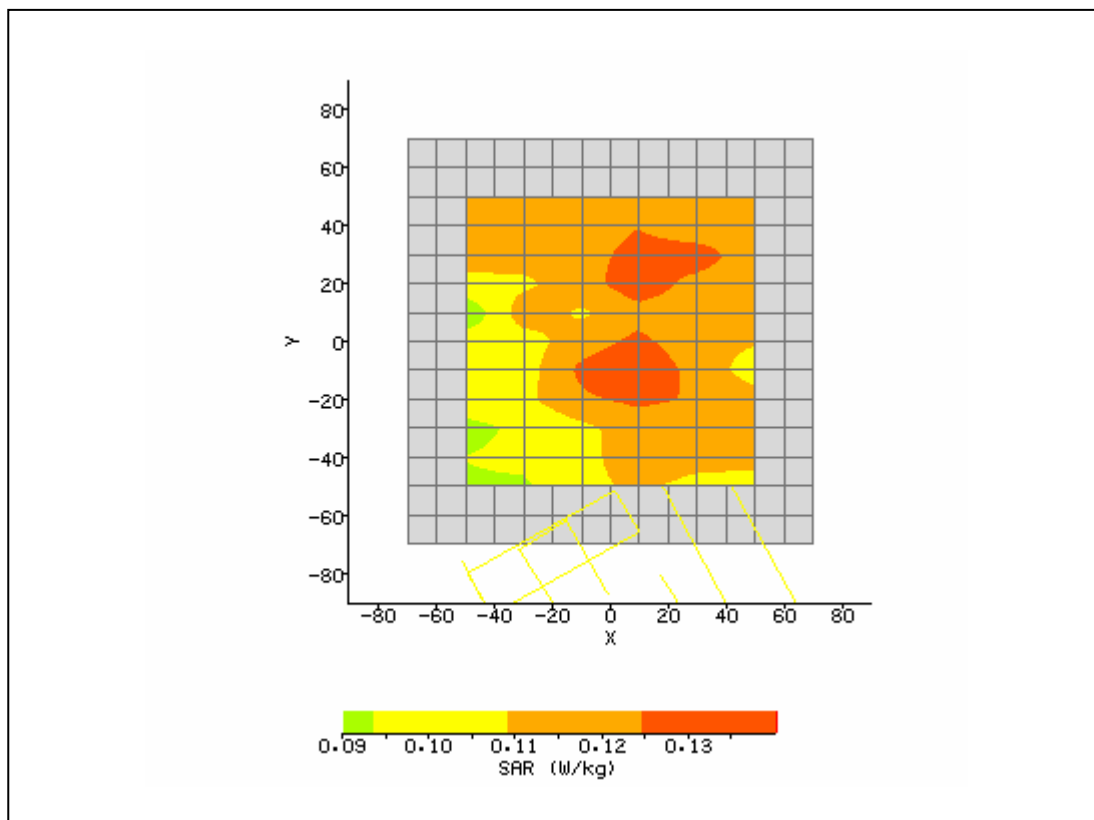

SAR Test Report No.:


SAR_SONY_008_06002_FCC_850_1900_2450_5000

Date of Report: 07/12/2006

Appendix A Plots

Page 16 of 37

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	6/30/2006 10:48:41 AM	DUT Battery Model/No:	
Filename:	bystd6aux.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	2540
Device Under Test:	Sony F series	Relative Permittivity:	51.70
Relative Humidity:	30%	Conductivity:	1.959
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	6.00 mm
DUT Position:	side bystander 2.0 cm	Max SAR Y-axis Location:	37.00 mm
Antenna Configuration:	Auxillary	Max E Field:	8.87 V/m
Test Frequency:	2437MHz	SAR 1g:	0.147 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.126 W/kg
Conversion Factors:	.490 / .490 / .490	SAR Start:	0.116 W/kg
Type of Modulation:		SAR End:	0.118 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	1.63 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	6/27/06
Input Power Level:	max	Extrapolation:	poly4

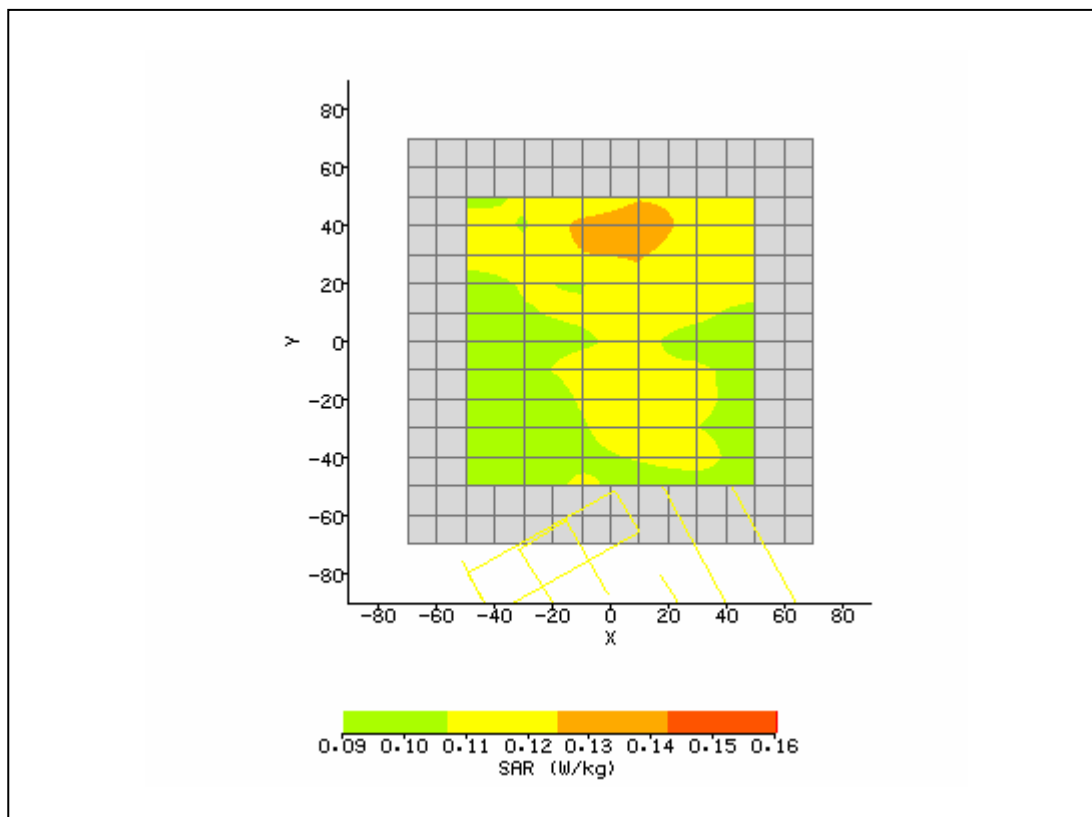

SAR Test Report No.:


SAR_SONY_008_06002_FCC_850_1900_2450_5000

Date of Report: 07/12/2006

Appendix A Plots

Page 17 of 37

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	6/30/2006 11:22:38 AM	DUT Battery Model/No:	
Filename:	side6main.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	2540
Device Under Test:	Sony F series	Relative Permittivity:	51.33
Relative Humidity:	30%	Conductivity:	1.948
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	16.00 mm
DUT Position:	side bystander 2.0 cm	Max SAR Y-axis Location:	10.00 mm
Antenna Configuration:	Main	Max E Field:	8.67 V/m
Test Frequency:	2412MHz	SAR 1g:	0.159 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.132 W/kg
Conversion Factors:	.490 / .490 / .490	SAR Start:	0.121 W/kg
Type of Modulation:		SAR End:	0.125 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	3.31 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	6/27/06
Input Power Level:	max	Extrapolation:	poly4

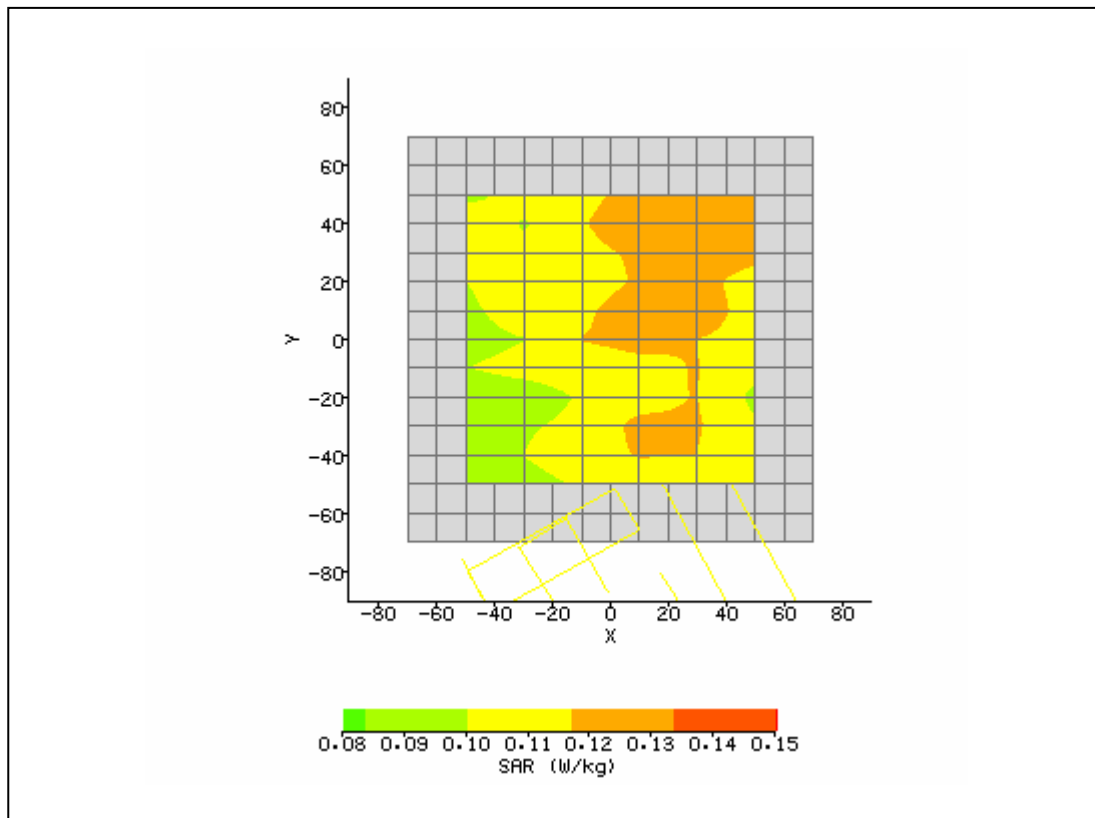

SAR Test Report No.:


SAR_SONY_008_06002_FCC_850_1900_2450_5000

Date of Report: 07/12/2006

Appendix A Plots

Page 18 of 37

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	6/30/2006 11:47:40 AM	DUT Battery Model/No:	
Filename:	side1main.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	2540
Device Under Test:	Sony F series	Relative Permittivity:	51.07
Relative Humidity:	30%	Conductivity:	1.96
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	32.00 mm
DUT Position:	side bystander 2.0 cm	Max SAR Y-axis Location:	50.00 mm
Antenna Configuration:	Main	Max E Field:	8.73 V/m
Test Frequency:	2462MHz	SAR 1g:	0.150 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.131 W/kg
Conversion Factors:	.490 / .490 / .490	SAR Start:	0.121 W/kg
Type of Modulation:		SAR End:	0.122 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.83 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	6/27/06
Input Power Level:	max	Extrapolation:	poly4

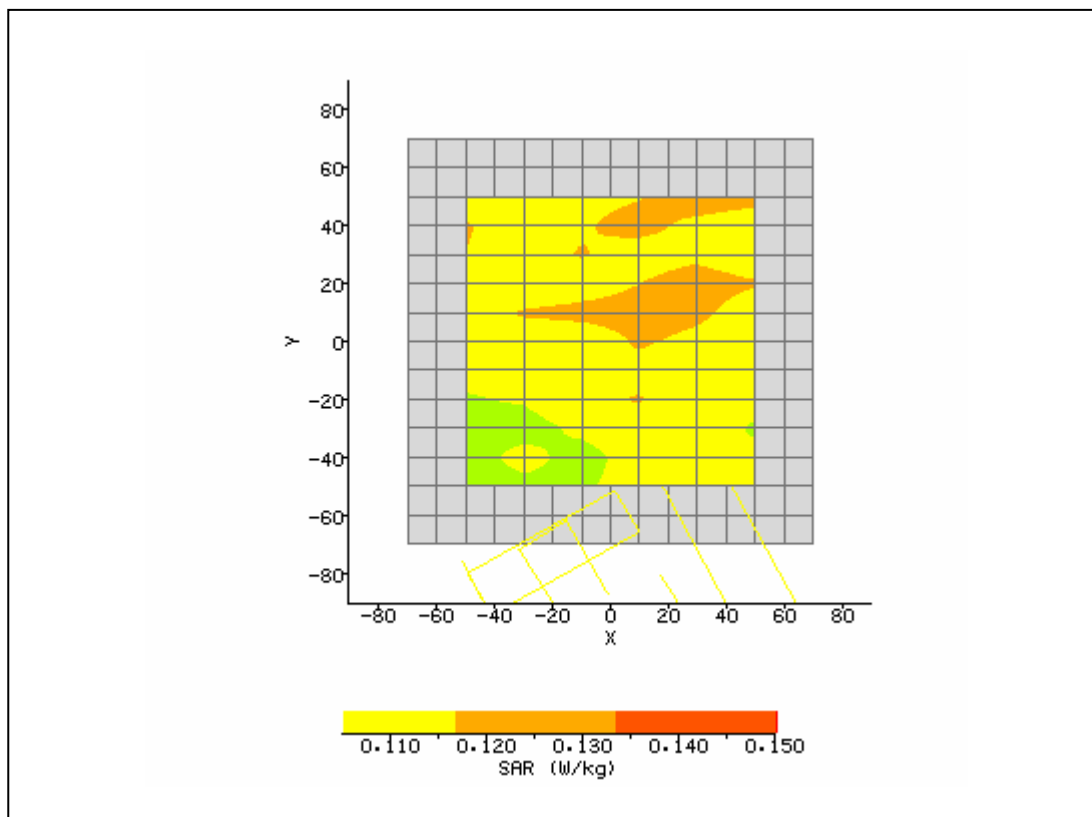

SAR Test Report No.:


SAR_SONY_008_06002_FCC_850_1900_2450_5000

Date of Report: 07/12/2006

Appendix A Plots

Page 19 of 37

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	6/30/2006 2:31:19 PM	DUT Battery Model/No:	
Filename:	side6main.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	2540
Device Under Test:	Sony F series	Relative Permittivity:	51.33
Relative Humidity:	30%	Conductivity:	1.948
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-4.80 mm
DUT Position:	side bystander 2.0 cm	Max SAR Y-axis Location:	-24.00 mm
Antenna Configuration:	Main	Max E Field:	8.68V/m
Test Frequency:	2412MHz & 2402 BT	SAR 1g:	0.159 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.133 W/kg
Conversion Factors:	.490 / .490 / .490	SAR Start:	0.119 W/kg
Type of Modulation:		SAR End:	0.121 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	1.68 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	6/27/06
Input Power Level:	max	Extrapolation:	poly4

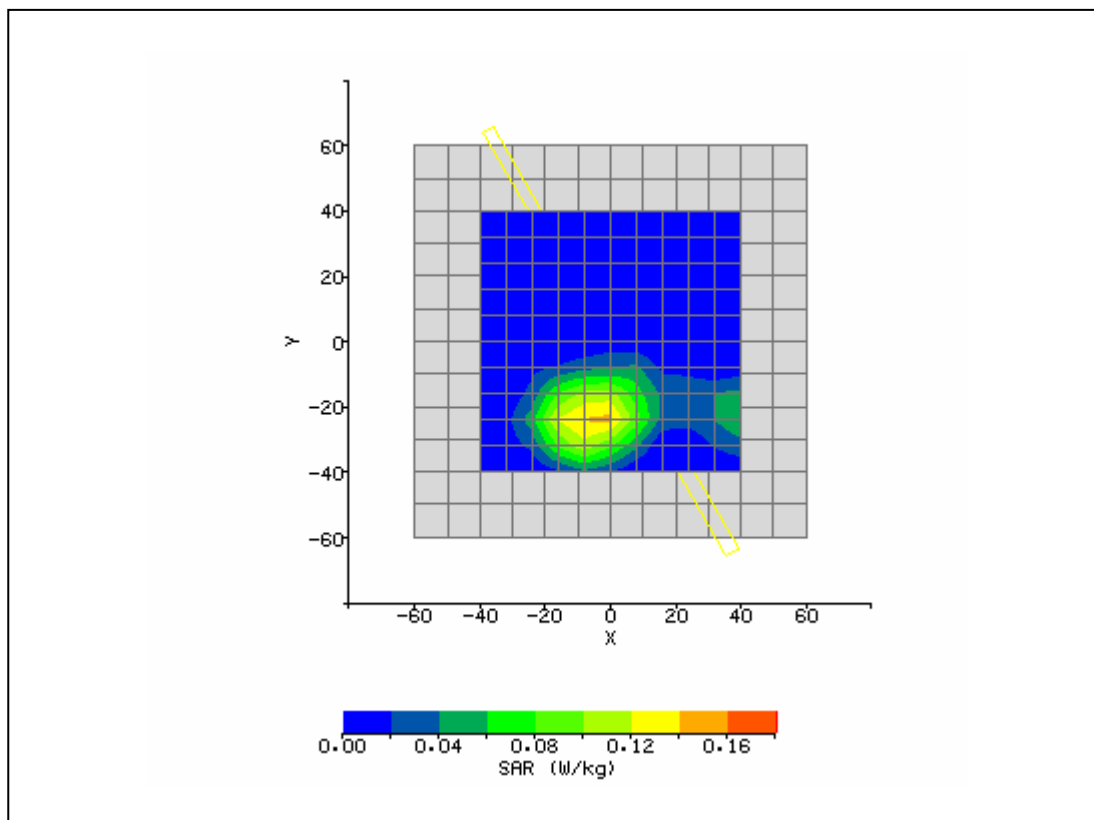

SAR Test Report No.:


SAR_SONY_008_06002_FCC_850_1900_2450_5000

Date of Report: 07/12/2006

Appendix A Plots

Page 20 of 37

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	7/3/2006 2:54:11 P PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	5200
Device Under Test:	Sony F series	Relative Permittivity:	47.79
Relative Humidity:	30%	Conductivity:	5.436
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-28.00 mm
DUT Position:	rear bystander 2.0 cm	Max SAR Y-axis Location:	-30.00 mm
Antenna Configuration:	Main	Max E Field:	6.38 V/m
Test Frequency:	5260MHz	SAR 1g:	0.418 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.220 W/kg
Conversion Factors:	.502 / .502 / .502	SAR Start:	0.096 W/kg
Type of Modulation:		SAR End:	0.097 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	1.04 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	6/27/06
Input Power Level:	max	Extrapolation:	poly4

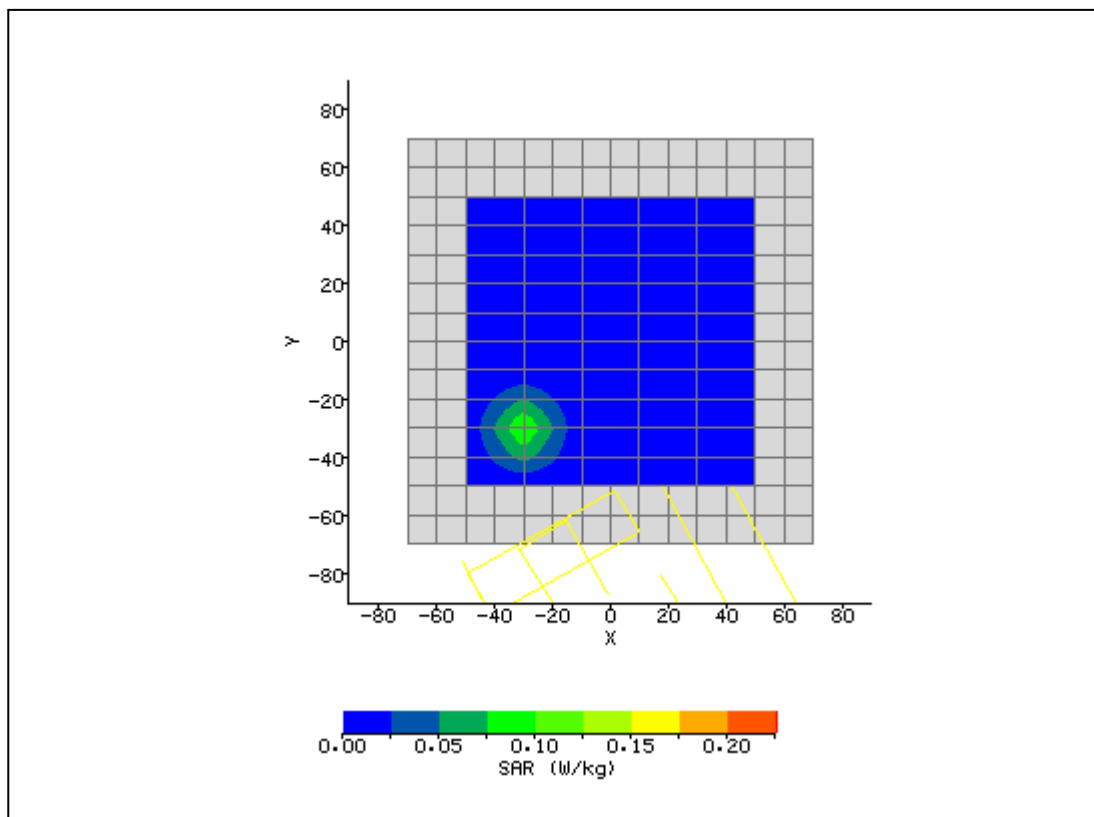

SAR Test Report No.:


SAR_SONY_008_06002_FCC_850_1900_2450_5000

Date of Report: 07/12/2006

Appendix A Plots

Page 21 of 37

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	7/3/2006 1:11:16 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	5200
Device Under Test:	Sony F series	Relative Permittivity:	47.79
Relative Humidity:	30%	Conductivity:	5.436
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	26.00 mm
DUT Position:	side bystander 2.0 cm	Max SAR Y-axis Location:	1.00 mm
Antenna Configuration:	Main	Max E Field:	7.48 V/m
Test Frequency:	5260MHz	SAR 1g:	0.407 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.227 W/kg
Conversion Factors:	.502 / .502 / .502	SAR Start:	0.067 W/kg
Type of Modulation:		SAR End:	0.068 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	1.49 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	6/27/06
Input Power Level:	max	Extrapolation:	poly4

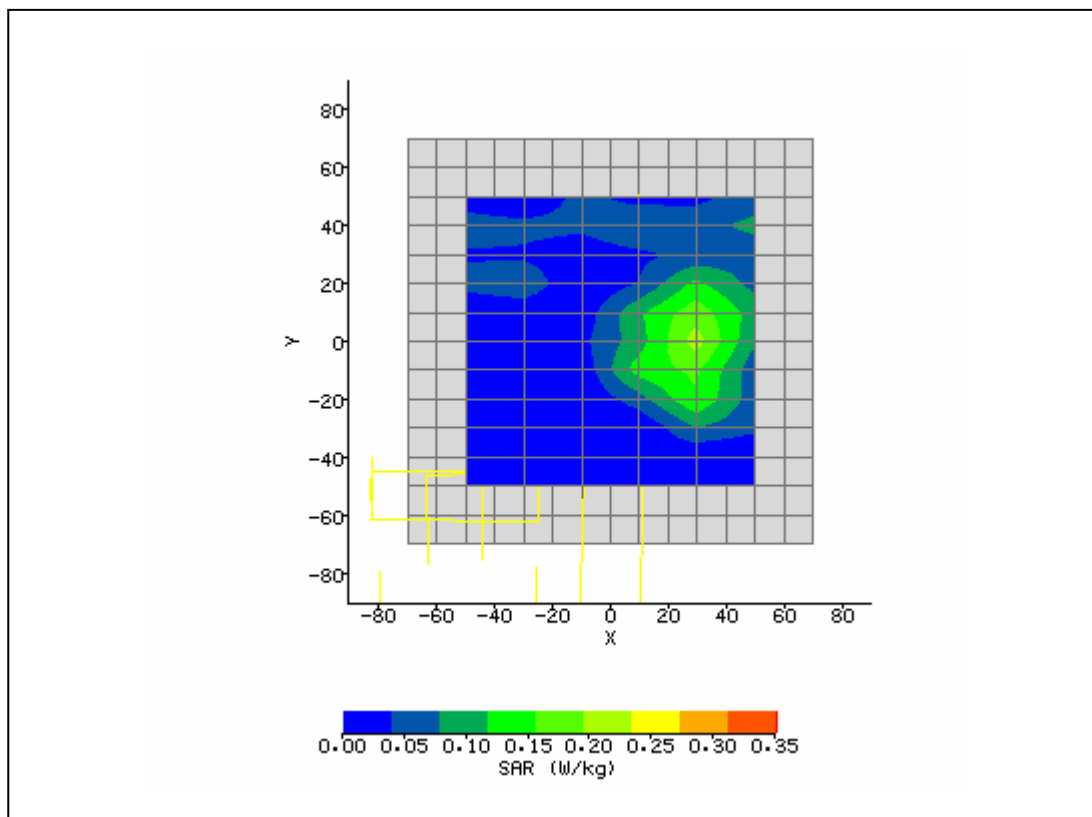

SAR Test Report No.:


SAR_SONY_008_06002_FCC_850_1900_2450_5000

Date of Report: 07/12/2006

Appendix A Plots

Page 22 of 37

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	7/3/2006 2:27:59 PM	DUT Battery Model/No:	
Filename:	side52aux.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	5200
Device Under Test:	Sony F series	Relative Permittivity:	47.79
Relative Humidity:	30%	Conductivity:	5.436
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	12.00 mm
DUT Position:	rear bystander 2.0 cm	Max SAR Y-axis Location:	7.00 mm
Antenna Configuration:	Auxillary	Max E Field:	6.26 V/m
Test Frequency:	5260MHz	SAR 1g:	0.213 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.103 W/kg
Conversion Factors:	.502 / .502 / .502	SAR Start:	0.050 W/kg
Type of Modulation:		SAR End:	0.049 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-2.00 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	6/27/06
Input Power Level:	max	Extrapolation:	poly4

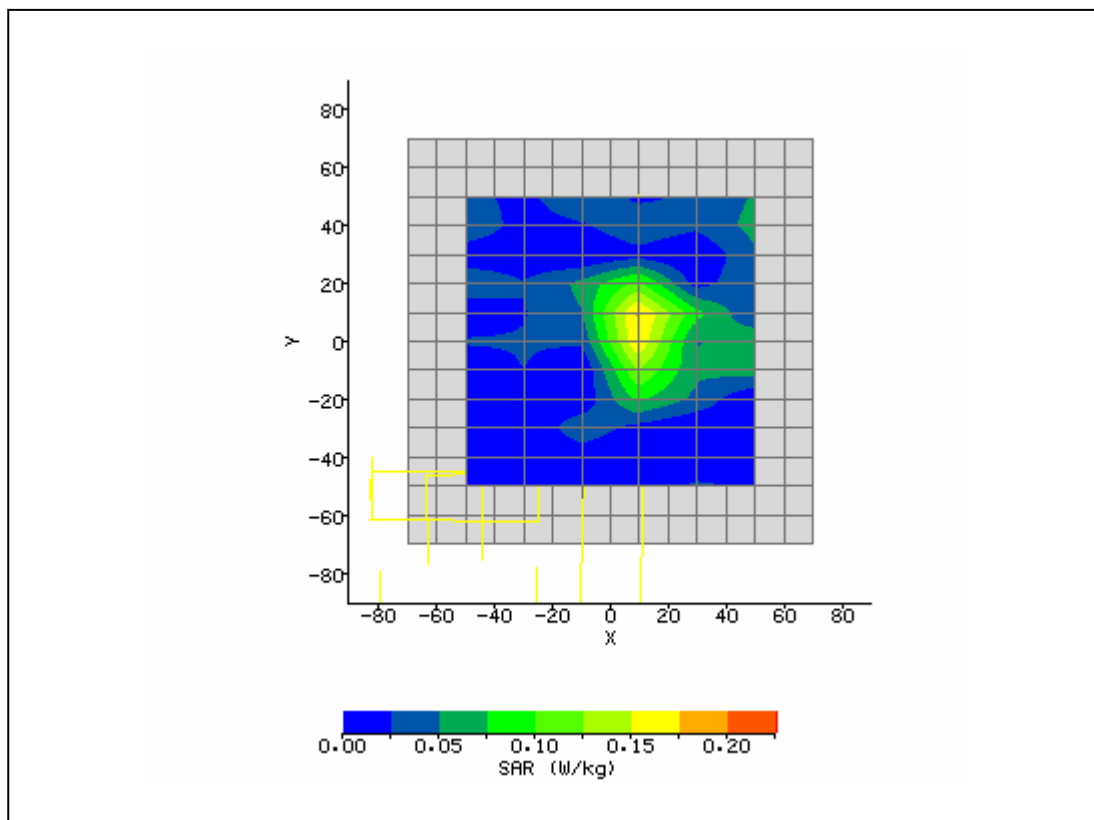

SAR Test Report No.:


SAR_SONY_008_06002_FCC_850_1900_2450_5000

Date of Report: 07/12/2006

Appendix A Plots

Page 23 of 37

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	7/3/2006 2:05:07 PM	DUT Battery Model/No:	
Filename:	byst52main.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	5200
Device Under Test:	Sony F series	Relative Permittivity:	47.79
Relative Humidity:	30%	Conductivity:	5.436
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	4.00 mm
DUT Position:	side bystander 2.0 cm	Max SAR Y-axis Location:	30.00 mm
Antenna Configuration:	Auxillary	Max E Field:	7.05 V/m
Test Frequency:	5260MHz	SAR 1g:	0.292 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.154 W/kg
Conversion Factors:	.502 / .502 / .502	SAR Start:	0.047 W/kg
Type of Modulation:		SAR End:	0.046 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-2.13 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	6/27/06
Input Power Level:	max	Extrapolation:	poly4

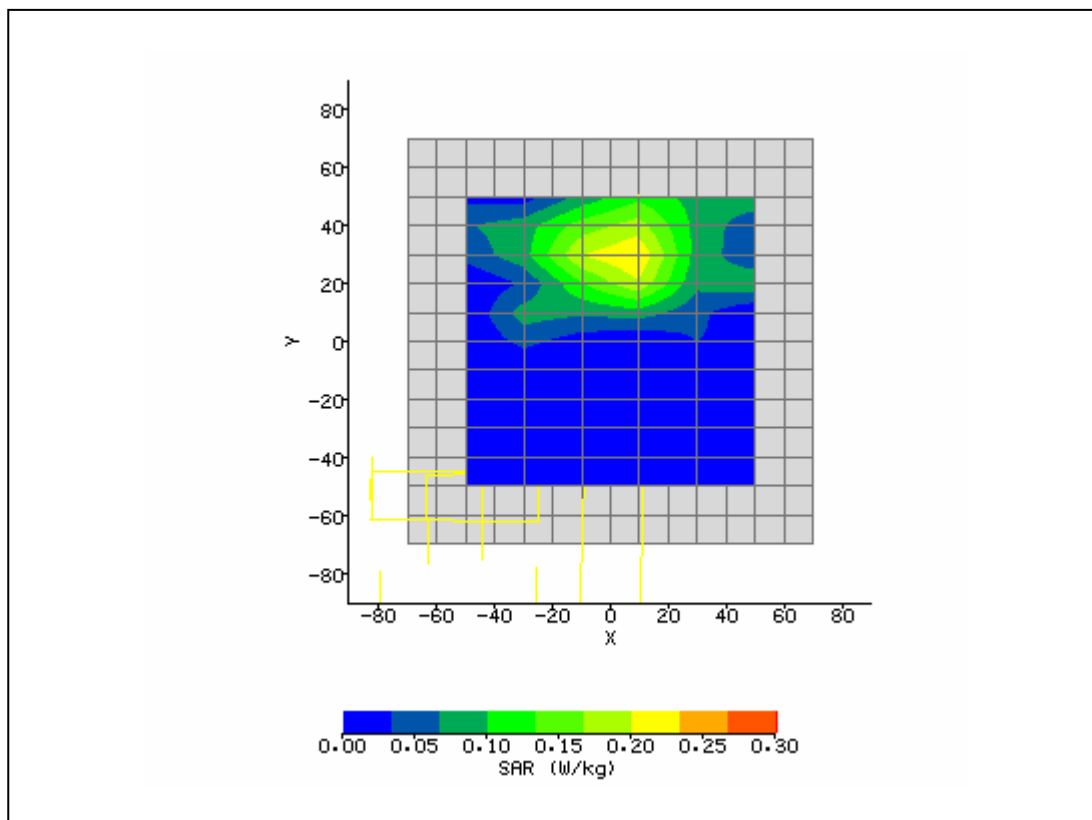

SAR Test Report No.:


SAR_SONY_008_06002_FCC_850_1900_2450_5000

Date of Report: 07/12/2006

Appendix A Plots

Page 24 of 37

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	7/3/2006 3:27:30 PM	DUT Battery Model/No:	
Filename:	rear52main.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	5200
Device Under Test:	Sony F series	Relative Permittivity:	48.11
Relative Humidity:	30%	Conductivity:	5.399
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-14.00 mm
DUT Position:	rear bystander 2.0 cm	Max SAR Y-axis Location:	-32.00 mm
Antenna Configuration:	Main	Max E Field:	6.19 V/m
Test Frequency:	5180MHz	SAR 1g:	0.276 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.111 W/kg
Conversion Factors:	.502 / .502 / .502	SAR Start:	0.041 W/kg
Type of Modulation:		SAR End:	0.040 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-2.44 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	6/27/06
Input Power Level:	max	Extrapolation:	poly4

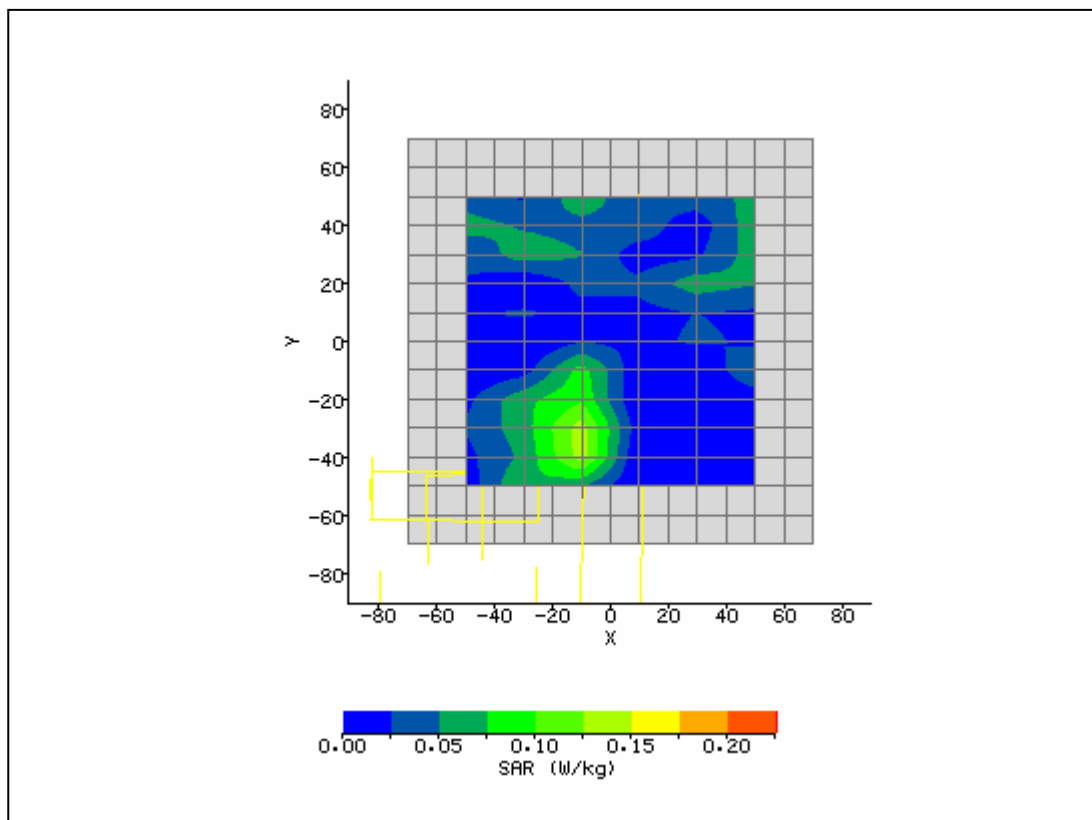

SAR Test Report No.:


SAR_SONY_008_06002_FCC_850_1900_2450_5000

Date of Report: 07/12/2006

Appendix A Plots

Page 25 of 37

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	7/3/2006 3:42PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	5200
Device Under Test:	Sony F series	Relative Permittivity:	47.72
Relative Humidity:	30%	Conductivity:	5.482
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-28.00 mm
DUT Position:	rear bystander 2.0 cm	Max SAR Y-axis Location:	-20.00 mm
Antenna Configuration:	Main	Max E Field:	2.95 V/m
Test Frequency:	5320MHz	SAR 1g:	0.389 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.143 W/kg
Conversion Factors:	.502 / .502 / .502	SAR Start:	0.036 W/kg
Type of Modulation:		SAR End:	0.035 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-2.78 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	6/27/06
Input Power Level:	max	Extrapolation:	poly4

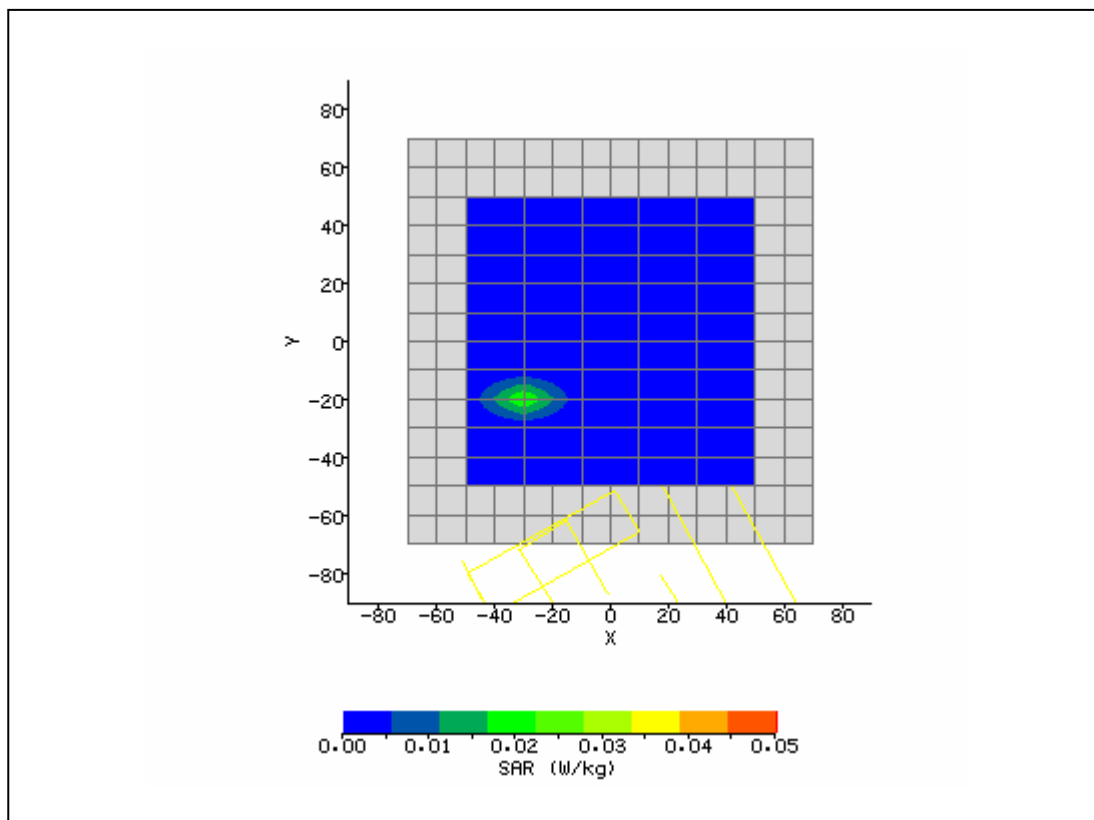

SAR Test Report No.:


SAR_SONY_008_06002_FCC_850_1900_2450_5000

Date of Report: 07/12/2006

Appendix A Plots

Page 26 of 37

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	7/3/2006 4:07:10 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	5200
Device Under Test:	Sony F series	Relative Permittivity:	47.79
Relative Humidity:	30%	Conductivity:	5.436
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-28.00 mm
DUT Position:	rear bystander 2.0 cm	Max SAR Y-axis Location:	-27.00 mm
Antenna Configuration:	Main	Max E Field:	6.62 V/m
Test Frequency:	5260MHz & 2402 BT	SAR 1g:	0.437 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.241 W/kg
Conversion Factors:	.502 / .502 / .502	SAR Start:	0.096 W/kg
Type of Modulation:		SAR End:	0.096 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.02 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	6/27/06
Input Power Level:	max	Extrapolation:	poly4

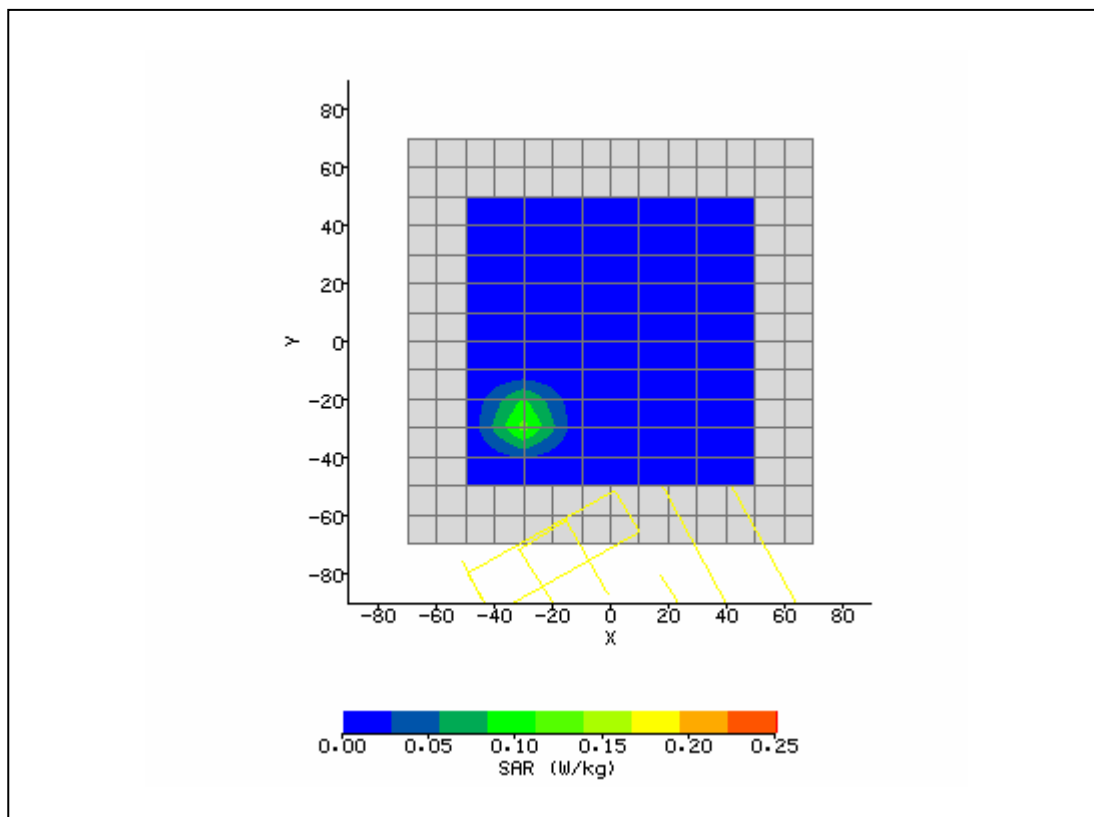

SAR Test Report No.:


SAR_SONY_008_06002_FCC_850_1900_2450_5000

Date of Report: 07/12/2006

Appendix A Plots

Page 27 of 37

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	7/5/2006 2:18:45 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	5800
Device Under Test:	Sony F series	Relative Permittivity:	46.93
Relative Humidity:	30%	Conductivity:	6.438
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-28.00 mm
DUT Position:	rear bystander 2.0 cm	Max SAR Y-axis Location:	-31.00 mm
Antenna Configuration:	Main	Max E Field:	5.44 V/m
Test Frequency:	5785MHz	SAR 1g:	0.401 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.195 W/kg
Conversion Factors:	.459 / .459 / .459	SAR Start:	0.086 W/kg
Type of Modulation:		SAR End:	0.085 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-1.16 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	6/27/06
Input Power Level:	max	Extrapolation:	poly4

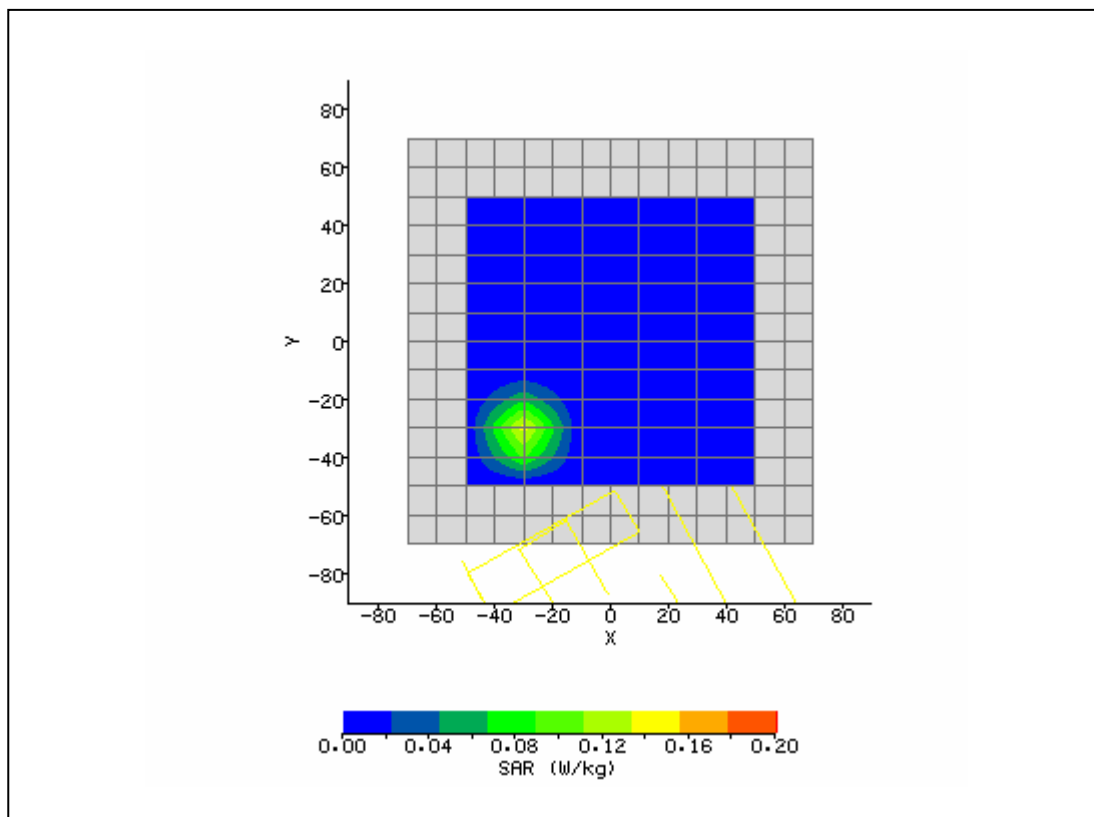

SAR Test Report No.:


SAR_SONY_008_06002_FCC_850_1900_2450_5000

Date of Report: 07/12/2006

Appendix A Plots

Page 28 of 37

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	7/5/2006 3:28:20 PM	DUT Battery Model/No:	
Filename:	side157aux.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	5800
Device Under Test:	Sony F series	Relative Permittivity:	46.93
Relative Humidity:	30%	Conductivity:	6.438
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	28.00 mm
DUT Position:	side bystander 2.0 cm	Max SAR Y-axis Location:	-10.00 mm
Antenna Configuration:	Main	Max E Field:	5.47 V/m
Test Frequency:	5785MHz	SAR 1g:	0.406 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.229 W/kg
Conversion Factors:	.459 / .459 / .459	SAR Start:	0.092 W/kg
Type of Modulation:		SAR End:	0.093 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	1.09 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	6/27/06
Input Power Level:	max	Extrapolation:	poly4

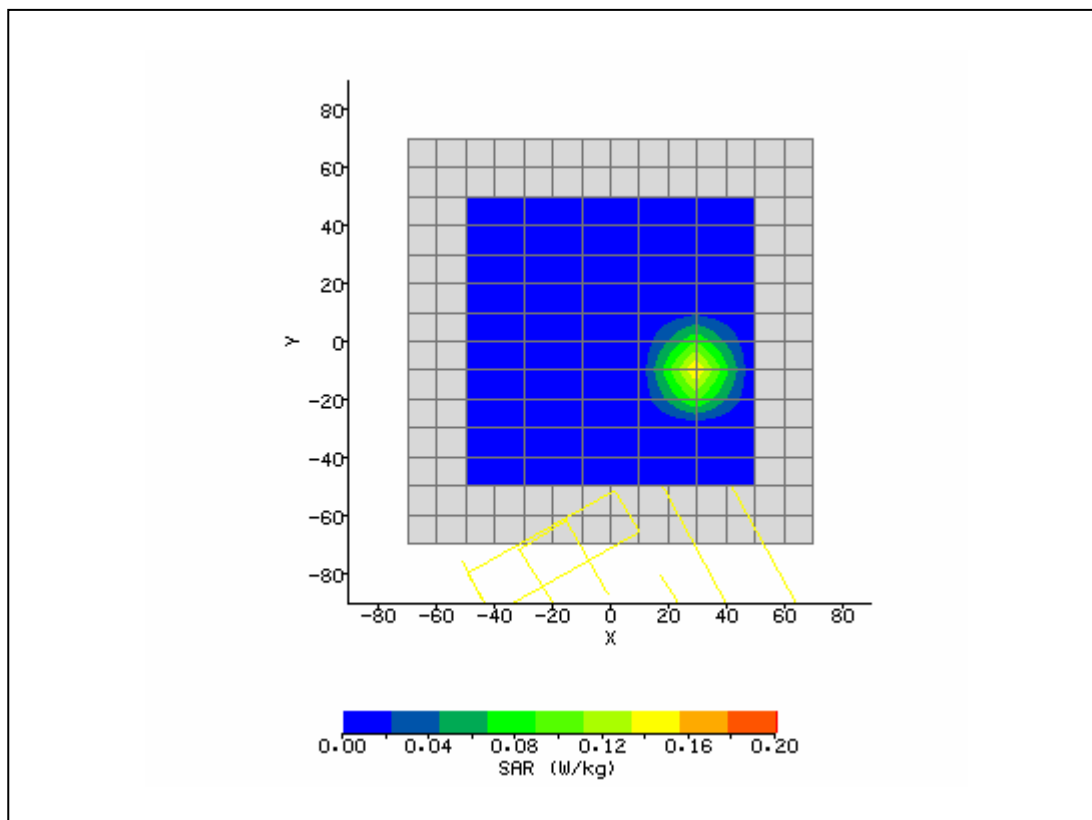

SAR Test Report No.:


SAR_SONY_008_06002_FCC_850_1900_2450_5000

Date of Report: 07/12/2006

Appendix A Plots

Page 29 of 37

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	7/5/2006 2:44:57 PM	DUT Battery Model/No:	
Filename:	rear157main.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	5800
Device Under Test:	Sony F series	Relative Permittivity:	46.93
Relative Humidity:	30%	Conductivity:	6.438
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	20.00 mm
DUT Position:	rear bystander 2.0 cm	Max SAR Y-axis Location:	-2.00 mm
Antenna Configuration:	Auxillary	Max E Field:	4.35 V/m
Test Frequency:	5785MHz	SAR 1g:	0.225 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.135 W/kg
Conversion Factors:	.459 / .459 / .459	SAR Start:	0.064 W/kg
Type of Modulation:		SAR End:	0.063 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-1.56 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	6/27/06
Input Power Level:	max	Extrapolation:	poly4

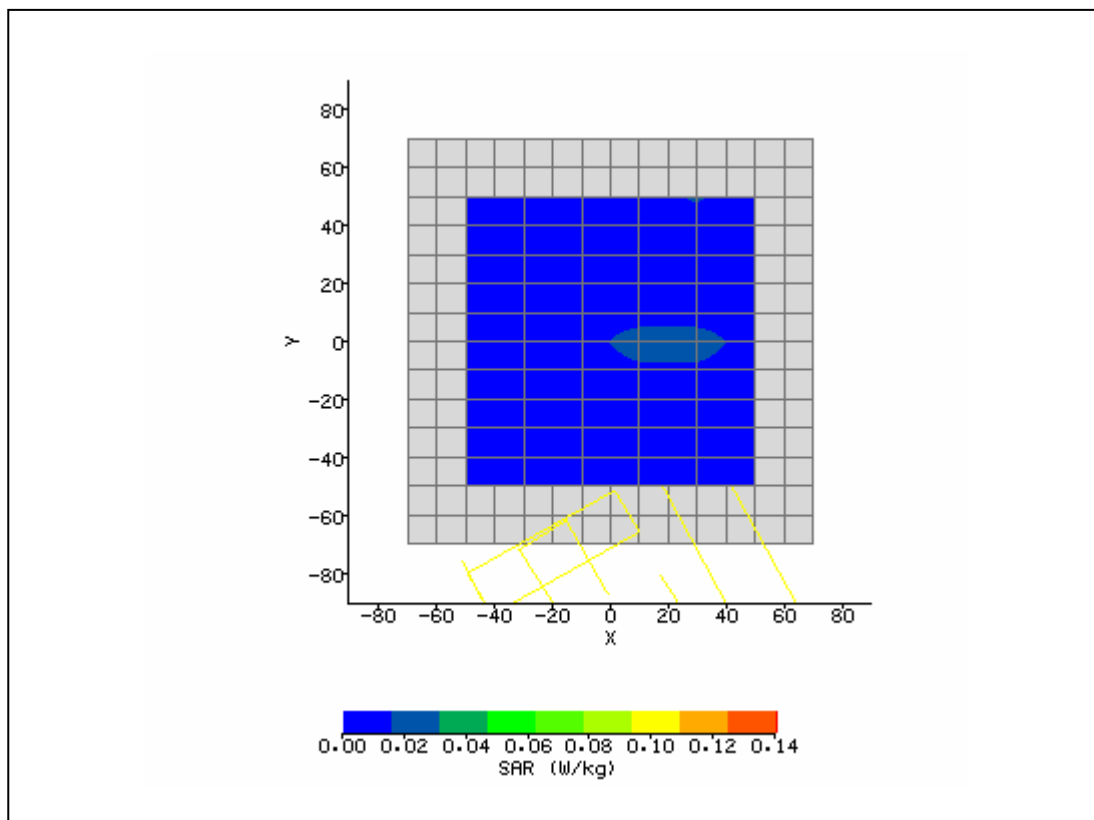

SAR Test Report No.:


SAR_SONY_008_06002_FCC_850_1900_2450_5000

Date of Report: 07/12/2006

Appendix A Plots

Page 30 of 37

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	7/5/2006 3:45:26 PM	DUT Battery Model/No:	
Filename:	side157main.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	5800
Device Under Test:	Sony F series	Relative Permittivity:	47.21
Relative Humidity:	30%	Conductivity:	6.441
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	28.00 mm
DUT Position:	side bystander 2.0 cm	Max SAR Y-axis Location:	-12.00 mm
Antenna Configuration:	Main	Max E Field:	5.04 V/m
Test Frequency:	5745MHz	SAR 1g:	0.348 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.194 W/kg
Conversion Factors:	.459 / .459 / .459	SAR Start:	0.067 W/kg
Type of Modulation:		SAR End:	0.066 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-1.49 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	6/27/06
Input Power Level:	max	Extrapolation:	poly4

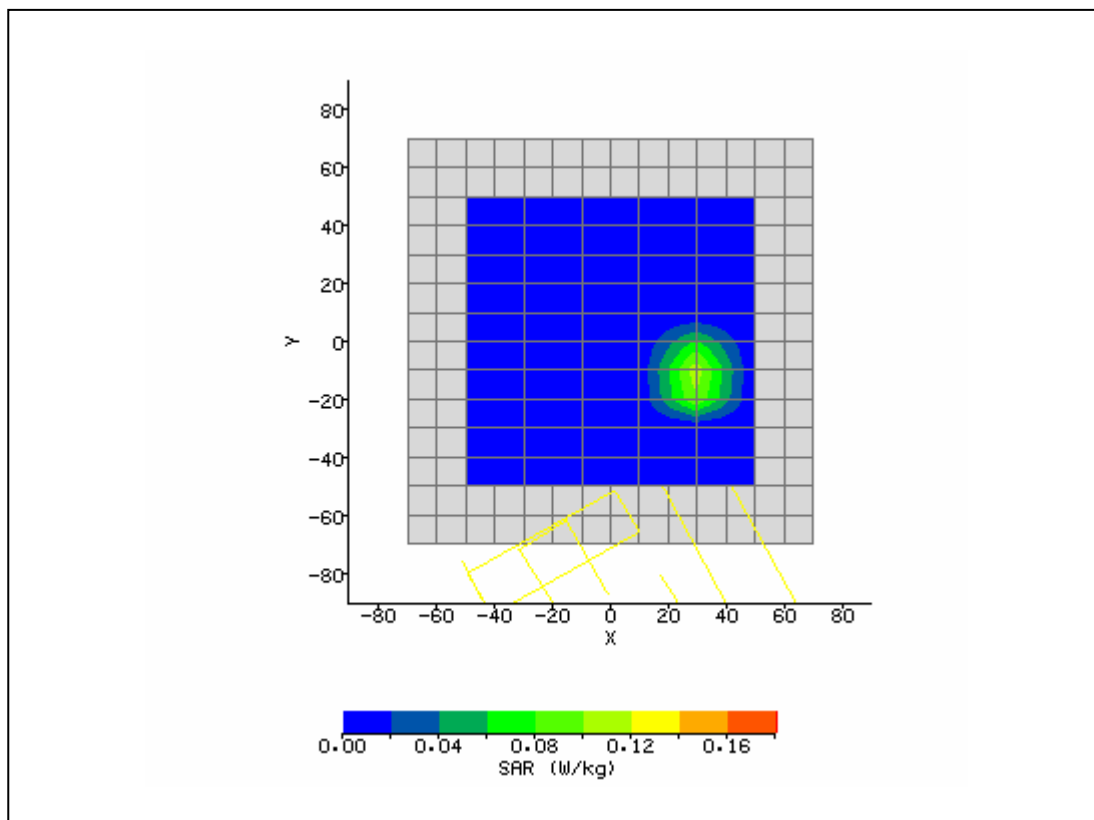

SAR Test Report No.:


SAR_SONY_008_06002_FCC_850_1900_2450_5000

Date of Report: 07/12/2006

Appendix A Plots

Page 31 of 37

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	7/5/2006 4:14:49 PM	DUT Battery Model/No:	
Filename:	side165main.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	5800
Device Under Test:	Sony F series	Relative Permittivity:	46.79
Relative Humidity:	30%	Conductivity:	6.436
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	24.00 mm
DUT Position:	side bystander 2.0 cm	Max SAR Y-axis Location:	-7.00 mm
Antenna Configuration:	Main	Max E Field:	6.25 V/m
Test Frequency:	5825MHz	SAR 1g:	0.440 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.210 W/kg
Conversion Factors:	.459 / .459 / .459	SAR Start:	0.073 W/kg
Type of Modulation:		SAR End:	0.074 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	1.37 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	6/27/06
Input Power Level:	max	Extrapolation:	poly4

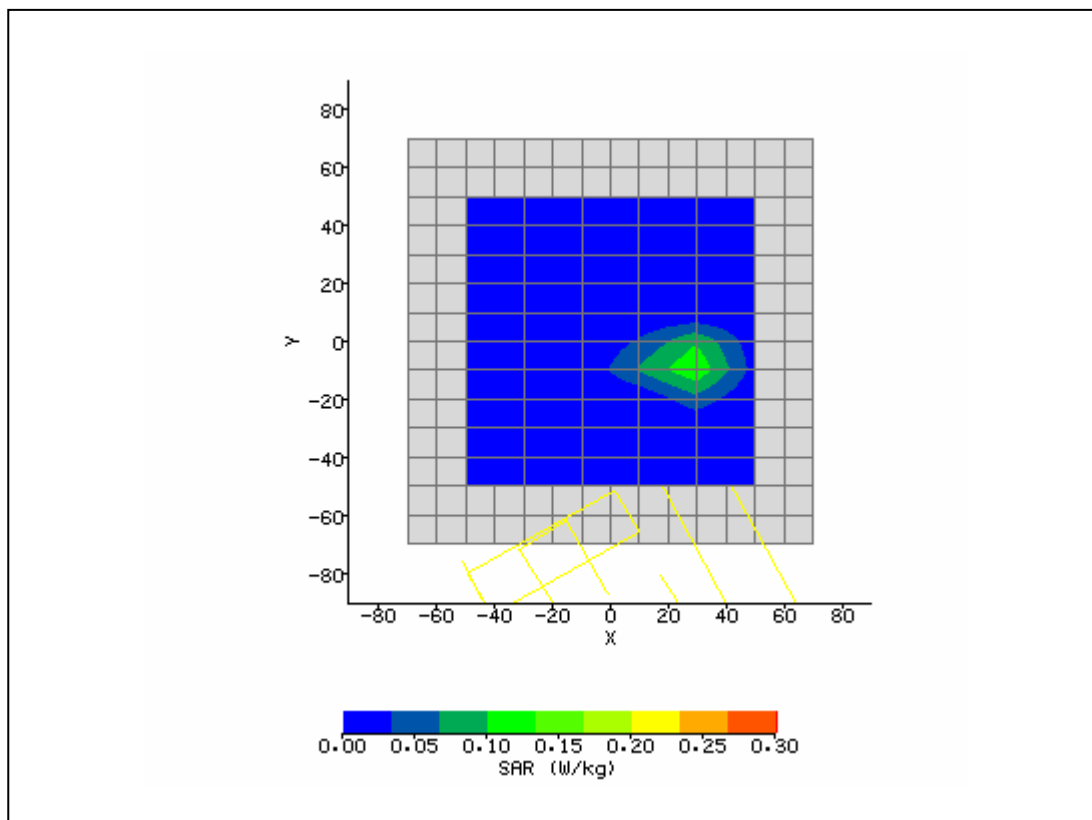

SAR Test Report No.:


SAR_SONY_008_06002_FCC_850_1900_2450_5000

Date of Report: 07/12/2006

Appendix A Plots

Page 32 of 37

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	7/5/2006 4:34:16 PM	DUT Battery Model/No:	
Filename:	side149main.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	5800
Device Under Test:	Sony F series	Relative Permittivity:	46.79
Relative Humidity:	30%	Conductivity:	6.436
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	24.00 mm
DUT Position:	side bystander 2.0 cm	Max SAR Y-axis Location:	-9.00 mm
Antenna Configuration:	Main	Max E Field:	5.99 V/m
Test Frequency:	5825MHz & 2402 MHz BT	SAR 1g:	0.456 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.259 W/kg
Conversion Factors:	.459 / .459 / .459	SAR Start:	0.082 W/kg
Type of Modulation:		SAR End:	0.084 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	2.44 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	6/27/06
Input Power Level:	max	Extrapolation:	poly4

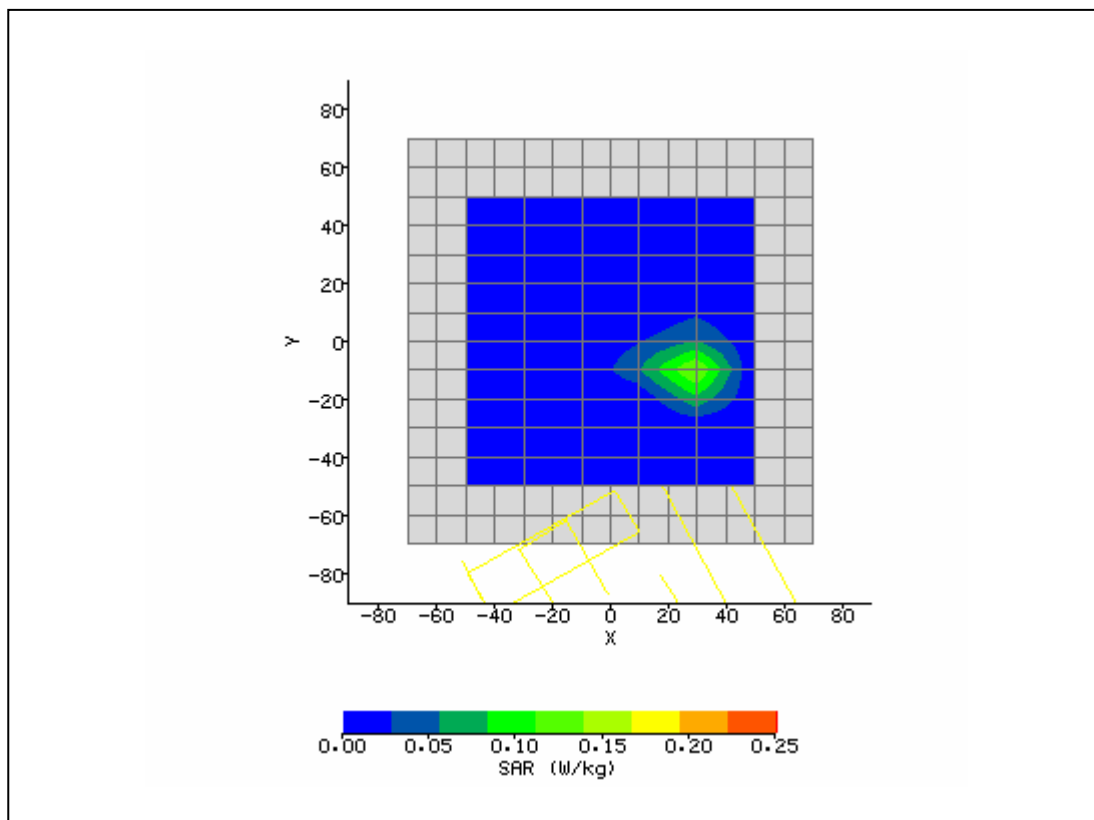

SAR Test Report No.:


SAR_SONY_008_06002_FCC_850_1900_2450_5000

Date of Report: 07/12/2006

Appendix A Plots

Page 33 of 37

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	6/27/2006 9:36:05 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	900
Device Under Test:	System verification	Relative Permittivity:	41.21
Relative Humidity:	30%	Conductivity:	0.969
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	12.00 mm
DUT Position:	verification	Max SAR Y-axis Location:	-14.00 mm
Antenna Configuration:	dipole	Max E Field:	95.94 V/m
Test Frequency:	900MHz	SAR 1g:	10.314 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	7.307 W/kg
Conversion Factors:	.275 / .275 / .275	SAR Start:	3.705 W/kg
Type of Modulation:		SAR End:	3.641 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-1.74 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	6/27/06
Input Power Level:	1W	Extrapolation:	poly4

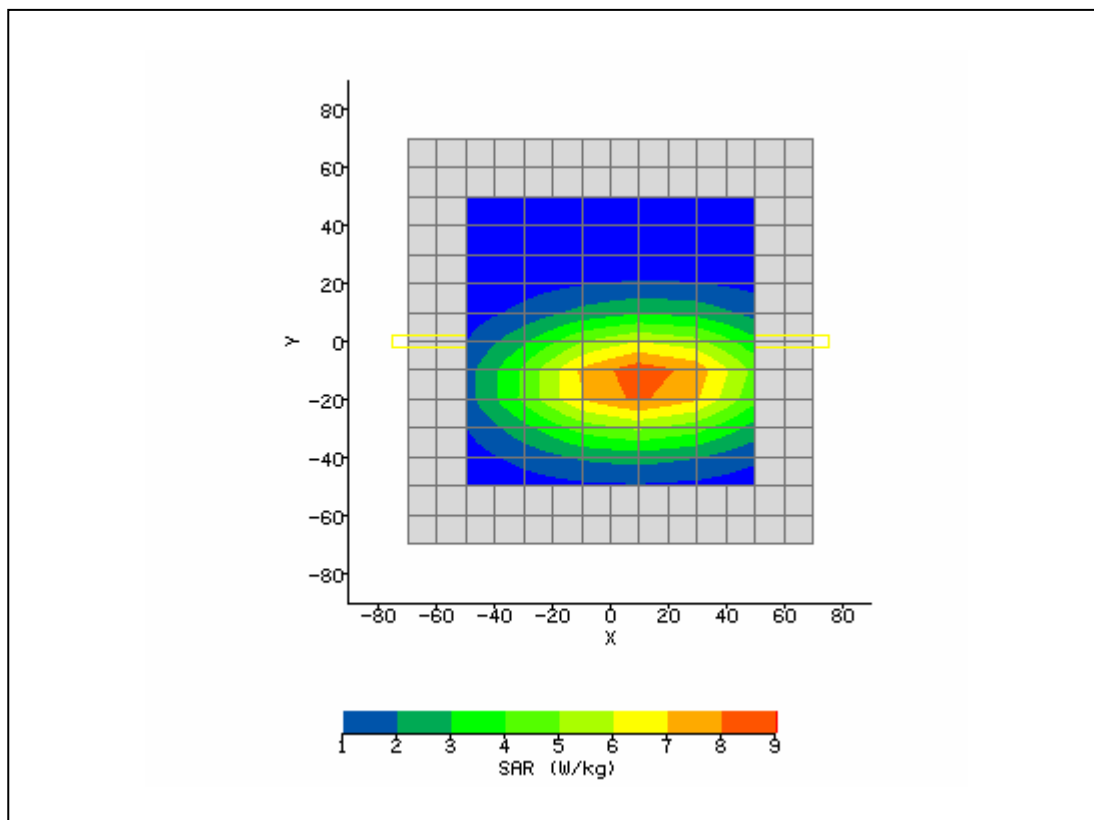

SAR Test Report No.:


SAR_SONY_008_06002_FCC_850_1900_2450_5000

Date of Report: 07/12/2006

Appendix A Plots

Page 34 of 37

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	6/28/2006 7:15:23 AM	DUT Battery Model/No:	
Filename:	7_12_06.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	1900
Device Under Test:	System verification	Relative Permittivity:	40.36
Relative Humidity:	30%	Conductivity:	1.411
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	6.00 mm
DUT Position:	verification	Max SAR Y-axis Location:	-9.00 mm
Antenna Configuration:	dipole	Max E Field:	151.19 V/m
Test Frequency:	1900MHz	SAR 1g:	41.645 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	22.134 W/kg
Conversion Factors:	.418 / .418 / .418	SAR Start:	4.904 W/kg
Type of Modulation:		SAR End:	4.912 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.15 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	6/27/06
Input Power Level:	1W	Extrapolation:	poly4

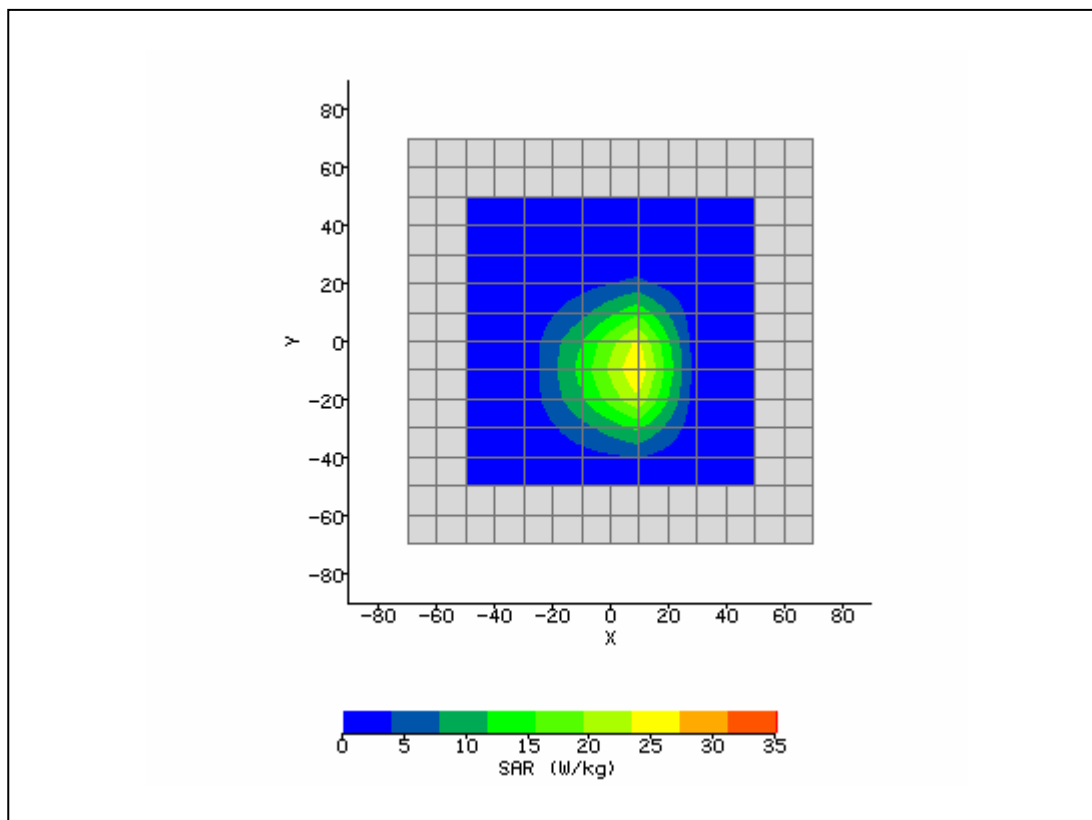

SAR Test Report No.:


SAR_SONY_008_06002_FCC_850_1900_2450_5000

Date of Report: 07/12/2006

Appendix A Plots

Page 35 of 37

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	6/30/2006 10:14:52 AM	DUT Battery Model/No:	
Filename:	7_12_06.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	System verification	Relative Permittivity:	38.96
Relative Humidity:	30%	Conductivity:	1.795
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	6.00 mm
DUT Position:	verification	Max SAR Y-axis Location:	-8.00 mm
Antenna Configuration:	dipole	Max E Field:	150.86 V/m
Test Frequency:	2450MHz	SAR 1g:	54.258 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	25.844 W/kg
Conversion Factors:	.433 / .433 / .433	SAR Start:	3.205 W/kg
Type of Modulation:		SAR End:	3.226 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.64 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	6/27/06
Input Power Level:	1W	Extrapolation:	poly4

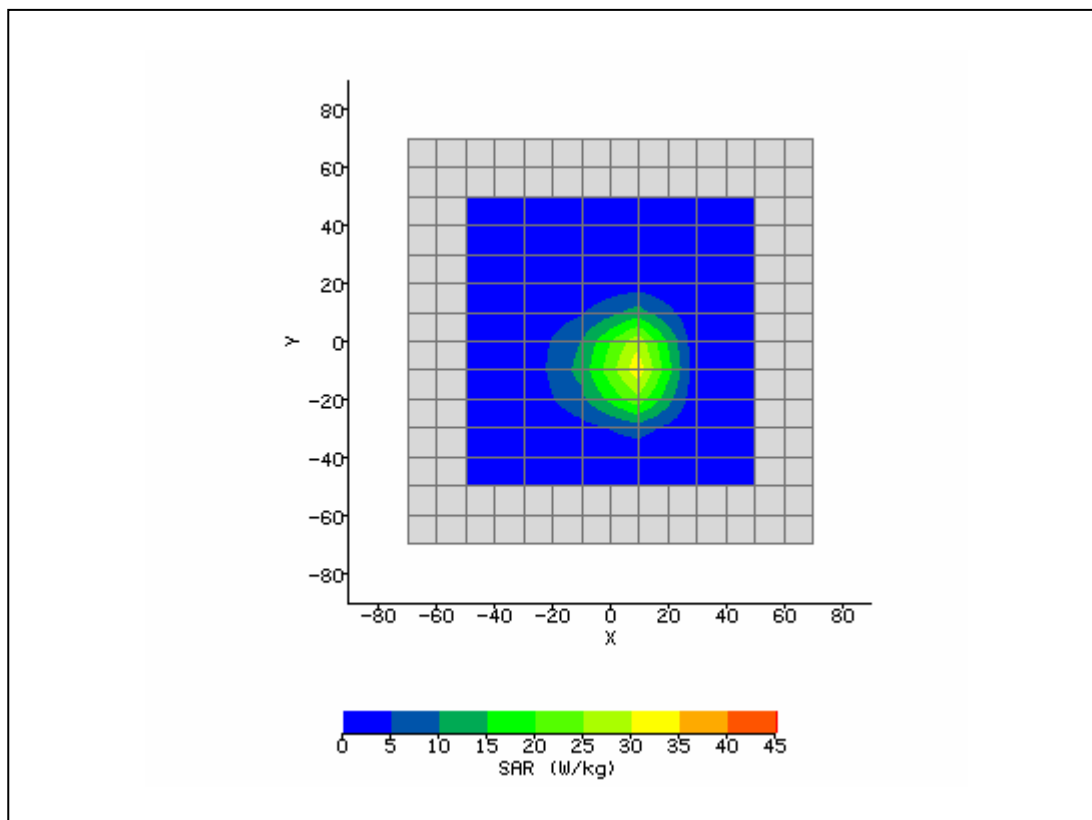

SAR Test Report No.:


SAR_SONY_008_06002_FCC_850_1900_2450_5000

Date of Report: 07/12/2006

Appendix A Plots

Page 36 of 37

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	7/3/2006 11:27:01 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	5250
Device Under Test:	System Verification	Relative Permittivity:	36.47
Relative Humidity:	30%	Conductivity:	4.72
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	5.59 mm
DUT Position:	verification	Max SAR Y-axis Location:	-9.30 mm
Antenna Configuration:	dipole	Max E Field:	83.54 V/m
Test Frequency:	5250MHz	SAR 1g:	118.724 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	55.310 W/kg
Conversion Factors:	.351 / .351 / .351	SAR Start:	4.711 W/kg
Type of Modulation:		SAR End:	4.705 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.13 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	6/27/06
Input Power Level:	1 Watt	Extrapolation:	poly4

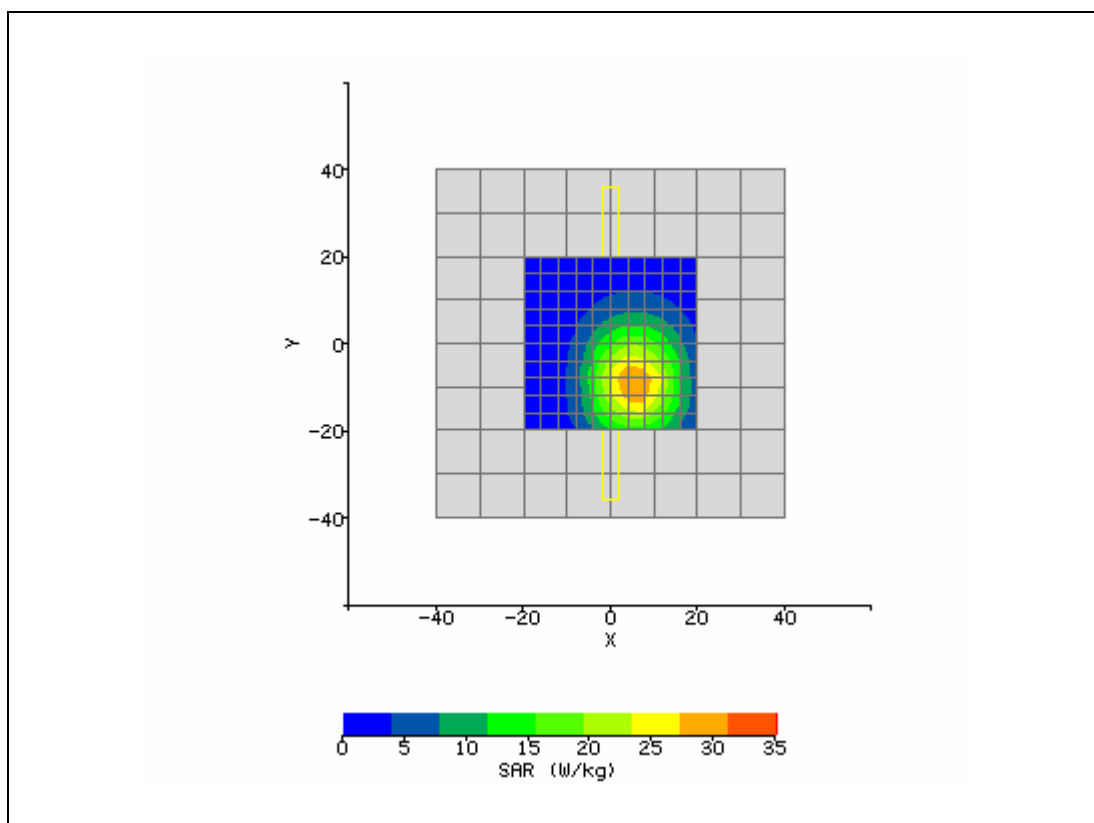

SAR Test Report No.:

SAR_SONY_008_06002_FCC_850_1900_2450_5000

Date of Report: 07/12/2006

Appendix A Plots

Page 37 of 37

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	7/5/2006 1:33:25 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	5800
Device Under Test:	System Verification	Relative Permittivity:	35.891
Relative Humidity:	30%	Conductivity:	5.491
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-5.19 mm
DUT Position:	verification	Max SAR Y-axis Location:	-13.55 mm
Antenna Configuration:	dipole	Max E Field:	76.29 V/m
Test Frequency:	5775MHz	SAR 1g:	128.596 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	55.361 W/kg
Conversion Factors:	.336 / .336 / .336	SAR Start:	4.739 W/kg
Type of Modulation:		SAR End:	4.739 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.15 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	3/20/2006
Input Power Level:	1 watt	Extrapolation:	poly4

