




<b>System / software:</b>	SARA2 / 2.54 VPM coloc	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	11/13/2008 11:07:33 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Lap_6.txt	<b>Probe Serial Number:</b>	L0116
<b>Ambient Temperature:</b>	21.7°C	<b>Liquid Simulant:</b>	2450
<b>Device Under Test:</b>	PCG-5Q1L	<b>Relative Permittivity:</b>	49.32
<b>Relative Humidity:</b>	45.6%	<b>Conductivity:</b>	1.957
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	21.6°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	13.20 mm
<b>DUT Position:</b>	Lap	<b>Max SAR Y-axis Location:</b>	-8.40 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	2.05 V/m
<b>Test Frequency:</b>	2437MHz	<b>SAR 1g:</b>	0.012 W/kg
<b>Air Factors:</b>	504 / 365 / 331	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.635 / .635 / .635	<b>SAR Start:</b>	0.000 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.000 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	%
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	11/11/08
<b>Input Power Level:</b>	Set by power table	<b>Extrapolation:</b>	poly4

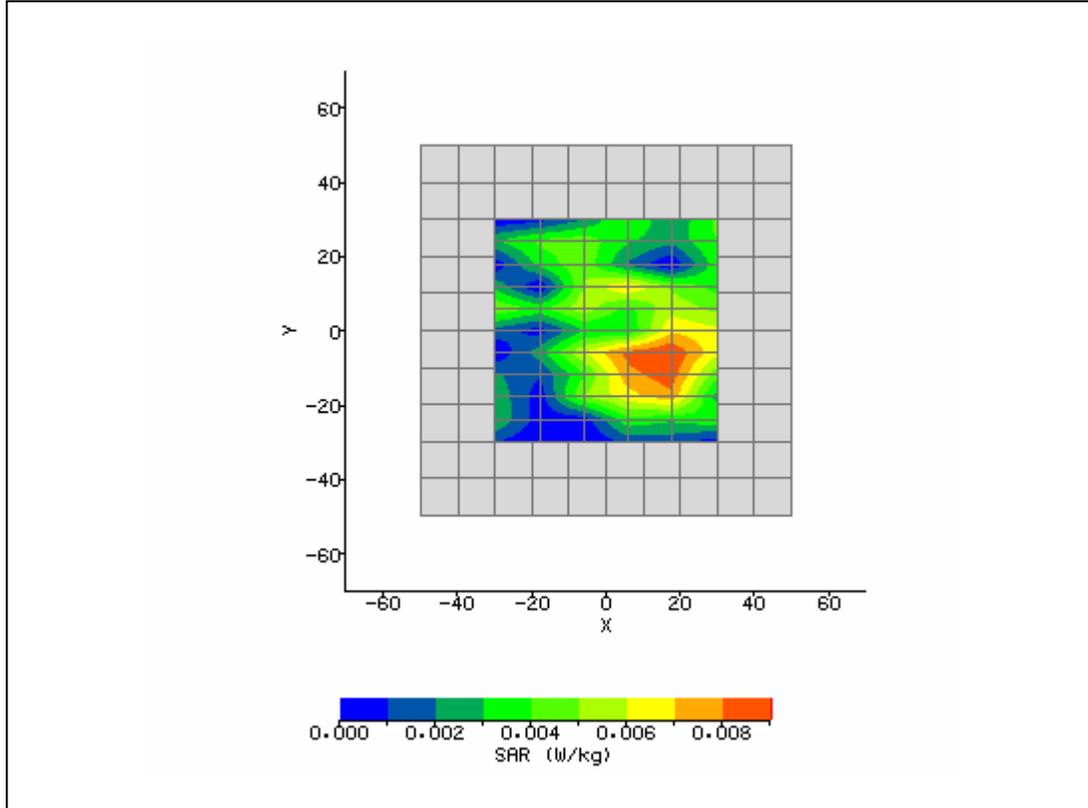


<b>System / software:</b>	SARA2 / 2.54 VPM coloc	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	11/13/2008 11:29:51 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Lap_n_6.txt	<b>Probe Serial Number:</b>	L0116
<b>Ambient Temperature:</b>	21.7°C	<b>Liquid Simulant:</b>	2450
<b>Device Under Test:</b>	PCG-5Q1L	<b>Relative Permittivity:</b>	49.32
<b>Relative Humidity:</b>	45.6%	<b>Conductivity:</b>	1.957
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	21.6°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	10.80 mm
<b>DUT Position:</b>	Lap	<b>Max SAR Y-axis Location:</b>	-13.20 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	2.30 V/m
<b>Test Frequency:</b>	2437MHz	<b>SAR 1g:</b>	0.016 W/kg
<b>Air Factors:</b>	504 / 365 / 331	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	.635 / .635 / .635	<b>SAR Start:</b>	0.000 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.000 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	%
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	11/11/08
<b>Input Power Level:</b>	Set by power table	<b>Extrapolation:</b>	poly4

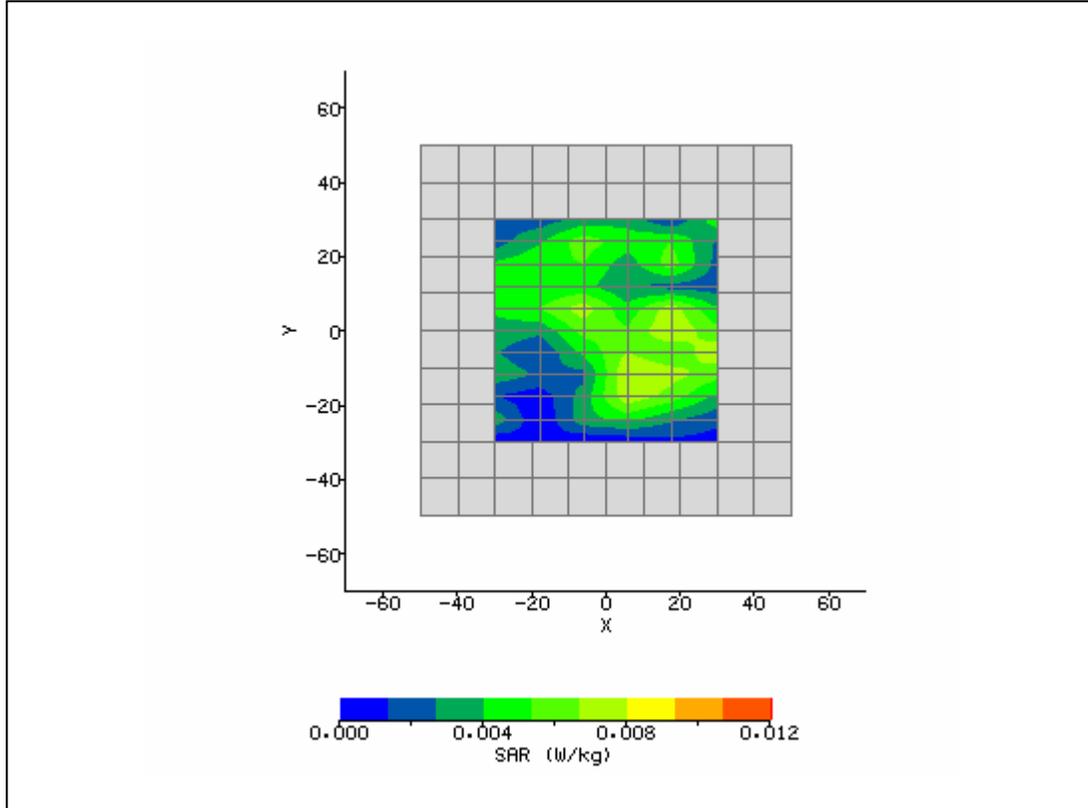


<b>System / software:</b>	SARA2 / 2.54 VPM coloc	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	11/13/2008 1:02:21 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Lap_a_48.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	21.7°C	<b>Liquid Simulant:</b>	5200
<b>Device Under Test:</b>	PCG-5Q1L	<b>Relative Permittivity:</b>	49.23
<b>Relative Humidity:</b>	45.6%	<b>Conductivity:</b>	5.471
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	21.6°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	-30.00 mm
<b>DUT Position:</b>	Lap	<b>Max SAR Y-axis Location:</b>	-30.00 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	0.00 V/m
<b>Test Frequency:</b>	5240MHz	<b>SAR 1g:</b>	0.000 W/kg
<b>Air Factors:</b>	411.50 / 320.07 / 275.84	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	3.46 / 3.82 / 4.87	<b>SAR Start:</b>	0.000 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.000 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	%
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	11/11/08
<b>Input Power Level:</b>	Set by power table	<b>Extrapolation:</b>	poly4

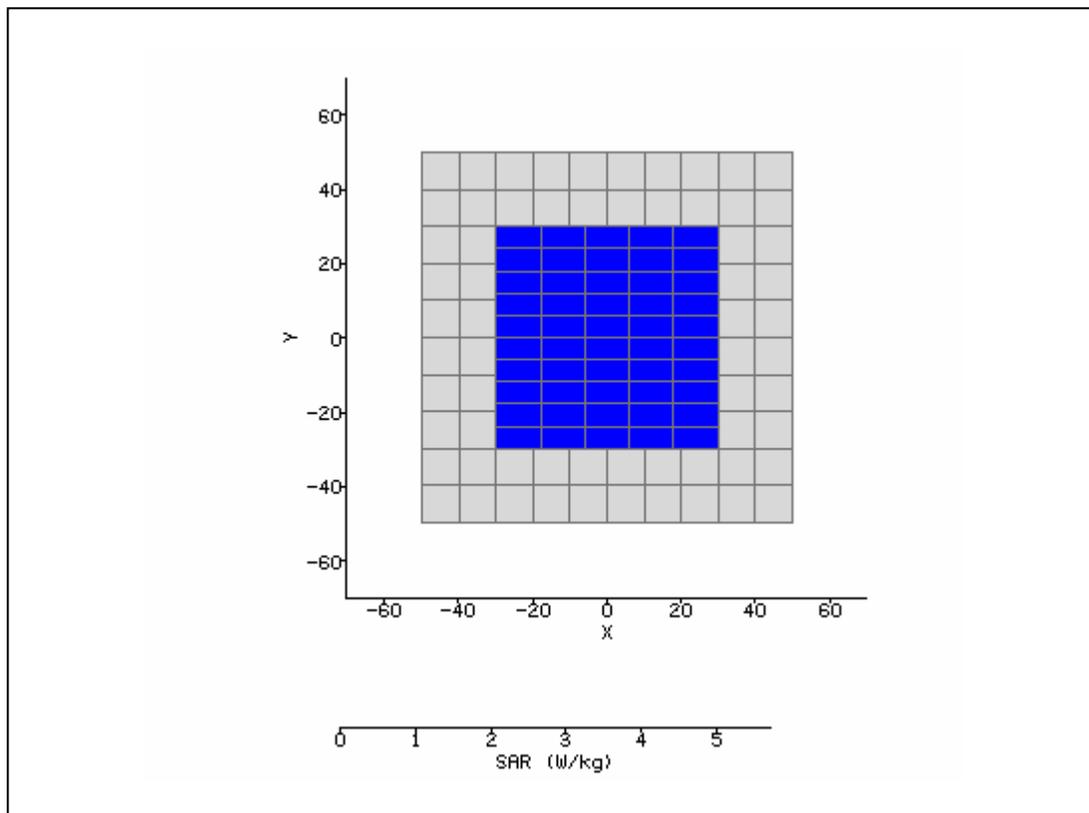


<b>System / software:</b>	SARA2 / 2.54 VPM coloc	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	11/13/2008 1:33:04 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Lap_a_64.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	21.7°C	<b>Liquid Simulant:</b>	5200
<b>Device Under Test:</b>	PCG-5Q1L	<b>Relative Permittivity:</b>	48.14
<b>Relative Humidity:</b>	45.6%	<b>Conductivity:</b>	5.495
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	21.6°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	-30.00 mm
<b>DUT Position:</b>	Lap	<b>Max SAR Y-axis Location:</b>	-30.00 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	0.00 V/m
<b>Test Frequency:</b>	5320MHz	<b>SAR 1g:</b>	0.000 W/kg
<b>Air Factors:</b>	411.50 / 320.07 / 275.84	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	3.46 / 3.82 / 4.87	<b>SAR Start:</b>	0.000 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.000 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	%
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	11/11/08
<b>Input Power Level:</b>	Set by power table	<b>Extrapolation:</b>	poly4

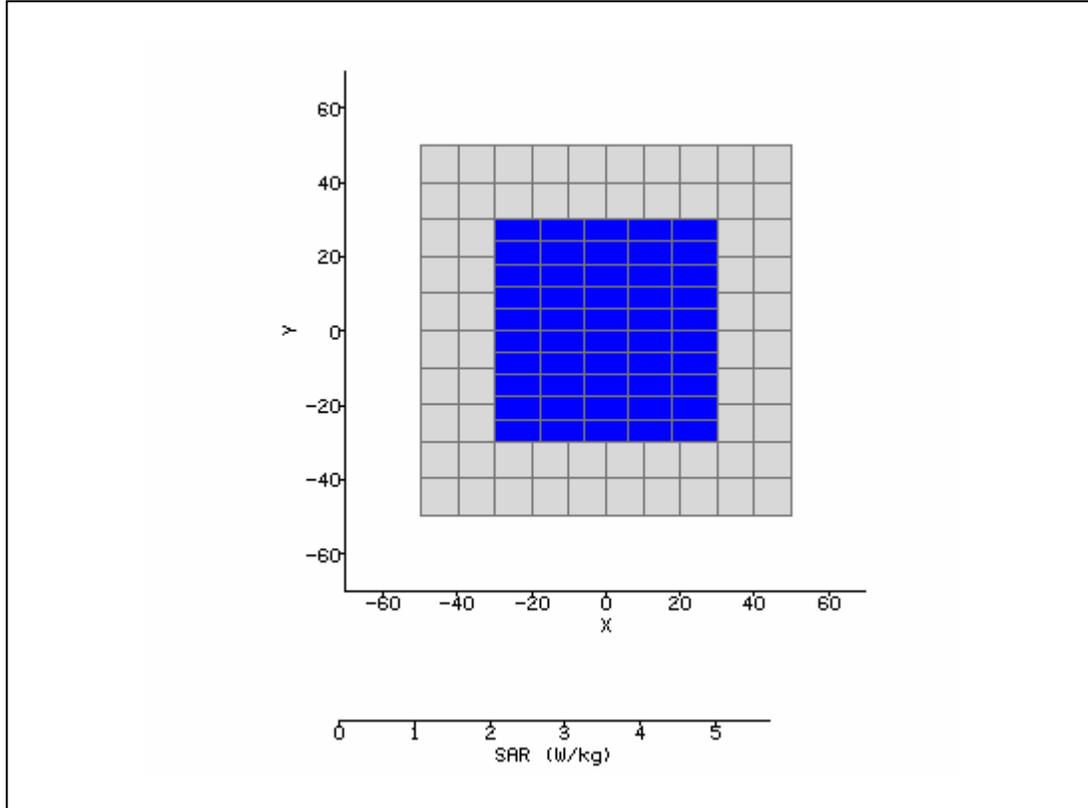


<b>System / software:</b>	SARA2 / 2.54 VPM coloc	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	11/13/2008 1:52:00 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Lap_a_104.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	21.7°C	<b>Liquid Simulant:</b>	5200
<b>Device Under Test:</b>	PCG-5Q1L	<b>Relative Permittivity:</b>	46.02
<b>Relative Humidity:</b>	45.6%	<b>Conductivity:</b>	5.522
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	21.6°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	-30.00 mm
<b>DUT Position:</b>	Lap	<b>Max SAR Y-axis Location:</b>	-30.00 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	0.00 V/m
<b>Test Frequency:</b>	5520MHz	<b>SAR 1g:</b>	0.000 W/kg
<b>Air Factors:</b>	411.50 / 320.07 / 275.84	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	3.46 / 3.82 / 4.87	<b>SAR Start:</b>	0.000 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.000 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	%
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	11/11/08
<b>Input Power Level:</b>	Set by power table	<b>Extrapolation:</b>	poly4

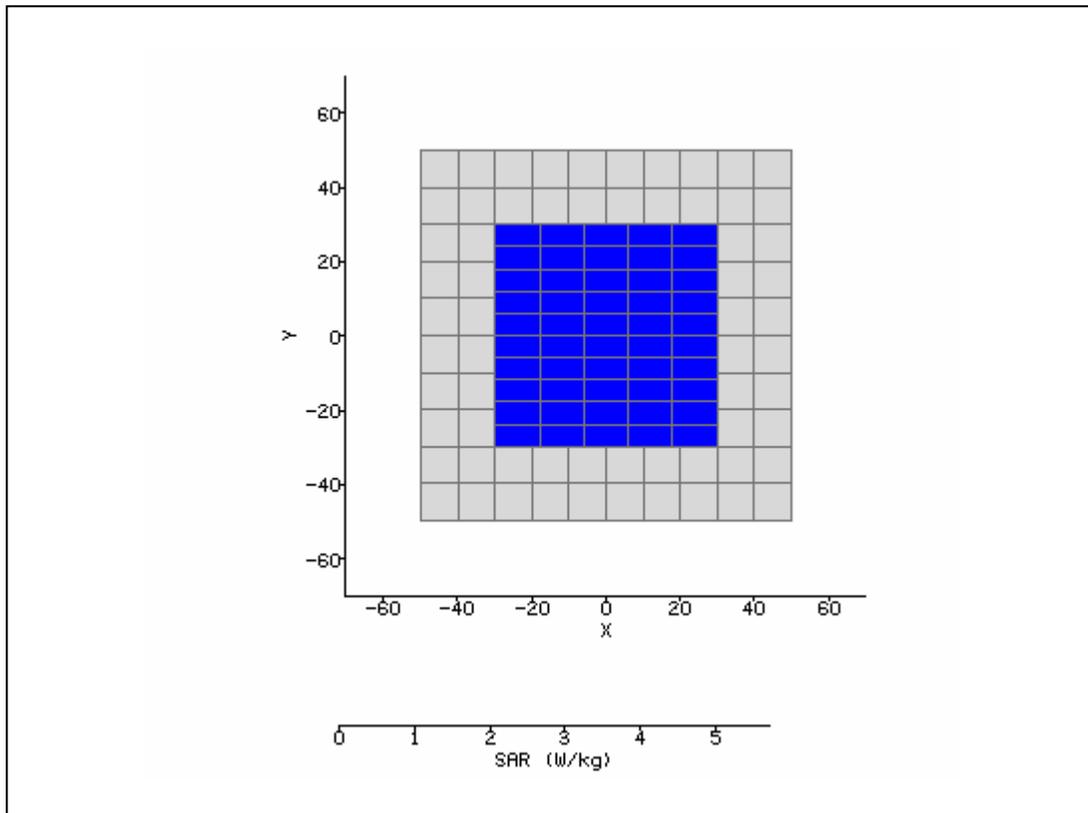


<b>System / software:</b>	SARA2 / 2.54 VPM coloc	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	11/13/2008 3:26:53 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Lap_a_124.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	21.7°C	<b>Liquid Simulant:</b>	5200
<b>Device Under Test:</b>	PCG-5Q1L	<b>Relative Permittivity:</b>	51.41
<b>Relative Humidity:</b>	45.6%	<b>Conductivity:</b>	5.71
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	21.6°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	-30.00 mm
<b>DUT Position:</b>	Lap	<b>Max SAR Y-axis Location:</b>	-30.00 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	0.00 V/m
<b>Test Frequency:</b>	5620MHz	<b>SAR 1g:</b>	0.000 W/kg
<b>Air Factors:</b>	411.50 / 320.07 / 275.84	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	3.46 / 3.82 / 4.87	<b>SAR Start:</b>	0.000 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.000 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	%
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	11/11/08
<b>Input Power Level:</b>	Set by power table	<b>Extrapolation:</b>	poly4

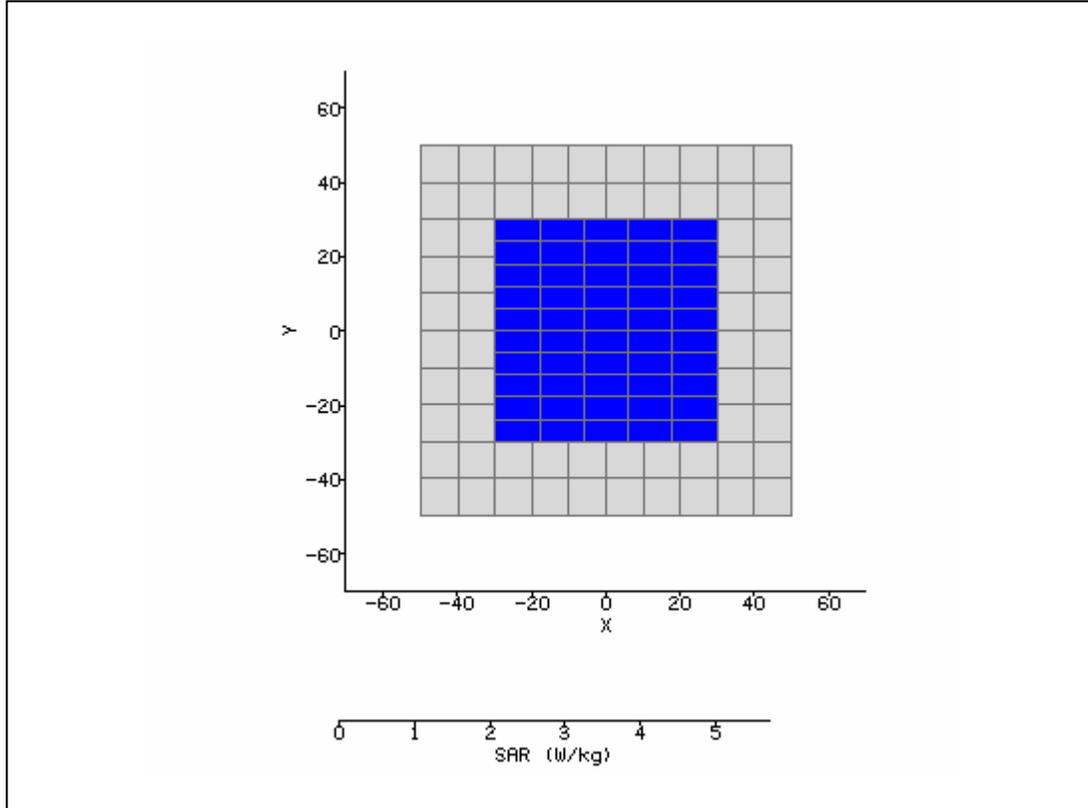


<b>System / software:</b>	SARA2 / 2.54 VPM coloc	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	11/13/2008 3:44:10 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Lap_a_157.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	21.7°C	<b>Liquid Simulant:</b>	5200
<b>Device Under Test:</b>	PCG-5Q1L	<b>Relative Permittivity:</b>	49.76
<b>Relative Humidity:</b>	45.6%	<b>Conductivity:</b>	5.722
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	21.6°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	-30.00 mm
<b>DUT Position:</b>	Lap	<b>Max SAR Y-axis Location:</b>	-30.00 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	0.00 V/m
<b>Test Frequency:</b>	5785MHz	<b>SAR 1g:</b>	0.000 W/kg
<b>Air Factors:</b>	411.50 / 320.07 / 275.84	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	3.46 / 3.82 / 4.87	<b>SAR Start:</b>	0.000 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.000 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	%
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	11/11/08
<b>Input Power Level:</b>	Set by power table	<b>Extrapolation:</b>	poly4

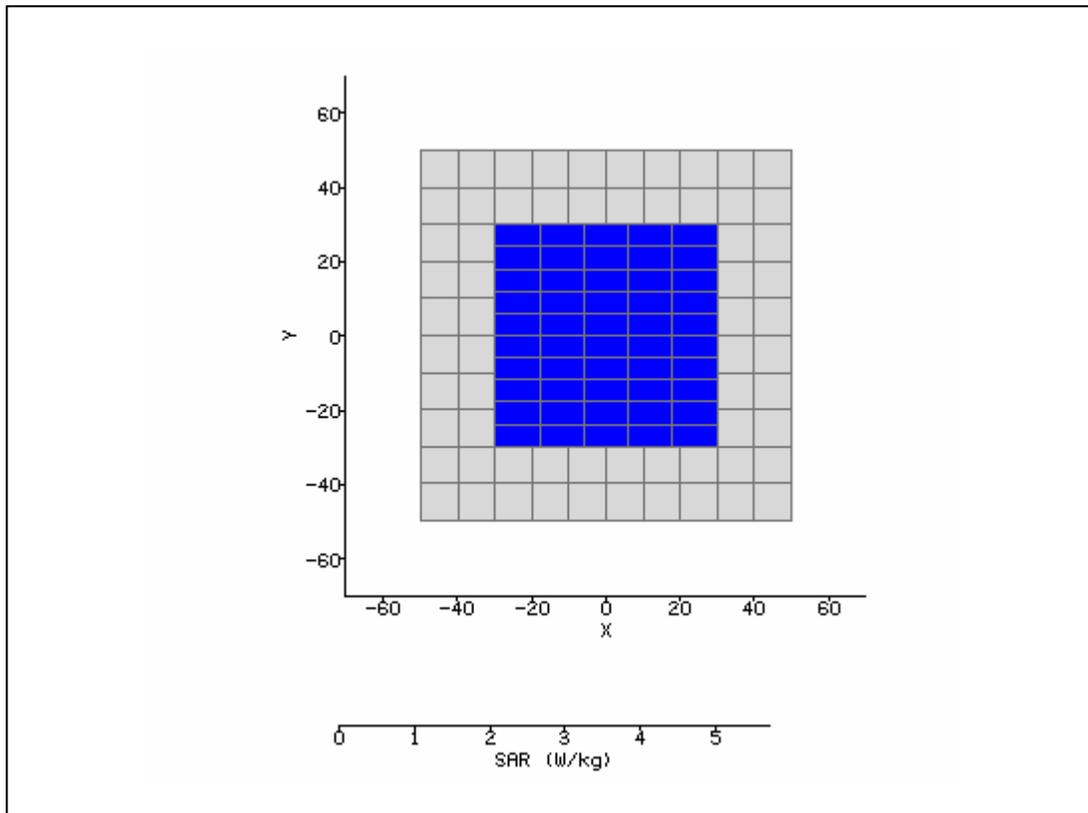


<b>System / software:</b>	SARA2 / 2.54 VPM coloc	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	11/13/2008 4:01:10 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Lap_a_165.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	21.7°C	<b>Liquid Simulant:</b>	5200
<b>Device Under Test:</b>	PCG-5Q1L	<b>Relative Permittivity:</b>	49.29
<b>Relative Humidity:</b>	45.6%	<b>Conductivity:</b>	5.758
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	21.6°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	-30.00 mm
<b>DUT Position:</b>	Lap	<b>Max SAR Y-axis Location:</b>	-30.00 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	0.00 V/m
<b>Test Frequency:</b>	5825MHz	<b>SAR 1g:</b>	0.000 W/kg
<b>Air Factors:</b>	411.50 / 320.07 / 275.84	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	3.46 / 3.82 / 4.87	<b>SAR Start:</b>	0.000 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.000 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	%
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	11/11/08
<b>Input Power Level:</b>	Set by power table	<b>Extrapolation:</b>	poly4

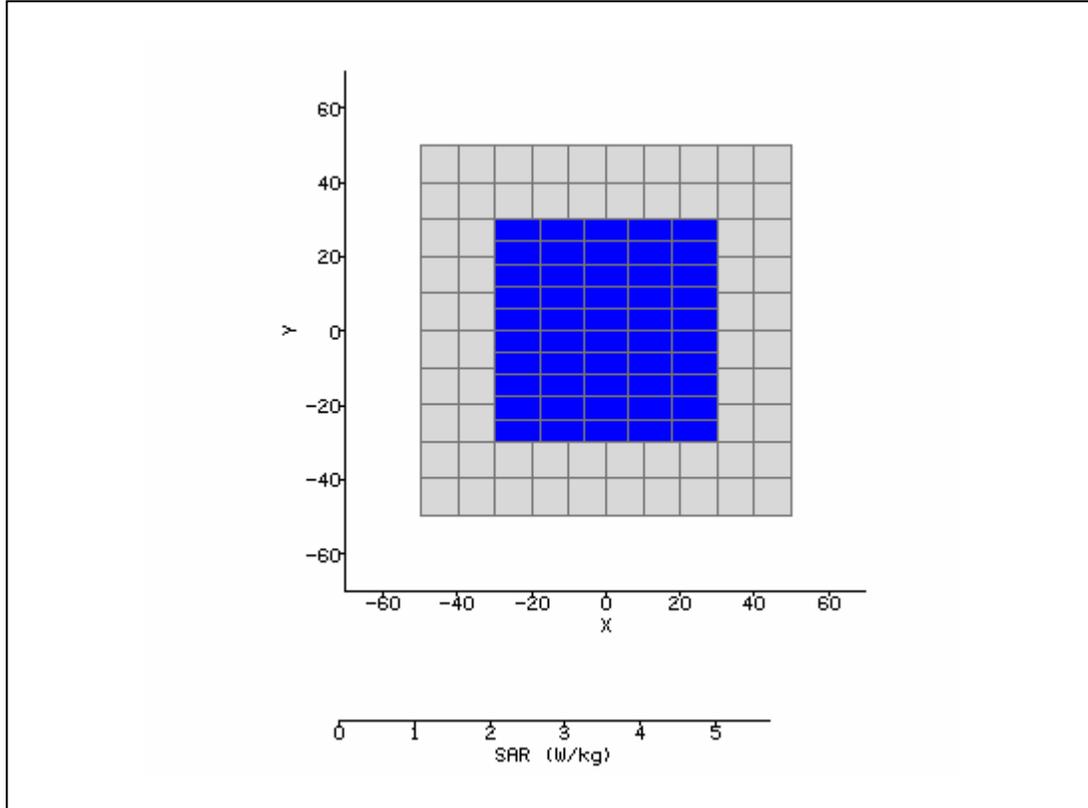


<b>System / software:</b>	SARA2 / 2.54 VPM coloc	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	11/13/2008 2:10:15 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Lap_a_46.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	21.7°C	<b>Liquid Simulant:</b>	5200
<b>Device Under Test:</b>	PCG-5Q1L	<b>Relative Permittivity:</b>	49.23
<b>Relative Humidity:</b>	45.6%	<b>Conductivity:</b>	5.471
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	21.6°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	-30.00 mm
<b>DUT Position:</b>	Lap	<b>Max SAR Y-axis Location:</b>	-30.00 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	0.00 V/m
<b>Test Frequency:</b>	5230MHz	<b>SAR 1g:</b>	0.000 W/kg
<b>Air Factors:</b>	411.50 / 320.07 / 275.84	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	3.46 / 3.82 / 4.87	<b>SAR Start:</b>	0.000 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.000 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	%
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	11/11/08
<b>Input Power Level:</b>	Set by power table	<b>Extrapolation:</b>	poly4

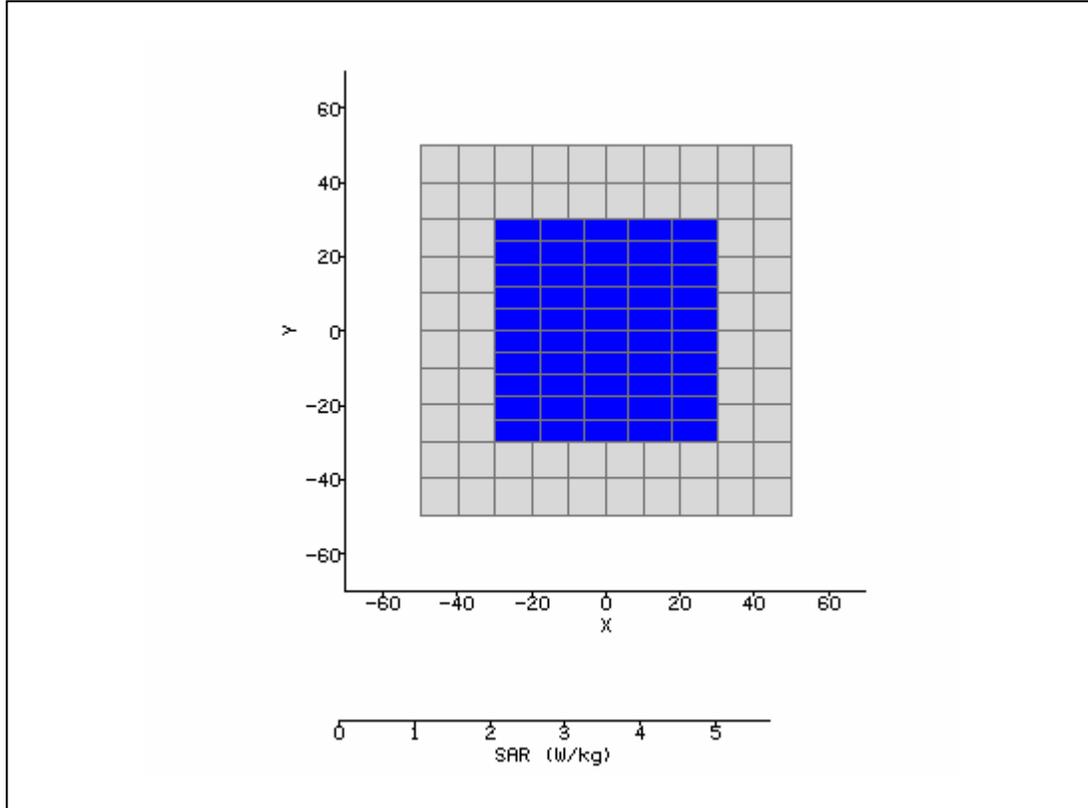


<b>System / software:</b>	SARA2 / 2.54 VPM coloc	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	11/13/2008 2:29:05 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Lap_a_62.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	21.7°C	<b>Liquid Simulant:</b>	5200
<b>Device Under Test:</b>	PCG-5Q1L	<b>Relative Permittivity:</b>	48.14
<b>Relative Humidity:</b>	45.6%	<b>Conductivity:</b>	5.495
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	21.6°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	-30.00 mm
<b>DUT Position:</b>	Lap	<b>Max SAR Y-axis Location:</b>	-30.00 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	0.00 V/m
<b>Test Frequency:</b>	5310MHz	<b>SAR 1g:</b>	0.000 W/kg
<b>Air Factors:</b>	411.50 / 320.07 / 275.84	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	3.46 / 3.82 / 4.87	<b>SAR Start:</b>	0.000 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.000 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	%
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	11/11/08
<b>Input Power Level:</b>	Set by power table	<b>Extrapolation:</b>	poly4

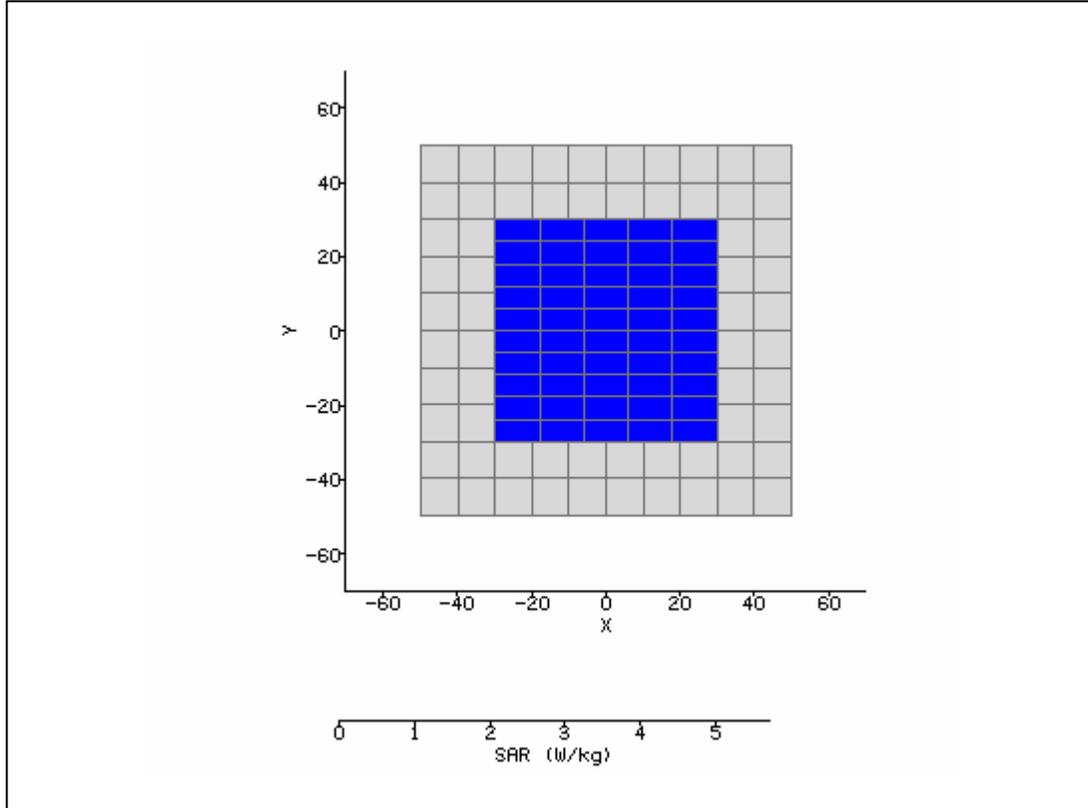


<b>System / software:</b>	SARA2 / 2.54 VPM coloc	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	11/13/2008 2:51:53 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Lap_n_102.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	21.7°C	<b>Liquid Simulant:</b>	5200
<b>Device Under Test:</b>	PCG-5Q1L	<b>Relative Permittivity:</b>	46.02
<b>Relative Humidity:</b>	45.6%	<b>Conductivity:</b>	5.522
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	21.6°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	-30.00 mm
<b>DUT Position:</b>	Lap	<b>Max SAR Y-axis Location:</b>	-30.00 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	0.00 V/m
<b>Test Frequency:</b>	5510MHz	<b>SAR 1g:</b>	0.000 W/kg
<b>Air Factors:</b>	411.50 / 320.07 / 275.84	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	3.46 / 3.82 / 4.87	<b>SAR Start:</b>	0.000 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.000 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	%
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	11/11/08
<b>Input Power Level:</b>	Set by power table	<b>Extrapolation:</b>	poly4

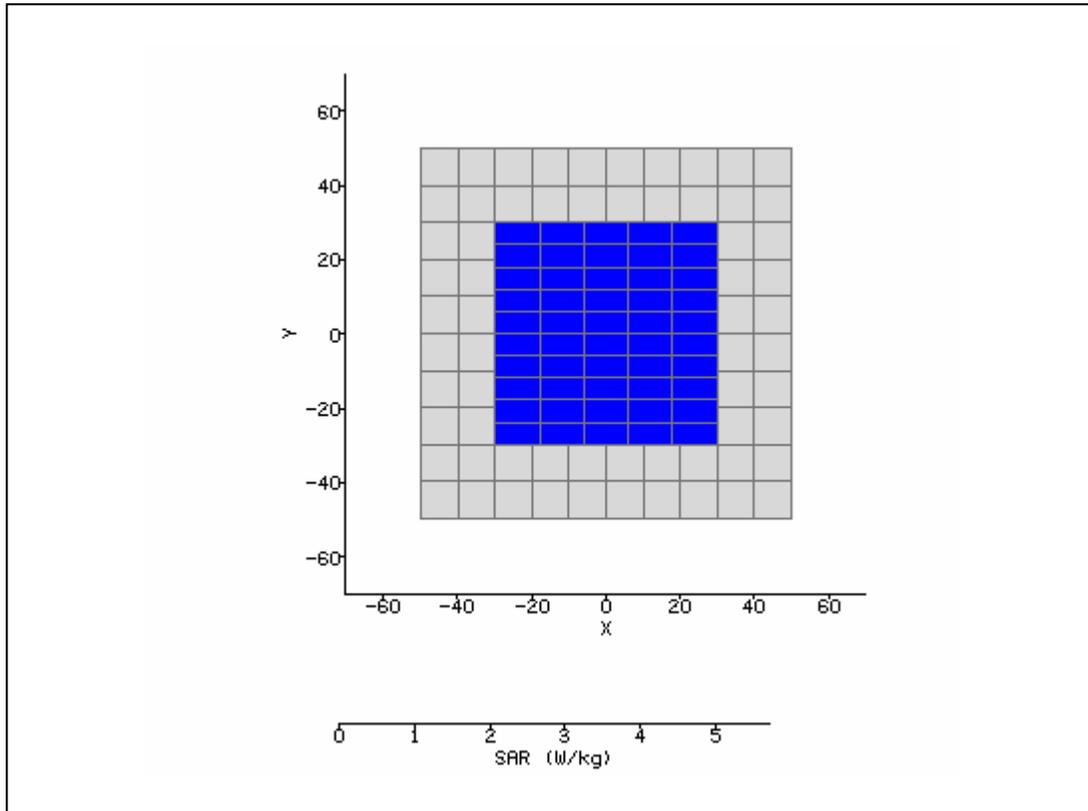


<b>System / software:</b>	SARA2 / 2.54 VPM coloc	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	11/13/2008 4:18:56 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Lap_n_126.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	21.7°C	<b>Liquid Simulant:</b>	5200
<b>Device Under Test:</b>	PCG-5Q1L	<b>Relative Permittivity:</b>	51.41
<b>Relative Humidity:</b>	45.6%	<b>Conductivity:</b>	5.71
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	21.6°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	-30.00 mm
<b>DUT Position:</b>	Lap	<b>Max SAR Y-axis Location:</b>	-30.00 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	0.00 V/m
<b>Test Frequency:</b>	5630MHz	<b>SAR 1g:</b>	0.000 W/kg
<b>Air Factors:</b>	411.50 / 320.07 / 275.84	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	3.46 / 3.82 / 4.87	<b>SAR Start:</b>	0.000 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.000 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	%
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	11/11/08
<b>Input Power Level:</b>	Set by power table	<b>Extrapolation:</b>	poly4

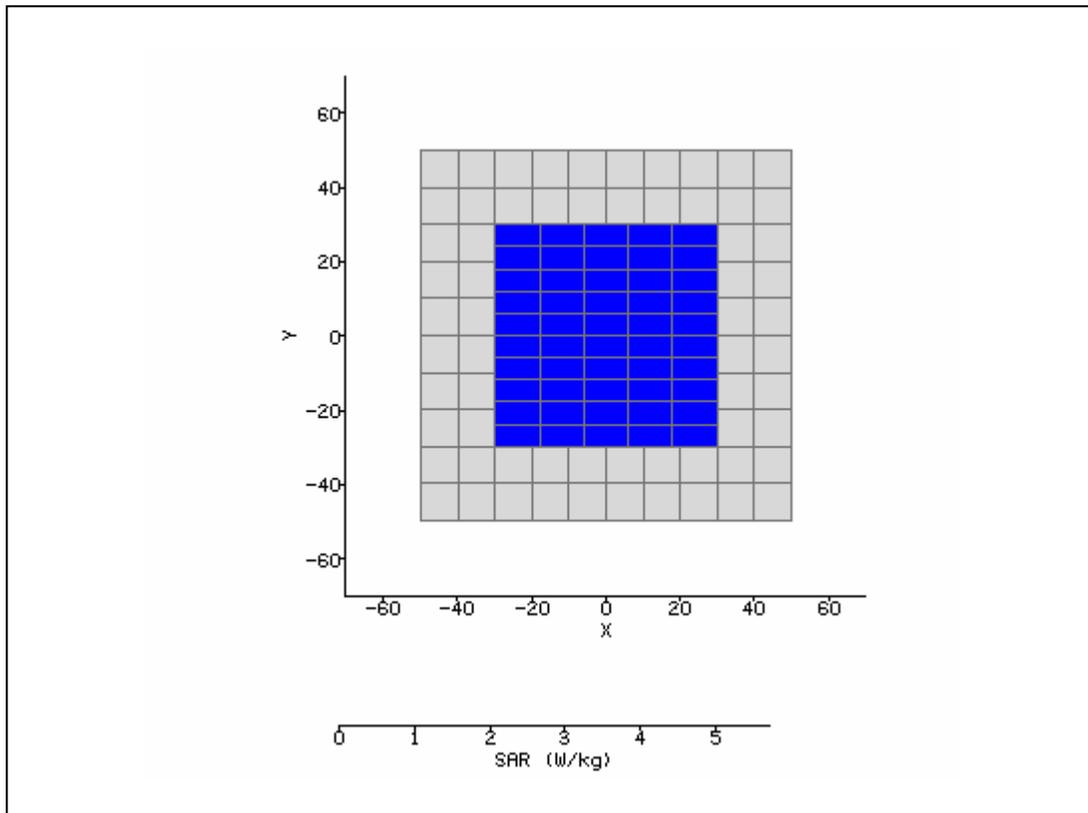


<b>System / software:</b>	SARA2 / 2.54 VPM coloc	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	11/13/2008 4:35:39 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	Lap_n_159.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	21.7°C	<b>Liquid Simulant:</b>	5200
<b>Device Under Test:</b>	PCG-5Q1L	<b>Relative Permittivity:</b>	49.76
<b>Relative Humidity:</b>	45.6%	<b>Conductivity:</b>	5.722
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	21.6°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	-30.00 mm
<b>DUT Position:</b>	Lap	<b>Max SAR Y-axis Location:</b>	-30.00 mm
<b>Antenna Configuration:</b>	Integral	<b>Max E Field:</b>	0.00 V/m
<b>Test Frequency:</b>	5795MHz	<b>SAR 1g:</b>	0.000 W/kg
<b>Air Factors:</b>	411.50 / 320.07 / 275.84	<b>SAR 10g:</b>	
<b>Conversion Factors:</b>	3.46 / 3.82 / 4.87	<b>SAR Start:</b>	0.000 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.000 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	%
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	11/11/08
<b>Input Power Level:</b>	Set by power table	<b>Extrapolation:</b>	poly4

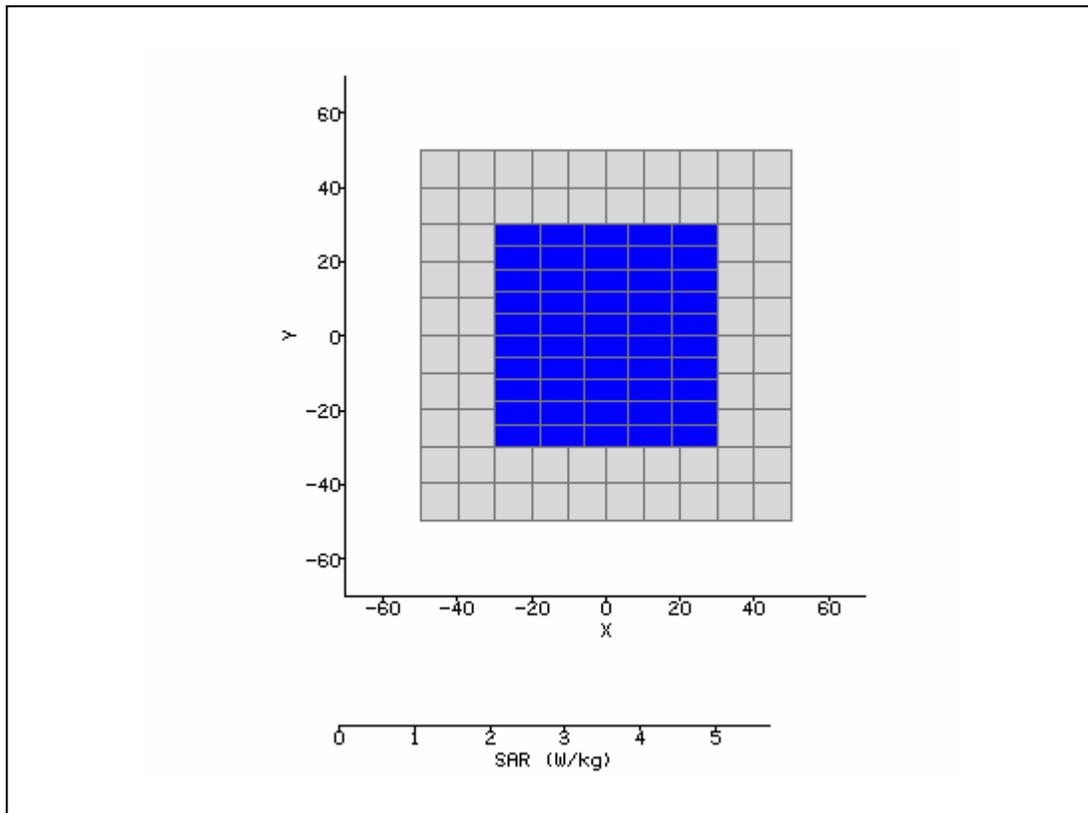

<b>System / software:</b>	SARA2 / 2.54 VPM coloc	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	11/13/2008 8:06:04 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	temp.txt	<b>Probe Serial Number:</b>	L0116
<b>Ambient Temperature:</b>	21.7°C	<b>Liquid Simulant:</b>	2450
<b>Device Under Test:</b>	System	<b>Relative Permittivity:</b>	39.95
<b>Relative Humidity:</b>	45.6%	<b>Conductivity:</b>	1.867
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	22.1°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	-10.00 mm
<b>DUT Position:</b>	10mm	<b>Max SAR Y-axis Location:</b>	9.00 mm
<b>Antenna Configuration:</b>	Dipole	<b>Max E Field:</b>	141.45 V/m
<b>Test Frequency:</b>	2450MHzMHz	<b>SAR 1g:</b>	49.755 W/kg
<b>Air Factors:</b>	504 / 365 / 331	<b>SAR 10g:</b>	22.935 W/kg
<b>Conversion Factors:</b>	.569 / .569 / .569	<b>SAR Start:</b>	3.518 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	3.581 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	1.79 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	11/11/08
<b>Input Power Level:</b>	1W	<b>Extrapolation:</b>	poly4

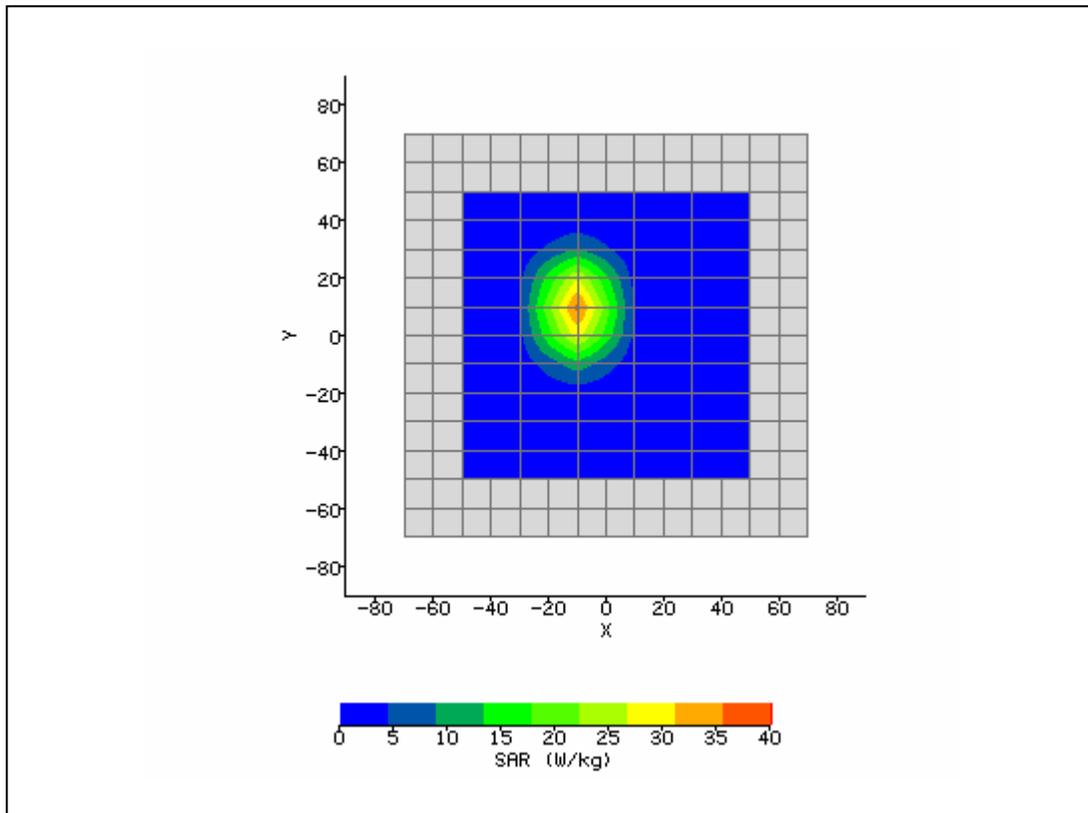

<b>System / software:</b>	SARA2 / 2.54 VPM coloc	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	11/13/2008 9:02:23 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	temp.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	21.7°C	<b>Liquid Simulant:</b>	5200
<b>Device Under Test:</b>	System	<b>Relative Permittivity:</b>	36.33
<b>Relative Humidity:</b>	45.6%	<b>Conductivity:</b>	4.67
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	-6.40 mm
<b>DUT Position:</b>	10mm	<b>Max SAR Y-axis Location:</b>	-5.60 mm
<b>Antenna Configuration:</b>	Waveguide	<b>Max E Field:</b>	49.93 V/m
<b>Test Frequency:</b>	5200MHz	<b>SAR 1g:</b>	3.434 W/kg
<b>Air Factors:</b>	411.50 / 320.07 / 275.84	<b>SAR 10g:</b>	2.597 W/kg
<b>Conversion Factors:</b>	2.92 / 3.27 / 3.99	<b>SAR Start:</b>	2.067 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	2.052 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	-0.74 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	11/11/08
<b>Input Power Level:</b>	0.1W	<b>Extrapolation:</b>	poly4

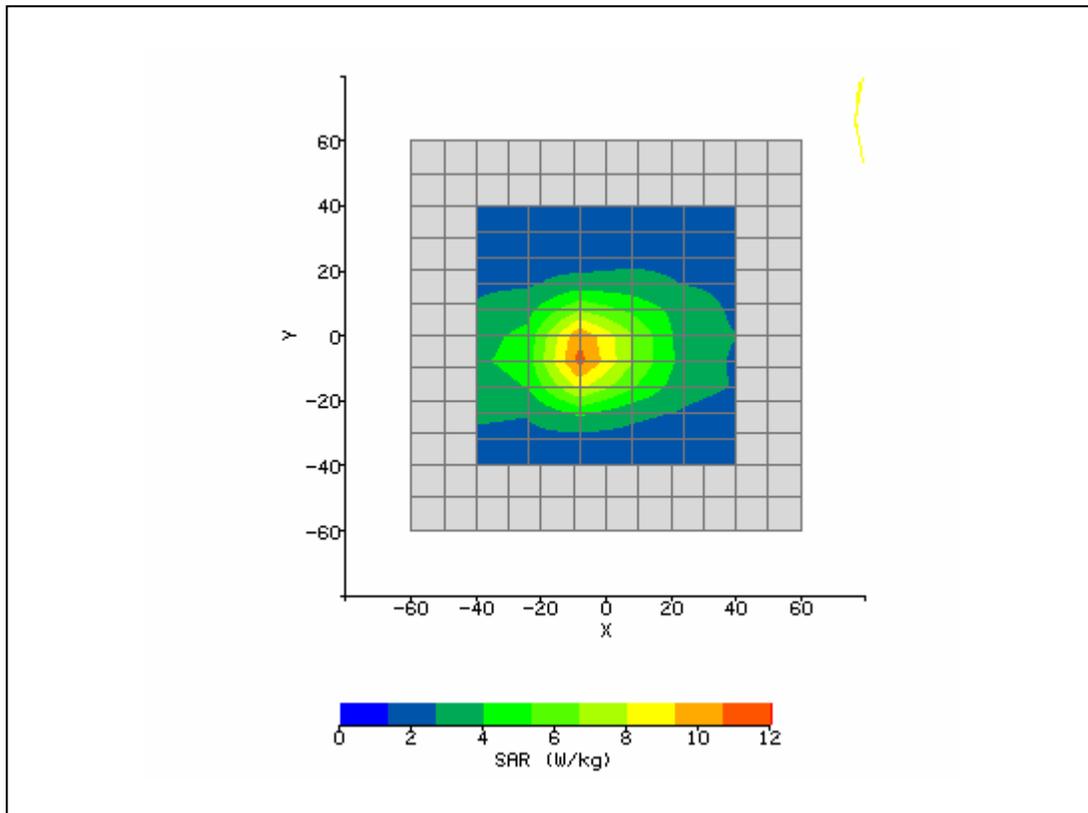

<b>System / software:</b>	SARA2 / 2.54 VPM coloc	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	11/13/2008 9:51:01 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	temp.txt	<b>Probe Serial Number:</b>	M0024
<b>Ambient Temperature:</b>	21.7°C	<b>Liquid Simulant:</b>	5800
<b>Device Under Test:</b>	System	<b>Relative Permittivity:</b>	35.62
<b>Relative Humidity:</b>	45.6%	<b>Conductivity:</b>	5.24
<b>Phantom S/No:</b>	Head04_37.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR X-axis Location:</b>	11.20 mm
<b>DUT Position:</b>	10mm	<b>Max SAR Y-axis Location:</b>	-2.40 mm
<b>Antenna Configuration:</b>	Waveguide	<b>Max E Field:</b>	45.30 V/m
<b>Test Frequency:</b>	5800MHz	<b>SAR 1g:</b>	4.067 W/kg
<b>Air Factors:</b>	411.50 / 320.07 / 275.84	<b>SAR 10g:</b>	3.128 W/kg
<b>Conversion Factors:</b>	2.95 / 3.29 / 4.17	<b>SAR Start:</b>	2.449 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	2.408 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	-1.67 %
<b>Diode Compression Factors (V*200):</b>	20 / 20 / 20	<b>Probe battery last changed:</b>	11/11/08
<b>Input Power Level:</b>	0.1W	<b>Extrapolation:</b>	poly4

