



Test Report

FCC Part 15.407

Industry Canada RSS210

UNII Devices

Model #: PCG-5Q1L

SONY Corporation
1-7-1 Konan, Minato-ku,
Tokyo, 108-0075
Japan

FCC ID: AK8PCG5Q1L
IC ID: 409B-PCG5Q1L

TEST REPORT #: EMC_SONYE_028_08001_15.407
DATE: 2008-11-13



FCC listed:
A2LA
accredited

IC recognized #
3462B

CETECOM Inc.

411 Dixon Landing Road • Milpitas, CA 95035 • U.S.A.

Phone: + 1 (408) 586 6200 • Fax: + 1 (408) 586 6299 • E-mail: info@cetecomusa.com • <http://www.cetecom.com>

CETECOM Inc. is a Delaware Corporation with Corporation number: 2113686

Board of Directors: Dr. Harald Ansoerge, Dr. Klaus Matkey, Hans Peter May

© Copyright by CETECOM



TABLE OF CONTENTS

1 Assessment _____ **4**

2 Administrative Data _____ **5**

2.1 Identification of the Testing Laboratory Issuing the EMC Test Report _____ **5**

2.2 Identification of the Client _____ **5**

2.3 Identification of the Manufacturer _____ **5**

3 Equipment under Test (EUT) _____ **6**

3.1 Specification of the Equipment under Test _____ **6**

3.2 Identification of the Equipment under Test (EUT) _____ **7**

3.3 Identification of Accessory equipment _____ **7**

4 Subject Of Investigation _____ **7**

5 Radiated Measurements _____ **8**

5.1 Maximum Peak Output Power § 15.407 (Radiated) _____ **8**

 5.1.1 FCC Limits: _____ **8**

 5.1.2 IC Limits _____ **9**

 5.1.3 Measurement Results _____ **11**

6 Restricted Band Edge Compliance §15.407(b)/15.205 _____ **12**

 6.1.1 Limits _____ **12**

 6.1.2 Sub-band 1, 802.11n HT20 MODE _____ **13**

 6.1.3 Sub-band 1. 802.11n HT40 MODE _____ **15**

 6.1.4 Sub-band 2. 802.11n HT20 MODE _____ **17**

 6.1.5 Sub-band 2. 802.11n HT40 MODE _____ **19**

 6.1.6 Sub-band 3. 802.11n HT20 MODE _____ **21**

6.1.7 Sub-band 3. 802.11n HT40 MODE _____ **23**

6.2 Transmitter Spurious Emission § 15.407(b)/15.205/15.209 _____ **25**

 6.2.1 Limits _____ **25**

 6.2.2 Sub-band 1 802.11n HT40 MODE _____ **26**

 6.2.3 Sub-band 2 802.11n HT40 MODE _____ **35**

 6.2.4 Sub-band 3 802.11n HT40 MODE _____ **44**

6.3 Receiver Spurious Emission § 15.209/RSS210 _____ **56**

 6.3.1 Limits _____ **56**

 6.3.2 802.11n HT40 MODE _____ **57**

7 Conducted Measurements _____ **61**

7.1 26dB bandwidth and 99% bandwidth. _____ **61**

 7.1.1 Limit _____ **61**

 7.1.2 Test Results _____ **61**

7.2 Conducted Power Measurement _____ **61**

 7.2.1 FCC Limits: _____ **61**

 7.2.2 IC Limits _____ **61**

 7.2.3 Measurement Results _____ **61**

7.3 Power Spectral Density _____ **62**



7.3.1	FCC Limit	62
7.3.2	IC Limit	62
7.3.3	Results	62
7.4	Peak Excursion	62
7.4.1	Limit	62
7.4.2	Results	62
7.5	Conducted Spurious Emission	62
7.5.1	Limit	62
7.5.2	Results:	62
7.6	AC Power Line Conducted Emissions § 15.107/207	63
7.6.1	LIMITS	63
7.6.2	RESULTS 802.11n HT40 Line:	64
7.6.3	RESULTS 802.11n HT40 Neutral:	65
8	TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS	66
9	BLOCK DIAGRAMS	67
10	Revision History	68



1 Assessment

The following is in compliance with the applicable criteria specified in FCC rules Part 15.407 of the Code of Federal Regulations.

Company	Description	Model #
SONY Corporation	Notebook PC	PCG-5Q1L

This report is reviewed by:

Lothar Schmidt
 (Director Regulatory and
 Antenna Services)

2008-11-13 EMC & Radio

Date Section Name Signature

This report is prepared by:

Peter Mu
 (EMC Project Engineer)

2008-11-13 EMC & Radio

Date Section Name Signature

The test results of this test report relate exclusively to the test item specified in Identification of the Equipment under Test. The CETECOM Inc. USA does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM Inc USA.



2 Administrative Data

2.1 Identification of the Testing Laboratory Issuing the EMC Test Report

Company Name:	CETECOM Inc.
Department:	EMC
Address:	411 Dixon Landing Road Milpitas, CA 95035 U.S.A.
Telephone:	+1 (408) 586 6200
Fax:	+1 (408) 586 6299
Responsible Test Lab Manager:	Lothar Schmidt
Responsible Project Leader:	Peter Mu
Date of test:	2008-11-10 to 2008-11-13

2.2 Identification of the Client

APPLICANT	
Applicant (Company Name)	SONY Corporation
Street Address	1-7-1 Konan, Minato-ku,
City/Zip Code	Tokyo, 108-0075
Country	Japan
Contact Person	Michio Kobayashi
Telephone	+81-263-72-5696
Fax	+81-263-72-9755
e-mail	<u>Michio.Kobayashi@jp.sony.com</u>

2.3 Identification of the Manufacturer

MANUFACTURER (If different from Applicant)	
Applicant (Firm Name):	Sony EMCS Corporation
Contact Person:	Michio Kobayashi
Telephone:	+81-263-72-5696
Fax:	+81-263-72-9755
Address Line 1:	5432 Toyoshima,
City:	Azumino-shi, Nagano
Postal Code/ Country:	399-8282, Japan
e-mail:	<u>Michio.Kobayashi@jp.sony.com</u>



3 Equipment under Test (EUT)

3.1 Specification of the Equipment under Test

EUT	
Marketing Name of EUT (if not same as Model No.):	PCG-5Q1L
Description:	Notebook PC
Model No:	PCG-5Q1L
FCC ID:	AK8PCG5Q1L
IC ID:	409B-PCG5Q1L

Frequency Range:	5180-5250MHz, 5250-5350MHz, 5470-5725MHz
Type(s) of Modulation:	OFDM
Antenna Type:	Inverted F antenna Peak Gain 5150-5350MHz: 4.88dBi. Peak Gain 5470-5725MHz: 3.98dBi.
Max Output Power:	<p>Sub-band 1: 5150-5250MHz</p> <p>802.11a mode: EIRP: 21.48dBm, (140.6mW). Conducted: 16.6dBm (45mW)</p> <p>802.11n HT20 mode: EIRP: 20.18dBm, (104.2mW). Conducted: 15.3dBm (34mW)</p> <p>802.11n HT40 mode: EIRP: 20.88dBm, (122.46mW). Conducted: 16.0dBm (40mW)</p> <p>Sub-band 2: 5250-5350MHz</p> <p>802.11a mode: EIRP: 21.08dBm, (128.2mW). Conducted: 16.2dBm (42mW)</p> <p>802.11n HT20 mode: EIRP: 17.88dBm, (61.38mW). Conducted: 14.2dBm (26mW)</p> <p>802.11n HT40 mode: EIRP: 20.78dBm, (119.7mW). Conducted: 15.9dBm (38mW)</p> <p>Sub-band 3: 5470-5725MHz</p> <p>802.11a mode: EIRP: 22.48dBm, (177.0mW). Conducted: 18.5dBm (71mW)</p> <p>802.11n HT20 mode: EIRP: 19.58dBm, (90.8mW). Conducted: 15.6dBm (36mW)</p> <p>802.11n HT40 mode: EIRP: 19.38dBm, (99.54mW). Conducted: 16.0dBm (40mW)</p>



--	--

3.2 Identification of the Equipment under Test (EUT)

EUT #	TYPE	MANF.	MODEL	SERIAL #
1	EUT	SONY Corporation	PCG-5Q1L	FCC1
2	EUT	SONY Corporation	PCG-5Q1L	FCC2

3.3 Identification of Accessory equipment

AE #	TYPE	MANF.	MODEL	SERIAL #
1	AC/DC ADAPTER	SONY Corporation	VGP-AC16V11	0237485

4 Subject Of Investigation

All testing was performed on the product referred to in Section 3 as EUT. EUT operates in the band 5150-5250MHz, 5250-5350MHz, and 5470-5725MHz in 802.11a, 802.11n 20MHz (HT20) and 802.11n 40MHz (HT40) mode. The EUT has one transmit and two receive antennae.

The objective of the measurements done by Cetecom Inc. was to measure the performance of the EUT operating under all operating modes as specified by requirements listed in FCC rules Part 15.407 of Title 47 of the Code of Federal Regulations. The maximization of portable equipment is conducted in accordance with ANSI C63.4



5 Radiated Measurements

5.1 Maximum Peak Output Power § 15.407 (Radiated)

5.1.1 FCC Limits:

Conducted Output Power is defined as the following (reduced if directional gain > 6dBi):

- Sub-band 1: 5150-5250MHz: 15.407(a)(1): 50mW or 4dBm + 10log(B),
- Sub-band 2: 5250-5350MHz: 15.407(a)(2): 250mW or 11dBm + 10log(B)
- Sub-band 3: 5470-5725MHz: 15.407(a)(2): 250mW or 11dBm + 10log(B)

B is the 26-dB emission bandwidth in MHz.

Directional gain is 4.88dBi < 6dBi so EIRP limit = Conducted Limit + 6dBm.

802.11a Mode

Channel Frequency	Conducted Output Power Limit (dBm)			EIRP Limit (dBm)
	Stated	Calculated	Applicable	
5180	17.0	17.46	17.0	23.0
5220	17.0	19.48	17.0	23.0
5240	17.0	19.74	17.0	23.0
5260	24.0	26.68	24.0	30.0
5300	24.0	26.38	24.0	30.0
5320	24.0	24.46	24.0	30.0
5500	24.0	26.54	24.0	30.0
5600	24.0	27.10	24.0	30.0
5700	24.0	25.74	24.0	30.0

802.11n HT20 Mode

Channel Frequency	Conducted Output Power Limit (dBm)			EIRP Limit (dBm)
	Stated	Calculated	Applicable	
5180	17.0	18.08	17.0	23.0
5220	17.0	20.50	17.0	23.0
5240	17.0	20.52	17.0	23.0
5260	24.0	27.11	24.0	30.0
5300	24.0	27.14	24.0	30.0
5320	24.0	25.83	24.0	30.0
5500	24.0	27.51	24.0	30.0



5600	24.0	27.50	24.0	30.0
5700	24.0	27.42	24.0	30.0

802.11n HT40 Mode

Channel Frequency	Conducted Output Power Limit (dBm)			EIRP Limit (dBm)
	Stated	Calculated	Applicable	
5190	17.0	20.07	17.0	23.0
5230	17.0	22.96	17.0	23.0
5270	24.0	30.15	24.0	30.0
5310	24.0	27.10	24.0	30.0
5510	24.0	27.11	24.0	30.0
5590	24.0	27.88	24.0	30.0
5690	24.0	28.54	24.0	30.0

5.1.2 IC Limits

Sub-band 1: 5150-5250MHz: RSS-210 A9.2(1): 200 mW or $10 + 10 \log(B)$

Sub-band 2: 5250-5350MHz: RSS-210 A9.2(2): 1W or $17\text{dBm} + 10\log(B)$

Sub-band 3: 5470-5725MHz: RSS-210 A9.2(2): 1W or $17\text{dBm} + 10\log(B)$

B is the 99% emission bandwidth in MHz

802.11a Mode

Channel Frequency	EIRP Limit (mW)		
	Stated	Calculated	Applicable
5180	200.00	170.00	170.00
5220	200.00	171.00	171.00
5240	200.00	171.00	171.00
5260	1000.00	857.03	857.03
5300	1000.00	857.03	857.03
5320	1000.00	857.03	857.03
5500	1000.00	857.03	857.03
5600	1000.00	882.09	882.09
5700	1000.00	857.03	857.03



802.11n HT20 Mode

Channel Frequency	EIRP Limit (mW)		
	Stated	Calculated	Applicable
5180	200.00	181.00	181.00
5220	200.00	181.00	181.00
5240	200.00	182.00	182.00
5260	1000.00	907.15	907.15
5300	1000.00	907.15	907.15
5320	1000.00	912.16	912.16
5500	1000.00	912.16	912.16
5600	1000.00	917.17	917.17
5700	1000.00	912.16	912.16

802.11n HT40 Mode

Channel Frequency	EIRP Limit (mW)		
	Stated	Calculated	Applicable
5190	200.00	363.00	200.00
5230	200.00	366.00	200.00
5270	1000.00	1834.35	1000.00
5310	1000.00	1819.31	1000.00
5510	1000.00	1824.32	1000.00
5590	1000.00	1809.29	1000.00
5690	1000.00	1824.32	1000.00



5.1.3 Measurement Results

EIRP is calculated as $EIRP = \text{Conducted Peak Power (dBm)} + \text{Peak Antenna Gain (dBi)}$

EIRP 802.11a MODE:

TEST CONDITIONS $T_{nom}(23)^{\circ}C, V_{nom}VDC$	Channel Frequency	EIRP (dBm)	EIRP (mW)	FCC Margin (mW)	IC Margin (mW)
Sub-band 1: 5150-5250MHz	5180	18.58	72.11	127.42	97.89
	5220	20.98	125.31	74.21	45.69
	5240	21.48	140.60	58.92	30.40
Sub-band 2: 5250-5350MHz	5260	20.98	125.31	874.69	731.72
	5300	21.08	128.23	871.77	728.80
	5320	18.88	77.27	922.73	779.76
Sub-band 3: 5470-5725MHz	5500	20.38	109.14	890.86	747.89
	5600	22.48	177.01	822.99	705.08
	5700	18.98	79.07	920.93	777.96

EIRP 802.11n HT20 MODE:

TEST CONDITIONS $T_{nom}(23)^{\circ}C, V_{nom}VDC$	Channel Frequency	EIRP (dBm)	EIRP (mW)	FCC Margin (mW)	IC Margin (mW)
Sub-band 1: 5150-5250MHz	5180	17.18	52.24	147.29	128.76
	5220	19.88	97.27	102.25	83.73
	5240	20.18	104.23	95.29	77.77
Sub-band 2: 5250-5350MHz	5260	19.08	80.91	919.09	826.24
	5300	17.88	61.38	938.62	845.77
	5320	17.68	58.61	941.39	853.55
Sub-band 3: 5470-5725MHz	5500	16.88	48.75	951.25	863.41
	5600	19.58	90.78	909.22	826.39
	5700	18.08	64.27	935.73	847.89

EIRP 802.11n HT40 MODE:

TEST CONDITIONS $T_{nom}(23)^{\circ}C, V_{nom}VDC$	Channel Frequency	EIRP (dBm)	EIRP (mW)	FCC Margin (mW)	IC Margin (mW)
Sub-band 1: 5150-5250MHz	5190	10.78	11.97	187.56	188.03
	5230	20.88	122.46	77.06	77.54
Sub-band 2: 5250-5350MHz	5270	20.78	119.67	880.33	880.33
	5310	11.98	15.78	984.22	984.22
Sub-band 3: 5470-5725MHz	5510	14.38	27.42	972.58	972.58
	5590	19.38	86.70	913.30	913.30



6 Restricted Band Edge Compliance §15.407(b)/15.205

6.1.1 Limits

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

***PEAK LIMIT= 74dBuV/m**

***AVG. LIMIT= 54dBuV/m**

Test conducted in radiated mode with all three antenna ports transmitting.



6.1.2 Sub-band 1, 802.11n HT20 MODE


Emissions reported here represent the worse case emission for 802.11a and n20 mode.

Lower band edge PEAK

EUT: FCC2
Customer:: Sony Electronics
Test Mode: 802.11n20 @ 5180 MHz
ANT Orientation: H
EUT Orientation: H
Test Engineer: Chris
Voltage: AC Adaptor
Comments:

SWEEP TABLE: "FCC15.407 A_LBE_PK"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
4.5 GHz	5.2 GHz	MaxPeak MaxPeak	Coupled	1 MHz	#326horn_AF_horz

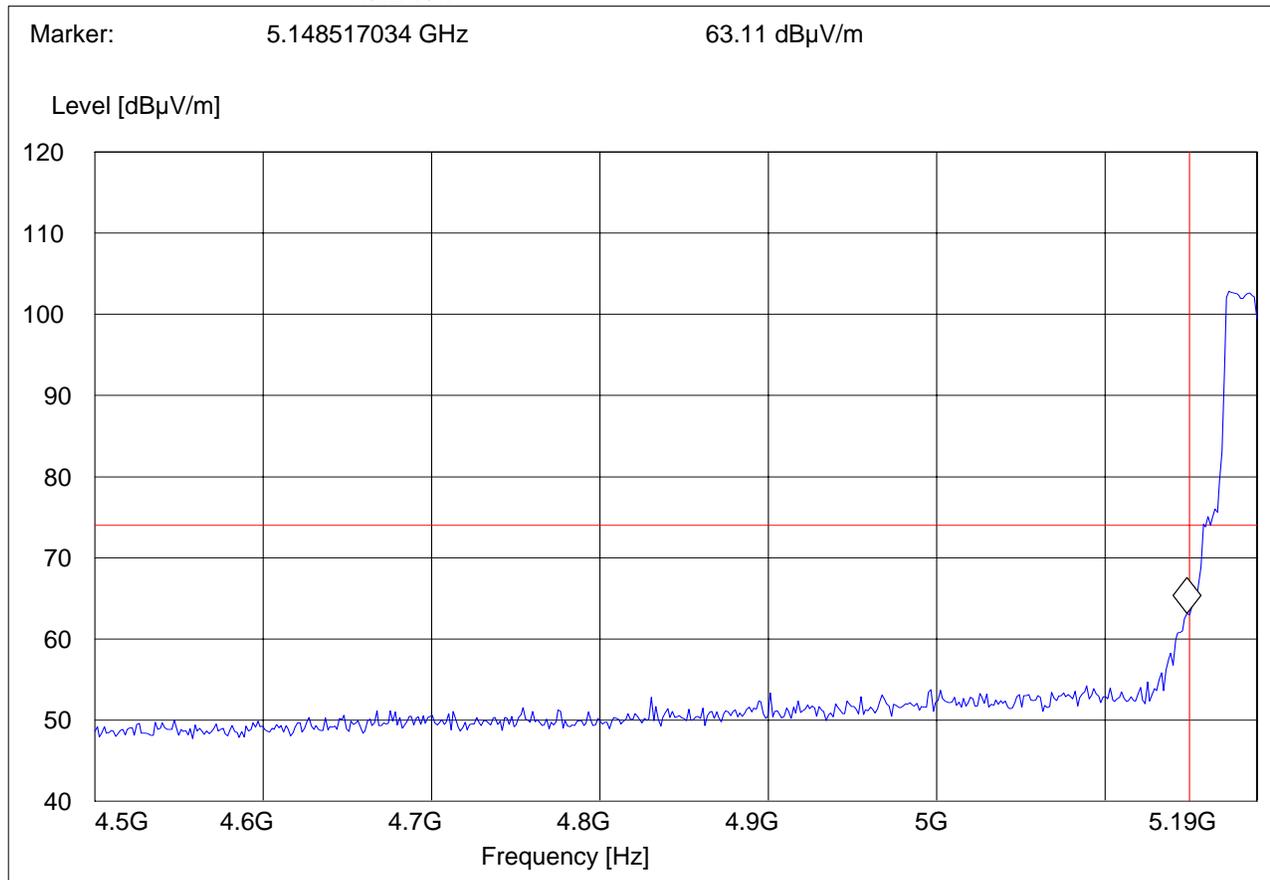




Lower band edge AVG

EUT: FCC2
Customer:: Sony Electronics
Test Mode: 802.11n20 @ 5180 MHz
ANT Orientation: H
EUT Orientation: H
Test Engineer: Chris
Voltage: AC Adaptor
Comments:

SWEEP TABLE: "FCC15.407 A_LBE_AVG"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
5.0 GHz	5.3 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

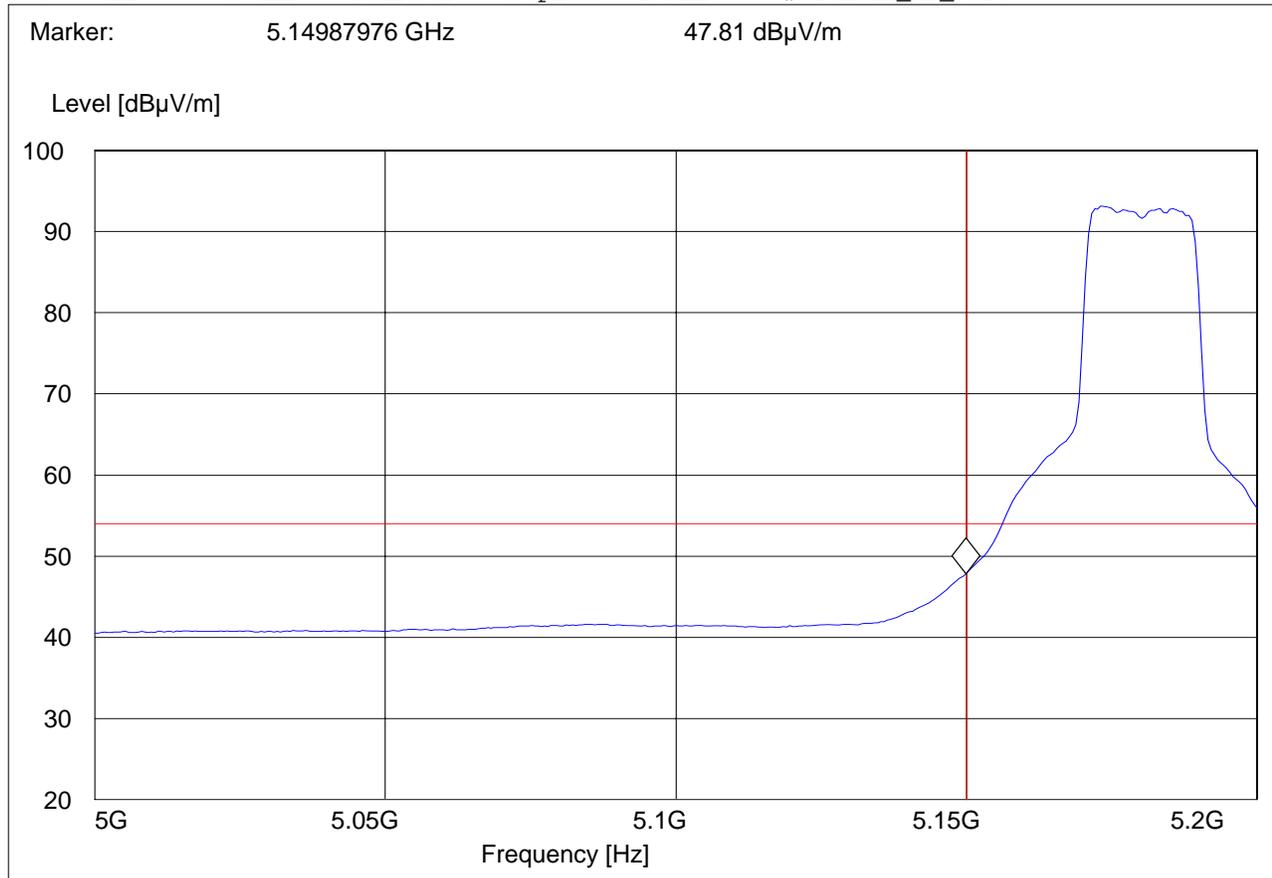




6.1.3 Sub-band 1. 802.11n HT40 MODE

5190MHz, Lower band edge PEAK

EUT: FCC2
Customer:: Sony Electronics
Test Mode: 802.11n40 @ 5190 MHz
ANT Orientation: H
EUT Orientation: H
Test Engineer: Chris
Voltage: AC Adaptor
Comments:

SWEEP TABLE: "FCC15.407 A_LBE_PK"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
4.5 GHz	5.2 GHz	MaxPeak MaxPeak	Coupled	1 MHz	#326horn_AF_horz

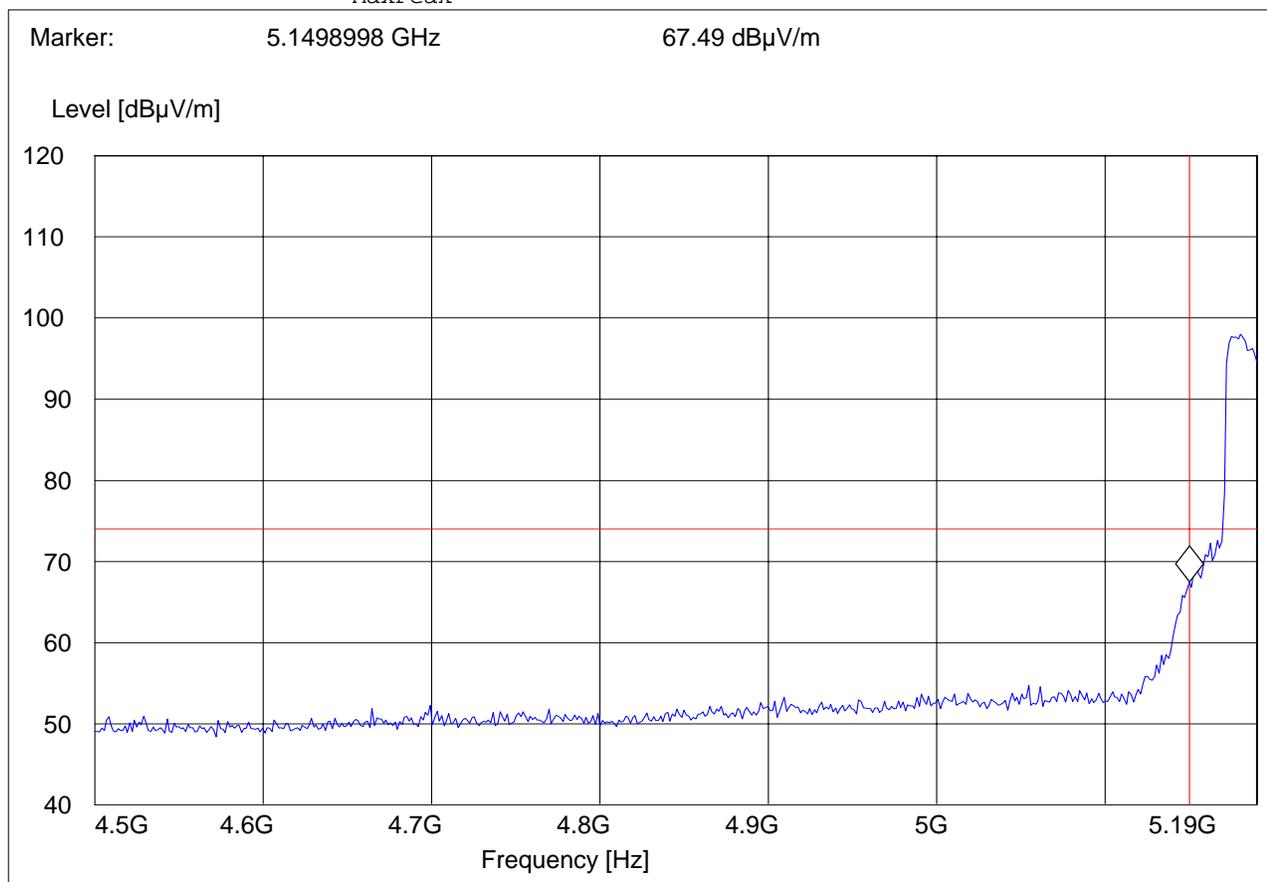




5190MHz, Lower band edge AVG

EUT: FCC2
Customer:: Sony Electronics
Test Mode: 802.11n40 @ 5190 MHz
ANT Orientation: H
EUT Orientation: H
Test Engineer: Chris
Voltage: AC Adaptor
Comments:

SWEEP TABLE: "FCC15.407 A_LBE_AVG"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
5.0 GHz	5.3 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

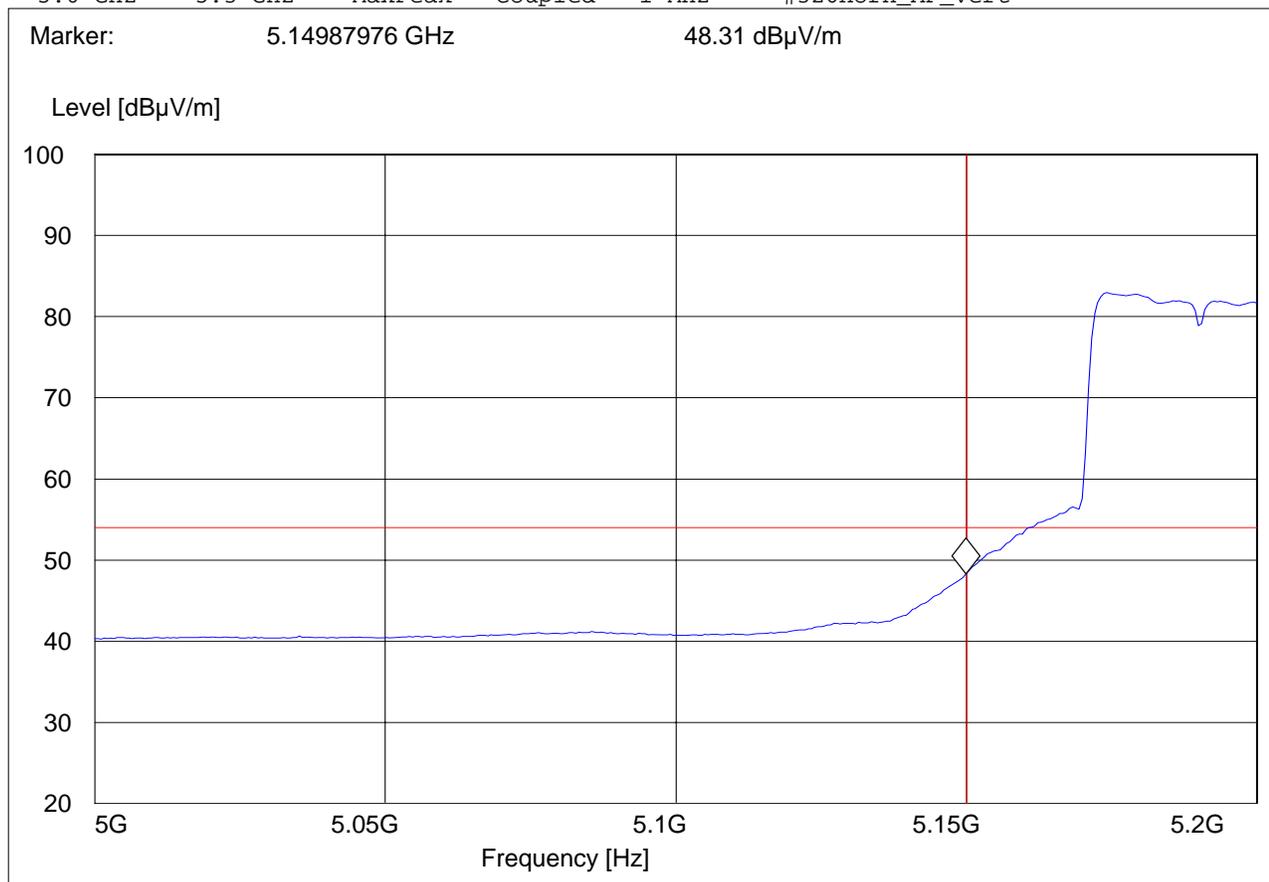



6.1.4 Sub-band 2. 802.11n HT20 MODE


Emissions reported here represent the worse case emission for 802.11a and n20 mode.

Higher band edge PEAK

EUT: FCC2
 Customer:: Sony Electronics
 Test Mode: 802.11n20 @ 5320 MHz
 ANT Orientation: H
 EUT Orientation: H
 Test Engineer: Chris
 Voltage: AC Adaptor
 Comments:

SWEEP TABLE: "FCC15.407 A_HBE_PK"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
5.2 GHz	5.5 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_horz

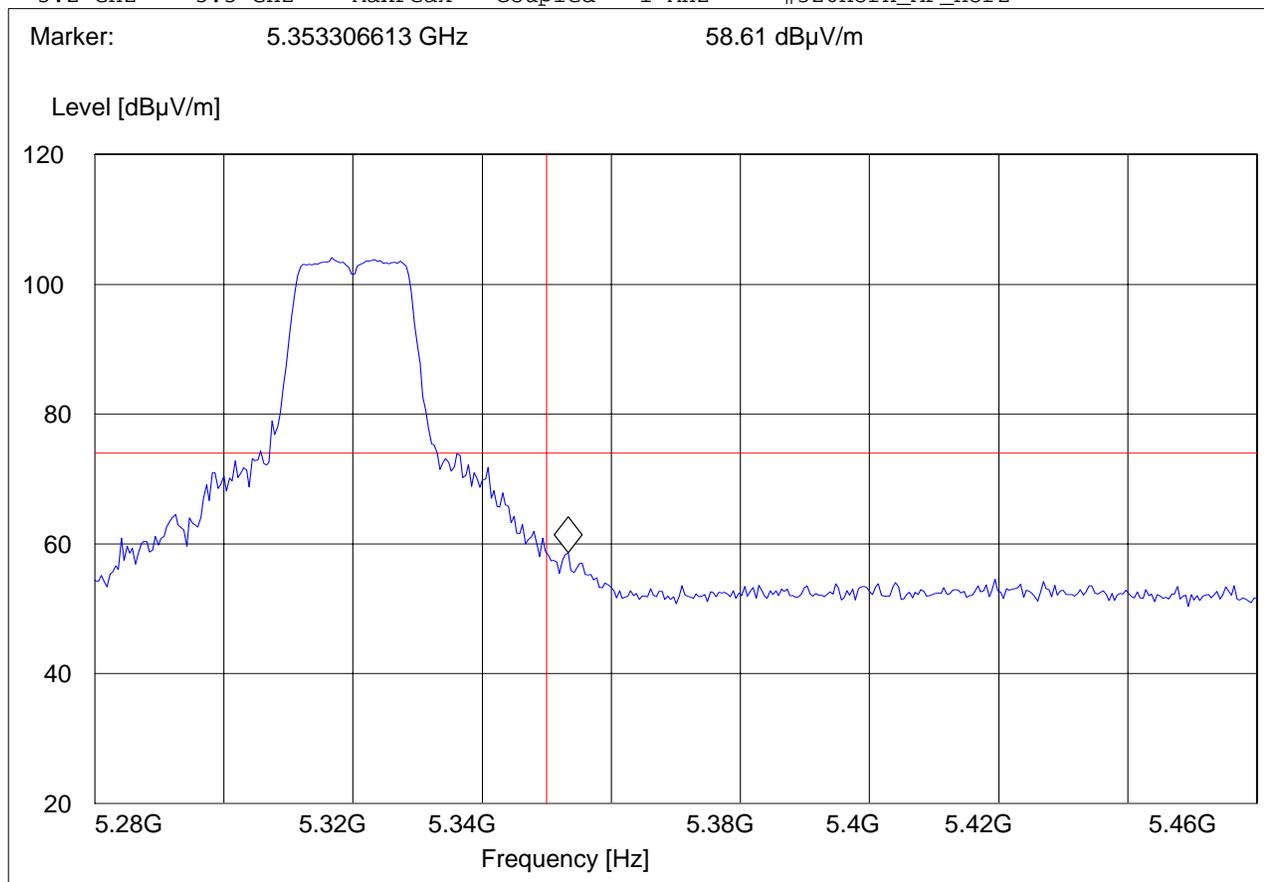




Higher band edge AVERAGE

EUT: FCC2
Customer:: Sony Electronics
Test Mode: 802.11n20 @ 5320 MHz
ANT Orientation: H
EUT Orientation: H
Test Engineer: Chris
Voltage: AC Adaptor
Comments:

SWEEP TABLE: "FCC15.407 A_HBE_AVG"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
5.2 GHz	5.5 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_horz

Marker: 5.350220441 GHz 44.44 dB μ V/m

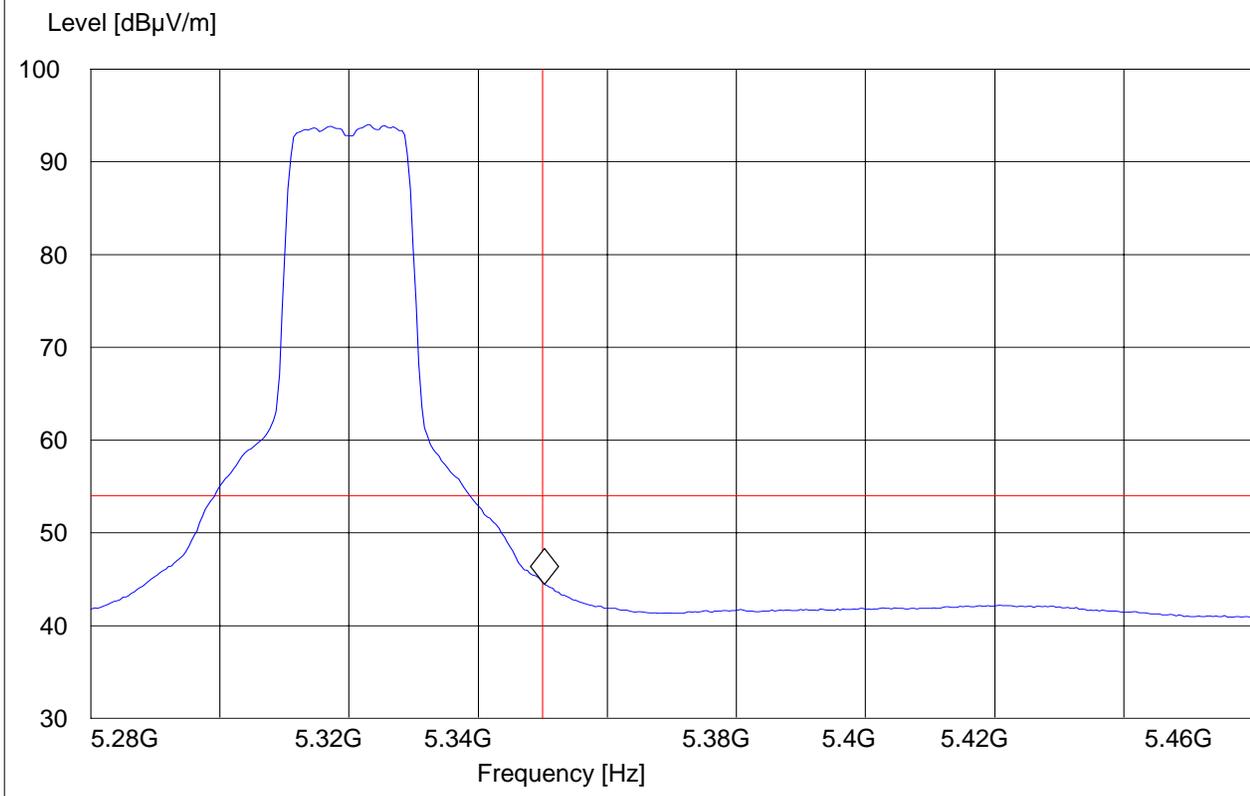




6.1.5 Sub-band 2. 802.11n HT40 MODE

Higher band edge PEAK

EUT: FCC2
Customer:: Sony Electronics
Test Mode: 802.11n20 @ 5320 MHz
ANT Orientation: H
EUT Orientation: H
Test Engineer: Chris
Voltage: AC Adaptor
Comments:

SWEEP TABLE: "FCC15.407 A_HBE_PK"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
5.2 GHz	5.5 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_horz

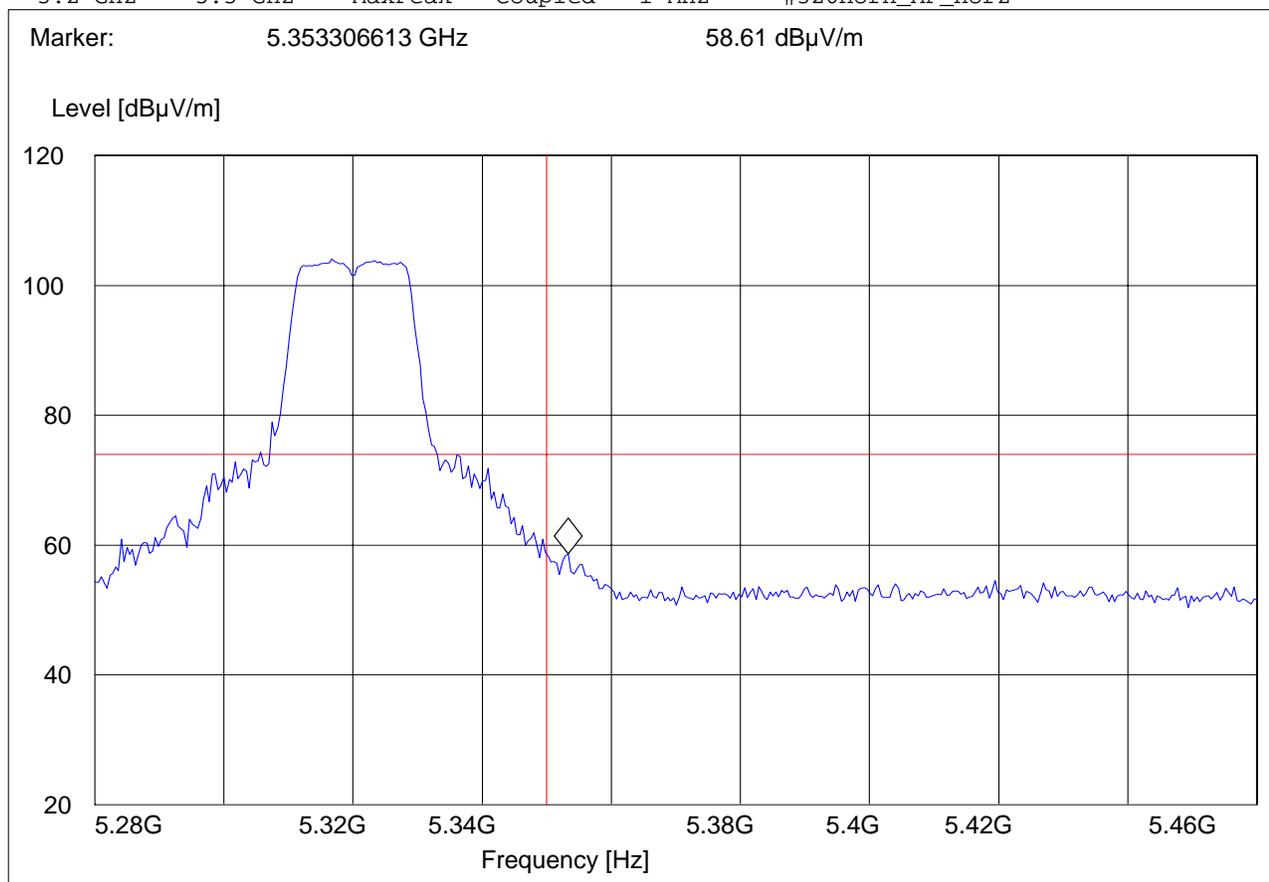




Higher band edge AVERAGE

EUT: FCC2
Customer:: Sony Electronics
Test Mode: 802.11n20 @ 5320 MHz
ANT Orientation: H
EUT Orientation: H
Test Engineer: Chris
Voltage: AC Adaptor
Comments:

SWEEP TABLE: "FCC15.407 A_HBE_AVG"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
5.2 GHz	5.5 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_horz

Marker: 5.350220441 GHz 44.44 dB μ V/m

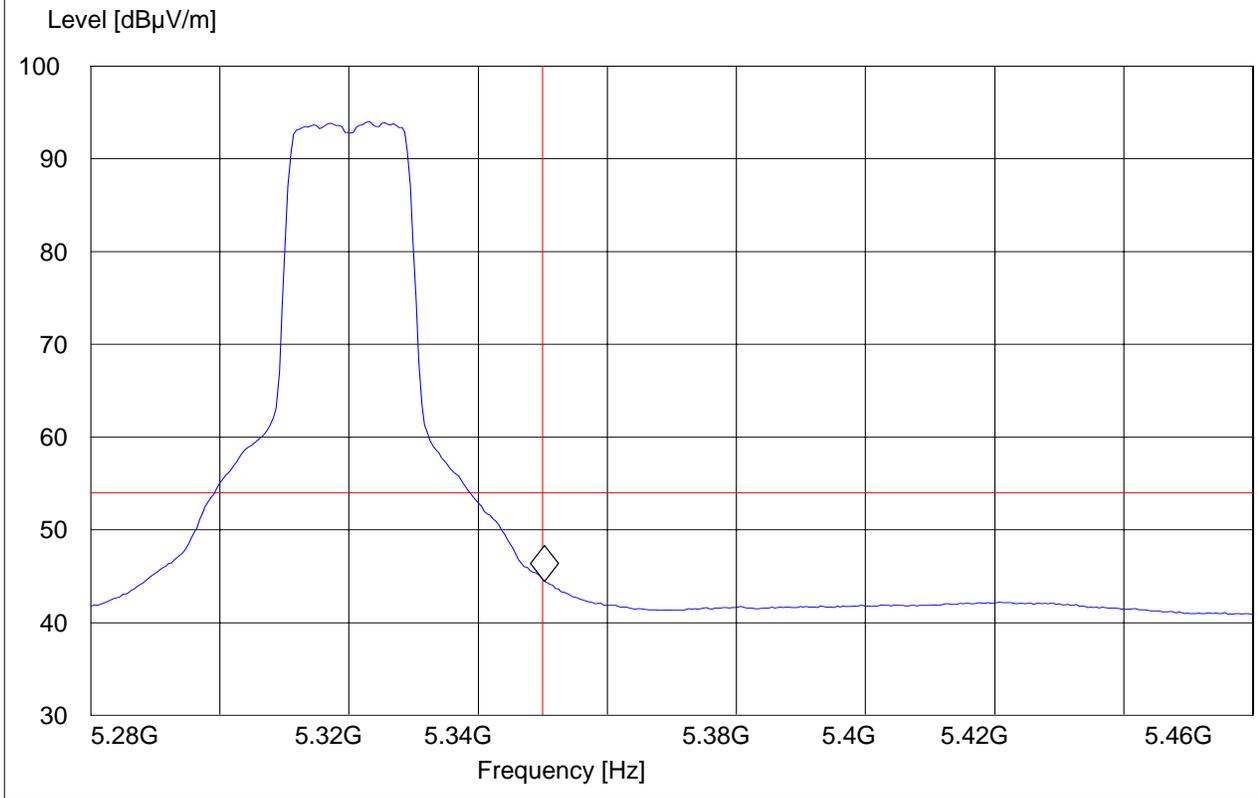



6.1.6 Sub-band 3. 802.11n HT20 MODE


Emissions reported here represent the worse case emission for 802.11a and n20 mode.

Lower band edge PEAK

EUT: FCC2
Customer:: Sony Electronics
Test Mode: 802.11n20 @ 5500 MHz
ANT Orientation: H
EUT Orientation: H
Test Engineer: Chris
Voltage: AC Adaptor
Comments:

SWEEP TABLE: "FCC15.407 B_LBE_PK"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
5.4 GHz	5.5 GHz	MaxPeak MaxPeak	Coupled	1 MHz	#326horn_AF_horz

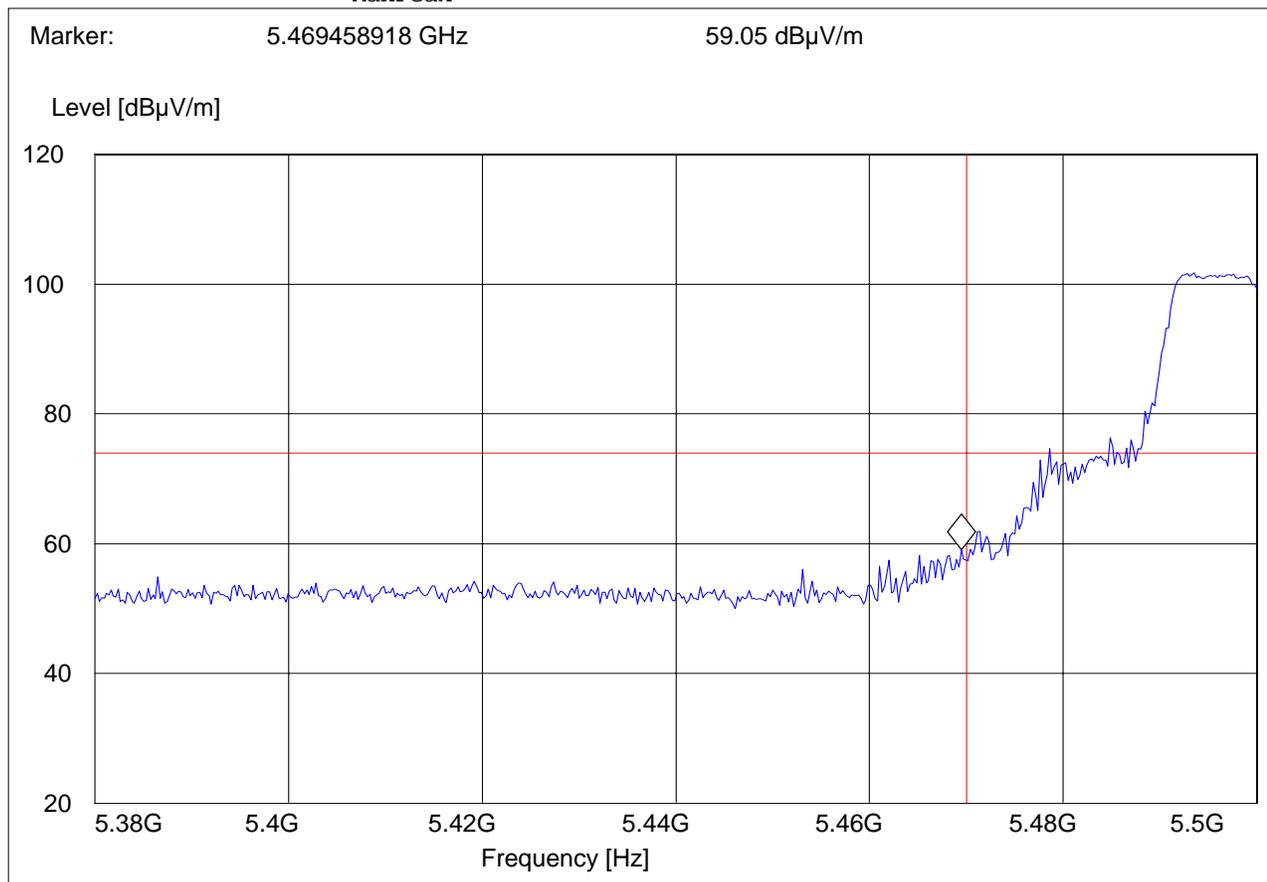




Lower band edge AVERAGE

EUT: FCC2
Customer:: Sony Electronics
Test Mode: 802.11n20 @ 5500 MHz
ANT Orientation: H
EUT Orientation: H
Test Engineer: Chris
Voltage: AC Adaptor
Comments:

SWEEP TABLE: "FCC15.407 B_LBE_AVG"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
5.4 GHz	5.5 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_horz

Marker: 5.46992986 GHz 43.92 dB μ V/m

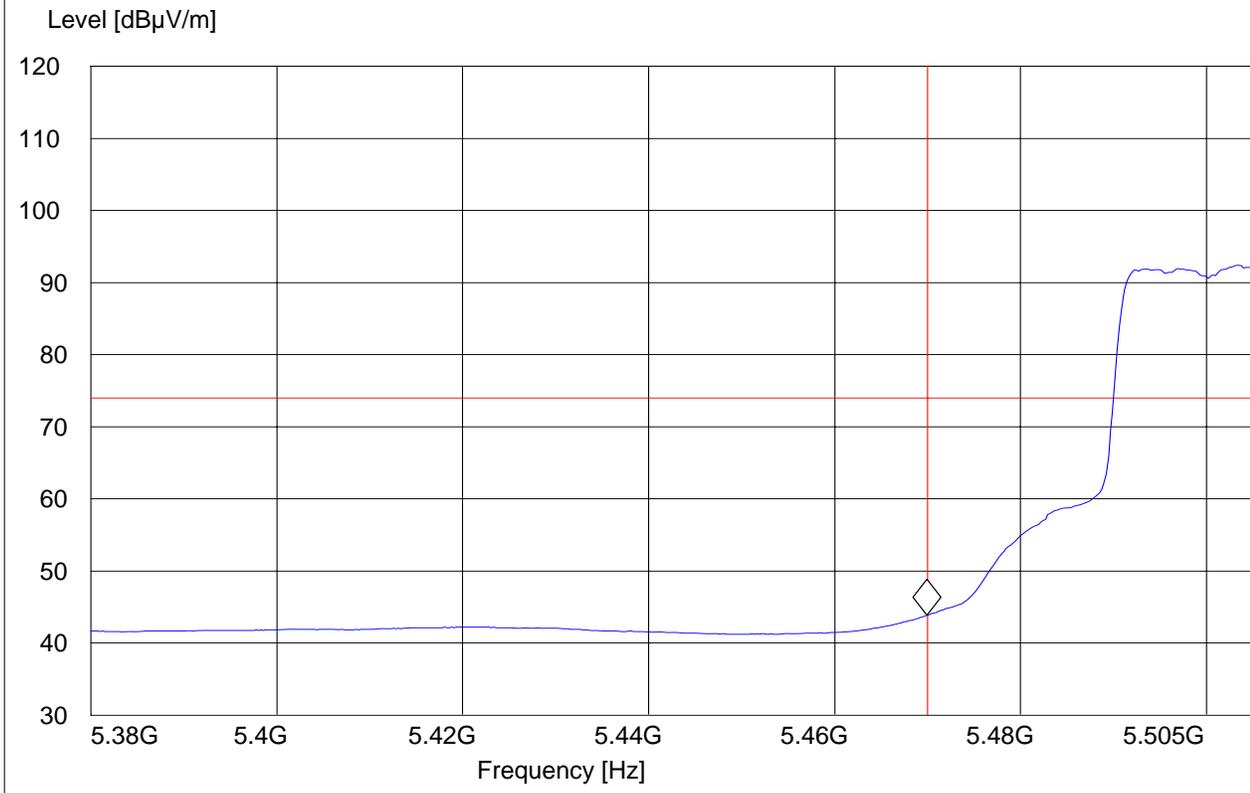




6.1.7 Sub-band 3. 802.11n HT40 MODE

Lower band edge PEAK

EUT: FCC2
Customer:: Sony Electronics
Test Mode: 802.11n40 @ 5510 MHz
ANT Orientation: H
EUT Orientation: H
Test Engineer: Chris
Voltage: AC Adaptor
Comments:

SWEEP TABLE: "FCC15.407 B_LBE_PK"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
5.4 GHz	5.5 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_horz

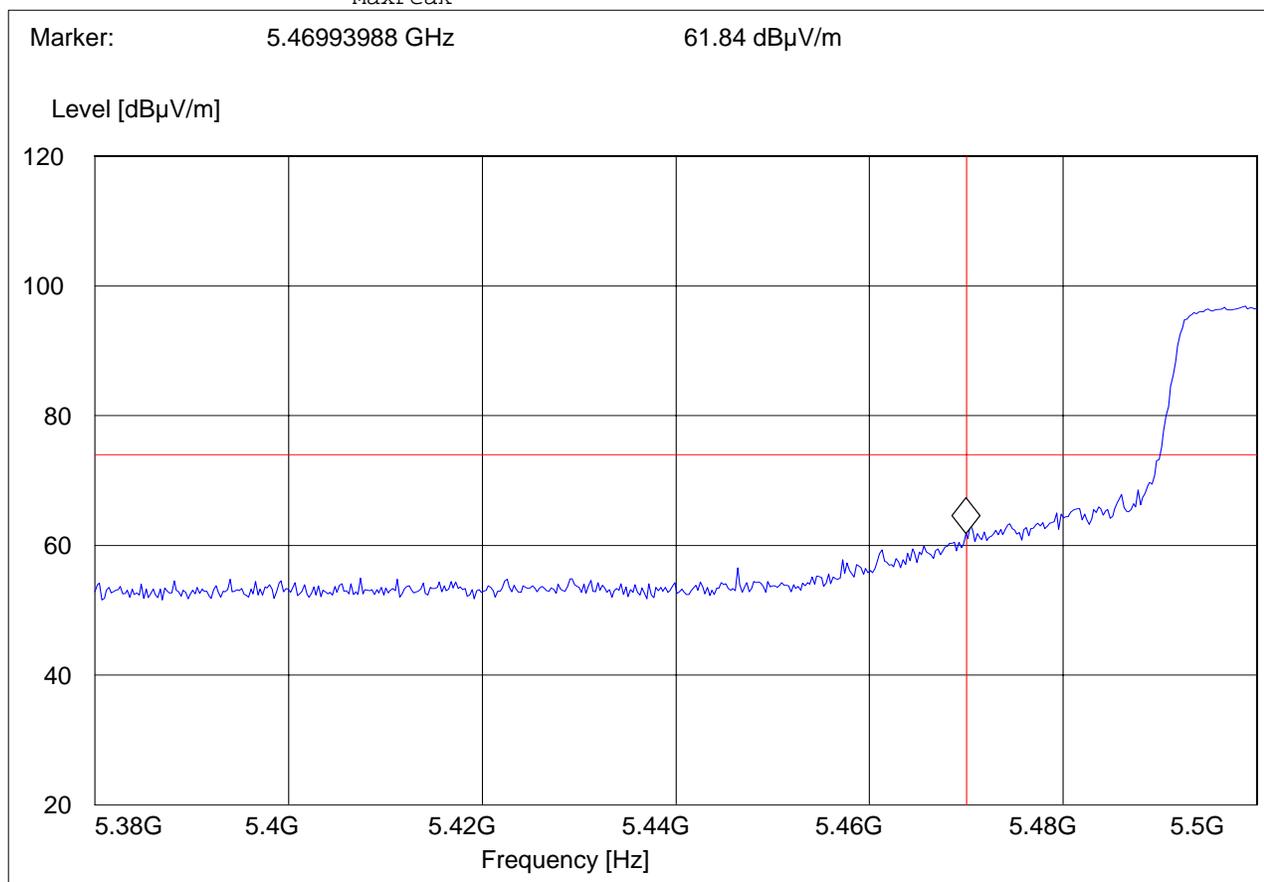




Lower band edge AVERAGE

EUT: FCC2
Customer:: Sony Electronics
Test Mode: 802.11n40 @ 5510 MHz
ANT Orientation: H
EUT Orientation: H
Test Engineer: Chris
Voltage: AC Adaptor
Comments:

SWEEP TABLE: "FCC15.407 B_LBE_AVG"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
5.4 GHz	5.5 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_horz

Marker: 5.46992986 GHz 48.07 dB μ V/m

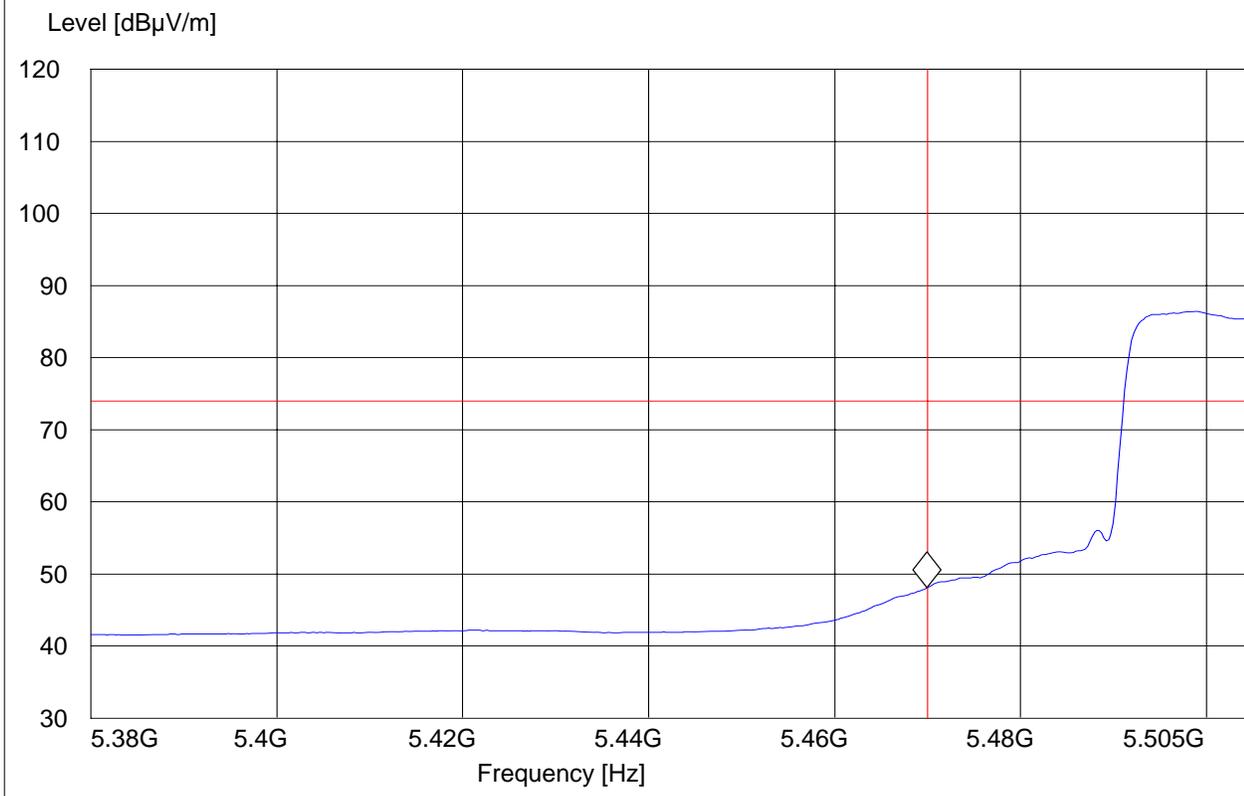



6.2 Transmitter Spurious Emission § 15.407(b)/15.205/15.209

6.2.1 Limits

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

***PEAK LIMIT= 74dBuV/m for spurious in restricted bands**

***AVG. LIMIT= 54dBuV/m for spurious in restricted bands**

NOTE:

1. The radiated emissions were done with different settings, using the relevant pre-amplifiers for the relevant frequency ranges. This is the reason that the graphs show different noise levels. In the range between 3 and 25 GHz very short cable connections to the antenna was used to minimize the noise level.

2. All measurements are done in peak mode using an average limit, unless specified with the plots.

Results for the radiated measurements below 30MHz according § 15.33

Frequency	Measured values	Remarks
9KHz – 30MHz	No emissions found, caused by the EUT	This is valid for all the tested channels



6.2.2 Sub-band 1 802.11n HT40 MODE

Emissions reported here represent the worse case emission for 802.11a, n20 and n40 mode.


30MHz – 1GHz, Antenna: Vertical

Note: This plot is valid for low, mid, high channels (worst-case plot).

EUT: FCC2
Customer:: Sony Electronics
Test Mode: 802.11n40
ANT Orientation: V
EUT Orientation: H
Test Engineer: Chris
Voltage: AC Adaptor
Comments:

SWEEP TABLE: "FCC15.247_30M-1G_Ver"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	3141-#1186_Vert

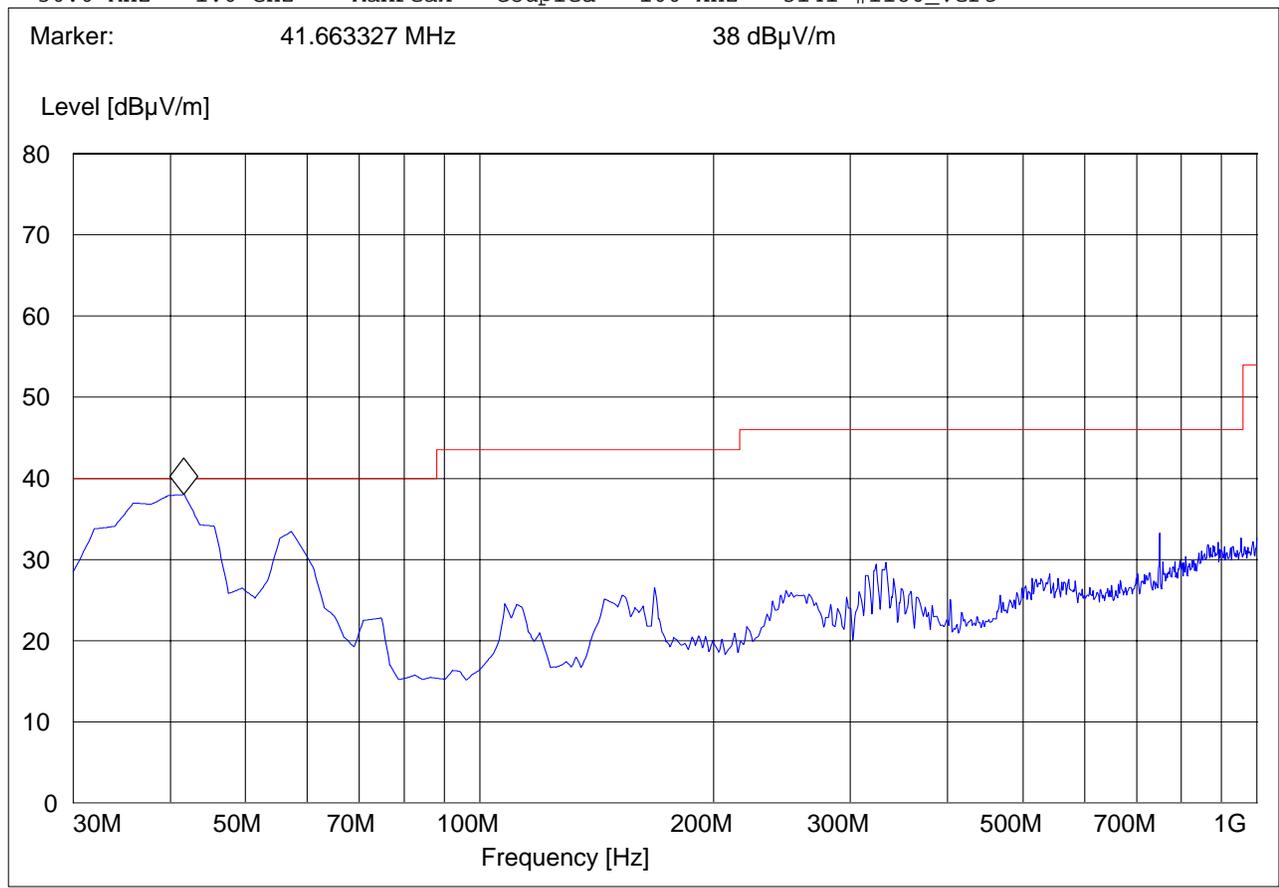




30MHz – 1GHz, Antenna: Horizontal

Note: This plot is valid for low, mid, high channels (worst-case plot).

EUT: FCC2
Customer:: Sony Electronics
Test Mode: 802.11n40
ANT Orientation: H
EUT Orientation: H
Test Engineer: Chris
Voltage: AC Adaptor
Comments:

SWEEP TABLE: "FCC15.247_30M-1G_Hor"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	3141-#1186_Horz

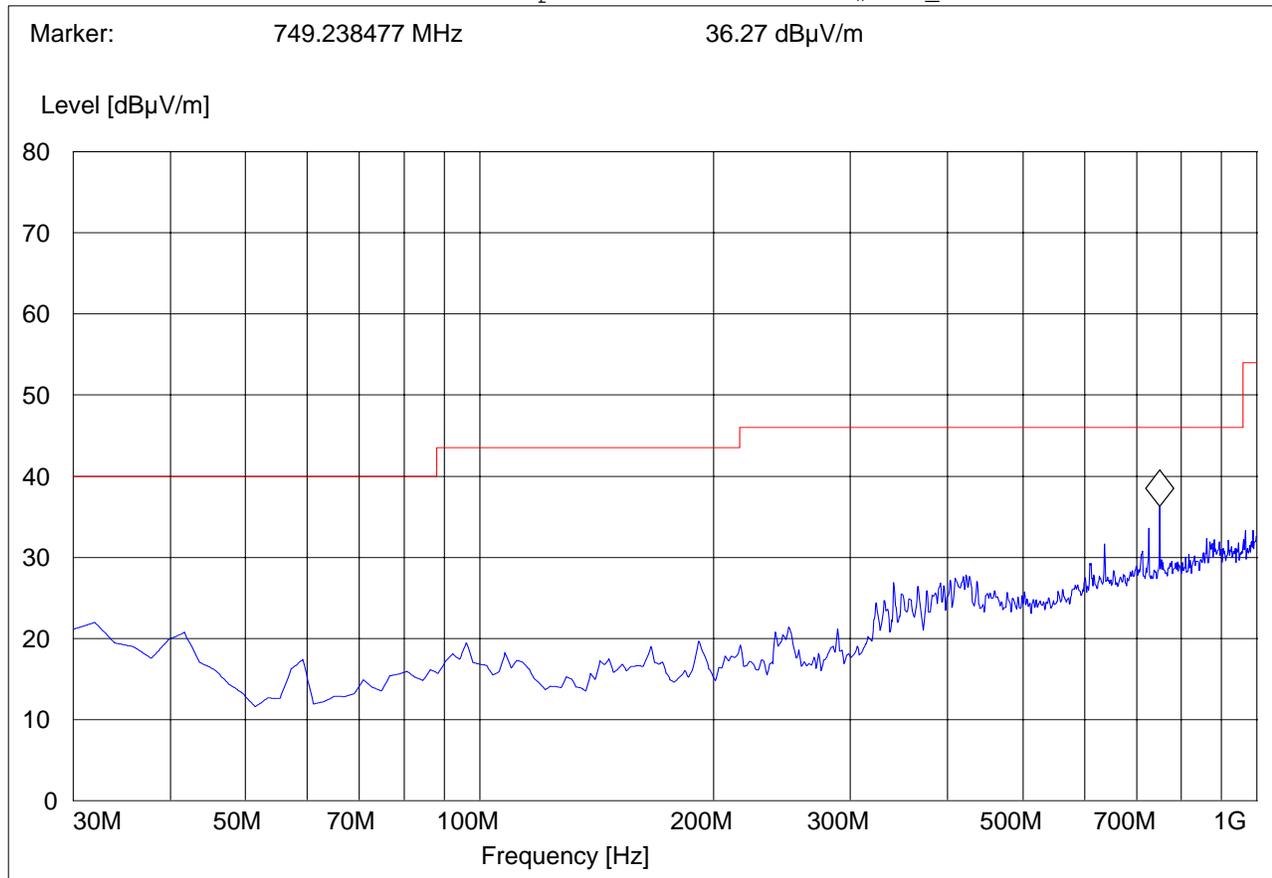



1-7GHz (5190MHz)


Note: The peak above the limit line is the carrier freq.

Note: Peak Reading vs. Average limit

EUT: FCC2
Customer:: Sony Electronics
Test Mode: 802.11n40 @ 5190 MHz
ANT Orientation: H
EUT Orientation: H
Test Engineer: Chris
Voltage: AC Adaptor
Comments:

SWEEP TABLE: "FCC 15.407 1-7G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	7.0 GHz	MaxPeak	Coupled	1 MHz	#35114 Horn

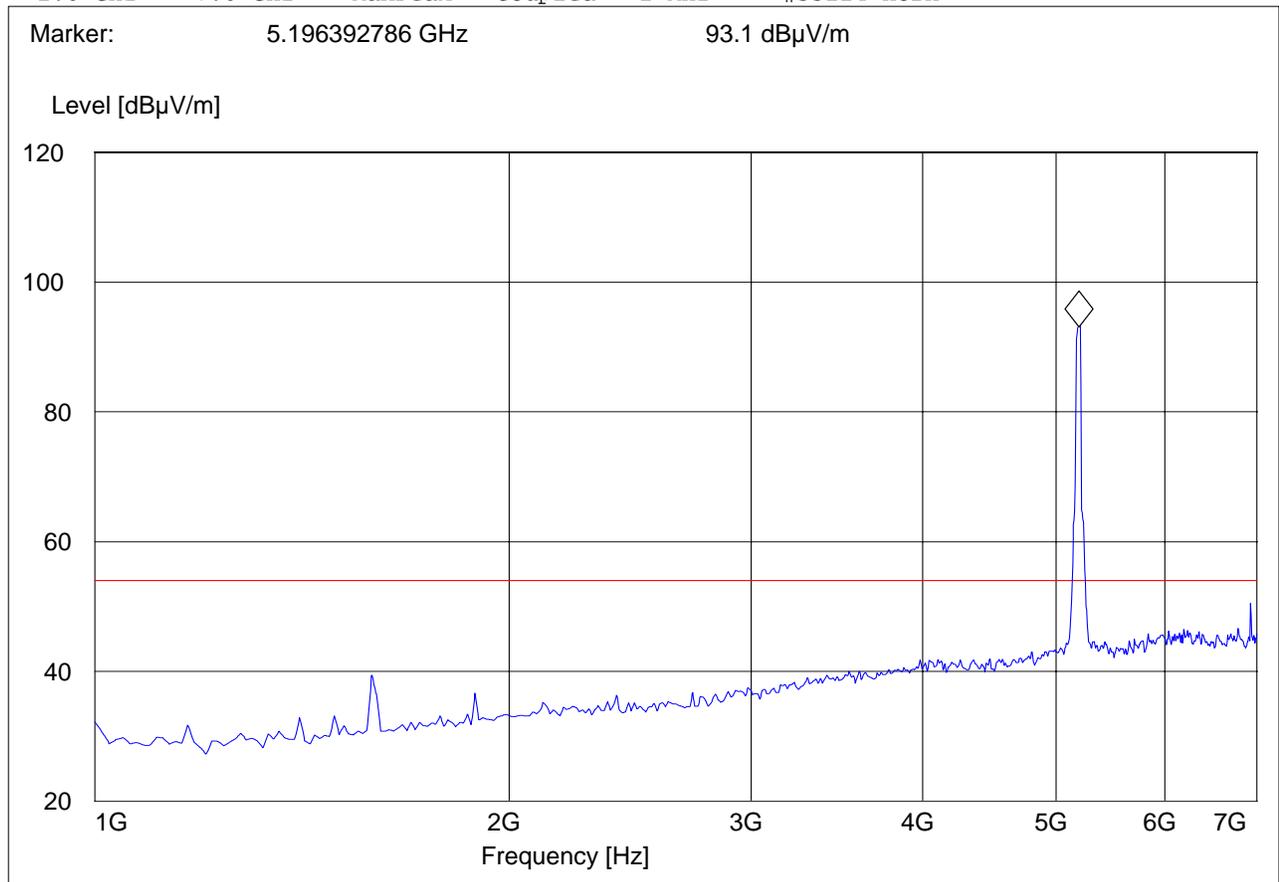



1-7GHz (5230MHz)


Note: The peak above the limit line is the carrier freq.

Note: Peak Reading vs. Average limit

EUT: FCC2
Customer:: Sony Electronics
Test Mode: 802.11n40 @ 5230 MHz
ANT Orientation: H
EUT Orientation: H
Test Engineer: Chris
Voltage: AC Adaptor
Comments:

SWEEP TABLE: "FCC 15.407 1-7G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	7.0 GHz	MaxPeak	Coupled	1 MHz	#35114 Horn

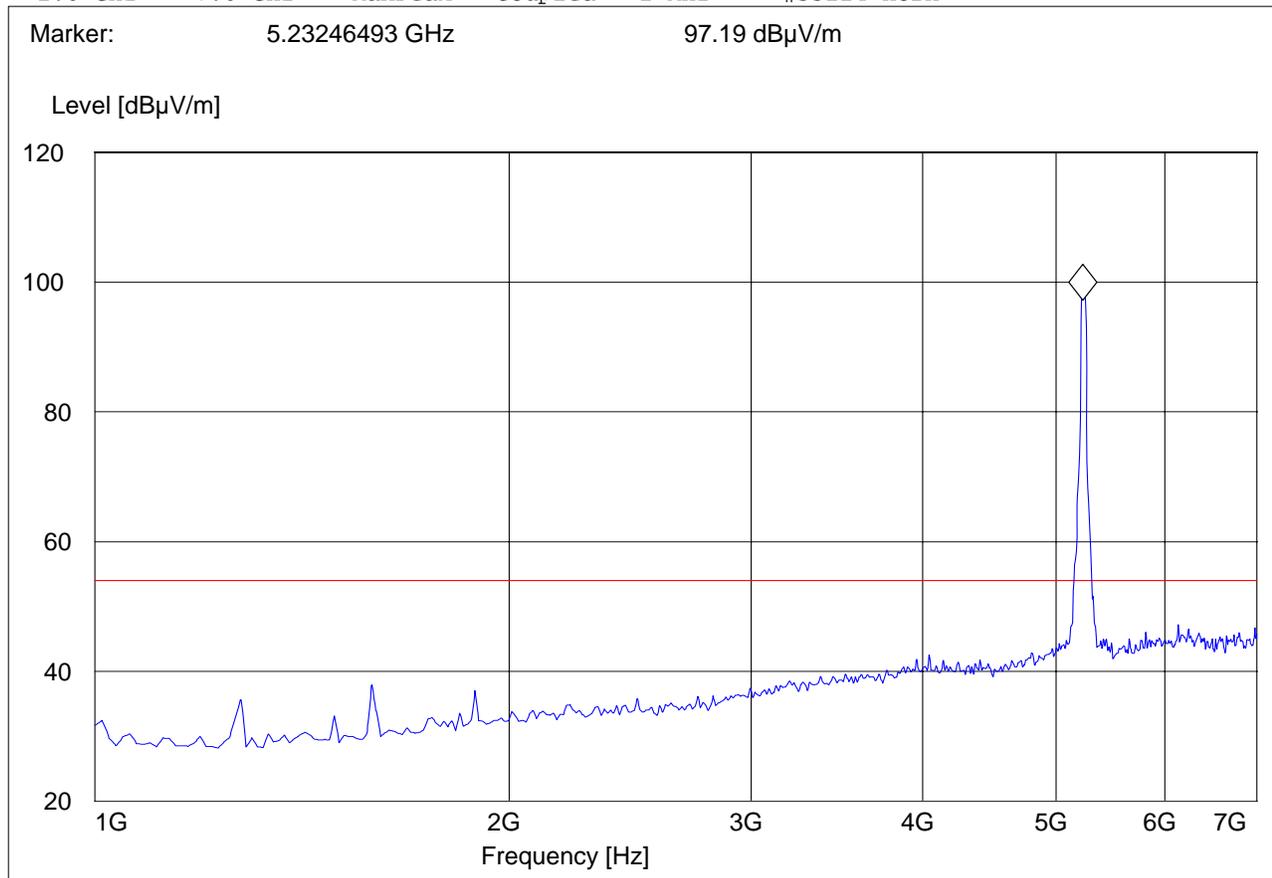




7-18GHz (5190MHz)

Note: Peak Reading vs. Average limit

EUT: FCC2
Customer:: Sony Electronics
Test Mode: 802.11n40 @ 5230 MHz
ANT Orientation: H
EUT Orientation: H
Test Engineer: Chris
Voltage: AC Adaptor
Comments:

SWEEP TABLE: "FCC 15.407 7-18G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	18.0 GHz	MaxPeak	1.0 s	1 MHz	#326horn_AF_horz

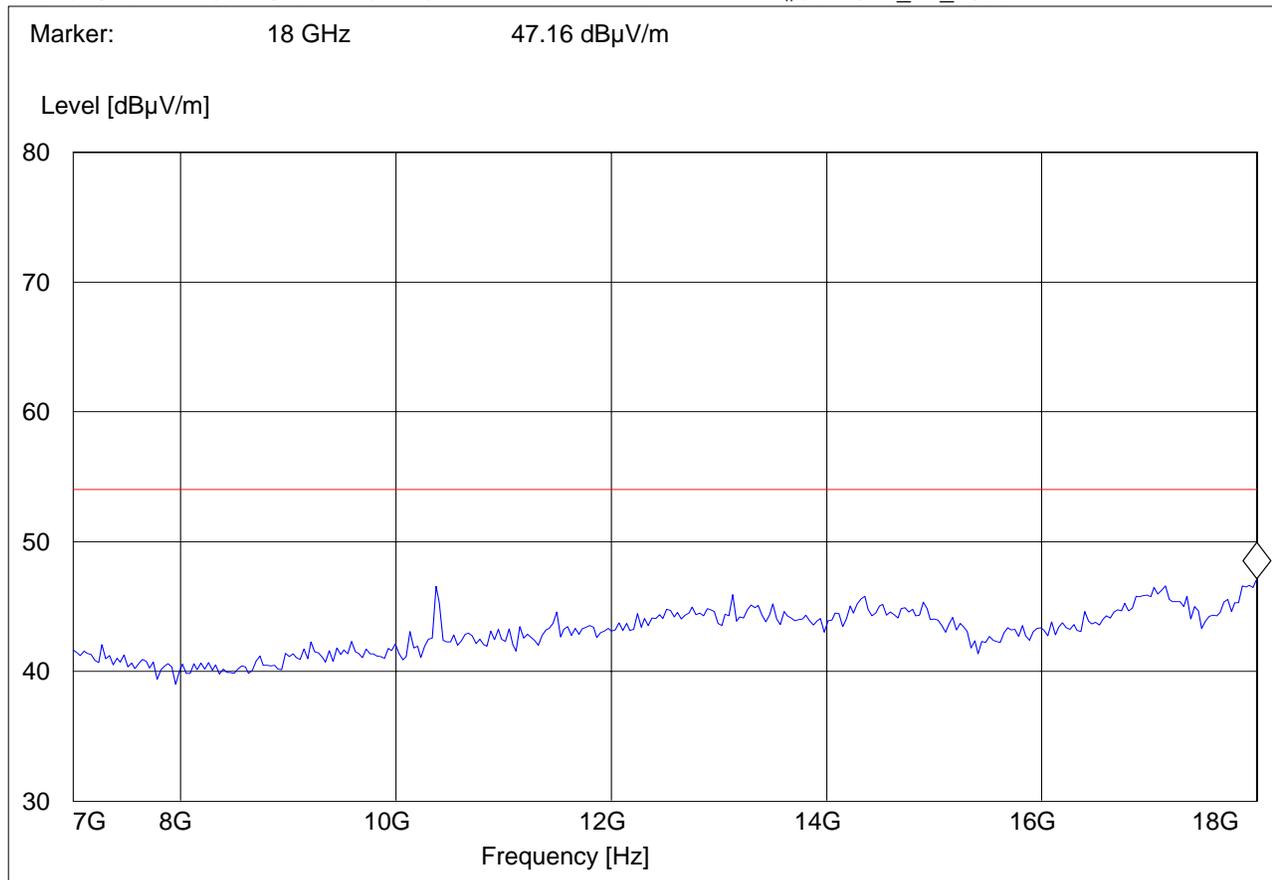



7-18GHz (5230MHz)


Note: Peak Reading vs. Average limit

EUT: FCC2
Customer:: Sony Electronics
Test Mode: 802.11n40 @ 5230 MHz
ANT Orientation: H
EUT Orientation: H
Test Engineer: Chris
Voltage: AC Adaptor
Comments:

SWEEP TABLE: "FCC 15.407 7-18G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	18.0 GHz	MaxPeak	1.0 s	1 MHz	#326horn_AF_horz

Marker: 17.182364729 GHz 46.61 dB μ V/m

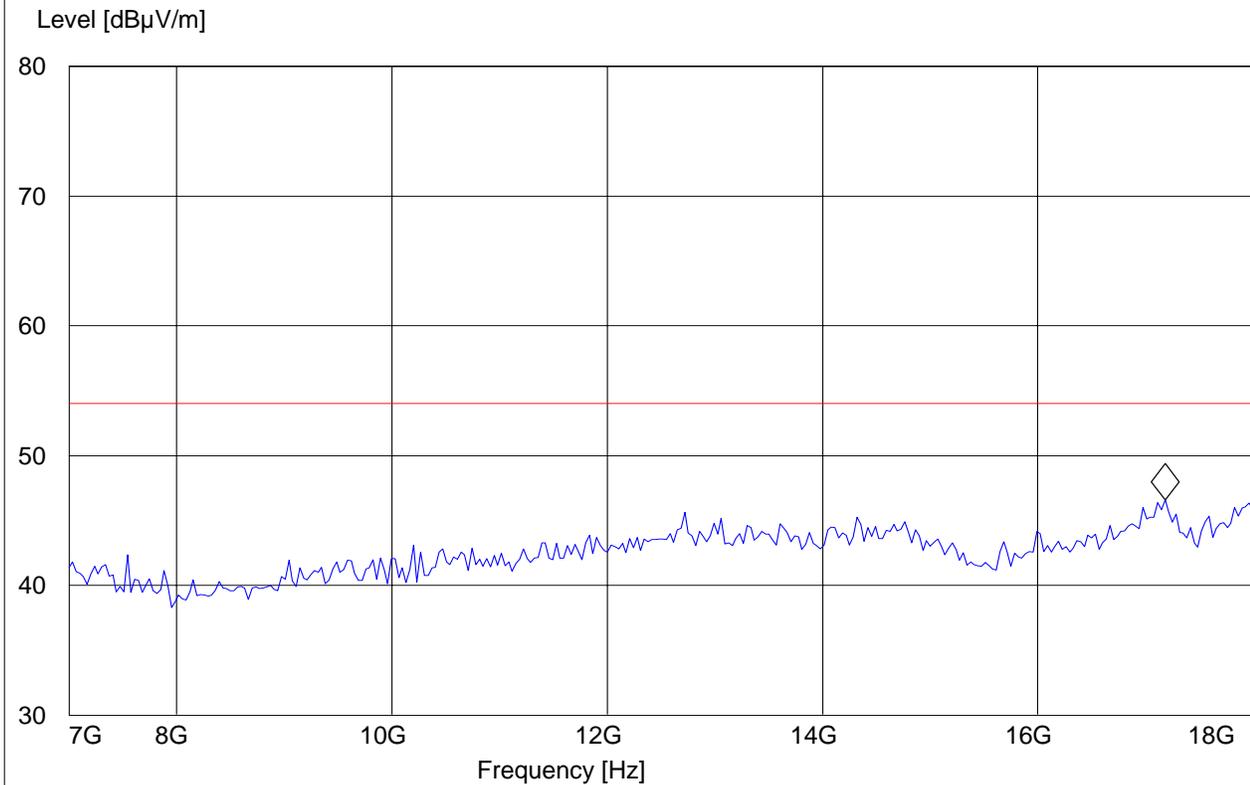




18-26.5GHz (5190MHz)

Note: Peak Reading vs. Average limit

EUT: FCC2
Customer:: Sony Electronics
Test Mode: 802.11n40 @ 5190 MHz
ANT Orientation: H
EUT Orientation: H
Test Engineer: Chris
Voltage: AC Adaptor
Comments:

SWEEP TABLE: "FCC 15.407 18-26.5G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
18.0 GHz	26.5 GHz	MaxPeak	Coupled	1 MHz	Horn # 3116_18-40G

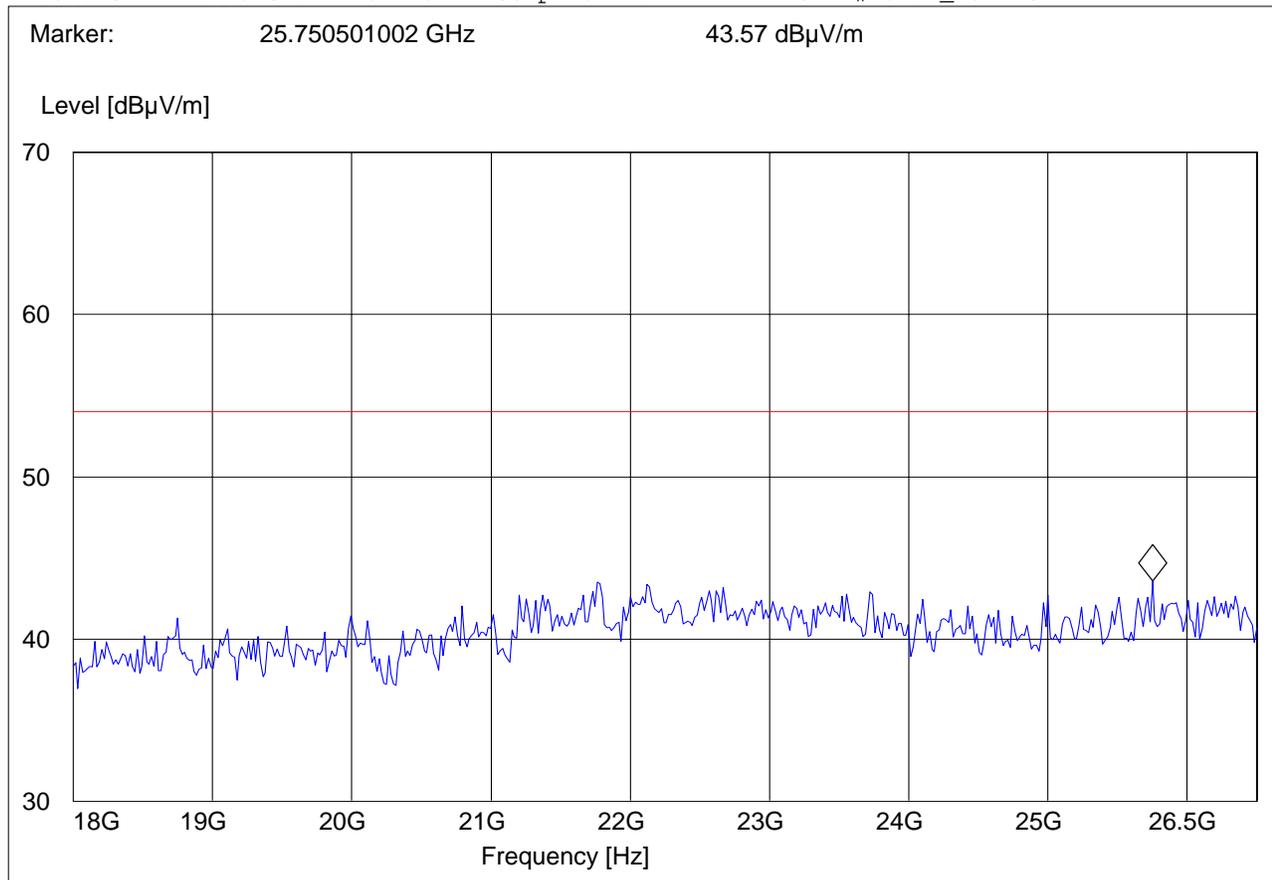




18-26.5GHz (5230MHz)

Note: Peak Reading vs. Average limit

EUT: FCC2
Customer:: Sony Electronics
Test Mode: 802.11n40 @ 5230 MHz
ANT Orientation: H
EUT Orientation: H
Test Engineer: Chris
Voltage: AC Adaptor
Comments:

SWEEP TABLE: "FCC 15.407 18-26.5G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
18.0 GHz	26.5 GHz	MaxPeak	Coupled	1 MHz	Horn # 3116_18-40G

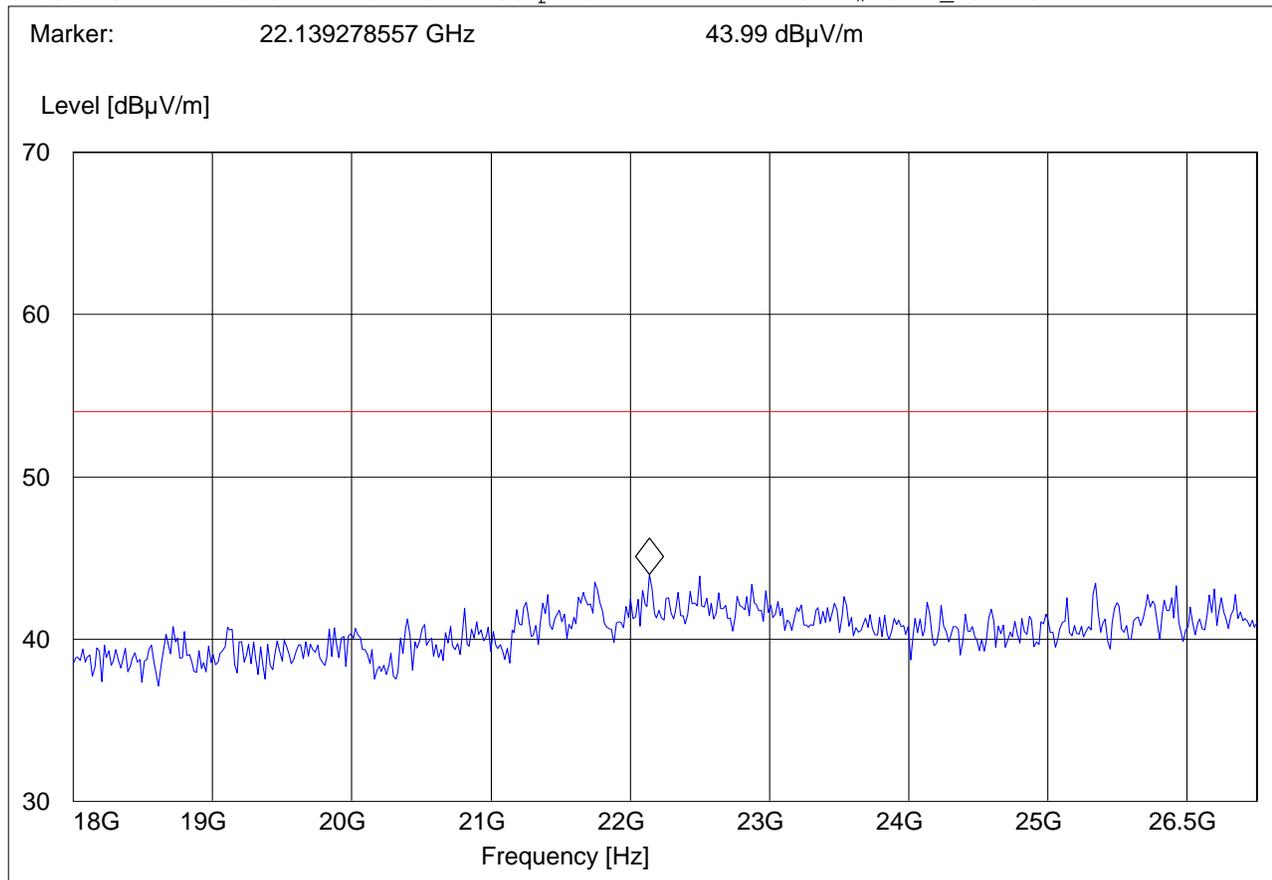



26.5-40GHz

Note: This plot is valid for low, and high channels (worst-case plot)


Note: Peak Reading vs. Average limit

EUT: FCC2
Customer:: Sony Electronics
Test Mode: 802.11n40 @ 5230 MHz
ANT Orientation: H
EUT Orientation: H
Test Engineer: Chris
Voltage: AC Adaptor
Comments:

SWEEP TABLE: "FCC 15.407 26.5-40G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
26.5 GHz	40.0 GHz	MaxPeak	Coupled	1 MHz	Horn # 3116_18-40G

Marker: 35.400801603 GHz 34.7 dB μ V/m

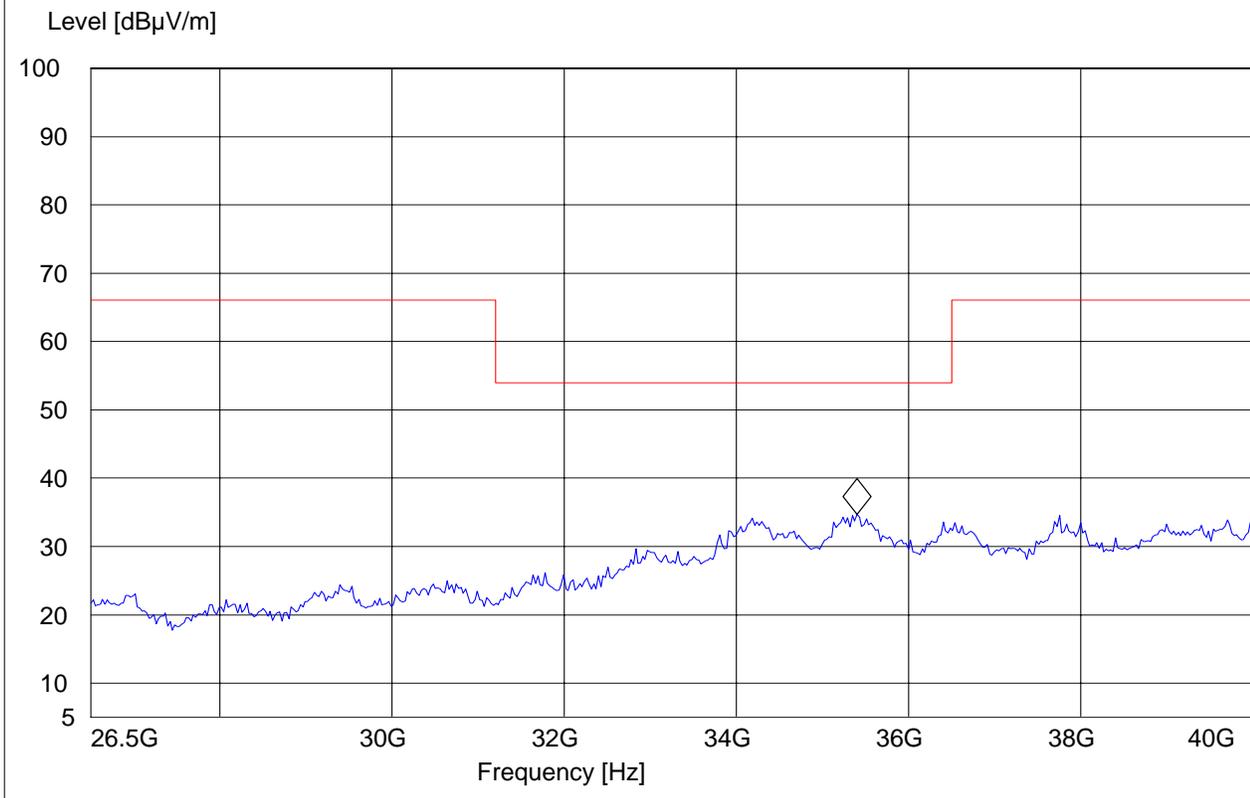



6.2.3 Sub-band 2 802.11n HT40 MODE

Emissions reported here represent the worse case emission for 802.11a, n20 and n40 mode.


30MHz – 1GHz, Antenna: Vertical

Note: This plot is valid for low, mid, high channels (worst-case plot).

EUT: FCC2
Customer:: Sony Electronics
Test Mode: 802.11n40
ANT Orientation: V
EUT Orientation: H
Test Engineer: Chris
Voltage: AC Adaptor
Comments:

SWEEP TABLE: "FCC15.247_30M-1G_Ver"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	3141-#1186_Vert

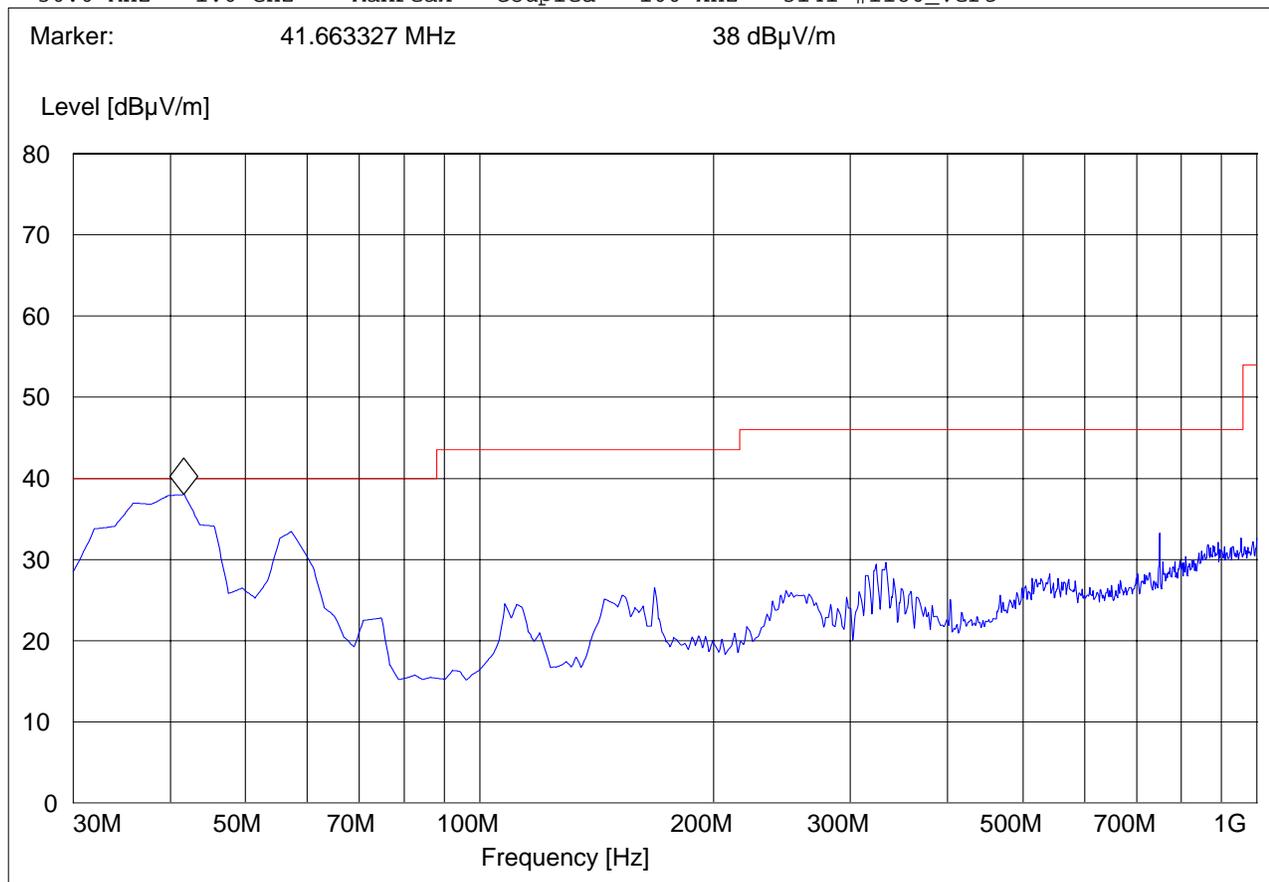




30MHz – 1GHz, Antenna: Horizontal

Note: This plot is valid for low, mid, high channels (worst-case plot).

EUT: FCC2
Customer:: Sony Electronics
Test Mode: 802.11n40
ANT Orientation: H
EUT Orientation: H
Test Engineer: Chris
Voltage: AC Adaptor
Comments:

SWEEP TABLE: "FCC15.247_30M-1G_Hor"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	3141-#1186_Horz

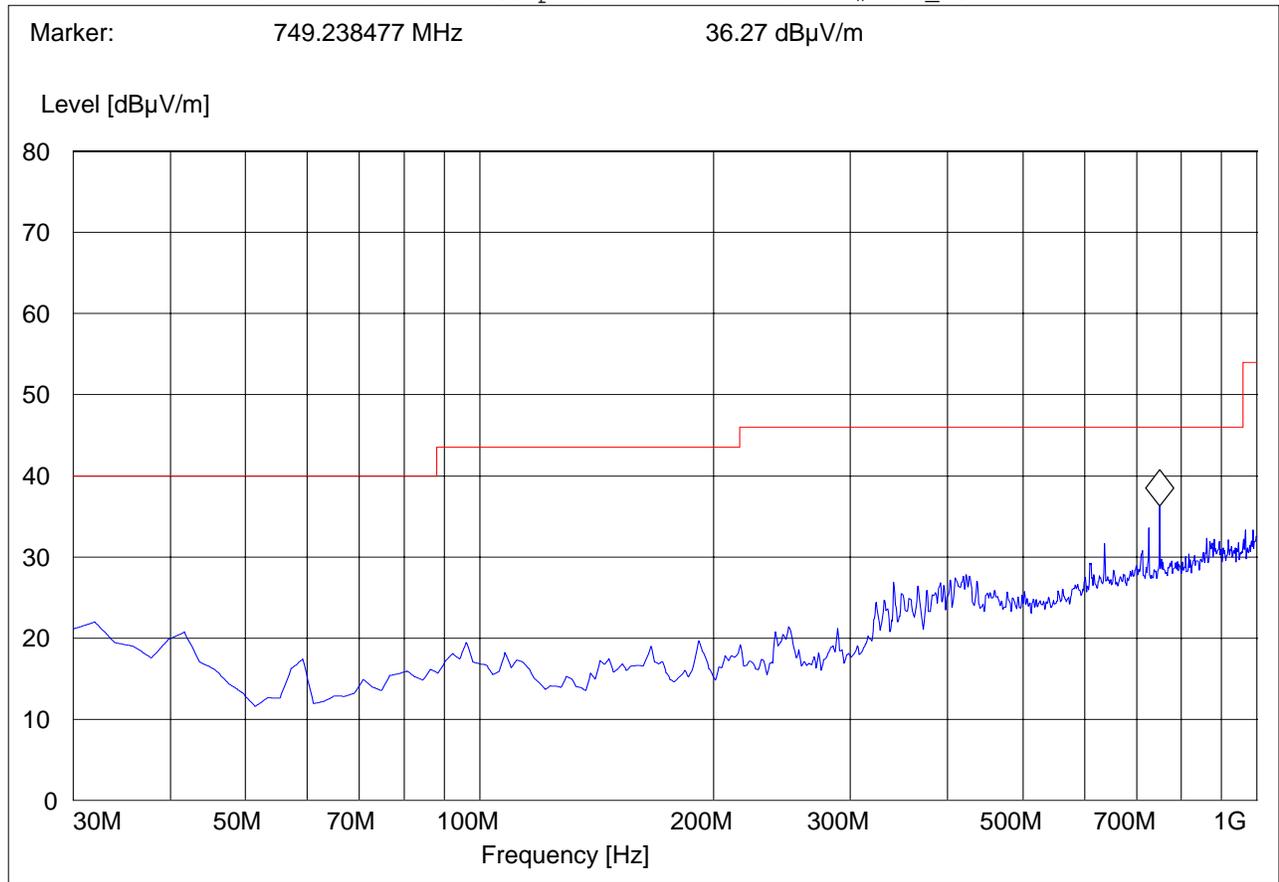



1-7GHz (5270MHz)

Note: The peak above the limit line is the carrier freq.


Note: Peak Reading vs. Average limit

EUT: FCC2
Customer:: Sony Electronics
Test Mode: 802.11n40 @ 5270 MHz
ANT Orientation: H
EUT Orientation: H
Test Engineer: Chris
Voltage: AC Adaptor
Comments:

SWEEP TABLE: "FCC 15.407 1-7G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	7.0 GHz	MaxPeak	Coupled	1 MHz	#35114 Horn

Marker: 5.268537074 GHz 97.05 dBµV/m

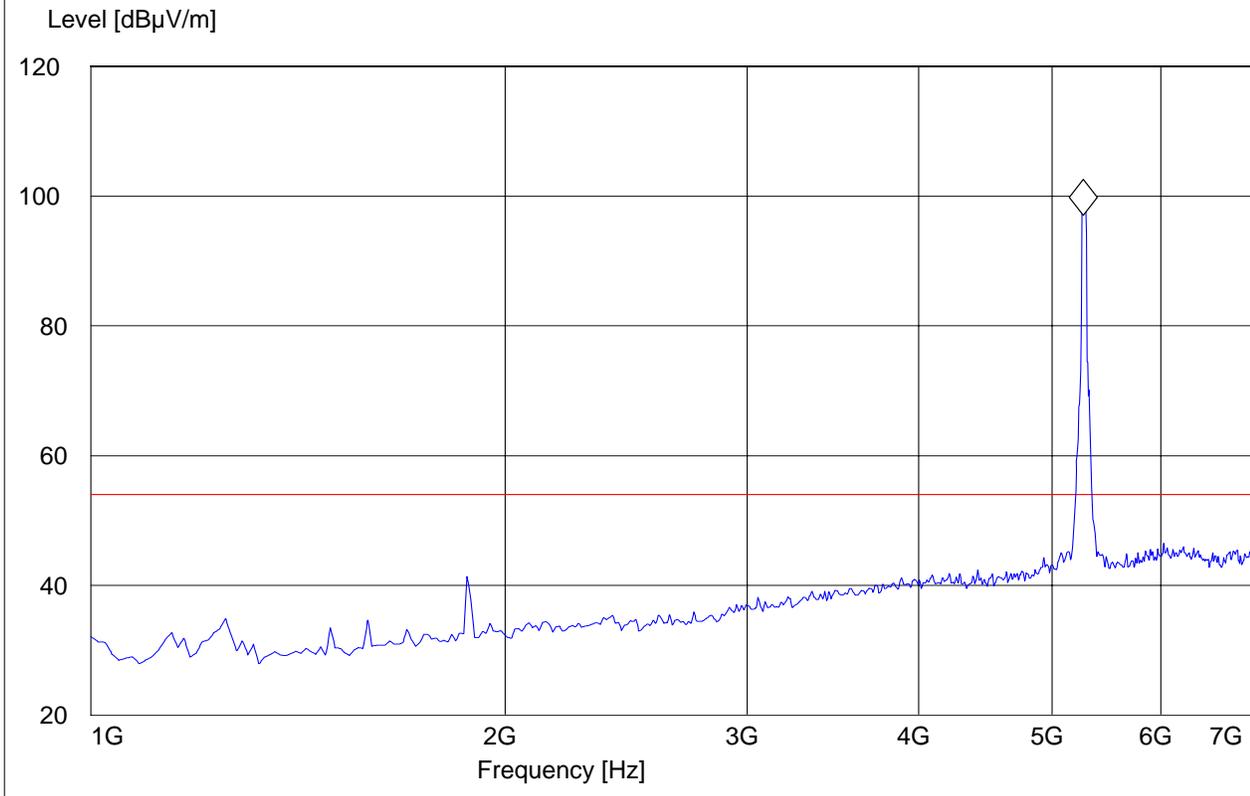



1-7GHz (5310MHz)

Note: The peak above the limit line is the carrier freq.


Note: Peak Reading vs. Average limit

EUT: FCC2
Customer:: Sony Electronics
Test Mode: 802.11n40 @ 5310 MHz
ANT Orientation: H
EUT Orientation: H
Test Engineer: Chris
Voltage: AC Adaptor
Comments:

SWEEP TABLE: "FCC 15.407 1-7G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	7.0 GHz	MaxPeak	Coupled	1 MHz	#35114 Horn

Marker: 5.316633267 GHz 94.49 dB μ V/m

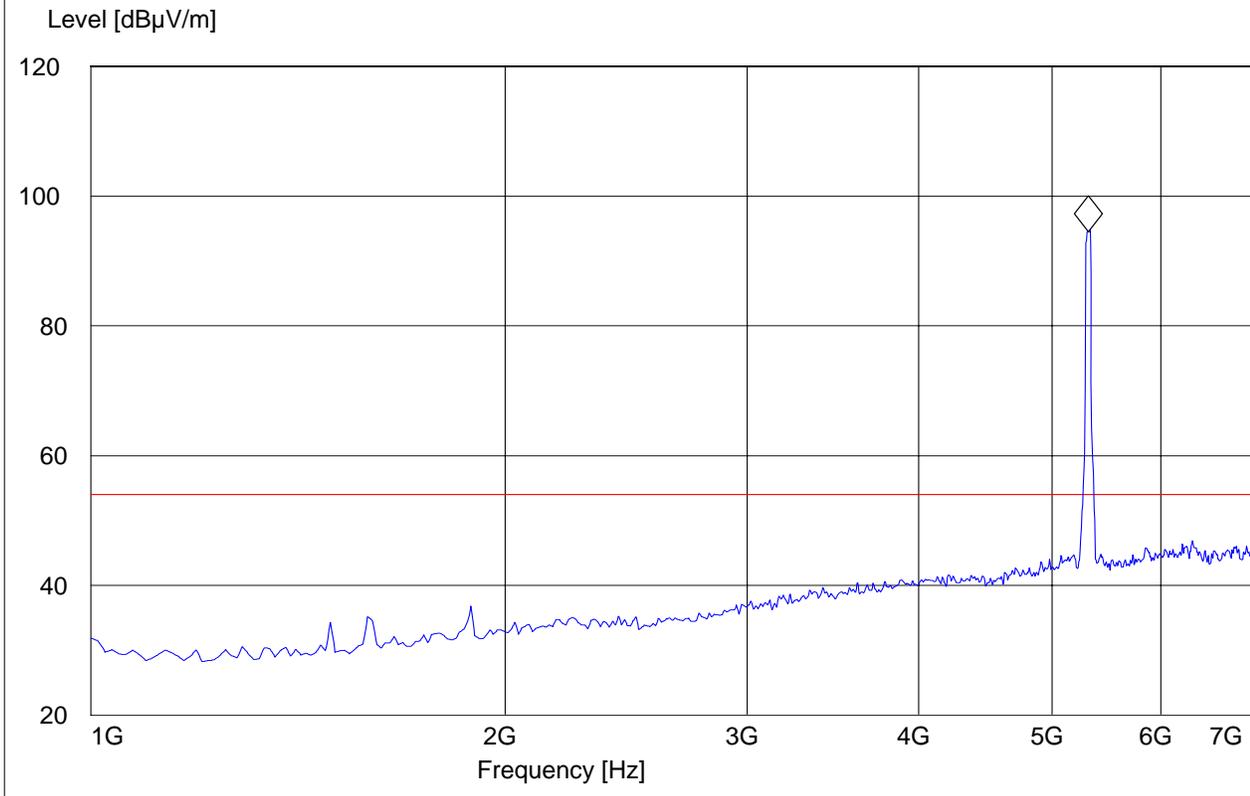



7-18GHz (5270MHz)


Note: Peak Reading vs. Average limit

EUT: FCC2
Customer:: Sony Electronics
Test Mode: 802.11n40 @ 5270 MHz
ANT Orientation: H
EUT Orientation: H
Test Engineer: Chris
Voltage: AC Adaptor
Comments:

SWEEP TABLE: "FCC 15.407 7-18G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	18.0 GHz	MaxPeak	1.0 s	1 MHz	#326horn_AF_horz

Marker: 17.182364729 GHz 46.79 dBµV/m

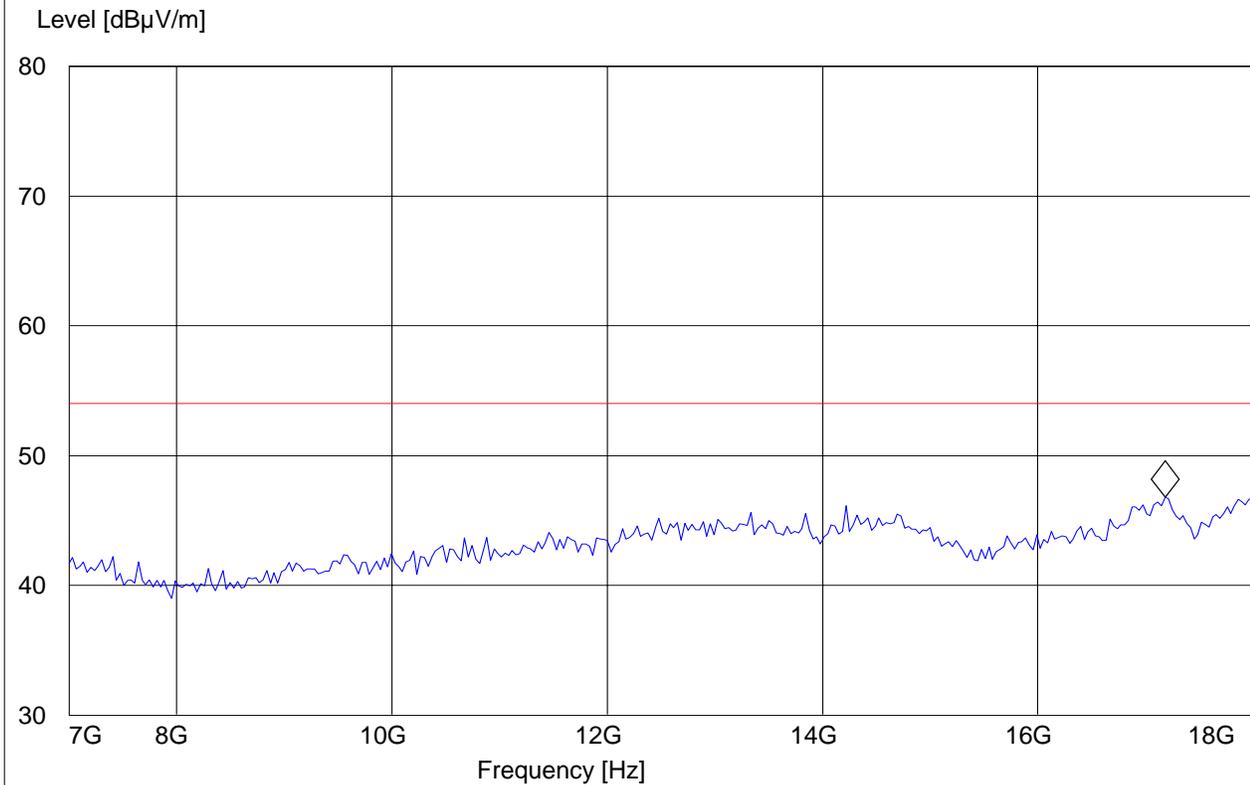




7-18GHz (5310MHz)

Note: Peak Reading vs. Average limit

EUT: FCC2
Customer:: Sony Electronics
Test Mode: 802.11n40 @ 5310 MHz
ANT Orientation: H
EUT Orientation: H
Test Engineer: Chris
Voltage: AC Adaptor
Comments:

SWEEP TABLE: "FCC 15.407 7-18G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	18.0 GHz	MaxPeak	1.0 s	1 MHz	#326horn_AF_horz

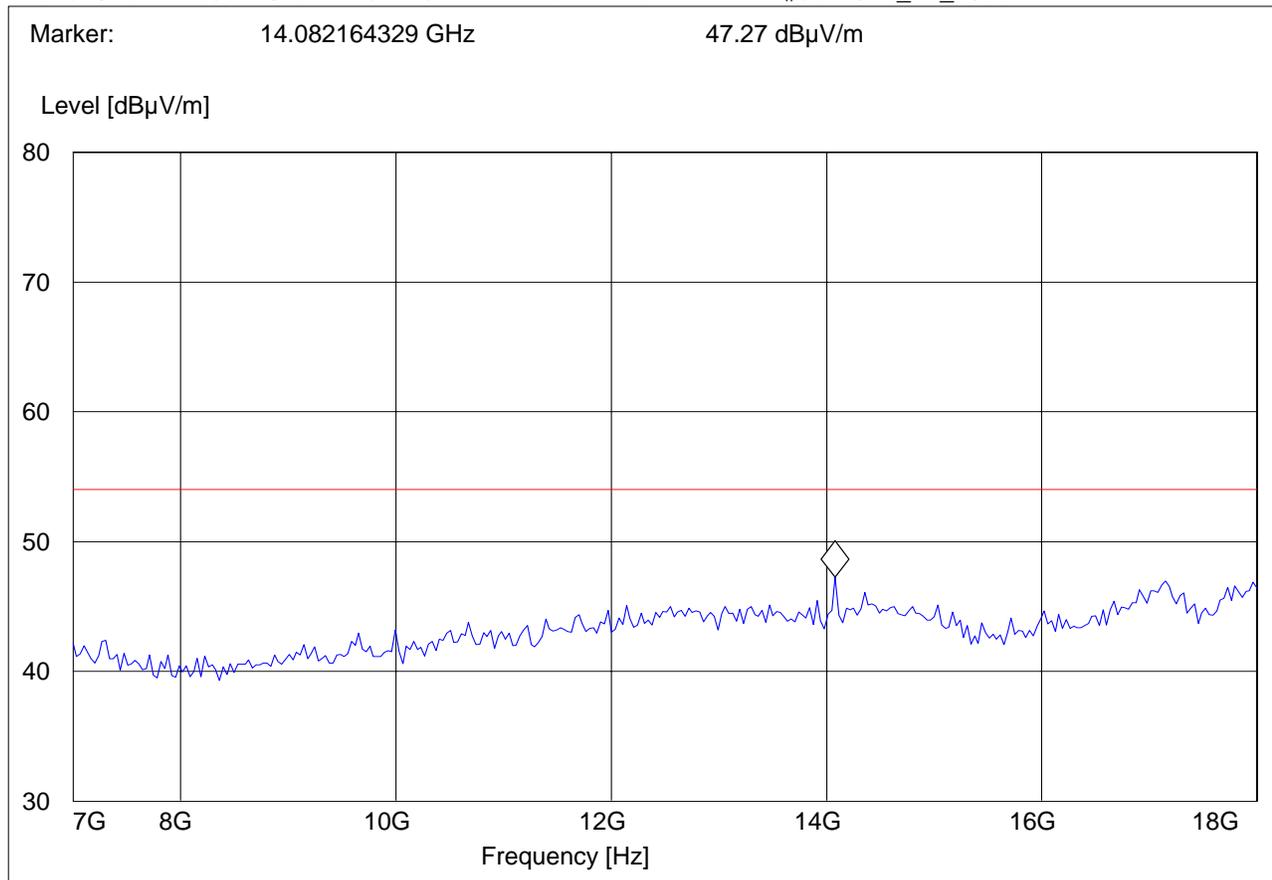




18-26.5GHz (5270MHz)

Note: Peak Reading vs. Average limit

EUT: FCC2
Customer:: Sony Electronics
Test Mode: 802.11n40 @ 5270 MHz
ANT Orientation: H
EUT Orientation: H
Test Engineer: Chris
Voltage: AC Adaptor
Comments:

SWEEP TABLE: "FCC 15.407 18-26.5G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
18.0 GHz	26.5 GHz	MaxPeak	Coupled	1 MHz	Horn # 3116_18-40G

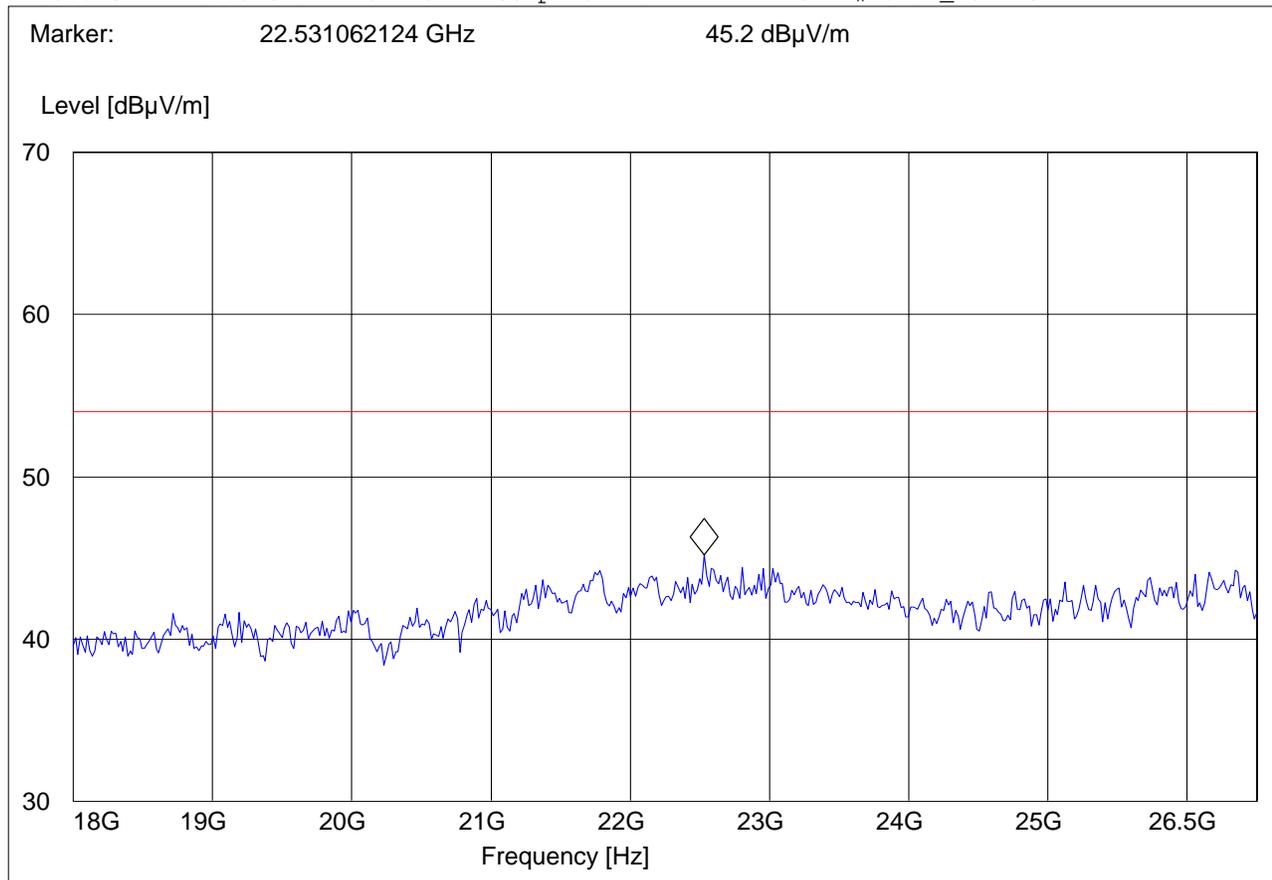




18-26.5GHz (5310MHz) Note: Peak Reading vs. Average limit

EUT: FCC2
Customer:: Sony Electronics
Test Mode: 802.11n40 @ 5310 MHz
ANT Orientation: H
EUT Orientation: H
Test Engineer: Chris
Voltage: AC Adaptor
Comments:

SWEEP TABLE: "FCC 15.407 18-26.5G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
18.0 GHz	26.5 GHz	MaxPeak	Coupled	1 MHz	Horn # 3116_18-40G

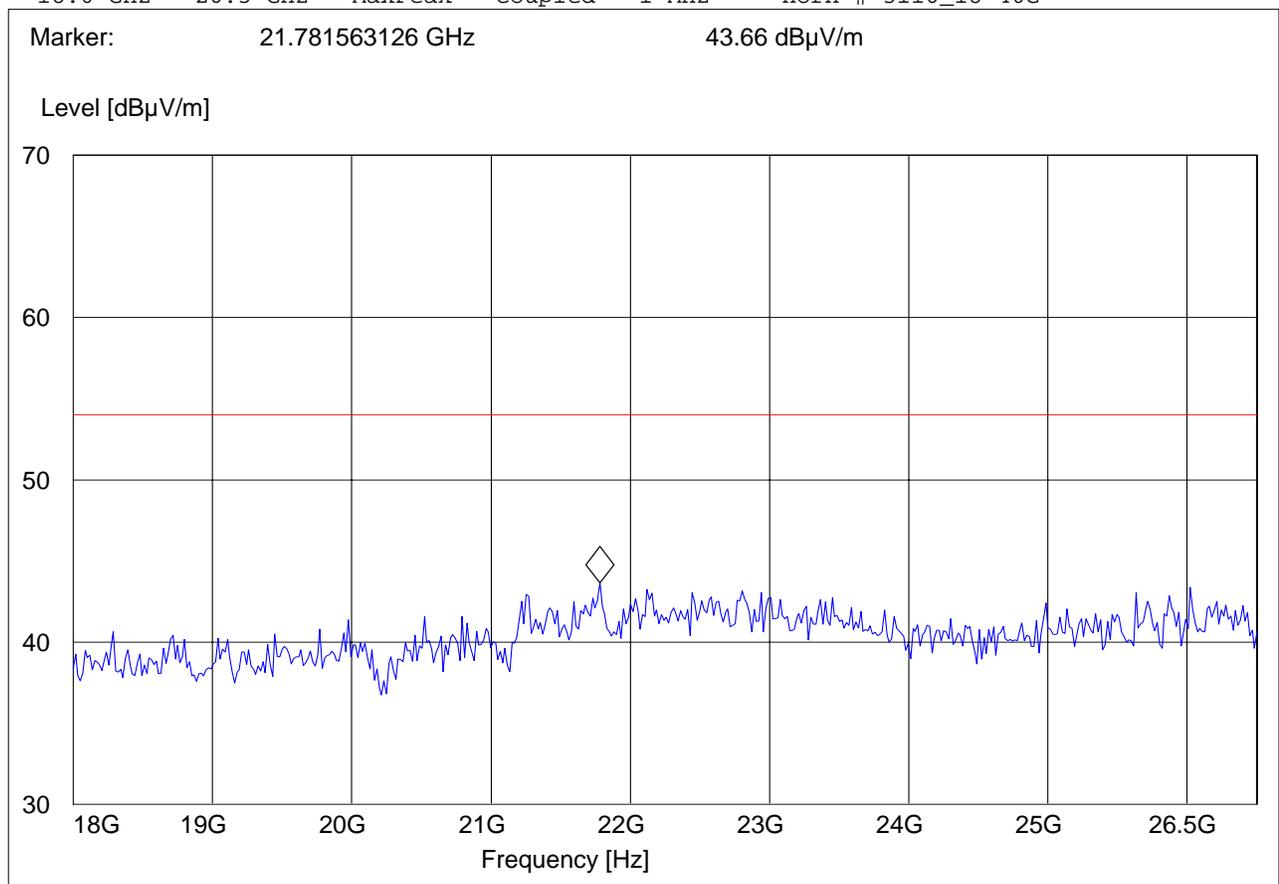



26.5-40GHz

Note: This plot is valid for low, mid, high channels (worst-case plot)


Note: Peak Reading vs. Average limit

EUT: FCC2
Customer:: Sony Electronics
Test Mode: 802.11n40 @ 5310 MHz
ANT Orientation: H
EUT Orientation: H
Test Engineer: Chris
Voltage: AC Adaptor
Comments:

SWEEP TABLE: "FCC 15.407 26.5-40G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
26.5 GHz	40.0 GHz	MaxPeak	Coupled	1 MHz	Horn # 3116_18-40G

Marker: 35.211422846 GHz 34.21 dBµV/m

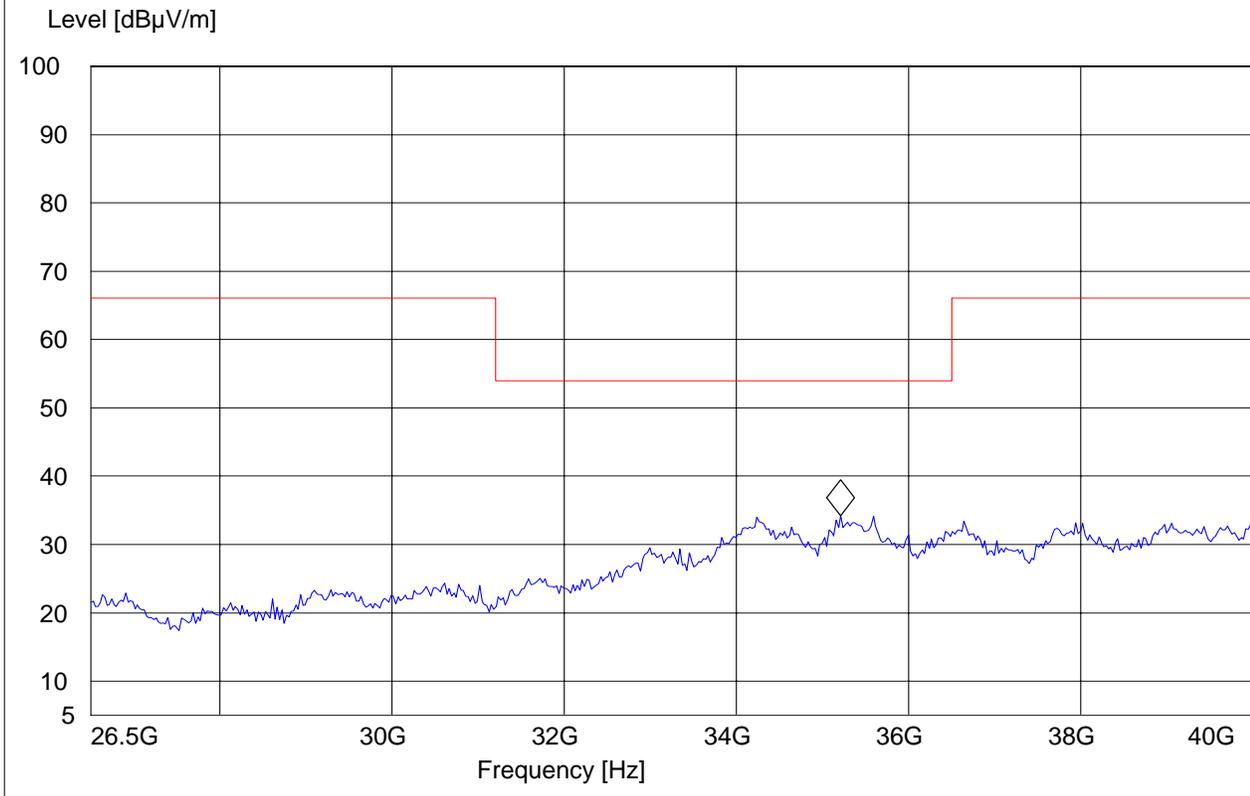



6.2.4 Sub-band 3 802.11n HT40 MODE

Emissions reported here represent the worse case emission for 802.11a, n20 and n40 mode.


30MHz – 1GHz, Antenna: Vertical

Note: This plot is valid for low, mid, high channels (worst-case plot).

EUT: FCC2
Customer:: Sony Electronics
Test Mode: 802.11n40
ANT Orientation: V
EUT Orientation: H
Test Engineer: Chris
Voltage: AC Adaptor
Comments:

SWEEP TABLE: "FCC15.247_30M-1G_Ver"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	3141-#1186_Vert

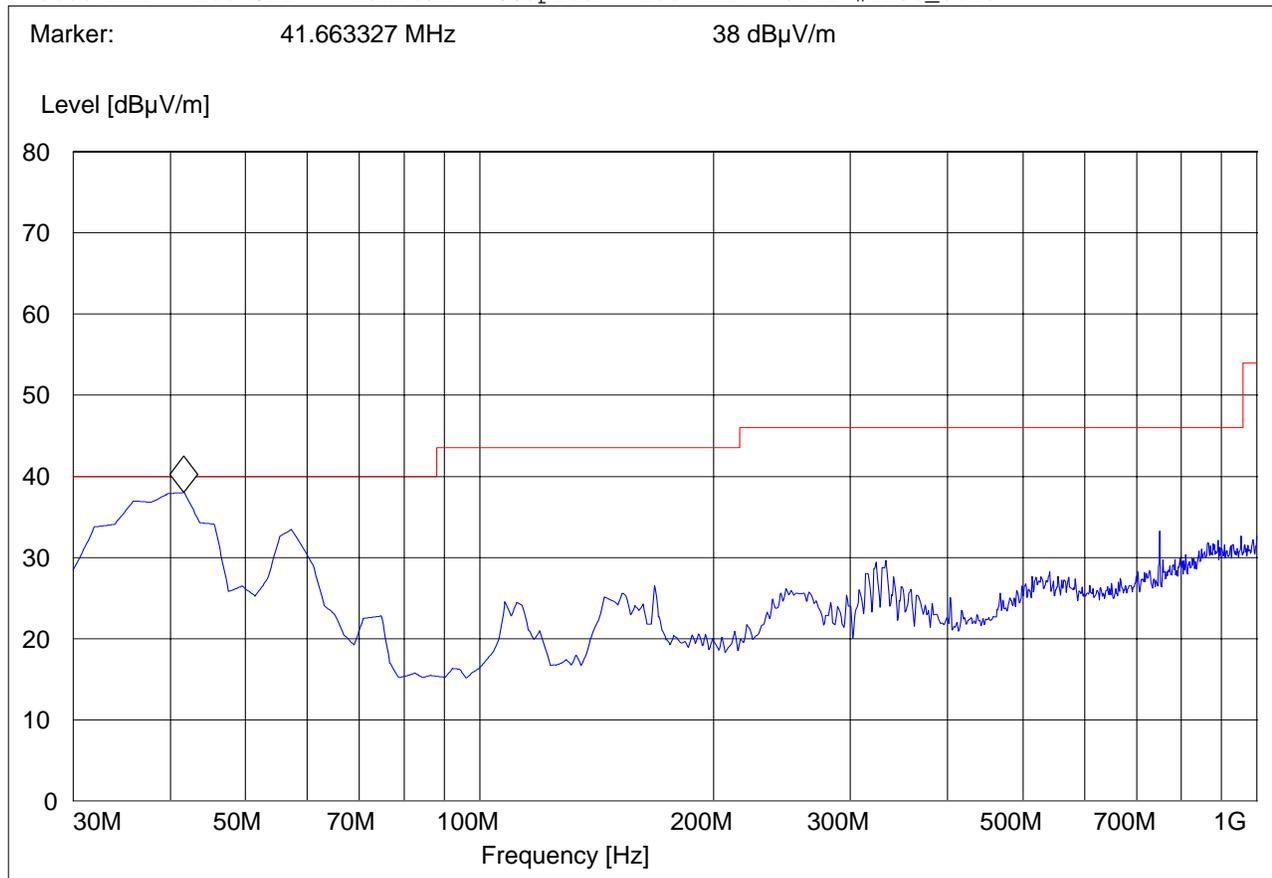




30MHz – 1GHz, Antenna: Horizontal

Note: This plot is valid for low, mid, high channels (worst-case plot).

EUT: FCC2
Customer:: Sony Electronics
Test Mode: 802.11n40
ANT Orientation: H
EUT Orientation: H
Test Engineer: Chris
Voltage: AC Adaptor
Comments:

SWEEP TABLE: "FCC15.247_30M-1G_Hor"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	3141-#1186_Horz

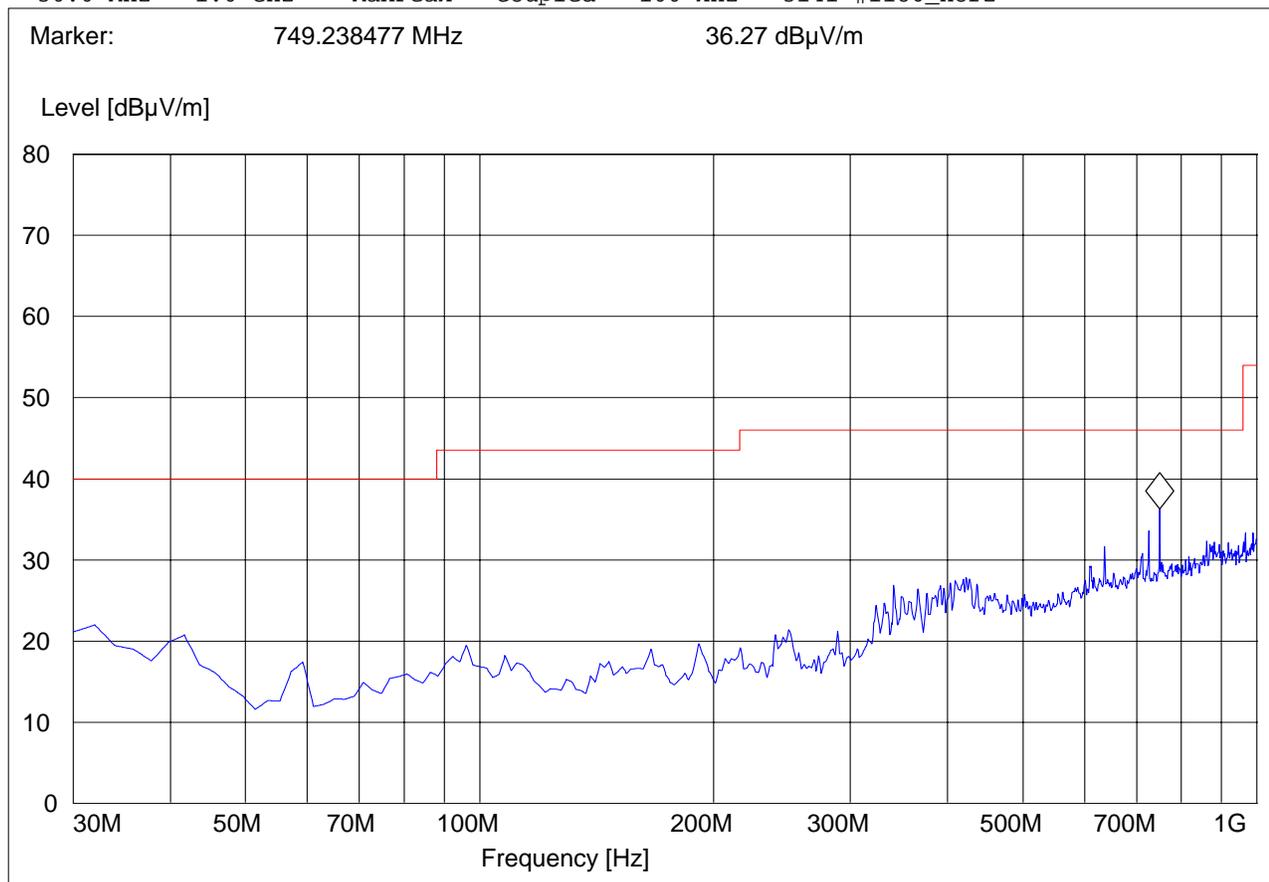



1-7GHz (5510MHz)

Note: The peak above the limit line is the carrier freq.


Note: Peak Reading vs. Average limit

EUT: FCC2
Customer:: Sony Electronics
Test Mode: 802.11n40 @ 5510 MHz
ANT Orientation: H
EUT Orientation: H
Test Engineer: Chris
Voltage: AC Adapter
Comments:

SWEEP TABLE: "FCC 15.407 1-7G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	7.0 GHz	MaxPeak	Coupled	1 MHz	#35114 Horn

Marker: 5.509018036 GHz 92.59 dBµV/m

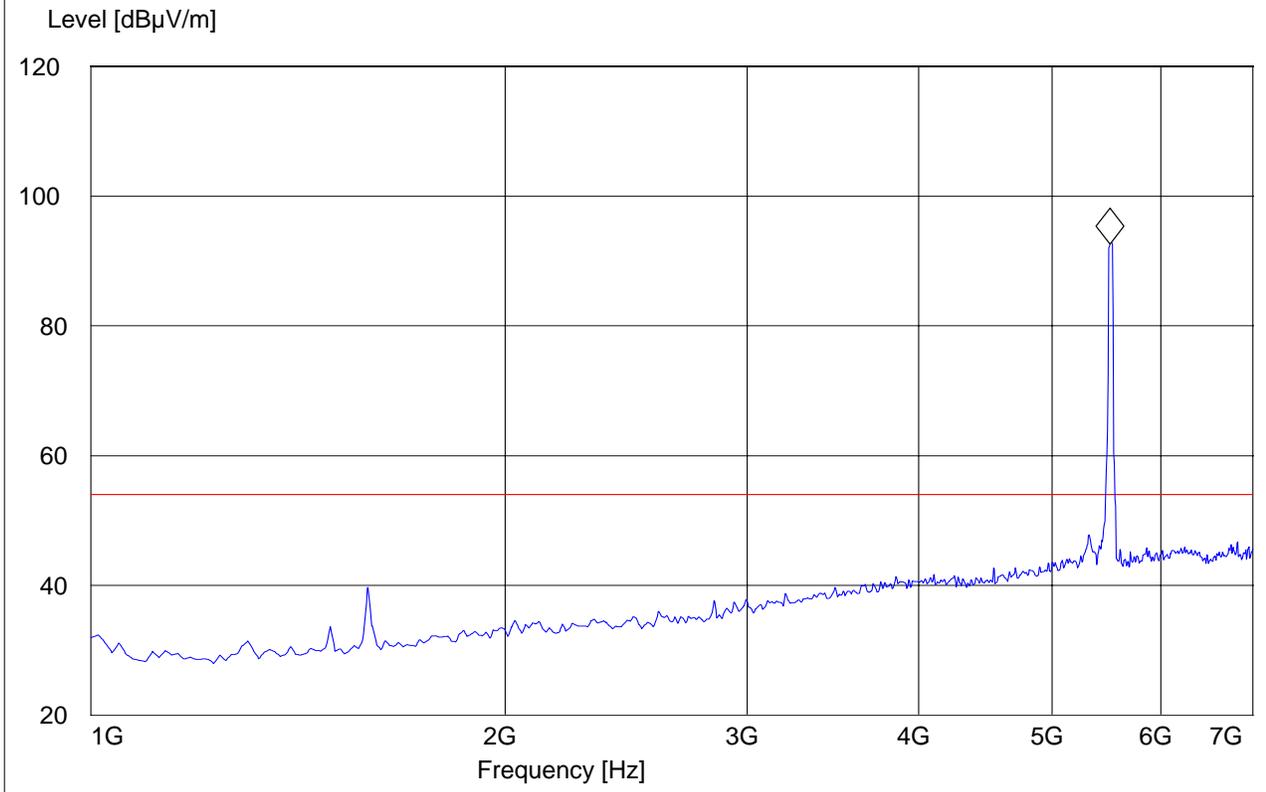



1-7GHz (5590MHz)

Note: The peak above the limit line is the carrier freq.


Note: Peak Reading vs. Average limit

EUT: FCC2
Customer:: Sony Electronics
Test Mode: 802.11n40 @ 5590 MHz
ANT Orientation: H
EUT Orientation: H
Test Engineer: Chris
Voltage: AC Adaptor
Comments:

SWEEP TABLE: "FCC 15.407 1-7G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	7.0 GHz	MaxPeak	Coupled	1 MHz	#35114 Horn

Marker: 5.593186373 GHz 96.56 dB μ V/m

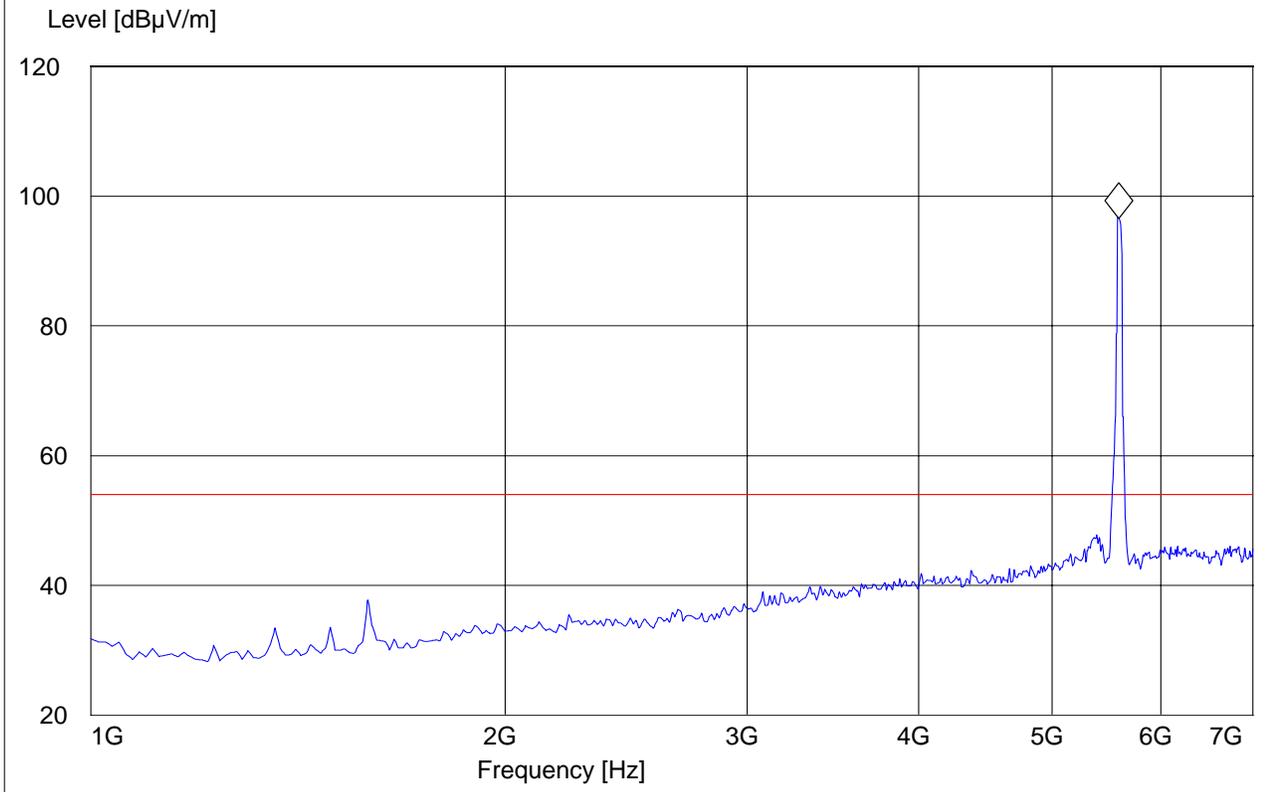



1-7GHz (5670MHz)

Note: The peak above the limit line is the carrier freq.


Note: Peak Reading vs. Average limit

EUT: FCC2
Customer:: Sony Electronics
Test Mode: 802.11n40 @ 5670 MHz
ANT Orientation: H
EUT Orientation: H
Test Engineer: Chris
Voltage: AC Adaptor
Comments:

SWEEP TABLE: "FCC 15.407 1-7G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	7.0 GHz	MaxPeak	Coupled	1 MHz	#35114 Horn

Marker: 5.677354709 GHz 94.25 dB μ V/m

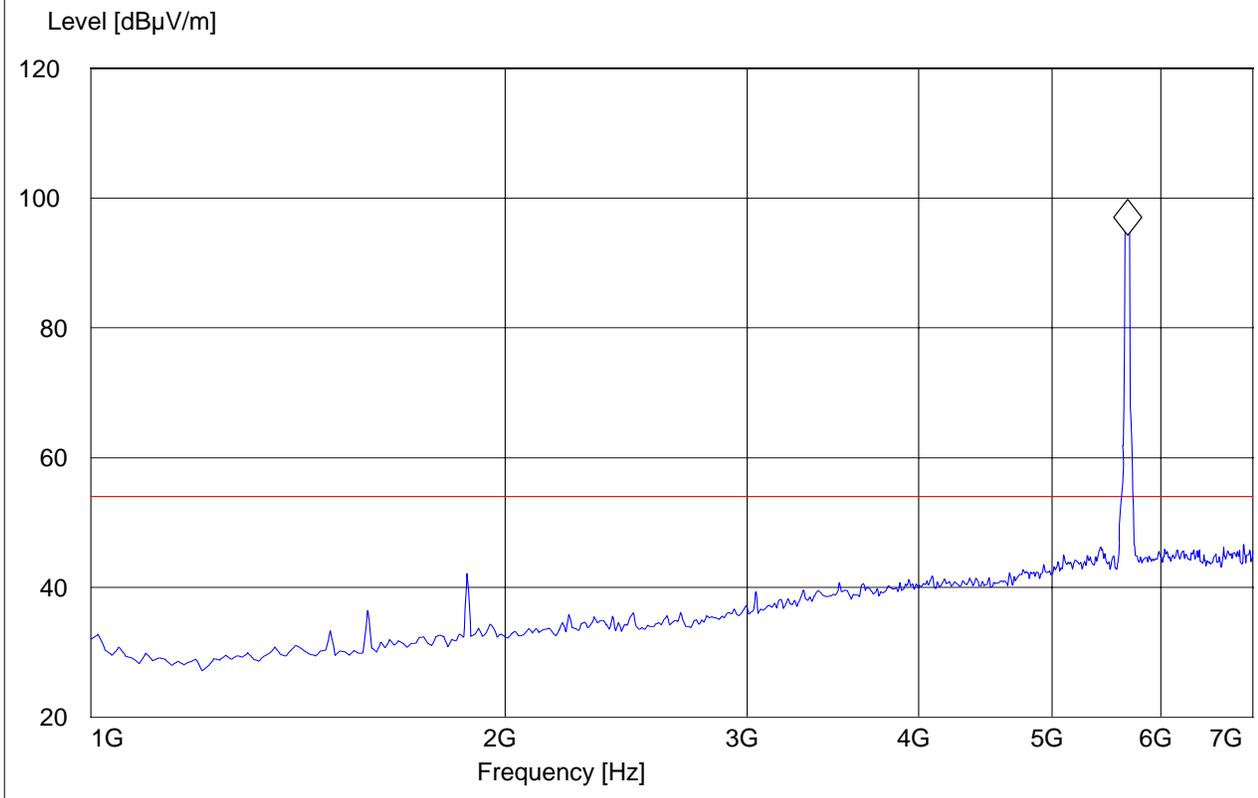




7-18GHz (5510MHz)

Note: Peak Reading vs. Average limit

EUT: FCC2
Customer:: Sony Electronics
Test Mode: 802.11n40 @ 5510 MHz
ANT Orientation: H
EUT Orientation: H
Test Engineer: Chris
Voltage: AC Adaptor
Comments:

SWEEP TABLE: "FCC 15.407 7-18G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	18.0 GHz	MaxPeak	1.0 s	1 MHz	#326horn_AF_horz

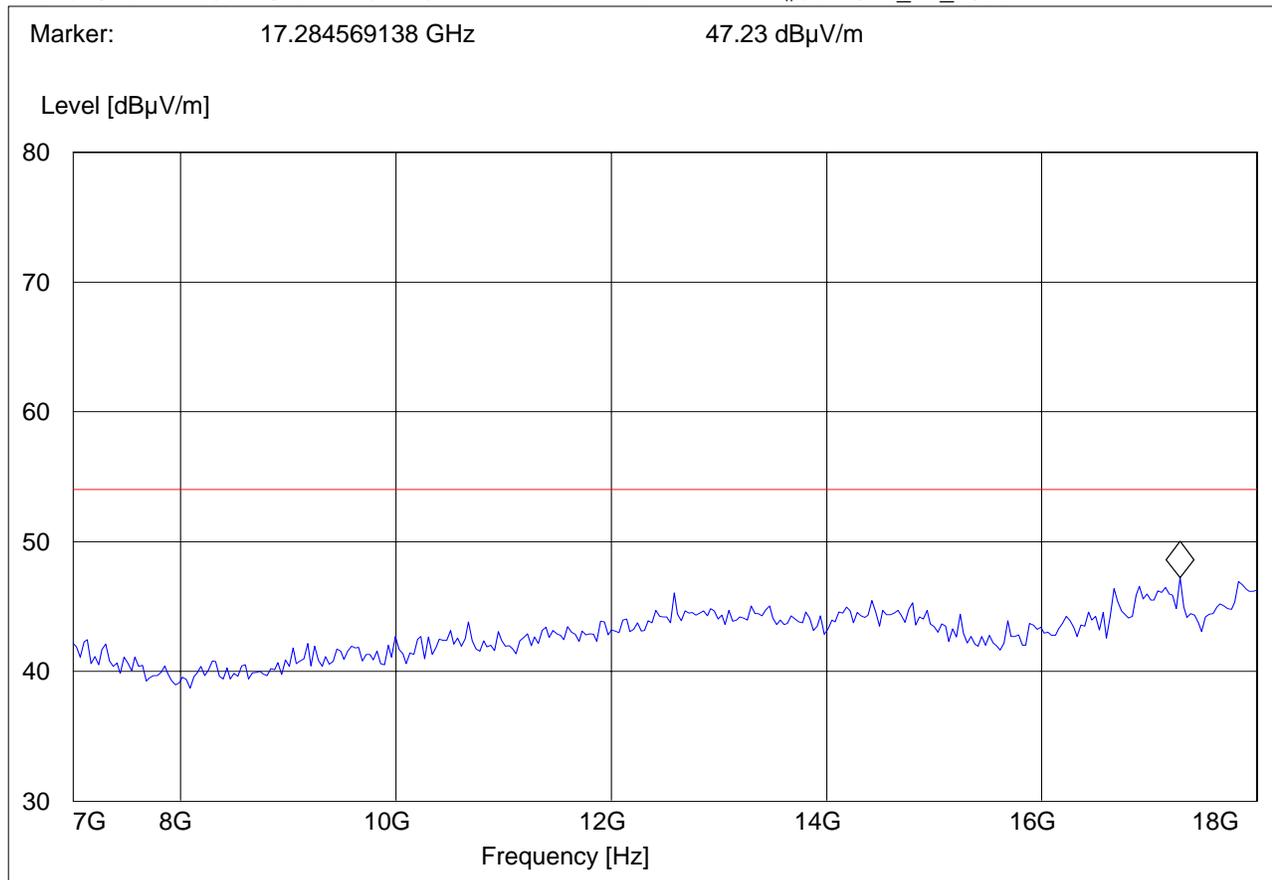




7-18GHz (5590MHz)

Note: Peak Reading vs. Average limit

EUT: FCC2
Customer:: Sony Electronics
Test Mode: 802.11n40 @ 5590 MHz
ANT Orientation: H
EUT Orientation: H
Test Engineer: Chris
Voltage: AC Adaptor
Comments:

SWEEP TABLE: "FCC 15.407 7-18G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	18.0 GHz	MaxPeak	1.0 s	1 MHz	#326horn_AF_horz

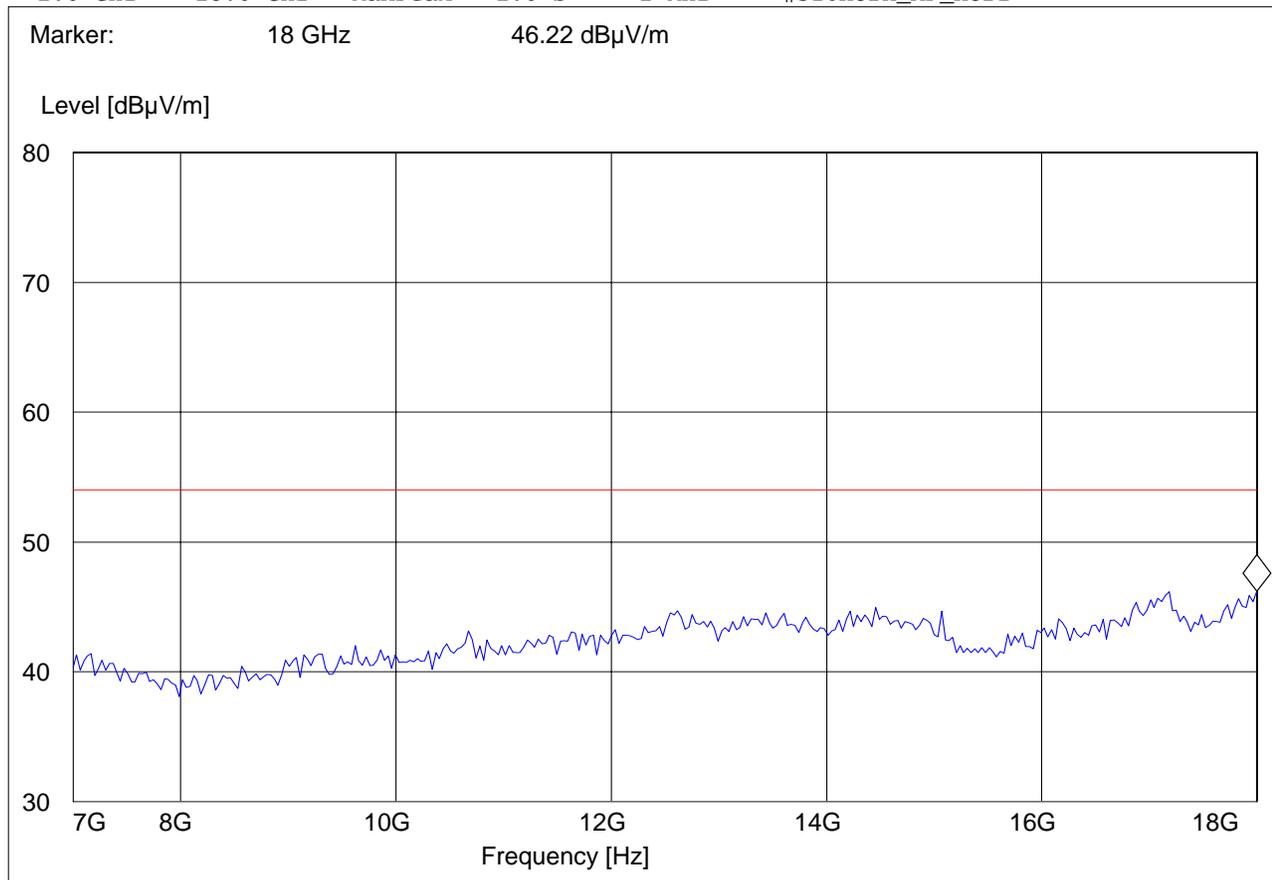



7-18GHz (5670MHz)


Note: Peak Reading vs. Average limit

EUT: FCC2
Customer:: Sony Electronics
Test Mode: 802.11n40 @ 5670 MHz
ANT Orientation: H
EUT Orientation: H
Test Engineer: Chris
Voltage: AC Adaptor
Comments:

SWEEP TABLE: "FCC 15.407 7-18G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	18.0 GHz	MaxPeak	1.0 s	1 MHz	#326horn_AF_horz

Marker: 17.182364729 GHz 47.84 dBµV/m

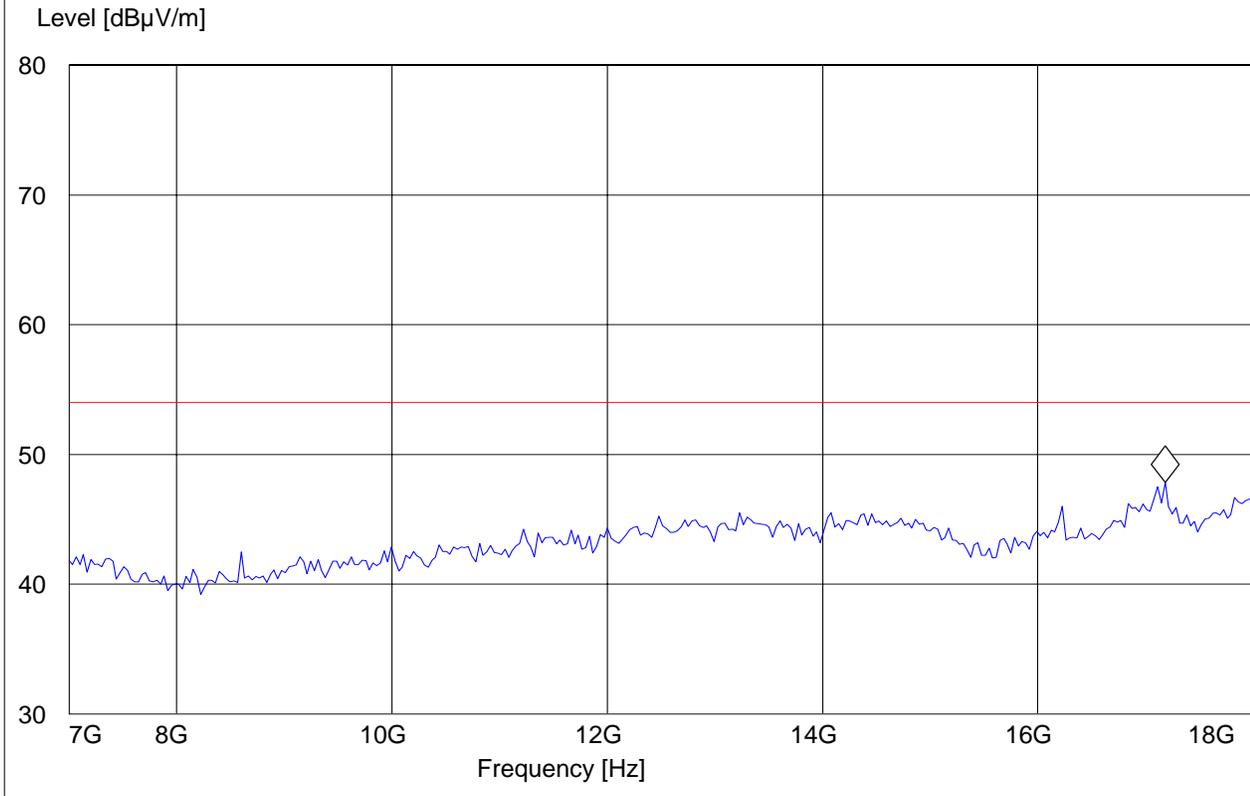



18-26.5GHz (5510MHz)

Note: Peak Reading vs. Average limit


EUT: FCC2
Customer:: Sony Electronics
Test Mode: 802.11n40 @ 5510 MHz
ANT Orientation: H
EUT Orientation: H
Test Engineer: Chris
Voltage: AC Adaptor
Comments:

SWEEP TABLE: "FCC 15.407 18-26.5G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
18.0 GHz	26.5 GHz	MaxPeak	Coupled	1 MHz	Horn # 3116_18-40G

Marker: 22.037074148 GHz 44.2 dBμV/m

Level [dBμV/m]

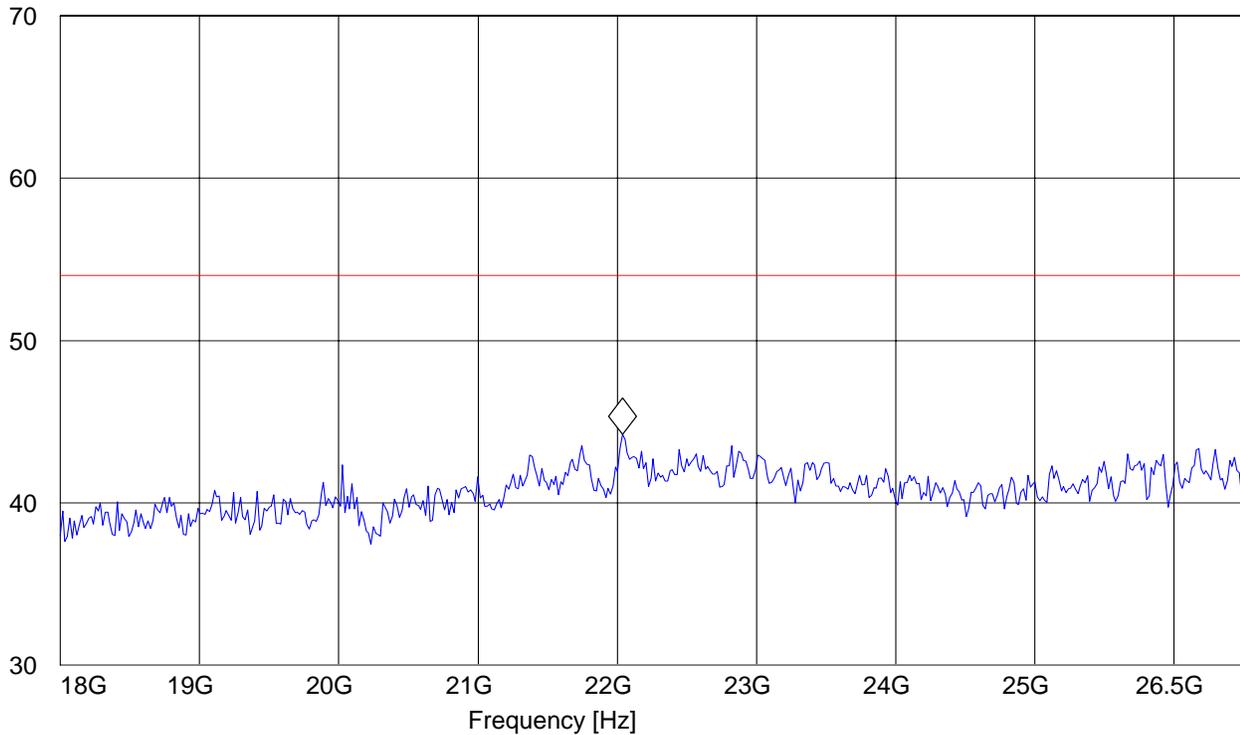




18-26.5GHz (5590MHz)

Note: Peak Reading vs. Average limit

EUT: FCC2
Customer:: Sony Electronics
Test Mode: 802.11n40 @ 5590 MHz
ANT Orientation: H
EUT Orientation: H
Test Engineer: Chris
Voltage: AC Adaptor
Comments:

SWEEP TABLE: "FCC 15.407 18-26.5G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
18.0 GHz	26.5 GHz	MaxPeak	Coupled	1 MHz	Horn # 3116_18-40G

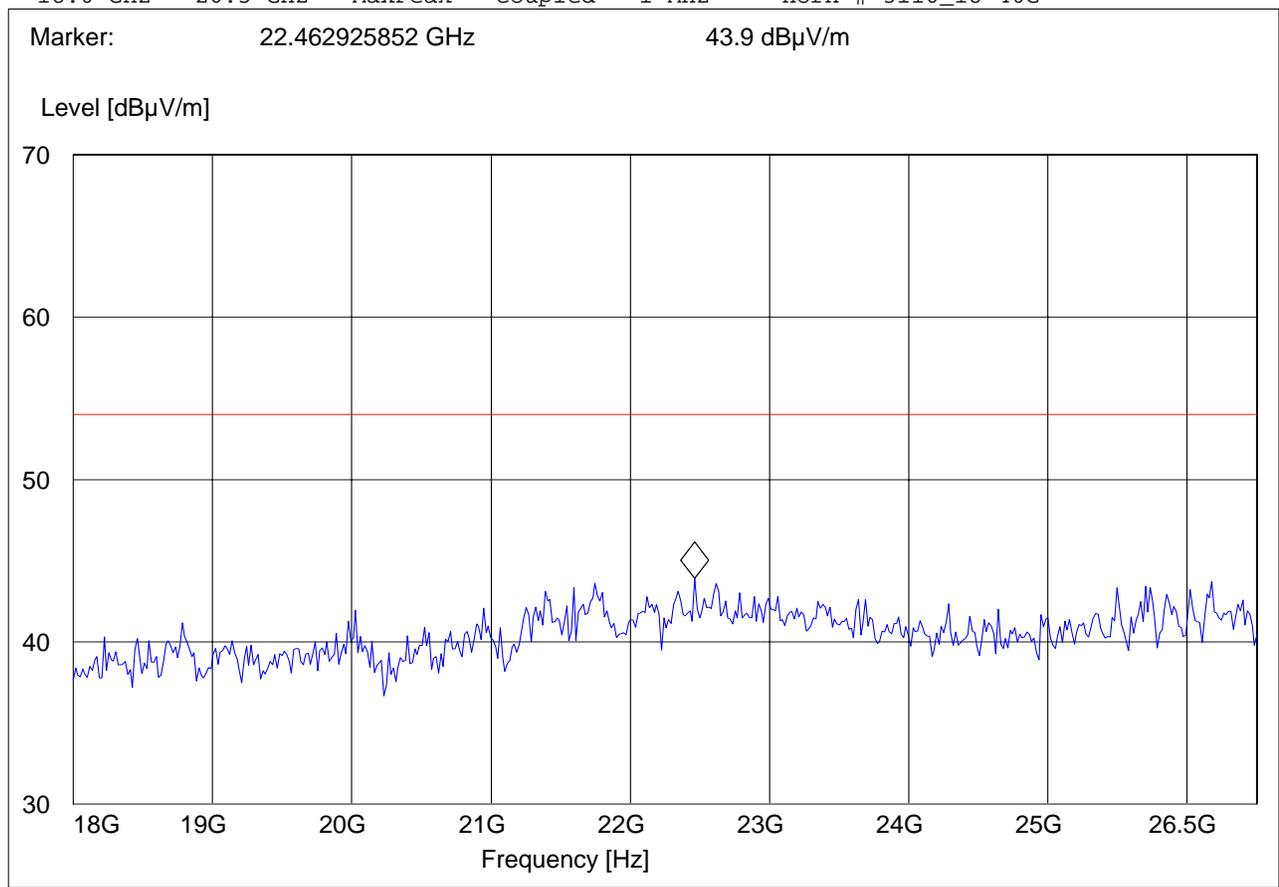



18-26.5GHz (5670MHz)

Note: Peak Reading vs. Average limit


EUT: FCC2
Customer:: Sony Electronics
Test Mode: 802.11n40 @ 5670 MHz
ANT Orientation: H
EUT Orientation: H
Test Engineer: Chris
Voltage: AC Adaptor
Comments:

SWEEP TABLE: "FCC 15.407 18-26.5G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
18.0 GHz	26.5 GHz	MaxPeak	Coupled	1 MHz	Horn # 3116_18-40G

Marker: 22.462925852 GHz 43.9 dBμV/m

Level [dBμV/m]

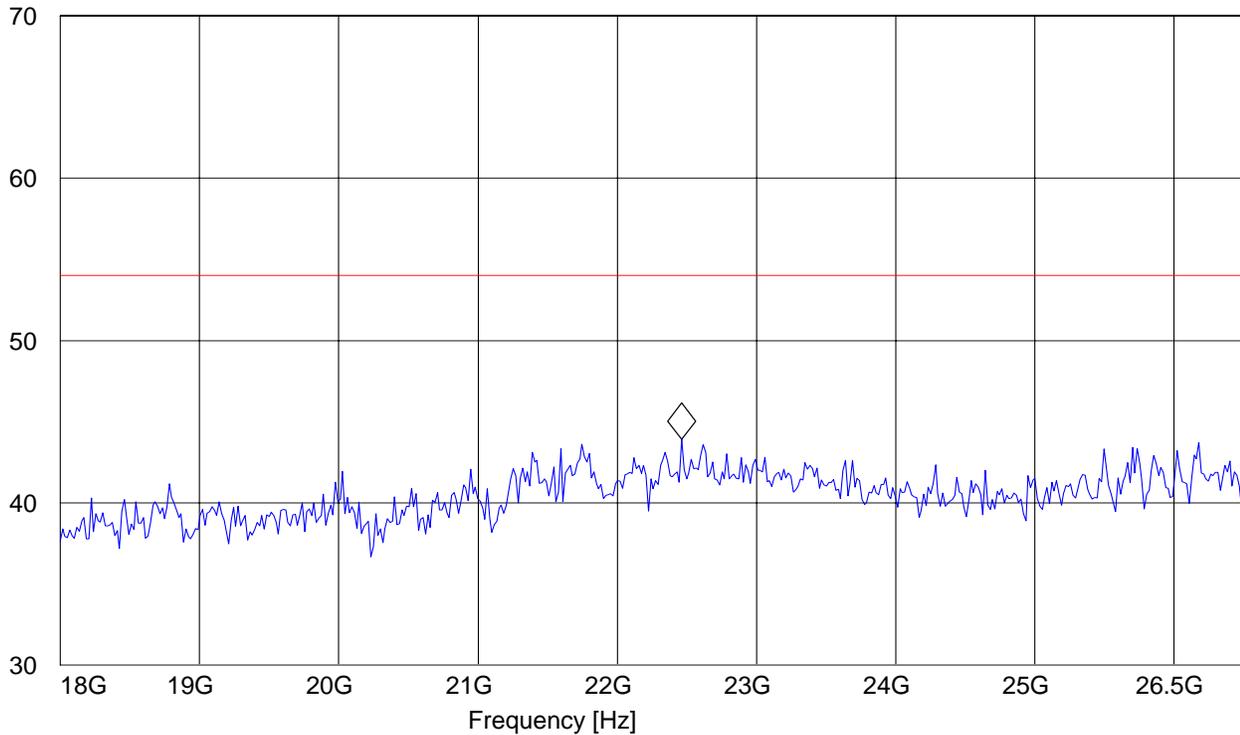



26.5-40GHz

Note: This plot is valid for low and high channels (worst-case plot)


Note: Peak Reading vs. Average limit

EUT: FCC2
Customer:: Sony Electronics
Test Mode: 802.11n40 @ 5510 MHz
ANT Orientation: H
EUT Orientation: H
Test Engineer: Chris
Voltage: AC Adaptor
Comments:

SWEEP TABLE: "FCC 15.407 26.5-40G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
26.5 GHz	40.0 GHz	MaxPeak	Coupled	1 MHz	Horn # 3116_18-40G

Marker: 35.536072144 GHz 34.08 dB μ V/m

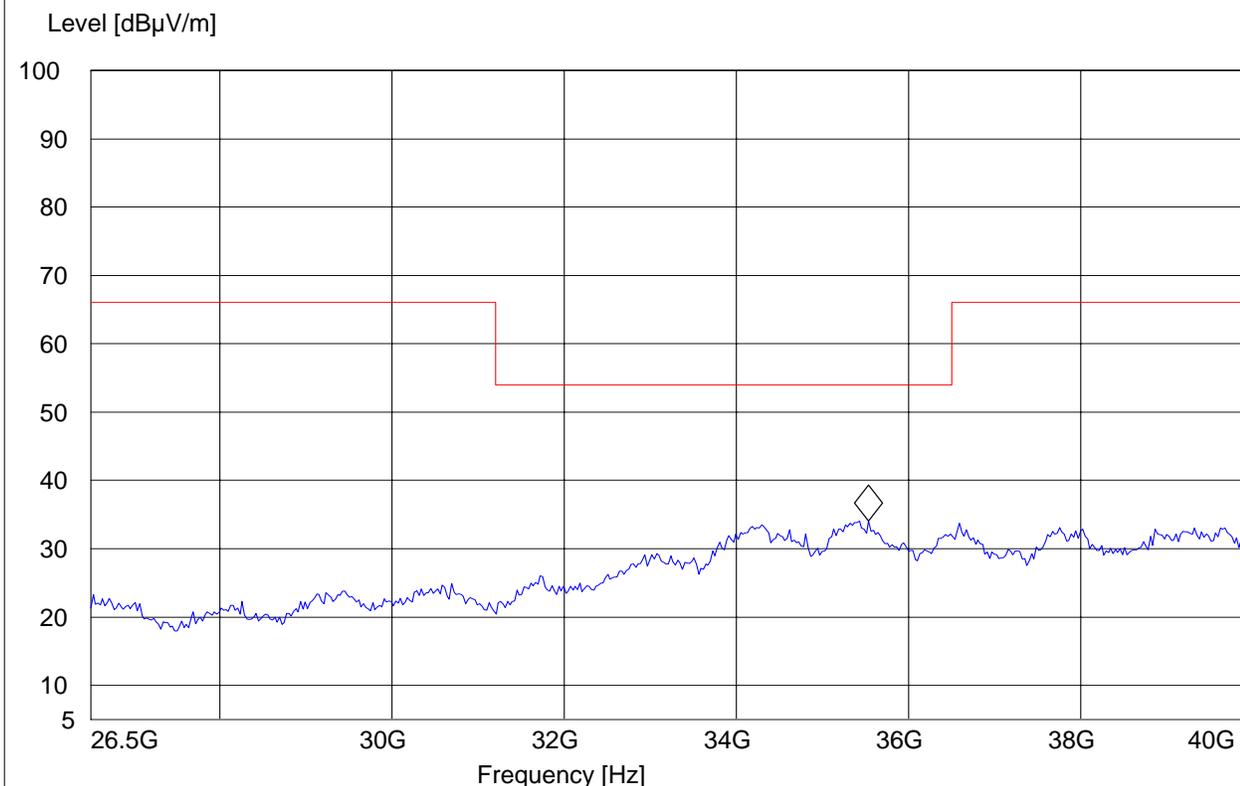

6.3 Receiver Spurious Emission § 15.209/RSS210

6.3.1 Limits

Frequency (MHz)	Field strength ($\mu\text{V/m}$)	Measurement distance (m)
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
above 960	500	3

NOTE:

1. The radiated emissions were done with different settings, using the relevant pre-amplifiers for the relevant frequency ranges. This is the reason that the graphs show different noise levels. In the range between 3 and 25 GHz very short cable connections to the antenna was used to minimize the noise level.
2. All measurements are done in peak mode using an average limit unless specified with the plots.
3. There are no measurable emissions above 18GHz in Rx mode.



6.3.2 802.11n HT40 MODE

Emissions reported here represent the worse case emission for 802.11a, n20 and n40 mode.


30MHz – 1GHz, Antenna: Vertical

Note: This plot is valid for low, mid, high channels (worst-case plot).

EUT: FCC2
Customer:: Sony Electronics
Test Mode: 802.11n40 Rx
ANT Orientation: H
EUT Orientation: H
Test Engineer: Chris
Voltage: AC Adaptor
Comments:

SWEEP TABLE: "FCC15.247_30M-1G_Ver"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	3141-#1186_Vert

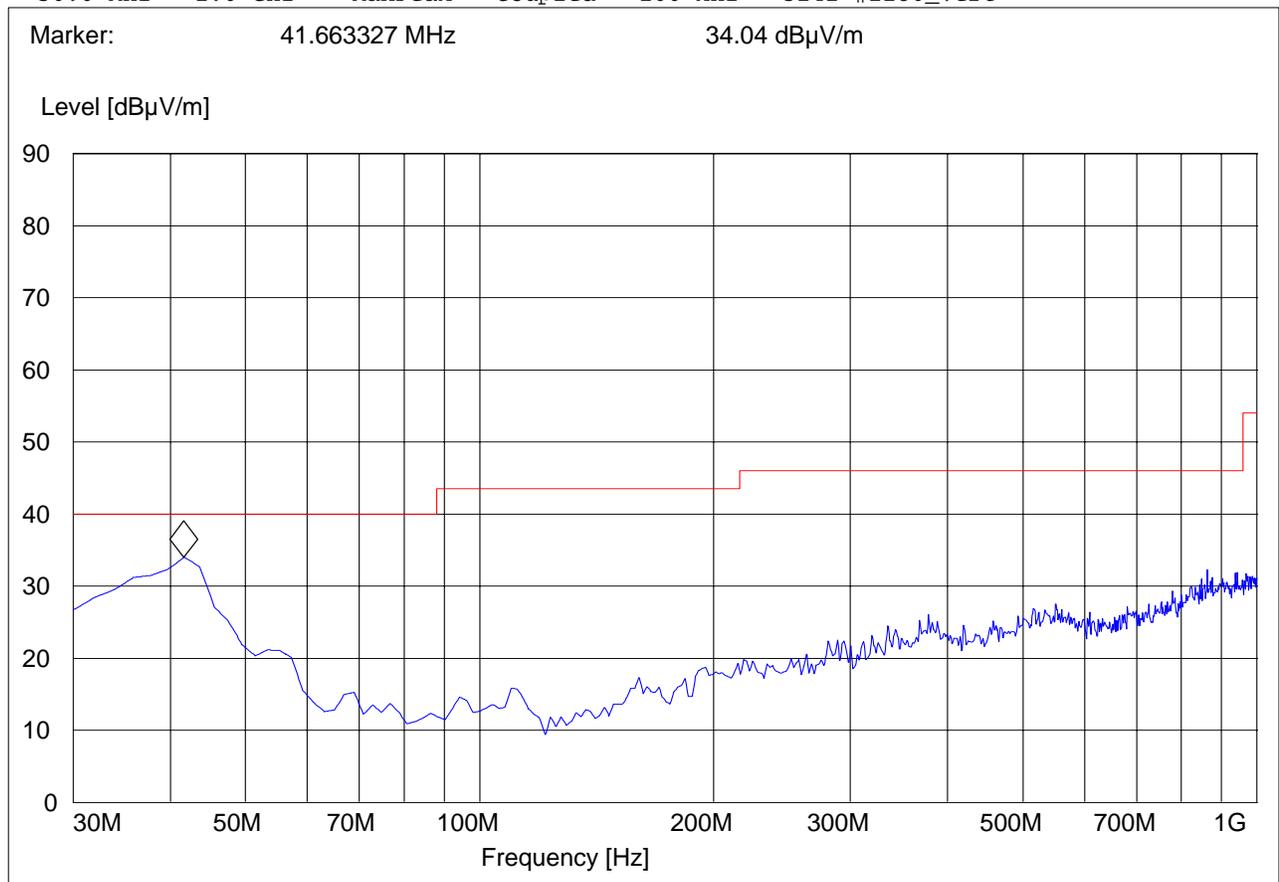



30MHz – 1GHz, Antenna: Horizontal


Note: This plot is valid for low, mid, high channels (worst-case plot).

EUT: FCC2
Customer:: Sony Electronics
Test Mode: 802.11n40 Rx
ANT Orientation: H
EUT Orientation: H
Test Engineer: Chris
Voltage: AC Adaptor
Comments:

SWEEP TABLE: "FCC15.247_30M-1G_Hor"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	3141-#1186_Horz

Marker: 980.561122 MHz 33.01 dBµV/m

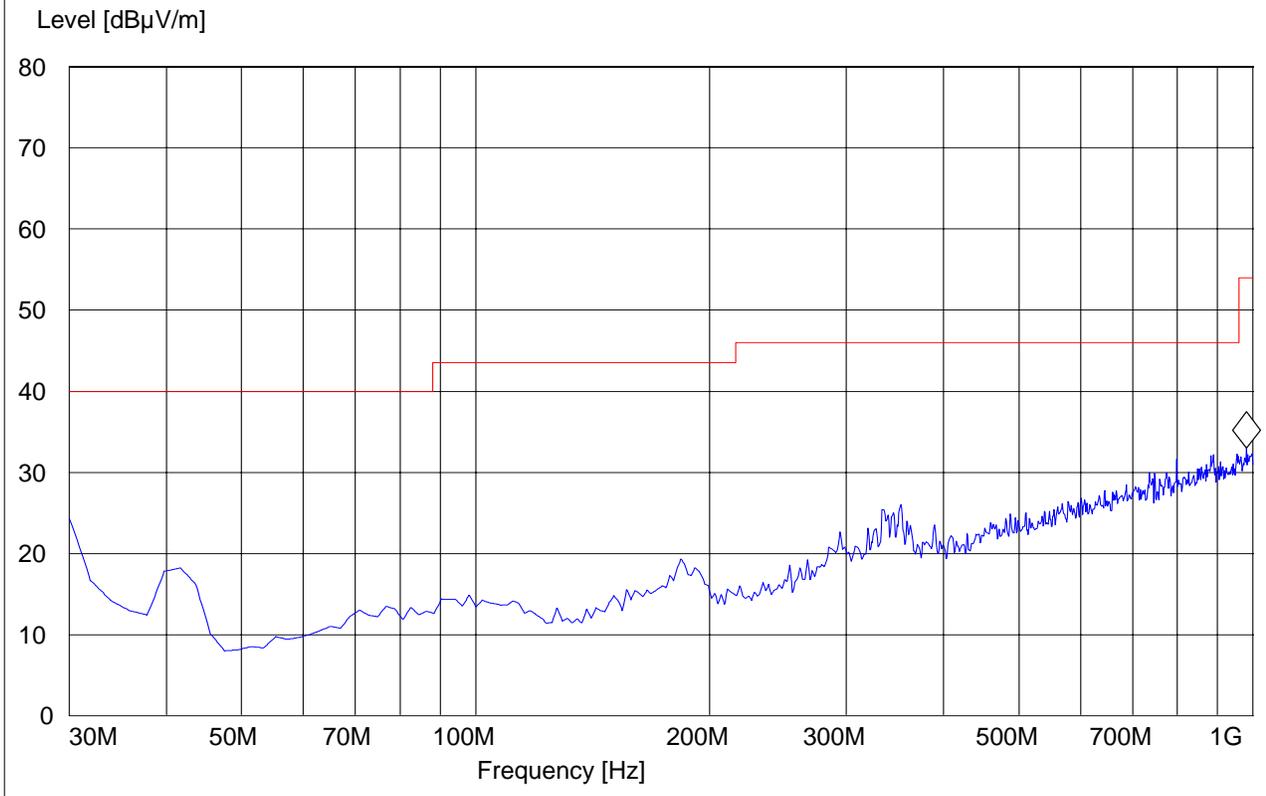




1-7GHz

Note: Peak Reading vs. Average limit

EUT: FCC2
Customer:: Sony Electronics
Test Mode: 802.11n40 Rx
ANT Orientation: H
EUT Orientation: H
Test Engineer: Chris
Voltage: AC Adaptor
Comments:

SWEEP TABLE: "FCC 15.407 1-7G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	7.0 GHz	MaxPeak	Coupled	1 MHz	#35114 Horn

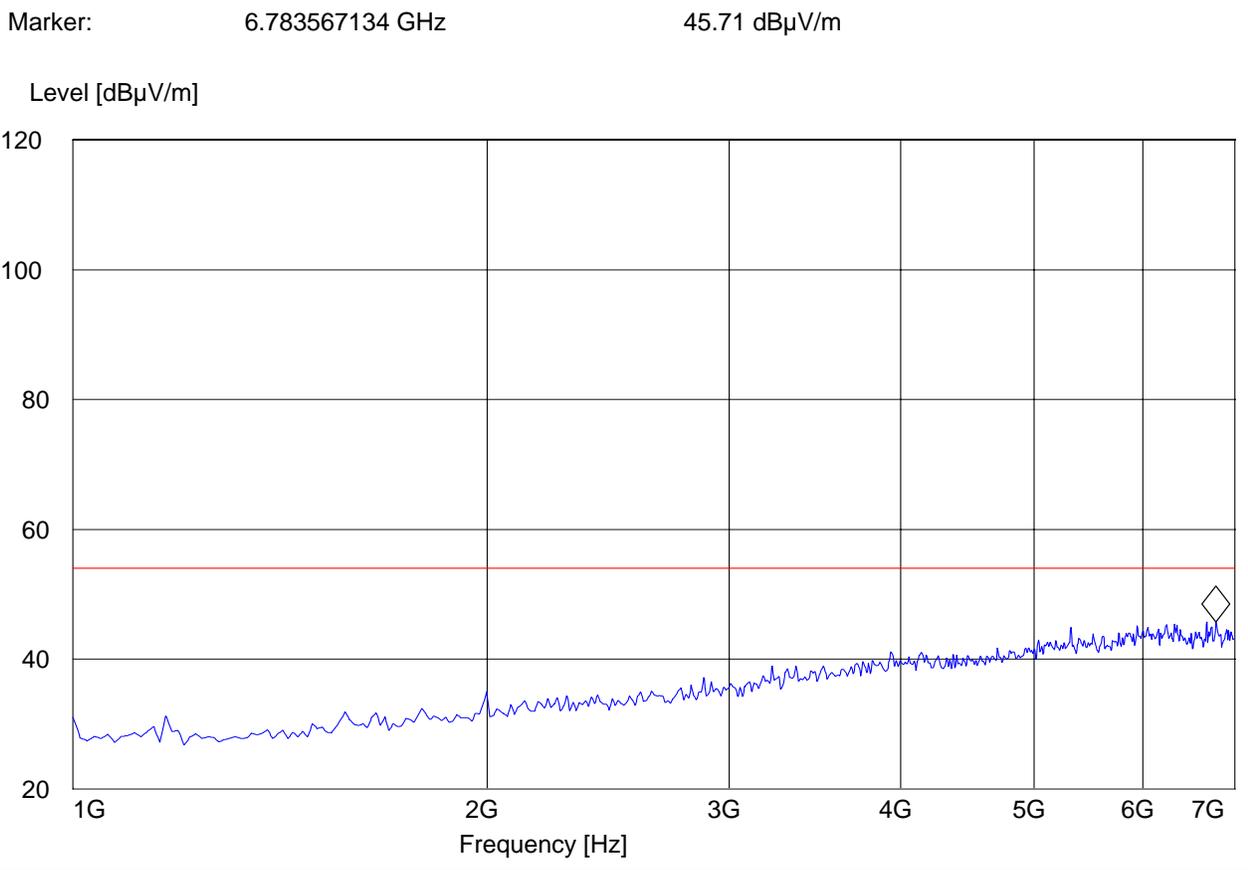




7-18GHz

Note: Peak Reading vs. Average limit

EUT: FCC2
Customer:: Sony Electronics
Test Mode: 802.11n40 Rx
ANT Orientation: H
EUT Orientation: H
Test Engineer: Chris
Voltage: AC Adaptor
Comments:

SWEEP TABLE: "FCC 15.407 7-18G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	18.0 GHz	MaxPeak	1.0 s	1 MHz	#326horn_AF_horz

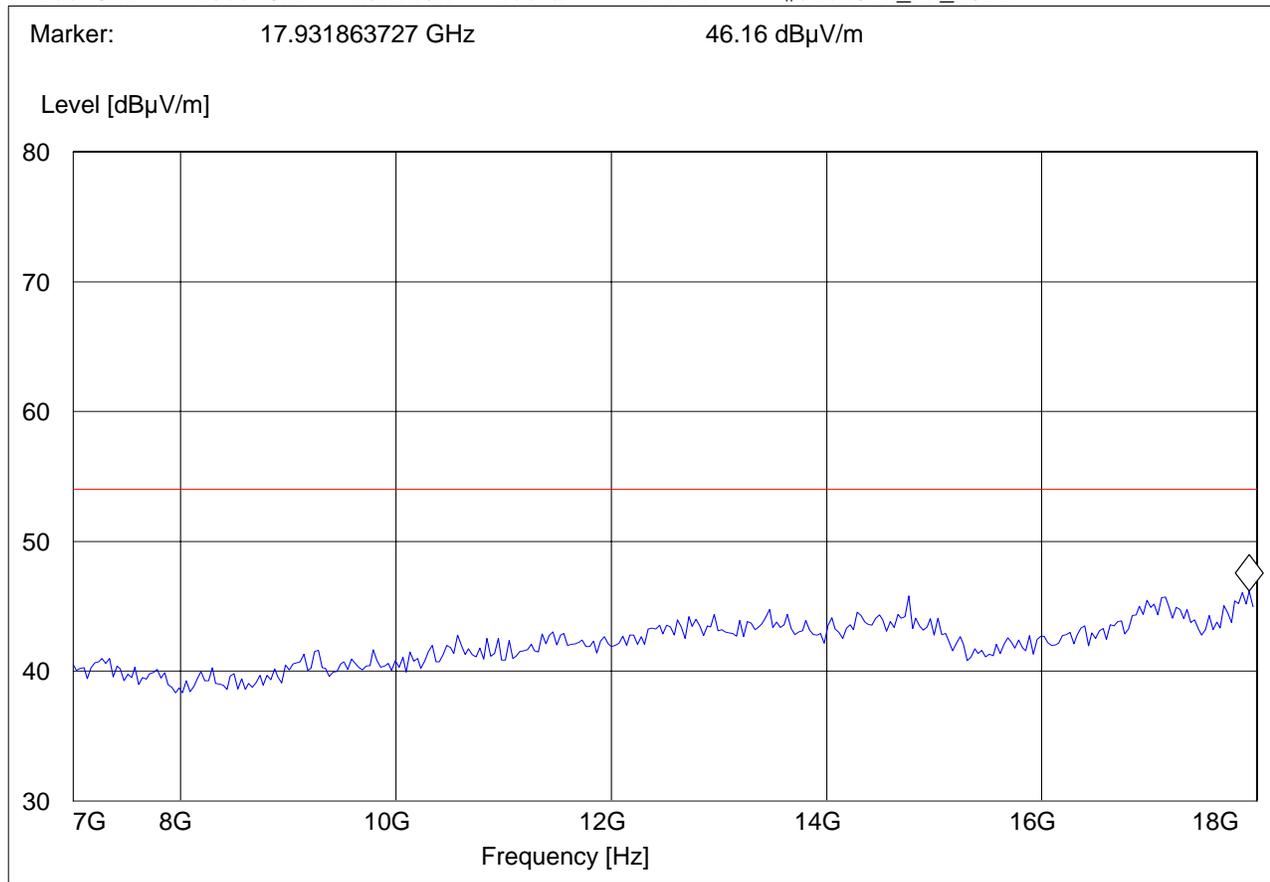



7 Conducted Measurements

7.1 26dB bandwidth and 99% bandwidth.

7.1.1 Limit

None. Measurement procedure per FCC Public Notice DA02-2138.

7.1.2 Test Results

Test Not conducted. The EUT integrates an FCC approved module. All conducted measurements are referenced from the original report for the module.

7.2 Conducted Power Measurement

7.2.1 FCC Limits:

Conducted Output Power is defined as the following (reduced if directional gain > 6dBi):

Sub-band 1: 5150-5250MHz: 15.407(a)(1): 50mW or 4dBm + 10log(B),

Sub-band 2: 5250-5350MHz: 15.407(a)(2): 250mW or 11dBm + 10log(B)

Sub-band 3: 5470-5725MHz: 15.407(a)(2): 250mW or 11dBm + 10log(B)

B is the 26-dB emission bandwidth in MHz.

7.2.2 IC Limits

Sub-band 1: 5150-5250MHz: Not defined.

Sub-band 2: 5250-5350MHz: RSS-210 A9.2(2): 250mW or 11dBm + 10log(B)

Sub-band 3: 5470-5725MHz: RSS-210 A9.2(2): 250mW or 11dBm + 10log(B)

B is the 99% emission bandwidth in MHz

7.2.3 Measurement Results

Test Not conducted. The EUT integrates an FCC approved module. All conducted measurements are referenced from the original report for the module.

7.3 Power Spectral Density

7.3.1 FCC Limit

Sub-band 1: 5150-5250MHz 15.407(a) (1): 4dBm in any 1-MHz band

Sub-band 2: 5250-5350MHz 15.407(a) (2): 11dBm in any 1-MHz band

Sub-band 3: 5470-5725MHz 15.407(a) (2): 11dBm in any 1-MHz band

7.3.2 IC Limit

Sub-band 1: 5150-5250MHz RSS-210 A9.2(1): 10dBm in any 1-MHz band

Sub-band 2: 5250-5350MHz RSS-210 A9.2(2): 11dBm in any 1-MHz band

Sub-band 3: 5470-5725MHz RSS-210 A9.2(2): 11dBm in any 1-MHz band

7.3.3 Results

Test Not conducted. The EUT integrates an FCC approved module. All conducted measurements are referenced from the original report for the module.

7.4 Peak Excursion

7.4.1 Limit

FCC15.407 (A)(6): The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the maximum conducted output power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emission bandwidth whichever is less.

7.4.2 Results

Test Not conducted. The EUT integrates an FCC approved module. All conducted measurements are referenced from the original report for the module.

7.5 Conducted Spurious Emission

7.5.1 Limit

As specified in 15.407 (b)(1)(2)(3)(4) and RSS-210 (A9.3)(1)(2)(3)(4).

7.5.2 Results:

Test Not conducted. The EUT integrates an FCC approved module. All conducted measurements are referenced from the original report for the module.



7.6 AC Power Line Conducted Emissions § 15.107/207

7.6.1 LIMITS

Technical specification: 15.107 / 15.207 (Revised as of August 20, 2002)

§15.107 (a) Except for Class A digital devices, for equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 µH/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency of Emission (MHz)	Conducted Limit (dBµV)	
	Quasi-Peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50
* Decreases with logarithm of the frequency		

ANALYZER SETTINGS: RBW = 10KHz


VBW = 10KHz



7.6.2 RESULTS 802.11n HT40 Line:

Emissions reported here represent the worse case emission for 802.11a, n20 and n40 mode.

EUT: FCC2
 Manufacturer: Sony Electronics
 Test Mode: 802.11n40 @ 5190 MHz
 ANT Orientation:: N/A
 EUT Orientation:: H
 Test Engineer:: Chris
 Power Supply: : AC
 Comments: : Line

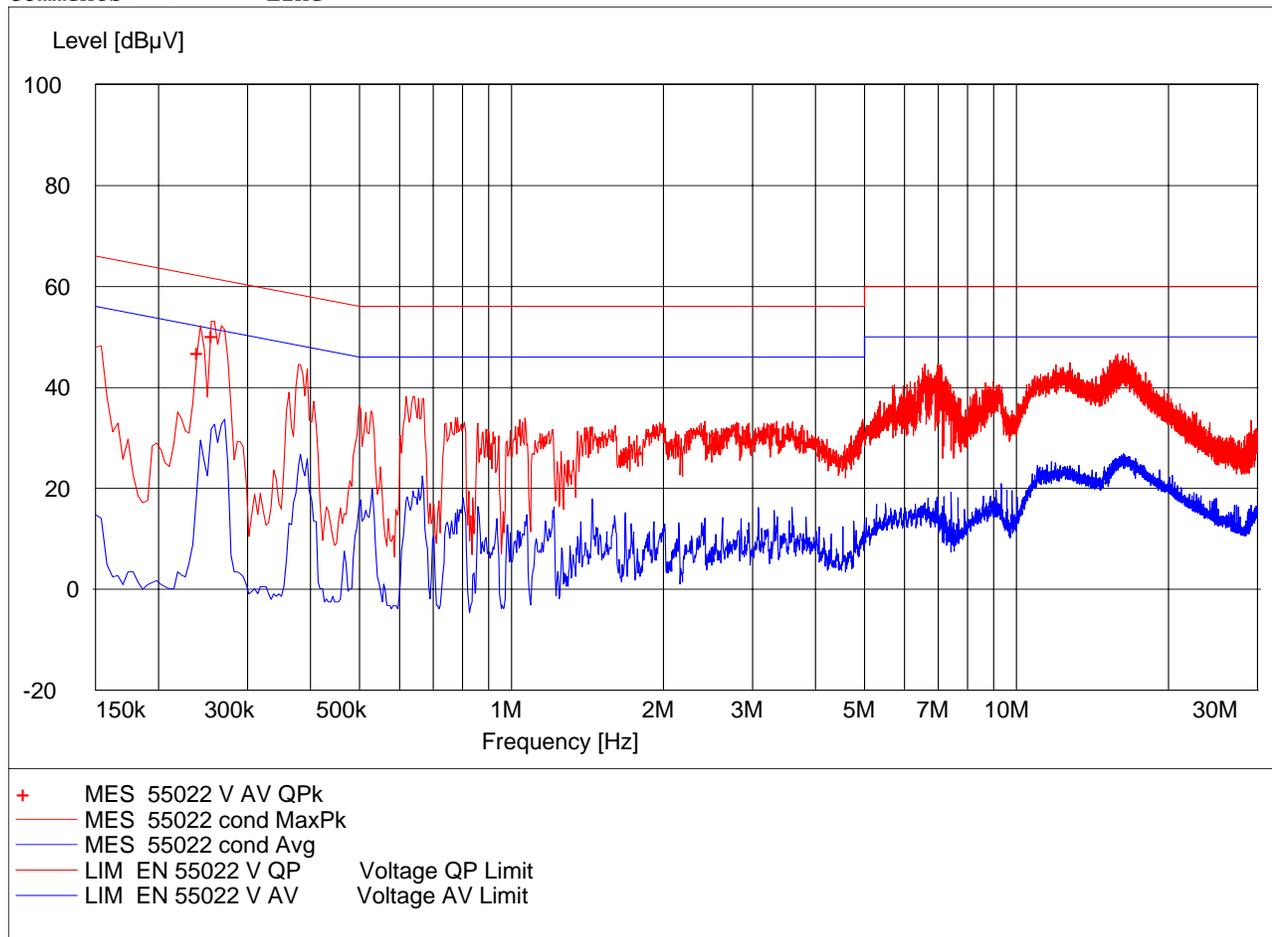

MEASUREMENT RESULT: "55022 V AV QPk"

11/13/2008 4:34AM


Frequency	Level	Transd	Limit	Margin	Line	PE	AUX STATE
MHz	dBµV	dB	dBµV	dB			
0.242000	47.00	0.1	62	15.1	1	---	OFF
0.258000	50.30	0.1	62	11.1	1	---	OFF
30.000000	60.00						



7.6.3 RESULTS 802.11n HT40 Neutral:

Emissions reported here represent the worse case emission for 802.11a, n20 and n40 mode.

EUT: FCC2
 Manufacturer: Sony Electronics
 Test Mode: 802.11n40 @ 5190 MHz
 ANT Orientation:: N/A
 EUT Orientation:: H
 Test Engineer:: Chris
 Power Supply: : AC
 Comments: : Neutral

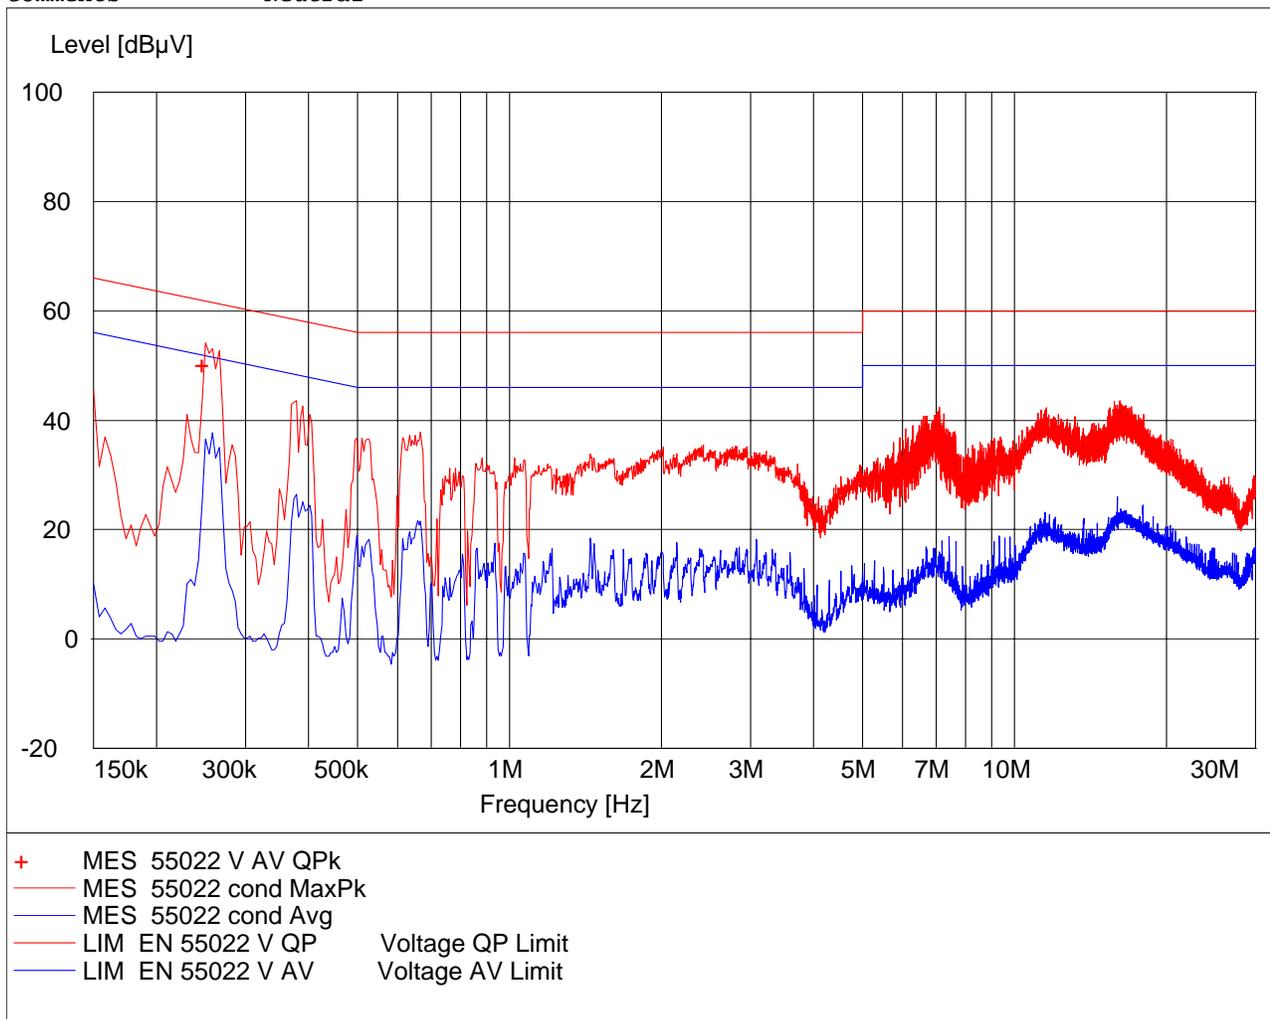

MEASUREMENT RESULT: "55022 V AV QPk"

11/13/2008 4:39AM

Frequency	Level	Transd	Limit	Margin	Line	PE	AUX STATE
MHz	dBµV	dB	dBµV	dB			
0.250000	50.20	0.1	62	11.5	1	---	OFF


8 TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS

No	Instrument/Ancillary	Type	Manufacturer	Serial No.	Cal Due	Interval
01	Spectrum Analyzer	ESIB 40	Rohde & Schwarz	100107	May 2009	1 year
02	Spectrum Analyzer	FSEM 30	Rohde & Schwarz	100017	August 2009	1 year
03	Signal Generator	SMY02	Rohde & Schwarz	836878/011	May 2009	1 year
04	Power-Meter	NRVD	Rohde & Schwarz	0857.8008.0 2	May 2009	1 year
05	Biconilog Antenna	3141	EMCO	0005-1186	June 2009	1 year
06	Horn Antenna (1-18GHz)	SAS-200/571	AH Systems	325	June 2009	1 year
07	Horn Antenna (18-26.5GHz)	3160-09	EMCO	1240	June 2009	1 year
08	Power Splitter	11667B	Hewlett Packard	645348	n/a	n/a
09	Climatic Chamber	VT4004	Voltsch	G1115	May 2009	1 year
10	High Pass Filter	5HC2700	Trilithic Inc.	9926013	n/a	n/a
11	High Pass Filter	4HC1600	Trilithic Inc.	9922307	n/a	n/a
12	Pre-Amplifier	JS4-001isap00	Miteq	00616	May 2009	1 year
13	Power Sensor	URV5-Z2	Rohde & Schwarz	DE30807	May 2009	1 year
14	Digital Radio Comm. Tester	CMD-55	Rohde & Schwarz	847958/008	May 2009	1 year
15	Universal Radio Comm. Tester	CMU 200	Rohde & Schwarz	832221/06	May 2009	1 year
16	LISN	ESH3-Z5	Rohde & Schwarz	836679/003	May 2009	1 year
17	Loop Antenna	6512	EMCO	00049838	July 2009	2 years

9 BLOCK DIAGRAMS

Radiated Testing

ANECHOIC CHAMBER

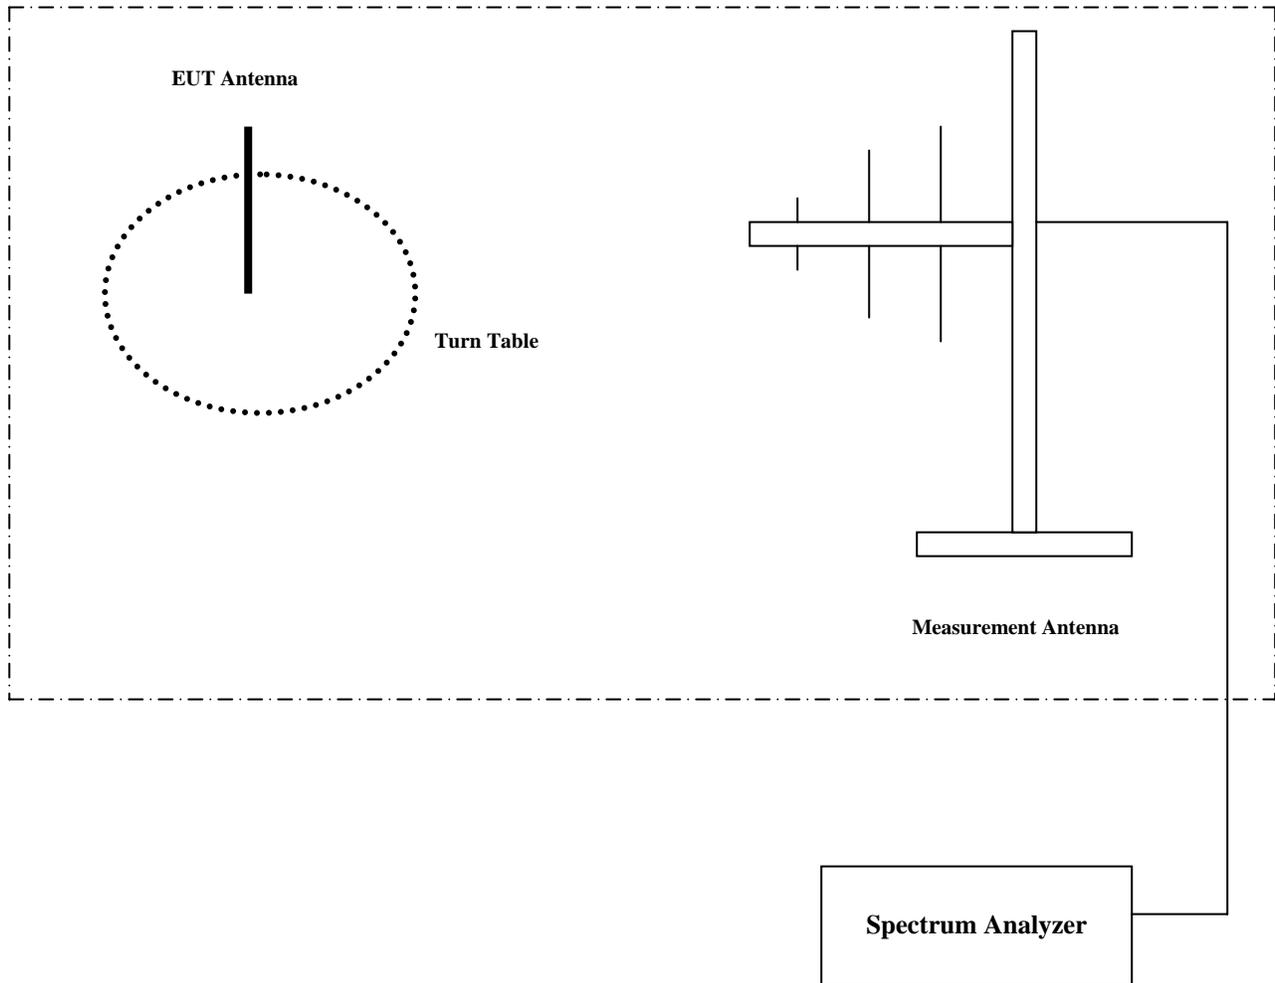



10 Revision History

2008-11-13: First Issue