




<b>System / software:</b>	SARA2 / 2.3 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	1/16/2006 10:23:21 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	190lapv_3d.txt	<b>Probe Serial Number:</b>	0123
<b>Ambient Temperature:</b>	22.0°C	<b>Liquid Simulant:</b>	850
<b>Device Under Test:</b>	Sony D platform	<b>Relative Permittivity:</b>	55.55
<b>Relative Humidity:</b>	50%	<b>Conductivity:</b>	0.987
<b>Phantom S/No:</b>	HeadBox_new_spout.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	-22.67 mm
<b>DUT Position:</b>	lap	<b>Max SAR Z-axis Location:</b>	-165.00 mm
<b>Antenna Configuration:</b>	vertical	<b>Max E Field:</b>	13.02 V/m
<b>Test Frequency:</b>	836.6MHz	<b>SAR 1g:</b>	0.149 W/kg
<b>Air Factors:</b>	346 / 318 / 386	<b>SAR 10g:</b>	0.106 W/kg
<b>Conversion Factors:</b>	.522 / .522 / .522	<b>SAR Start:</b>	0.072 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.073 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	0.03 dB
<b>Diode Compression Factors (V*200):</b>	10 / 11.7 / 7.7	<b>Probe battery last changed:</b>	01/11/2006
<b>Input Power Level:</b>	max	<b>Extrapolation:</b>	poly4

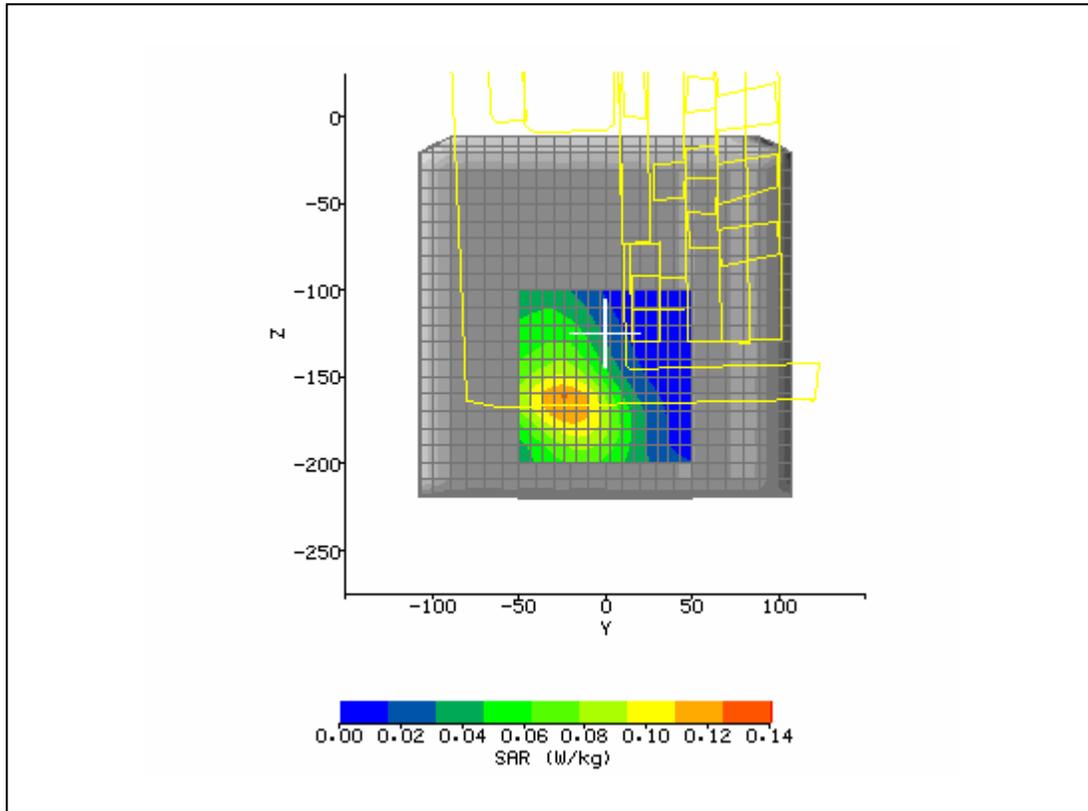


<b>System / software:</b>	SARA2 / 2.3 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	1/16/2006 11:22:51 AM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	190laph_3d.txt	<b>Probe Serial Number:</b>	0123
<b>Ambient Temperature:</b>	22.0°C	<b>Liquid Simulant:</b>	850
<b>Device Under Test:</b>	Sony D platform	<b>Relative Permittivity:</b>	55.55
<b>Relative Humidity:</b>	50%	<b>Conductivity:</b>	0.987
<b>Phantom S/No:</b>	HeadBox_new_spout.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	0.00 mm
<b>DUT Position:</b>	lap	<b>Max SAR Z-axis Location:</b>	-146.40 mm
<b>Antenna Configuration:</b>	horizontal	<b>Max E Field:</b>	10.23 V/m
<b>Test Frequency:</b>	836.6MHz	<b>SAR 1g:</b>	0.091 W/kg
<b>Air Factors:</b>	346 / 318 / 386	<b>SAR 10g:</b>	0.063 W/kg
<b>Conversion Factors:</b>	.522 / .522 / .522	<b>SAR Start:</b>	0.043 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.043 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	0.00 dB
<b>Diode Compression Factors (V*200):</b>	10 / 11.7 / 7.7	<b>Probe battery last changed:</b>	01/11/2006
<b>Input Power Level:</b>	max	<b>Extrapolation:</b>	poly4

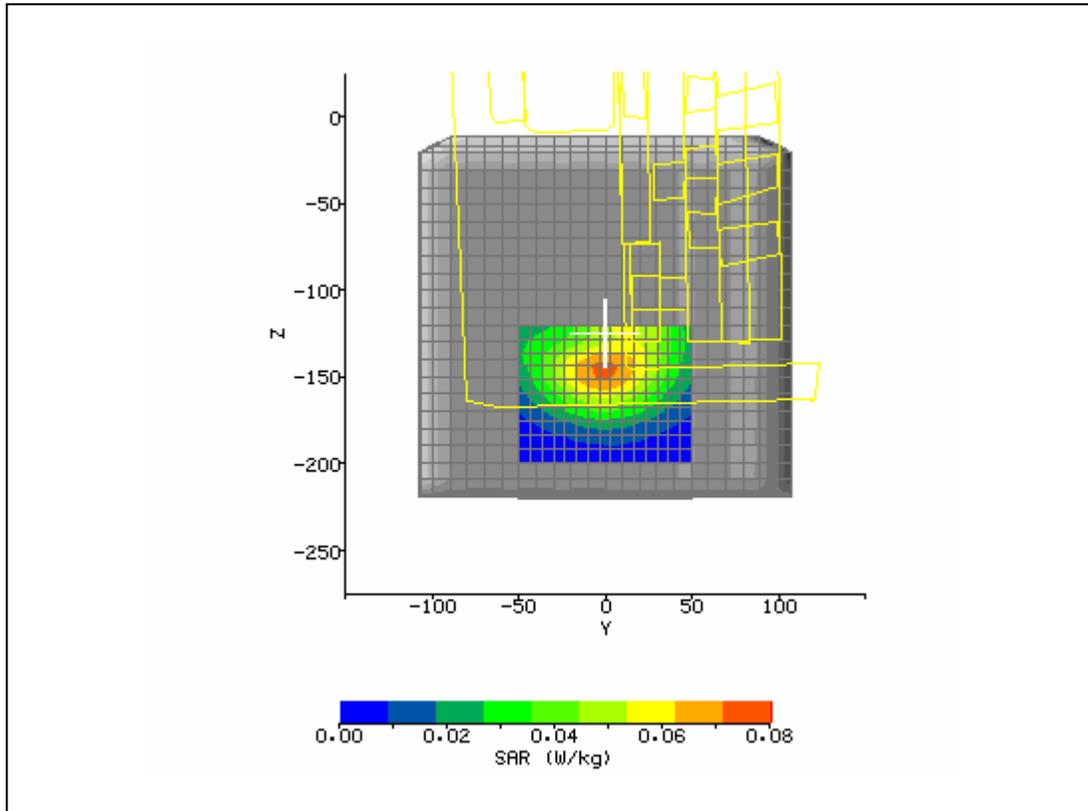


<b>System / software:</b>	SARA2 / 2.3 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	1/16/2006 12:46:27 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	128lapv_3d.txt	<b>Probe Serial Number:</b>	0123
<b>Ambient Temperature:</b>	22.0°C	<b>Liquid Simulant:</b>	850
<b>Device Under Test:</b>	Sony D platform	<b>Relative Permittivity:</b>	56.07
<b>Relative Humidity:</b>	50%	<b>Conductivity:</b>	0.973
<b>Phantom S/No:</b>	HeadBox_new_spout.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	-16.00 mm
<b>DUT Position:</b>	lap	<b>Max SAR Z-axis Location:</b>	-164.00 mm
<b>Antenna Configuration:</b>	vertical	<b>Max E Field:</b>	12.65 V/m
<b>Test Frequency:</b>	824.2MHz	<b>SAR 1g:</b>	0.138 W/kg
<b>Air Factors:</b>	346 / 318 / 386	<b>SAR 10g:</b>	0.096 W/kg
<b>Conversion Factors:</b>	.522 / .522 / .522	<b>SAR Start:</b>	0.064 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.065 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	0.05 dB
<b>Diode Compression Factors (V*200):</b>	10 / 11.7 / 7.7	<b>Probe battery last changed:</b>	01/11/2006
<b>Input Power Level:</b>	max	<b>Extrapolation:</b>	poly4

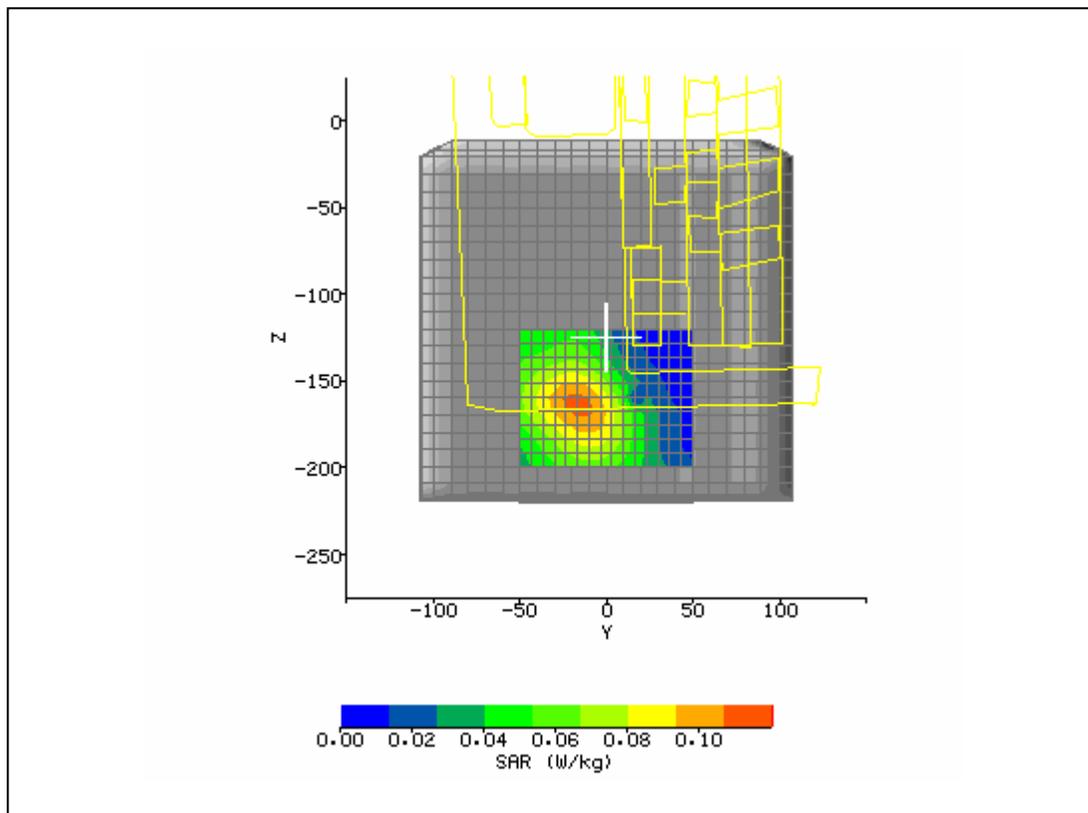


<b>System / software:</b>	SARA2 / 2.3 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	1/16/2006 2:37:33 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	251lapv_3d.txt	<b>Probe Serial Number:</b>	0123
<b>Ambient Temperature:</b>	22.0°C	<b>Liquid Simulant:</b>	850
<b>Device Under Test:</b>	Sony D platform	<b>Relative Permittivity:</b>	55.46
<b>Relative Humidity:</b>	50%	<b>Conductivity:</b>	0.983
<b>Phantom S/No:</b>	HeadBox_new_spout.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	-6.00 mm
<b>DUT Position:</b>	lap	<b>Max SAR Z-axis Location:</b>	-174.67 mm
<b>Antenna Configuration:</b>	vertical	<b>Max E Field:</b>	22.67 V/m
<b>Test Frequency:</b>	848.8MHz	<b>SAR 1g:</b>	0.130 W/kg
<b>Air Factors:</b>	346 / 318 / 386	<b>SAR 10g:</b>	0.085 W/kg
<b>Conversion Factors:</b>	.522 / .522 / .522	<b>SAR Start:</b>	0.054 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.054 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	0.00 dB
<b>Diode Compression Factors (V*200):</b>	10 / 11.7 / 7.7	<b>Probe battery last changed:</b>	01/11/2006
<b>Input Power Level:</b>	max	<b>Extrapolation:</b>	poly4

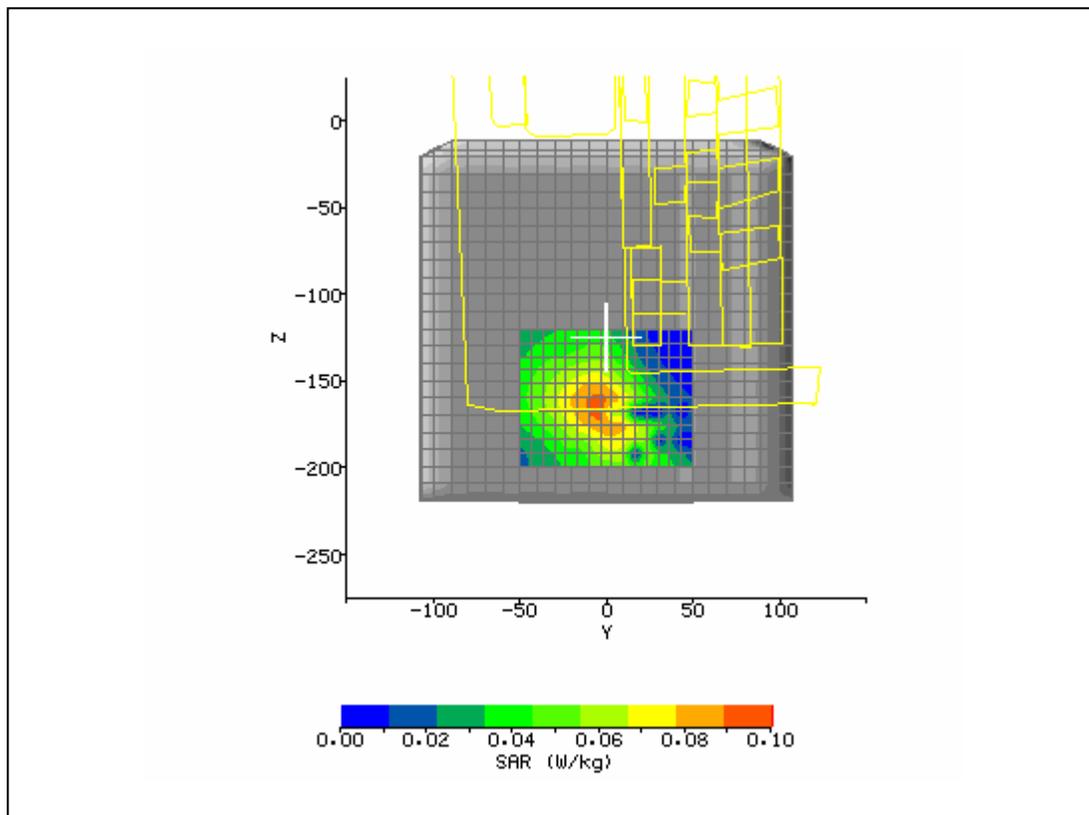


<b>System / software:</b>	SARA2 / 2.3 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	1/11/2006 1:53:17 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	lap661v_3d.txt	<b>Probe Serial Number:</b>	0123
<b>Ambient Temperature:</b>	22.0°C	<b>Liquid Simulant:</b>	1900
<b>Device Under Test:</b>	Sony D platform	<b>Relative Permittivity:</b>	53.21
<b>Relative Humidity:</b>	50%	<b>Conductivity:</b>	1.577
<b>Phantom S/No:</b>	HeadBox_new_spout.c sv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	-28.00 mm
<b>DUT Position:</b>	lap	<b>Max SAR Z-axis Location:</b>	-156.00 mm
<b>Antenna Configuration:</b>	vertical	<b>Max E Field:</b>	9.57 V/m
<b>Test Frequency:</b>	1880MHz	<b>SAR 1g:</b>	0.118 W/kg
<b>Air Factors:</b>	346 / 318 / 386	<b>SAR 10g:</b>	0.065 W/kg
<b>Conversion Factors:</b>	0.666 / 0.666 / 0.666	<b>SAR Start:</b>	0.036 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.036 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	0.01 dB
<b>Diode Compression Factors (V*200):</b>	10 / 11.7 / 7.7	<b>Probe battery last changed:</b>	01/11/2006
<b>Input Power Level:</b>	max	<b>Extrapolation:</b>	poly4

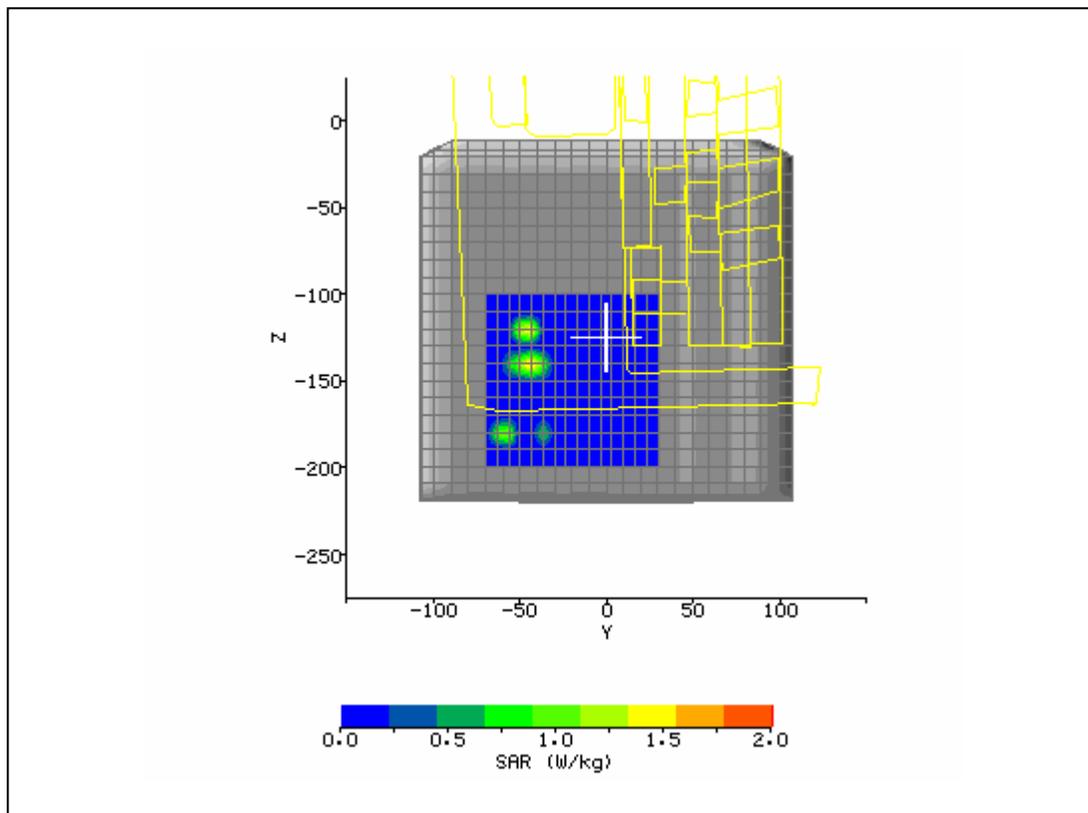

<b>System / software:</b>	SARA2 / 2.3 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	1/11/2006 3:05:39 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	lap661h_3d.txt	<b>Probe Serial Number:</b>	0123
<b>Ambient Temperature:</b>	22.0°C	<b>Liquid Simulant:</b>	1900
<b>Device Under Test:</b>	Sony D platform	<b>Relative Permittivity:</b>	53.21
<b>Relative Humidity:</b>	50%	<b>Conductivity:</b>	1.577
<b>Phantom S/No:</b>	HeadBox_new_spout.csv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	-23.33 mm
<b>DUT Position:</b>	lap	<b>Max SAR Z-axis Location:</b>	-162.00 mm
<b>Antenna Configuration:</b>	horizontal	<b>Max E Field:</b>	10.91 V/m
<b>Test Frequency:</b>	1880MHz	<b>SAR 1g:</b>	0.157 W/kg
<b>Air Factors:</b>	346 / 318 / 386	<b>SAR 10g:</b>	0.094 W/kg
<b>Conversion Factors:</b>	0.666 / 0.666 / 0.666	<b>SAR Start:</b>	0.047 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.047 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	0.00 dB
<b>Diode Compression Factors (V*200):</b>	10 / 11.7 / 7.7	<b>Probe battery last changed:</b>	01/11/2006
<b>Input Power Level:</b>	max	<b>Extrapolation:</b>	poly4

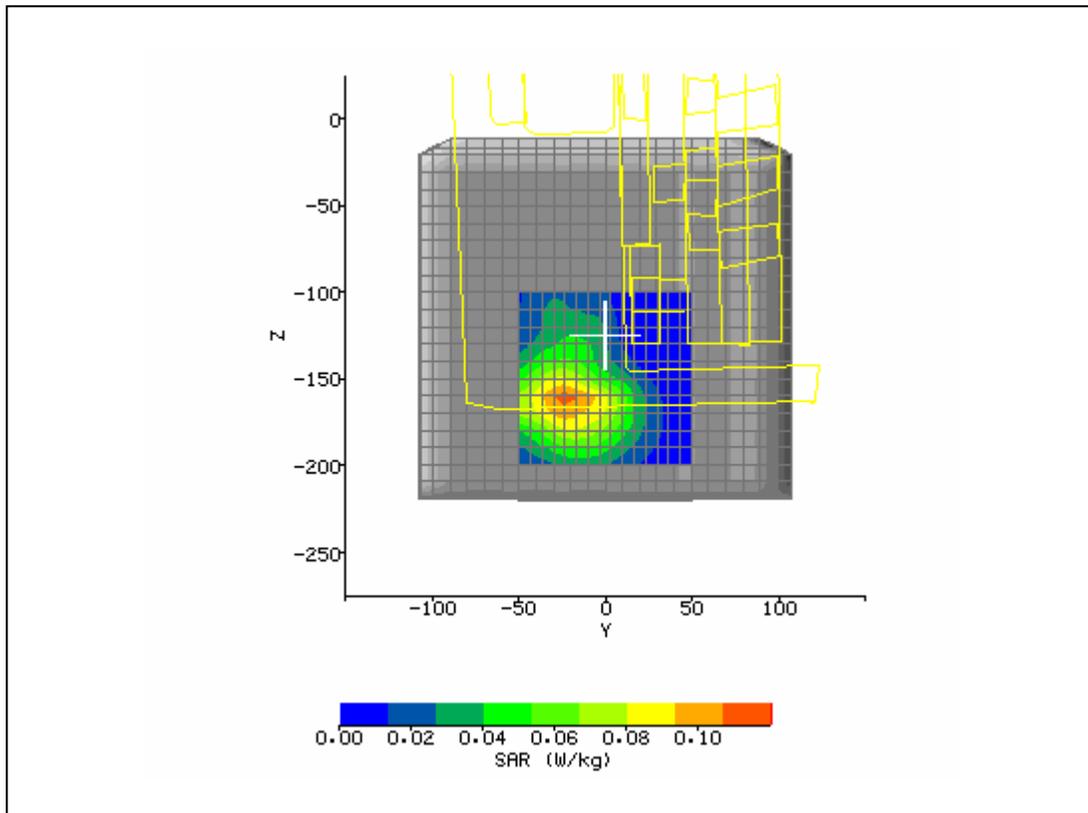

<b>System / software:</b>	SARA2 / 2.3 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	1/11/2006 3:38:54 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	lap512h_3d.txt	<b>Probe Serial Number:</b>	0123
<b>Ambient Temperature:</b>	22.0°C	<b>Liquid Simulant:</b>	1900
<b>Device Under Test:</b>	Sony D platform	<b>Relative Permittivity:</b>	53.39
<b>Relative Humidity:</b>	50%	<b>Conductivity:</b>	1.565
<b>Phantom S/No:</b>	HeadBox_new_spout.c sv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	-24.00 mm
<b>DUT Position:</b>	lap	<b>Max SAR Z-axis Location:</b>	-163.00 mm
<b>Antenna Configuration:</b>	horizontal	<b>Max E Field:</b>	9.28 V/m
<b>Test Frequency:</b>	1850.2MHz	<b>SAR 1g:</b>	0.114 W/kg
<b>Air Factors:</b>	346 / 318 / 386	<b>SAR 10g:</b>	0.069 W/kg
<b>Conversion Factors:</b>	0.666 / 0.666 / 0.666	<b>SAR Start:</b>	0.032 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.033 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	0.03 dB
<b>Diode Compression Factors (V*200):</b>	10 / 11.7 / 7.7	<b>Probe battery last changed:</b>	01/11/2006
<b>Input Power Level:</b>	max	<b>Extrapolation:</b>	poly4

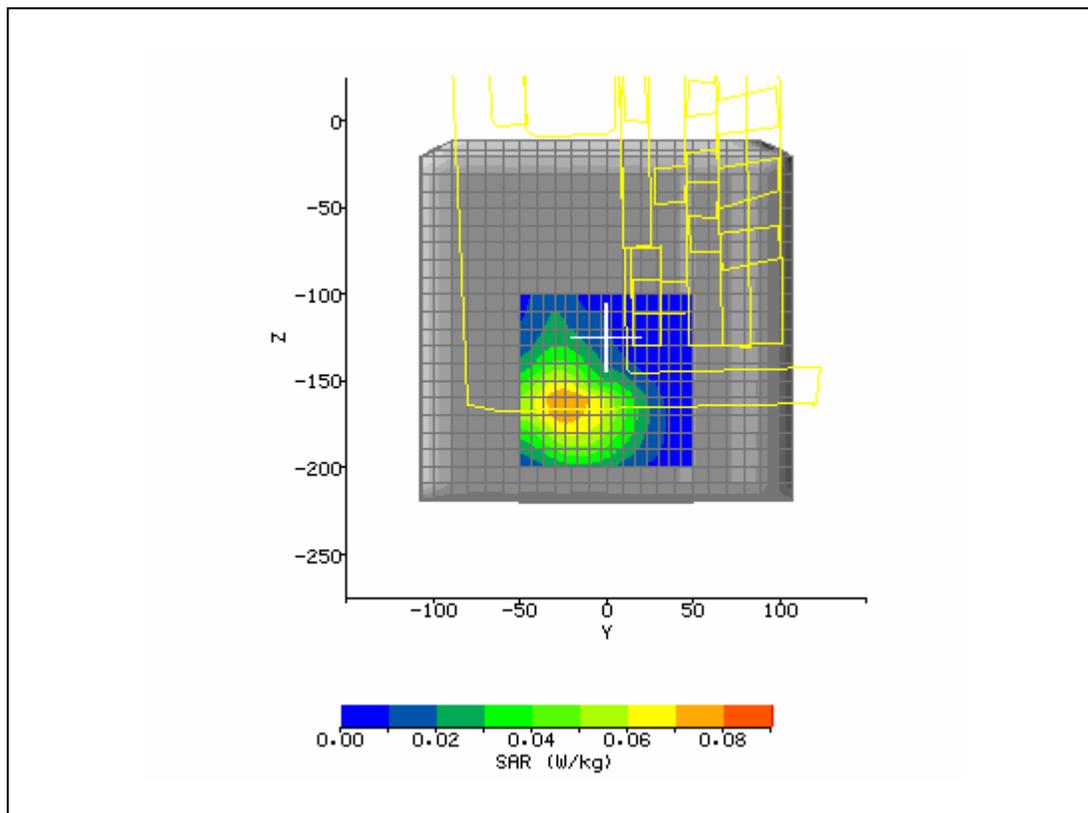

<b>System / software:</b>	SARA2 / 2.3 VPM	<b>Input Power Drift:</b>	
<b>Date / Time:</b>	1/11/2006 4:24:04 PM	<b>DUT Battery Model/No:</b>	
<b>Filename:</b>	lap810h_3d.txt	<b>Probe Serial Number:</b>	0123
<b>Ambient Temperature:</b>	22.0°C	<b>Liquid Simulant:</b>	1900
<b>Device Under Test:</b>	Sony D platform	<b>Relative Permittivity:</b>	53.03
<b>Relative Humidity:</b>	50%	<b>Conductivity:</b>	1.585
<b>Phantom S/No:</b>	HeadBox_new_spout.c sv	<b>Liquid Temperature:</b>	22.0°C
<b>Phantom Rotation:</b>	0°	<b>Max SAR Y-axis Location:</b>	-24.00 mm
<b>DUT Position:</b>	lap	<b>Max SAR Z-axis Location:</b>	-163.00 mm
<b>Antenna Configuration:</b>	horizontal	<b>Max E Field:</b>	9.26 V/m
<b>Test Frequency:</b>	1909.8MHz	<b>SAR 1g:</b>	0.115 W/kg
<b>Air Factors:</b>	346 / 318 / 386	<b>SAR 10g:</b>	0.070 W/kg
<b>Conversion Factors:</b>	0.666 / 0.666 / 0.666	<b>SAR Start:</b>	0.033 W/kg
<b>Type of Modulation:</b>		<b>SAR End:</b>	0.032 W/kg
<b>Modn. Duty Cycle:</b>		<b>SAR Drift during Scan:</b>	-0.12 dB
<b>Diode Compression Factors (V*200):</b>	10 / 11.7 / 7.7	<b>Probe battery last changed:</b>	01/11/2006
<b>Input Power Level:</b>	max	<b>Extrapolation:</b>	poly4

