



**FCC CFR47 PART 15 SUBPART C  
CERTIFICATION**

**TEST REPORT**

**FOR**

**EUT: WIRELESS LAN PC CARD**

**MODEL NUMBER: PCWA-C800S**

**FCC ID: AK8PCWAC800S**

**REPORT NUMBER: 03I2353-1**

**ISSUE DATE: NOVEMBER 26, 2003**

*Prepared for*  
**SONY CORPORATION**  
**6-7-35 KITASHINAGAWA SHINAGAWA-KU**  
**TOKYO, 141-0001 JAPAN**

*Prepared by*  
**COMPLIANCE CERTIFICATION SERVICES**  
**561F MONTEREY ROAD,**  
**MORGAN HILL, CA 95037, USA**  
**TEL: (408) 463-0885**  
**FAX: (408) 463-0888**



## TABLE OF CONTENTS

<b>1. TEST RESULT CERTIFICATION .....</b>	<b>3</b>
<b>2. EUT: WIRELESS LAN PC CARD DESCRIPTION.....</b>	<b>4</b>
<b>3. TEST METHODOLOGY.....</b>	<b>5</b>
<b>4. FACILITIES AND ACCREDITATION.....</b>	<b>5</b>
<b>5. CALIBRATION AND UNCERTAINTY .....</b>	<b>6</b>
5.1. <i>MEASURING INSTRUMENT CALIBRATION .....</i>	<i>6</i>
5.2. <i>MEASUREMENT UNCERTAINTY .....</i>	<i>6</i>
5.3. <i>TEST AND MEASUREMENT EQUIPMENT.....</i>	<i>7</i>
<b>6. SETUP OF EQUIPMENT UNDER TEST.....</b>	<b>8</b>
<b>7. APPLICABLE LIMITS AND TEST RESULTS.....</b>	<b>10</b>
7.1. <i>6 dB BANDWIDTH.....</i>	<i>10</i>
7.2. <i>99% BANDWIDTH.....</i>	<i>18</i>
7.3. <i>PEAK OUTPUT POWER.....</i>	<i>26</i>
7.4. <i>MAXIMUM PERMISSIBLE EXPOSURE.....</i>	<i>35</i>
7.5. <i>AVERAGE POWER.....</i>	<i>38</i>
7.6. <i>PEAK POWER SPECTRAL DENSITY.....</i>	<i>39</i>
7.7. <i>CONDUCTED SPURIOUS EMISSIONS .....</i>	<i>47</i>
7.8. <i>RADIATED EMISSIONS.....</i>	<i>62</i>
7.8.1. <i>TRANSMITTER RADIATED SPURIOUS EMISSIONS .....</i>	<i>62</i>
7.8.2. <i>TRANSMITTER RADIATED EMISSIONS ABOVE 1 GHZ.....</i>	<i>65</i>
7.8.3. <i>WORST-CASE RADIATED EMISSIONS BELOW 1 GHZ.....</i>	<i>84</i>
7.9. <i>POWERLINE CONDUCTED EMISSIONS.....</i>	<i>88</i>
<b>8. SETUP PHOTOS.....</b>	<b>92</b>

# 1. TEST RESULT CERTIFICATION

**COMPANY NAME:** SONY CORPORATION  
6-7-35 KITASHINAGAWA SHINAGAWA-KU  
TOKYO, 141-0001 JAPAN

**EUT:** WIRELESS LAN PC CARD DESCRIPTION

**MODEL:** PCWA-C800S

**DATE TESTED:** NOVEMBER 18 – 26, 2003

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 15 SUBPART C	NO NON-COMPLIANCE NOTED


Compliance Certification Services, Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** This document reports conditions under which testing was conducted and results of tests performed. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification Services will constitute fraud and shall nullify the document.

**Note:** The 2.4 GHz band is applicable to this report; another band of operation (5.2 GHz) is documented in a separate report.

Approved & Released For CCS By:

Tested By:



MIKE HECKROTTE  
CHIEF ENGINEER  
COMPLIANCE CERTIFICATION SERVICES

THANH NGUYEN  
EMC TECHNICIAN  
COMPLIANCE CERTIFICATION SERVICES

## 2. EUT: WIRELESS LAN PC CARD DESCRIPTION

The EUT: WIRELESS LAN PC CARD is an 802.11a/b/g transceiver in a PCMCIA form factor.

The transmitter has a maximum peak conducted output power as follows:

Frequency Band (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2412 - 2462	802.11b	17.72	59.16
2412 - 2462	802.11g	22.00	158.49
2437	802.11g Turbo	18.82	76.21

The radio utilizes two identical internal dipole antennas for diversity, each with a maximum gain of 2.44 dBi in the 2400 to 2483.5 MHz band.

### 3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4/2001, FCC CFR 47 Part 2 and FCC CFR 47 Part 15.

### 4. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 561F Monterey Road, Morgan Hill, California, USA. The sites are constructed in conformance with the requirements of ANSI C63.4, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.



No part of this report may be used to claim or imply product endorsement by NVLAP or any agency of the US Government.

## 5. CALIBRATION AND UNCERTAINTY

### 5.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 5.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Radiated Emission, 30 to 200 MHz	+/- 3.3 dB
Radiated Emission, 200 to 1000 MHz	+4.5 / -2.9 dB
Radiated Emission, 1000 to 2000 MHz	+4.5 / -2.9 dB
Power Line Conducted Emission	+/- 2.9 dB

Uncertainty figures are valid to a confidence level of 95%.

### 5.3. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

<b>TEST AND MEASUREMENT EQUIPMENT LIST</b>				
<b>Name of Equipment</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Due Date</b>
Spectrum Analyzer 20 Hz ~ 44 GHz	Agilent	E4446A	US42070220	1/13/2004
Antenna, Horn 1 ~ 18 GHz	EMCO	3115	6717	2/4/2004
Peak Power Meter	Agilent	E4416A	GB41291160	11/7/2004
Peak / Average Power Sensor	Agilent	E9327A	US40440755	11/7/2004
Amplifier 1-26GHz	MITEQ	NSP2600-SP	924342	4/25/2004
Antenna, Horn, 18 ~ 26 GHz	ARA	MWH-1826/B	1013	2/2/2004
EMI Receiver, 9 kHz ~ 2.9 GHz	HP	8542E	3942A00286	11/21/2004
RF Filter Section	HP	85420E	3705A00256	11/21/2004
Antenna, Bicon/Log, 25 ~ 2000 MHz	ARA	LPB-2520/A	1185	3/6/2004

## 6. SETUP OF EQUIPMENT UNDER TEST

### SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST				
Device Type	Manufacturer	Model	Serial Number	FCC ID
LAPTOP	TOSHIBA	PAE7518CME	23343350K	DoC
AC/DC Adapter	DELTA ELECTRONICS INC.	ADP-75FB A	RGT0252128466	N/A


### I/O CABLES

Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	AC	1	USA115V	Unshielded	1.5m	N/A
2	DC	1	DC	Unshielded	1.5m	Ferrite Bead at LapTop side

### TEST SETUP

The EUT is installed in a host laptop computer via a cardbus extension board during the tests. Test software exercised the radio card.

**SETUP DIAGRAM FOR TESTS**

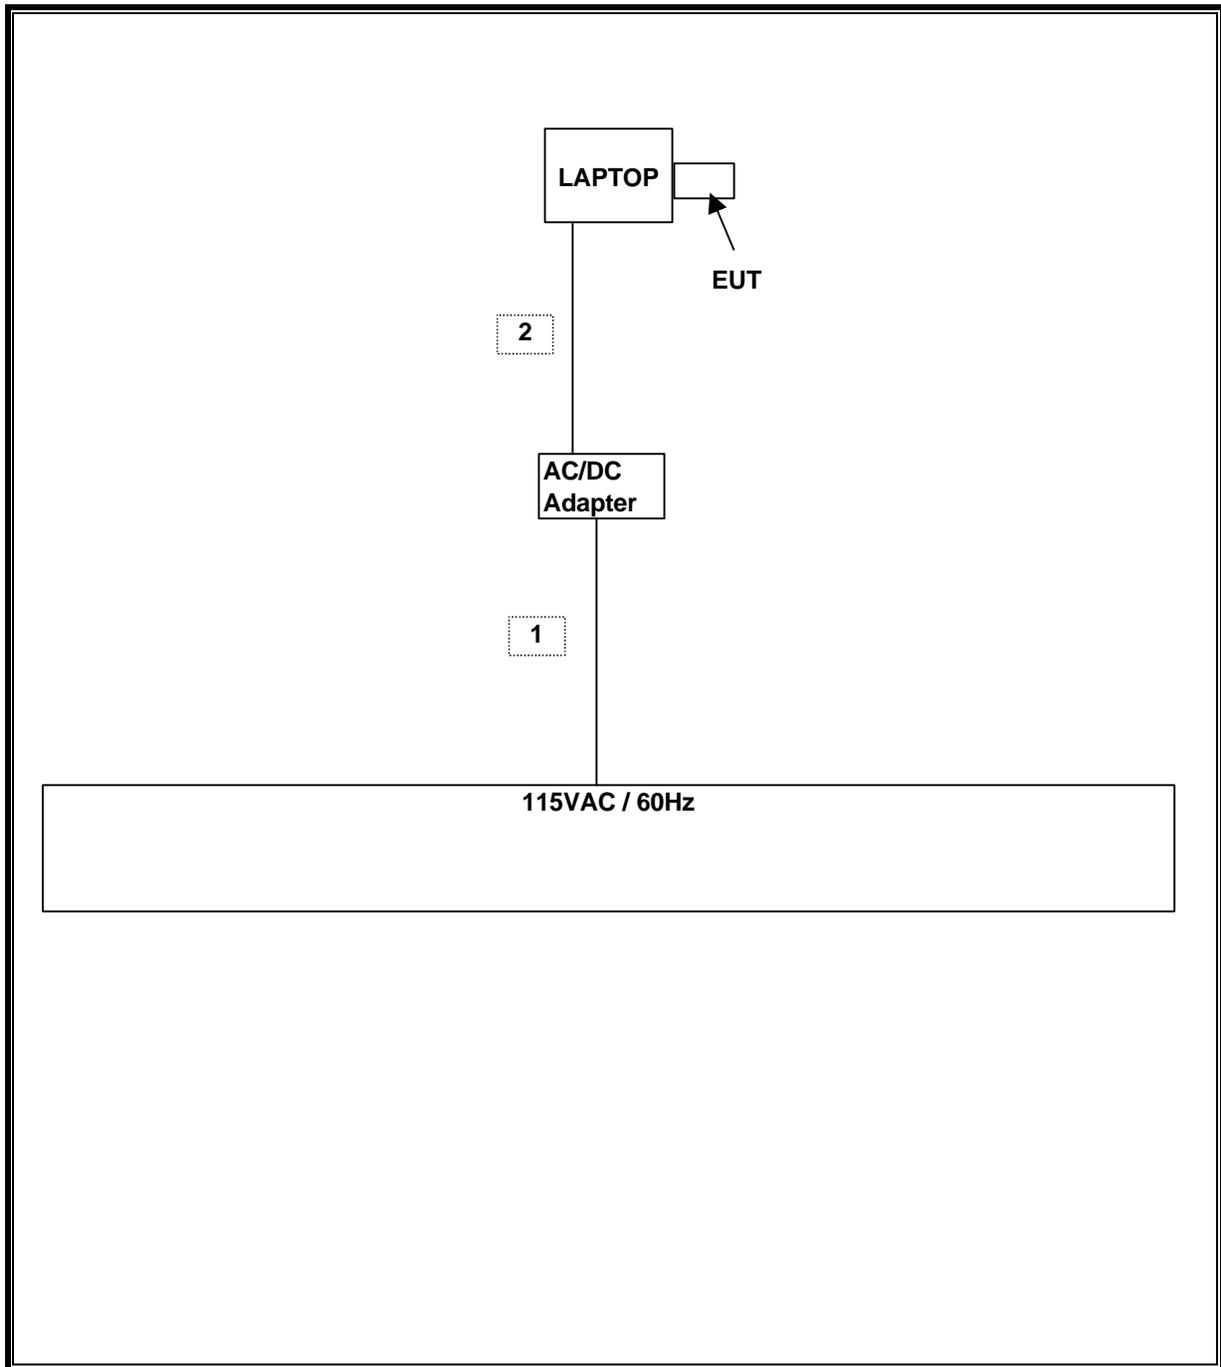

## 7. APPLICABLE LIMITS AND TEST RESULTS

### 7.1. 6 dB BANDWIDTH

#### LIMIT

§15.247 (a) (2) For direct sequence systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

#### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 100 kHz. The sweep time is coupled.

#### RESULTS

No non-compliance noted:

##### 802.11b Mode

Channel	Frequency (MHz)	6 dB Bandwidth (kHz)	Minimum Limit (kHz)	Margin (kHz)
Low	2412	12500	500	12000
Middle	2437	12500	500	12000
High	2462	12500	500	12000


##### 802.11g Mode


Channel	Frequency (MHz)	6 dB Bandwidth (kHz)	Minimum Limit (kHz)	Margin (kHz)
Low	2412	16330	500	15830
Middle	2437	16420	500	15920
High	2462	16250	500	15750


##### 802.11g Turbo Mode

Channel	Frequency (MHz)	6 dB Bandwidth (kHz)	Minimum Limit (kHz)	Margin (kHz)
Middle	2437	32700	500	32200


**6 DB BANDWIDTH (802.11b MODE)**

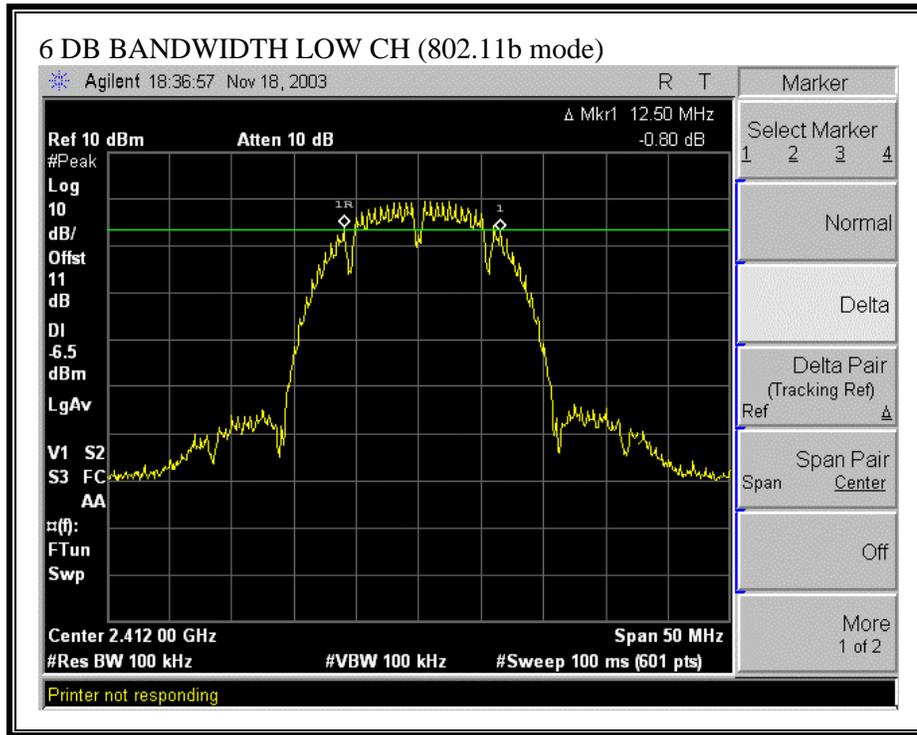


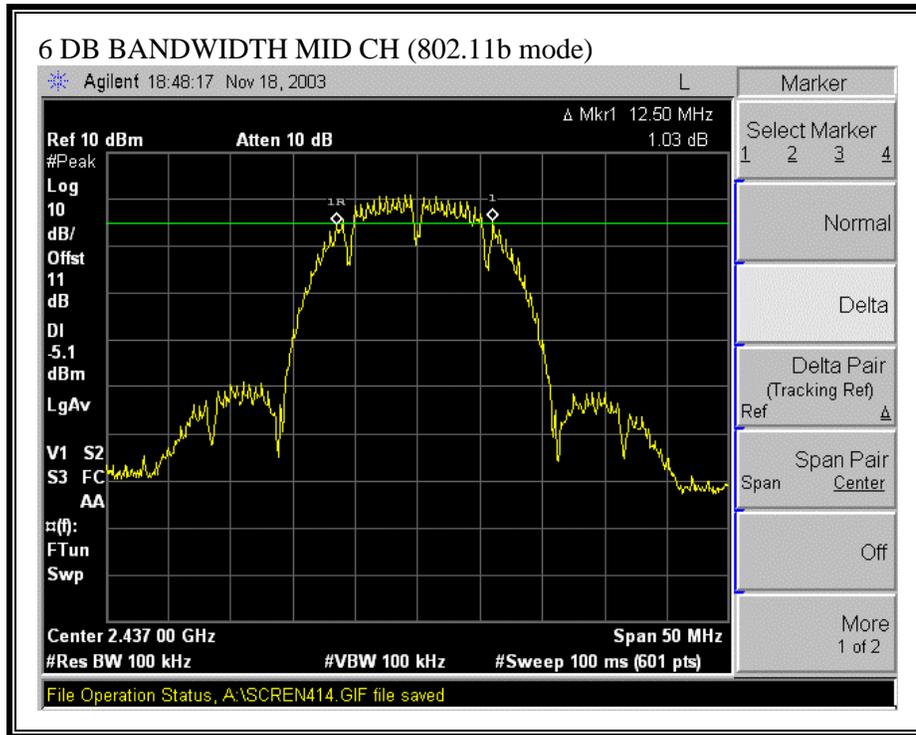


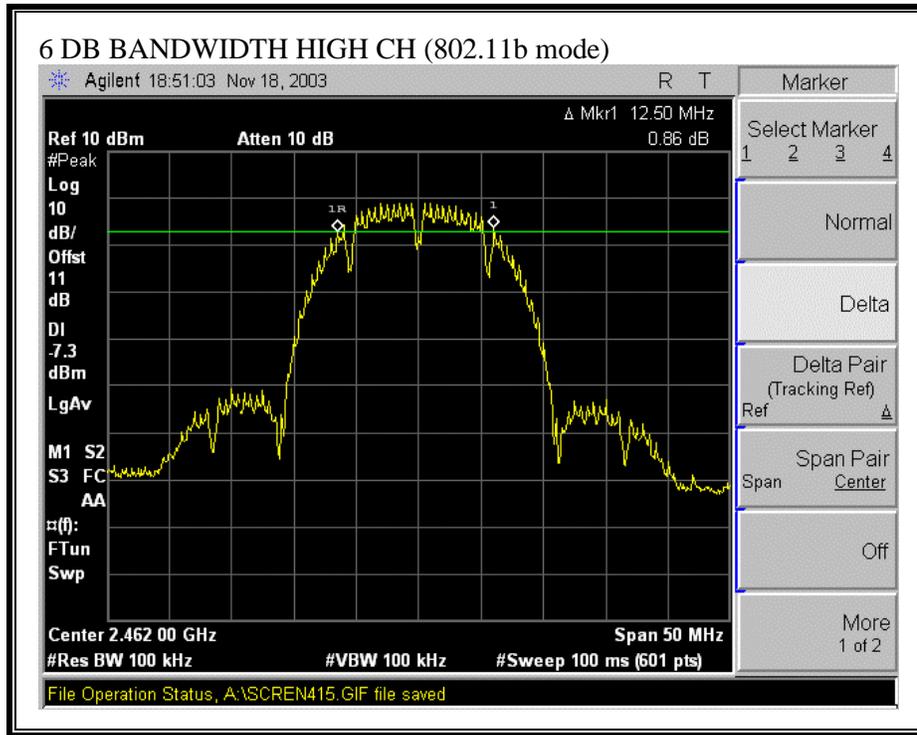


**6 DB BANDWIDTH (802.11g MODE)**

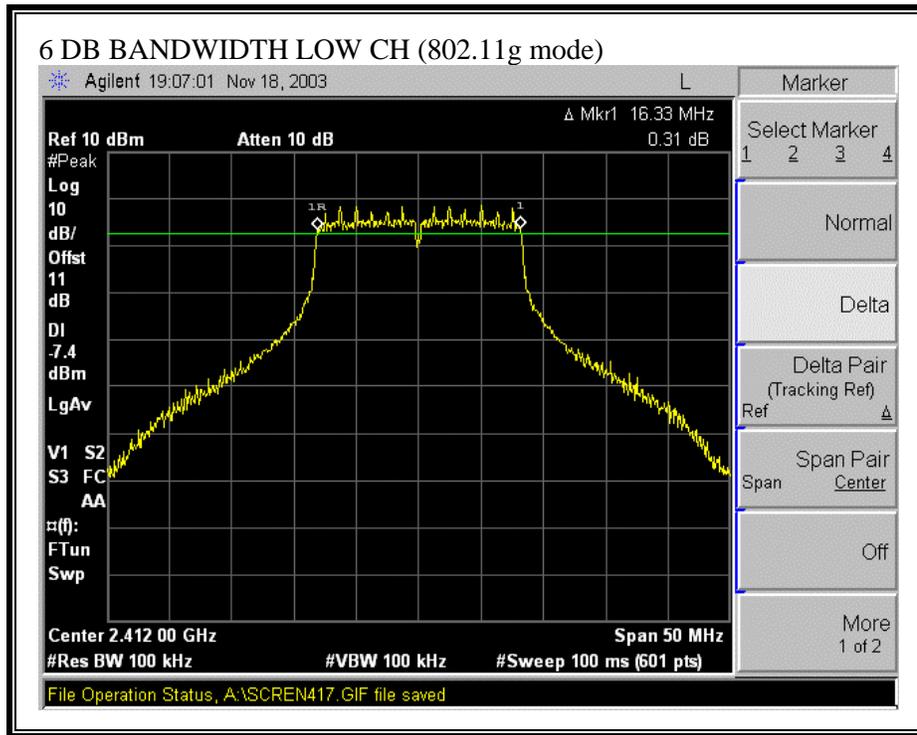

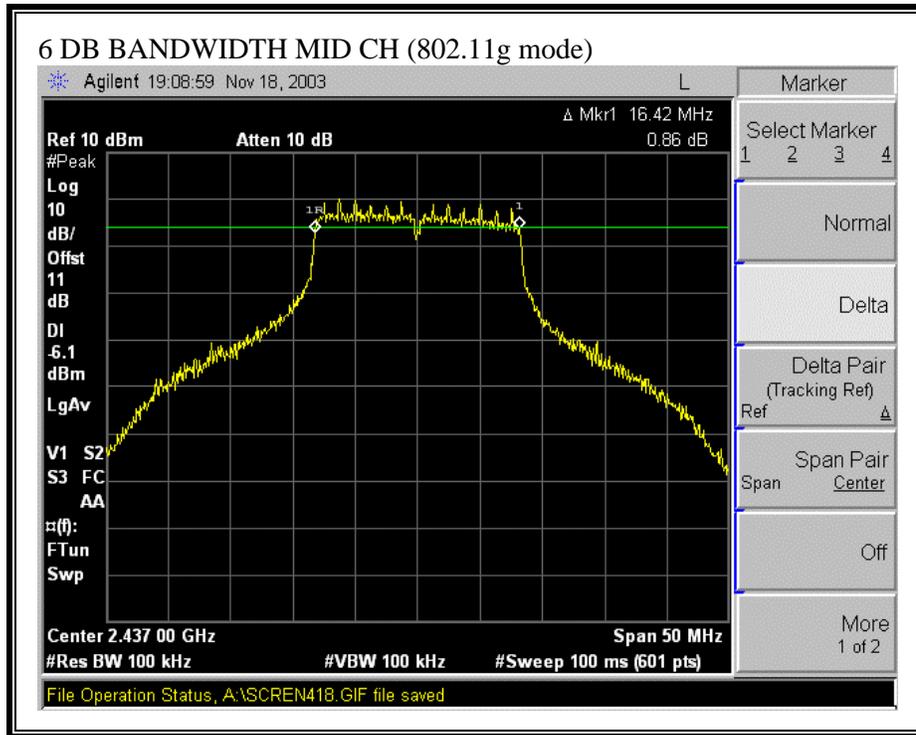

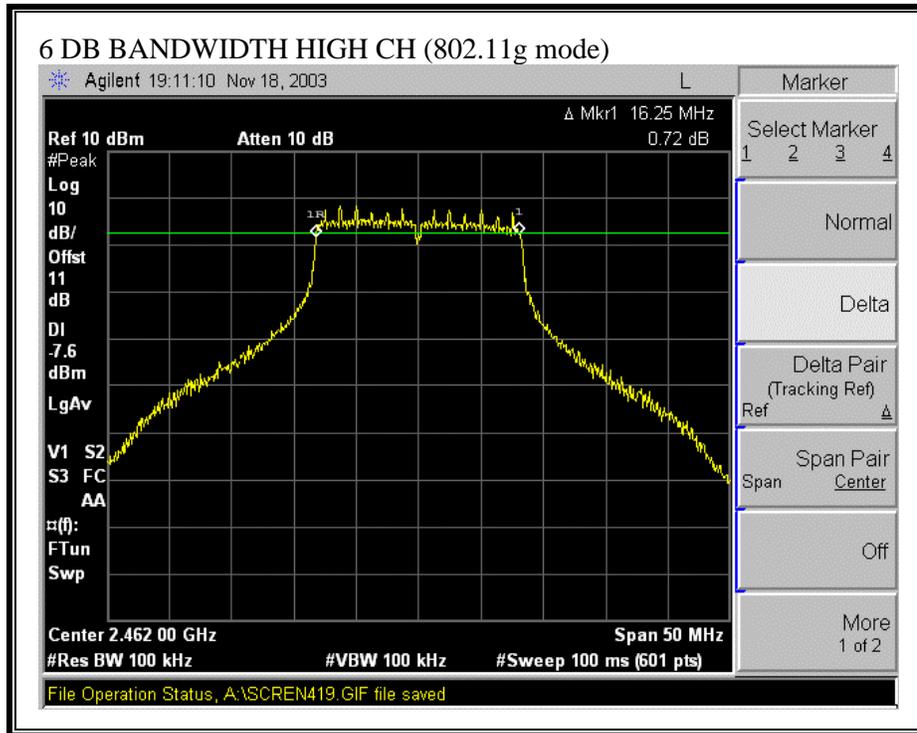

**6 DB BANDWIDTH (802.11g TURBO MODE)**

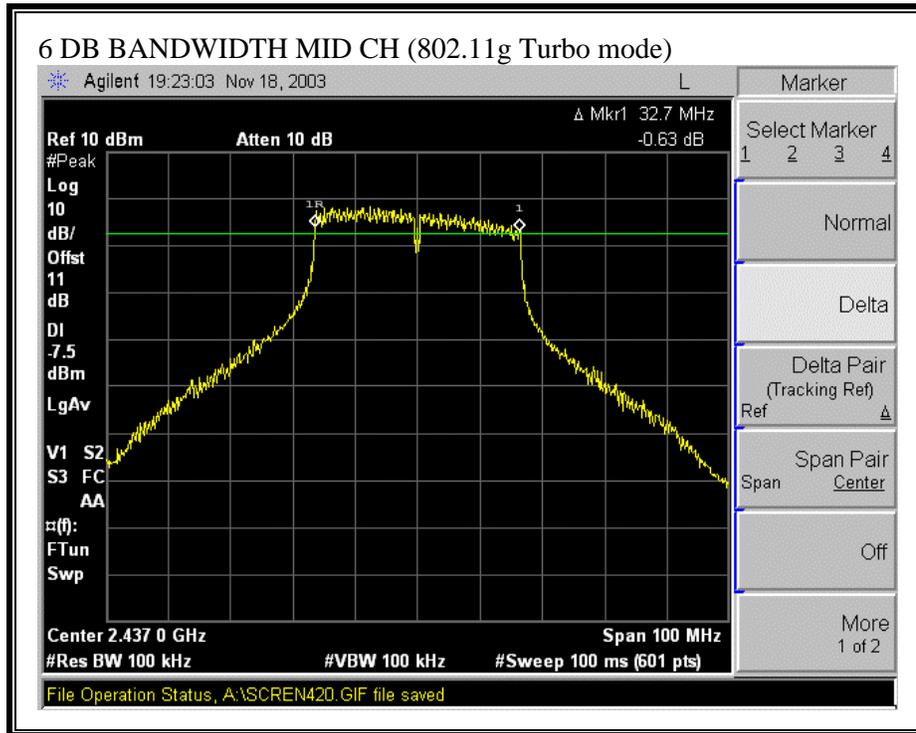

## 7.2. 99% BANDWIDTH

### LIMIT

None; for reporting purposes only.

### TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

### RESULTS

No non-compliance noted:

#### 802.11b Mode

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	15.377
Middle	2437	15.4648
High	2462	15.4966


#### 802.11g Mode


Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	16.8869
Middle	2437	17.0271
High	2462	16.9824


#### 802.11g Turbo Mode

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Middle	2437	35.0342


**99% BANDWIDTH (802.11b MODE)**

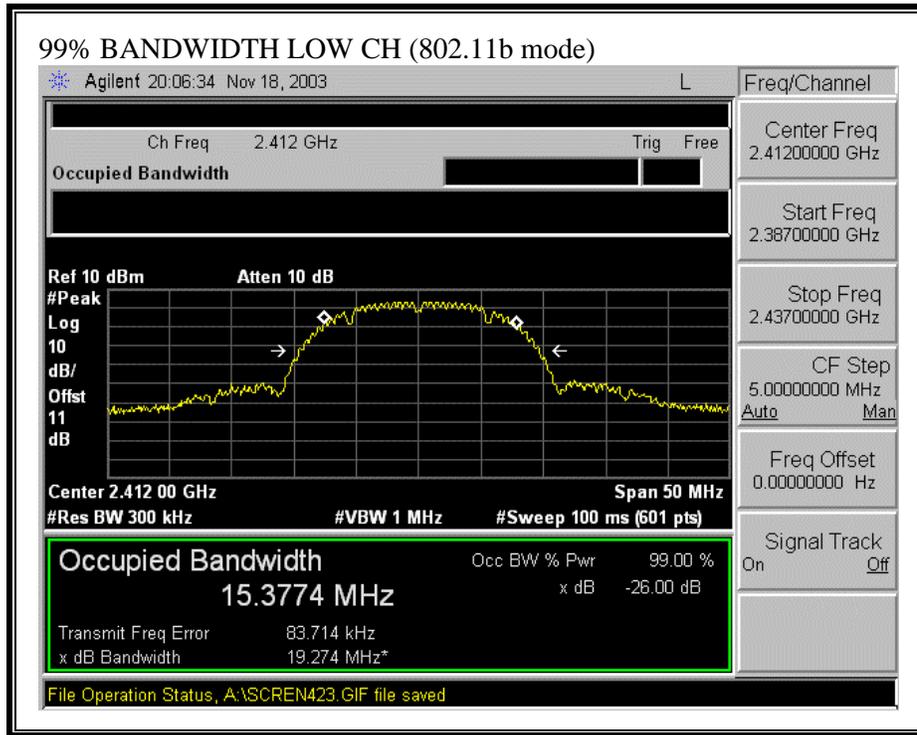


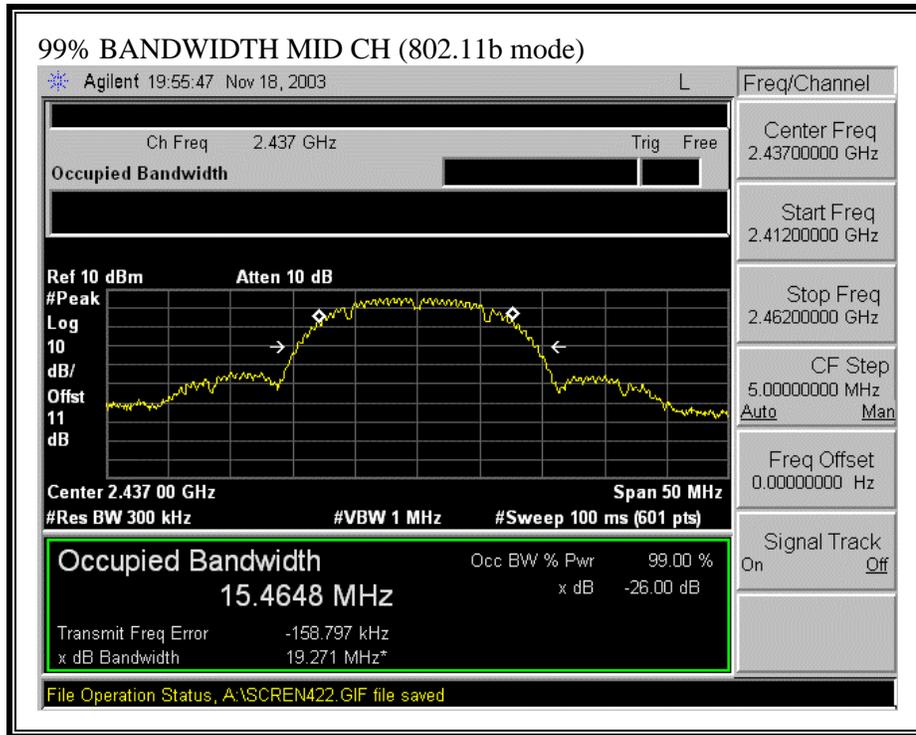


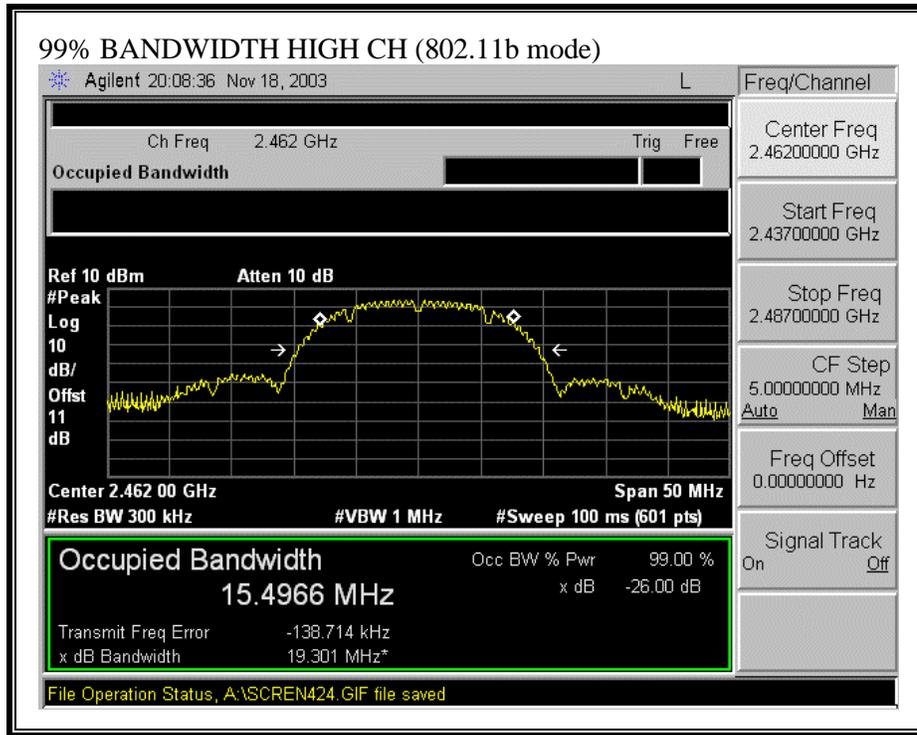


**99% BANDWIDTH (802.11g MODE)**

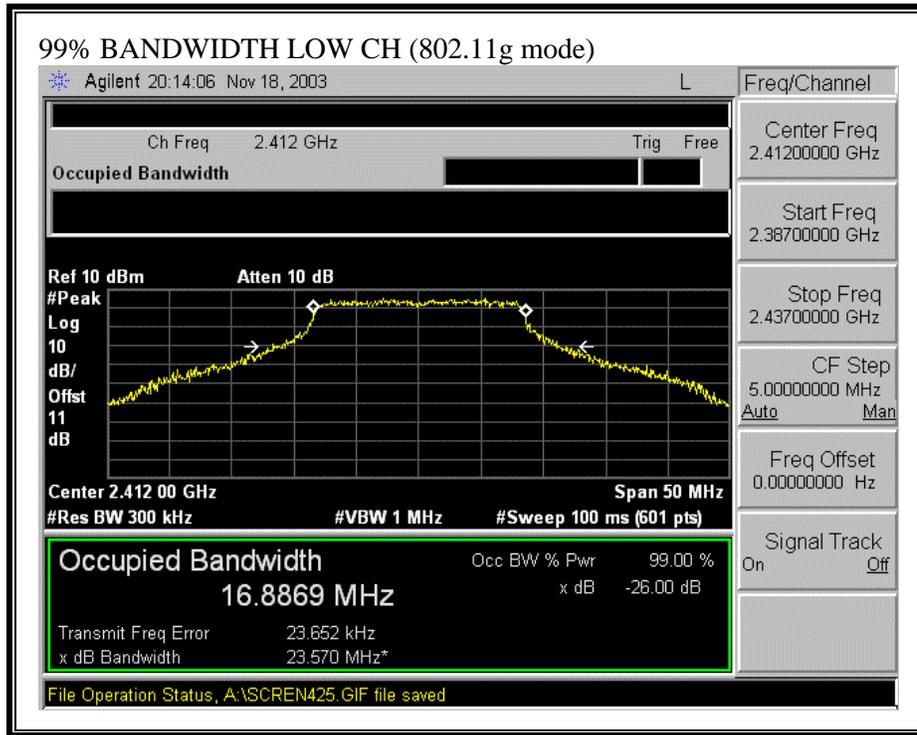

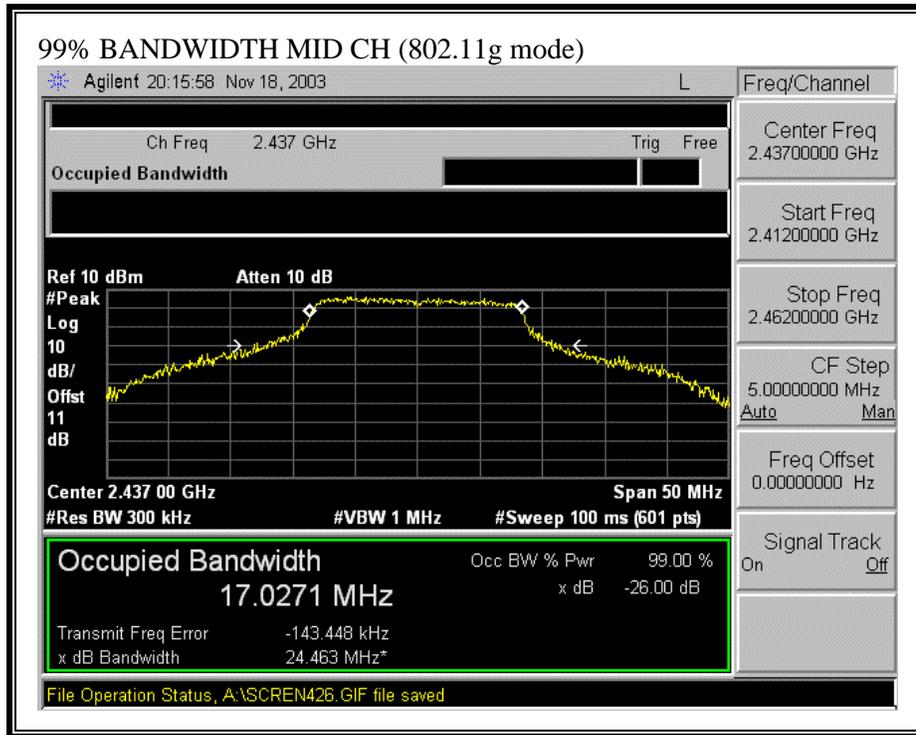

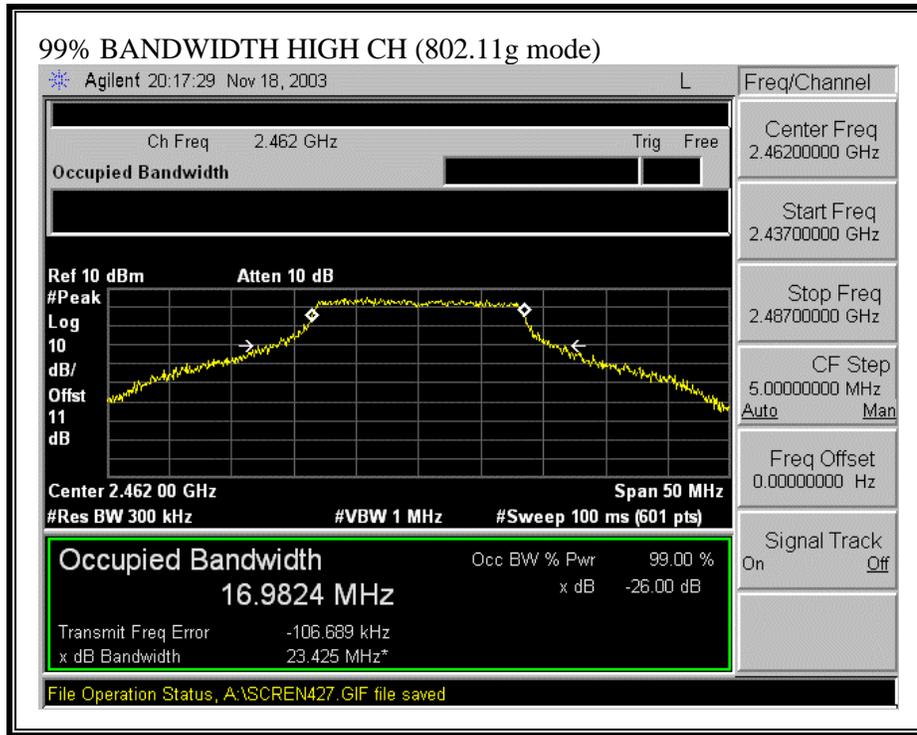

**99% BANDWIDTH (802.11g TURBO MODE)**

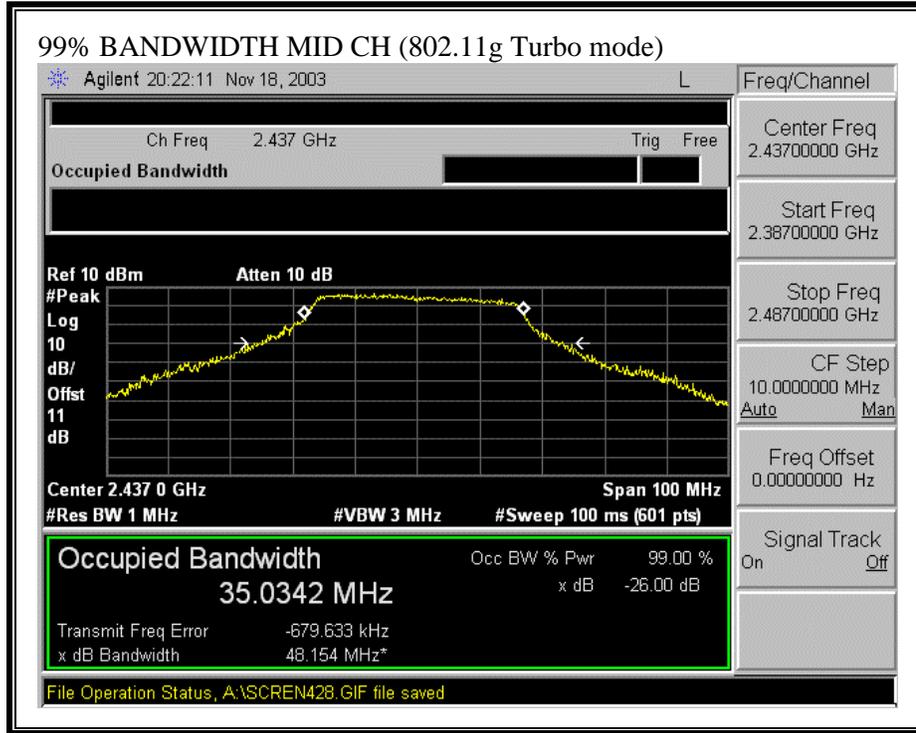

### 7.3. PEAK OUTPUT POWER

#### PEAK POWER LIMIT

§15.247 (b) The maximum peak output power of the intentional radiator shall not exceed the following:

§15.247 (b) (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz , and 5725-5850 MHz bands: 1 watt.

§15.247 (b) (4) Except as shown in paragraphs (b)(3) (i), (ii) and (iii) of this section, if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) or (b)(2) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

The maximum antenna gain is 2.44 dBi, therefore the limit is 30 dBm.

#### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer and the analyzer's internal channel power integration function is used to integrate the power over a bandwidth greater than or equal to the 99% bandwidth.

**RESULTS**

No non-compliance noted:

802.11b Mode

Channel	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	Margin (dB)
Low	2412	15.71	30	-14.29
Middle	2437	17.72	30	-12.28
High	2462	16.00	30	-14.00


802.11g Mode


Channel	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	Margin (dB)
Low	2412	21.13	30	-8.87
Middle	2437	22.00	30	-8.00
High	2462	20.69	30	-9.31


802.11g Turbo Mode

Channel	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	Margin (dB)
Middle	2437	18.82	30	-11.18


**OUTPUT POWER (802.11b MODE)**

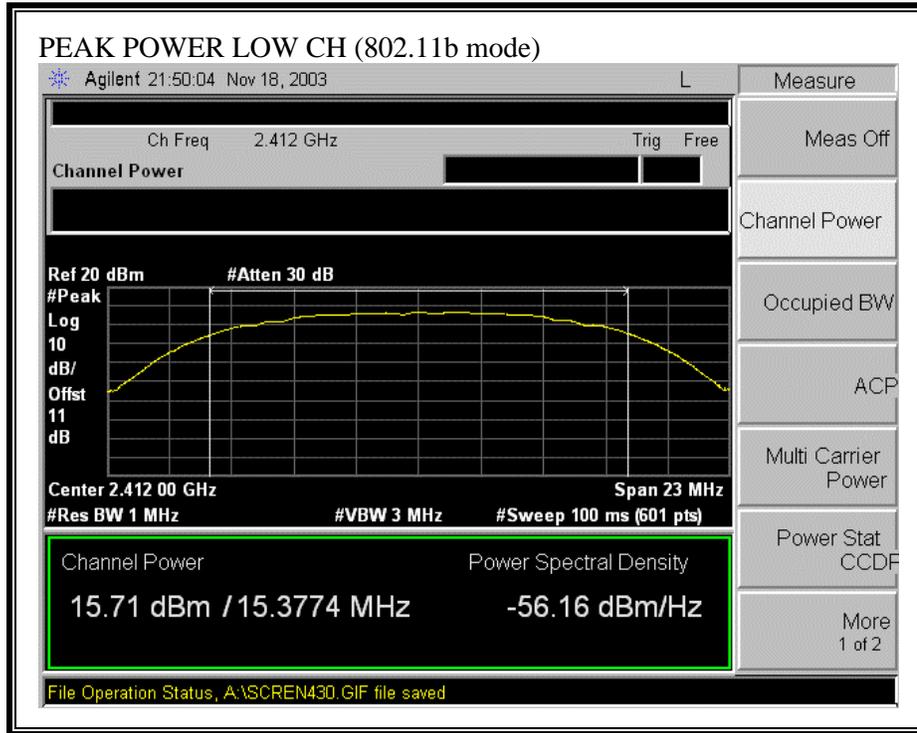


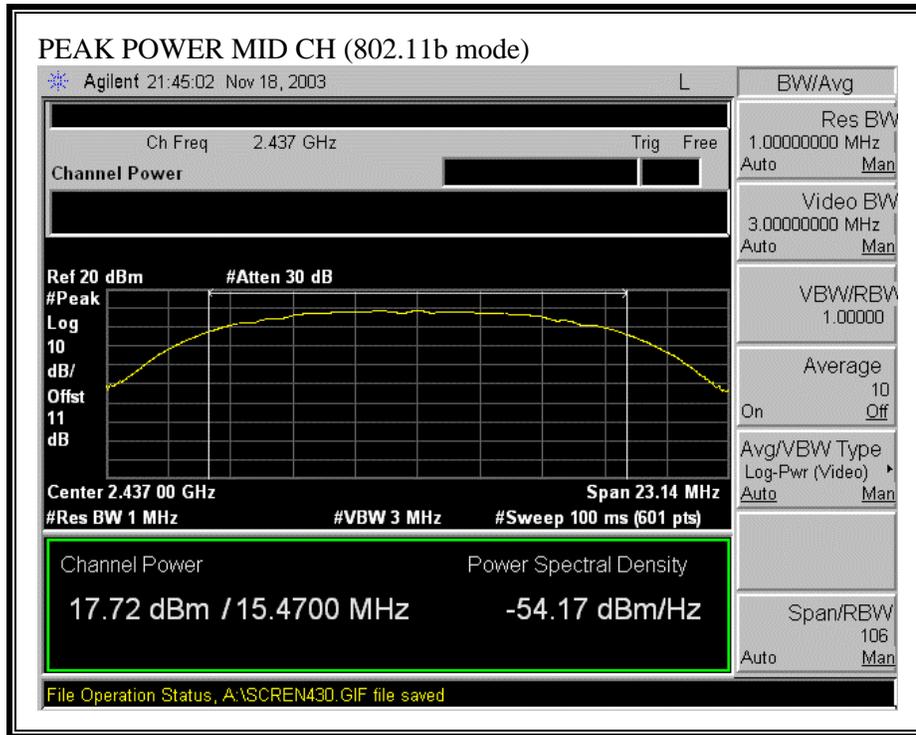


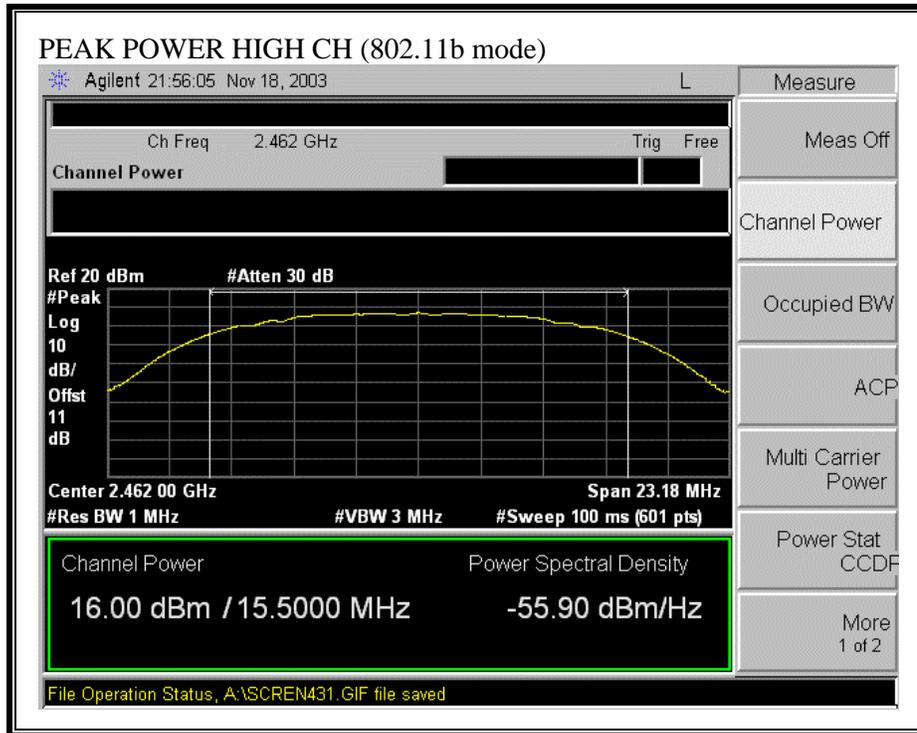


**OUTPUT POWER (802.11g MODE)**

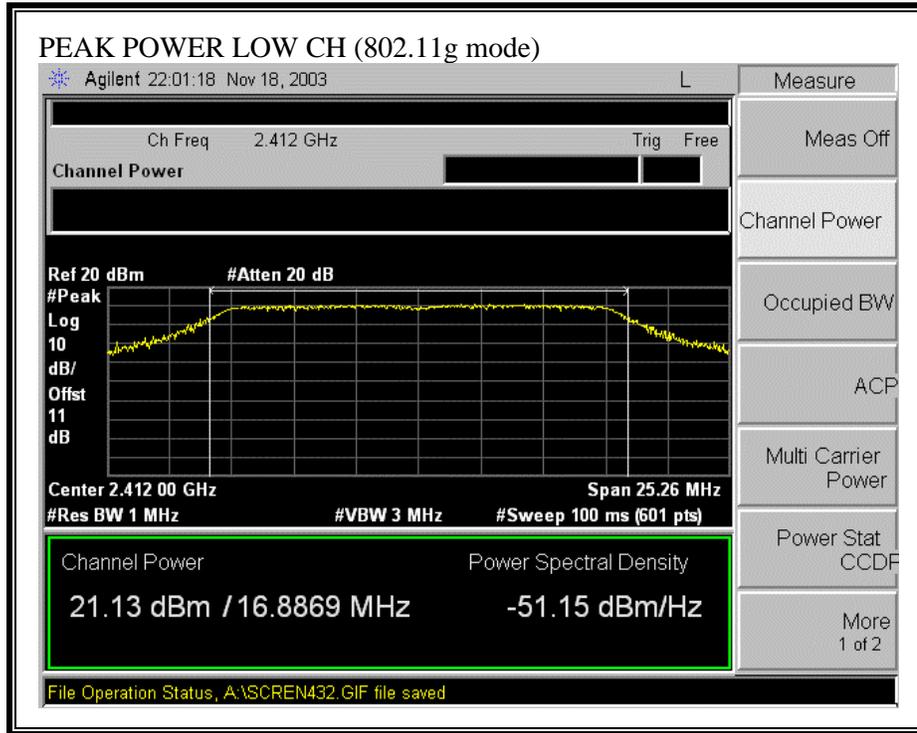

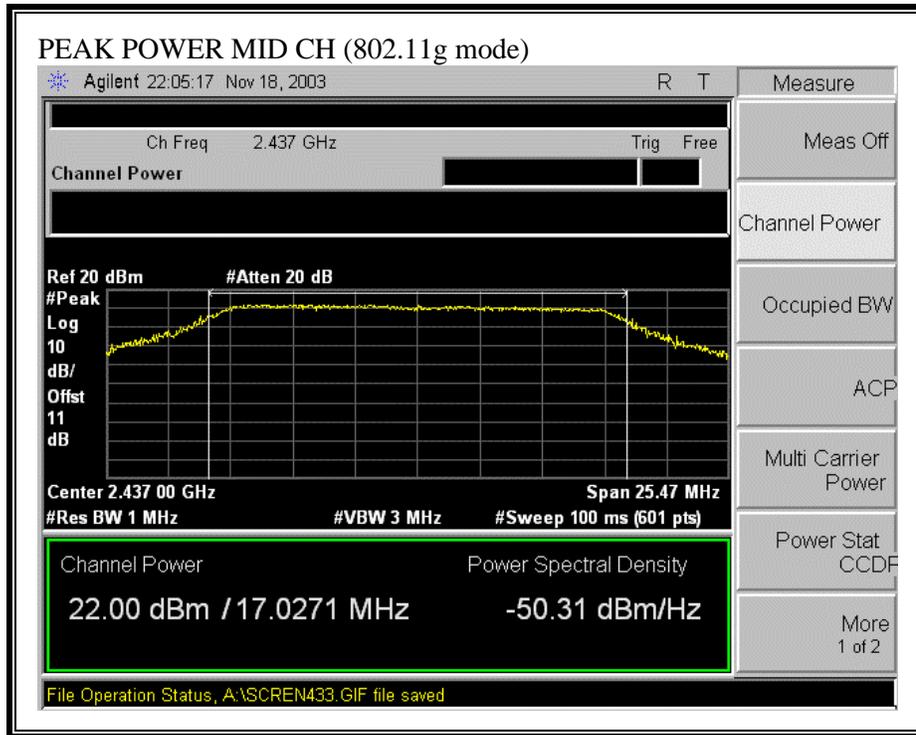

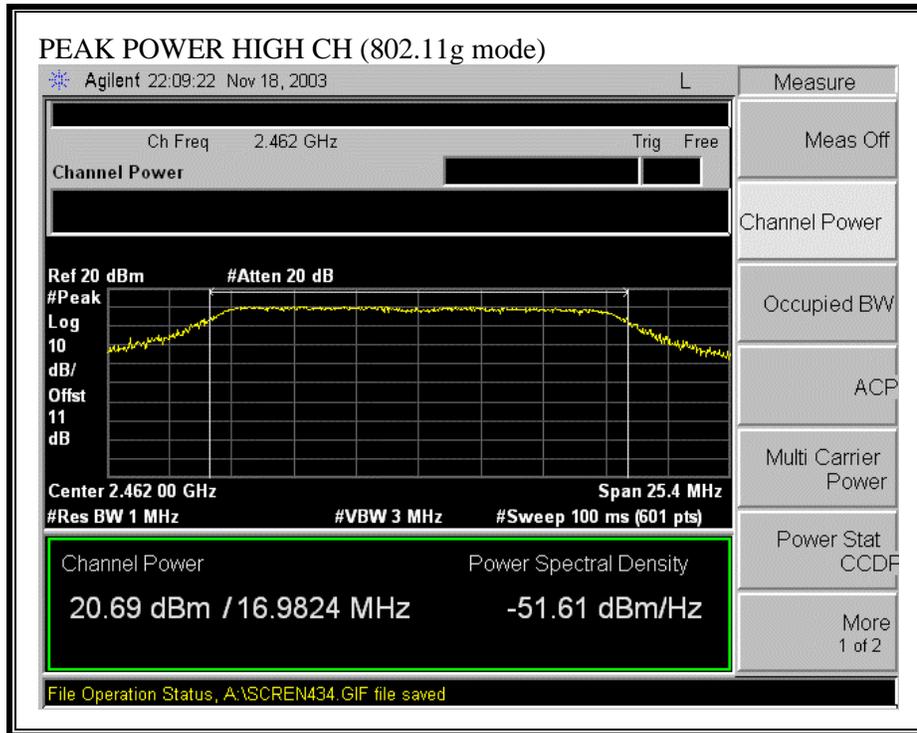

**OUTPUT POWER (802.11g TURBO MODE)**

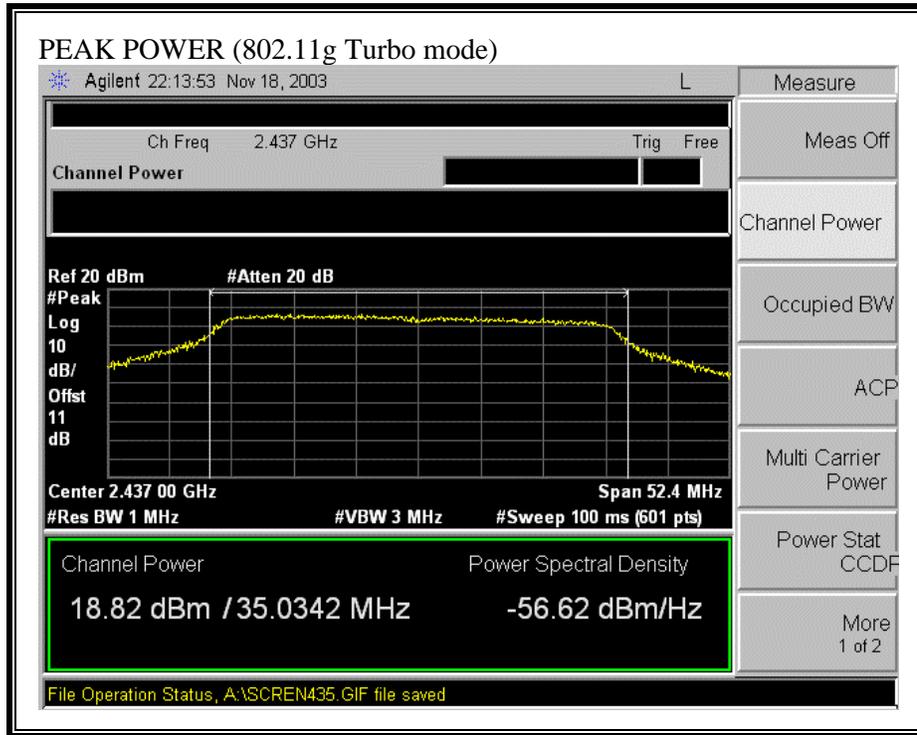

## 7.4. MAXIMUM PERMISSIBLE EXPOSURE

### LIMITS

§1.1310 The criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of §2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm <sup>2</sup> )	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3–3.0 .....	614	1.63	*(100)	6
3.0–30 .....	1842/f	4.89/f	*(900/f <sup>2</sup> )	6
30–300 .....	61.4	0.163	1.0	6
300–1500 .....	.....	.....	f/300	6
1500–100,000 .....	.....	.....	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34 .....	614	1.63	*(100)	30
1.34–30 .....	824/f	2.19/f	*(180/f <sup>2</sup> )	30

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)—Continued

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm <sup>2</sup> )	Averaging time (minutes)
30–300 .....	27.5	0.073	0.2	30
300–1500 .....	.....	.....	f/1500	30
1500–100,000 .....	.....	.....	1.0	30

f = frequency in MHz

\* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

## **CALCULATIONS**

Given

$$E = \sqrt{(30 * P * G) / d}$$

and

$$S = E^2 / 3770$$

where

E = Field Strength in Volts/meter

P = Power in Watts

G = Numeric antenna gain

d = Distance in meters

S = Power Density in milliwatts/square centimeter

Combining equations and rearranging the terms to express the distance as a function of the remaining variables yields:

$$d = \sqrt{((30 * P * G) / (3770 * S))}$$

Changing to units of Power to mW and Distance to cm, using:

$$P \text{ (mW)} = P \text{ (W)} / 1000 \text{ and}$$

$$d \text{ (cm)} = 100 * d \text{ (m)}$$

yields

$$d = 100 * \sqrt{((30 * (P / 1000) * G) / (3770 * S))}$$

$$d = 0.282 * \sqrt{(P * G / S)}$$

where

d = distance in cm

P = Power in mW

G = Numeric antenna gain

S = Power Density in mW/cm<sup>2</sup>

Substituting the logarithmic form of power and gain using:

$$P \text{ (mW)} = 10^{(P \text{ (dBm)} / 10)} \text{ and}$$

$$G \text{ (numeric)} = 10^{(G \text{ (dBi)} / 10)}$$

yields

$$d = 0.282 * 10^{((P + G) / 20)} / \sqrt{S} \quad \text{Equation (1)}$$

where

d = MPE distance in cm

P = Power in dBm

G = Antenna Gain in dBi

S = Power Density Limit in mW/cm<sup>2</sup>

Equation (1) and the measured peak power is used to calculate the MPE distance.

**LIMITS**

From §1.1310 Table 1 (B), S = 1.0 mW/cm<sup>2</sup>

**RESULTS**

No non-compliance noted:

<b>Mode</b>	<b>Power Density Limit (mW/cm<sup>2</sup>)</b>	<b>Output Power (dBm)</b>	<b>Antenna Gain (dBi)</b>	<b>MPE Distance (cm)</b>
802.11b	1.0	17.72	2.44	2.87
802.11g	1.0	22.00	2.44	4.70
802.11g Turbo	1.0	18.82	2.44	3.26

NOTE: For mobile or fixed location transmitters, the minimum separation distance is 20 cm, even if calculations indicate that the MPE distance would be less.

## 7.5. AVERAGE POWER

### AVERAGE POWER LIMIT

None; for reporting purposes only.

### TEST PROCEDURE

The transmitter output is connected to a power meter.

### RESULTS

No non-compliance noted:

The cable assembly insertion loss of 11 dB (including 10 dB pad and 1 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

#### 802.11b Mode

Channel	Frequency (MHz)	Average Power (dBm)
Low	2412	12.24
Middle	2437	14.70
High	2462	12.86

#### 802.11g Mode

Channel	Frequency (MHz)	Average Power (dBm)
Low	2412	12.35
Middle	2437	14.35
High	2462	12.45

#### 802.11g Turbo Mode

Channel	Frequency (MHz)	Average Power (dBm)
Middle	2437	12.67

## 7.6. PEAK POWER SPECTRAL DENSITY

### LIMIT

§15.247 (d) For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer, the maximum level in a 3 kHz bandwidth is measured with the spectrum analyzer using RBW = 3 kHz and VBW > 3 kHz, sweep time = span / 3 kHz, and video averaging is turned off. The PPSD is the highest level found across the emission in any 3 kHz band.

### RESULTS

No non-compliance noted:

#### 802.11b Mode

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-9.46	8	-17.46
Middle	2437	-9.57	8	-17.57
High	2462	-9.35	8	-17.35


#### 802.11g Mode


Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-8.28	8	-16.28
Middle	2437	-7.56	8	-15.56
High	2462	-7.89	8	-15.89


#### 802.11g Turbo Mode

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)
Middle	2437	-9.98	8	-17.98


**PEAK POWER SPECTRAL DENSITY (802.11b MODE)**

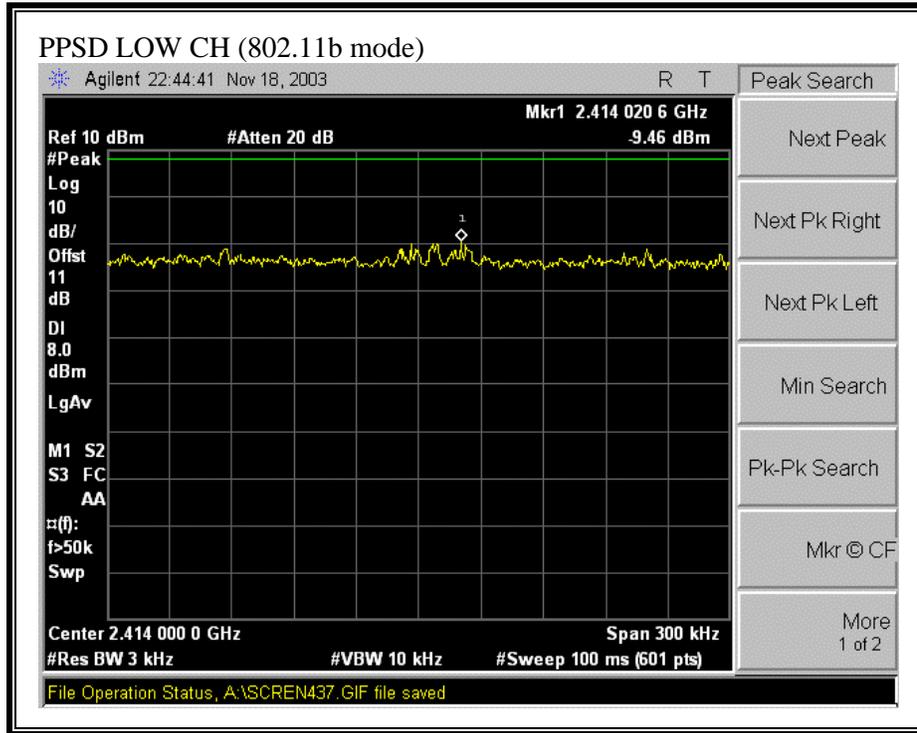


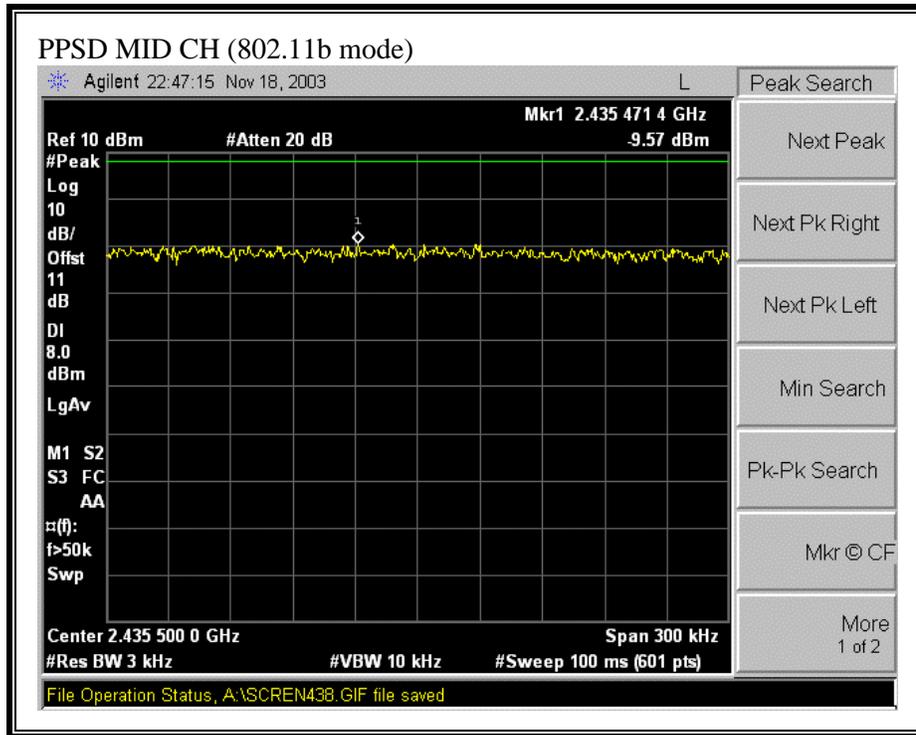


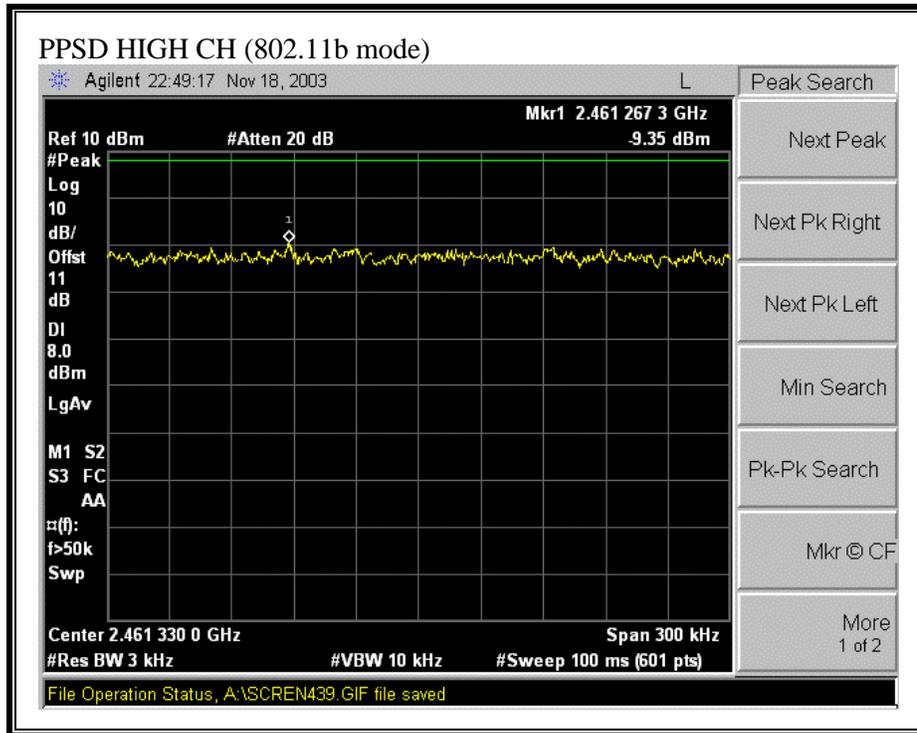


**PEAK POWER SPECTRAL DENSITY (802.11g MODE)**

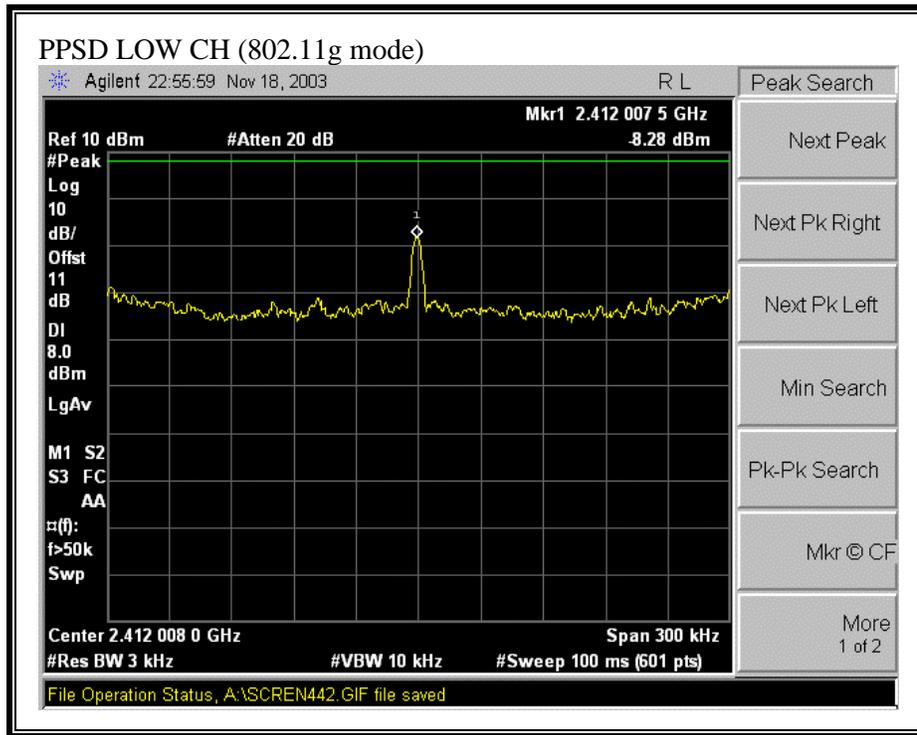

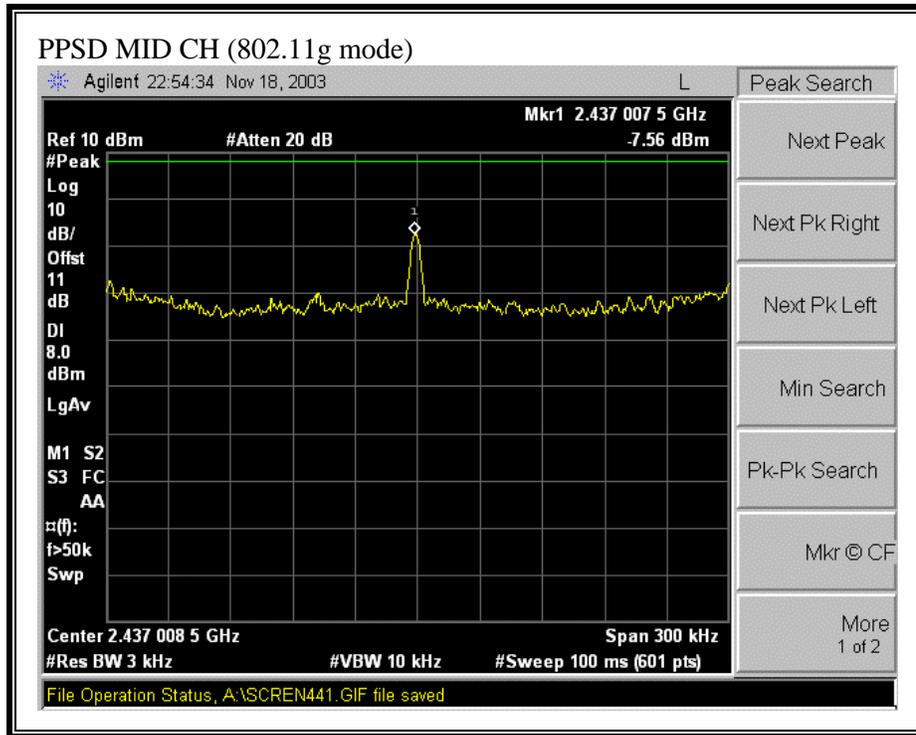

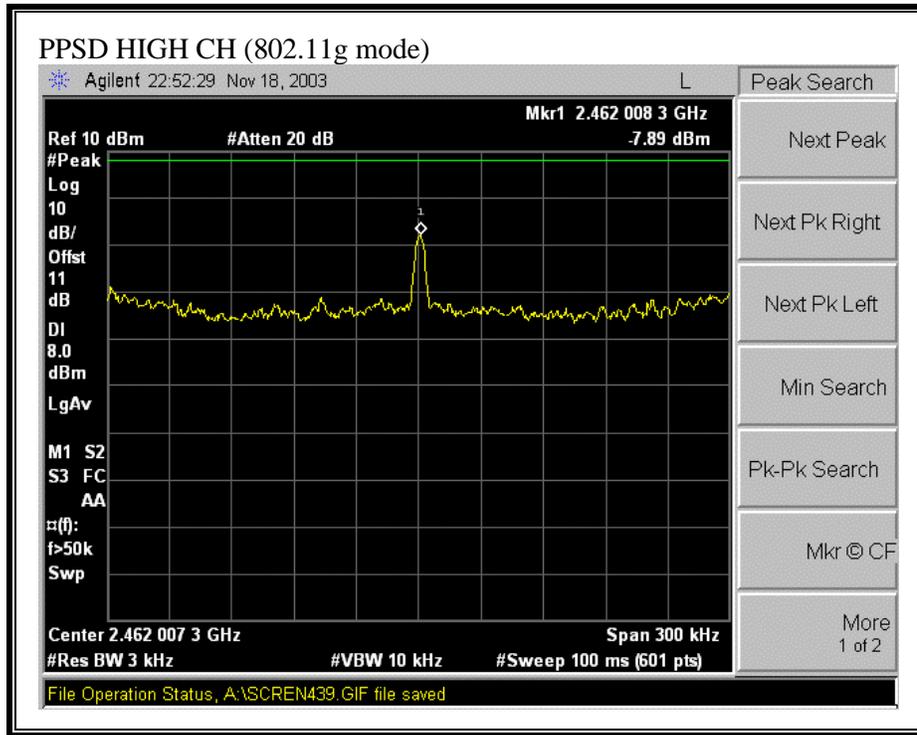

**PEAK POWER SPECTRAL DENSITY (802.11g TURBO MODE)**

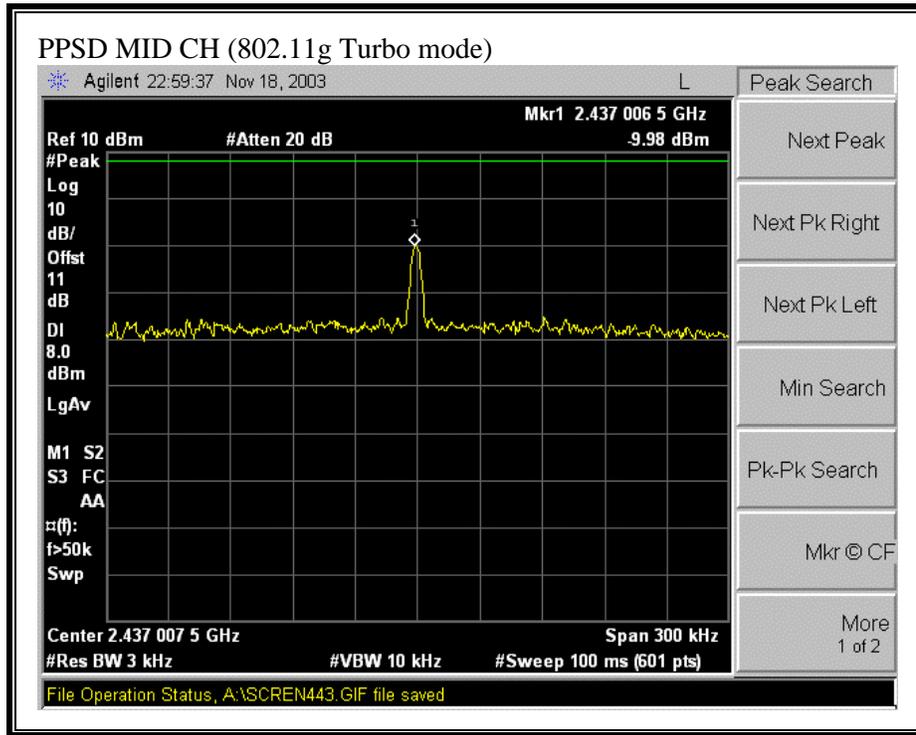

## 7.7. CONDUCTED SPURIOUS EMISSIONS

### LIMITS

§15.247 (c) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 100 kHz.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

### RESULTS


No non-compliance noted:

**SPURIOUS EMISSIONS, LOW CHANNEL (802.11b MODE)**

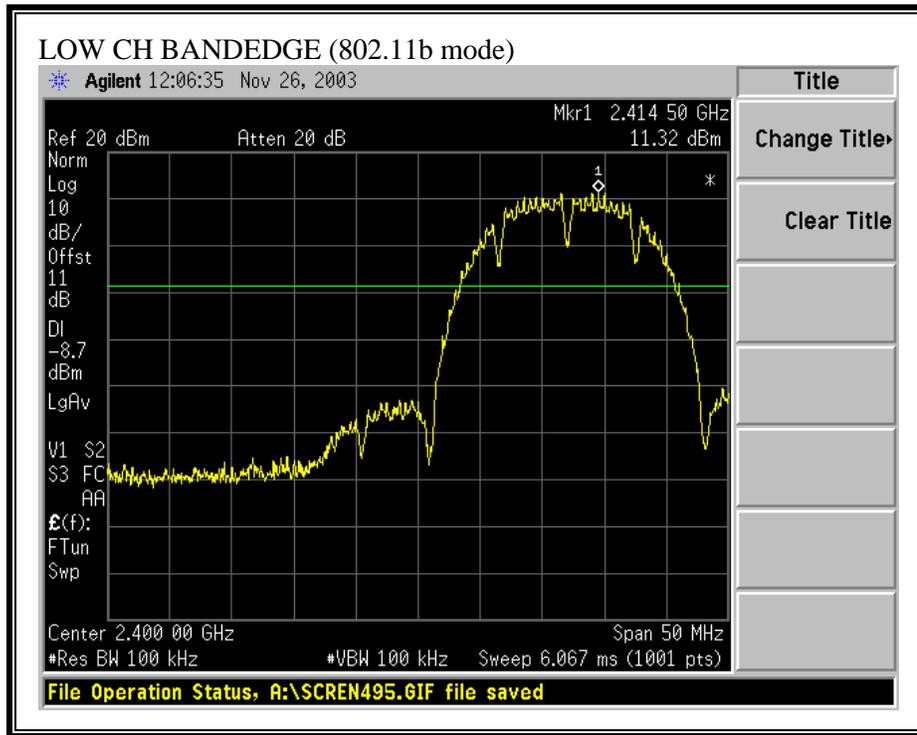


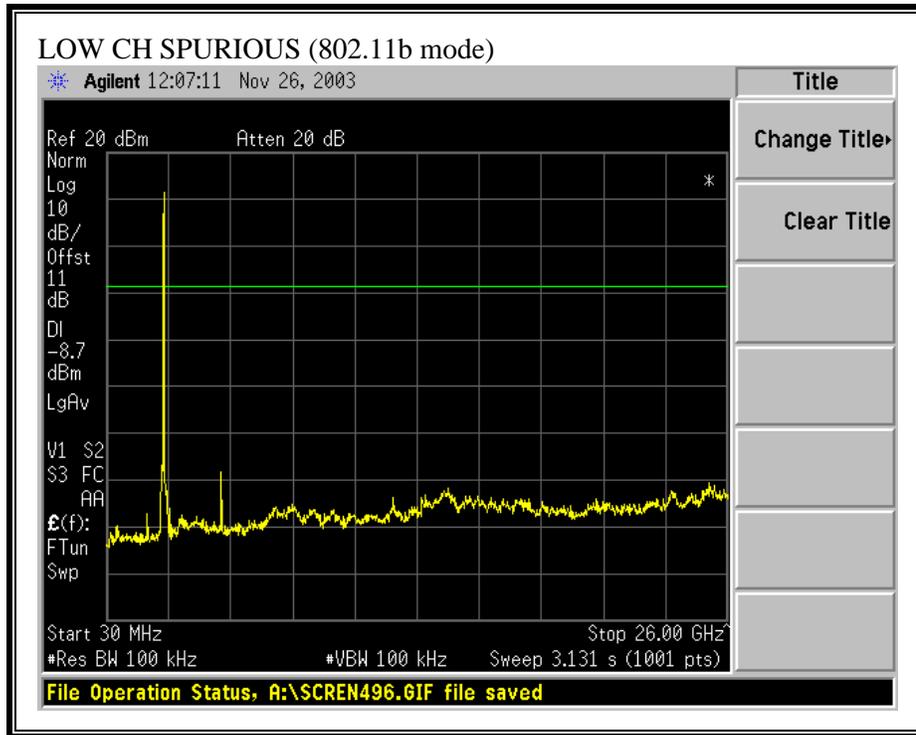




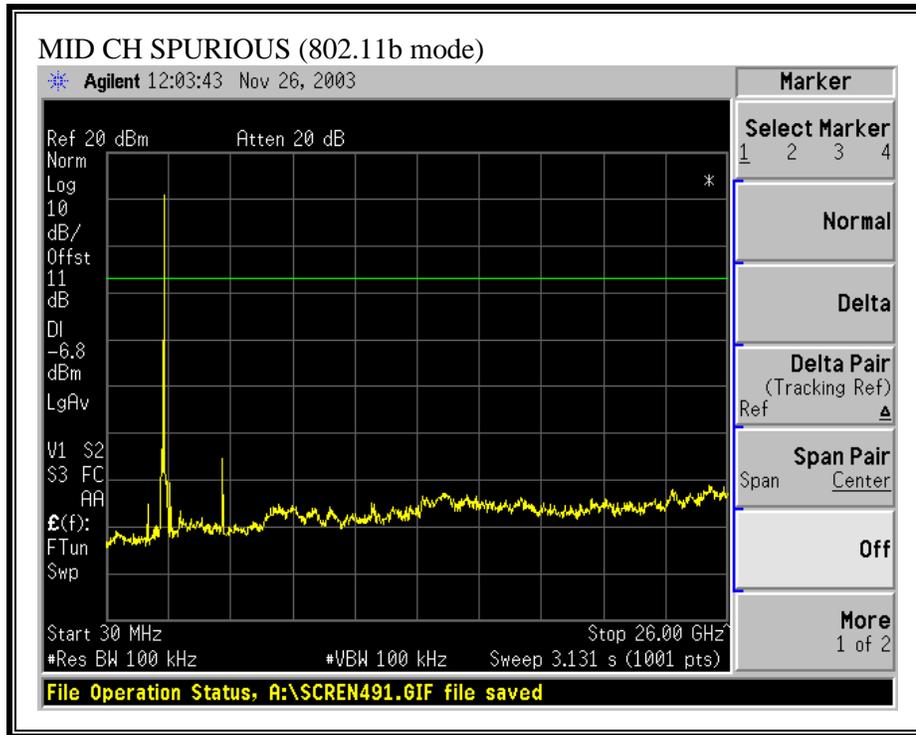



**SPURIOUS EMISSIONS, HIGH CHANNEL (802.11b MODE)**

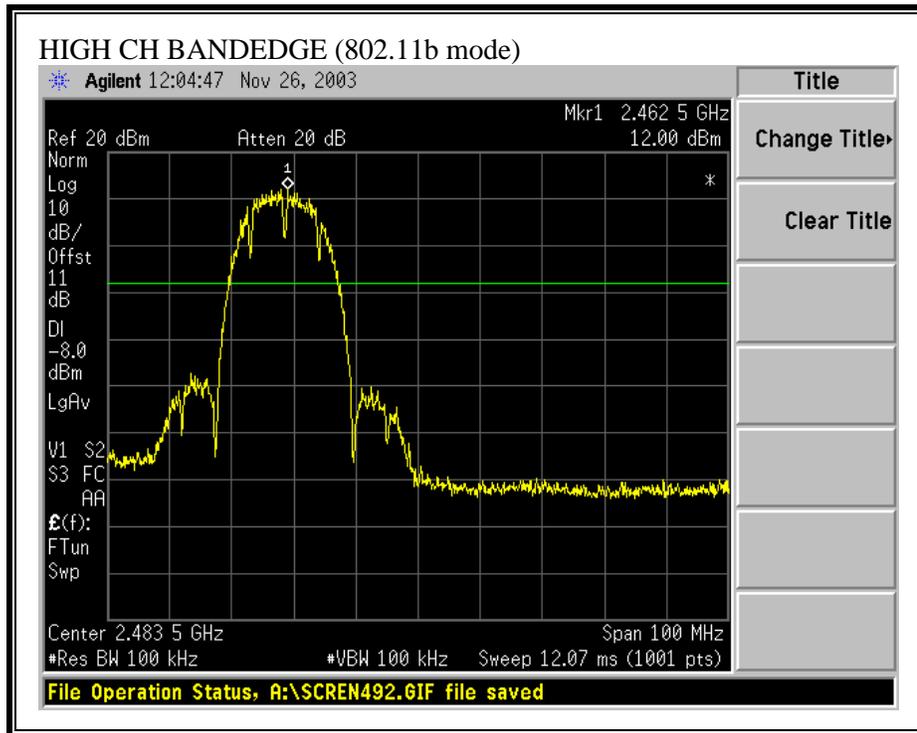

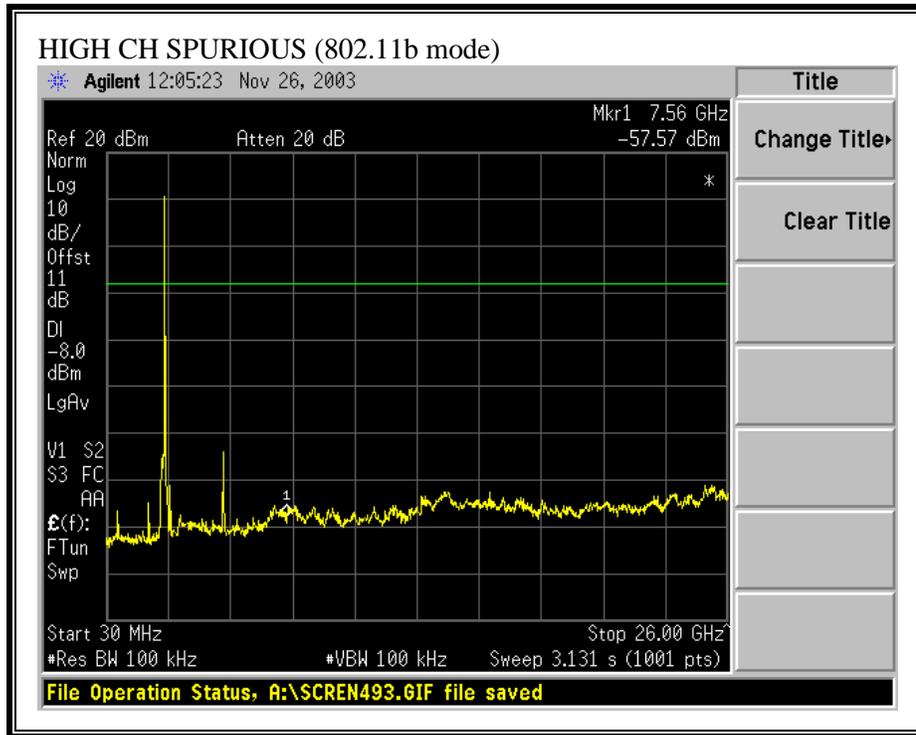



**SPURIOUS EMISSIONS, LOW CHANNEL (802.11g MODE)**

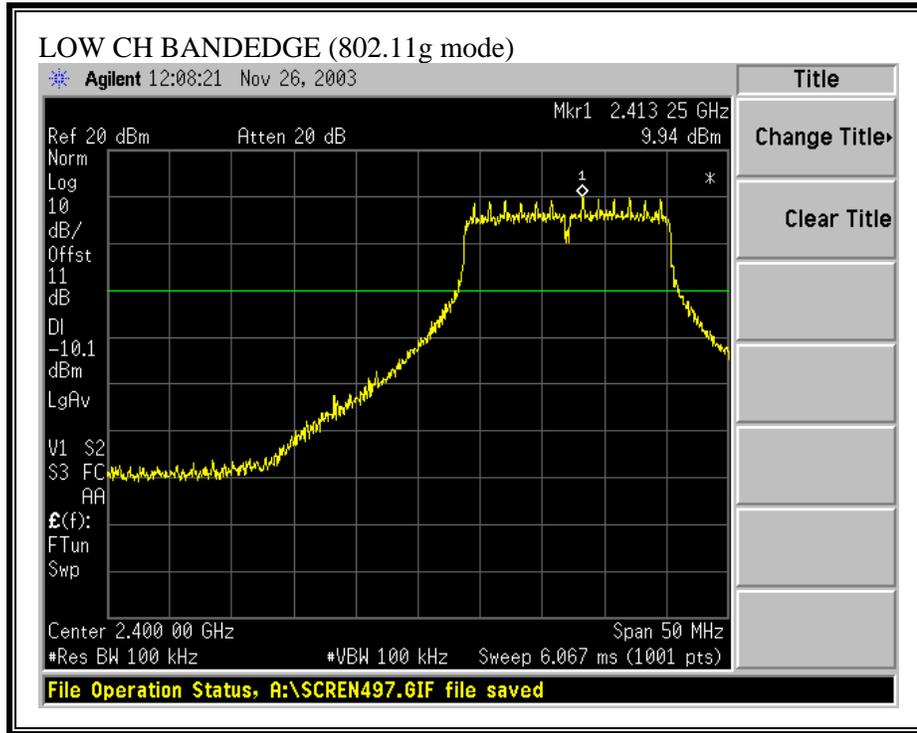

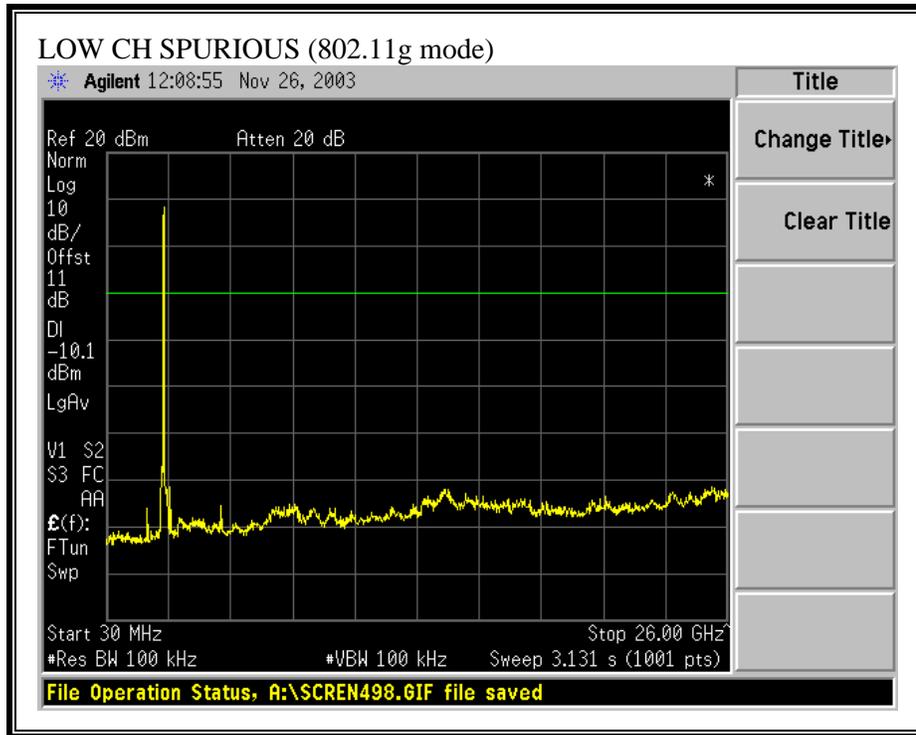


**SPURIOUS EMISSIONS, MID CHANNEL (802.11g MODE)**

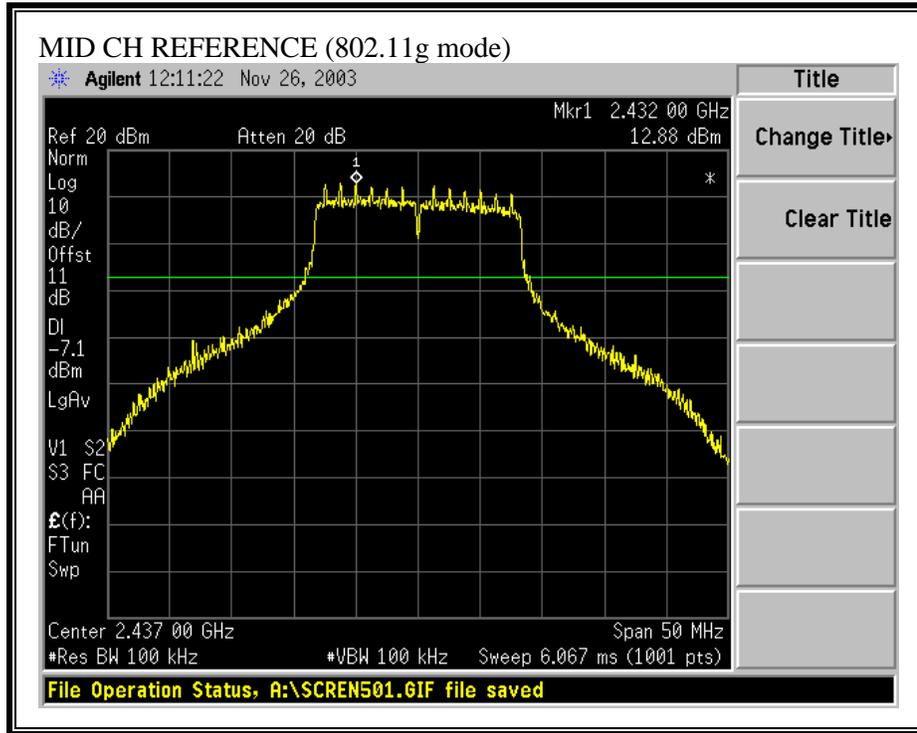


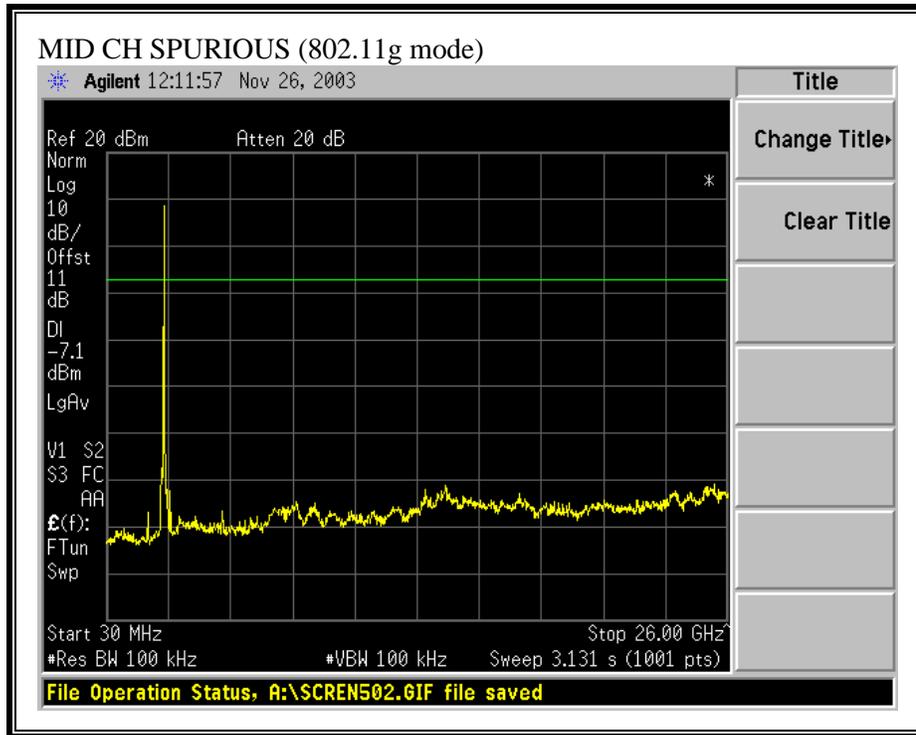




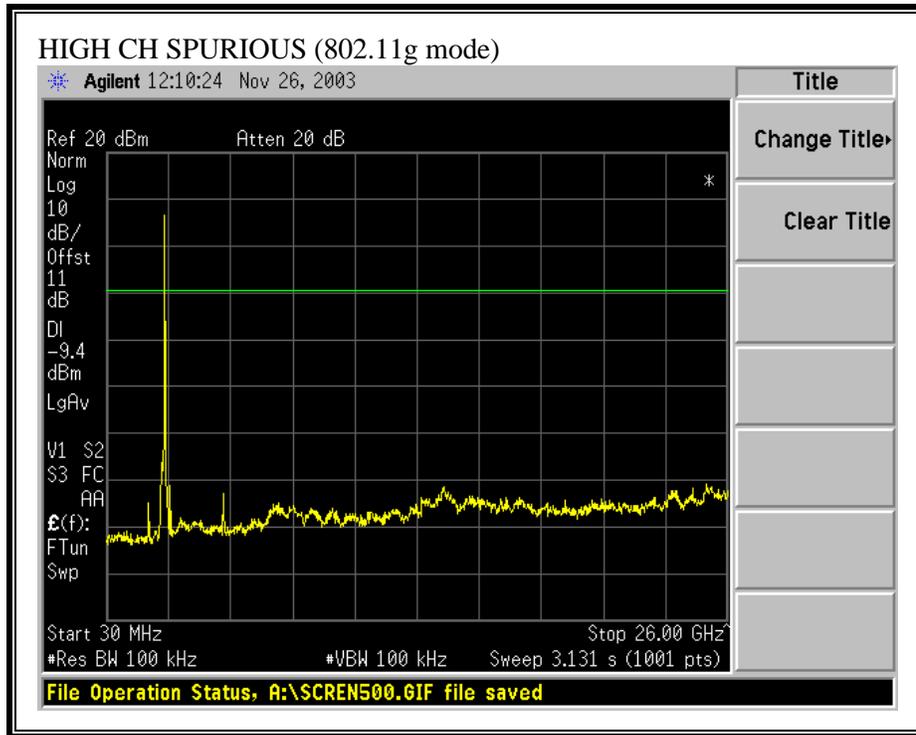

**SPURIOUS EMISSIONS, MID CHANNEL (802.11g TURBO MODE)**

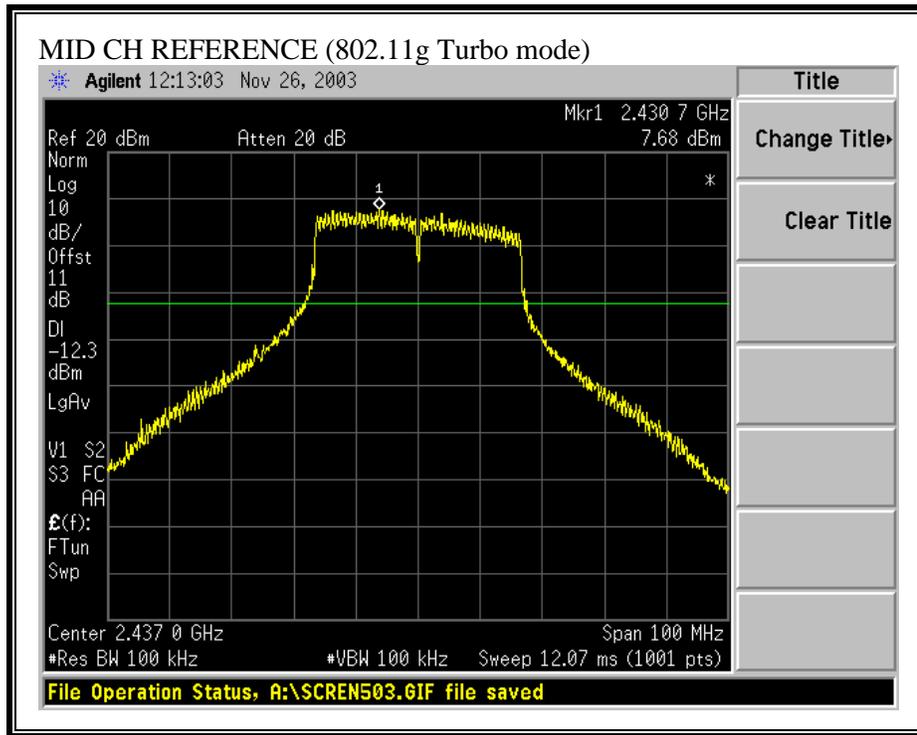

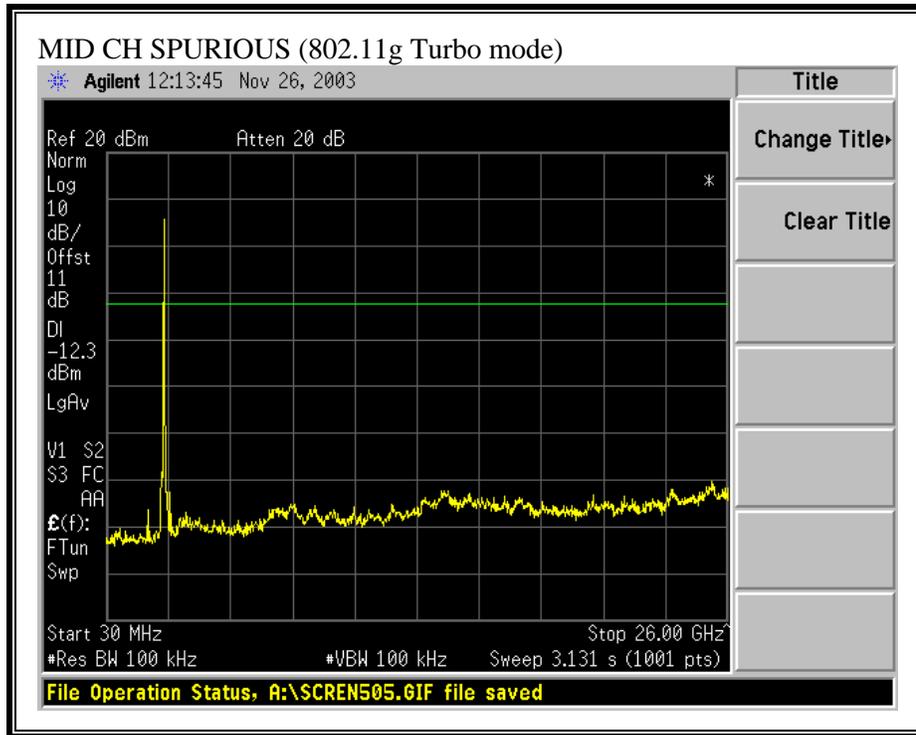

## 7.8. RADIATED EMISSIONS

### 7.8.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS

#### LIMITS

§15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41			

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup> Above 38.6

§15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

## **TEST PROCEDURE**

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.


The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.


## **RESULTS**

No non-compliance noted:


### 7.8.2. TRANSMITTER RADIATED EMISSIONS ABOVE 1 GHZ


#### RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, HORIZONTAL)

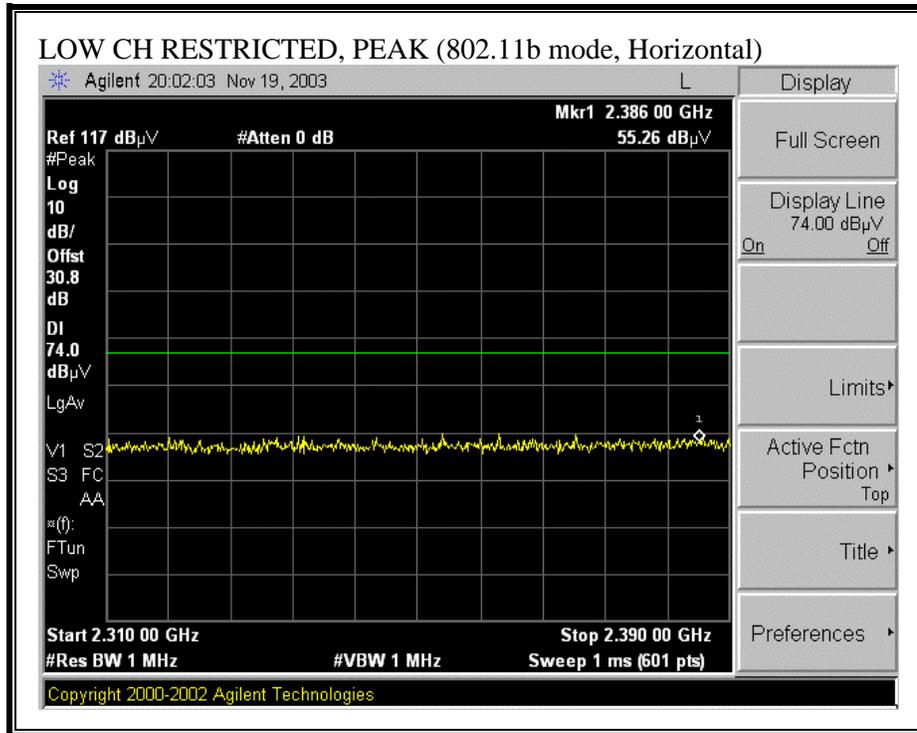

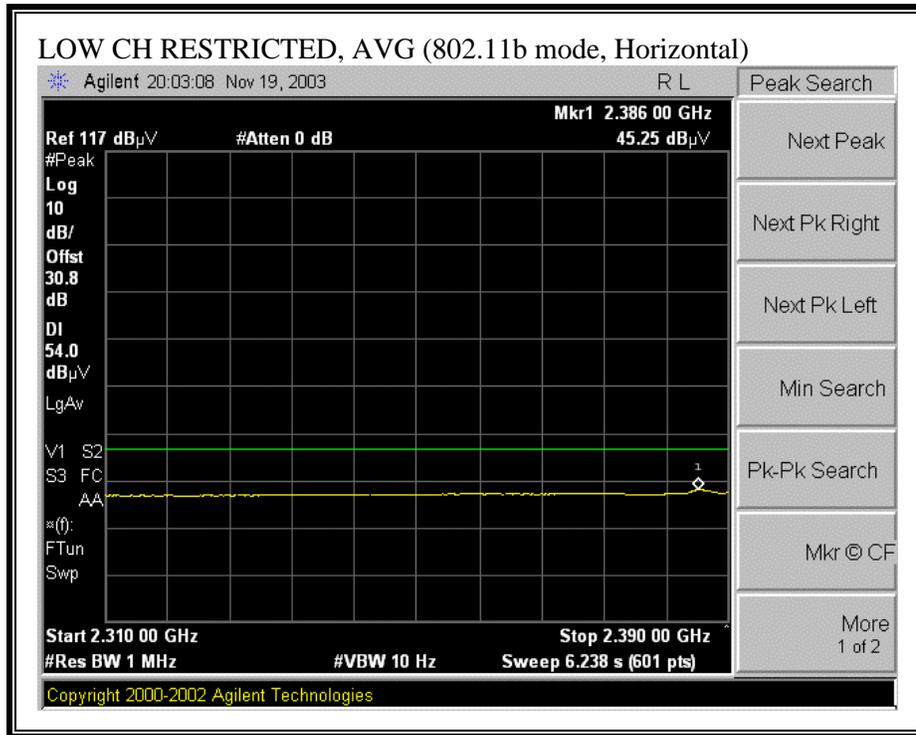



**RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, VERTICAL)**

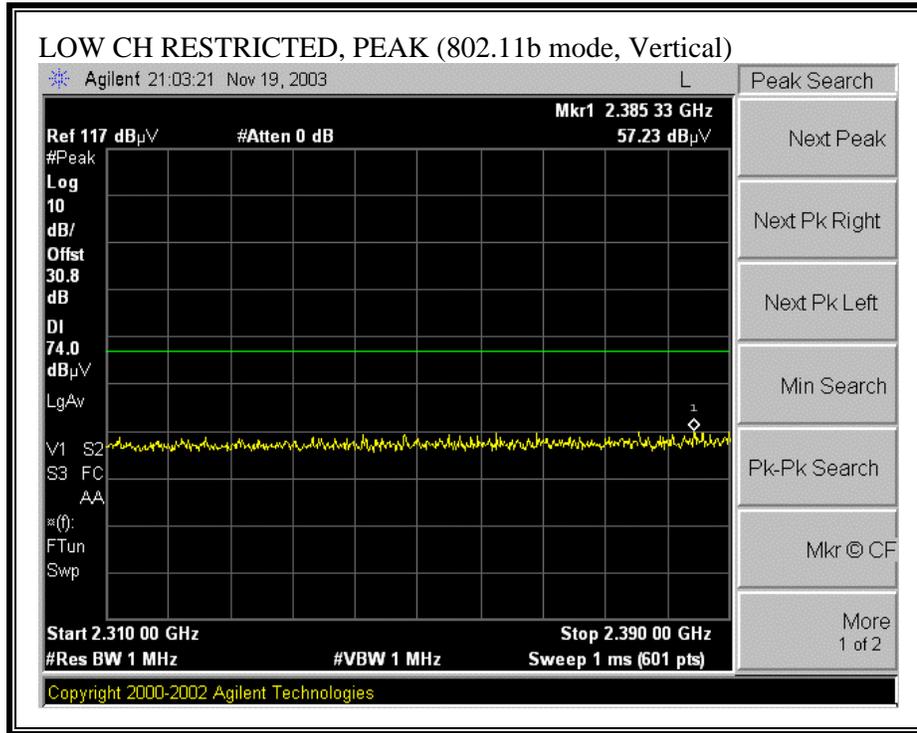

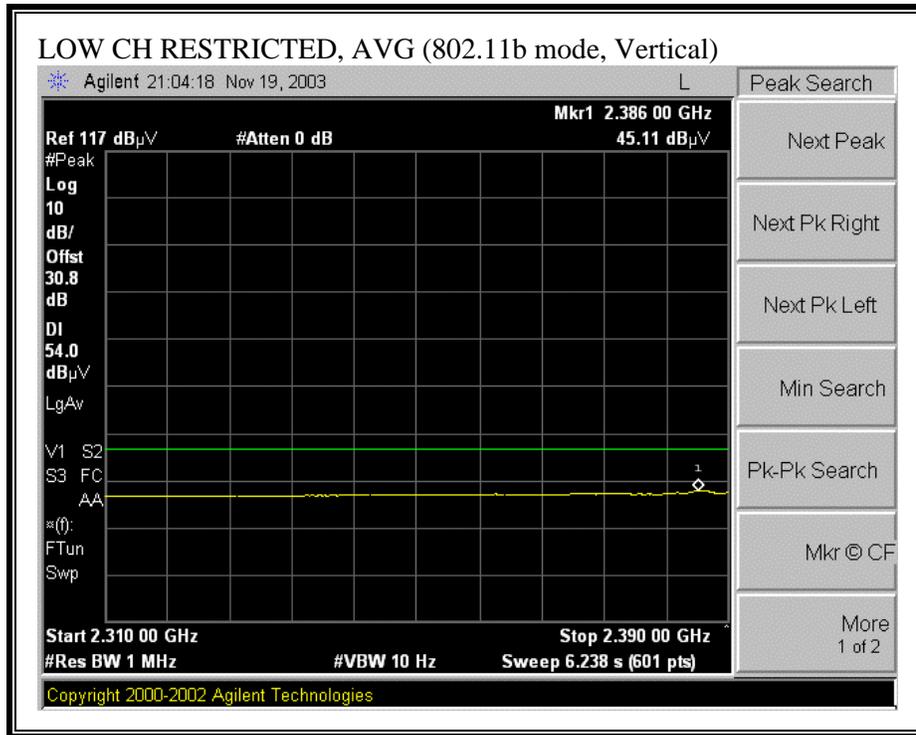



**RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, HORIZONTAL)**

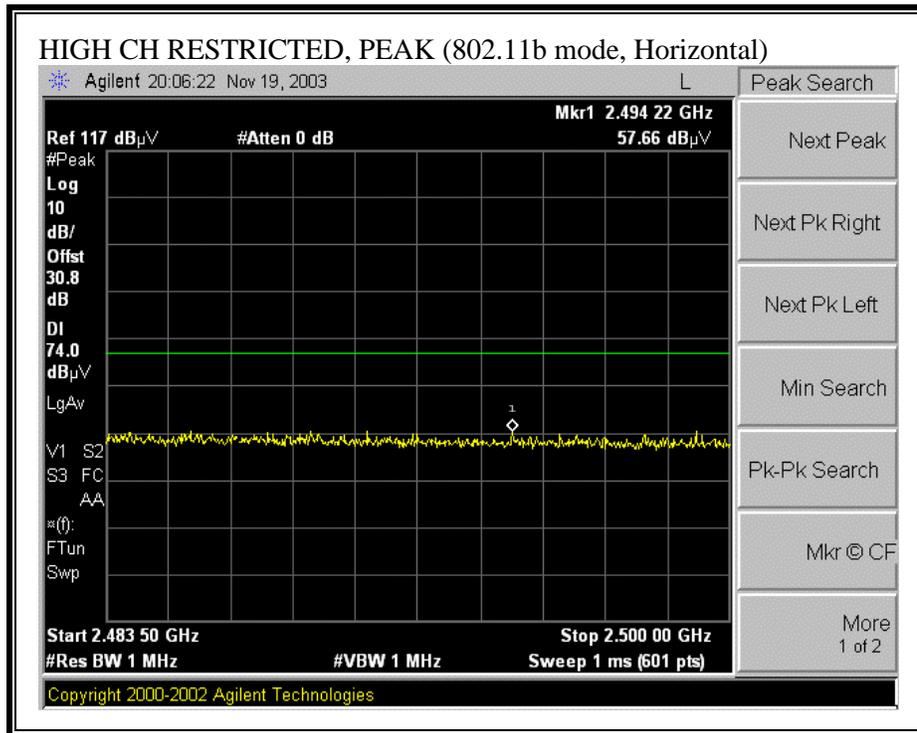

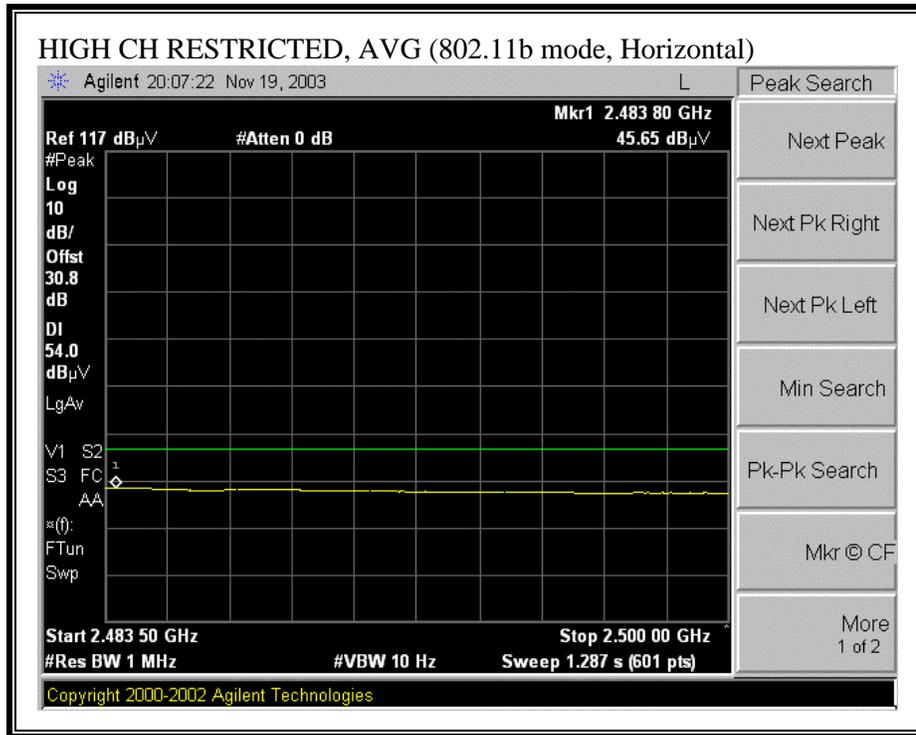

**RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, VERTICAL)**

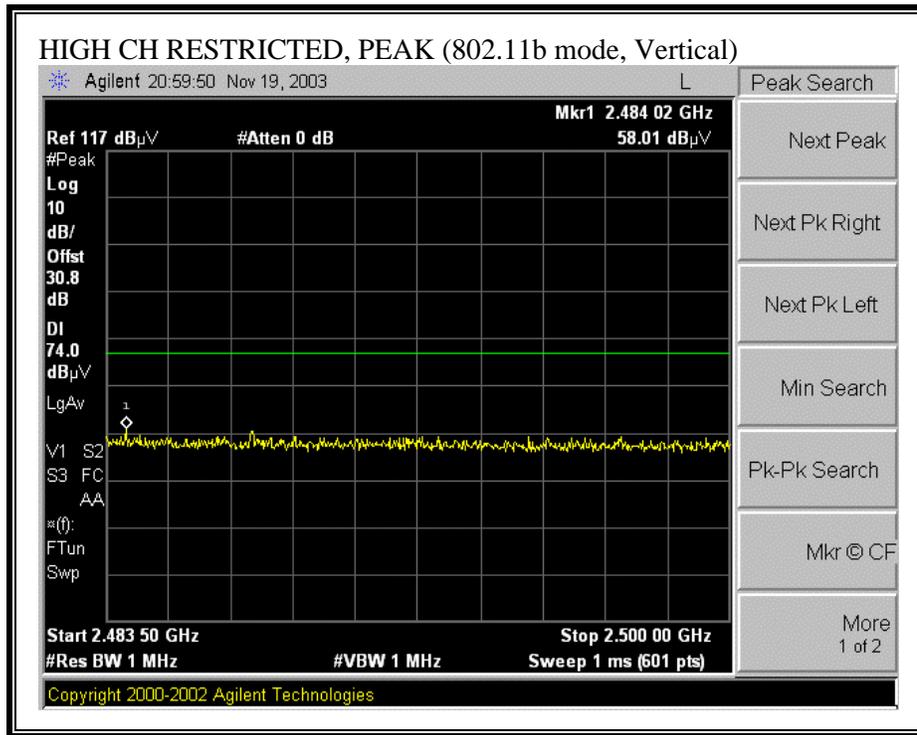


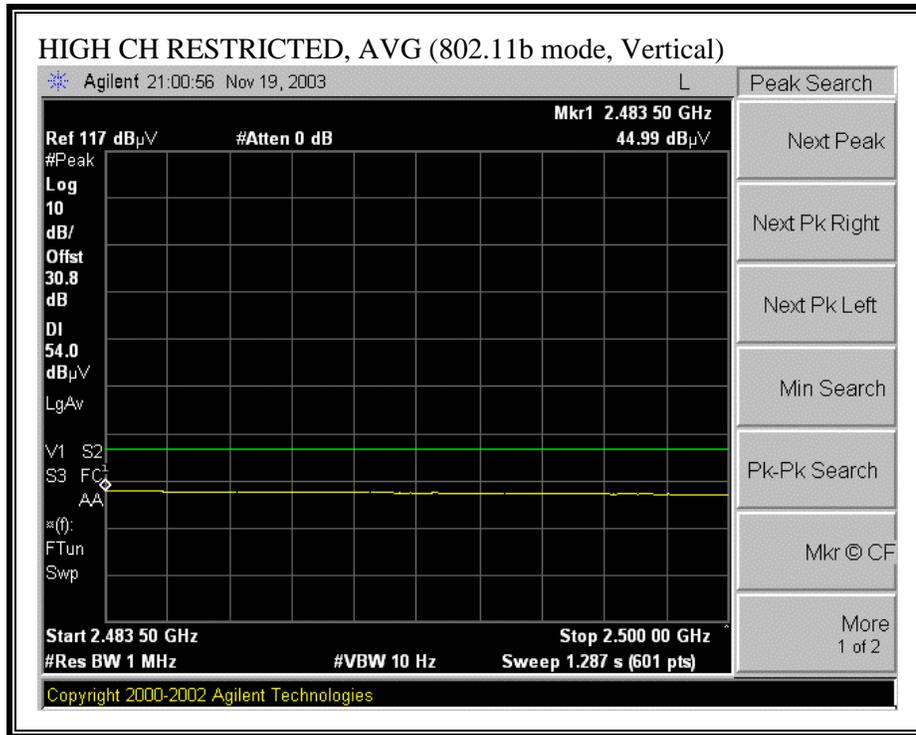


**HARMONICS AND SPURIOUS EMISSIONS (b MODE)**


11/24/03 <b>High Frequency Measurement</b> Compliance Certification Services, Morgan Hill Open Field Site  Test Engr: Thanh Nguyen Project #:03I2353 Company: SONY Corporation (TOKYO) EUT Descrip.: Wireless LAN PC Card. EUT M/N: PCWA-C800S (FCC ID: AK8PCWA800S) Test Target: FCC Part 15.247 Mode Oper: b Mode Tx .  Test Equipment: <table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td style="background-color: #e0f0ff;">EMCO Horn 1-18GHz</td> <td style="background-color: #e0f0ff;">Pre-amplifier 1-26GHz</td> <td style="background-color: #e0f0ff;">Spectrum Analyzer</td> <td style="background-color: #e0f0ff;">Horn &gt; 18GHz</td> </tr> <tr> <td>T73; S/N: 6717 @3m</td> <td>T87 Miteq 924342</td> <td>Agilent E4446A Analyzer</td> <td></td> </tr> </table> <p>Hi Frequency Cables  <input type="checkbox"/> (2 ft) <input checked="" type="checkbox"/> (2 ~ 3 ft) <input type="checkbox"/> (4 ~ 6 ft) <input checked="" type="checkbox"/> (12 ft)</p> <p><b>Peak Measurements:</b> 1 MHz Resolution Bandwidth                  1MHz Video Bandwidth  <b>Average Measurements:</b> 1 MHz Resolution Bandwidth                  10Hz Video Bandwidth</p>															EMCO Horn 1-18GHz	Pre-amplifier 1-26GHz	Spectrum Analyzer	Horn > 18GHz	T73; S/N: 6717 @3m	T87 Miteq 924342	Agilent E4446A Analyzer	
EMCO Horn 1-18GHz	Pre-amplifier 1-26GHz	Spectrum Analyzer	Horn > 18GHz																			
T73; S/N: 6717 @3m	T87 Miteq 924342	Agilent E4446A Analyzer																				
f GHz	Dist feet	Read dBuV	Pk dBuV	Lead Avg dB/m	AF dB	Amp dB	D Corr dB	HPF	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes							
Tx Low Channel 2.412GHz																						
4.824	9.8	46.7	38.7	33.4	3.1	-44.7	0.0	1.0	39.5	31.5	74.0	54.0	-34.5	-22.5	V							
7.236	9.8	47.5	38.2	35.7	4.1	-44.6	0.0	1.0	43.7	34.4	74.0	54.0	-30.3	-19.6	V							
4.824	9.8	49.3	39.5	33.4	3.1	-44.7	0.0	1.0	42.1	32.3	74.0	54.0	-31.9	-21.7	H							
7.236	9.8	51.8	41.4	35.7	4.1	-44.6	0.0	1.0	48.0	37.6	74.0	54.0	-26.0	-16.4	H							
TX at MID Channel 2.437GHZ																						
4.874	9.8	49.0	37.6	33.4	3.2	-44.7	0.0	1.0	41.8	30.4	74.0	54.0	-32.2	-23.6	V							
7.311	9.8	47.7	37.2	35.8	4.1	-44.5	0.0	1.0	44.0	33.6	74.0	54.0	-30.0	-20.4	V							
4.874	9.8	50.2	42.1	33.4	3.2	-44.7	0.0	1.0	43.1	34.9	74.0	54.0	-30.9	-19.1	H							
7.311	9.8	48.4	37.1	35.8	4.1	-44.5	0.0	1.0	44.8	33.4	74.0	54.0	-29.2	-20.6	H							
Tx at high channel 4.62GHz																						
4.924	9.8	49.8	40.0	33.5	3.2	-44.8	0.0	1.0	42.6	32.9	74.0	54.0	-31.4	-21.1	V							
7.386	9.8	46.7	37.0	36.0	4.1	-44.5	0.0	1.0	43.3	33.6	74.0	54.0	-30.7	-20.4	V							
4.924	9.8	50.4	43.6	33.5	3.2	-44.8	0.0	1.0	43.3	36.4	74.0	54.0	-30.7	-17.6	H							
7.386	9.8	46.9	37.1	36.0	4.1	-44.5	0.0	1.0	43.5	33.7	74.0	54.0	-30.5	-20.3	H							
No more harmonics or spurious emission above the noise floor in restricted bands																						
Dist	Distance to Antenna					D Corr	Distance Correct to 3 meters					Pk Lim	Peak Field Strength Limit									
Read	Analyzer Reading					Avg	Average Field Strength @ 3 m					Avg Mar	Margin vs. Average Limit									
AF	Antenna Factor					Peak	Calculated Peak Field Strength					Pk Mar	Margin vs. Peak Limit									
CL	Cable Loss					HPF	High Pass Filter															

**RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, HORIZONTAL)**

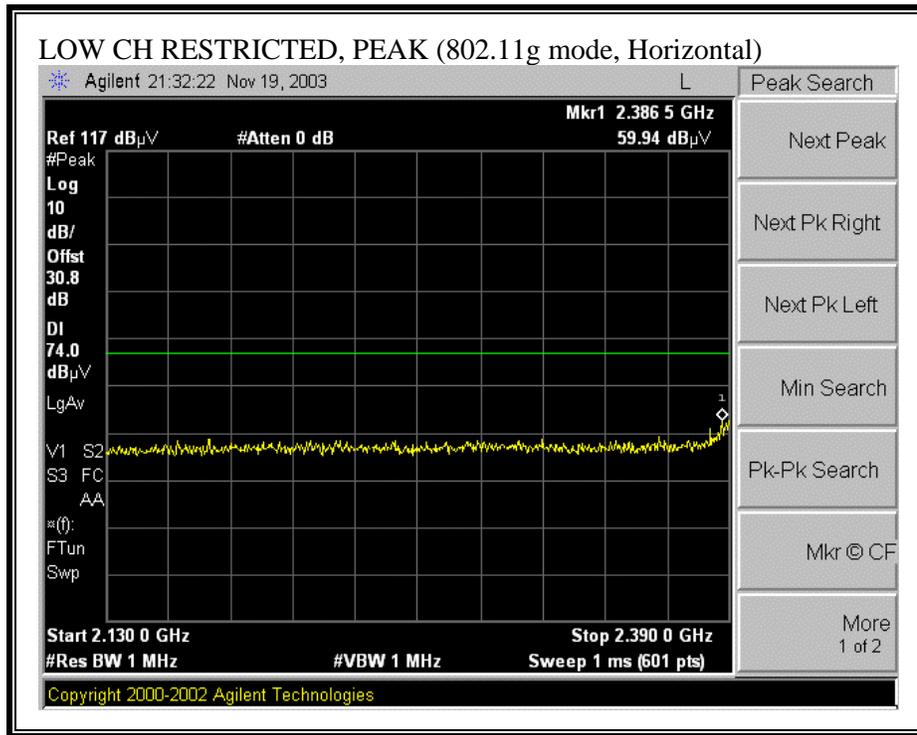


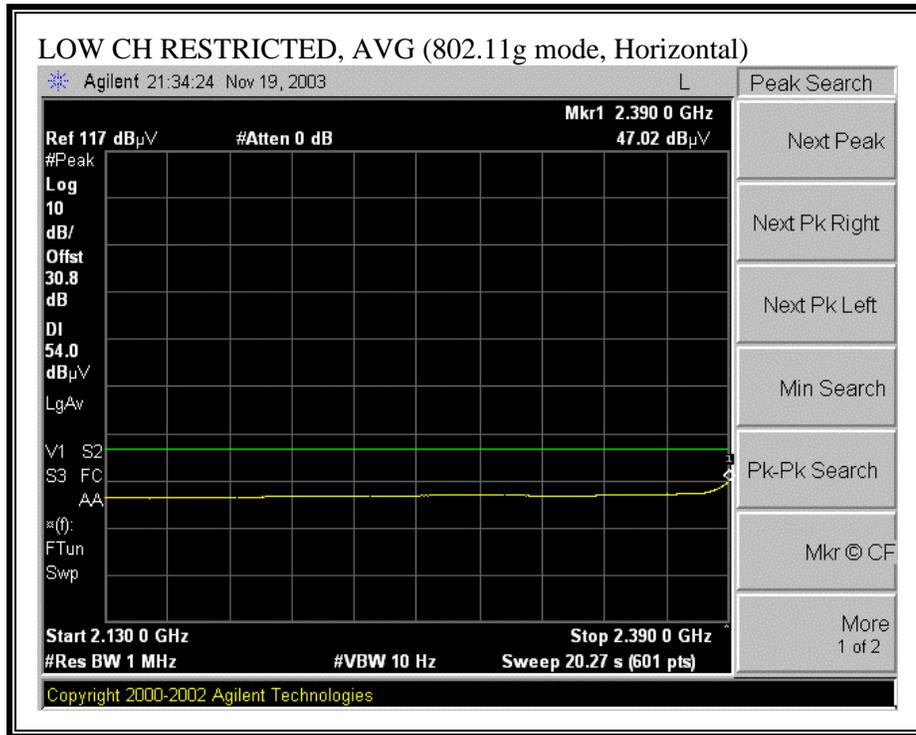




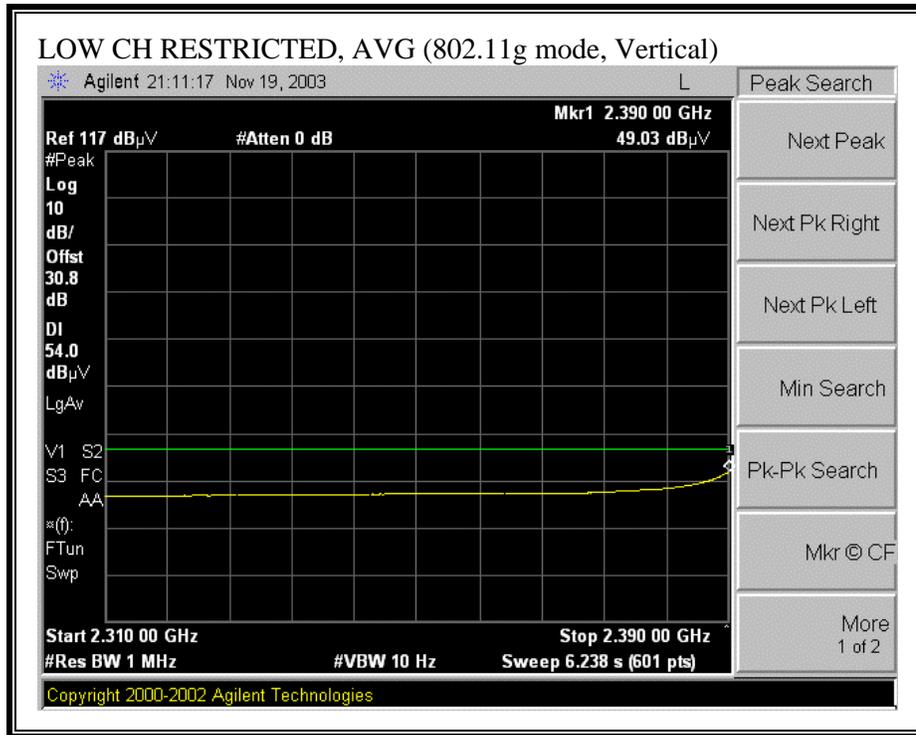



**RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, HORIZONTAL)**

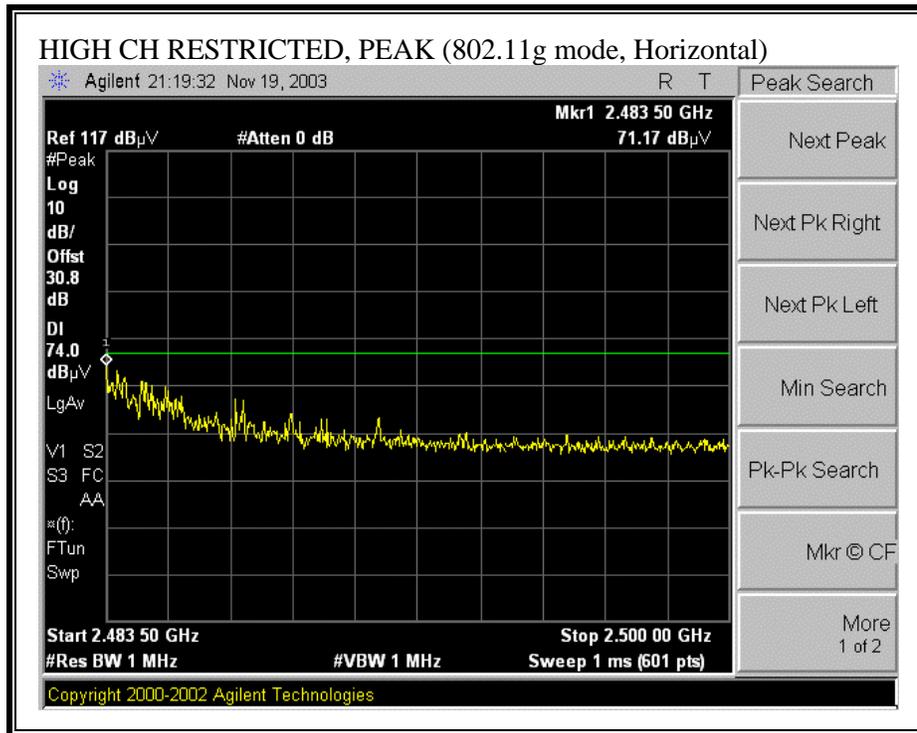

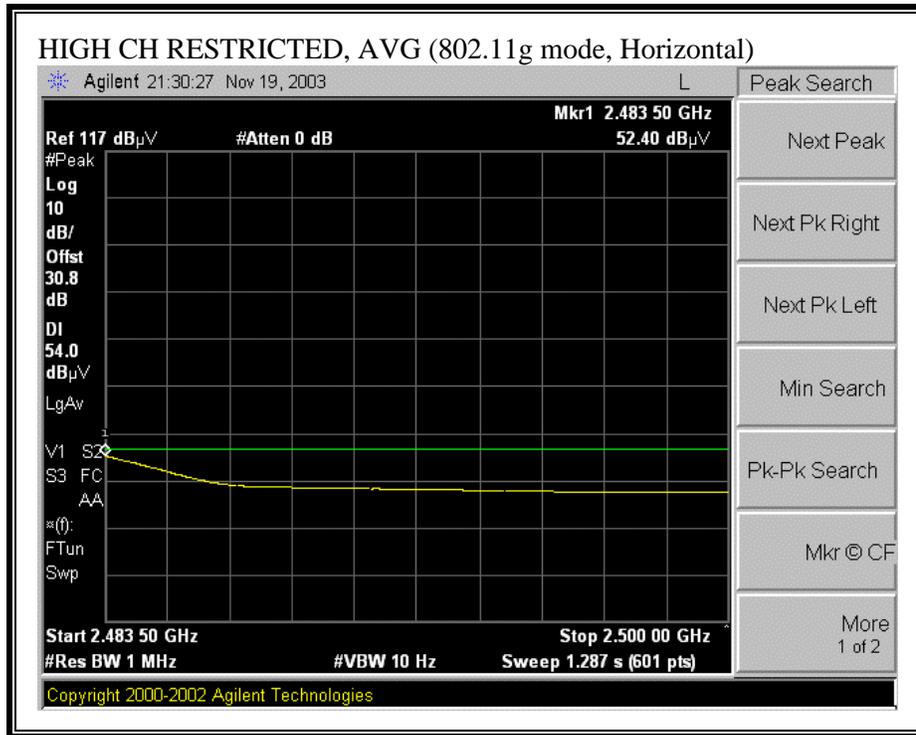

**RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, VERTICAL)**

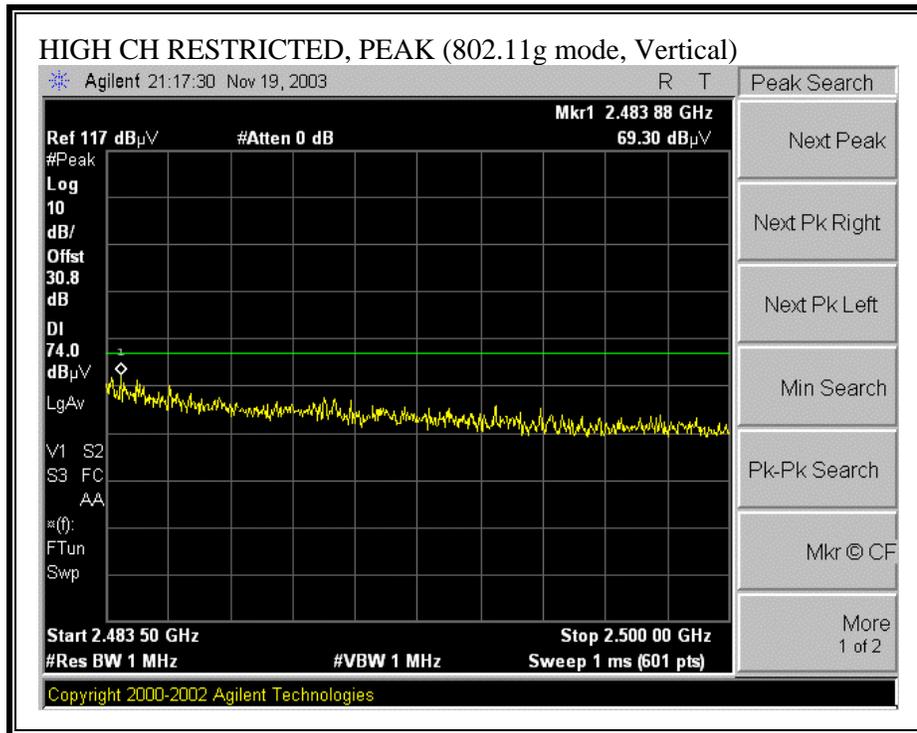

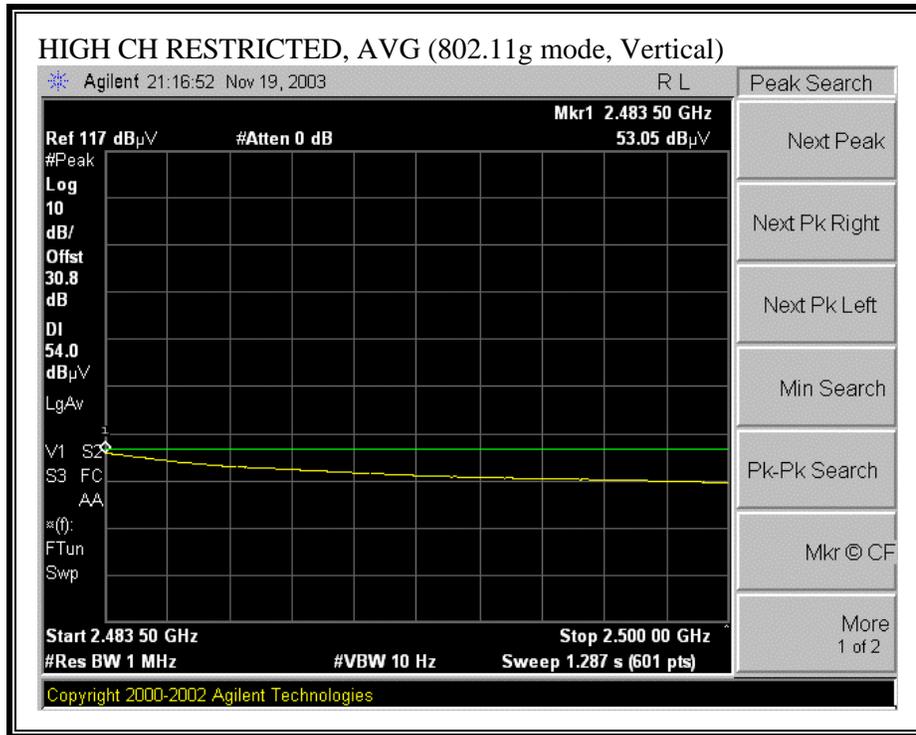

**HARMONICS AND SPURIOUS EMISSIONS (g MODE)**


11/24/03 <b>High Frequency Measurement</b> Compliance Certification Services, Morgan Hill Open Field Site  Test Engr: Thanh Nguyen Project #:03I2353 Company: SONY Corporation (TOKYO) EUT Descrip.: Wireless LAN PC Card. EUT M/N: PCWA-C800S (FCC ID: AK8PCWA800S) Test Target: FCC Part 15.247 Mode Oper: g Mode normal Tx .  Test Equipment: <table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td style="width:25%; padding: 2px;">EMCO Horn 1-18GHz T73; S/N: 6717 @3m</td> <td style="width:25%; padding: 2px;">Pre-amplifier 1-26GHz T87 Miteq 924342</td> <td style="width:25%; padding: 2px;">Spectrum Analyzer Agilent E4446A Analyzer</td> <td style="width:25%; padding: 2px;">Horn &gt; 18GHz</td> </tr> </table> <p>Hi Frequency Cables  <input type="checkbox"/> (2 ft) <input checked="" type="checkbox"/> (2 ~ 3 ft) <input type="checkbox"/> (4 ~ 6 ft) <input checked="" type="checkbox"/> (12 ft)</p> <p><b>Peak Measurements:</b> 1 MHz Resolution Bandwidth                  1MHz Video Bandwidth  <b>Average Measurements:</b> 1 MHz Resolution Bandwidth                  10Hz Video Bandwidth</p>																EMCO Horn 1-18GHz T73; S/N: 6717 @3m	Pre-amplifier 1-26GHz T87 Miteq 924342	Spectrum Analyzer Agilent E4446A Analyzer	Horn > 18GHz
EMCO Horn 1-18GHz T73; S/N: 6717 @3m	Pre-amplifier 1-26GHz T87 Miteq 924342	Spectrum Analyzer Agilent E4446A Analyzer	Horn > 18GHz																
f GHz	Dist feet	Read dBuV	Pk dBuV	Lead dB/m	AF dB	Amp dB	D Corr dB	HPF	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes				
Tx Low Channel 2.412GHz																			
4.824	9.8	45.6	36.4	33.4	3.1	-44.7	0.0	1.0	38.4	29.2	74.0	54.0	-35.6	-24.8	V				
7.236	9.8	45.6	36.8	35.7	4.1	-44.6	0.0	1.0	41.7	32.9	74.0	54.0	-32.3	-21.1	V				
4.824	9.8	44.5	36.7	33.4	3.1	-44.7	0.0	1.0	37.3	29.5	74.0	54.0	-36.7	-24.5	H				
7.236	9.8	45.6	37.2	35.7	4.1	-44.6	0.0	1.0	41.7	33.4	74.0	54.0	-32.3	-20.6	H				
TX at MID Channel 2.437GHZ																			
4.874	9.8	44.5	36.8	33.4	3.2	-44.7	0.0	1.0	37.3	29.6	74.0	54.0	-36.7	-24.4	V				
7.311	9.8	48.1	37.1	35.8	4.1	-44.5	0.0	1.0	44.5	33.5	74.0	54.0	-29.5	-20.5	V				
4.874	9.8	46.4	37.6	33.4	3.2	-44.7	0.0	1.0	39.2	30.4	74.0	54.0	-34.8	-23.6	H				
7.311	9.8	46.2	37.1	35.8	4.1	-44.5	0.0	1.0	42.6	33.4	74.0	54.0	-31.4	-20.6	H				
Tx at high channel 4.62GHz																			
4.924	9.8	53.3	39.5	33.5	3.2	-44.8	0.0	1.0	46.1	32.3	74.0	54.0	-27.9	-21.7	V				
7.386	9.8	47.8	37.1	36.0	4.1	-44.5	0.0	1.0	44.4	33.7	74.0	54.0	-29.6	-20.3	V				
4.924	9.8	50.9	39.1	33.5	3.2	-44.8	0.0	1.0	43.8	31.9	74.0	54.0	-30.2	-22.1	H				
7.386	9.8	48.2	37.2	36.0	4.1	-44.5	0.0	1.0	44.8	33.8	74.0	54.0	-29.2	-20.2	H				
No more harmonics or spurious emission above the noise floor in restricted bands																			
Dist	Distance to Antenna					D Corr	Distance Correct to 3 meters					Pk Lim	Peak Field Strength Limit						
Read	Analyzer Reading					Avg	Average Field Strength @ 3 m					Avg Mar	Margin vs. Average Limit						
AF	Antenna Factor					Peak	Calculated Peak Field Strength					Pk Mar	Margin vs. Peak Limit						
CL	Cable Loss					HPF	High Pass Filter												

**HARMONICS AND SPURIOUS EMISSIONS (g TURBO MODE)**

11/24/03 <b>High Frequency Measurement</b> Compliance Certification Services, Morgan Hill Open Field Site  Test Engr: Thanh Nguyen Project #: 03I2353 Company: SONY Corporation (TOKYO) EUT Descrip.: Wireless LAN PC Card. EUT M/N: PCWA-C800S (FCC ID: AK8PCWA800S) Test Target: FCC Part 15.247 Mode Oper: g Mode TURBO Tx .  <b>Test Equipment:</b> <table style="width: 100%; border: none;"> <tr> <td style="border: 1px solid black; padding: 2px;">EMCO Horn 1-18GHz</td> <td style="border: 1px solid black; padding: 2px;">Pre-amplifier 1-26GHz</td> <td style="border: 1px solid black; padding: 2px;">Spectrum Analyzer</td> <td style="border: 1px solid black; padding: 2px;">Horn &gt; 18GHz</td> </tr> <tr> <td style="border: 1px solid black; padding: 2px;">T73; S/N: 6717 @3m</td> <td style="border: 1px solid black; padding: 2px;">T87 Miteq 924342</td> <td style="border: 1px solid black; padding: 2px;">Agilent E4446A Analyzer</td> <td style="border: 1px solid black; padding: 2px;"></td> </tr> </table> <p>Hi Frequency Cables  <input type="checkbox"/> (2 ft) <input checked="" type="checkbox"/> (2 ~ 3 ft) <input type="checkbox"/> (4 ~ 6 ft) <input checked="" type="checkbox"/> (12 ft)</p> <table style="width: 100%; border: none;"> <tr> <td style="width: 50%;"><b>Peak Measurements:</b> 1 MHz Resolution Bandwidth 1MHz Video Bandwidth</td> <td style="width: 50%;"><b>Average Measurements:</b> 1 MHz Resolution Bandwidth 10Hz Video Bandwidth</td> </tr> </table>																EMCO Horn 1-18GHz	Pre-amplifier 1-26GHz	Spectrum Analyzer	Horn > 18GHz	T73; S/N: 6717 @3m	T87 Miteq 924342	Agilent E4446A Analyzer		<b>Peak Measurements:</b> 1 MHz Resolution Bandwidth 1MHz Video Bandwidth	<b>Average Measurements:</b> 1 MHz Resolution Bandwidth 10Hz Video Bandwidth
EMCO Horn 1-18GHz	Pre-amplifier 1-26GHz	Spectrum Analyzer	Horn > 18GHz																						
T73; S/N: 6717 @3m	T87 Miteq 924342	Agilent E4446A Analyzer																							
<b>Peak Measurements:</b> 1 MHz Resolution Bandwidth 1MHz Video Bandwidth	<b>Average Measurements:</b> 1 MHz Resolution Bandwidth 10Hz Video Bandwidth																								
f GHz	Dist feet	Read dBuV	Pk dBuV	Ave dB/m	AF dB	CL dB	Amp dB	D Corr dB	HPF	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes									
TX at MID Channel 2.437GHZ																									
4.874	9.8	46.9	36.6	33.4	3.2	-44.7	0.0	1.0		39.7	29.4	74.0	54.0	-34.3	-24.6	V									
7.311	9.8	45.5	39.6	35.8	4.1	-44.5	0.0	1.0		41.9	36.0	74.0	54.0	-32.1	-18.0	V									
4.874	9.8	45.1	36.7	33.4	3.2	-44.7	0.0	1.0		37.9	29.5	74.0	54.0	-36.1	-24.5	H									
7.311	9.8	47.8	36.9	35.8	4.1	-44.5	0.0	1.0		44.2	33.3	74.0	54.0	-29.8	-20.7	H									
No more harmonics or spurious emission above the noise floor in restricted bands																									
Dist		Distance to Antenna			D Corr		Distance Correct to 3 meters			Pk Lim		Peak Field Strength Limit													
Read		Analyzer Reading			Avg		Average Field Strength @ 3 m			Avg Mar		Margin vs. Average Limit													
AF		Antenna Factor			Peak		Calculated Peak Field Strength			Pk Mar		Margin vs. Peak Limit													
CL		Cable Loss			HPF		High Pass Filter																		


### 7.8.3. WORST-CASE RADIATED EMISSIONS BELOW 1 GHz

#### SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

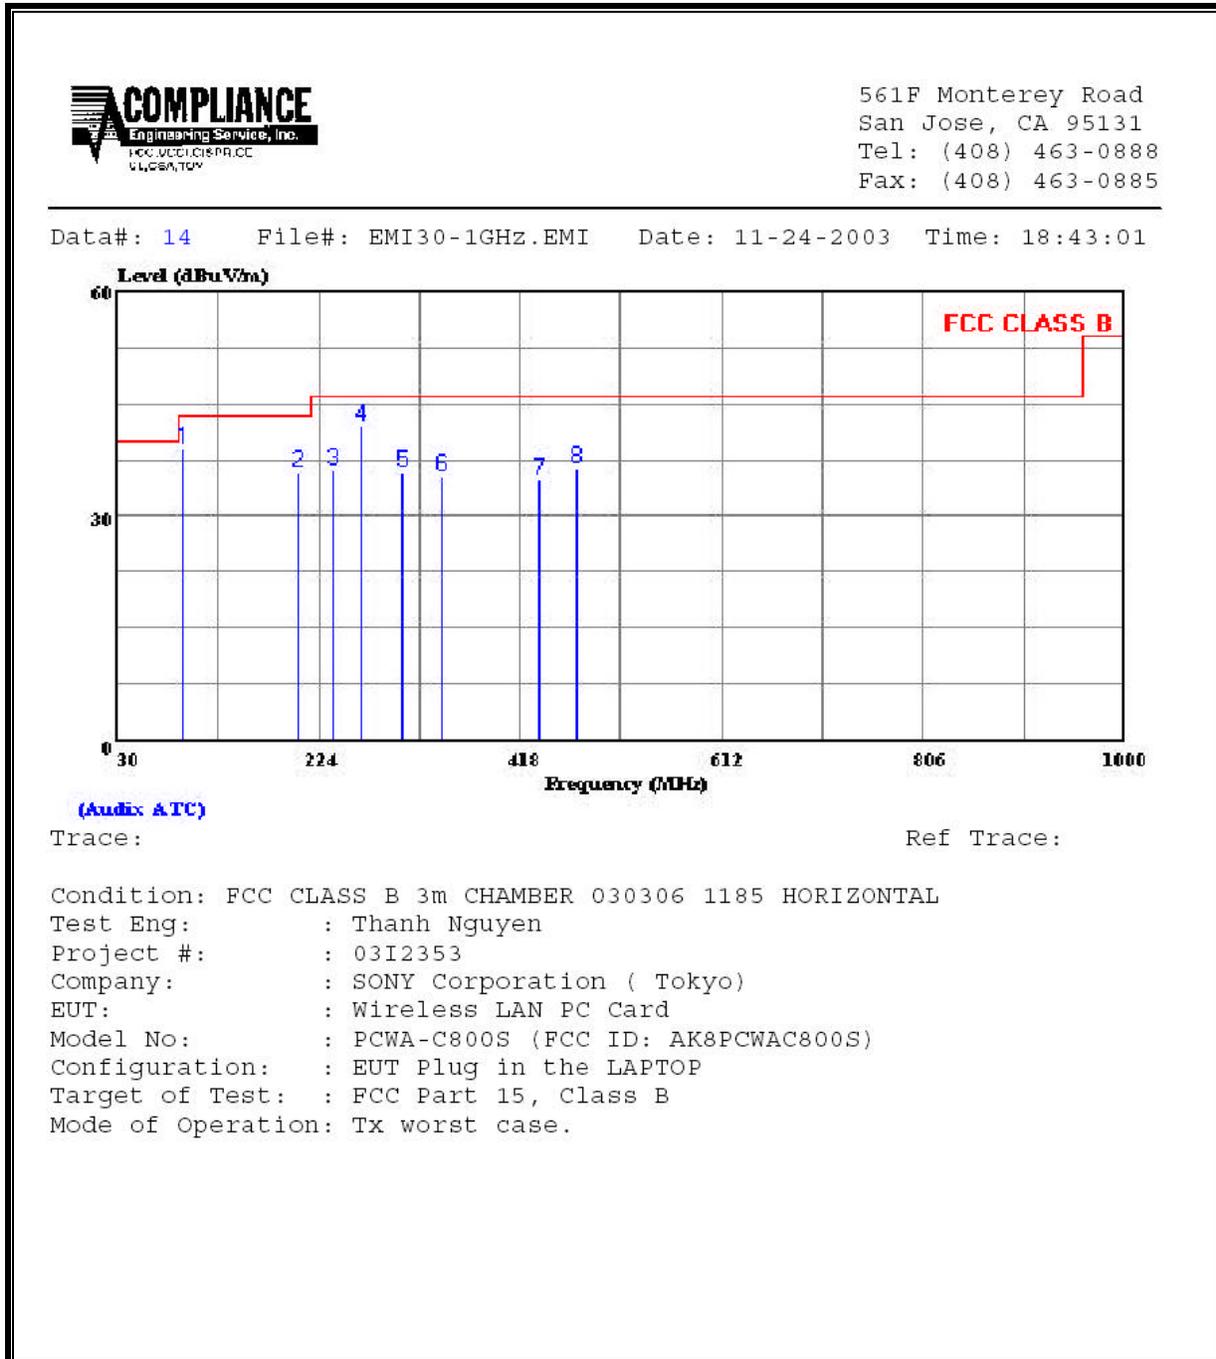

	Freq	Remark	Read Level	Factor	Level	Limit Line	Over Limit
	MHz		dBuV	dB	dBuV/m	dBuV/m	dB
1	92.080	Peak	29.94	9.11	39.05	43.50	-4.45
2	203.630	Peak	25.21	10.59	35.80	43.50	-7.70
3	237.580	Peak	23.48	12.61	36.09	46.00	-9.91
4	264.740	Peak	28.50	13.45	41.95	46.00	-4.05
5	305.480	Peak	21.78	13.96	35.74	46.00	-10.26
6	342.340	Peak	20.25	14.99	35.24	46.00	-10.76
7	436.430	Peak	17.31	17.40	34.71	46.00	-11.29
8	472.320	Peak	18.06	18.24	36.30	46.00	-9.70

**SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)**

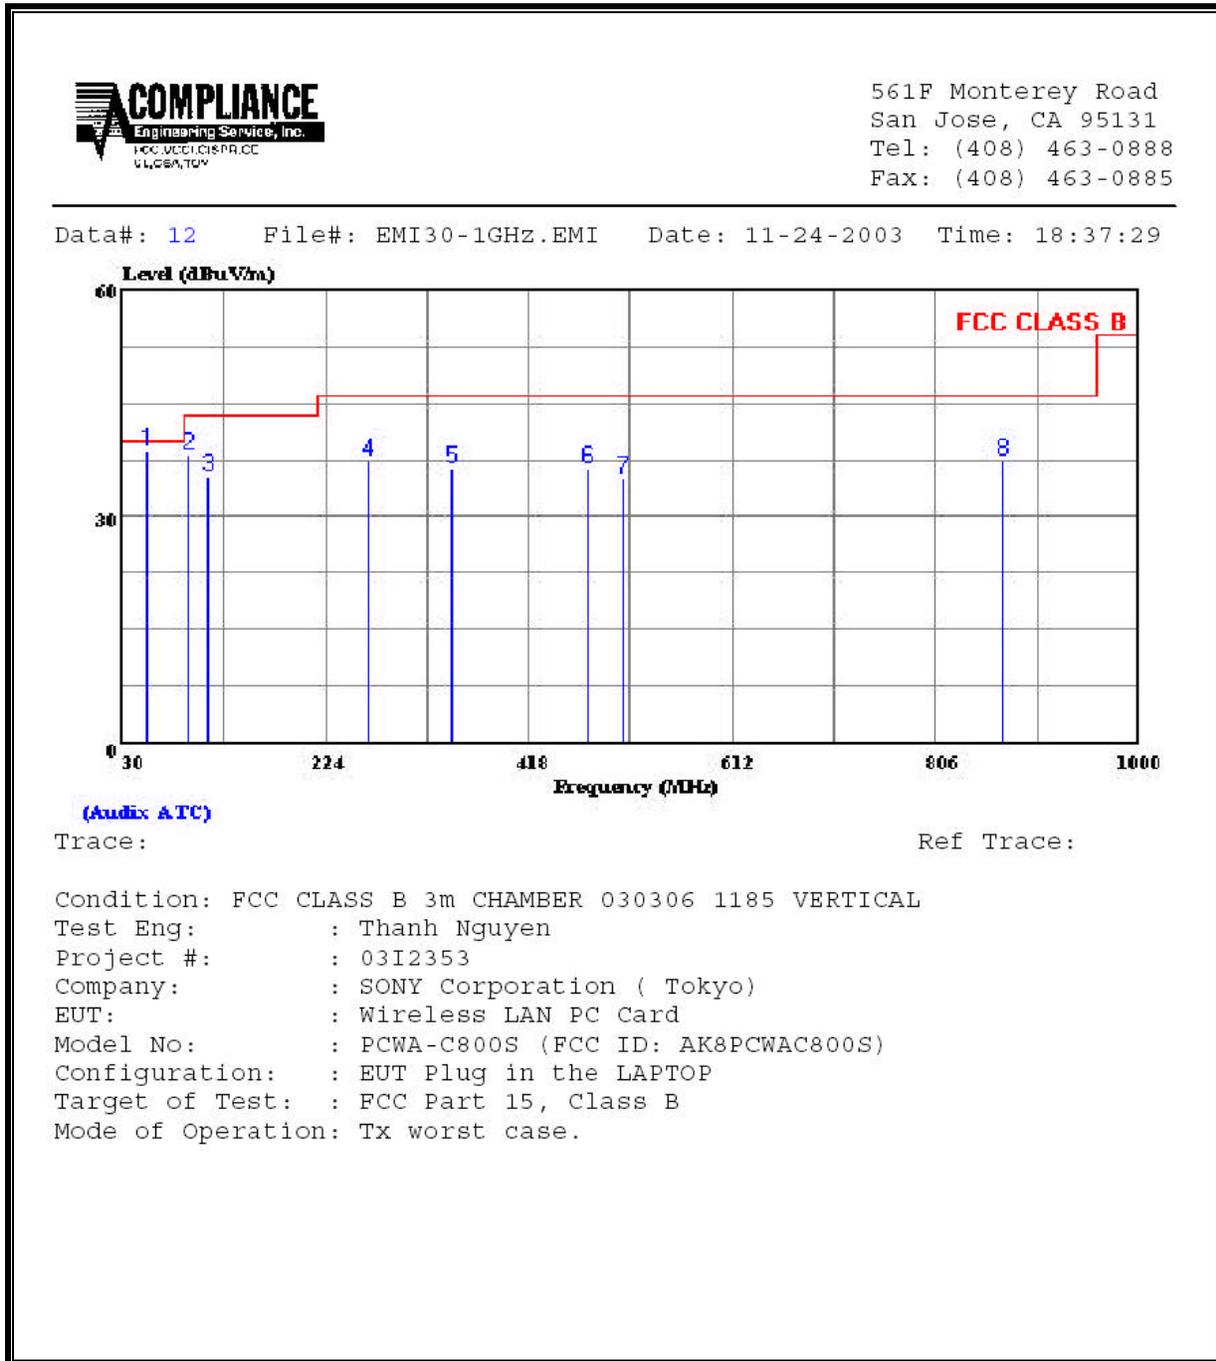

	Freq	Remark	Read Level	Factor	Level	Limit Line	Over Limit
	MHz		dBuV	dB	dBuV/m	dBuV/m	dB
1	52.310	Peak	23.80	14.87	38.67	40.00	-1.33
2	92.080	Peak	28.99	9.11	38.10	43.50	-5.40
3	111.480	Peak	24.50	10.88	35.38	43.50	-8.12
4	264.740	Peak	23.83	13.45	37.28	46.00	-8.72
5	344.280	Peak	21.39	15.07	36.46	46.00	-9.54
6	473.290	Peak	18.19	18.25	36.44	46.00	-9.56
7	507.240	Peak	16.21	18.94	35.15	46.00	-10.85
8	870.990	Peak	14.02	23.49	37.51	46.00	-8.49

## 7.9. POWERLINE CONDUCTED EMISSIONS

### LIMIT

§15.207 (a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

The lower limit applies at the boundary between the frequency ranges.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.

### TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.

The resolution bandwidth is set to 9 kHz for both peak detection and quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

Line conducted data is recorded for both NEUTRAL and HOT lines.


### RESULTS

No non-compliance noted:


**6 WORST EMISSIONS**

CONDUCTED EMISSIONS DATA (115VAC 60Hz)									
Freq.	Reading			Closs	Limit		Margin		Remark
(MHz)	PK (dBuV)	QP (dBuV)	AV (dBuV)	(dB)	QP	AV	QP (dB)	AV (dB)	L1 / L2
0.15	58.10	--	14.84	0.00	66.00	56.00	-7.90	-41.16	L1
4.20	38.94	--	32.02	0.00	56.00	46.00	-17.06	-13.98	L1
0.27	42.80	--	34.72	0.00	62.57	52.57	-19.77	-17.85	L1
0.15	56.76	--	9.30	0.00	66.00	56.00	-9.24	-46.70	L2
0.16	53.48	--	26.63	0.00	65.63	55.63	-12.15	-29.00	L2
4.01	37.76	--	33.12	0.00	56.00	46.00	-18.24	-12.88	L2
6 Worst Data									

**LINE 1 RESULTS**

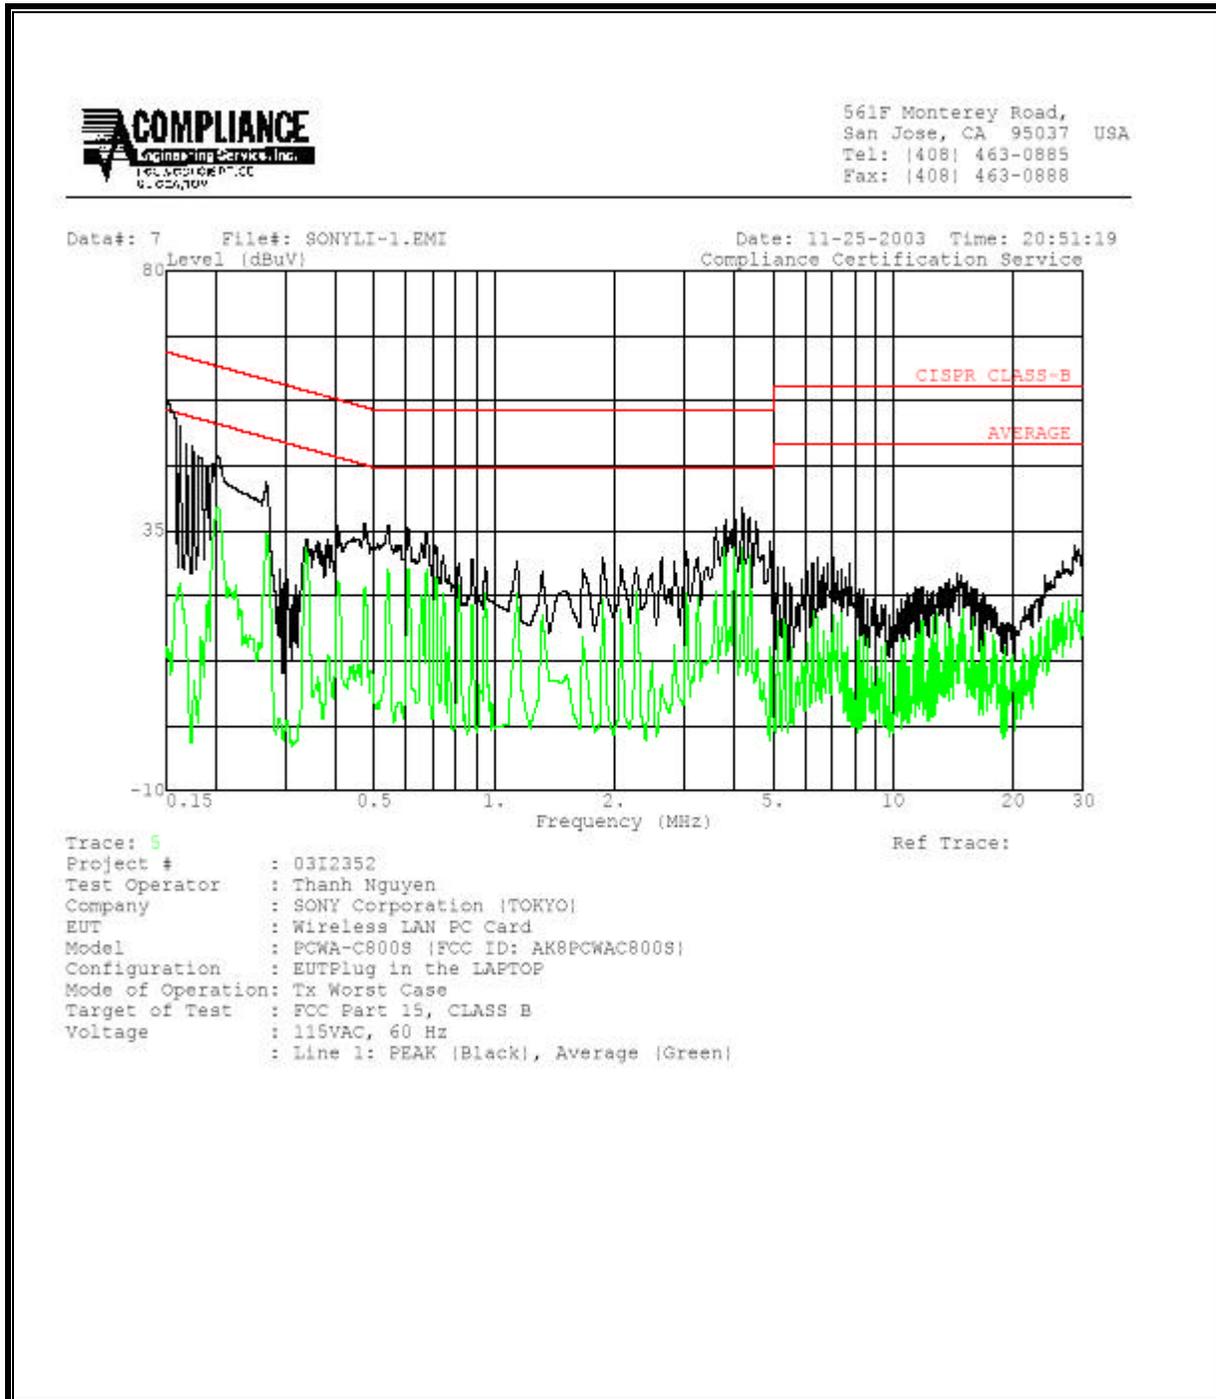


**LINE 2 RESULTS**

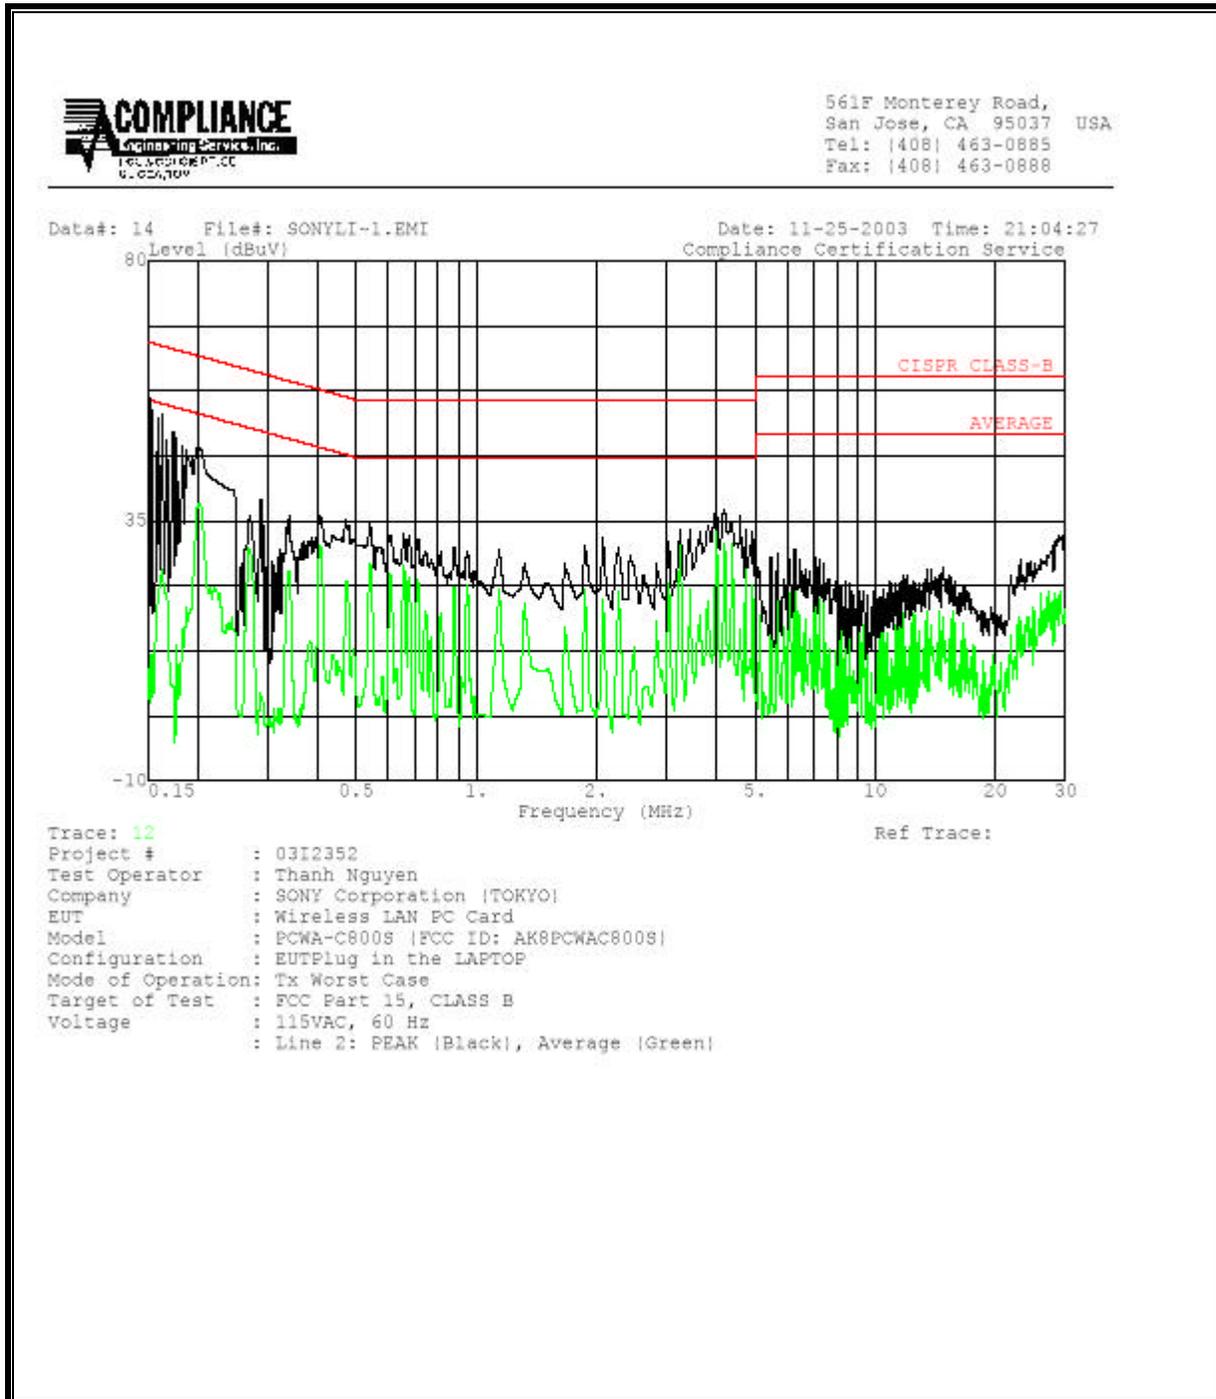


## 8. SETUP PHOTOS

### ANTENNA PORT CONDUCTED RF MEASUREMENT SETUP

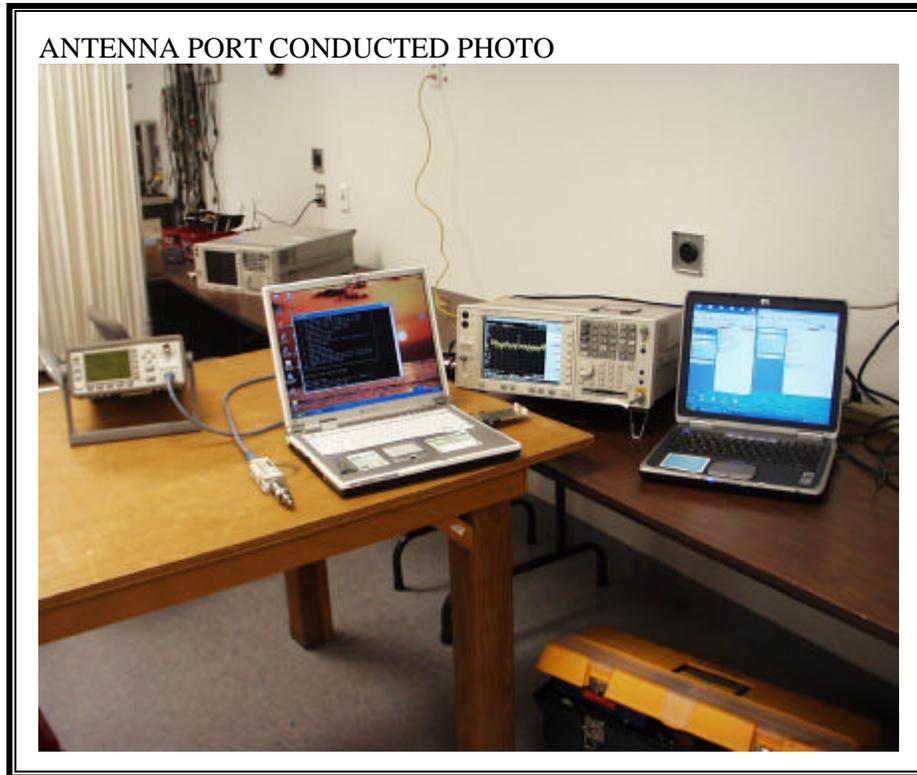


**RADIATED RF MEASUREMENT SETUP**

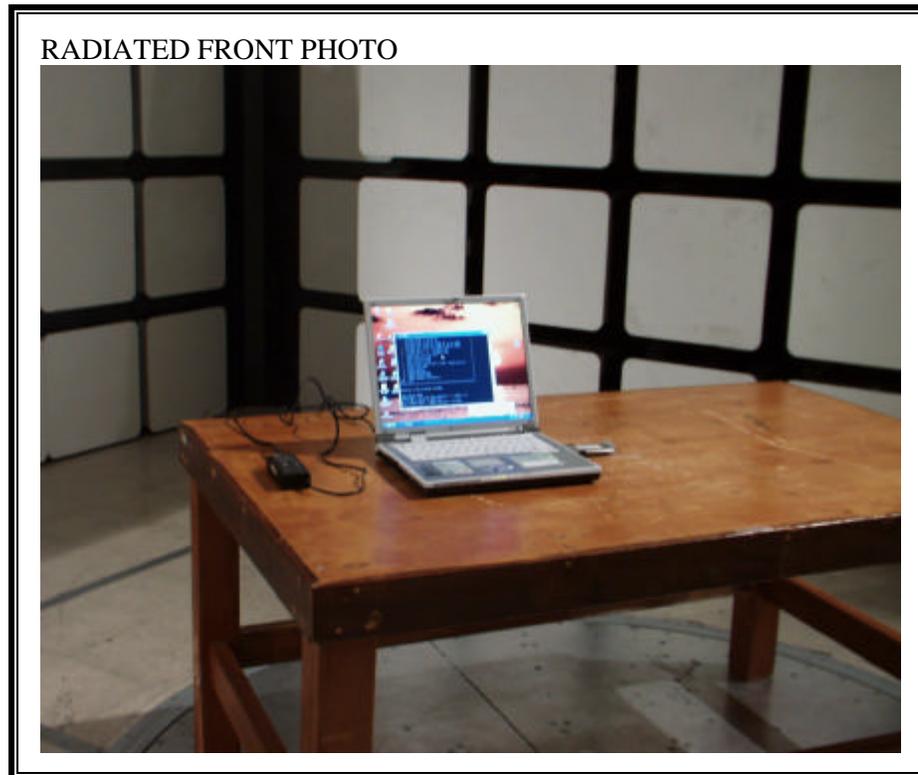



**POWERLINE CONDUCTED EMISSIONS MEASUREMENT SETUP**

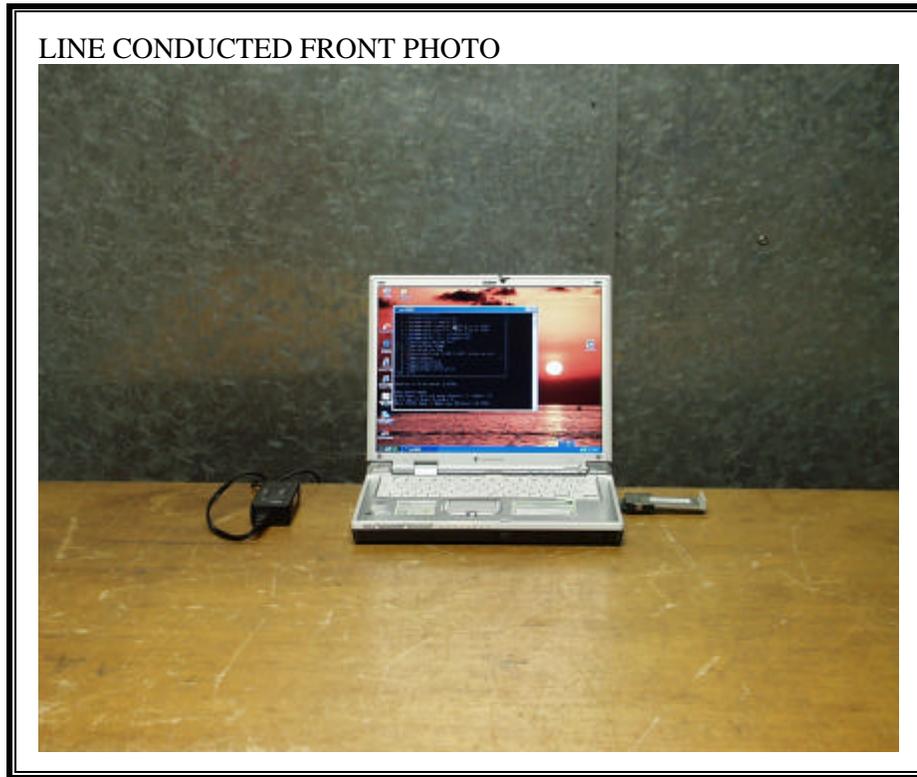



**END OF REPORT**